

Class structure overview



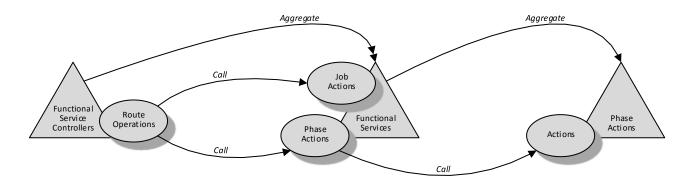


Classes to implement

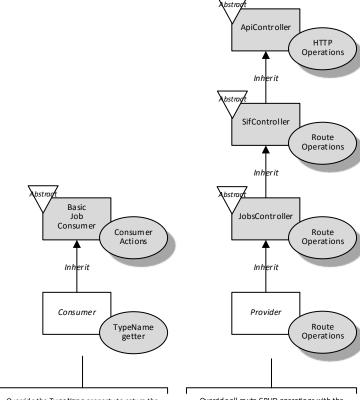


Override the Type Name property to return the name of the functional service (e.g. Payload)

Override all route CRUD operations with the right routing for your functional service, See Paylo ad Provider for an example. Note that the class name must end in the word "Provider", e.g. Payload Provider

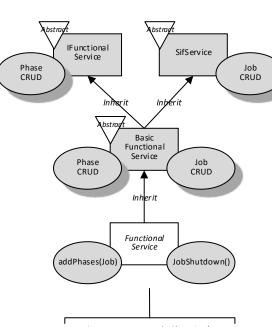

In the constructor set up the PhaseActions dictionary relating a phase name with a IPhaseActions instance. Implement ad dPhases (Job) to configure a new job object with the phases it has with their access rights. Optionally implement JobShutdown() to do some cleanup when a job is deleted

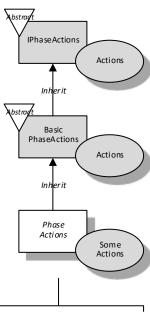

BasicPhaseActions implements all operations with a RejectedException, override the ones needed for the given phase. Data being sent to the phase must be manually deserialised from a string. Similarly, responses must be serialized to a string.