NAME : SHOBHIT VERMA
CLASS : TE COMPUTER
BATCH : D
UID : 2018130062 ROLL NO : 62

CEL 51, DCCN, Monsoon 2020

Lab 4: Prototyping a Network

Objective:
Prototype a network using Packet Tracer

Background
A client has requested that you set up a simple network with two PCs connected to a switch. Verify that the hardware, along with the given configurations, meet the requirements of the client.

Step 1: Set up the network topology

a) Add two PCs and a Cisco 2950T switch

b) Using straight-through cables, connect **PC0** to interface **Fa0/1** on **Switch0** and **PC1** to interface **Fa0/2** on **Switch0**.

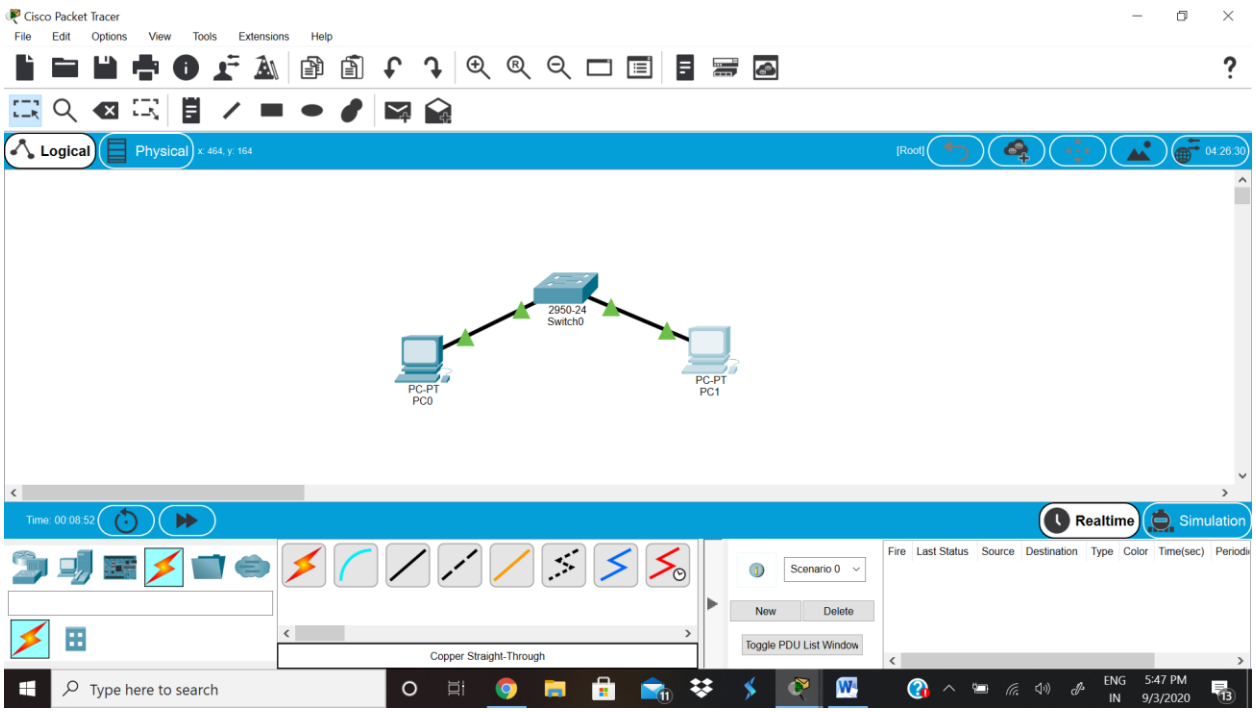

Fig4.1 Shows 2 PC's i.e. PC-1 and PC-2 connected to switch via copper straight-cable

c) Configure PC0 using the **Config** tab in the PC0 configuration window:

a. IP address: 192.168.10.10
b. Subnet Mask 255.255.255.0

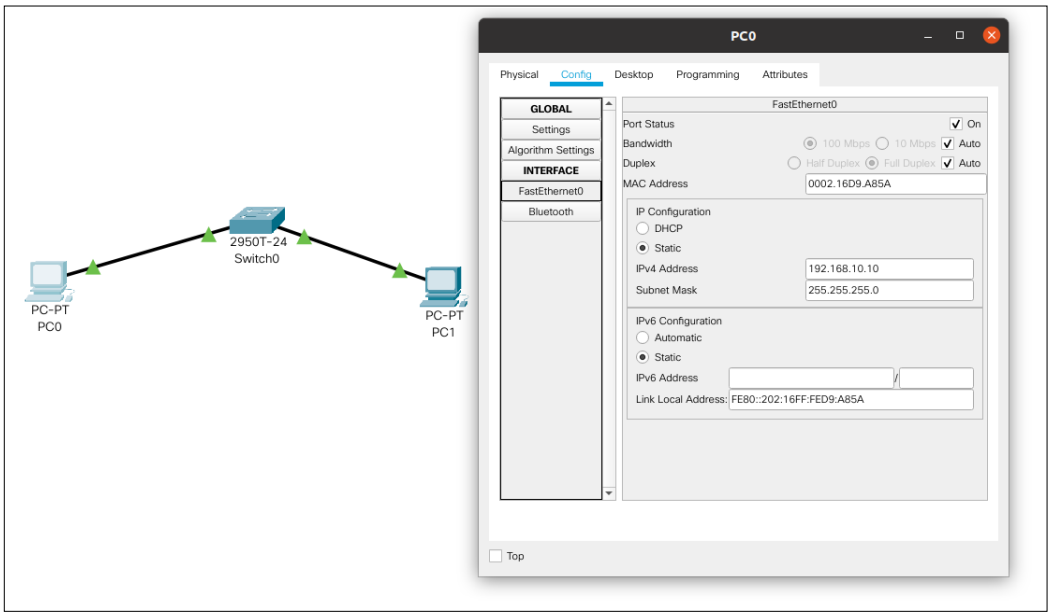

Fig 4.2 shows the config tab of PC-0 with fast ethernet settings.The ip address and subnet mask have been added as 192.168.10.10 and 255.255.255.0 respectively

d) Configure PC1 using the **Config** tab in the PC1 configuration window

a. IP address: 192.168.10.11
b. Subnet Mask 255.255.255.0

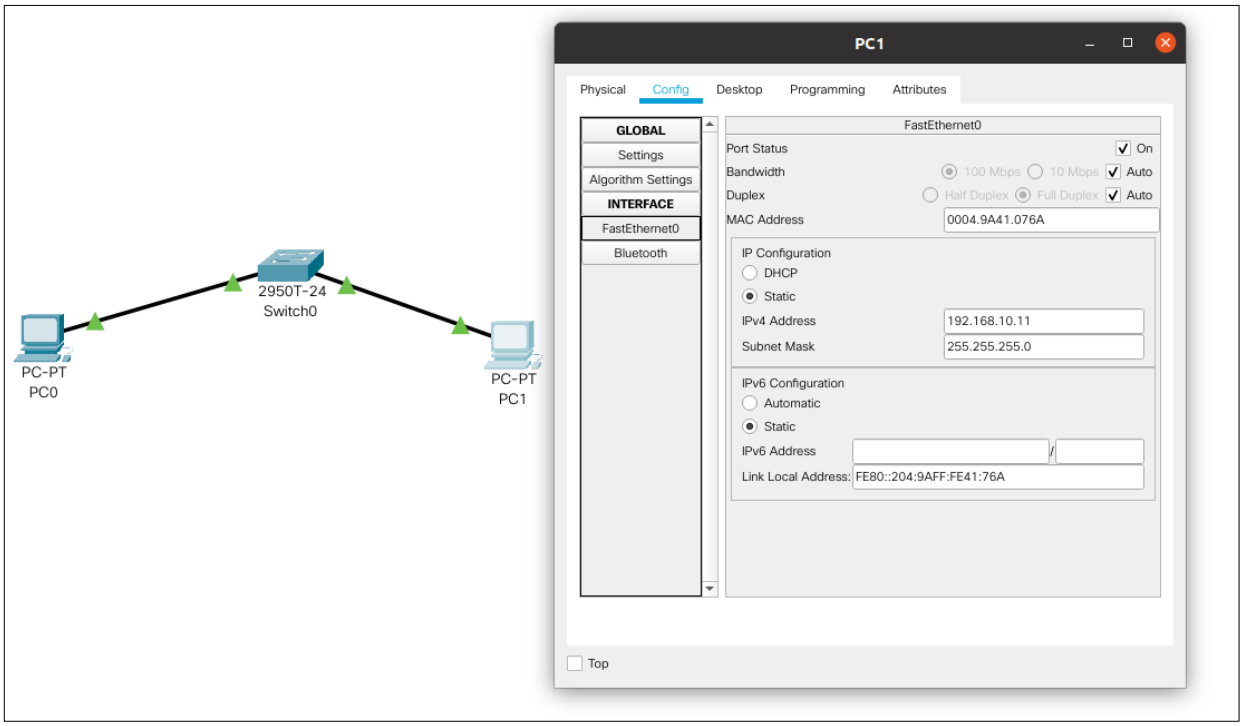

Step 2: Test connectivity from PC0 to PC1

a) Use the **ping** command to test connectivity.
a. Click PC0.
b. Choose the **Desktop** tab.

c. Choose **Command Prompt**.
d. Type: **ping 192.168.10.11** and press *enter*.

b) A successful **ping** indicates the network was configured correctly and the prototype validates the hardware and software configurations. A successful ping should resemble the below output:

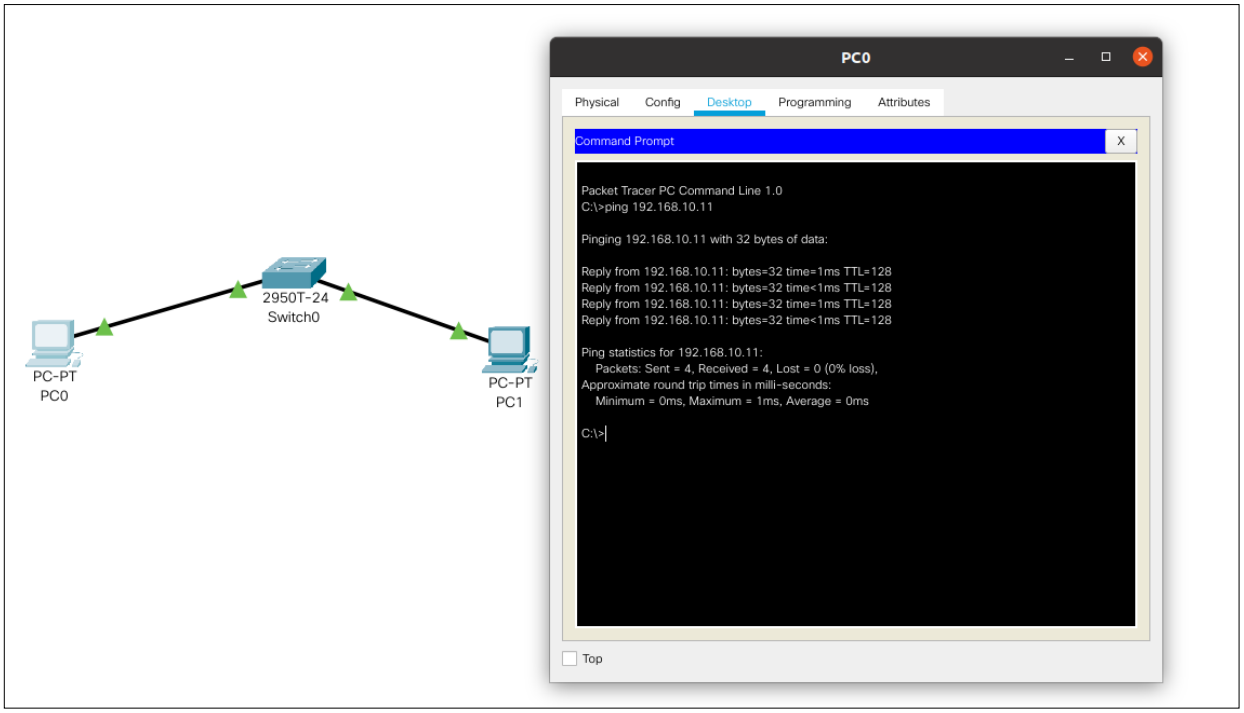

c) Close the configuration window.
d) Click the **Check Results** button at the bottom of the instruction window to check your work..

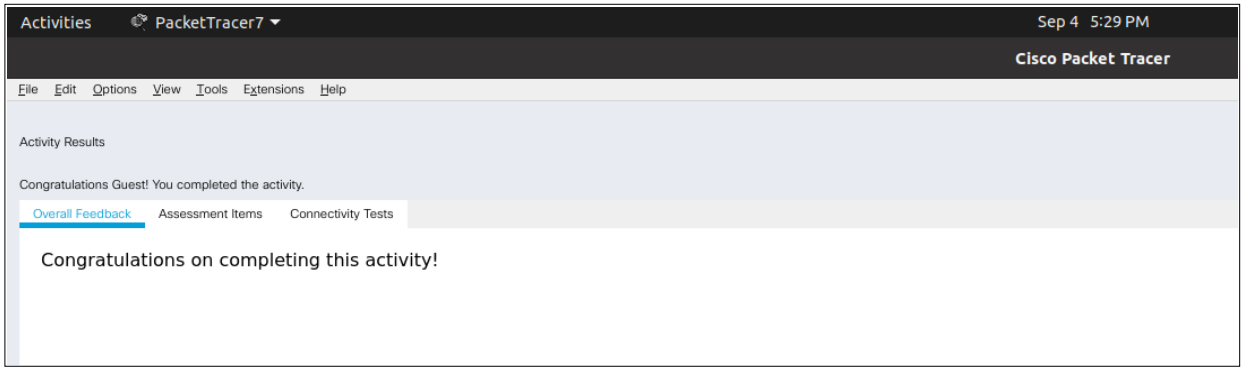

CEL51, DCCN, Monsoon 2020

Lab 4.1: Basic configuration - hostname, motd banner, passwd etc

Objective:

This lab will test your ability to configure basic settings such as hostname, motd banner, encrypted passwords, and terminal options on a Packet Tracer 6.2 simulated Cisco Catalyst switch.



1. Use the local laptop connect to the switch console.

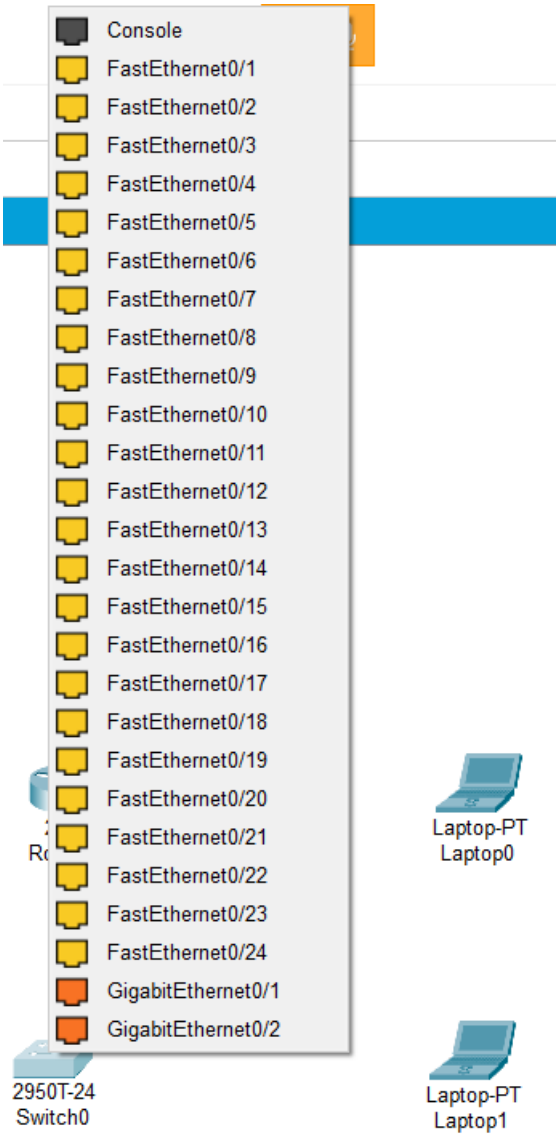

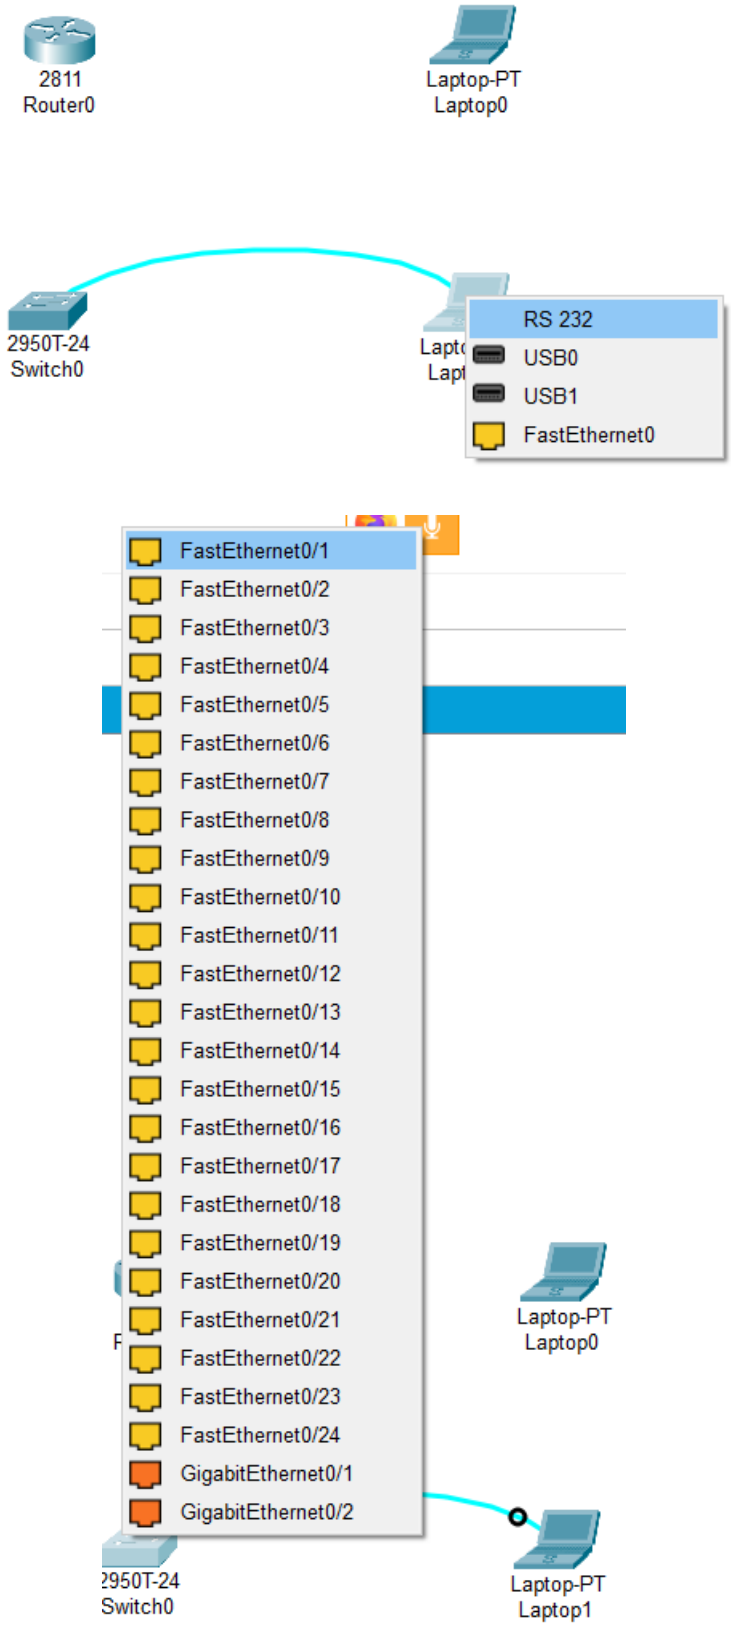
2811
Router0
Laptop-PT
Laptop0
2950T-24
Switch0
RS 232
USB0
USB1
FastEthernet0
FastEthernet0/1
FastEthernet0/2
FastEthernet0/3
FastEthernet0/4
FastEthernet0/5
FastEthernet0/6
FastEthernet0/7
FastEthernet0/8
FastEthernet0/9
FastEthernet0/10
FastEthernet0/11
FastEthernet0/12
FastEthernet0/13
FastEthernet0/14
FastEthernet0/15
FastEthernet0/16
FastEthernet0/17
FastEthernet0/18
FastEthernet0/19
FastEthernet0/20
FastEthernet0/21
FastEthernet0/22
FastEthernet0/23
FastEthernet0/24
GigabitEthernet0/1
GigabitEthernet0/2
Laptop-PT
Laptop0
2950T-24
Switch0
Laptop-PT
Laptop1

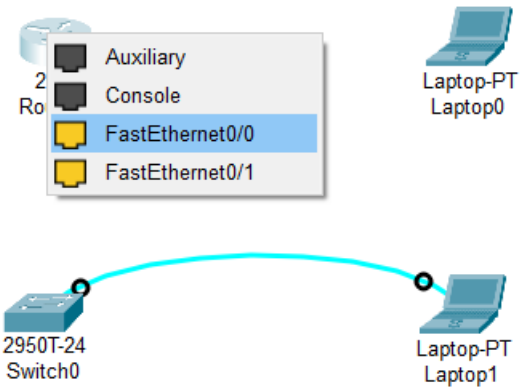
Auxiliary
Console
FastEthernet0/0
FastEthernet0/1
Laptop-PT
Laptop0
2950T-24
Switch0
Laptop-PT
Laptop1

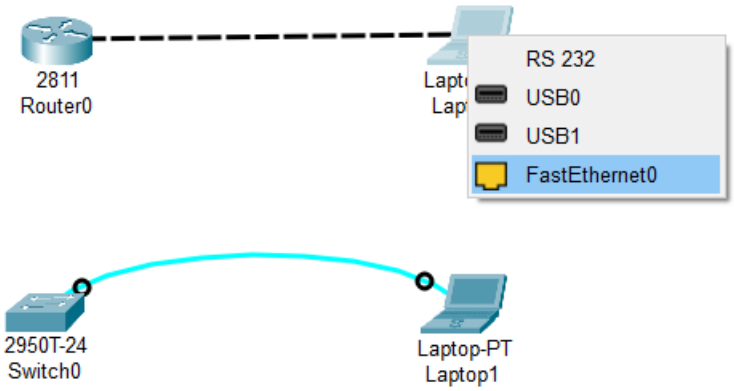
2811
Router0
RS 232
USB0
USB1
FastEthernet0
2950T-24
Switch0
Laptop-PT
Laptop1

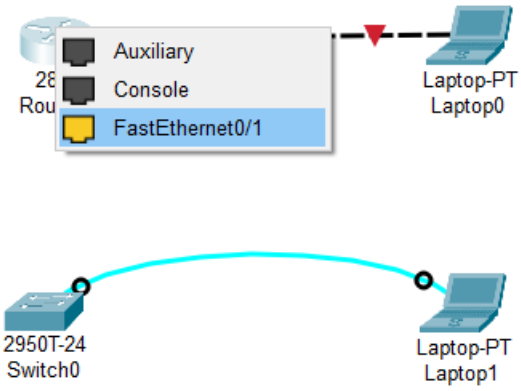
Auxiliary
Console
FastEthernet0/1
Laptop-PT
Laptop0
2950T-24
Switch0
Laptop-PT
Laptop1

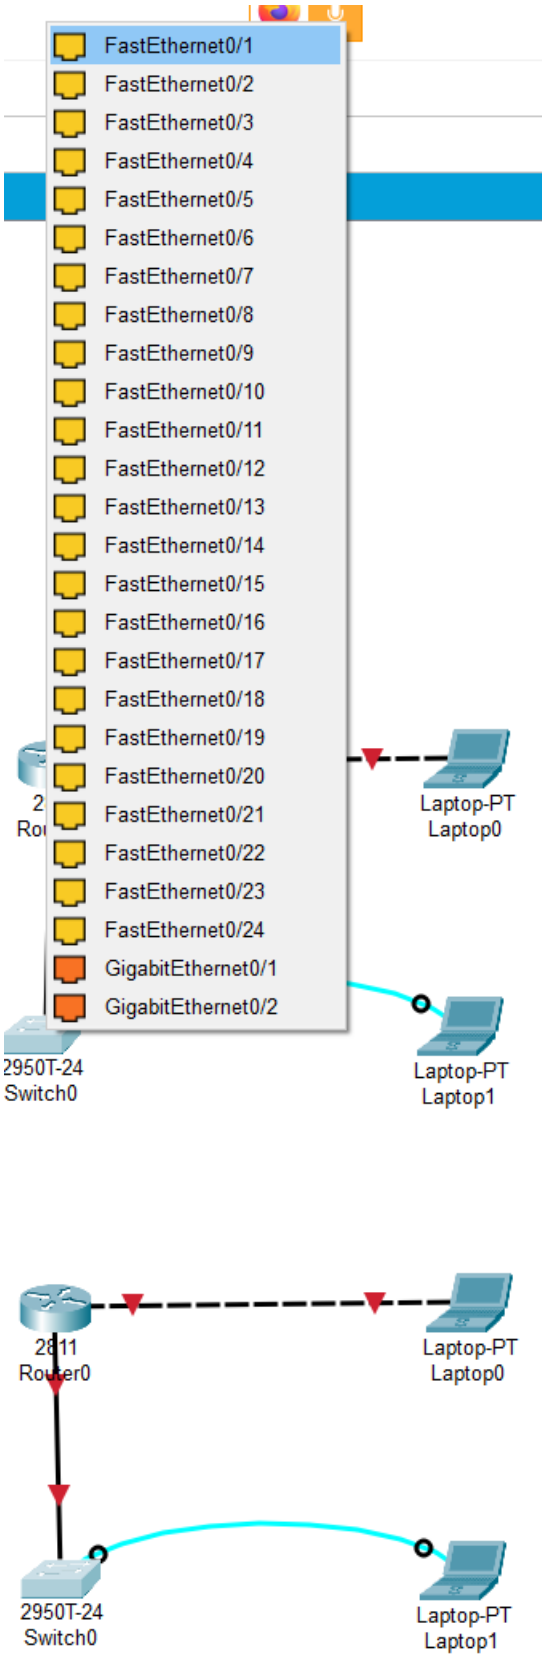

Fig 4.1.1 Shows 2 Laptops ,Remote Laptop connected to router via copper cross-over wire ,Local Laptop connnected to Switch via console and router is connected to switch via copper straight wire

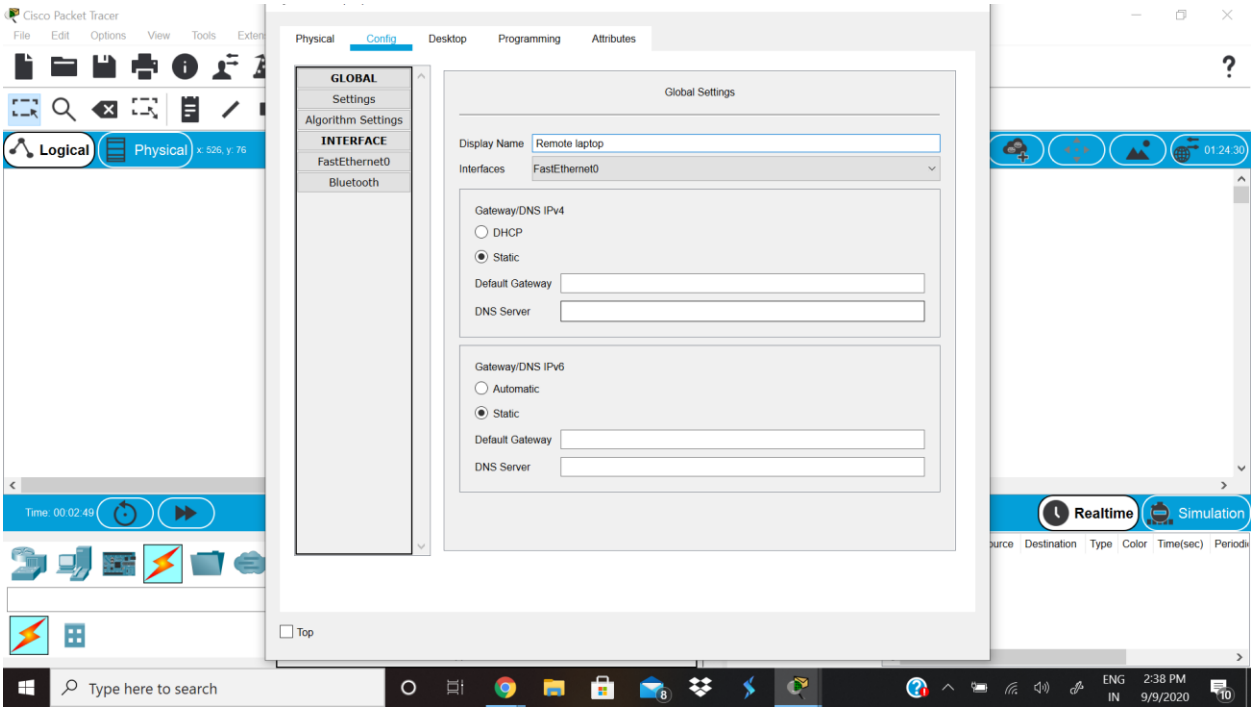

Fig 4.1.2 Shows the config tab of Remote Laptop

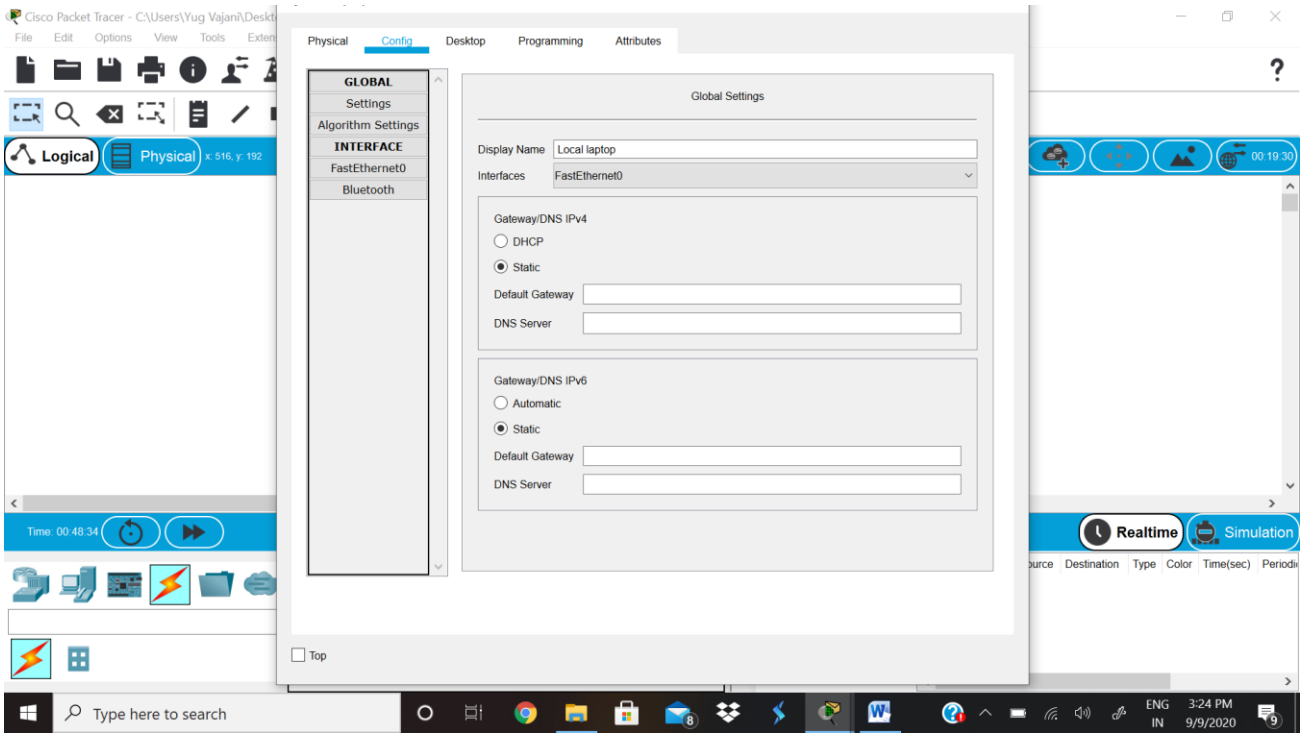

Fig 4.1.3 Shows the config tab of Local Laptop

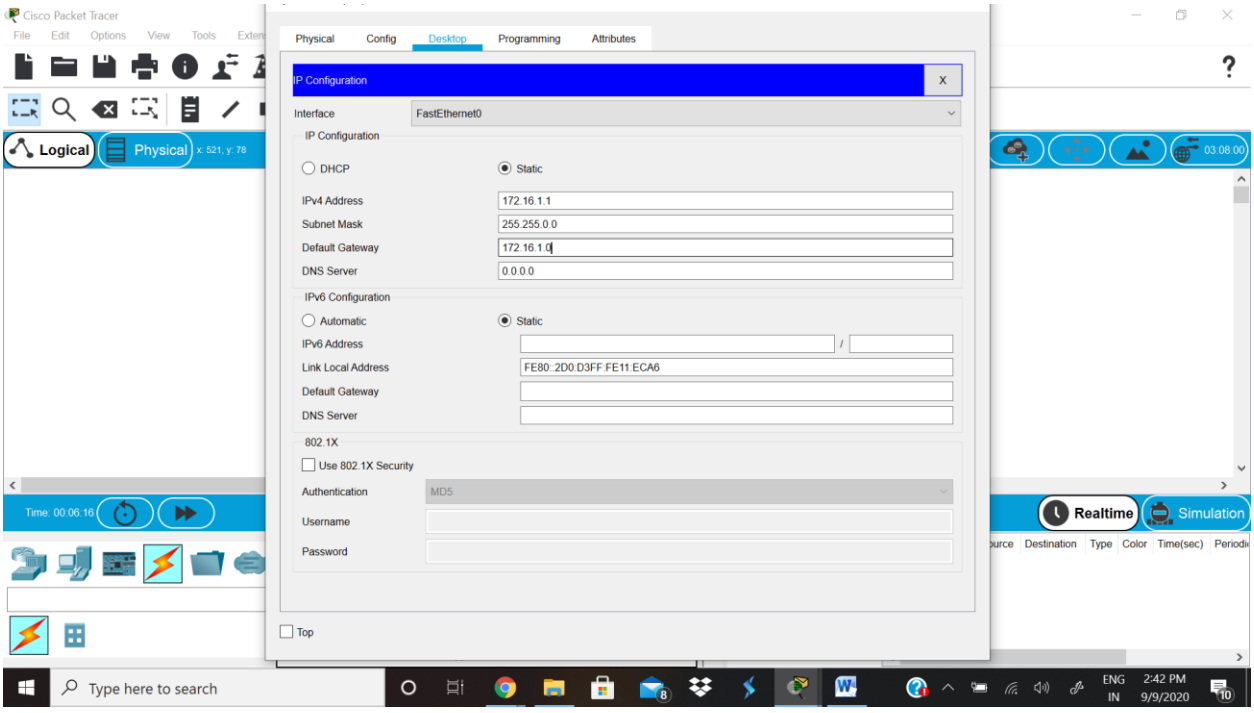

Fig 4.1.4 Shows the IP configuration of remote laptop where IP address is 172.16.1.1 and Default Gateway is 172.16.1.0

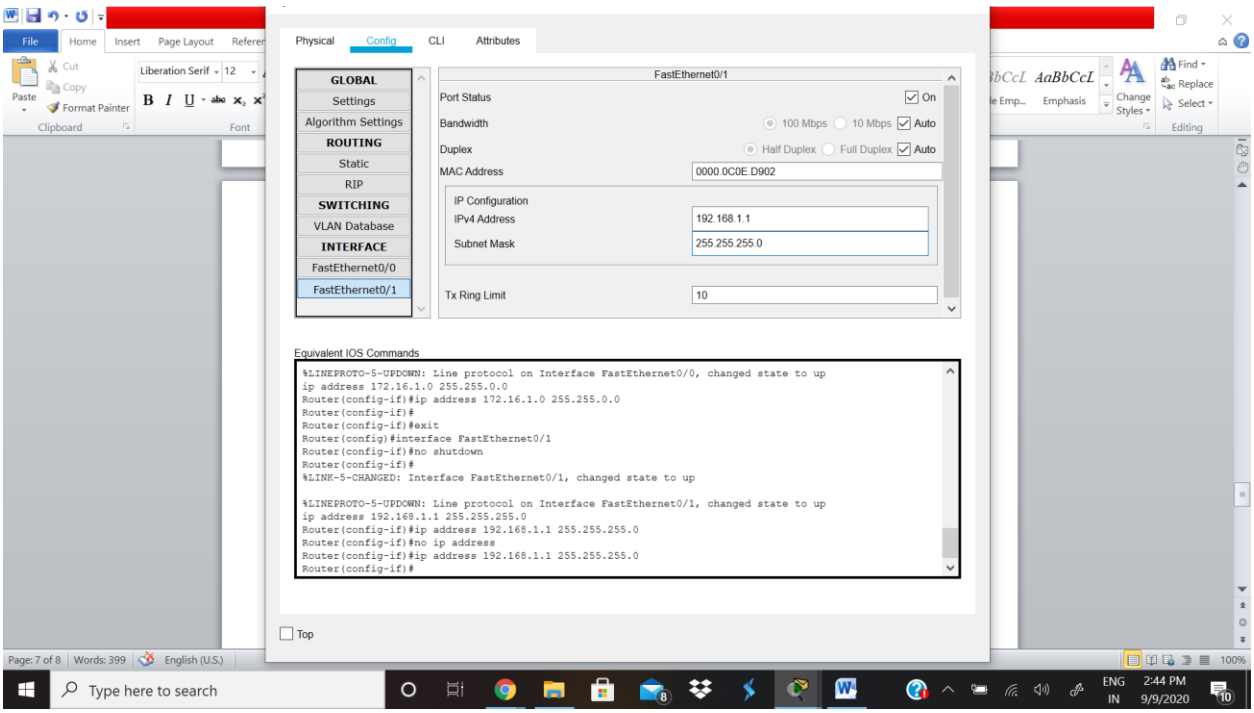

Fig 4.1.5 Shows the Fast ethernet Settings of Router connecting the switch where we turn the Post Status to ON

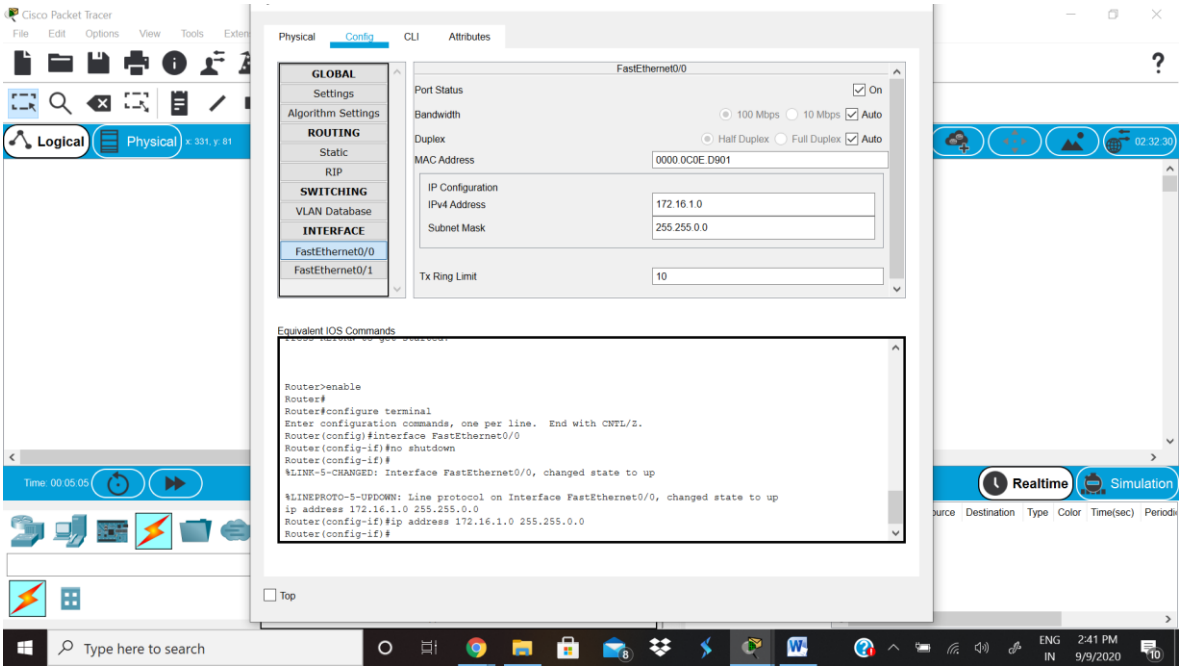

Fig 4.1.6 Shows the Fast ethernet Settings of Router connecting the remote laptop where we turn the Post Status to ON

2. Configure Switch hostname as LOCAL-SWITCH

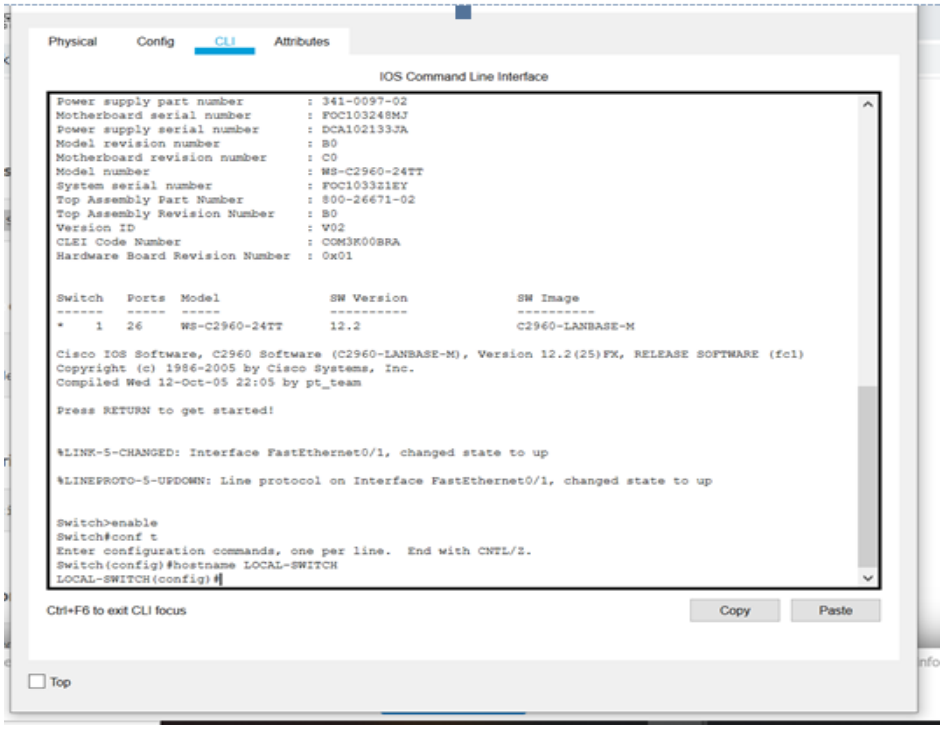

Fig 4.1.7 Shows the CLI of switch where we configure switch hostname as LOCAL-SWITCH

3. Configure the message of the day as "Unauthorized access is forbidden"

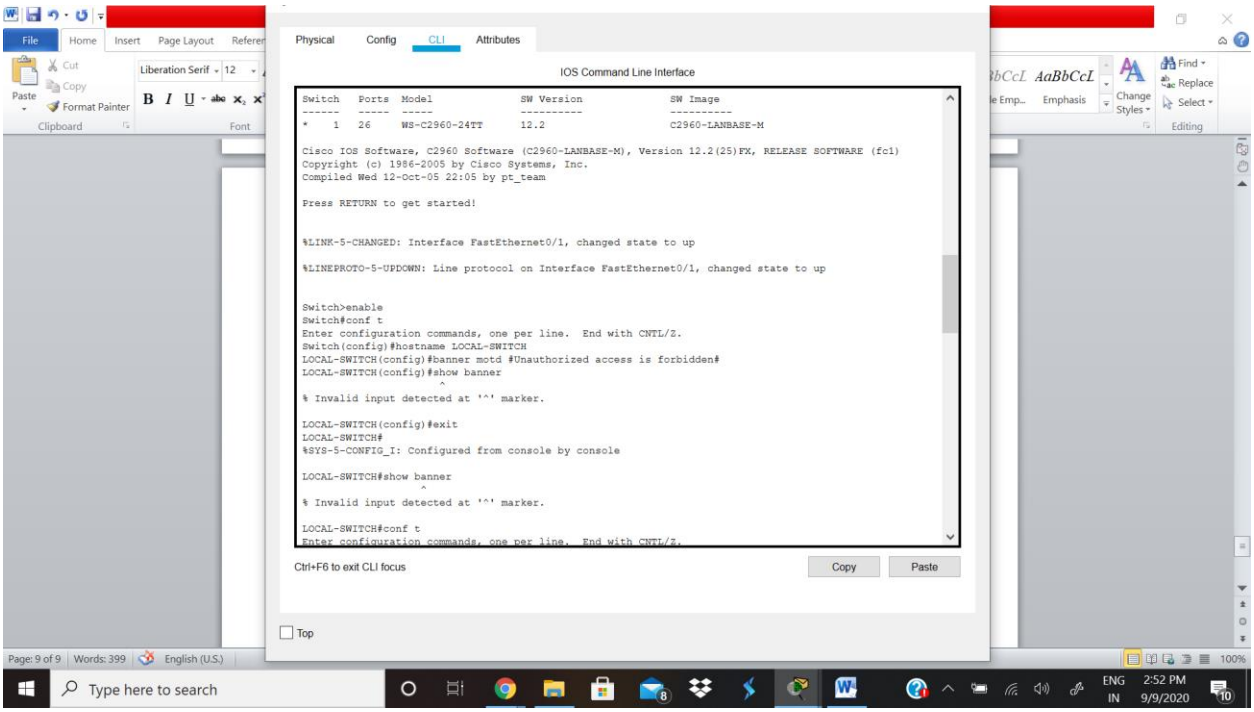

Fig 4.1.8 Shows the CLI of switch to configure the message of the day as Unauthorized access is forbidden

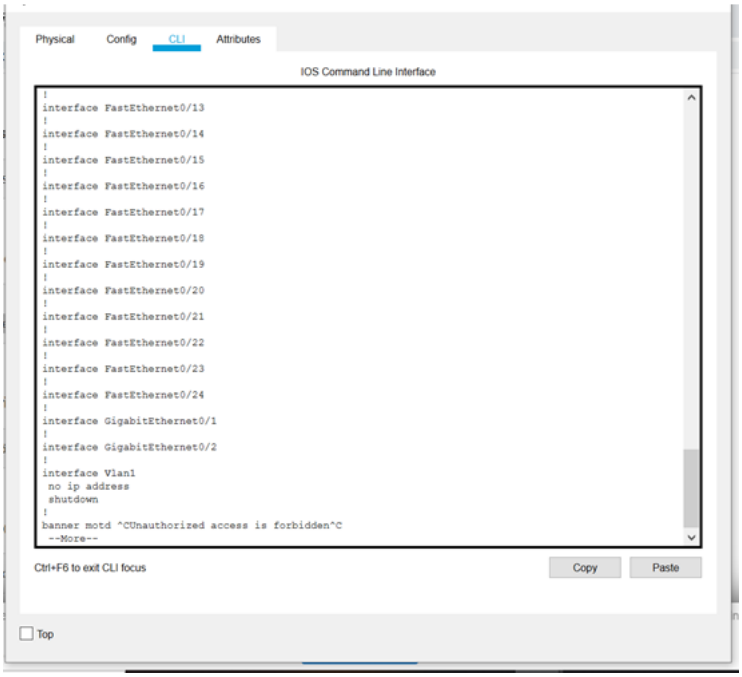

Fig 4.1.9 Shows the Message on using the show run command

4. Configure the password for privileged mode access as "cisco". The password must be md5 encrypted

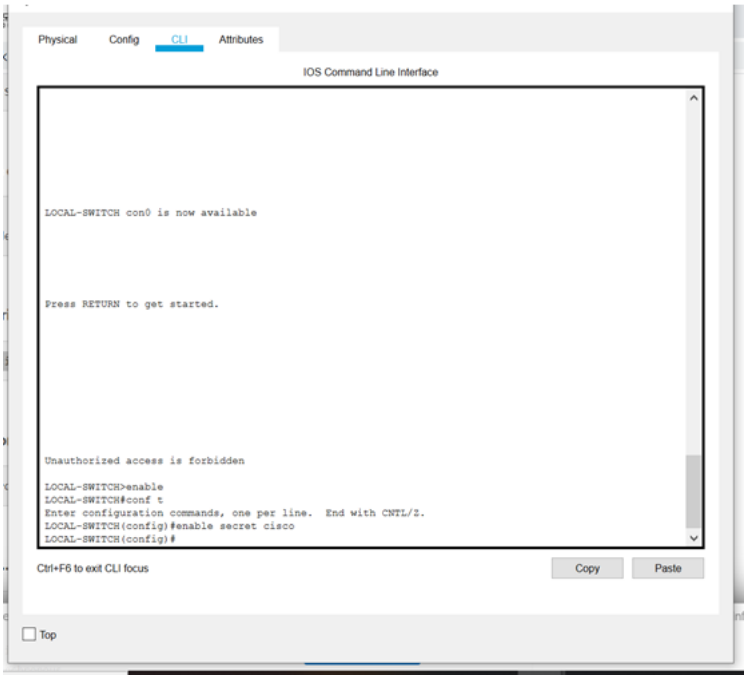

Fig 4.1.10 Shows the CLI to configure the password for privileged mode access as cisco

5. Configure password encryption on the switch using the global configuration command

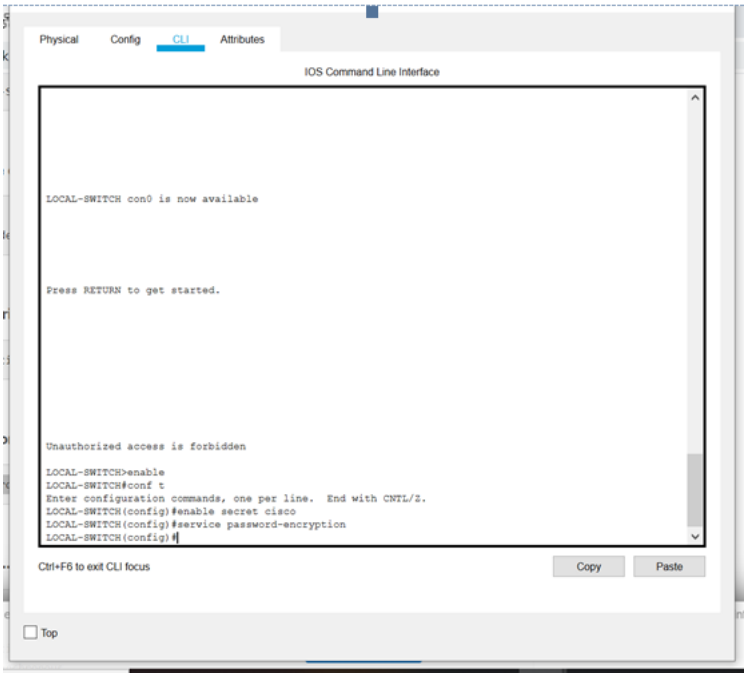

Fig 4.1.11 Shows the CLI to configure password encryption on the switch

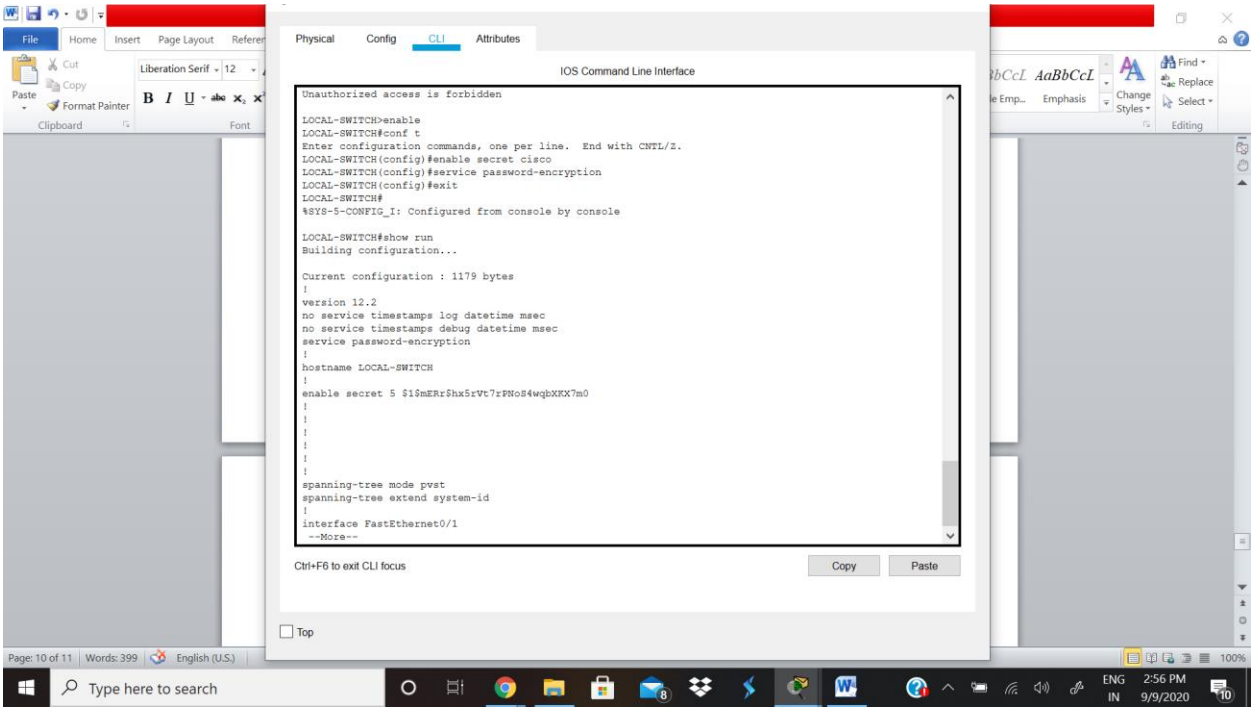

Fig 4.1.12 Shows the encrypted password when I use the show run command

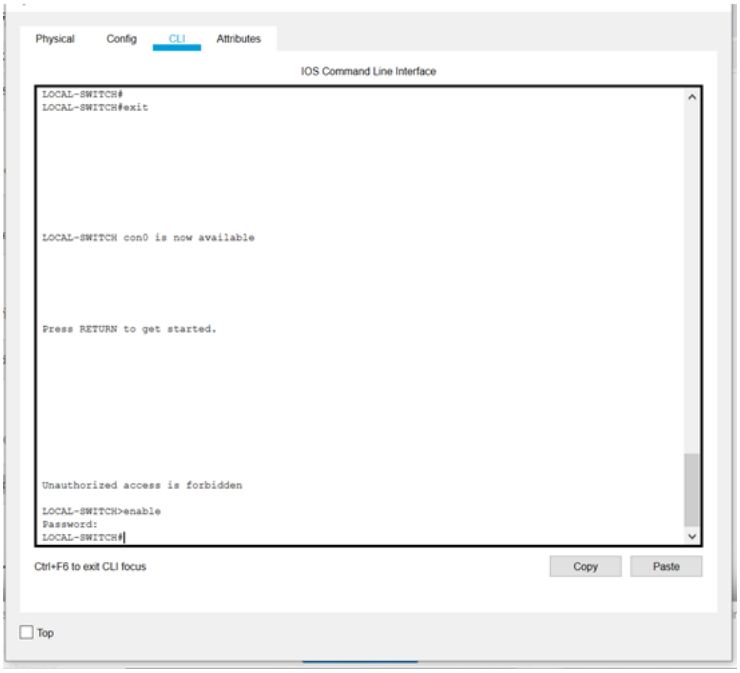

Fig 4.1.13 Shows that the CLI asks for password when I try to go to privileged mode

6. Configure CONSOLE access with the following settings :
- Login enabled
- Password : whatever you like
- History size : 15 commands
- Timeout : 6'45"
- Synchronous logging

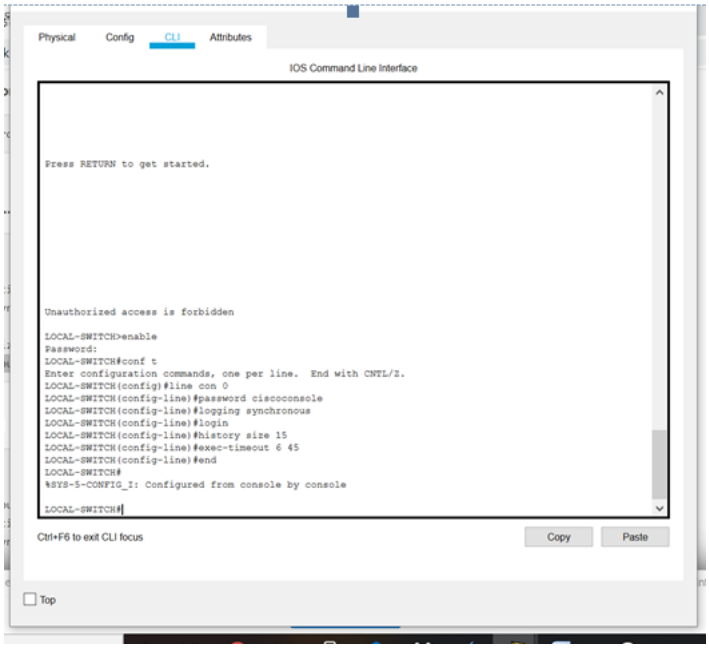

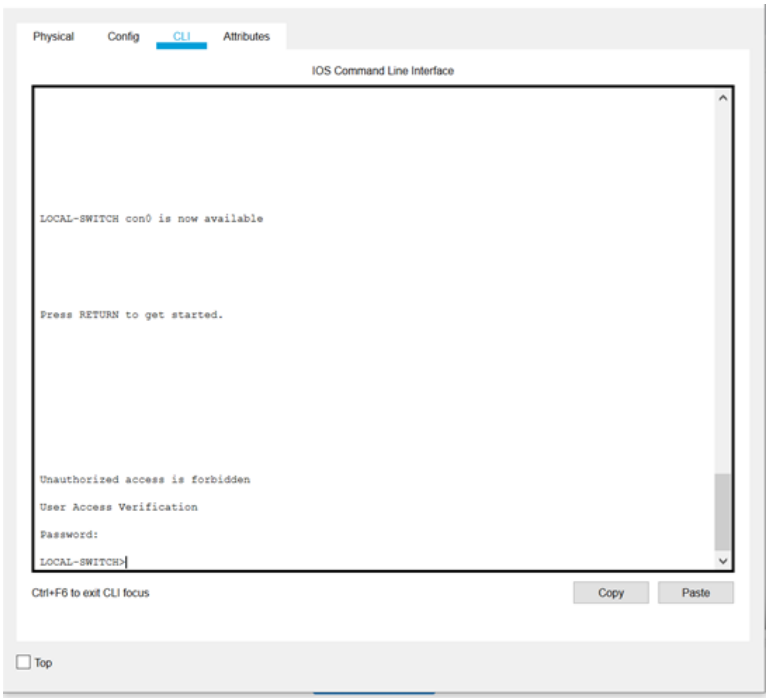

6. Configure TELNET access with the following settings :
- Login enabled
- Password : whatever you like
- History size : 15 commands
- Timeout : 8'20"
- Synchronous logging

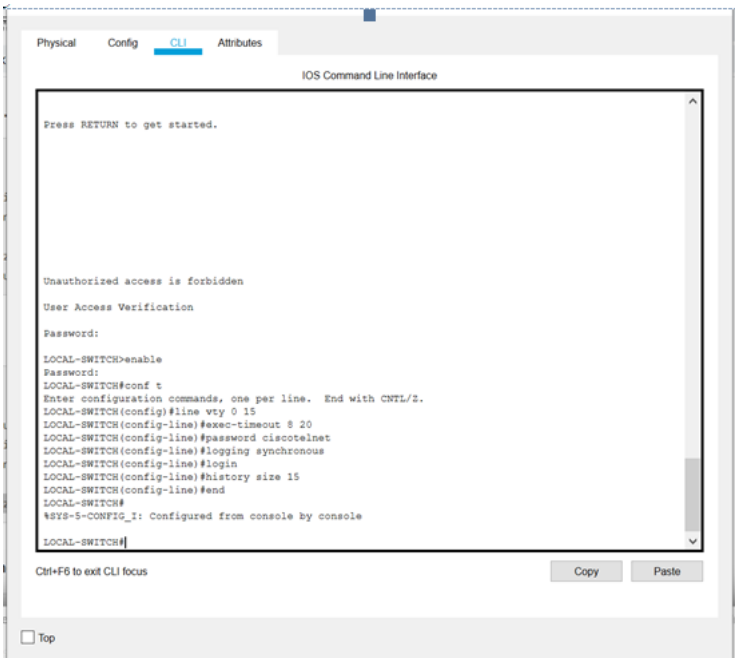

7. Configure the IP address of the switch as 192.168.1.2/24 and it's default gateway IP (192.168.1.1).

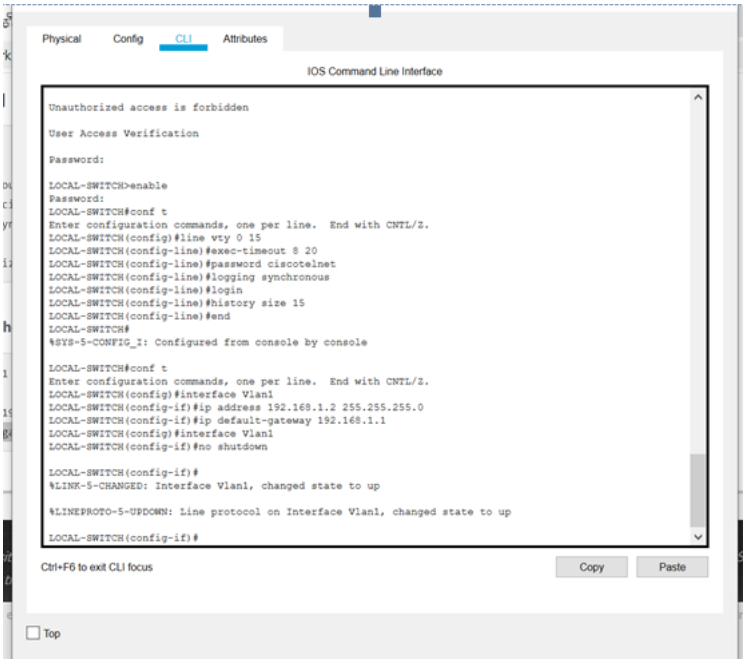

Fig 4.1.17 Shows the CLI to configure the IP address of the switch as 192.168.1.2/24 and it's default gateway IP (192.168.1.1).

8. Test telnet connectivity from the Remote Laptop using the telnet client.

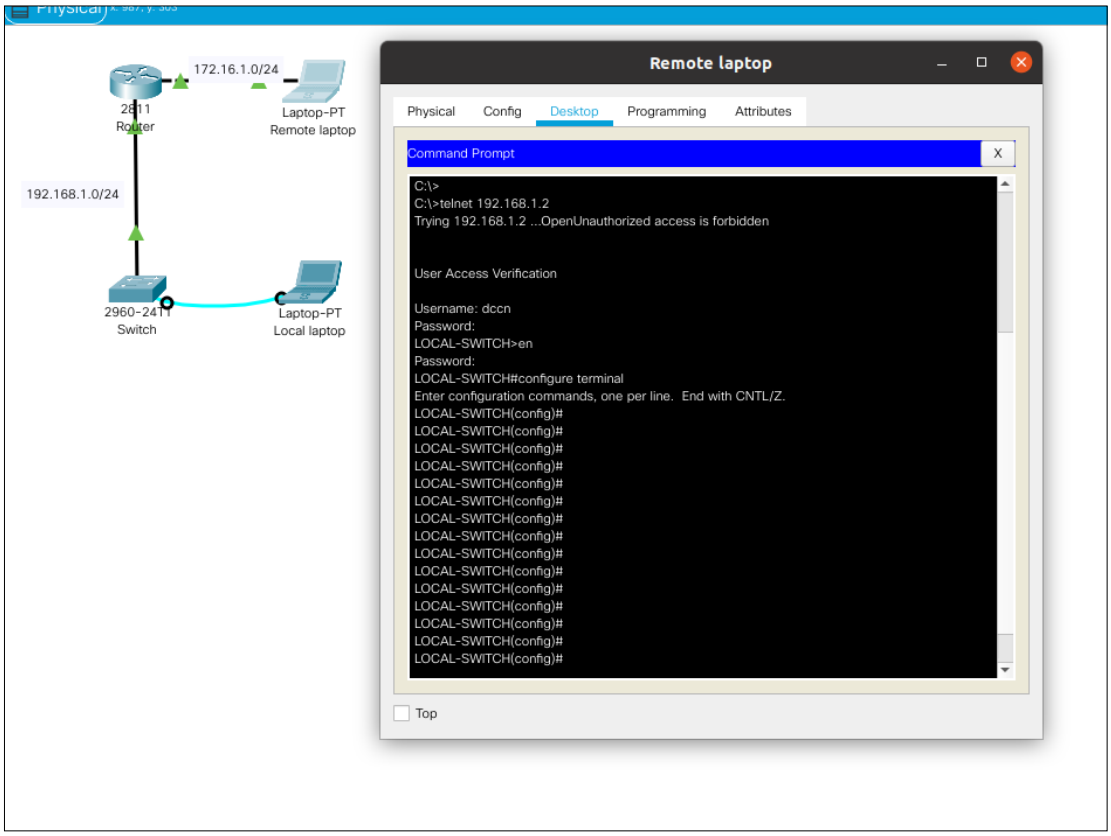

Using telnet, the Switch command line can be accessed remotely.