

# WebAPI Test Suite User Guide

Version 1.0

Copyright © 2014 Intel Corporation. All rights reserved. No portions of this document may be reproduced without the written permission of Intel Corporation.

Intel is a trademark of Intel Corporation in the U.S. and/or other countries.

Linux is a registered trademark of Linus Torvalds.

Tizen® is a registered trademark of The Linux Foundation.

ARM is a registered trademark of ARM Holdings Plc.

\*Other names and brands may be claimed as the property of others.

Any software source code reprinted in this document is furnished under a software license and may only be used or copied in accordance with the terms of that license.

# Contents

---

|   |                                     |   |
|---|-------------------------------------|---|
| 1 | Introduction.....                   | 3 |
| 2 | Web Testing Architecture.....       | 3 |
| 3 | Install testkit-lite on Host.....   | 4 |
| 4 | Web Test on Tizen Crosswalk .....   | 5 |
| 5 | Web Test on Android Crosswalk ..... | 7 |

# 1 Introduction

---


This document provides method to run WebAPI Test Suite on TIZEN and Android Crosswalk. You can use the following method to run it with testkit-lite. Testkit tool-chain includes 3 components:

- testkit-lite: a command-line interface application deployed on Host
- testkit-stub: a test stub application deployed on Device
- tinyweb: a web service application deployed on Device

## 2 Web Testing Architecture


---

- Web Testing on Tizen
- Architecture

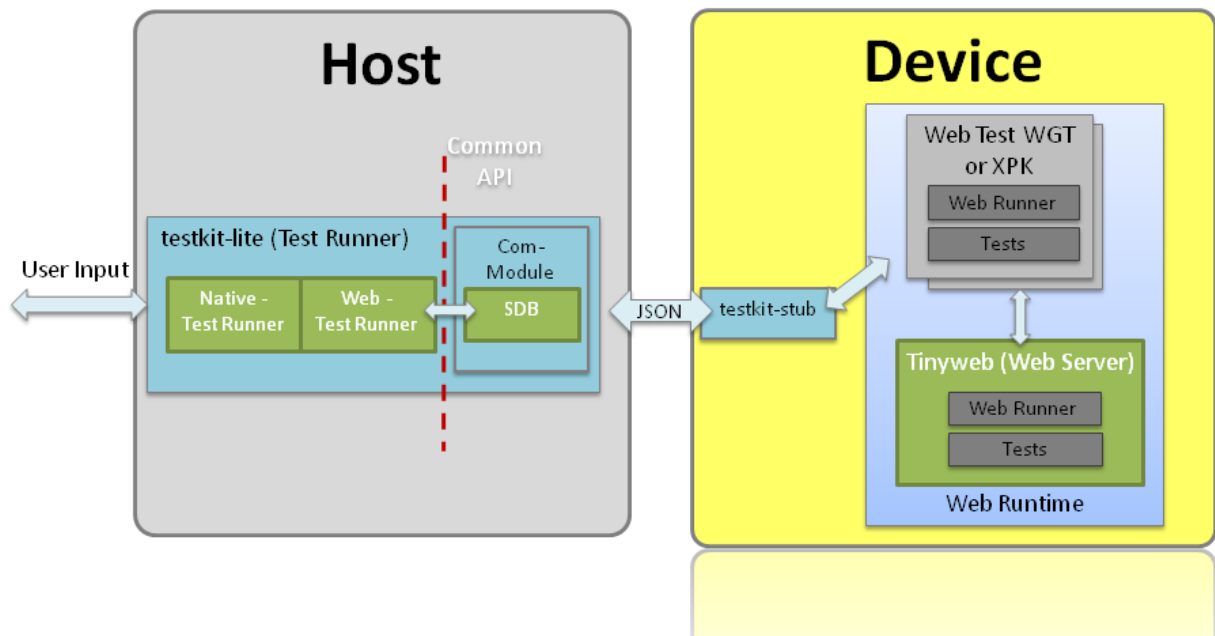

- Web Testing on Android

- Architecture

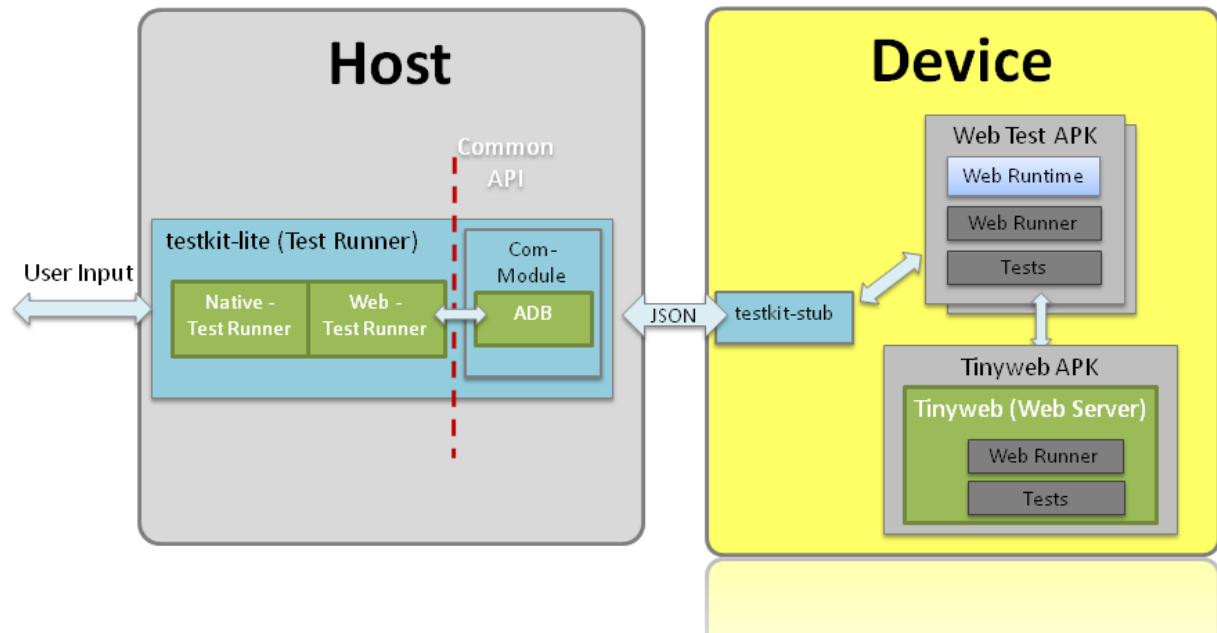

There are two types of Webapi tests:

- Web service dependent

Client side is a stub test package which link to remote web runner, no local TCs and web runner, thus avoid cross origin issue.

Server side include tinyweb, webrunner and TCs.

- Web service independent

Self contained test package which include all things - web runner, TCs.

### 3 Install testkit-lite on Host

- Deploy testkit-lite

- Install dependency python-requests (version>1.0)

- \$ sudo apt-get install python-pip

- \$ sudo pip install requests

- Install testkit-lite from source code in GitHub

```
$ git clone git@github.com:testkit/testkit-lite.git
$ cd testkit-lite && sudo python setup.py install
```

## 4 Web Test on Tizen Crosswalk

---

- Download sdb tool and deploy it to Host
  - Download link and manual link of sdb
    - [http://download.tizen.org/sdk/latest/tizen/binary/sdb\\_<version>\\_<host>.zip](http://download.tizen.org/sdk/latest/tizen/binary/sdb_<version>_<host>.zip)
    - [https://developer.tizen.org/dev-guide/2.2.1/org.tizen.gettingstarted/html/dev\\_env/smart\\_development\\_bridge.htm](https://developer.tizen.org/dev-guide/2.2.1/org.tizen.gettingstarted/html/dev_env/smart_development_bridge.htm)
  - Deploy sdb to Host
    - \$ unzip sdb\_<version>\_<host>.zip
    - \$ sudo cp data/tools/sdb /usr/bin/sdb
    - \$ sudo chmod +x /usr/bin/sdb
- Preparation for Tizen device
  - Set Tizen device to root mode
    - \$ sdb root on
  - Make a tct folder
    - \$ sdb shell "mkdir -p /opt/usr/media/tct/"
    - \$ sdb shell "chmod 777 /opt/usr/media/tct/"
- Install crosswalk on Tizen device
  - Download crosswalk from here
    - <https://download.01.org/crosswalk/releases/tizen-ivi/canary/crosswalk-<version>.i686.rpm>
    - <https://download.01.org/crosswalk/releases/tizen-ivi/canary/tizen-extensions-crosswalk-<version>.i686.rpm>
  - Deploy crosswalk to Tizen device
    - \$ sdb push crosswalk-<version>.i686.rpm /opt/home/developer

```
$ sdb push tizen-extensions-crosswalk-<version>.i686.rpm  
/opt/home/developer  
$ sdb shell "rpm -ivh crosswalk-<version>.i686.rpm --ignorearch"  
$ sdb shell "rpm -ivh tizen-extensions-crosswalk-<version>.i686.rpm --  
ignorearch"
```

- Deploy testkit-stub and launch it

- Make binary for testkit-stub from source code in GitHub

- ```
$ git clone git@github.com:testkit/testkit-stub.git  
$ cd testkit-stub && make
```

- Deploy binary to Tizen device

- ```
$ sdb push testkit-stub /opt/home/developer  
$ sdb shell "chmod +x /opt/home/developer/testkit-stub"
```

- Launch testkit-stub

- ```
$ sdb shell "/opt/home/developer/testkit-stub --port:8000"
```

- Deploy tinyweb and launch it

- Make binaries for tinyweb from source code in Github

- ```
$ git clone git@github.com:testkit/tinyweb.git  
$ cd tinyweb && make
```

- Deploy binaries to Tizen device

- ```
$ sdb push tinyweb /opt/home/developer/  
$ sdb shell "chmod a+x /opt/home/developer/tinyweb"  
$ sdb push cgi-getcookie /opt/home/developer/  
$ sdb shell "chmod a+x /opt/home/developer/cgi-getcookie"  
$ sdb push cgi-getfield /opt/home/developer/  
$ sdb shell "chmod a+x /opt/home/developer/cgi-getfield"  
$ sdb push server.pem /opt/home/developer/  
$ sdb shell "chmod 666 /opt/home/developer/server.pem"  
$ sdb shell "ln -s /usr/lib/libssl.so.1.0.0 /opt/home/developer/libssl.so"  
$ sdb shell "ln -s /usr/lib/libcrypto.so.1.0.0 /opt/home/developer/libcrypto.so"
```

- Launch tinyweb

- ```
$ DPATH=`sdb shell "printenv PATH"`
```

```
$ timeout 5 sdb shell "env LD_LIBRARY_PATH=/opt/home/developer
PATH=$DPATH:/opt/home/developer tinyweb -ssl_certificate
/opt/home/developer/server.pem -document_root /opt/usr/media/tct/ -
listening_ports 80,8080,8081,8082,8083,8443s; sleep 3s"
```

- Pack test suite package

Please see ***Web\_Test\_Suite\_Packaging\_Guide***, Chapter 3.2 "*Pack Web Test Suite Packages for Tizen IVI*", to choose suitable mode package for Tizen device.

- Install test suite on Tizen device

```
$ sdb push <test_suite_name>-<version>.xpk.zip /opt/usr/media/tct
$ sdb shell unzip -o /opt/usr/media/tct/<test_suite_name>-<version>.xpk.zip -d
/opt/usr/media/tct
$ sdb shell /opt/usr/media/tct/opt/<test_suite_name>/inst.sh
```

- Launch web test with lite

```
$ testkit-lite -f device:/opt/usr/media/tct/opt/<test_suite_name>/tests.xml
```

- Uninstall test suite

```
$ sdb shell /opt/usr/media/tct/opt/<test_suite_name>/inst.sh -u
```

## 5 Web Test on Android Crosswalk

---

- Deploy Android ADT bundle (Android SDK, IDE included) and Android NDK

-Deploy Android ADT bundle by referring to link below

<http://developer.android.com/sdk/installing/bundle.html>

-Deploy Android NDK by referring to link below

<http://developer.android.com/tools/sdk/ndk/index.html>

- Deploy adb Tool to Host

-Append Android SDK's tools and platform-tools directories to PATH environment

```
$ export PATH=${PATH}:/path/to/adt-bundle-<version>/sdk/tools:  
/path/to/adt-bundle-<version>/sdk/platform-tools
```

- Install crosswalk on Android device

- Download crosswalk from here

- <https://download.01.org/crosswalk/releases/android-x86/canary/crosswalk-<version>-x86.zip>

- Deploy crosswalk to Android device

- \$ unzip crosswalk-<version>-x86.zip -d /path/to/

- \$ adb install /path/to/crosswalk-<version>-x86/apks/XWalkRuntimeLib.apk

- Deploy testkit-stub and launch it

- Make binary for testkit-stub from source code in GitHub

- \$ git clone git@github.com:testkit/testkit-stub.git

- \$ cd testkit-stub/android/jni/ && /path/to/android-ndk-<version>/ndk-build

- Import project testkit-stub to Android Developer Tool by location testkit-stub/android

- Export the android project to APK and install APK to android device

- \$ adb install /path/to/TestkitStub.apk

- Launch testkit-stub by clicking the testkit-stub App icon in launcher

- Deploy tinyweb and launch it

- Make binaries for tinyweb from source code in GitHub

- \$ git clone git@github.com:testkit/tinyweb.git

- \$ cd tinyweb/android/native/jni/ && /path/to/android-ndk-<version>/ndk-build

- Copy tinyweb/android/native/libs/ to folder tinyweb/android/assets/system/libs/

- Import project tinyweb to Android Developer Tool by location tinyweb /android

- Export the android project to APK and install APK to android device

- \$ adb install /path/to/TinywebTestService.apk

- Launch tinyweb by clicking the tinyweb app icon in launcher



- Pack test suite package

Please see ***Web\_Test\_Suite\_Packaging\_Guide***, Chapter 3.1 “*Pack Web Test Suite Packages for Android*”.

Note: For Android device, only embedded mode APK package is supported.

- Install test suite on Android device

```
$ unzip -o <test_suite_name>-<version>.apk.zip -d /path/to/  
$ /path/to/opt/<test_suite_name>/inst.sh
```

- Launch web test with lite

```
$ testkit-lite -f /path/to/opt/<test_suite_name>/tests.xml --comm androidmobile
```

- Uninstall test suite

```
$ /path/to/opt/<test_suite_name>/inst.sh -u
```