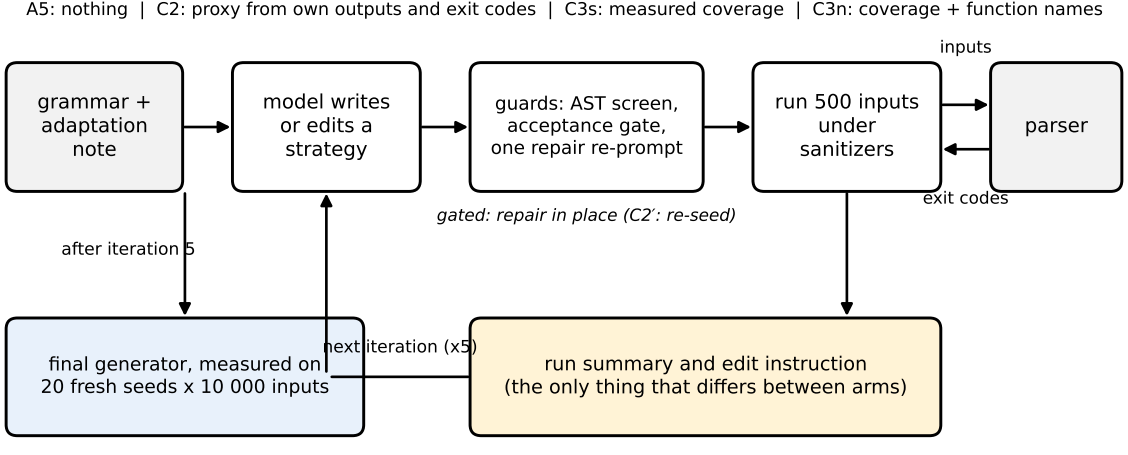
A5: nothing | C2: proxy from own outputs and exit codes | C3s: measured coverage | C3n: coverage + function names
grammar + adaptation note
model writes or edits a strategy
guards: AST screen, acceptance gate, one repair re-prompt
run 500 inputs under sanitizers
inputs
parser
exit codes
gated: repair in place (C2′: re-seed)
after iteration 5
final generator, measured on 20 fresh seeds x 10 000 inputs
next iteration (x5)
run summary and edit instruction (the only thing that differs between arms)