




Credentials that should be available irrespective of domain specification to requirements matching.

ID	Name	Kind	Description
 docker-hub-creds	ackermaster/****** (mu dockerhub credentials)	Username with password	mu dockerhub credentials 


 liad-pipeline-test < 5


Pipeline


Changes

Tests


Artifacts








Branch: —


 13s


No changes

Commit: —

 a few seconds ago

Started by user admin

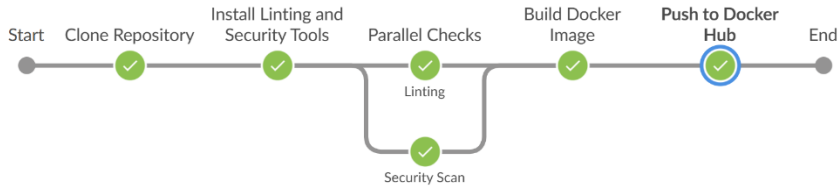

Name	Last Pushed 	Contains	Visibility
ackermaster/flask-aws-monitor	less than a minute ago		Public

← New variable

Name

DOCKERHUB_USERNAME

Value

.....

- ☒ Keep this value secret
- ☐ Let users override this value when running this pipeline

← New variable

Name

DOCKERHUB_PASSWORD

Value


.....

- ☒ Keep this value secret
- ☐ Let users override this value when running this pipeline

← Jobs in run #20250317.1


AckerMaster.devops-final (203)

Clone Repository


>  Clone 3s

Parallel Linting & Security Checks


>  Linting 3s

>  Security Scanning 4s


Build Docker Image

>  BuildImage 5s

Push Docker Image to Docker Hub

 PushImage

Store and Use Secure Credentials

>  Ensure Credentials are Sec... 3s