



RK0 version and C in knockcome.c

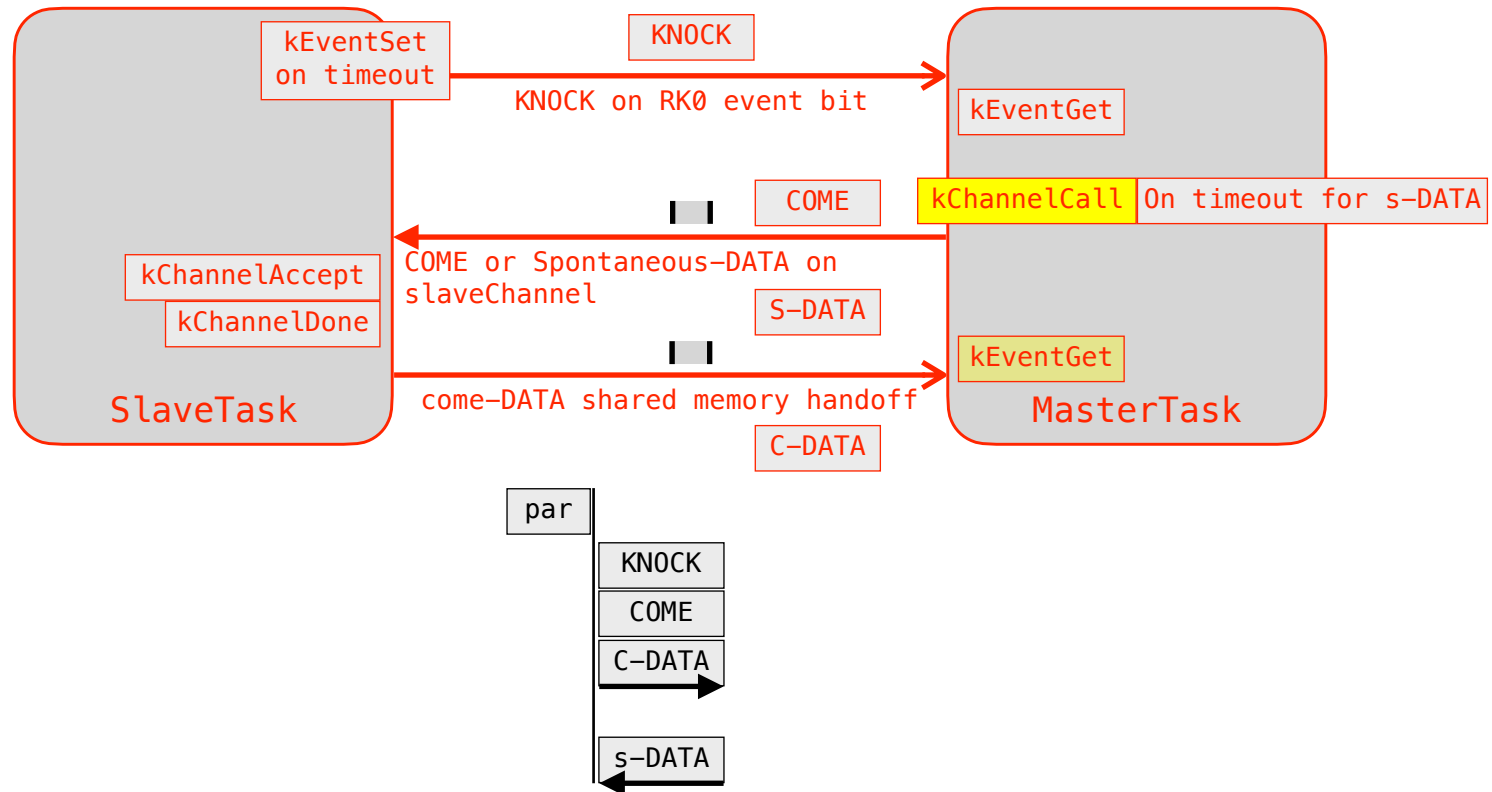


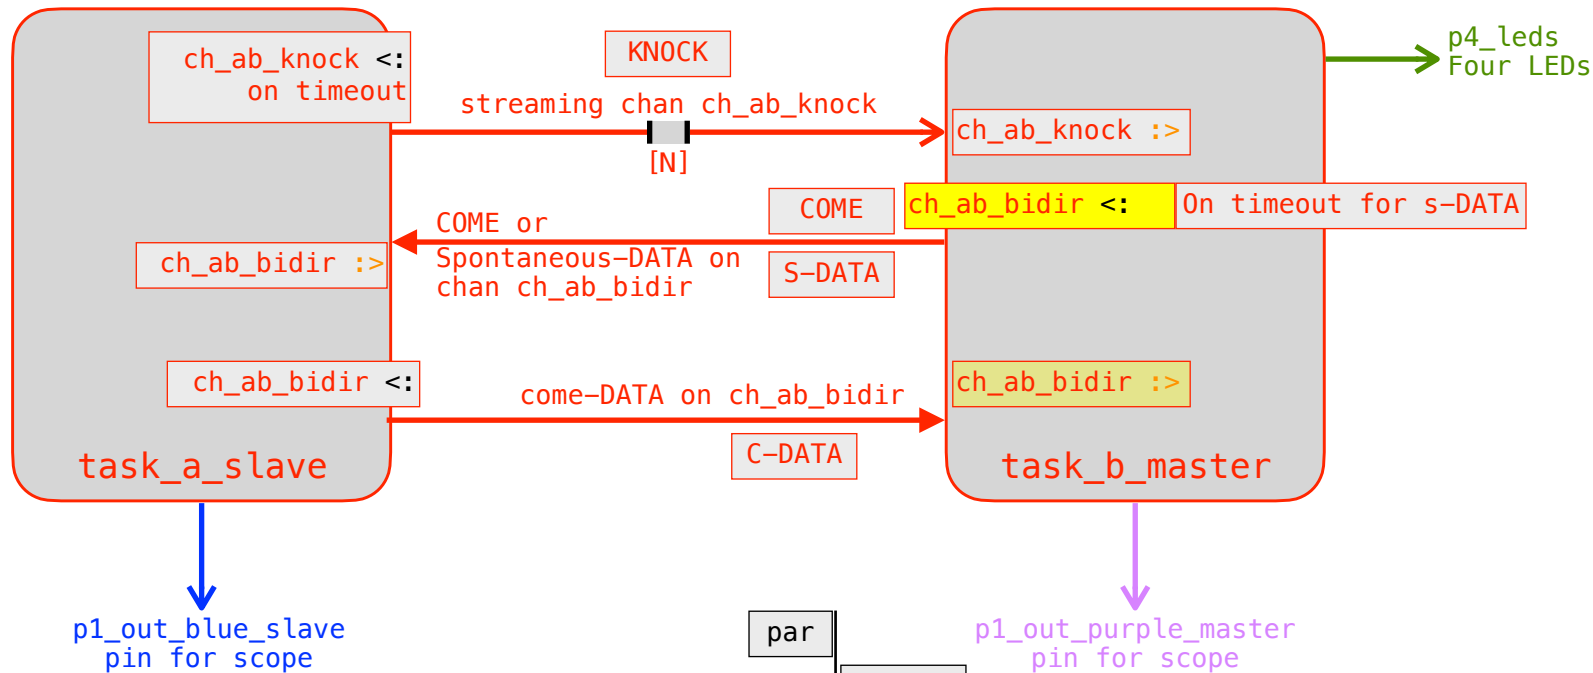

```

int main()
{
    STREAMING chan ch_ab_knock ; // ch_ab_knock_t
    chan
        ch_ab_bidir ; // ch_ab_bidir_t
    par {
        on tile[0]: // .core[1]
            task_a_slave (
                ch_ab_bidir, // ch_ab_bidir_t
                ch_ab_knock, // ch_ab_knock_t
                p1_out_blue_slave); // Pin out for scope
        on tile[0]: // .core[0]
            task_b_master (
                ch_ab_bidir, // ch_ab_bidir_t
                ch_ab_knock, // ch_ab_knock_t
                p1_out_purple_master, // Pin out for scope
                p4_leds); // LEDS for observing activity
    }
    return 0;
} // main

```

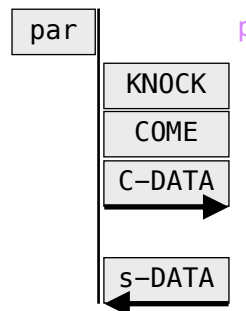

chan :> input  
chan <: output