

Hazelcast Documentation

version 3.6-SNAPSHOT

Aug 31, 2015

In-Memory Data Grid - Hazelcast | Documentation: version 3.6-SNAPSHOT

Publication date Aug 31, 2015

Copyright © 2015 Hazelcast, Inc.

Permission to use, copy, modify and distribute this document for any purpose and without fee is hereby granted in perpetuity, provided that the above copyright notice and this paragraph appear in all copies.

Contents

1	Preface	17
2	What's New in Hazelcast 3.6	19
2.1	Release Notes	19
2.1.1	New Features	19
2.1.2	Enhancements	19
2.1.3	Fixes	20
2.2	Upgrading Hazelcast	20
2.2.1	Upgrading from 2.x	20
2.2.2	Upgrading from 3.x	22
2.3	Document Revision History	22
3	Getting Started	23
3.1	Installation	23
3.1.1	Hazelcast	23
3.1.2	Hazelcast Enterprise	23
3.2	Starting the Member and Client	25
3.2.1	Deploying On Amazon EC2	26
3.3	Configuring Hazelcast	26
3.4	Phoning Home	27
4	Hazelcast Overview	29
4.1	Sharding in Hazelcast	30
4.2	Hazelcast Topology	30
4.3	Why Hazelcast?	31
4.4	Data Partitioning	32
4.4.1	How the Data is Partitioned	34
4.4.2	Partition Table	34
4.4.3	Repartitioning	35
4.5	Use Cases	35
4.6	Resources	35

5	Hazelcast Clusters	37
5.1	Discovering Cluster Members	37
5.1.1	Discovering Members by Multicast	37
5.1.2	Discovering Members by TCP	38
5.1.3	Discovering Members within EC2 Cloud	39
5.2	Creating Cluster Groups	40
6	Distributed Data Structures	41
6.1	Map	42
6.1.1	Getting a Map and Putting an Entry	42
6.1.2	Backing Up Maps	45
6.1.3	Evicting Map Entries	46
6.1.4	Setting In Memory Format	49
6.1.5	Loading and Storing Persistent Data	50
6.1.6	Creating Near Cache for Map	55
6.1.7	Locking Maps	57
6.1.8	Accessing Entry Statistics	60
6.1.9	Listening to Map Events	60
6.1.10	Adding Interceptors	62
6.1.11	Preventing Out of Memory Exceptions	66
6.2	Queue	67
6.2.1	Getting a Queue and Putting Items	67
6.2.2	Creating an Example Queue	67
6.2.3	Setting a Bounded Queue	69
6.2.4	Queueing with Persistent Datastore	70
6.2.5	Configuring Queue	71
6.3	MultiMap	71
6.3.1	Getting a MultiMap and Putting an Entry	72
6.3.2	Configuring MultiMap	72
6.4	Set	72
6.4.1	Getting a Set and Putting Items	73
6.4.2	Listening for Set Item Events	73
6.5	List	74
6.5.1	Getting a List and Putting Items	74
6.5.2	Listening for List Item Events	75
6.6	Ringbuffer	75
6.6.1	Getting a Ringbuffer and Reading Items	75
6.6.2	Adding Items to a Ringbuffer	76
6.6.3	IQueue vs. Ringbuffer	76
6.6.4	Configuring Ringbuffer Capacity	76

6.6.5	Backing Up Ringbuffer	77
6.6.6	Configuring Ringbuffer Time To Live	77
6.6.7	Setting Ringbuffer Overflow Policy	77
6.6.8	Configuring Ringbuffer In-Memory Format	78
6.6.9	Adding Batched Items	78
6.6.10	Reading Batched Items	78
6.6.11	Using Async Methods	79
6.6.12	Ringbuffer Configuration Examples	79
6.7	Topic	80
6.7.1	Getting a Topic and Publishing Messages	80
6.7.2	Getting Topic Statistics	81
6.7.3	Understanding Topic Behavior	81
6.7.4	Configuring Topic	82
6.8	Reliable Topic	83
6.8.1	Sample Reliable ITopic Code	83
6.8.2	Slow Consumers	84
6.9	Lock	84
6.9.1	Using Try-Catch Blocks with Locks	84
6.9.2	Releasing Locks with tryLock Timeout	85
6.9.3	Avoiding Waiting Threads with Lease Time	85
6.9.4	Understanding Lock Behavior	85
6.9.5	Synchronizing Threads with ICondition	86
6.10	IAtomicLong	87
6.10.1	Sending Functions to IAtomicLong	87
6.10.2	Executing Functions on IAtomicLong	87
6.10.3	Reasons to Use Functions with IAtomic	88
6.11	ISemaphore	88
6.11.1	Controlling Thread Counts with Semaphore Permits	88
6.11.2	Example Semaphore Code	89
6.11.3	Example Semaphore Configuration	90
6.12	IAtomicReference	90
6.12.1	Sending Functions to IAtomicReference	90
6.12.2	Using IAtomicReference	91
6.13	ICountDownLatch	91
6.13.1	Gate-Keeping Concurrent Activities	91
6.13.2	Recovering From Failure	92
6.13.3	Using ICountDownLatch	92
6.14	IdGenerator	92
6.14.1	Generating Cluster-Wide IDs	92

6.14.2	Unique IDs and Duplicate IDs	93
6.15	Replicated Map	93
6.15.1	Replicating Instead of Partitioning	93
6.15.2	Example Replicated Map Code	93
6.15.3	Read Write Considerations for Replicated Map	94
6.15.4	Breakage of the Map-Contract	94
6.15.5	Configuration Design for Replicated Map	94
6.15.6	Configuring Replicated Map	95
6.15.7	Using EntryListener on Replicated Map	96
7	Distributed Events	99
7.1	Event Listeners for Hazelcast Members	99
7.1.1	Listening for Member Events	99
7.1.2	Listening for Distributed Object Events	100
7.1.3	Listening for Migration Events	101
7.1.4	Listening for Partition Lost Events	101
7.1.5	Listening for Lifecycle Events	102
7.1.6	Listening for Item Events	102
7.1.7	Listening for Topic Messages	103
7.1.8	Listening for Clients	103
7.2	Event Listeners for Hazelcast Clients	104
7.3	Global Event Configuration	104
8	Distributed Computing	105
8.1	Executor Service	105
8.1.1	Implementing a Callable Task	105
8.1.2	Implementing a Runnable Task	107
8.1.3	Configuring Executor Threads	108
8.1.4	Scaling The Executor Service	108
8.1.5	Executing Code in the Cluster	108
8.1.6	Canceling an Executing Task	109
8.1.7	Callback When Task Completes	110
8.1.8	Selecting Members for Task Execution	112
8.2	Entry Processor	112
8.2.1	Performing Fast In-Memory Map Operations	112
8.2.2	Creating an Entry Processor	114
8.2.3	Abstract Entry Processor	115

9 Distributed Query	117
9.1 How Distributed Query Works	117
9.1.1 Employee Map Query Example	117
9.1.2 Querying with Criteria API	118
9.1.3 Querying with SQL	120
9.1.4 Filtering with Paging Predicates	120
9.1.5 Indexing Queries	121
9.1.6 Configuring Query Thread Pool	122
9.2 MapReduce	122
9.2.1 Understanding MapReduce	123
9.2.2 Using the MapReduce API	125
9.2.3 Hazelcast MapReduce Architecture	132
9.3 Aggregators	134
9.3.1 Aggregations Basics	134
9.3.2 Using the Aggregations API	136
9.3.3 Aggregations Examples	140
9.3.4 Implementing Aggregations	143
9.4 Continuous Query	143
9.4.1 Listening to Predicate Map Entries	144
9.5 Continuous Query Cache	145
9.5.1 Keeping Query Results Local and Ready	145
9.5.2 Accessing Continuous Query from Server Side	146
9.5.3 Accessing Continuous Query from Client Side	146
9.5.4 Features of Continuous Query Cache	146
10 User Defined Services	149
10.1 A Counter User Defined Service	149
10.1.1 Creating the Service Class	149
10.1.2 Enabling the Service Class	150
10.1.3 Adding Properties to the Service	151
10.1.4 Starting the Service	151
10.1.5 Placing a Remote Call via Proxy	151
10.1.6 Creating Containers	156
10.1.7 Partition Migration	160
10.1.8 Creating Backups	164
10.2 WaitNotifyService	167

11 Transactions	169
11.1 Creating a Transaction Interface	169
11.1.1 Queue/Set/List vs. Map/Multimap	170
11.1.2 LOCAL vs. TWO_PHASE	170
11.2 Providing XA Transactions	170
11.3 Integrating into J2EE	171
11.3.1 Sample Code for J2EE Integration	172
11.3.2 Configuring Resource Adapter	172
11.3.3 Configuring a Glassfish v3 Web Application	172
11.3.4 Configuring a JBoss AS 5 Web Application	173
11.3.5 Configuring a JBoss AS 7 / EAP 6 Web Application	174
12 Hazelcast JCache	177
12.1 JCache Overview	177
12.2 JCache Setup and Configuration	177
12.2.1 Setting up Your Application	177
12.2.2 Example JCache Application	179
12.2.3 Configuring for JCache	180
12.3 JCache Providers	182
12.3.1 Configuring JCache Provider	182
12.3.2 Configuring JCache with Client Provider	183
12.3.3 Configuring JCache with Server Provider	183
12.4 JCache API	183
12.4.1 JCache API Application Example	183
12.4.2 JCache Base Classes	185
12.4.3 Implementing Factory and FactoryBuilder	186
12.4.4 Implementing CacheLoader	186
12.4.5 CacheWriter	187
12.4.6 Implementing EntryProcessor	189
12.4.7 CacheEntryListener	190
12.4.8 ExpirePolicy	191
12.5 Hazelcast JCache Extension - ICache	191
12.5.1 Scoping to Join Clusters	192
12.5.2 Namespacing	195
12.5.3 Retrieving an ICache Instance	195
12.5.4 ICache Configuration	195
12.5.5 ICache Async Methods	196
12.5.6 Defining a Custom ExpiryPolicy	198
12.5.7 JCache Eviction	199
12.5.8 JCache Near Cache	202

12.5.9 Additional Methods	205
12.5.10 BackupAwareEntryProcessor	205
12.5.11 ICache Partition Lost Listener	206
12.6 JCache Specification Compliance	207
13 Integrated Clustering	209
13.1 Hibernate Second Level Cache	209
13.1.1 Sample Code for Hibernate	209
13.1.2 Supported Hibernate Versions	209
13.1.3 Hibernate Configuration	209
13.1.4 Hazelcast Configuration for Hibernate	210
13.1.5 RegionFactory Options	211
13.1.6 Hazelcast Modes for Hibernate Usage	212
13.1.7 Hibernate Concurrency Strategies	212
13.1.8 Advanced Settings	213
13.2 Web Session Replication	213
13.2.1 Filter Based Web Session Replication	214
13.2.2 Spring Security Support	216
13.2.3 Tomcat Based Web Session Replication	218
13.2.4 Jetty Based Web Session Replication	222
13.3 Spring Integration	227
13.3.1 Supported Versions	227
13.3.2 Spring Configuration	227
13.3.3 Spring Managed Context with @SpringAware	230
13.3.4 Spring Cache	233
13.3.5 Hibernate 2nd Level Cache Config	234
13.3.6 Best Practices	234
14 Storage	237
14.1 High-Density Memory Store	237
14.1.1 Configuring Hi-Density Memory Store	237
14.2 Elastic Memory (High-Density Memory First Generation)	238
14.3 Sizing Practices	239
15 Hazelcast Java Client	241
15.1 Hazelcast Clients Feature Comparison	241
15.2 Java Client Overview	242
15.2.1 Java Client Dependencies	242
15.2.2 Getting Started with Client API	243
15.2.3 Java Client Operation modes	243
15.2.4 Failure Handling	243

15.2.5	Supported Distributed Data Structures	244
15.2.6	Client Services	245
15.2.7	Client Listeners	246
15.2.8	Client Transactions	246
15.3	Java Client Configuration	246
15.3.1	Client Network Configuration	247
15.3.2	Client Load Balancer Configuration	252
15.3.3	Client Near Cache Configuration	253
15.3.4	Client Group Configuration	253
15.3.5	Client Security Configuration	254
15.3.6	Client Serialization Configuration	254
15.3.7	Client Listener Configuration	254
15.3.8	ExecutorPoolSize	254
15.3.9	ClassLoader	254
15.4	Client System Properties	254
15.5	Sample Codes for Client	255
16	Other Client Implementations	257
16.1	C++ Client	257
16.1.1	How to Setup	257
16.1.2	Platform Specific Installation Guides	258
16.1.3	Code Examples	258
16.2	.NET Client	263
16.2.1	Client Configuration	265
16.2.2	Client Startup	265
16.3	REST Client	266
16.4	Memcache Client	268
16.4.1	Unsupported Operations	269
17	Serialization	271
17.1	Serialization Interfaces	271
17.2	Comparison Table	272
17.3	Serializable & Externalizable	272
17.4	DataSerializable	273
17.4.1	IdentifiedDataSerializable	274
17.5	Portable	276
17.5.1	Versions	278
17.5.2	Null Portable Serialization	278
17.5.3	DistributedObject Serialization	279
17.6	Custom Serialization	279

17.6.1 StreamSerializer	279
17.6.2 ByteArraySerializer	281
17.7 HazelcastInstanceAware Interface	282

18 Management 285

18.1 Statistics API per Node	285
18.1.1 Map Statistics	285
18.1.2 Multimap Statistics	288
18.1.3 Queue Statistics	291
18.1.4 Topic Statistics	292
18.1.5 Executor Statistics	293
18.2 JMX API per Node	293
18.3 Monitoring with JMX	300
18.4 Cluster Utilities	300
18.4.1 Cluster Interface	300
18.4.2 Member Attributes	301
18.4.3 Cluster-Member Safety Check	302
18.4.4 Cluster Quorum	303
18.5 Management Center	305
18.5.1 Installation	306
18.5.2 Tool Overview	306
18.5.3 Home Page	309
18.5.4 Caches	312
18.5.5 Maps	312
18.5.6 Queues	316
18.5.7 Topics	316
18.5.8 MultiMaps	319
18.5.9 Executors	319
18.5.10 Members	321
18.5.11 Scripting	323
18.5.12 Console	324
18.5.13 Alerts	324
18.5.14 Administration	327
18.5.15 Time Travel	329
18.5.16 Documentation	329
18.5.17 Suggested Heap Size	329
18.6 Clustered JMX	330
18.6.1 Clustered JMX Configuration	330
18.6.2 API Documentation	332
18.6.3 New Relic Integration	335

18.6.4 AppDynamics Integration	336
18.7 Clustered REST	337
18.7.1 Enabling Clustered REST	337
18.7.2 Clustered REST API Root	337
18.7.3 Clusters Resource	337
18.7.4 Cluster Resource	337
18.7.5 Members Resource	338
18.7.6 Member Resource	338
18.7.7 Clients Resource	341
18.7.8 Maps Resource	342
18.7.9 MultiMaps Resource	343
18.7.10 Queues Resource	344
18.7.11 Topics Resource	345
18.7.12 Executors Resource	346
19 Security	347
19.1 Enabling Security for Hazelcast Enterprise	347
19.2 Socket Interceptor	347
19.3 Security Interceptor	348
19.4 Encryption	349
19.5 SSL	350
19.6 Credentials	351
19.7 ClusterLoginModule	352
19.7.1 Enterprise Integration	353
19.8 Cluster Member Security	353
19.9 Native Client Security	355
19.9.1 Authentication	355
19.9.2 Authorization	355
19.9.3 Permissions	357
20 Performance	361
20.1 Data Affinity	361
20.2 Back Pressure	364
20.3 Threading Model	365
20.3.1 I/O Threading	365
20.3.2 Event Threading	366
20.3.3 IExecutor Threading	366
20.3.4 Operation Threading	366
20.4 SlowOperationDetector	368
20.4.1 Logging of Slow Operations	369

20.4.2 Purging of Slow Operation Logs	369
20.5 Hazelcast Performance on AWS	369
20.5.1 Selecting EC2 Instance Type	369
20.5.2 Dealing with Network Latency	370
20.5.3 Selecting Virtualization	370
21 Hazelcast Simulator	371
21.1 Key Concepts	371
21.2 Installing Simulator	372
21.2.1 Firewall Settings	372
21.2.2 Setting Up the Local Machine (Coordinator)	372
21.2.3 Setting Up the Remote Machines (Agents, Workers)	374
21.2.4 Setting Up the Public/Private Key Pair	374
21.3 Setting Up For Amazon EC2	374
21.4 Setting Up For Google Compute Engine	375
21.5 Setting Up Machines Manually	375
21.6 Executing a Simulator Test	376
21.6.1 Creating and Editing Properties File	376
21.6.2 Running the Test	377
21.6.3 Running the Test with a Script	381
21.6.4 Using Maven Archetypes	382
21.7 Provisioner	382
21.7.1 Accessing the Provisioned Machine	383
21.8 Coordinator	383
21.8.1 Controlling Hazelcast Declarative Configuration	384
21.8.2 Controlling Test Duration	384
21.8.3 Controlling Client And Workers	384
21.9 Communicator	384
21.9.1 Example	385
21.9.2 Message Types	385
21.9.3 Message Addressing	385
21.10 Simulator.Properties File Description	386
21.11 Performance and Benchmarking	387
22 WAN	389
22.1 WAN Replication	389
22.1.1 Configuring WAN Replication	389
22.1.2 WAN Replication Additional Information	390
22.2 Enterprise WAN Replication	391
22.2.1 Replication implementations	391

22.2.2	WAN Replication Batch Size	391
22.2.3	WAN Replication Batch Frequency	392
22.2.4	WAN Replication Operation Timeout	392
22.2.5	WAN Replication Queue Capacity	392
22.2.6	Enterprise WAN Replication Additional Information	393
23	Hazelcast Configuration	395
23.1	Configuration Overview	395
23.2	Using Wildcard	397
23.3	Using Variables	398
23.4	Composing Declarative Configuration	398
23.5	Network Configuration	400
23.5.1	Public Address	401
23.5.2	Port	401
23.5.3	Outbound Ports	402
23.5.4	Reuse Address	403
23.5.5	Join	403
23.5.6	Interfaces	405
23.5.7	SSL	406
23.5.8	Socket Interceptor	406
23.5.9	Symmetric Encryption	406
23.5.10	IPv6 Support	406
23.6	Group Configuration	407
23.7	Map Configuration	408
23.7.1	Map Store	409
23.7.2	Near Cache	410
23.7.3	Indexes	410
23.7.4	Entry Listeners	410
23.8	MultiMap Configuration	410
23.9	Queue Configuration	411
23.10	Topic Configuration	412
23.11	Reliable Topic Configuration	413
23.12	List Configuration	414
23.13	Set Configuration	414
23.14	Ringbuffer Configuration	415
23.15	Semaphore Configuration	416
23.15.1	ReplicatedMap Configuration	416
23.16	Executor Service Configuration	417
23.17	Cache Configuration	417
23.18	Serialization Configuration	419

23.19MapReduce Jobtracker Configuration	420
23.20Services Configuration	421
23.21Management Center Configuration	422
23.22WAN Replication Configuration	422
23.23Enterprise WAN Replication Configuration	423
23.23.1 IMap and ICache WAN Configuration	424
23.24Quorum Configuration	426
23.25Partition Group Configuration	426
23.26Listener Configurations	428
23.27Logging Configuration	432
23.28System Properties	433
24 Network Partitioning - Split Brain Syndrome	437
24.1 Understanding Partition Recreation	437
24.2 Understanding Backup Partition Creation	437
24.3 Understanding The Update Overwrite Scenario	437
24.4 What Happens When The Network Failure Is Fixed	438
24.5 How Hazelcast Split Brain Merge Happens	438
24.6 Specifying Merge Policies	439
25 License Questions	441
25.1 Embedded Dependencies	441
25.2 Runtime Dependencies	441
26 Common Exception Types	443
27 Frequently Asked Questions	445
27.1 Why 271 as the default partition count?	445
27.2 Is Hazelcast thread safe?	445
27.3 What happens when a node goes down?	445
27.4 How do I test the connectivity?	446
27.5 How do I choose keys properly?	446
27.6 How do I reflect value modifications?	446
27.7 How do I test my Hazelcast cluster?	446
27.8 Does Hazelcast support hundreds of nodes?	448
27.9 Does Hazelcast support thousands of clients?	448
27.10What is the difference between old LiteMember and new Smart Client?	448
27.11How do you give support?	448
27.12Does Hazelcast persist?	448
27.13Can I use Hazelcast in a single server?	448
27.14How can I monitor Hazelcast?	449

27.15How can I see debug level logs?	449
27.16What is the difference between client-server and embedded topologies?	449
27.17How do I know it is safe to kill the second node?	450
27.18When do I need Native Memory solutions?	450
27.19Is there any disadvantage of using near-cache?	450
27.20Is Hazelcast secure?	450
27.21How can I set socket options?	450
27.22I periodically see client disconnections during idle time?	450
27.23How to get rid of “java.lang.OutOfMemoryError: unable to create new native thread”?	451
27.24Does repartitioning wait for Entry Processor?	451
27.25Why do Hazelcast instances on different machines not see each other?	451
27.26What Does “Replica: 1 has no owner” Mean?	452
28 Glossary	453

Chapter 1

Preface

Welcome to the Hazelcast Reference Manual. This manual includes concepts, instructions and samples to guide you on how to use Hazelcast and build Hazelcast applications.

As the reader of this manual, you must be familiar with the Java programming language and you should have installed your preferred IDE.

1.0.0.0.1 Product Naming Throughout this manual:

- **Hazelcast** refers to the open source edition of Hazelcast in-memory data grid middleware. It is also the name of the company providing the Hazelcast product.
- **Hazelcast Enterprise** refers to the commercial edition of Hazelcast.

1.0.0.0.2 Licensing Hazelcast is free provided under the Apache 2 license. Hazelcast Enterprise is commercially licensed by Hazelcast, Inc.

For more detailed information on licensing, please see the [License Questions appendix](#).

1.0.0.0.3 Trademarks Hazelcast is a registered trademark of Hazelcast, Inc. All other trademarks in this manual are held by their respective owners.


1.0.0.0.4 Customer Support Support for Hazelcast is provided via GitHub, Mail Group and StackOverflow. For information on support for Hazelcast Enterprise, please see hazelcast.com.

1.0.0.0.5 Contributing to Hazelcast You can contribute to the Hazelcast code, report a bug or request an enhancement. Please see the following resources.

- Developing with Git: Document that explains the branch mechanism of Hazelcast and how to request changes.
- Hazelcast Contributor Agreement form: Form that each contributing developer needs to fill and send back to Hazelcast.
- Hazelcast on GitHub: Hazelcast repository where the code is developed, issues and pull requests are managed.

1.0.0.0.6 Typographical Conventions Below table shows the conventions used in this manual.

Convention	Description
bold font	- Indicates part of a sentence that require the reader's specific attention. - Also indicates
<i>italic font</i>	- When italicized words are enclosed with "<" and ">", indicates a variable in command
monospace	- Indicates files, folders, class and library names, code snippets, and inline code words in

Convention	Description
<i>RELATED INFORMATION</i>	- Indicates a resource that is relevant to the topic, usually with a link or cross-reference.
 <i>NOTE</i> element & attribute	Indicates information that is of special interest or importance, e.g. an additional action r Mostly used in the context of declarative configuration, i.e. configuration performed by t

Chapter 2

What's New in Hazelcast 3.6

This chapter includes the release notes, information on how to upgrade Hazelcast from previous releases and the revision history for this document.

2.1 Release Notes

This section lists the new features and enhancements developed and bugs fixed for this release.

2.1.1 New Features

The following the new features introduced with Hazelcast 3.6 release.

- ???: ???
- ???: ???
- ???: ???
- ???: ???
- ???: ???
- ???: ???
- ???: ???
- ???: ???

2.1.2 Enhancements

The following are the the enhancements performed for Hazelcast 3.6 release.

- ???: ???
- ???: ???
- ???: ???

The following are the other improvements performed to solve the enhancement issues opened by the Hazelcast customers/team.

- `Map.Entry` supplied to Entry Processor is not Serializable any more. [5611]
- The configuration file `minimal-json` with the provided scope is not picked up by the `shade` plugin. [5543]
- In Spring configuration, when a boolean property is injected for `hazelcast` bean (`<hz:hazelcast:....</hz:hazelcast>`) a `SAXParseException` is thrown. [5528]
- Currently, key/value pairs are deserialized prior to the execution of entry processor by default. This leads to the need of domain object at the server side, even if entry processor never uses it. [5301]
- In Spring XML configuration, the attributes of `socket-options` should be of type `xs:string`. [4700]
- `ClientMembershipEvent` does not need to have the `member` field. [4282]
- Hazelcast has `lock` with lease time feature but does not support `tryLock` with lease time. [1564]

2.1.3 Fixes

3.6 Fixes

The following are the issues solved for Hazelcast 3.6 release.

- `hazelcast-jca-rar/pom.xml` references to `src/main/rar/ra.xml` which does not exist. [5760]
- The Maven profile `mvn clean compile -Pqa` does not exist but it is documented in the README of Hazelcast. [5746]
- `PerformanceLogFile` only compiles if JDK 1.7 or above is used. [5729]
- Currently, for every deserialization a `BufferObjectDataInput` is created. This generates waste since it is created with an array of data for every deserialization. The `BufferObjectDataOutput` is already cached; the input should use a similar approach. [5562]
- When any entities are defined as read only in the Hibernate L2 cache, an invalidation of the cache (such as caused by executing a native `SQLQuery`) leads to the error `UnsupportedOperationException`. [5562]
- The performance impacts of `TWO_PHASE` and `LOCAL` transaction types should be documented. [5075]
- Client requests are very inefficient when determining the partition ID. [4940]
- The method `keySet()` relies on `QueryOperation`. The `QueryOperation` does not accept `IterationType` - it always returns both keys and values. This can lead to unnecessary load and potentially even an OOM exception. [4642]
- Hazelcast is stuck in `TIMED_WAITING` when used as 2nd level cache for Hibernate. [4406]

2.2 Upgrading Hazelcast

In the following sections, you can see the changes that you should take into account before upgrading to latest Hazelcast from 2.x and 3.x releases.

2.2.1 Upgrading from 2.x

- **Removal of deprecated static methods:** The static methods of Hazelcast class reaching Hazelcast data components have been removed. The functionality of these methods can be reached from `HazelcastInstance` interface. Namely you should replace following:

```
Map<Integer, String> customers = Hazelcast.getMap( "customers" );
```

with

```
HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
// or if you already started an instance named "instance1"
// HazelcastInstance hazelcastInstance = Hazelcast.getHazelcastInstanceByName( "instance1" );
Map<Integer, String> customers = hazelcastInstance.getMap( "customers" );
```

- **Removal of lite members:** With 3.0 there will be no member type as lite member. As 3.0 clients are smart client that they know in which node the data is located, you can replace your lite members with native clients.
- **Renaming “instance” to “distributed object”:** Before 3.0 there was a confusion for the term “instance”. It was used for both the cluster members and the distributed objects (map, queue, topic, etc. instances). Starting 3.0, the term instance will be only used for Hazelcast instances, namely cluster members. We will use the term “distributed object” for map, queue, etc. instances. So you should replace the related methods with the new renamed ones. As 3.0 clients are smart client that they know in which node the data is located, you can replace your lite members with native clients.

```
public static void main( String[] args ) throws InterruptedException {
    HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
```

```

IMap map = hazelcastInstance.getMap( "test" );
Collection<Instance> instances = hazelcastInstance.getInstances();
for ( Instance instance : instances ) {
    if ( instance.getInstanceType() == Instance.InstanceType.MAP ) {
        System.out.println( "There is a map with name: " + instance.getId() );
    }
}
}

```

with

```

public static void main( String[] args ) throws InterruptedException {
    HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
    IMap map = hz.getMap( "test" );
    Collection<DistributedObject> objects = hazelcastInstance.getDistributedObjects();
    for ( DistributedObject distributedObject : objects ) {
        if ( distributedObject instanceof IMap ) {
            System.out.println( "There is a map with name: " + distributedObject.getName() );
        }
    }
}

```

- **Package structure change:** PartitionService has been moved to package `com.hazelcast.core` from `com.hazelcast.partition`.
- **Listener API change:** Before 3.0, `removeListener` methods was taking the Listener object as parameter. But, it causes confusion as same listener object may be used as parameter for different listener registrations. So we have changed the listener API. `addListener` methods return you an unique ID and you can remove listener by using this ID. So you should do following replacement if needed:

```

IMap map = hazelcastInstance.getMap( "map" );
map.addEntryListener( listener, true );
map.removeEntryListener( listener );

```

with

```

IMap map = hazelcastInstance.getMap( "map" );
String listenerId = map.addEntryListener( listener, true );
map.removeEntryListener( listenerId );

```

- **IMap changes:**
- `tryRemove(K key, long timeout, TimeUnit timeunit)` returns boolean indicating whether operation is successful.
- `tryLockAndGet(K key, long time, TimeUnit timeunit)` is removed.
- `putAndUnlock(K key, V value)` is removed.
- `lockMap(long time, TimeUnit timeunit)` and `unlockMap()` are removed.
- `getMapEntry(K key)` is renamed as `getEntryView(K key)`. The returned object's type, `MapEntry` class is renamed as `EntryView`.
- There is no predefined names for merge policies. You just give the full class name of the merge policy implementation.

```
<merge-policy>com.hazelcast.map.merge.PassThroughMergePolicy</merge-policy>
```

Also `MergePolicy` interface has been renamed to `MapMergePolicy` and also returning null from the implemented `merge()` method causes the existing entry to be removed.

- **IQueue changes:** There is no change on IQueue API but there are changes on how IQueue is configured. With Hazelcast 3.0 there will not be backing map configuration for queue. Settings like backup count will be directly configured on queue config. For queue configuration details, please see the [Queue section](#).
- **Transaction API change:** In Hazelcast 3.0, transaction API is completely different. Please see the [Transactions chapter](#).
- **ExecutorService API change:** Classes MultiTask and DistributedTask have been removed. All the functionality is supported by the newly presented interface IExecutorService. Please see the [Executor Service section](#).
- **LifeCycleService API:** The lifecycle has been simplified. `pause()`, `resume()`, `restart()` methods have been removed.
- **AtomicNumber:** AtomicNumber class has been renamed to IAtomicLong.
- **ICountDownLatch:** `await()` operation has been removed. We expect users to use `await()` method with timeout parameters.
- **ISemaphore API:** The ISemaphore has been substantially changed. `attach()`, `detach()` methods have been removed.
- In 2.x releases, the default value for `max-size` eviction policy was `cluster_wide_map_size`. In 3.x releases, default is `PER_NODE`. After upgrading, the `max-size` should be set according to this new default, if it is not changed. Otherwise, it is likely that OutOfMemory exception may be thrown.

2.2.2 Upgrading from 3.x

- **Introducing the spring-aware element:** Before the release 3.5, Hazelcast uses `SpringManagedContext` to scan `SpringAware` annotations by default. This may cause some performance overhead for the users who do not use `SpringAware`. This behavior has been changed with the release of Hazelcast 3.5. `SpringAware` annotations are disabled by default. By introducing the `spring-aware` element, now it is possible to enable it by adding the `<hz:spring-aware />` tag to the configuration. Please see the [Spring Integration section](#).

2.3 Document Revision History

Chapter	Section	Description
Chapter 6 - Distributed Data Structures	Map	Map Eviction section updated by adding
Chapter 11 - Transactions	Local versus Two Phase	Added as a new section explaining the tr
Chapter 12 - Hazelcast JCache	ICache Partition Lost Listener	Added as a new section explaining how t
Chapter 13 - Integrated Clustering	Web Session Replication	transient-attributes added as a new secti
Chapter 15 - Hazelcast Java Client	Hazelcast Clients Feature Comparison	Added as a new section.
Chapter 18 - Management	Cluster Quorum	Added information on quorum support fo
Chapter 23 - Hazelcast Configuration	System Properties	Improved by adding missing configuratio
Chapter 27 - FAQ		Added the new system properties <code>hazelc</code>
Chapter 28 - Glossary		Added new questions/answers.
		Added new glossary items.

Chapter 3

Getting Started

This chapter explains how to install Hazelcast, start a Hazelcast member and client, and gives Hazelcast configuration fundamentals.

3.1 Installation

The following sections explain the installation of Hazelcast and Hazelcast Enterprise.

3.1.1 Hazelcast

You can find Hazelcast in standard Maven repositories. If your project uses Maven, you do not need to add additional repositories to your `pom.xml` or add `hazelcast-<version>.jar` file into your classpath (Maven does that for you). Just add the following lines to your `pom.xml`:

```
<dependencies>
  <dependency>
    <groupId>com.hazelcast</groupId>
    <artifactId>hazelcast</artifactId>
    <version>3.5.1</version>
  </dependency>
</dependencies>
```

As an alternative, you can download and install Hazelcast yourself. You only need to:

- Download `hazelcast-<*version*>.zip` file from www.hazelcast.org `target="_blank">hazelcast.org`
- Unzip `hazelcast-<*version*>.zip` file.
- Add `hazelcast-<*version*>.jar` file into your classpath.

3.1.2 Hazelcast Enterprise

There are two Maven repositories defined for Hazelcast Enterprise:

```
<repository>
  <id>Hazelcast Private Snapshot Repository</id>
  <url>https://repository-hazelcast-1337.forge.cloudbees.com/snapshot/</url>
</repository>
<repository>
```

```

        <id>Hazelcast Private Release Repository</id>
        <url>https://repository-hazelcast-1337.forge.cloudbees.com/release/</url>
</repository>

```

Hazelcast Enterprise customers may also define dependencies, a sample of which is shown below.

```

<dependency>
  <groupId>com.hazelcast</groupId>
  <artifactId>hazelcast-enterprise-tomcat6</artifactId>
  <version>${project.version}</version>
</dependency>
<dependency>
  <groupId>com.hazelcast</groupId>
  <artifactId>hazelcast-enterprise-tomcat7</artifactId>
  <version>${project.version}</version>
</dependency>
<dependency>
  <groupId>com.hazelcast</groupId>
  <artifactId>hazelcast-enterprise</artifactId>
  <version>${project.version}</version>
</dependency>
<dependency>
  <groupId>com.hazelcast</groupId>
  <artifactId>hazelcast-enterprise-all</artifactId>
  <version>${project.version}</version>
</dependency>

```

3.1.2.1 Setting the License Key

To use Hazelcast Enterprise, you need to set the license key in configuration.

- **Declarative Configuration**

```

<hazelcast>
  ...
  <license-key>HAZELCAST_ENTERPRISE_LICENSE_KEY</license-key>
  ...
</hazelcast>

```

- **Client Declarative Configuration**

```

<hazelcast-client>
  ...
  <license-key>HAZELCAST_ENTERPRISE_LICENSE_KEY</license-key>
  ...
</hazelcast-client>

```

- **Programmatic Configuration**

```

Config config = new Config();
config.setLicenseKey( "HAZELCAST_ENTERPRISE_LICENSE_KEY" );

```

- **Spring XML Configuration**


```
<hz:config>
...
<hz:license-key>HAZELCAST_ENTERPRISE_LICENSE_KEY</hz:license-key>
...
</hz:config>
```

- ****JVM System Property****

```
-Dhazelcast.enterprise.license.key=HAZELCAST_ENTERPRISE_LICENSE_KEY
```

3.2 Starting the Member and Client

Having installed Hazelcast, you can get started.

In this short tutorial, you perform the following activities.

1. Create a simple Java application using the Hazelcast distributed map and queue.
2. Run our application twice to have a cluster with two members (JVMs).
3. Connect to our cluster from another Java application by using the Hazelcast Native Java Client API.

Let's begin.

- The following code starts the first Hazelcast member and creates and uses the `customers` map and queue.

```
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.HazelcastInstance;

import java.util.Map;
import java.util.Queue;

public class GettingStarted {
    public static void main( String[] args ) {
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        Map<Integer, String> customers = hazelcastInstance.getMap( "customers" );
        customers.put( 1, "Joe" );
        customers.put( 2, "Ali" );
        customers.put( 3, "Avi" );

        System.out.println( "Customer with key 1: " + customers.get(1) );
        System.out.println( "Map Size:" + customers.size() );

        Queue<String> queueCustomers = hazelcastInstance.getQueue( "customers" );
        queueCustomers.offer( "Tom" );
        queueCustomers.offer( "Mary" );
        queueCustomers.offer( "Jane" );
        System.out.println( "First customer: " + queueCustomers.poll() );
        System.out.println( "Second customer: "+ queueCustomers.peek() );
        System.out.println( "Queue size: " + queueCustomers.size() );
    }
}
```

- Run this `GettingStarted` class a second time to get the second member started. The members form a cluster and the output is similar to the following.

```
Members [2] {
  Member [127.0.0.1:5701]
  Member [127.0.0.1:5702] this
}
```

- Now, add the `hazelcast-client-<version>.jar` library to your classpath. This is required to use a Hazelcast client.
- The following code starts a Hazelcast Client, connects to our cluster, and prints the size of the `customers` map.

```
package com.hazelcast.test;

import com.hazelcast.client.config.ClientConfig;
import com.hazelcast.client.HazelcastClient;
import com.hazelcast.core.HazelcastInstance;
import com.hazelcast.core.IMap;

public class GettingStartedClient {
    public static void main( String[] args ) {
        ClientConfig clientConfig = new ClientConfig();
        HazelcastInstance client = HazelcastClient.newHazelcastClient( clientConfig );
        IMap map = client.getMap( "customers" );
        System.out.println( "Map Size:" + map.size() );
    }
}
```

- When you run it, you see the client properly connecting to the cluster and printing the map size as **3**.

Hazelcast also offers a tool, **Management Center**, that enables you to monitor your cluster. To use it, deploy the `mancenter-<version>.war` included in the ZIP file to your web server. You can use it to monitor your maps, queues, and other distributed data structures and members. Please see the [Management Center section](#) for usage explanations.

By default, Hazelcast uses Multicast to discover other members that can form a cluster. If you are working with other Hazelcast developers on the same network, you may find yourself joining their clusters under the default settings. Hazelcast provides a way to segregate clusters within the same network when using Multicast. Please see the [Creating Cluster Groups](#) for more information. Alternatively, if you do not wish to use the default Multicast mechanism, you can provide a fixed list of IP addresses that are allowed to join. Please see the [Join Configuration section](#) for more information.

RELATED INFORMATION

You can also check the video tutorials [here](#).

3.2.1 Deploying On Amazon EC2

You can deploy your Hazelcast project onto Amazon EC2 environment using Third Party tools such as Vagrant and Chef.

You can find a sample deployment project (`amazon-ec2-vagrant-chef`) with step by step instructions in the `hazelcast-integration` folder of the `hazelcast-code-samples` package. Please refer to this sample project for more information.

3.3 Configuring Hazelcast

When Hazelcast starts up, it checks for the configuration as follows:

- First, it looks for the `hazelcast.config` system property. If it is set, its value is used as the path. This is useful if you want to be able to change your Hazelcast configuration: you can do this because it is not embedded within the application. You can set the `config` option with the following command:

- `Dhazelcast.config=<path to the hazelcast.xml>`.

The path can be a normal one or a classpath reference with the prefix `classpath:.`

- If the above system property is not set, Hazelcast then checks whether there is a `hazelcast.xml` file in the working directory.
- If not, then it checks whether `hazelcast.xml` exists on the classpath.
- If none of the above works, Hazelcast loads the default configuration, i.e. `hazelcast-default.xml` that comes with `hazelcast.jar`.

When you download and unzip `hazelcast-<version>.zip`, you will see a `hazelcast.xml` in the `/bin` folder. This is the declarative configuration file for Hazelcast. Part of this XML file is shown below.

```
<hazelcast xsi:schemaLocation="http://www.hazelcast.com/schema/config hazelcast-config-3.5.xsd"
  xmlns="http://www.hazelcast.com/schema/config"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <group>
    <name>dev</name>
    <password>dev-pass</password>
  </group>
  <management-center enabled="false">http://localhost:8080/mancenter</management-center>
  <network>
    <port auto-increment="true" port-count="100">5701</port>
    <outbound-ports>
      <!--
        Allowed port range when connecting to other nodes.
        0 or * means use system provided port.
      -->
      <ports>0</ports>
    </outbound-ports>
    <join>
      <multicast enabled="true">
        <multicast-group>224.2.2.3</multicast-group>
        <multicast-port>54327</multicast-port>
      </multicast>
      <tcp-ip enabled="false">
```

For most users, default configuration should be fine. If not, you can tailor this XML file according to your needs by adding/removing/modifying properties.

Besides declarative configuration, you can configure your cluster programmatically. Just instantiate a `Config` object and add/remove/modify properties.

You can also use wildcards while configuring Hazelcast. Please refer to the [Using Wildcard](#) section for details.

Hazelcast also offers System Properties to tune some aspects of it. Please refer to the [System Properties](#) section for details.

RELATED INFORMATION

Please refer to the [Hazelcast Configuration](#) chapter for more information.

3.4 Phoning Home

Hazelcast uses phone home data to learn about usage of Hazelcast.

Hazelcast member instances call our phone home server initially when they are started and then for every 24 hours. This applies to all the instances joined to the cluster.

What is sent in?

- The following information is sent in a phone home:
 - Hazelcast version
 - Local Hazelcast member UUID
 - Download ID
 - A hash value of the cluster ID
 - Cluster size bands for 5, 10, 20, 40, 60, 100, 150, 300, 600 and > 600
 - Number of connected clients bands of 5, 10, 20, 40, 60, 100, 150, 300, 600 and > 600
 - Cluster uptime
 - Member uptime
 - Hazelcast Enterprise specific:
 - Number of clients by language (Java, C++, C#)
 - Flag for Hazelcast Enterprise
 - Hash value of license key
 - Native memory usage

Phone Home Code

The phone home code itself is open source. Please see [here](#).

Disabling Phone Homes

Set the `hazelcast.version.check.enabled` system property to false either in the config or on the Java command line. Please see the [System Properties section](#) for information on how to set a property.

Phone Home URLs

For older versions(versions 1.x - 2.x): <http://www.hazelcast.com:80/version.jsp>.

For new versions (versions 3.x): <http://version.checkhazelcast.com:80/version.jsp>.

Chapter 4

Hazelcast Overview

Hazelcast is an open source In-Memory Data Grid (IMDG). It provides elastically scalable distributed In-Memory computing, widely recognized as the fastest and most scalable approach to application performance. Hazelcast does this in open source. More importantly, Hazelcast makes distributed computing simple by offering distributed implementations of many developer friendly interfaces from Java such as Map, Queue, ExecutorService, Lock, and JCache. For example, the Map interface provides an In-Memory Key Value store which confers many of the advantages of NoSQL in terms of developer friendliness and developer productivity.

In addition to distributing data In-Memory, Hazelcast provides a convenient set of APIs to access the CPUs in your cluster for maximum processing speed. Hazelcast is designed to be lightweight and easy to use. Since Hazelcast is delivered as a compact library (JAR) and since it has no external dependencies other than Java, it easily plugs into your software solution and provides distributed data structures and distributed computing utilities.

Hazelcast is highly scalable and available (100% operational, never failing). Distributed applications can use Hazelcast for distributed caching, synchronization, clustering, processing, pub/sub messaging, etc. Hazelcast is implemented in Java and has clients for Java, C/C++, .NET and REST. Hazelcast also speaks memcache protocol. It plugs into Hibernate and can easily be used with any existing database system.

If you are looking for In-Memory speed, elastic scalability, and the developer friendliness of NoSQL, Hazelcast is a great choice.

Hazelcast is simple

Hazelcast is written in Java with no other dependencies. It exposes the same API from the familiar Java util package, exposing the same interfaces. Just add `hazelcast.jar` to your classpath, and you can quickly enjoy JVMs clustering and you can start building scalable applications.

Hazelcast is Peer-to-Peer

Unlike many NoSQL solutions, Hazelcast is peer-to-peer. There is no master and slave; there is no single point of failure. All nodes store equal amounts of data and do equal amounts of processing. You can embed Hazelcast in your existing application or use it in client and server mode where your application is a client to Hazelcast nodes.

Hazelcast is scalable

Hazelcast is designed to scale up to hundreds and thousands of nodes. Simply add new nodes and they will automatically discover the cluster and will linearly increase both memory and processing capacity. The nodes maintain a TCP connection between each other and all communication is performed through this layer.

Hazelcast is fast

Hazelcast stores everything in-memory. It is designed to perform very fast reads and updates.

Hazelcast is redundant

Hazelcast keeps the backup of each data entry on multiple nodes. On a node failure, the data is restored from the backup and the cluster will continue to operate without downtime.

4.1 Sharding in Hazelcast

Hazelcast shards are called Partitions. By default, Hazelcast has 271 partitions. Given a key, we serialize, hash and mode it with the number of partitions to find the partition which the key belongs to. The partitions themselves are distributed equally among the members of the cluster. Hazelcast also creates the backups of partitions and distributes them among nodes for redundancy.

RELATED INFORMATION

Please refer to the [Data Partitioning section](#) for more information on how Hazelcast partitions your data.

4.2 Hazelcast Topology

You can deploy a Hazelcast cluster in two ways: Embedded or Client/Server.

If you have an application whose main focal point is asynchronous or high performance computing and lots of task executions, then Embedded deployment is useful. In this type, members include both the application and Hazelcast data and services. The advantage of the Embedded deployment is having a low-latency data access.

See the below illustration.

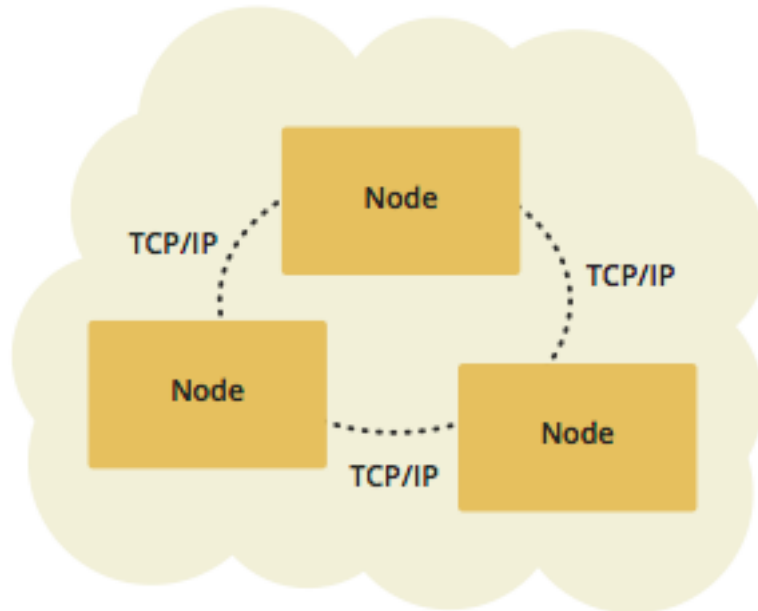


Figure 4.1:

In the Client/Server deployment, Hazelcast data and services are centralized in one or more server members and they are accessed by the application through clients. You can have a cluster of server members that can be independently created and scaled. Your clients communicate with these members to reach to Hazelcast data and services on them. Hazelcast provides native clients (Java, .NET and C++), Memcache clients and REST clients. See the below illustration.

Client/Server deployment has advantages including more predictable and reliable Hazelcast performance, easier identification of problem causes, and most importantly, better scalability. When you need to scale in this deployment type, just add more Hazelcast server members. You can address client and server scalability concerns separately.

If you want low-latency data access, as it is in the Embedded deployment, and you also want the scalability advantages of the Client/Server deployment, you can consider to define near caches for your clients. This enables the frequently used data to be kept in the client's local memory. Please refer to the [Client Near Cache Configuration section](#).

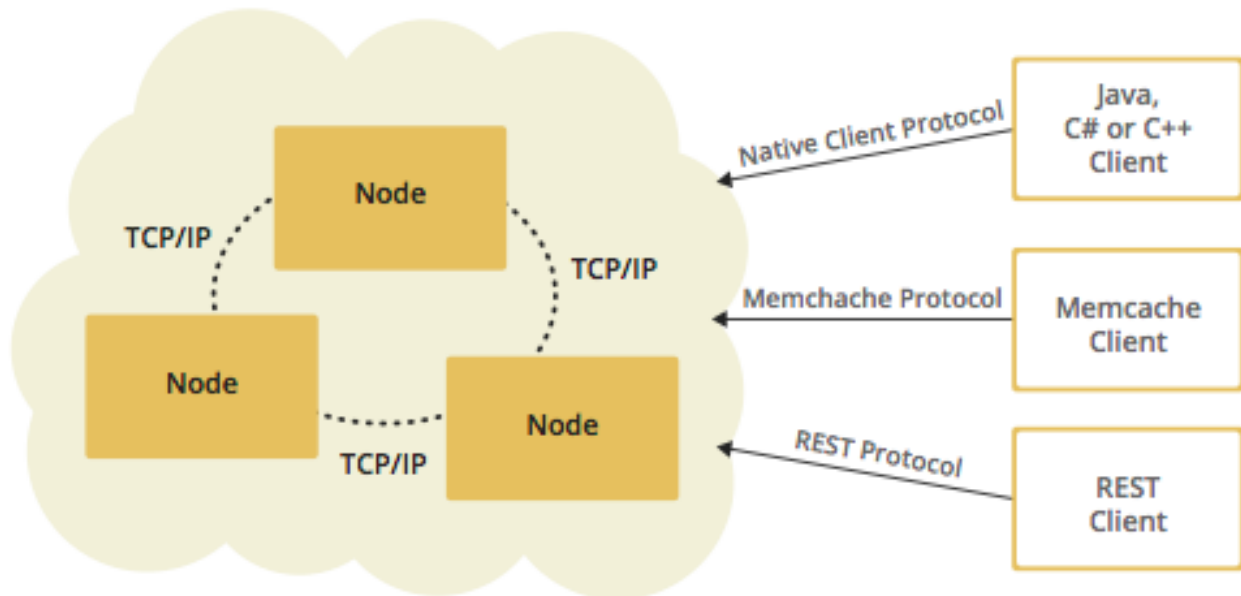


Figure 4.2:

4.3 Why Hazelcast?

A Glance at Traditional Data Persistence

Data is at the core of software systems. In conventional architectures, a relational database persists and provides access to data. Applications are talking directly with a database which has its backup as another machine. To increase performance, tuning or a faster machine is required. This can cost a large amount of money or effort.

There is also the idea of keeping copies of data next to the database, which is performed using technologies like external key-value stores or second level caching. This helps to offload the database. However, when the database is saturated or the applications perform mostly “put” operations (writes), this approach is of no use because it insulates the database only from the “get” loads (reads). Even if the applications are read-intensive, there can be consistency problems: when data changes, what happens to the cache, and how are the changes handled? This is when concepts like time-to-live (TTL) or write-through come in.

However, in the case of TTL, if the access is less frequent than the TTL, the result will always be a cache miss. On the other hand, in the case of write-through caches; if there are more than one of these caches in a cluster, then we again have consistency issues. This can be avoided by having the nodes communicating with each other so that entry invalidations can be propagated.

We can conclude that an ideal cache would combine TTL and write-through features. And, there are several cache servers and in-memory database solutions in this field. However, those are stand-alone single instances with a distribution mechanism to an extent provided by other technologies. This brings us back to square one: we would experience saturation or capacity issues if the product is a single instance or if consistency is not provided by the distribution.

And, there is Hazelcast

Hazelcast, a brand new approach to data, is designed around the concept of distribution. Hazelcast shares data around the cluster for flexibility and performance. It is an in-memory data grid for clustering and highly scalable data distribution.

One of the main features of Hazelcast is not having a master node. Each node in the cluster is configured to be the same in terms of functionality. The oldest node (the first node created in the node cluster) manages the cluster members, i.e. automatically performs the data assignment to nodes. If the oldest node dies, the second oldest node will manage the cluster members.

Another main feature is the data being held entirely in-memory. This is fast. In the case of a failure, such as a node crash, no data will be lost since Hazelcast distributes copies of data across all the nodes of cluster.

As shown in the feature list in the [Hazelcast Overview](#), Hazelcast supports a number of distributed data structures and distributed computing utilities. This provides powerful ways of accessing distributed clustered memory and accessing CPUs for true distributed computing.

Hazelcast's Distinctive Strengths

- It is open source.
- It is a small JAR file. You do not need to install software.
- It is a library, it does not impose an architecture on Hazelcast users.
- It provides out of the box distributed data structures (i.e. Map, Queue, MultiMap, Topic, Lock, Executor, etc.).
- There is no “master”, so no single point of failure in Hazelcast cluster; each node in the cluster is configured to be functionally the same.
- When the size of your memory and compute requirement increases, new nodes can be dynamically joined to the cluster to scale elastically.
- Data is resilient to node failure. Data backups are distributed across the cluster. This is a big benefit when a node in the cluster crashes: data will not be lost.
- Nodes are always aware of each other: they communicate, unlike traditional key-value caching solutions.
- You can build your own custom distributed data structures using the Service Programming Interface (SPI) if you are not happy with the data structures provided.

Finally, Hazelcast has a vibrant open source community enabling it to be continuously developed.

Hazelcast is a fit when you need:

- analytic applications requiring big data processing by partitioning the data,
- to retain frequently accessed data in the grid,
- a cache, particularly an open source JCache provider with elastic distributed scalability,
- a primary data store for applications with utmost performance, scalability and low-latency requirements,
- an In-Memory NoSQL Key Value Store,
- publish/subscribe communication at highest speed and scalability between applications,
- applications that need to scale elastically in distributed and cloud environments,
- a highly available distributed cache for applications,
- an alternative to Coherence, Gemfire and Terracotta.

4.4 Data Partitioning

As you read in the [Sharding in Hazelcast section](#), Hazelcast shards are called Partitions. Partitions are memory segments, where each of those segments can contain hundreds or thousands of data entries, depending on the memory capacity of your system.

By default, Hazelcast offers 271 partitions. When you start a cluster member, it starts with these 271 partitions. The following illustration shows the partitions in a Hazelcast cluster with single member.

When you start a second node on that cluster (creating a Hazelcast cluster with 2 members), the partitions are distributed as shown in the following illustration.

In the illustration, the partitions with black text are primary partitions, and the partitions with blue text are replica partitions (backups). The first member has 135 primary partitions (black), and each of these partitions are backed up in the second member (blue). At the same time, the first member also has the replica partitions of the second member's primary partitions.

As you add more members, Hazelcast one-by-one moves some of the primary and replica partitions to the new members, making all members equal and redundant. Only the minimum amount of partitions will be moved to scale out Hazelcast. The following is an illustration of the partition distributions in a Hazelcast cluster with 4 members.

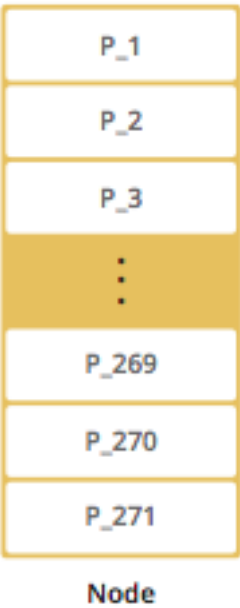


Figure 4.3:

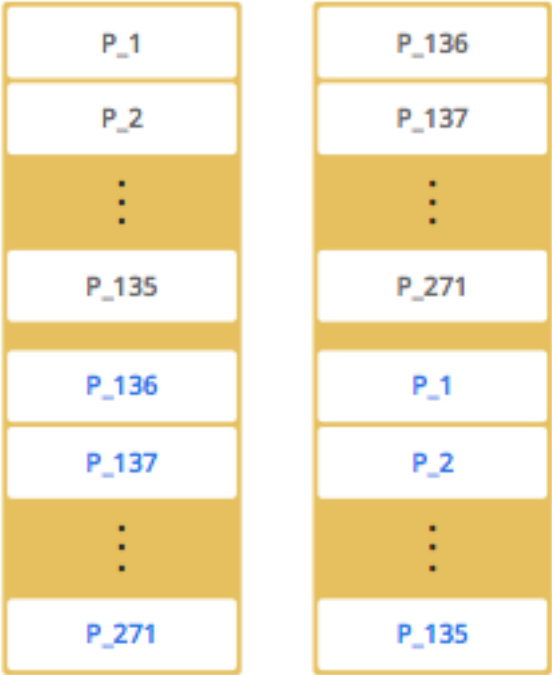


Figure 4.4:

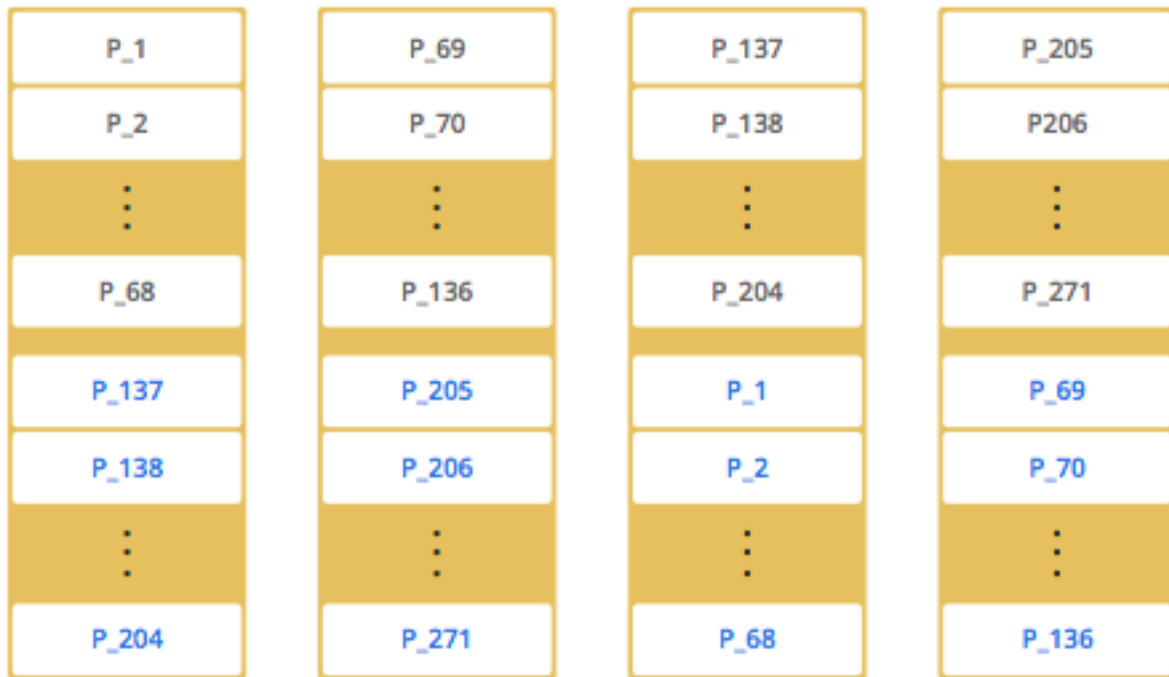


Figure 4.5:

Hazelcast distributes the partitions equally among the members of the cluster. Hazelcast creates the backups of partitions and distributes them among the members for redundancy.



NOTE: Partition distributions in the above illustrations are for your convenience and for a more clearer description. Normally, the partitions are not distributed in an order (as they are shown in these illustrations), they are distributed randomly. The important point here is that Hazelcast equally distributes the partitions and their backups among the members.

4.4.1 How the Data is Partitioned

Hazelcast distributes data entries into the partitions using a hashing algorithm. Given an object key (for example, for a map) or an object name (for example, for a topic or list):

- the key or name is serialized (converted into a byte array),
- this byte array is hashed, and
- the result of the hash is mod by the number of partitions.

The result of this modulo - $MOD(hash\ result, partition\ count)$ - gives the partition in which the data will be stored, i.e. the partition ID. For ALL the members you have in your cluster, the partition ID for a given key will always be the same.

4.4.2 Partition Table

When you start a member, a partition table is created within it. This table stores the partition IDs and the cluster members they belong. The purpose of this table is to make all members in the cluster aware of this information, making sure that each member knows where the data is.

The oldest member in the cluster (the one that started first) periodically sends the partition table to all members. In this way, each member in the cluster is informed about any changes to the partition ownership. The ownerships may be changed when, for example, a new member joins the cluster, or when a member leaves the cluster.



NOTE: *If the oldest member goes down, the next oldest member sends the partition table information to the other ones.*

You can configure the frequency (how often) that the member sends the partition table the information by using the `hazelcast.partition.table.send.interval` system property. The property is set to every 15 seconds by default.

4.4.3 Repartitioning

Repartitioning is the process of redistribution of partition ownerships. Hazelcast performs the repartitioning in the following cases:

- When a member joins to the cluster.
- When a member leaves the cluster.

In these cases, the partition table in the oldest member is updated with the new partition ownerships.

4.5 Use Cases

Some example usages are listed below. Hazelcast can be used: - To share server configuration/information to see how a cluster performs,

- To cluster highly changing data with event notifications (e.g. user based events) and to queue and distribute background tasks,
- As a simple Memcache with near cache,
- As a cloud-wide scheduler of certain processes that need to be performed on some nodes,
- To share information (user information, queues, maps, etc.) on the fly with multiple nodes in different installations under OSGI environments,
- To share thousands of keys in a cluster where there is a web service interface on an application server and some validation,
- As a distributed topic (publish/subscribe server) to build scalable chat servers for smartphones,
- As a front layer for a Cassandra back-end,
- To distribute user object states across the cluster, to pass messages between objects and to share system data structures (static initialization state, mirrored objects, object identity generators),
- As a multi-tenancy cache where each tenant has its own map,
- To share datasets (e.g. table-like data structure) to be used by applications,
- To distribute the load and collect status from Amazon EC2 servers where front-end is developed using, for example, Spring framework,
- As a real time streamer for performance detection,
- As storage for session data in web applications (enables horizontal scalability of the web application).

4.6 Resources

- Hazelcast source code can be found at [Github/Hazelcast](#).
- Hazelcast API can be found at [Hazelcast.org/docs/Javadoc](#).
- Code samples can be downloaded from [Hazelcast.org/download](#).
- More use cases and resources can be found at [Hazelcast.com](#).
- Questions and discussions can be posted at Hazelcast mail group.

Chapter 5

Hazelcast Clusters

This chapter describes Hazelcast clusters and the ways cluster members use to form a Hazelcast cluster.

5.1 Discovering Cluster Members

A Hazelcast cluster is a network of cluster members that run Hazelcast. Cluster members (also called nodes) automatically join together to form a cluster. This automatic joining takes place with various discovery mechanisms that the cluster members use to find each other. Hazelcast uses the following discovery mechanisms.

- Multicast
- TCP
- EC2 Cloud

Each discovery mechanism is explained in the following sections.



NOTE: After a cluster is formed, communication between cluster members is always via TCP/IP, regardless of the discovery mechanism used.

5.1.1 Discovering Members by Multicast

With the multicast auto-discovery mechanism, Hazelcast allows cluster members to find each other using multicast communication. The cluster members do not need to know the concrete addresses of the other members, they just multicast to all the other members for listening. It depends on your environment if multicast is possible or allowed.

To set your Hazelcast to multicast auto-discovery, set the following configuration elements. Please refer to the [multicast element section](#) for the full description of the multicast discovery configuration elements.

- Set the `enabled` attribute of the `multicast` element to “true”.
- Set `multicast-group`, `multicast-port`, `multicast-time-to-live`, etc. to your multicast values.
- Set the `enabled` attribute of both `tcp-ip` and `aws` elements to “false”.

The following is an example declarative configuration.

```
<network>
  <join>
    <multicast enabled="true">
      <multicast-group>224.2.2.3</multicast-group>
      <multicast-port>54327</multicast-port>
      <multicast-time-to-live>32</multicast-time-to-live>
```

```

        <multicast-timeout-seconds>2</multicast-timeout-seconds>
        <trusted-interfaces>
            <interface>192.168.1.102</interface>
        </trusted-interfaces>
    </multicast>
    <tcp-ip enabled="false">
    </tcp-ip>
    <aws enabled="false">
    </aws>
</join>
</network>

```

Pay attention to the `multicast-timeout-seconds` element. `multicast-timeout-seconds` specifies the time in seconds that a node should wait for a valid multicast response from another node running in the network before declaring itself as the leader node (the first node joined to the cluster) and creating its own cluster. This only applies to the startup of nodes where no leader has been assigned yet. If you specify a high value to `multicast-timeout-seconds`, such as 60 seconds, it means that until a leader is selected, each node will wait 60 seconds before moving on. Be careful when providing a high value. Also be careful not to set the value too low, or the nodes might give up too early and create their own cluster.

5.1.2 Discovering Members by TCP

If multicast is not the preferred way of discovery for your environment, then you can configure Hazelcast to be a full TCP/IP cluster. When you configure Hazelcast to discover members by TCP/IP, you must list all or a subset of the members' hostnames and/or IP addresses as cluster members. You do not have to list all of these cluster members, but at least one of the listed members has to be active in the cluster when a new member joins.

To set your Hazelcast to be a full TCP/IP cluster, set the following configuration elements. Please refer to the [tcp-ip element section](#) for the full description of the TCP/IP discovery configuration elements.

- Set the `enabled` attribute of the `multicast` element to “false”.
- Set the `enabled` attribute of the `aws` element to “false”.
- Set the `enabled` attribute of the `tcp-ip` element to “true”.
- Set your `member` elements within the `tcp-ip` element.

The following is an example declarative configuration.

```

<hazelcast>
...
<network>
...
    <join>
        <multicast enabled="false">
        </multicast>
        <tcp-ip enabled="true">
            <member>machine1</member>
            <member>machine2</member>
            <member>machine3:5799</member>
            <member>192.168.1.0-7</member>
            <member>192.168.1.21</member>
        </tcp-ip>
        ...
    </join>
    ...
</network>
...
</hazelcast>

```

As shown above, you can provide IP addresses or hostnames for `member` elements. You can also give a range of IP addresses, such as `192.168.1.0-7`.

Instead of providing members line by line as shown above, you also have the option to use the `members` element and write comma-separated IP addresses, as shown below.

```
<members>192.168.1.0-7,192.168.1.21</members>
```

If you do not provide ports for the members, Hazelcast automatically tries the ports 5701, 5702, and so on.

By default, Hazelcast binds to all local network interfaces to accept incoming traffic. You can change this behavior using the system property `hazelcast.socket.bind.any`. If you set this property to `false`, Hazelcast uses the interfaces specified in the `interfaces` element (please refer to the [Interfaces Configuration section](#)). If no interfaces are provided, then it will try to resolve one interface to bind from the `member` elements.

5.1.3 Discovering Members within EC2 Cloud

Hazelcast supports EC2 Auto Discovery. It is useful when you do not want to provide or you cannot provide the list of possible IP addresses.

To configure your cluster to use EC2 Auto Discovery, set the following configuration elements. Please refer to the [aws element section](#) for the full description of the EC2 Auto Discovery configuration elements.

- Add the `hazelcast-cloud.jar` dependency to your project. Note that it is also bundled inside `hazelcast-all.jar`. The Hazelcast cloud module does not depend on any other third party modules.
- Disable join over multicast and TCP/IP: set the `enabled` attribute of the `multicast` element to “false”, and set the `enabled` attribute of the `tcp-ip` element to “false”.
- Set the `enabled` attribute of the `aws` element to “true”.
- Within the `aws` element, provide your credentials (access and secret key), your region, etc.

The following is an example declarative configuration.

```
<join>
  <multicast enabled="false">
  </multicast>
  <tcp-ip enabled="false">
  </tcp-ip>
  <aws enabled="true">
    <access-key>my-access-key</access-key>
    <secret-key>my-secret-key</secret-key>
    <region>us-west-1</region>
    <host-header>ec2.amazonaws.com</host-header>
    <security-group-name>hazelcast-sg</security-group-name>
    <tag-key>type</tag-key>
    <tag-value>hz-nodes</tag-value>
  </aws>
</join>
```

5.1.3.1 Debugging

When needed, Hazelcast can log the events for the instances that exist in a region. To see what has happened or to trace the activities while forming the cluster, change the log level in your logging mechanism to `FINEST` or `DEBUG`. After this change, you can also see in the generated log whether the instances are accepted or rejected, and the reason the instances were rejected. Note that changing the log level in this way may affect the performance of the cluster. Please see the [Logging Configuration section](#) for information on logging mechanisms.

RELATED INFORMATION

You can download the white paper “Hazelcast on AWS: Best Practices for Deployment”* from Hazelcast.com.*

5.2 Creating Cluster Groups

You can create cluster groups. To do this, use the `group` configuration element.

By specifying a group name and group password, you can separate your clusters in a simple way. Example groupings can be by *development*, *production*, *test*, *app*, etc. The following is an example declarative configuration.

```
<hazelcast>
  <group>
    <name>app1</name>
    <password>app1-pass</password>
  </group>
  ...
</hazelcast>
```

You can also define the cluster groups using the programmatic configuration. A JVM can host multiple Hazelcast instances. Each Hazelcast instance can only participate in one group. Each Hazelcast instance only joins to its own group, it does not mess with other groups. The following code example creates three separate Hazelcast instances: `h1` belongs to the `app1` cluster, while `h2` and `h3` belong to the `app2` cluster.

```
Config configApp1 = new Config();
configApp1.getGroupConfig().setName( "app1" ).setPassword( "app1-pass" );

Config configApp2 = new Config();
configApp2.getGroupConfig().setName( "app2" ).setPassword( "app2-pass" );

HazelcastInstance h1 = Hazelcast.newHazelcastInstance( configApp1 );
HazelcastInstance h2 = Hazelcast.newHazelcastInstance( configApp2 );
HazelcastInstance h3 = Hazelcast.newHazelcastInstance( configApp2 );
```


Chapter 6

Distributed Data Structures

As mentioned in the [Overview section](#), Hazelcast offers distributed implementations of Java interfaces. Below is the Java interface list with links to each section in this manual.

- **Standard utility collections:**

- **Map:** The distributed implementation of `java.util.Map` lets you read from and write to a Hazelcast map with methods like `get` and `put`.
- **Queue:** The distributed queue is an implementation of `java.util.concurrent.BlockingQueue`. You can add an item in one machine and remove it from another one.
- **RingBuffer:** The distributed RingBuffer is implemented for reliable eventing system.
- **Set:** The distributed and concurrent implementation of `java.util.Set`. It does not allow duplicate elements and does not preserve their order.
- **List:** Very similar to Hazelcast List, except that it allows duplicate elements and preserves their order.
- **MultiMap:** This is a specialized Hazelcast map. It is distributed, where multiple values under a single key can be stored.
- **ReplicatedMap:** This does not partition data, i.e. it does not spread data to different cluster members. Instead, it replicates the data to all nodes.

- **Topic:** Distributed mechanism for publishing messages that are delivered to multiple subscribers; this is also known as a publish/subscribe (pub/sub) messaging model. Please see the [Topic section](#) for more information. There is also the Reliable Topic data structure which uses the same Hazelcast Topic interface. As a difference, it is backed up by the Ringbuffer data structure. Please see the [Reliable Topic section](#).

- **Concurrency utilities:**

- **Lock:** Distributed implementation of `java.util.concurrent.locks.Lock`. When you lock using Hazelcast Lock, the critical section that it guards is guaranteed to be executed by only one thread in the entire cluster.
- **Semaphore:** Distributed implementation of `java.util.concurrent.Semaphore`. When performing concurrent activities, semaphores offer permits to control the thread counts.
- **AtomicLong:** Distributed implementation of `java.util.concurrent.atomic.AtomicLong`. Most of AtomicLong's operations are available. However, these operations involve remote calls and hence their performances differ from AtomicLong, due to being distributed.
- **AtomicReference:** When you need to deal with a reference in a distributed environment, you can use Hazelcast AtomicReference. This is the distributed version of `java.util.concurrent.atomic.AtomicReference`.
- **IdGenerator:** You use Hazelcast IdGenerator to generate cluster-wide unique identifiers. ID generation occurs almost at the speed of `AtomicLong.incrementAndGet()`.
- **CountDownLatch:** Distributed implementation of `java.util.concurrent.CountDownLatch`. Hazelcast CountDownLatch is a gate keeper for concurrent activities, enabling the threads to wait for other threads to complete their operations.

Common Features of all Hazelcast Data Structures:

- If a member goes down, its backup replica (which holds the same data) will dynamically redistribute the data, including the ownership and locks on them, to the remaining live nodes. As a result, no data will be lost.
- There is no single cluster master that can cause single point of failure. Every node in the cluster has equal rights and responsibilities. No single node is superior. There is no dependency on an external ‘server’ or ‘master’.

Here is an example of how you can retrieve existing data structure instances (map, queue, set, lock, topic, etc.) and how you can listen for instance events, such as an instance being created or destroyed.

```
import java.util.Collection;
import com.hazelcast.config.Config;
import com.hazelcast.core.*;

public class Sample implements DistributedObjectListener {
    public static void main(String[] args) {
        Sample sample = new Sample();

        Config config = new Config();
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance(config);
        hazelcastInstance.addDistributedObjectListener(sample);

        Collection<DistributedObject> distributedObjects = hazelcastInstance.getDistributedObjects();
        for (DistributedObject distributedObject : distributedObjects) {
            System.out.println(distributedObject.getName() + "," + distributedObject.getId());
        }
    }

    @Override
    public void distributedObjectCreated(DistributedObjectEvent event) {
        DistributedObject instance = event.getDistributedObject();
        System.out.println("Created " + instance.getName() + "," + instance.getId());
    }

    @Override
    public void distributedObjectDestroyed(DistributedObjectEvent event) {
        DistributedObject instance = event.getDistributedObject();
        System.out.println("Destroyed " + instance.getName() + "," + instance.getId());
    }
}
```

6.1 Map

Hazelcast Map (IMap) extends the interface `java.util.concurrent.ConcurrentMap` and hence `java.util.Map`. It is the distributed implementation of Java map. You can perform operations like reading and writing from/to a Hazelcast map with the well known get and put methods.

6.1.1 Getting a Map and Putting an Entry

Hazelcast will partition your map entries and almost evenly distribute them onto all Hazelcast members. Each member carries approximately “ $(1/n * \text{total-data}) + \text{backups}$ ”, *n* being the number of members in the cluster. For example, if you have a member with 1000 objects to be stored in the cluster, and then you start a second member, each member will both store 500 objects and back up the 500 objects in the other member.

Let’s create a Hazelcast instance and fill a map named `Capitals` with key-value pairs using the following code. Use the `HazelcastInstance` `getMap` method to get the map, then use the map `put` method to put an entry into the map.

```

public class FillMapMember {
    public static void main( String[] args ) {
        HazelcastInstance hzInstance = Hazelcast.newHazelcastInstance();
        Map<String, String> capitalcities = hzInstance.getMap( "capitals" );
        capitalcities.put( "1", "Tokyo" );
        capitalcities.put( "2", "Paris" );
        capitalcities.put( "3", "Washington" );
        capitalcities.put( "4", "Ankara" );
        capitalcities.put( "5", "Brussels" );
        capitalcities.put( "6", "Amsterdam" );
        capitalcities.put( "7", "New Delhi" );
        capitalcities.put( "8", "London" );
        capitalcities.put( "9", "Berlin" );
        capitalcities.put( "10", "Oslo" );
        capitalcities.put( "11", "Moscow" );
        ...
        ...
        capitalcities.put( "120", "Stockholm" )
    }
}

```

When you run this code, a cluster member is created with a map whose entries are distributed across the members's partitions. See the below illustration. For now, this is a single member cluster.



Figure 6.1:



NOTE: Please note that some of the partitions will not contain any data entries since we only have 120 objects and the partition count is 271 by default. This count is configurable and can be changed using the system property `hazelcast.partition.count`. Please see the [System Properties](#) section.

6.1.1.1 Creating A Member for Map Backup

Now, let's create a second member by running the above code again. This will create a cluster with 2 members. This is also where backups of entries are created; remember the backup partitions mentioned in the [Hazelcast Overview](#) section. The following illustration shows two members and how the data and its backup is distributed.

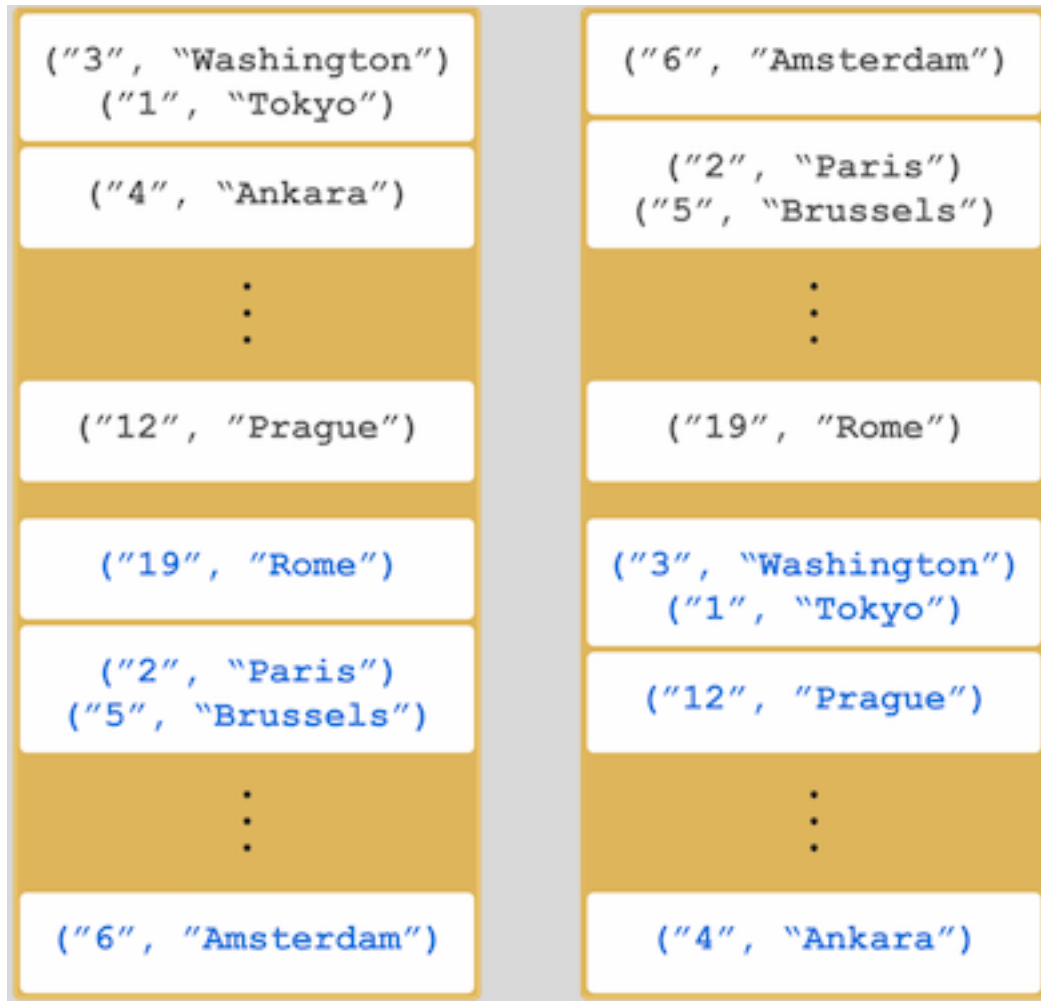


Figure 6.2:

As you see, when a new member joins the cluster, it takes ownership and loads some of the data in the cluster. Eventually, it will carry almost $(1/n * \text{total-data}) + \text{backups}$ of the data, reducing the load on other nodes.

`HazelcastInstance::getMap` returns an instance of `com.hazelcast.core.IMap` which extends the `java.util.concurrent.ConcurrentMap` interface. Methods like `ConcurrentMap.putIfAbsent(key,value)` and `ConcurrentMap.replace(key,value)` can be used on the distributed map, as shown in the example below.

```
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.HazelcastInstance;
import java.util.concurrent.ConcurrentMap;
```

```
HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
```

```

Customer getCustomer( String id ) {
    ConcurrentMap<String, Customer> customers = hazelcastInstance.getMap( "customers" );
    Customer customer = customers.get( id );
    if (customer == null) {
        customer = new Customer( id );
        customer = customers.putIfAbsent( id, customer );
    }
    return customer;
}

public boolean updateCustomer( Customer customer ) {
    ConcurrentMap<String, Customer> customers = hazelcastInstance.getMap( "customers" );
    return ( customers.replace( customer.getId(), customer ) != null );
}

public boolean removeCustomer( Customer customer ) {
    ConcurrentMap<String, Customer> customers = hazelcastInstance.getMap( "customers" );
    return customers.remove( customer.getId(), customer );
}

```

All `ConcurrentMap` operations such as `put` and `remove` might wait if the key is locked by another thread in the local or remote JVM. But, they will eventually return with success. `ConcurrentMap` operations never throw a `java.util.ConcurrentModificationException`.

Also see:

- [Data Affinity section](#).
- [Map Configuration with wildcards](#).
- [Map Configuration section](#) for a full description of Hazelcast Distributed Map configuration.

6.1.2 Backing Up Maps

Hazelcast distributes map entries onto multiple cluster members (JVMs). Each member holds some portion of the data.

Distributed maps have 1 backup by default. If a member goes down, you do not lose data. Backup operations are synchronous, so when a `map.put(key, value)` returns, it is guaranteed that the map entry is replicated to one other node. For the reads, it is also guaranteed that `map.get(key)` returns the latest value of the entry. Consistency is strictly enforced.

6.1.2.1 Creating Sync Backups

To provide data safety, Hazelcast allows you to specify the number of backup copies you want to have. That way, data on a cluster member will be copied onto other member(s).

To create synchronous backups, select the number of backup copies using the `backup-count` property.

```

<hazelcast>
  <map name="default">
    <backup-count>1</backup-count>
  </map>
</hazelcast>

```

When this count is 1, a map entry will have its backup on one other node in the cluster. If you set it to 2, then a map entry will have its backup on two other nodes. You can set it to 0 if you do not want your entries to be backed up, e.g. if performance is more important than backing up. The maximum value for the backup count is 6.

Hazelcast supports both synchronous and asynchronous backups. By default, backup operations are synchronous and configured with `backup-count`. In this case, backup operations block operations until backups are successfully copied to backup nodes (or deleted from backup nodes in case of remove) and acknowledgements are received. Therefore, backups are updated before a `put` operation is completed. Sync backup operations have a blocking cost which may lead to latency issues.

6.1.2.2 Creating Async Backups

Asynchronous backups, on the other hand, do not block operations. They are fire & forget and do not require acknowledgements; the backup operations are performed at some point in time.

To create asynchronous backups, select the number of async backups with the `async-backup-count` property. An example is shown below.

```
<hazelcast>
  <map name="default">
    <backup-count>0</backup-count>
    <async-backup-count>1</async-backup-count>
  </map>
</hazelcast>
```



NOTE: Backups increase memory usage since they are also kept in memory.



NOTE: A map can have both sync and async backups at the same time.

6.1.2.3 Enabling Backup Reads

By default, Hazelcast has one sync backup copy. If `backup-count` is set to more than 1, then each member will carry both owned entries and backup copies of other members. So for the `map.get(key)` call, it is possible that the calling member has a backup copy of that key. By default, `map.get(key)` will always read the value from the actual owner of the key for consistency.

To enable backup reads (read local backup entries), set the value of the `read-backup-data` property to **true**. Its default value is **false** for strong consistency. Enabling backup reads can improve performance.

```
<hazelcast>
  <map name="default">
    <backup-count>0</backup-count>
    <async-backup-count>1</async-backup-count>
    <read-backup-data>true</read-backup-data>
  </map>
</hazelcast>
```

This feature is available when there is at least 1 sync or async backup.

6.1.3 Evicting Map Entries

Unless you delete the map entries manually or use an eviction policy, they will remain in the map. Hazelcast supports policy based eviction for distributed maps. Currently supported policies are LRU (Least Recently Used) and LFU (Least Frequently Used).

Map eviction works based on the size of a partition. For example, once you specify a size using the `PER_NODE` attribute for `max-size` (please see [Configuring Map Eviction](#)), Hazelcast internally calculates the maximum size for every partition. The eviction process starts according to this calculated per-partition maximum size when you try to put an entry. The section below gives an example scenario.

6.1.3.1 Understanding Map Eviction

Assume that you have the following figures:

- Partition count: 200
- Entry count for each partition: 100
- `max-size` (`PER_NODE`): 20000
- `eviction-percentage` (please see [Configuring Map Eviction](#)): 10%

The total number of entries here is 20000 (partition count * entry count for each partition). This means you are at the eviction threshold since you set the `max-size` to 20000. When you try to put an entry:

1. The entry goes to the relevant partition.
2. The partition checks whether the eviction threshold is reached (`max-size`).
3. If reached, approximately 10 (100 * 10%) entries are evicted from that particular partition.

As a result of this eviction process, when you check the size of your map, it is ~19990 (20000 - ~10). After this eviction, subsequent put operations will not trigger the next eviction until the map size is again close to the `max-size`.



NOTE: The above scenario is just an example to describe how the eviction process works. Hazelcast finds the most optimum number of entries to be evicted according to your cluster size and selected policy.

6.1.3.2 Configuring Map Eviction

The following is an example declarative configuration for map eviction.

```
<hazelcast>
  <map name="default">
    ...
    <time-to-live-seconds>0</time-to-live-seconds>
    <max-idle-seconds>0</max-idle-seconds>
    <eviction-policy>LRU</eviction-policy>
    <max-size policy="PER_NODE">5000</max-size>
    <eviction-percentage>25</eviction-percentage>
    <min-eviction-check-millis>100</min-eviction-check-millis>
    ...
  </map>
</hazelcast>
```

Let's describe each element.

- `time-to-live`: Maximum time in seconds for each entry to stay in the map. If it is not 0, entries that are older than this time and not updated for this time are evicted automatically. Valid values are integers between 0 and `Integer.MAX_VALUE`. Default value is 0, which means infinite. If it is not 0, entries are evicted regardless of the set `eviction-policy`.
- `max-idle-seconds`: Maximum time in seconds for each entry to stay idle in the map. Entries that are idle for more than this time are evicted automatically. An entry is idle if no `get`, `put` or `containsKey` is called. Valid values are integers between 0 and `Integer.MAX_VALUE`. Default value is 0, which means infinite.
- `eviction-policy`: Valid values are described below.
 - `NONE`: Default policy. If set, no items will be evicted and the property `max-size` will be ignored. You still can combine it with `time-to-live-seconds` and `max-idle-seconds`.
 - `LRU`: Least Recently Used.

- LFU: Least Frequently Used.
- **max-size**: Maximum size of the map. When maximum size is reached, the map is evicted based on the policy defined. Valid values are integers between 0 and `Integer.MAX_VALUE`. Default value is 0. If you want **max-size** to work, set the **eviction-policy** property to a value other than `NONE`. Its attributes are described below.
 - **PER_NODE**: Maximum number of map entries in each cluster member. This is the default policy.


```
<max-size policy="PER_NODE">5000</max-size>
```
 - **PER_PARTITION**: Maximum number of map entries within each partition. Storage size depends on the partition count in a cluster member. This attribute should not be used often. Avoid using this attribute with a small cluster: if the cluster is small it will be hosting more partitions, and therefore map entries, than that of a larger cluster. Thus, for a small cluster, eviction of the entries will decrease performance (the number of entries is large).


```
<max-size policy="PER_PARTITION">27100</max-size>
```
 - **USED_HEAP_SIZE**: Maximum used heap size in megabytes for each JVM.


```
<max-size policy="USED_HEAP_SIZE">4096</max-size>
```
 - **USED_HEAP_PERCENTAGE**: Maximum used heap size percentage for each JVM. If, for example, JVM is configured to have 1000 MB and this value is 10, then the map entries will be evicted when used heap size exceeds 100 MB.


```
<max-size policy="USED_HEAP_PERCENTAGE">10</max-size>
```
 - **FREE_HEAP_SIZE**: Minimum free heap size in megabytes for each JVM.


```
<max-size policy="FREE_HEAP_SIZE">512</max-size>
```
 - **FREE_HEAP_PERCENTAGE**: Minimum free heap size percentage for each JVM. If, for example, JVM is configured to have 1000 MB and this value is 10, then the map entries will be evicted when free heap size is below 100 MB.


```
<max-size policy="FREE_HEAP_PERCENTAGE">10</max-size>
```
- **eviction-percentage**: When **max-size** is reached, the specified percentage of the map will be evicted. For example, if set to 25, 25% of the entries will be evicted. Setting this property to a smaller value will cause eviction of a smaller number of map entries. Therefore, if map entries are inserted frequently, smaller percentage values may lead to overheads. Valid values are integers between 0 and 100. The default value is 25.
- **min-eviction-check-millis**: Minimum time in milliseconds which should elapse before checking whether a partition of the map is evictable or not. In other terms, this property specifies the frequency of the eviction process. The default value is 100. Setting it to 0 (zero) makes the eviction process run for every put operation.



NOTE: When map entries are inserted frequently, the property `min-eviction-check-millis` should be set to a number lower than the insertion period in order not to let any entry escape from the eviction.

6.1.3.3 Example Eviction Configuration

```
<map name="documents">
  <max-size policy="PER_NODE">10000</max-size>
  <eviction-policy>LRU</eviction-policy>
  <max-idle-seconds>60</max-idle-seconds>
</map>
```

In the above example, `documents` map starts to evict its entries from a member when the map size exceeds 10000 in that member. Then, the entries least recently used will be evicted. The entries not used for more than 60 seconds will be evicted as well.

6.1.3.4 Evicting Specific Entries

The eviction policies and configurations explained above apply to all the entries of a map. The entries that meet the specified eviction conditions are evicted.

But you may want to evict some specific map entries. In this case, you can use the `ttl` and `timeunit` parameters of the method `map.put()`. An example code line is given below.

```
myMap.put( "1", "John", 50, TimeUnit.SECONDS );
```

The map entry with the key “1” will be evicted 50 seconds after it is put into `myMap`.

6.1.3.5 Evicting All Entries

To evict all keys from the map except the locked ones, use the method `evictAll()`. If a `MapStore` is defined for the map, `deleteAll` is not called by `evictAll`. If you want to call the method `deleteAll`, use `clear()`.

An example is given below.

```
public class EvictAll {

    public static void main(String[] args) {
        final int numberOfKeysToLock = 4;
        final int numberOfEntriesToAdd = 1000;

        HazelcastInstance node1 = Hazelcast.newHazelcastInstance();
        HazelcastInstance node2 = Hazelcast.newHazelcastInstance();

        IMap<Integer, Integer> map = node1.getMap(EvictAll.class.getCanonicalName());
        for (int i = 0; i < numberOfEntriesToAdd; i++) {
            map.put(i, i);
        }

        for (int i = 0; i < numberOfKeysToLock; i++) {
            map.lock(i);
        }

        // should keep locked keys and evict all others.
        map.evictAll();

        System.out.printf("# After calling evictAll...\n");
        System.out.printf("# Expected map size\t: %d\n", numberOfKeysToLock);
        System.out.printf("# Actual map size\t: %d\n", map.size());
    }
}
```



NOTE: Only `EVICT_ALL` event is fired for any registered listeners.

6.1.4 Setting In Memory Format

`IMap` (and a few other Hazelcast data structures, such as `ICache`) has an `in-memory-format` configuration option. By default, Hazelcast stores data into memory in binary (serialized) format. But sometimes, it can be efficient to store the entries in their object form, especially in cases of local processing, such as entry processor and queries.

To set how the data will be stored in memory, set `in-memory-format` in configuration. You have the following format options.

- **BINARY** (default): This is the default option. The data will be stored in serialized binary format. You can use this option if you mostly perform regular map operations, such as `put` and `get`.
- **OBJECT**: The data will be stored in deserialized form. This configuration is good for maps where entry processing and queries form the majority of all operations and the objects are complex ones, making the serialization cost respectively high. By storing objects, entry processing will not contain the deserialization cost.

Regular operations like `get` rely on the object instance. When the **OBJECT** format is used and a `get` is performed, the map does not return the stored instance, but creates a clone. Therefore, this whole `get` operation first includes a serialization on the member owning the instance, and then a deserialization on the member calling the instance. When the **BINARY** format is used, only a deserialization is required; **BINARY** is faster.

Similarly, a `put` operation is faster when the **BINARY** format is used. If the format was **OBJECT**, map would create a clone of the instance, and there would first be a serialization and then a deserialization. When **BINARY** is used, only a deserialization is needed.



NOTE: If a value is stored in **OBJECT** format, a change on a returned value does not affect the stored instance. In this case, the returned instance is not the actual one but a clone. Therefore, changes made on an object after it is returned will not reflect on the actual stored data. Similarly, when a value is written to a map and the value is stored in **OBJECT** format, it will be a copy of the `put` value. Therefore, changes made on the object after it is stored will not reflect on the stored data.

6.1.5 Loading and Storing Persistent Data

Hazelcast allows you to load and store the distributed map entries from/to a persistent data store such as a relational database. To do this, you can use Hazelcast's `MapStore` and `MapLoader` interfaces.

When you provide a `MapLoader` implementation and request an entry (`IMap.get()`) that does not exist in memory, `MapLoader`'s `load` or `loadAll` methods will load that entry from the data store. This loaded entry is placed into the map and will stay there until it is removed or evicted.

When a `MapStore` implementation is provided, an entry is also put into a user defined data store.



NOTE: Data store needs to be a centralized system that is accessible from all Hazelcast members. Persistence to local file system is not supported.



NOTE: Also note that, the `MapStore` interface extends the `MapLoader` interface as you can see in the interface [code](#).

Following is a `MapStore` example.

```
public class PersonMapStore implements MapStore<Long, Person> {
    private final Connection con;

    public PersonMapStore() {
        try {
            con = DriverManager.getConnection("jdbc:hsqldb:mydatabase", "SA", "");
            con.createStatement().executeUpdate(
                "create table if not exists person (id bigint, name varchar(45))");
        } catch (SQLException e) {
            throw new RuntimeException(e);
        }
    }

    public synchronized void delete(Long key) {
        System.out.println("Delete:" + key);
    }
}
```

```

        try {
            con.createStatement().executeUpdate(
                format("delete from person where id = %s", key));
        } catch (SQLException e) {
            throw new RuntimeException(e);
        }
    }

    public synchronized void store(Long key, Person value) {
        try {
            con.createStatement().executeUpdate(
                format("insert into person values(%s,'%s')", key, value.name));
        } catch (SQLException e) {
            throw new RuntimeException(e);
        }
    }

    public synchronized void storeAll(Map<Long, Person> map) {
        for (Map.Entry<Long, Person> entry : map.entrySet())
            store(entry.getKey(), entry.getValue());
    }

    public synchronized void deleteAll(Collection<Long> keys) {
        for (Long key : keys) delete(key);
    }

    public synchronized Person load(Long key) {
        try {
            ResultSet resultSet = con.createStatement().executeQuery(
                format("select name from person where id =%s", key));
            try {
                if (!resultSet.next()) return null;
                String name = resultSet.getString(1);
                return new Person(name);
            } finally {
                resultSet.close();
            }
        } catch (SQLException e) {
            throw new RuntimeException(e);
        }
    }

    public synchronized Map<Long, Person> loadAll(Collection<Long> keys) {
        Map<Long, Person> result = new HashMap<Long, Person>();
        for (Long key : keys) result.put(key, load(key));
        return result;
    }

    public Iterable<Long> loadAllKeys() {
        return null;
    }
}

```



NOTE: During the initial loading process, *MapStore* uses a thread different than the partition threads that is used by the *ExecutorService*. After the initialization is completed, the *map.get* method looks up any inexistent value from the database in a partition thread or the *map.put* method looks up the database to return the previously associated value for a key also in a partition thread.

RELATED INFORMATION

For more `MapStore/MapLoader` code samples please see [here](#).

Hazelcast supports read-through, write-through, and write-behind persistence modes which are explained in the subsections below.

6.1.5.1 Using Read-Through Persistence

If an entry does not exist in the memory when an application asks for it, Hazelcast asks your loader implementation to load that entry from the data store. If the entry exists there, the loader implementation gets it, hands it to Hazelcast, and Hazelcast puts it into the memory. This is read-through persistence mode.

6.1.5.2 Setting Write-Through Persistence

`MapStore` can be configured to be write-through by setting the `write-delay-seconds` property to `0`. This means the entries will be put to the data store synchronously.

In this mode, when the `map.put(key,value)` call returns:

- `MapStore.store(key,value)` is successfully called so the entry is persisted.
- In-Memory entry is updated.
- In-Memory backup copies are successfully created on other cluster members (if `backup-count` is greater than 0).

The same behavior goes for a `map.remove(key)` call. The only difference is that `MapStore.delete(key)` is called when the entry will be deleted.

If `MapStore` throws an exception, then the exception will be propagated back to the original `put` or `remove` call in the form of `RuntimeException`.

6.1.5.3 Setting Write-Behind Persistence

You can configure `MapStore` as write-behind by setting the `write-delay-seconds` property to a value bigger than `0`. This means the modified entries will be put to the data store asynchronously after a configured delay.



NOTE: In write-behind mode, by default Hazelcast coalesces updates on a specific key, i.e. applies only the last update on it. However, you can set `MapStoreConfig#setWriteCoalescing` to `FALSE` and you can store all updates performed on a key to the data store.



NOTE: When you set `MapStoreConfig#setWriteCoalescing` to `FALSE`, after you reached per-node maximum write-behind-queue capacity, subsequent `put` operations will fail with `ReachedMaxSizeException`. This exception will be thrown to prevent uncontrolled grow of write-behind queues. You can set per node maximum capacity using the system property `hazelcast.map.write.behind.queue.capacity`. Please refer to the [System Properties section](#) for information on this property and how to set the system properties.

In write-behind mode, when the `map.put(key,value)` call returns:

- In-Memory entry is updated.
- In-Memory backup copies are successfully created on other cluster members (if `backup-count` is greater than 0).
- The entry is marked as dirty so that after `write-delay-seconds`, it can be persisted with `MapStore.store(key,value)` call.
- For fault tolerance, dirty entries are stored in a queue on the primary member and also on a back-up member.

The same behavior goes for the `map.remove(key)`, the only difference is that `MapStore.delete(key)` is called when the entry will be deleted.

If `MapStore` throws an exception, then Hazelcast tries to store the entry again. If the entry still cannot be stored, a log message is printed and the entry is re-queued.

For batch write operations, which are only allowed in write-behind mode, Hazelcast will call `MapStore.storeAll(map)` and `MapStore.deleteAll(collection)` to do all writes in a single call.



NOTE: If a map entry is marked as dirty, i.e. it is waiting to be persisted to the `MapStore` in a write-behind scenario, the eviction process forces the entry to be stored. By this way, you will have control on the number of entries waiting to be stored, and thus you can prevent a possible `OutOfMemory` exception.



NOTE: `MapStore` or `MapLoader` implementations should not use Hazelcast `Map/Queue/MultiMap/List/Set` operations. Your implementation should only work with your data store. Otherwise, you may get into deadlock situations.

Here is a sample configuration:

```
<hazelcast>
...
<map name="default">
...
  <map-store enabled="true">
    <class-name>com.hazelcast.examples.DummyStore</class-name>
    <write-delay-seconds>60</write-delay-seconds>
    <write-batch-size>1000</write-batch-size>
    <write-coalescing>true</write-coalescing>
  </map-store>
</map>
</hazelcast>
```

RELATED INFORMATION

Please refer to the [Map Store section](#) for the full Map Store configuration description.

6.1.5.4 Storing Entries to Multiple Maps

A configuration can be applied to more than one map using wildcards (see [Using Wildcard](#)), meaning that the configuration is shared among the maps. But `MapStore` does not know which entries to store when there is one configuration applied to multiple maps.

To store entries when there is one configuration applied to multiple maps, use Hazelcast's `MapStoreFactory` interface. Using the `MapStoreFactory` interface, `MapStores` for each map can be created when a wildcard configuration is used. Example code is shown below.

```
Config config = new Config();
MapConfig mapConfig = config.getMapConfig( "*" );
MapStoreConfig mapStoreConfig = mapConfig.getMapStoreConfig();
mapStoreConfig.setFactoryImplementation( new MapStoreFactory<Object, Object>() {
    @Override
    public MapLoader<Object, Object> newMapStore( String mapName, Properties properties ) {
        return null;
    }
} );
```

To initialize the `MapLoader` implementation with the given map name, configuration properties, and the Hazelcast instance, implement the `MapLoaderLifecycleSupport` interface. See the following example code.

```

public interface MapLoaderLifecycleSupport {

    /**
     * Initializes this MapLoader implementation. Hazelcast will call
     * this method when the map is first used on the
     * HazelcastInstance. Implementation can
     * initialize required resources for implementing
     * MapLoader such as reading a configuration file and/or creating
     * a database connection.
     */
    void init( HazelcastInstance hazelcastInstance, Properties properties, String mapName );

    /**
     * Hazelcast will call this method before shutting down.
     * This method can be overridden to cleanup the resources
     * held by this MapLoader implementation, such as closing the
     * database connections, etc.
     */
    void destroy();
}

```

6.1.5.5 Initializing Map on Startup

To pre-populate the in-memory map when the map is first touched/used, use the `MapLoader.loadAllKeys` API.

If `MapLoader.loadAllKeys` returns `NULL`, then nothing will be loaded. Your `MapLoader.loadAllKeys` implementation can return all or some of the keys. For example, you may select and return only the hot keys. `MapLoader.loadAllKeys` is the fastest way of pre-populating the map since Hazelcast will optimize the loading process by having each cluster member load its owned portion of the entries.

The `InitialLoadMode` configuration parameter in the class `MapStoreConfig` has two values: `LAZY` and `EAGER`. If `InitialLoadMode` is set to `LAZY`, data is not loaded during the map creation. If it is set to `EAGER`, the whole data is loaded while the map is created and everything becomes ready to use. Also, if you add indices to your map with the `MapIndexConfig` class or the `addIndex` method, then `InitialLoadMode` is overridden and `MapStoreConfig` behaves as if `EAGER` mode is on.

Here is the `MapLoader` initialization flow:

1. When `getMap()` is first called from any member, initialization will start depending on the value of `InitialLoadMode`. If it is set to `EAGER`, initialization starts. If it is set to `LAZY`, initialization does not start but data is loaded each time a partition loading completes.
2. Hazelcast will call `MapLoader.loadAllKeys()` to get all your keys on one of the members.
3. That member will distribute keys to all other members in batches.
4. Each member will load values of all its owned keys by calling `MapLoader.loadAll(keys)`.
5. Each member puts its owned entries into the map by calling `IMap.putTransient(key,value)`.



NOTE: If the load mode is `LAZY` and when the `clear()` method is called (which triggers `MapStore.deleteAll()`), Hazelcast will remove **ONLY** the loaded entries from your map and datastore. Since the whole data is not loaded for this case (`LAZY` mode), please note that there may be still entries in your datastore.



NOTE: The return type of `loadAllKeys()` is changed from `Set` to `Iterable` with the release of Hazelcast 3.5. `MapLoader` implementations from previous releases are also supported and do not need to be adapted.

Loading Keys Incrementally

If the number of keys to load is large, it is more efficient to load them incrementally than loading them all at once. To support incremental loading, the `MapLoader.loadAllKeys()` method returns an `Iterable` which can be lazily populated with the results of a database query.

Hazelcast iterates over the `Iterable` and, while doing so, sends out the keys to their respective owner nodes. The `Iterator` obtained from `MapLoader.loadAllKeys()` may also implement the `Closeable` interface, in which case `Iterator` is closed once the iteration is over. This is intended for releasing resources such as closing a JDBC result set.

6.1.5.6 Forcing All Keys To Be Loaded

The method `loadAll` loads some or all keys into a data store in order to optimize the multiple load operations. The method has two signatures (i.e. the same method can take two different parameter lists). One signature loads the given keys and the other loads all keys. Please see the example code below.

```
public class LoadAll {

    public static void main(String[] args) {
        final int numberOfEntriesToAdd = 1000;
        final String mapName = LoadAll.class.getCanonicalName();
        final Config config = createNewConfig(mapName);
        final HazelcastInstance node = Hazelcast.newHazelcastInstance(config);
        final IMap<Integer, Integer> map = node.getMap(mapName);

        populateMap(map, numberOfEntriesToAdd);
        System.out.printf("# Map store has %d elements\n", numberOfEntriesToAdd);

        map.evictAll();
        System.out.printf("# After evictAll map size\t: %d\n", map.size());

        map.loadAll(true);
        System.out.printf("# After loadAll map size\t: %d\n", map.size());
    }
}
```

6.1.5.7 Post-Processing Objects in Map Store

In some scenarios, you may need to modify the object after storing it into the map store. For example, you can get an ID or version auto-generated by your database and then you need to modify your object stored in the distributed map but not to break the synchronization between database and data grid.

To post-process an object in the map store, implement the `PostProcessingMapStore` interface to put the modified object into the distributed map. That causes an extra step of `Serialization`, so use it only when needed. (This is only valid when using the `write-through` map store configuration.)

Here is an example of post processing map store:

```
class ProcessingStore implements MapStore<Integer, Employee>, PostProcessingMapStore {
    @Override
    public void store( Integer key, Employee employee ) {
        EmployeeId id = saveEmployee();
        employee.setId( id.getId() );
    }
}
```

6.1.6 Creating Near Cache for Map

Map entries in Hazelcast are partitioned across the cluster. Imagine that you are reading the key `k` so many times and `k` is owned by another member in your cluster. Each `map.get(k)` will be a remote operation, meaning lots of network trips. If you have a map that is read-mostly, then you should consider creating a near cache for the map so that reads can be much faster and consume less network traffic. All these benefits do not come free. When using near cache, you should consider the following issues:

- Cluster members will have to hold extra cached data, which increases memory consumption.
- If invalidation is turned on and entries are updated frequently, then invalidations will be costly.
- Near cache breaks the strong consistency guarantees; you might be reading stale data.

Near cache is highly recommended for the maps that are read-mostly. Here is a near cache configuration for a map:

```
<hazelcast>
...
<map name="my-read-mostly-map">
...
  <near-cache>
    <!--
      Maximum size of the near cache. When max-size is reached,
      cache is evicted based on the policy defined.
      Any integer between 0 and Integer.MAX_VALUE. 0 means
      Integer.MAX_VALUE. Default is 0.
    -->
    <max-size>5000</max-size>

    <!--
      Maximum number of seconds for each entry to stay in the near cache. Entries that are
      older than this period is automatically evicted from the near cache.
      Any integer between 0 and Integer.MAX_VALUE. 0 means infinite. Default is 0.
    -->
    <time-to-live-seconds>0</time-to-live-seconds>

    <!--
      Maximum number of seconds each entry can stay in the near cache as untouched (not read).
      Entries that are not read more than this period is removed
      from the near cache.
      Any integer between 0 and Integer.MAX_VALUE. 0 means
      Integer.MAX_VALUE. Default is 0.
    -->
    <max-idle-seconds>60</max-idle-seconds>

    <!--
      Valid values are:
      NONE (no extra eviction, <time-to-live-seconds> may still apply),
      LRU (Least Recently Used),
      LFU (Least Frequently Used).
      NONE is the default.
      Regardless of the eviction policy used, <time-to-live-seconds> will still apply.
    -->
    <eviction-policy>LRU</eviction-policy>

    <!--
      Should the cached entries are evicted if the entries are updated or removed.
      Values can be true or false. Default is true.
    -->
    <invalidate-on-change>true</invalidate-on-change>

    <!--
      You may also want local entries to be cached.
      This is useful when in memory format for near cache is different from
      the map's near cache.
      By default it is disabled (false).
    -->
    <cache-local-entries>false</cache-local-entries>
```



```

    </near-cache>
  </map>
</hazelcast>

```



NOTE: Programmatically, near cache configuration is done by using the class `NearCacheConfig`. And this class is used both in the cluster members and clients. In a client/server system, you must enable the near cache separately on the client, without needing to configure it on the server. For information on how to create a near cache on a client (native Java client), please see the [Client Near Cache Configuration section](#). Please note that near cache configuration is specific to the member or client itself, a map in a member may not have near cache configured while the same map in a client may have near cache configured.



NOTE: If you are using near cache, you should take into account that your hits to the keys in near cache are not reflected as hits to the original keys on the remote members; this has an impact on `IMap`'s maximum idle seconds or time-to-live seconds expiration. Therefore, even though there is a hit on a key in near cache, your original key on the remote member may expire.



NOTE: Near cache works only when you access data via `map.get(k)` methods. Data returned using a predicate is not stored in the near cache.

6.1.7 Locking Maps

Hazelcast Distributed Map (`IMap`) is thread-safe to meet your thread safety requirements. When these requirements increase or you want to have more control on the concurrency, consider the following Hazelcast features and solutions.

Let's work on a sample case as shown below.

```

public class RacyUpdateMember {
    public static void main( String[] args ) throws Exception {
        HazelcastInstance hz = Hazelcast.newHazelcastInstance();
        IMap<String, Value> map = hz.getMap( "map" );
        String key = "1";
        map.put( key, new Value() );
        System.out.println( "Starting" );
        for ( int k = 0; k < 1000; k++ ) {
            if ( k % 100 == 0 ) System.out.println( "At: " + k );
            Value value = map.get( key );
            Thread.sleep( 10 );
            value.amount++;
            map.put( key, value );
        }
        System.out.println( "Finished! Result = " + map.get(key).amount );
    }

    static class Value implements Serializable {
        public int amount;
    }
}

```

If the above code is run by more than one cluster member simultaneously, there will be likely a race condition. You can solve this with Hazelcast.

6.1.7.1 Pessimistic Locking

One way to solve the race issue is with pessimistic locking: lock the map entry until you are finished with it.

To perform pessimistic locking, use the lock mechanism provided by Hazelcast distributed map, i.e. the `map.lock` and `map.unlock` methods. See the below example code.

```
public class PessimisticUpdateMember {
    public static void main( String[] args ) throws Exception {
        HazelcastInstance hz = Hazelcast.newHazelcastInstance();
        IMap<String, Value> map = hz.getMap( "map" );
        String key = "1";
        map.put( key, new Value() );
        System.out.println( "Starting" );
        for ( int k = 0; k < 1000; k++ ) {
            map.lock( key );
            try {
                Value value = map.get( key );
                Thread.sleep( 10 );
                value.amount++;
                map.put( key, value );
            } finally {
                map.unlock( key );
            }
        }
        System.out.println( "Finished! Result = " + map.get( key ).amount );
    }

    static class Value implements Serializable {
        public int amount;
    }
}
```

The IMap lock will automatically be collected by the garbage collector when the lock is released and no other waiting conditions exist on the lock.

The IMap lock is reentrant, but it does not support fairness.

Another way to solve the race issue can be acquiring a predictable Lock object from Hazelcast. This way, every value in the map can be given a lock or you can create a stripe of locks.

6.1.7.2 Optimistic Locking

In Hazelcast, you can apply the optimistic locking strategy with the map `replace` method. This method compares values in object or data forms depending on the in-memory format configuration. If the values are equal, it replaces the old value with the new one. If you want to use your defined `equals` method, `in-memory-format` should be `OBJECT`. Otherwise, Hazelcast serializes objects to `BINARY` forms and compares them.

See the below example code.

```
public class OptimisticMember {
    public static void main( String[] args ) throws Exception {
        HazelcastInstance hz = Hazelcast.newHazelcastInstance();
        IMap<String, Value> map = hz.getMap( "map" );
        String key = "1";
        map.put( key, new Value() );
        System.out.println( "Starting" );
        for ( int k = 0; k < 1000; k++ ) {
            if ( k % 10 == 0 ) System.out.println( "At: " + k );
        }
    }
}
```

```

        for ( ; ; ) {
            Value oldValue = map.get( key );
            Value newValue = new Value( oldValue );
            Thread.sleep( 10 );
            newValue.amount++;
            if ( map.replace( key, oldValue, newValue ) )
                break;
        }
    }
    System.out.println( "Finished! Result = " + map.get( key ).amount );
}

static class Value implements Serializable {
    public int amount;

    public Value() {
    }

    public Value( Value that ) {
        this.amount = that.amount;
    }

    public boolean equals( Object o ) {
        if ( o == this ) return true;
        if ( !( o instanceof Value ) ) return false;
        Value that = ( Value ) o;
        return that.amount == this.amount;
    }
}
}

```



NOTE: The above example code is intentionally broken.

6.1.7.3 Pessimistic vs. Optimistic Locking

Depending on your locking requirements, you can pick one locking strategy.

Optimistic locking is better for mostly read-only systems. It has a performance boost over pessimistic locking.

Pessimistic locking is good if there are lots of updates on the same key. It is more robust than optimistic locking from the perspective of data consistency.

In Hazelcast, use `IExecutorService` to submit a task to a key owner, or to a member or members. This is the recommended way to perform task executions, rather than using pessimistic or optimistic locking techniques. `IExecutorService` will have less network hops and less data over wire, and tasks will be executed very near to the data. Please refer to the [Data Affinity section](#).

6.1.7.4 Solving the ABA Problem

The ABA problem occurs in environments when a shared resource is open to change by multiple threads. Even if one thread sees the same value for a particular key in consecutive reads, it does not mean that nothing has changed between the reads. Another thread may change the value, do work, and change the value back, while the first thread thinks that nothing has changed.

To prevent these kind of problems, one solution is to use a version number and to check it before any write to be sure that nothing has changed between consecutive reads. Although all the other fields will be equal, the version field will prevent objects from being seen as equal. This is the optimistic locking strategy, and it is used in environments which do not expect intensive concurrent changes on a specific key.

In Hazelcast, you can apply the **optimistic locking** strategy with the `map replace` method.

6.1.8 Accessing Entry Statistics

Hazelcast keeps statistics about each map entry, such as creation time, last update time, last access time, number of hits, and version. To access the map entry statistics, use an `IMap.getEntryView(key)` call. Here is an example.

```
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.EntryView;

HazelcastInstance hz = Hazelcast.newHazelcastInstance();
EntryView entry = hz.getMap( "quotes" ).getEntryView( "1" );
System.out.println ( "size in memory   : " + entry.getCost() );
System.out.println ( "creationTime    : " + entry.getCreationTime() );
System.out.println ( "expirationTime  : " + entry.getExpirationTime() );
System.out.println ( "number of hits   : " + entry.getHits() );
System.out.println ( "lastAccessedTime: " + entry.getLastAccessTime() );
System.out.println ( "lastUpdateTime  : " + entry.getLastUpdateTime() );
System.out.println ( "version          : " + entry.getVersion() );
System.out.println ( "key              : " + entry.getKey() );
System.out.println ( "value           : " + entry.getValue() );
```

6.1.9 Listening to Map Events

To listen to map-wide or entry-based events, implement a `MapListener` sub-interface.

A map-wide event is fired as a result of a map-wide operation: for example, `IMap#clear` or `IMap#evictAll`. An entry-based event is fired after the operations that affect a specific entry: for example, `IMap#remove` or `IMap#evict`.

6.1.9.1 Catching a Map Event

To catch an event, you should explicitly implement a corresponding sub-interface of a `MapListener`, such as `EntryAddedListener` or `MapClearedListener`.

Let's take a look at the following code example.



NOTE: *EntryListener* interface still can be implemented, we kept that for backward compatibility reasons. However, if you need to listen to a different event which is not available in the *EntryListener* interface, you should also implement a relevant *MapListener* sub-interface.

```
public class Listen {

    public static void main( String[] args ) {
        HazelcastInstance hz = Hazelcast.newHazelcastInstance();
        IMap<String, String> map = hz.getMap( "somemap" );
        map.addEntryListener( new MyEntryListener(), true );
        System.out.println( "EntryListener registered" );
    }

    static class MyEntryListener implements EntryAddedListener<String, String>,
                                             EntryRemovedListener<String, String>,
                                             EntryUpdatedListener<String, String>,
                                             EntryEvictedListener<String, String>,
                                             MapEvictedListener,
                                             MapClearedListener {

        @Override
```

```

public void entryAdded( EntryEvent<String, String> event ) {
    System.out.println( "Entry Added:" + event );
}

@Override
public void entryRemoved( EntryEvent<String, String> event ) {
    System.out.println( "Entry Removed:" + event );
}

@Override
public void entryUpdated( EntryEvent<String, String> event ) {
    System.out.println( "Entry Updated:" + event );
}

@Override
public void entryEvicted( EntryEvent<String, String> event ) {
    System.out.println( "Entry Evicted:" + event );
}

@Override
public void mapEvicted( MapEvent event ) {
    System.out.println( "Map Evicted:" + event );
}

@Override
public void mapCleared( MapEvent event ) {
    System.out.println( "Map Cleared:" + event );
}
}
}

```

Now, let's perform some modifications on the map entries using the following example code.

```

public class Modify {

    public static void main( String[] args ) {
        HazelcastInstance hz = Hazelcast.newHazelcastInstance();
        IMap<String, String> map = hz.getMap( "somemap" );
        String key = "" + System.nanoTime();
        String value = "1";
        map.put( key, value );
        map.put( key, "2" );
        map.delete( key );
    }
}

```

If you execute the Listen class and then the Modify class, you get the following output produced by the Listen class.

```

entryAdded:EntryEvent {Address[192.168.1.100]:5702} key=251359212222282,
    oldValue=null, value=1, event=ADDED, by Member [192.168.1.100]:5702

entryUpdated:EntryEvent {Address[192.168.1.100]:5702} key=251359212222282,
    oldValue=1, value=2, event=UPDATED, by Member [192.168.1.100]:5702

entryRemoved:EntryEvent {Address[192.168.1.100]:5702} key=251359212222282,
    oldValue=2, value=2, event=REMOVED, by Member [192.168.1.100]:5702

```

```

public class MyEntryListener implements EntryListener{

    private Executor executor = Executors.newFixedThreadPool(5);

    @Override
    public void entryAdded(EntryEvent event) {
        executor.execute(new DoSomethingWithEvent(event));
    }
    ...
}

```

6.1.9.2 Partitions and Entry Listeners

A map listener runs on the event threads that are also used by the other listeners: for example, the collection listeners and pub/sub message listeners. This means that the entry listeners can access other partitions. Consider this when you run long tasks, since listening to those tasks may cause the other map/event listeners to starve.

6.1.9.3 Listening for Lost Map Partitions

You can listen to `MapPartitionLostEvent` instances by registering an implementation of `MapPartitionLostListener`, which is also a sub-interface of `MapListener`.

Let's consider the following example code:

```

public static void main(String[] args) {
    Config config = new Config();
    config.getMapConfig("map").setBackupCount(1); // might lose data if any member crashes

    HazelcastInstance instance = HazelcastInstanceFactory.newHazelcastInstance(config);

    IMap<Object, Object> map = instance1.getMap("map");
    map.put(0, 0);

    map.addPartitionLostListener(new MapPartitionLostListener() {
        @Override
        public void partitionLost(MapPartitionLostEvent event) {
            System.out.println(event);
        }
    });
}

```

Within this example code, a `MapPartitionLostListener` implementation is registered to a map that is configured with 1 backup. For this particular map and any of the partitions in the system, if the partition owner member and its first backup member crash simultaneously, the given `MapPartitionLostListener` receives a corresponding `MapPartitionLostEvent`. If only a single member crashes in the cluster, there will be no `MapPartitionLostEvent` fired for this map since backups for the partitions owned by the crashed member are kept on other members.

Please refer to [Listening for Partition Lost Events](#) for more information about partition lost detection and partition lost events.

6.1.10 Adding Interceptors

You can add intercept operations and then execute your own business logic synchronously blocking the operations. You can change the returned value from a `get` operation, change the value to be `put`, or `cancel` operations by throwing an exception.

Interceptors are different from listeners. With listeners, you take an action after the operation has been completed. Interceptor actions are synchronous and you can alter the behavior of operation, change the values, or totally cancel it.

Map interceptors are chained, so adding the same interceptor multiple times to the same map can result in duplicate effects. This can easily happen when the interceptor is added to the map at node initialization, so that each node adds the same interceptor. When you add the interceptor in this way, be sure to implement the `hashCode()` method to return the same value for every instance of the interceptor. It is not strictly necessary, but it is a good idea to also implement `equals()` as this will ensure that the map interceptor can be removed reliably.

The IMap API has two methods for adding and removing an interceptor to the map: `addInterceptor` and `removeInterceptor`.

```
/**
 * Adds an interceptor for the map. Added interceptor intercepts operations
 * and executes user defined methods and cancels operations if
 * user defined methods throw exceptions.
 *
 * @param interceptor map interceptor.
 * @return id of registered interceptor.
 */
String addInterceptor( MapInterceptor interceptor );

/**
 * Removes the given interceptor for this map. So it does not
 * intercept operations anymore.
 *
 * @param id registration ID of the map interceptor.
 */
void removeInterceptor( String id );
```

Here is the MapInterceptor interface:

```
public interface MapInterceptor extends Serializable {

    /**
     * Intercept the get operation before it returns a value.
     * Return another object to change the return value of get().
     * Returning null causes the get() operation to return the original value,
     * namely return null if you do not want to change anything.
     *
     * @param value the original value to be returned as the result of get() operation.
     * @return the new value that is returned by get() operation.
     */
    Object interceptGet( Object value );

    /**
     * Called after get() operation is completed.
     *
     * @param value the value returned as the result of get() operation.
     */
    void afterGet( Object value );

    /**
     * Intercept put operation before modifying map data.
     * Return the object to be put into the map.
     * Returning null causes the put() operation to operate as expected,
     * namely no interception. Throwing an exception cancels the put operation.
     *
     *
     */
}
```

```

    * @param oldValue the value currently existing in the map.
    * @param newValue the new value to be put.
    * @return new value after intercept operation.
    */
Object interceptPut( Object oldValue, Object newValue );

/**
 * Called after put() operation is completed.
 *
 *
 * @param value the value returned as the result of put() operation.
 */
void afterPut( Object value );

/**
 * Intercept remove operation before removing the data.
 * Return the object to be returned as the result of remove operation.
 * Throwing an exception cancels the remove operation.
 *
 *
 * @param removedValue the existing value to be removed.
 * @return the value to be returned as the result of remove operation.
 */
Object interceptRemove( Object removedValue );

/**
 * Called after remove() operation is completed.
 *
 *
 * @param value the value returned as the result of remove(.) operation
 */
void afterRemove( Object value );
}

```

Example Usage:

```

public class InterceptorTest {

    @Test
    public void testMapInterceptor() throws InterruptedException {
        HazelcastInstance hazelcastInstance1 = Hazelcast.newHazelcastInstance();
        HazelcastInstance hazelcastInstance2 = Hazelcast.newHazelcastInstance();
        IMap<Object, Object> map = hazelcastInstance1.getMap( "testMapInterceptor" );
        SimpleInterceptor interceptor = new SimpleInterceptor();
        map.addInterceptor( interceptor );
        map.put( 1, "New York" );
        map.put( 2, "Istanbul" );
        map.put( 3, "Tokyo" );
        map.put( 4, "London" );
        map.put( 5, "Paris" );
        map.put( 6, "Cairo" );
        map.put( 7, "Hong Kong" );

        try {
            map.remove( 1 );
        } catch ( Exception ignore ) {
        }
        try {

```



```

    map.remove( 2 );
} catch ( Exception ignore ) {
}

assertEquals( map.size(), 6 ) ;

assertEquals( map.get( 1 ), null );
assertEquals( map.get( 2 ), "ISTANBUL:" );
assertEquals( map.get( 3 ), "TOKYO:" );
assertEquals( map.get( 4 ), "LONDON:" );
assertEquals( map.get( 5 ), "PARIS:" );
assertEquals( map.get( 6 ), "CAIRO:" );
assertEquals( map.get( 7 ), "HONG KONG:" );

map.removeInterceptor( interceptor );
map.put( 8, "Moscow" );

assertEquals( map.get( 8 ), "Moscow" );
assertEquals( map.get( 1 ), null );
assertEquals( map.get( 2 ), "ISTANBUL" );
assertEquals( map.get( 3 ), "TOKYO" );
assertEquals( map.get( 4 ), "LONDON" );
assertEquals( map.get( 5 ), "PARIS" );
assertEquals( map.get( 6 ), "CAIRO" );
assertEquals( map.get( 7 ), "HONG KONG" );
}

static class SimpleInterceptor implements MapInterceptor, Serializable {

    @Override
    public Object interceptGet( Object value ) {
        if (value == null)
            return null;
        return value + ":";
    }

    @Override
    public void afterGet( Object value ) {
    }

    @Override
    public Object interceptPut( Object oldValue, Object newValue ) {
        return newValue.toString().toUpperCase();
    }

    @Override
    public void afterPut( Object value ) {
    }

    @Override
    public Object interceptRemove( Object removedValue ) {
        if(removedValue.equals( "ISTANBUL" ))
            throw new RuntimeException( "you can not remove this" );
        return removedValue;
    }

    @Override
    public void afterRemove( Object value ) {
    }
}

```

```

        // do something
    }
}
}

```

6.1.11 Preventing Out of Memory Exceptions

It is very easy to trigger an out of memory exception (OOM) with query based map methods, especially with large clusters or heap sizes. For example, on a 5 node cluster with 10 GB of data and 25 GB heap size per node, a single call of `IMap.entrySet()` fetches 50 GB of data and crashes the calling instance.

A call of `IMap.values()` may return too much data for a single node. This can also happen with a real query and an unlucky choice of predicates, especially when the parameters are chosen by a user of your application.

To prevent this, you can configure a maximum result size limit for query based operations. This is not a limit like `SELECT * FROM map LIMIT 100`, which you can achieve by a Paging Predicate. A maximum result size limit for query based operations is meant to be a last line of defense to prevent your nodes from retrieving more data than they can handle.

The Hazelcast component which calculates this limit is the `QueryResultSizeLimiter`.

6.1.11.1 Setting Query Result Size Limit

If the `QueryResultSizeLimiter` is activated, it calculates a result size limit per partition. Each `QueryOperation` runs on all partitions of a node, so it collects result entries as long as the node limit is not exceeded. If that happens, a `QueryResultSizeExceededException` is thrown and propagated to the calling instance.

This feature depends on an equal distribution of the data on the cluster nodes to calculate the result size limit per node. Therefore, there is a minimum value defined in `QueryResultSizeLimiter.MINIMUM_MAX_RESULT_LIMIT`. Configured values below the minimum will be increased to the minimum.

6.1.11.1.1 Local Pre-check In addition to the distributed result size check in the `QueryOperations`, there is a local pre-check on the calling instance. If you call the method from a client, the pre-check is executed on the member which invokes the `QueryOperations`.

Since the local pre-check can increase the latency of a `QueryOperation` you can configure how many local partitions should be considered for the pre-check or you can deactivate the feature completely.

6.1.11.1.2 Scope of Result Size Limit Besides the designated query operations, there are other operations which use predicates internally. Those method calls will throw the `QueryResultSizeExceededException` as well. Please see the following matrix to see the methods that are covered by the query result size limit.

6.1.11.1.3 Configuring Query Result Size The query result size limit is configured via the following system properties.

- `hazelcast.query.result.size.limit`: Result size limit for query operations on maps. This value defines the maximum number of returned elements for a single query result. If a query exceeds this number of elements, a `QueryResultSizeExceededException` is thrown.
- `hazelcast.query.max.local.partition.limit.for.precheck`: Maximum value of local partitions to trigger local pre-check for `TruePredicate` query operations on maps.

Please refer to the [System Properties section](#) to see the full descriptions of these properties and how to set them.

Method	MapProxyImpl	ClientMapProxyImpl	TransactionalMapProxy	ClientTxnMapProxy
values()	✓	X	X	X
keySet()	✓	X	X	X
entrySet()	✓	X	n/a	n/a
values(predicate)	✓	✓	✓	✓
keySet(predicate)	✓	✓	✓	✓
entrySet(predicate)	✓	✓	n/a	n/a
localKeySet()	✓	n/a	n/a	n/a
localKeySet(predicate)	✓	n/a	n/a	n/a

Interfaces: **IMap** **TransactionalMap**

Figure 6.3:

6.2 Queue

Hazelcast distributed queue is an implementation of `java.util.concurrent.BlockingQueue`. Being distributed, Hazelcast distributed queue enables all cluster members to interact with it. Using Hazelcast distributed queue, you can add an item in one cluster member and remove it from another one.

6.2.1 Getting a Queue and Putting Items

Use the `HazelcastInstance` `getQueue` method to get the queue, then use the queue `put` method to put items into the queue.

```
import com.hazelcast.core.Hazelcast;
import java.util.concurrent.BlockingQueue;
import java.util.concurrent.TimeUnit;

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
BlockingQueue<MyTask> queue = hazelcastInstance.getQueue( "tasks" );
queue.put( new MyTask() );
MyTask task = queue.take();

boolean offered = queue.offer( new MyTask(), 10, TimeUnit.SECONDS );
task = queue.poll( 5, TimeUnit.SECONDS );
if ( task != null ) {
    //process task
}
```

FIFO ordering will apply to all queue operations across the cluster. User objects (such as `MyTask` in the example above) that are enqueued or dequeued have to be `Serializable`.

Hazelcast distributed queue performs no batching while iterating over the queue. All items will be copied locally and iteration will occur locally.

6.2.2 Creating an Example Queue

The following example code illustrates a distributed queue that connects a producer and consumer.

6.2.2.1 Putting Items on the Queue

Let's put one integer on the queue every second, 100 integers total.

```
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.HazelcastInstance;
import com.hazelcast.core.IQueue;

public class ProducerMember {
    public static void main( String[] args ) throws Exception {
        HazelcastInstance hz = Hazelcast.newHazelcastInstance();
        IQueue<Integer> queue = hz.getQueue( "queue" );
        for ( int k = 1; k < 100; k++ ) {
            queue.put( k );
            System.out.println( "Producing: " + k );
            Thread.sleep(1000);
        }
        queue.put( -1 );
        System.out.println( "Producer Finished!" );
    }
}
```

Producer puts a -1 on the queue to show that the put's are finished.

6.2.2.2 Taking Items off the Queue

Now, let's create a Consumer class to take a message from this queue, as shown below.

```
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.HazelcastInstance;
import com.hazelcast.core.IQueue;

public class ConsumerMember {
    public static void main( String[] args ) throws Exception {
        HazelcastInstance hz = Hazelcast.newHazelcastInstance();
        IQueue<Integer> queue = hz.getQueue( "queue" );
        while ( true ) {
            int item = queue.take();
            System.out.println( "Consumed: " + item );
            if ( item == -1 ) {
                queue.put( -1 );
                break;
            }
            Thread.sleep( 5000 );
        }
        System.out.println( "Consumer Finished!" );
    }
}
```

As seen in the above example code, `Consumer` waits 5 seconds before it consumes the next message. It stops once it receives -1. Also note that `Consumer` puts -1 back on the queue before the loop is ended.

When you first start `Producer` and then start `Consumer`, items produced on the queue will be consumed from the same queue.

6.2.2.3 Balancing the Queue Operations

From the above example code, you can see that an item is produced every second, and consumed every 5 seconds. Therefore, the consumer keeps growing. To balance the produce/consume operation, let's start another consumer. By this way, consumption is distributed to these two consumers, as seen in the sample outputs below.

The second consumer is started. After a while, here is the first consumer output:

```
...
Consumed 13
Consumed 15
Consumer 17
...
```

Here is the second consumer output:

```
...
Consumed 14
Consumed 16
Consumer 18
...
```

In the case of a lot of producers and consumers for the queue, using a list of queues may solve the queue bottlenecks. In this case, be aware that the order of the messages sent to different queues is not guaranteed. Since in most cases strict ordering is not important, a list of queues is a good solution.



NOTE: *The items are taken from the queue in the same order they were put on the queue. However, if there is more than one consumer, this order is not guaranteed.*

6.2.3 Setting a Bounded Queue

A bounded queue is a queue with a limited capacity. When the bounded queue is full, no more items can be put into the queue until some items are taken out.

To turn a Hazelcast distributed queue into a bounded queue, set the capacity limit with the `max-size` property. You can set the `max-size` property in the configuration, as shown below. `max-size` specifies the maximum size of the queue. Once the queue size reaches this value, `put` operations will be blocked until the queue size goes below `max-size`, which happens when a consumer removes items from the queue.

Let's set **10** as the maximum size of our example queue in [Creating an Example Queue](#).

```
<hazelcast>
...
  <queue name="queue">
    <max-size>10</max-size>
  </queue>
...
</hazelcast>
```

When the producer is started, 10 items are put into the queue and then the queue will not allow more `put` operations. When the consumer is started, it will remove items from the queue. This means that the producer can put more items into the queue until there are 10 items in the queue again, at which point `put` operation again become blocked.

But in this example code, the producer is 5 times faster than the consumer. It will effectively always be waiting for the consumer to remove items before it can put more on the queue. For this example code, if maximum throughput was the goal, it would be a good option to start multiple consumers to prevent the queue from filling up.

6.2.4 Queueing with Persistent Datastore

Hazelcast allows you to load and store the distributed queue items from/to a persistent datastore using the interface `QueueStore`. If queue store is enabled, each item added to the queue will also be stored at the configured queue store. When the number of items in the queue exceeds the memory limit, the subsequent items are persisted in the queue store, they are not stored in the queue memory.

The `QueueStore` interface enables you to store, load, and delete queue items with methods like `store`, `storeAll`, `load` and `delete`. The following example class includes all of the `QueueStore` methods.

```
public class TheQueueStore implements QueueStore<Item> {
    @Override
    public void delete(Long key) {
        System.out.println("delete");
    }

    @Override
    public void store(Long key, Item value) {
        System.out.println("store");
    }

    @Override
    public void storeAll(Map<Long, Item> map) {
        System.out.println("store all");
    }

    @Override
    public void deleteAll(Collection<Long> keys) {
        System.out.println("deleteAll");
    }

    @Override
    public Item load(Long key) {
        System.out.println("load");
        return null;
    }

    @Override
    public Map<Long, Item> loadAll(Collection<Long> keys) {
        System.out.println("loadAll");
        return null;
    }

    @Override
    public Set<Long> loadAllKeys() {
        System.out.println("loadAllKeys");
        return null;
    }
}
```

6.2.4.1 Configuring Queue Store

Item must be serializable. Following is an example queue store configuration.

```
<queue-store>
<class-name>com.hazelcast.QueueStoreImpl</class-name>
<properties>
  <property name="binary">false</property>
  <property name="memory-limit">1000</property>
```

```

    <property name="bulk-load">500</property>
  </properties>
</queue-store>

```

Let's explain the queue store properties.

- **Binary:** By default, Hazelcast stores the queue items in serialized form, and before it inserts the queue items into datastore, it deserializes them. But if you will not reach the queue store from an external application, you might prefer that the items be inserted in binary form. Do this by setting the `binary` property to `true`: then you can get rid of the de-serialization step, which is a performance optimization. The `binary` property is `false` by default.
- **Memory Limit:** This is the number of items after which Hazelcast will store items only to datastore. For example, if the memory limit is 1000, then the 1001st item will be put only to datastore. This feature is useful when you want to avoid out-of-memory conditions. If you want to always use memory, you can set it to `Integer.MAX_VALUE`. The default number for `memory-limit` is 1000.
- **Bulk Load:** When the queue is initialized, items are loaded from `QueueStore` in bulks. Bulk load is the size of these bulks. The default value of `bulk-load` is 250.

6.2.5 Configuring Queue

An example declarative configuration is shown below.

```

<hazelcast>
...
  <queue name="tasks">
    <max-size>10</max-size>
    <backup-count>1</backup-count>
    <async-backup-count>1</async-backup-count>
    <empty-queue-ttl>10</empty-queue-ttl>
  </queue>
</hazelcast>

```

Hazelcast distributed queue has one synchronous backup by default. By having this backup, when a cluster member with a queue goes down, another member having the backup of that queue will continue. Therefore, no items are lost. You can define the number of synchronous backups for a queue using the `backup-count` element in the declarative configuration. A queue can also have asynchronous backups: you can define the number of asynchronous backups using the `async-backup-count` element.

To set the maximum size of the queue, use the `max-size` element. To purge unused or empty queues after a period of time, use the `empty-queue-ttl` element. If you define a value (time in seconds) for the `empty-queue-ttl` element, then your queue will be destroyed if it stays empty or unused for the time you give.

RELATED INFORMATION

Please refer to the [Queue Configuration section](#) for a full description of Hazelcast Distributed Queue configuration.

6.3 MultiMap

Hazelcast `MultiMap` is a specialized map where you can store multiple values under a single key. Just like any other distributed data structure implementation in Hazelcast, `MultiMap` is distributed and thread-safe.

Hazelcast `MultiMap` is not an implementation of `java.util.Map` due to the difference in method signatures. It supports most features of Hazelcast Map except for indexing, predicates and `MapLoader/MapStore`. Yet, like Hazelcast Map, entries are almost evenly distributed onto all cluster members. When a new member joins the cluster, the same ownership logic used in the distributed map applies.

6.3.1 Getting a MultiMap and Putting an Entry

The following example creates a MultiMap and puts items into it. Use the HazelcastInstance `getMultiMap` method to get the MultiMap, then use the MultiMap `put` method to put an entry into the MultiMap.

```
public class PutMember {
    public static void main( String[] args ) {
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        MultiMap <String , String > map = hazelcastInstance.getMultiMap( "map" );

        map.put( "a", "1" );
        map.put( "a", "2" );
        map.put( "b", "3" );
        System.out.println( "PutMember:Done" );
    }
}
```

Now let's print the entries in this MultiMap.

```
public class PrintMember {
    public static void main( String[] args ) {
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        MultiMap <String, String > map = hazelcastInstance.getMultiMap( "map" );
        for ( String key : map.keySet() ){
            Collection <String > values = map.get( key );
            System.out.println( "%s -> %s\n",key, values );
        }
    }
}
```

After you run the first code sample, run the `PrintMember` sample. You will see the key `a` has two values, as shown below.

```
b -> [3]
a -> [2, 1]
```

6.3.2 Configuring MultiMap

When using MultiMap, the collection type of the values can be either **Set** or **List**. You configure the collection type with the `valueCollectionType` parameter. If you choose **Set**, duplicate and null values are not allowed in your collection and ordering is irrelevant. If you choose **List**, ordering is relevant and your collection can include duplicate and null values.

You can also enable statistics for your MultiMap with the `statisticsEnabled` parameter. If you enable `statisticsEnabled`, statistics can be retrieved with `getLocalMultiMapStats()` method.



NOTE: Currently, eviction is not supported for the MultiMap data structure.

RELATED INFORMATION

Please refer to the [MultiMap Configuration section](#) for a full description of Hazelcast Distributed MultiMap configuration.

6.4 Set

Hazelcast Set is a distributed and concurrent implementation of `java.util.Set`.

- Hazelcast Set does not allow duplicate elements.
- Hazelcast Set does not preserve the order of elements.
- Hazelcast Set is a non-partitioned data structure: all the data that belongs to a set will live on one single partition in that node.
- Hazelcast Set cannot be scaled beyond the capacity of a single machine. Since the whole set lives on a single partition, storing large amount of data on a single set may cause memory pressure. Therefore, you should use multiple sets to store large amount of data; this way all the sets will be spread across the cluster, hence sharing the load.
- A backup of Hazelcast Set is stored on a partition of another node in the cluster so that data is not lost in the event of a primary node failure.
- All items are copied to the local node and iteration occurs locally.
- The equals method implemented in Hazelcast Set uses a serialized byte version of objects, as opposed to `java.util.HashSet`.

6.4.1 Getting a Set and Putting Items

Use the `HazelcastInstance` `getSet` method to get the Set, then use the set `put` method to put items into the Set.

```
import com.hazelcast.core.Hazelcast;
import java.util.Set;
import java.util.Iterator;

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();

Set<Price> set = hazelcastInstance.getSet( "IBM-Quote-History" );
set.add( new Price( 10, time1 ) );
set.add( new Price( 11, time2 ) );
set.add( new Price( 12, time3 ) );
set.add( new Price( 11, time4 ) );
//....
Iterator<Price> iterator = set.iterator();
while ( iterator.hasNext() ) {
    Price price = iterator.next();
    //analyze
}
```

RELATED INFORMATION

Please refer to the [Set Configuration section](#) for a full description of Hazelcast Distributed Set configuration.

6.4.2 Listening for Set Item Events

Hazelcast Set uses `ItemListener` to listen to events which occur when items are added and removed from the Set. Use the set `addItemListener` method to create an `ItemListener`.

```
import java.util.Queue;
import java.util.Map;
import java.util.Set;
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.ItemListener;
import com.hazelcast.core.EntryListener;
import com.hazelcast.core.EntryEvent;

public class Sample implements ItemListener {

    public static void main( String[] args ) {
```

```

Sample sample = new Sample();
HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
ISet<Price> set = hazelcastInstance.getSet( "default" );
set.addItemListener( sample, true );

Price price = new Price( 10, time1 );
set.add( price );
set.remove( price );
}

public void itemAdded( Object item ) {
    System.out.println( "Item added = " + item );
}

public void itemRemoved( Object item ) {
    System.out.println( "Item removed = " + item );
}
}

```

RELATED INFORMATION

To learn more about the configuration of listeners please refer to the [Listener Configurations section](#).

6.5 List

Hazelcast List is similar to Hazelcast Set, but Hazelcast List also allows duplicate elements.

- Besides allowing duplicate elements, Hazelcast List preserves the order of elements.
- Hazelcast List is a non-partitioned data structure where values and each backup are represented by their own single partition.
- Hazelcast List cannot be scaled beyond the capacity of a single machine.
- All items are copied to local and iteration occurs locally.

6.5.1 Getting a List and Putting Items

Use the HazelcastInstance `getList` method to get the list, then use the list `put` method to put items into the List.

```

import com.hazelcast.core.Hazelcast;
import java.util.List;
import java.util.Iterator;

HazelcastInstance hz = Hazelcast.newHazelcastInstance();

List<Price> list = hz.getList( "IBM-Quote-Frequency" );
list.add( new Price( 10 ) );
list.add( new Price( 11 ) );
list.add( new Price( 12 ) );
list.add( new Price( 11 ) );
list.add( new Price( 12 ) );

//....
Iterator<Price> iterator = list.iterator();
while ( iterator.hasNext() ) {
    Price price = iterator.next();
    //analyze
}

```

6.5.2 Listening for List Item Events

Hazelcast List uses `ItemListener` to listen to events which occur when items are added and removed from the List. Use the list `addItemListener` method to create an `ItemListener`.

```
import java.util.Queue;
import java.util.Map;
import java.util.Set;
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.ItemListener;
import com.hazelcast.core.EntryListener;
import com.hazelcast.core.EntryEvent;

public class Sample implements ItemListener{

    public static void main( String[] args ) {
        Sample sample = new Sample();
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        IList<Price> list = hazelcastInstance.getList( "default" );
        list.addItemListener( sample, true );

        Price price = new Price( 10, time1 )
        list.add( price );
        list.remove( price );
    }

    public void itemAdded( Object item ) {
        System.out.println( "Item added = " + item );
    }

    public void itemRemoved( Object item ) {
        System.out.println( "Item removed = " + item );
    }
}
```

RELATED INFORMATION

To learn more about the configuration of listeners please refer to the [Listener Configurations section](#).

RELATED INFORMATION

Please refer to the [List Configuration section](#) for a full description of Hazelcast Distributed List configuration.

6.6 Ringbuffer

Hazelcast Ringbuffer is a distributed data structure that stores its data in a ring-like structure. You can think of it as a circular array with a given capacity. Each Ringbuffer has a tail and a head. The tail is where the items are added and the head is where the items are overwritten or expired. You can reach each element in a Ringbuffer using a sequence ID, which is mapped to the elements between the head and tail (inclusive) of the Ringbuffer.

6.6.1 Getting a Ringbuffer and Reading Items

Reading from Ringbuffer is simple: get the Ringbuffer with the HazelcastInstance `getRingbuffer` method, get its current head with the `headSequence` method, and start reading. Use the method `readOne` to return the item at the given sequence; `readOne` blocks if no item is available. To read the next item, increment the sequence by one.

```

Ringbuffer<String> ringbuffer = hz.getRingbuffer("rb");
long sequence = ringbuffer.headSequence();
while(true){
    String item = ringbuffer.readOne(sequence);
    sequence++;
    ... process item
}

```

By exposing the sequence, you can now move the item from the Ringbuffer as long as the item is still available. If the item is not available any longer, `StaleSequenceException` is thrown.

6.6.2 Adding Items to a Ringbuffer

Adding an item to a Ringbuffer is also easy with the Ringbuffer `add` method:

```

Ringbuffer<String> ringbuffer = hz.getRingbuffer("rb");
ringbuffer.add("someitem")

```

Use the method `add` to returns the sequence of the inserted item; the sequence value will always be unique. You can use this as a very cheap way of generating unique IDs if you are already using Ringbuffer.

6.6.3 IQueue vs. Ringbuffer

Hazelcast Ringbuffer can sometimes be a better alternative than an Hazelcast IQueue. Unlike IQueue, Ringbuffer does not remove the items, it only reads items using a certain position. There are many advantages to this approach:

- The same item can be read multiple times by the same thread; this is useful for realizing semantics of read-at-least-once or read-at-most-once.
- The same item can be read by multiple threads. Normally you could use an IQueue per thread for the same semantic, but this is less efficient because of the increased remoting. A take from an IQueue is destructive, so the change needs to be applied for backup also, which is why a `queue.take()` is more expensive than a `ringBuffer.read(...)`.
- Reads are extremely cheap since there is no change in the Ringbuffer, therefore no replication is required.
- Reads and writes can be batched to speed up performance. Batching can dramatically improve the performance of Ringbuffer.

6.6.4 Configuring Ringbuffer Capacity

By default, a Ringbuffer is configured with a `capacity` of 10000 items. This creates an array with a size of 10000. If a `time-to-live` is configured, then an array of longs is also created that stores the expiration time for every item. In a lot of cases, you may want to change this `capacity` number to something that better fits your needs.

Below is a declarative configuration example of a Ringbuffer with a `capacity` of 2000 items.

```

<ringbuffer name="rb">
  <capacity>2000</capacity>
</ringbuffer>

```

Currently, Hazelcast Ringbuffer is not a partitioned data structure; its data is stored in a single partition and the replicas are stored in another partition. Therefore, create a Ringbuffer that can safely fit in a single cluster member.

6.6.5 Backing Up Ringbuffer

Hazelcast Ringbuffer has 1 single synchronous backup by default. You can control the Ringbuffer backup just like most of the other Hazelcast distributed data structures by setting the synchronous and asynchronous backups: `backup-count` and `async-backup-count`. In the example below, a Ringbuffer is configured with 0 synchronous backups and 1 asynchronous backup:

```
<ringbuffer name="rb">
  <backup-count>0</backup-count>
  <async-backup-count>1</async-backup-count>
</ringbuffer>
```

An asynchronous backup will probably give you better performance. However, there is a chance that the item added will be lost when the member owning the primary crashes before the backup could complete. You may want to consider batching methods if you need high performance but do not want to give up on consistency.

6.6.6 Configuring Ringbuffer Time To Live

You can configure Hazelcast Ringbuffer with a time to live in seconds. Using this setting, you can control how long the items remain in the Ringbuffer before they are expired. By default, the time to live is set to 0, meaning that unless the item is overwritten, it will remain in the Ringbuffer indefinitely. If you set a time to live and an item is added, then depending on the Overflow Policy, either the oldest item is overwritten, or the call is rejected.

In the example below, a Ringbuffer is configured with a time to live of 180 seconds.

```
<ringbuffer name="rb">
  <time-to-live-seconds>180</time-to-live-seconds>
</ringbuffer>
```

6.6.7 Setting Ringbuffer Overflow Policy

Using the overflow policy, you can determine what to do if the oldest item in the Ringbuffer is not old enough to expire when more items than the configured RingBuffer capacity are being added. The below options are currently available.

- `OverflowPolicy.OVERWRITE`: The oldest item is overwritten.
- `OverflowPolicy.FAIL`: The call is aborted. The methods that make use of the `OverflowPolicy` return `-1` to indicate that adding the item has failed.

Overflow policy gives you fine control on what to do if the Ringbuffer is full. You can also use the overflow policy to apply a back pressure mechanism. The following example code shows the usage of an exponential backoff.

```
long sleepMs = 100;
for (; ; ) {
    long result = ringbuffer.addAsync(item, OverflowPolicy.FAIL).get();
    if (result != -1) {
        break;
    }

    TimeUnit.MILLISECONDS.sleep(sleepMs);
    sleepMs = min(5000, sleepMs * 2);
}
```

6.6.8 Configuring Ringbuffer In-Memory Format

You can configure Hazelcast Ringbuffer with an in-memory format which controls the format of the Ringbuffer's stored items. By default, `BINARY` in-memory format is used, meaning that the object is stored in a serialized form. You can select the `OBJECT` in-memory format, which is useful when filtering is applied or when the `OBJECT` in-memory format has a smaller memory footprint than `BINARY`.

In the declarative configuration example below, a Ringbuffer is configured with the `OBJECT` in-memory format:

```
<ringbuffer name="rb">
  <in-memory-format>BINARY</in-memory-format>
</ringbuffer>
```

6.6.9 Adding Batched Items

In the previous examples, the method `ringBuffer.add()` is used to add an item to the Ringbuffer. The problem with this method is that it always overwrites and that it does not support batching. Batching can have a huge impact on the performance. You can use the method `addAllAsync` to support batching.

Please see the following example code.

```
List<String> items = Arrays.asList("1","2","3");
ICompletableFuture<Long> f = rb.addAllAsync(items, OverflowPolicy.OVERWRITE);
f.get()
```

In the above case, three strings are added to the Ringbuffer using the policy `OverflowPolicy.OVERWRITE`. Please see the `Overflow Policy` section for more information.

6.6.10 Reading Batched Items

In the previous example, the `readOne` method read items from the Ringbuffer. `readOne` is simple but not very efficient for the following reasons:

- `readOne` does not use batching.
- `readOne` cannot filter items at the source; the items need to be retrieved before being filtered.

The method `readManyAsync` can read a batch of items and can filter items at the source.

Please see the following example code.

```
ICompletableFuture<ReadResultSet<E>> readManyAsync(
    long startSequence,
    int minCount,
    int maxCount,
    IFunction<E, Boolean> filter);
```

The meanings of the `readManyAsync` arguments are given below.

- **startSequence:** Sequence of the first item to read.
- **minCount:** Minimum number of items to read. If you do not want to block, set it to 0. If you want to block for at least one item, set it to 1.
- **maxCount:** Maximum number of the items to retrieve. Its value cannot exceed 1000.
- **filter:** A function that accepts an item and checks if it should be returned. If no filtering should be applied, set it to null.

A full example is given below.

```

long sequence = rb.headSequence();
for(;;) {
    ICompletableFuture<ReadResultSet<String>> f = rb.readManyAsync(sequence, 1, 10, null);
    ReadResultSet<String> rs = f.get();
    for (String s : rs) {
        System.out.println(s);
    }
    sequence+=rs.readCount();
}

```

Please take a careful look at how your sequence is being incremented. You cannot always rely on the number of items being returned if the items are filtered out.

6.6.11 Using Async Methods

Hazelcast Ringbuffer provides asynchronous methods for more powerful operations like batched writing or batched reading with filtering. To make these methods synchronous, just call the method `get()` on the returned future.

Please see the following example code.

```

ICompletableFuture f = ringbuffer.addAsync(item, OverflowPolicy.FAIL);
f.get();

```

However, you can also use `ICompletableFuture` to get notified when the operation has completed. The advantage of `ICompletableFuture` is that the thread used for the call is not blocked till the response is returned.

Please see the below code as an example of when you want to get notified when a batch of reads has completed.

```

ICompletableFuture<ReadResultSet<String>> f = rb.readManyAsync(sequence, min, max, someFilter);
f.andThen(new ExecutionCallback<ReadResultSet<String>>() {
    @Override
    public void onResponse(ReadResultSet<String> response) {
        for (String s : response) {
            System.out.println("Received:" + s);
        }
    }

    @Override
    public void onFailure(Throwable t) {
        t.printStackTrace();
    }
});

```

6.6.12 Ringbuffer Configuration Examples

The following shows the declarative configuration of a Ringbuffer called `rb`. The configuration is modeled after the Ringbuffer defaults.

```

<ringbuffer name="rb">
    <capacity>10000</capacity>
    <backup-count>1</backup-count>
    <async-backup-count>0</async-backup-count>
    <time-to-live-seconds>0</time-to-live-seconds>
    <in-memory-format>BINARY</in-memory-format>
</ringbuffer>

```

You can also configure a Ringbuffer programmatically. The following is a programmatic version of the above declarative configuration.

```
RingbufferConfig rbConfig = new RingbufferConfig("rb")
    .setCapacity(10000)
    .setBackupCount(1)
    .setAsyncBackupCount(0)
    .setTimeToLiveSeconds(0)
    .setInMemoryFormat(InMemoryFormat.BINARY);
Config config = new Config();
config.addRingbufferConfig(rbConfig);
```

RELATED INFORMATION

Please refer to the [Ringbuffer Configuration section](#) for more information on configuring the Ringbuffer.

6.7 Topic

Hazelcast provides a distribution mechanism for publishing messages that are delivered to multiple subscribers. This is also known as a publish/subscribe (pub/sub) messaging model. Publishing and subscribing operations are cluster wide. When a member subscribes to a topic, it is actually registering for messages published by any member in the cluster, including the new members that joined after you add the listener.



NOTE: Publish operation is async. It does not wait for operations to run in remote nodes, it works as fire and forget.

6.7.1 Getting a Topic and Publishing Messages

Use the HazelcastInstance `getTopic` method to get the Topic, then use the topic `publish` method to publish your messages (messageObject).

```
import com.hazelcast.core.Topic;
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.MessageListener;

public class Sample implements MessageListener<MyEvent> {

    public static void main( String[] args ) {
        Sample sample = new Sample();
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        ITopic topic = hazelcastInstance.getTopic( "default" );
        topic.addMessageListener( sample );
        topic.publish( new MyEvent() );
    }

    public void onMessage( Message<MyEvent> message ) {
        MyEvent myEvent = message.getMessageObject();
        System.out.println( "Message received = " + myEvent.toString() );
        if ( myEvent.isHeavyweight() ) {
            messageExecutor.execute( new Runnable() {
                public void run() {
                    doHeavyweightStuff( myEvent );
                }
            } );
        }
    }
}
```



```

    }

    // ...

    private final Executor messageExecutor = Executors.newSingleThreadExecutor();
}

```

6.7.2 Getting Topic Statistics

Topic has two statistic variables that you can query. These values are incremental and local to the member.

```

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
ITopic<Object> myTopic = hazelcastInstance.getTopic( "myTopicName" );

myTopic.getLocalTopicStats().getPublishOperationCount();
myTopic.getLocalTopicStats().getReceiveOperationCount();

```

`getPublishOperationCount` and `getReceiveOperationCount` returns the total number of published and received messages since the start of this node, respectively. Please note that these values are not backed up, so if the node goes down, these values will be lost.

You can disable this feature with topic configuration. Please see the [Topic Configuration section](#).



NOTE: These statistics values can be also viewed in Management Center. Please see the [Topics section](#).

6.7.3 Understanding Topic Behavior

Each cluster member has a list of all registrations in the cluster. When a new member is registered for a topic, it sends a registration message to all members in the cluster. Also, when a new member joins the cluster, it will receive all registrations made so far in the cluster.

The behavior of a topic varies depending on the value of the configuration parameter `globalOrderEnabled`.

6.7.3.1 Ordering Messages as Published

If `globalOrderEnabled` is disabled, messages are ordered: listeners (subscribers) process the messages in the order that the messages are published. If cluster member *M* publishes messages *m1*, *m2*, *m3*, ..., *mn* to a topic *T*, then Hazelcast makes sure that all of the subscribers of topic *T* will receive and process *m1*, *m2*, *m3*, ..., *mn* in the given order.

Here is how it works. Let's say that we have three members (*member1*, *member2* and *member3*) and that *member1* and *member2* are registered to a topic named **news**. Note that all three members know that *member1* and *member2* are registered to **news**.

In this example, *member1* publishes two messages: **a1** and **a2**, and *member3* publishes two messages: **c1** and **c2**. When *member1* and *member3* publish a message, they will check their local list for registered members, and they will discover that *member1* and *member2* are in their lists, then they will fire messages to those members. One possible order of the messages received can be the following.

member1 -> c1, b1, a2, c2

member2 -> c1, c2, a1, a2

6.7.3.2 Ordering Messages for Members

If `globalOrderEnabled` is enabled, all members listening to the same topic will get its messages in the same order.

Here is how it works. Let's say that we have three members (*member1*, *member2* and *member3*) and that *member1* and *member2* are registered to a topic named **news**. Note that all three members know that *member1* and *member2* are registered to **news**.

In this example, *member1* publishes two messages: **a1** and **a2**, and *member3* publishes two messages: **c1** and **c2**. When a member publishes messages over the topic **news**, it first calculates which partition the **news** ID corresponds to. Then it sends an operation to the owner of the partition for that member to publish messages. Let's assume that **news** corresponds to a partition that *member2* owns. *member1* and *member3* first sends all messages to *member2*. Assume that the messages are published in the following order:

member1 -> **a1**, **c1**, **a2**, **c2**

member2 then publishes these messages by looking at registrations in its local list. It sends these messages to *member1* and *member2* (it makes a local dispatch for itself).

member1 -> **a1**, **c1**, **a2**, **c2**

member2 -> **a1**, **c1**, **a2**, **c2**

This way, we guarantee that all members will see the events in the same order.

6.7.3.3 Keeping Generated and Published Order the Same

In both cases, there is a `StripedExecutor` in `EventService` that is responsible for dispatching the received message. For all events in Hazelcast, the order that events are generated and the order they are published to the user are guaranteed to be the same via this `StripedExecutor`.

In `StripedExecutor`, there are as many threads as are specified in the property `hazelcast.event.thread.count` (default is 5). For a specific event source (for a particular topic name), *hash of that source's name % 5* gives the ID of the responsible thread. Note that there can be another event source (entry listener of a map, item listener of a collection, etc.) corresponding to the same thread. In order not to make other messages to block, heavy processing should not be done in this thread. If there is time consuming work that needs to be done, the work should be handed over to another thread. Please see the [Getting a Topic and Publishing Messages section](#).

6.7.4 Configuring Topic

To configure a topic, set the topic name, decide on statistics and global ordering, and set message listeners. Default values are:

- `global-ordering` is **false**, meaning that by default, there is no guarantee of global order.
- `statistics` is **true**, meaning that by default, statistics are calculated.

Example configuration code follows. For a full description of Hazelcast Distributed Topic configuration, refer to the [Topic Configuration section](#).

6.7.4.1 Example Topic Declarative Configuration

```
<hazelcast>
...
<topic name="yourTopicName">
  <global-ordering-enabled>true</global-ordering-enabled>
  <statistics-enabled>true</statistics-enabled>
  <message-listeners>
    <message-listener>MessageListenerImpl</message-listener>
  </message-listeners>
```

```

    </topic>
    ...
</hazelcast>

```

6.7.4.2 Example Topic Programmatic Configuration

```

TopicConfig topicConfig = new TopicConfig();
topicConfig.setGlobalOrderingEnabled( true );
topicConfig.setStatisticsEnabled( true );
topicConfig.setName( "yourTopicName" );
MessageListener<String> implementation = new MessageListener<String>() {
    @Override
    public void onMessage( Message<String> message ) {
        // process the message
    }
};
topicConfig.addMessageListenerConfig( new ListenerConfig( implementation ) );
HazelcastInstance instance = Hazelcast.newHazelcastInstance()

```

6.7.4.3 Topic Related Configuration

Topic related but not topic specific configuration parameters:

- ``hazelcast.event.queue.capacity``: default value is 1,000,000
- ``hazelcast.event.queue.timeout.millis``: default value is 250
- ``hazelcast.event.thread.count``: default value is 5

For a description of these parameters, please see the [Global Event Configuration section](#).

6.8 Reliable Topic

The Reliable Topic data structure has been introduced with the release of Hazelcast 3.5. The Reliable Topic uses the same `ITopic` interface as a regular topic. The main difference is that Reliable Topic is backed up by the RingBuffer (also introduced with Hazelcast 3.5) data structure. The following are the advantages of this approach:

- Events are not lost since the RingBuffer is configured with 1 synchronous backup by default.
- Each Reliable `ITopic` gets its own RingBuffer; if there is a topic with a very fast producer, it will not lead to problems at the topic that runs at a slower pace.
- Since the event system behind a regular `ITopic` is shared with other data structures (e.g. collection listeners), you can run into isolation problems. This does not happen with the Reliable `ITopic`.

6.8.1 Sample Reliable ITopic Code

```

import com.hazelcast.core.Topic;
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.MessageListener;

public class Sample implements MessageListener<MyEvent> {

    public static void main( String[] args ) {
        Sample sample = new Sample();
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        ITopic topic = hazelcastInstance.getReliableTopic( "default" );
    }
}

```

```

    topic.addMessageListener( sample );
    topic.publish( new MyEvent() );
}

public void onMessage( Message<MyEvent> message ) {
    MyEvent myEvent = message.getMessageObject();
    System.out.println( "Message received = " + myEvent.toString() );
}
}

```

You can configure the Reliable `ITopic` using its `RingBuffer`. If there is a Reliable Topic with the name `Foo`, then you can configure this topic by adding a `ReliableTopicConfig` for a `RingBuffer` with the name `Foo`. By default, a `RingBuffer` does not have any TTL (time to live) and it has a limited capacity; you may want to change that configuration.

By default, the Reliable `ITopic` uses a shared thread pool. If you need better isolation, you can configure a custom executor on the `ReliableTopicConfig`.

Because the reads on a `RingBuffer` are not destructive, it is easy to apply batching. `ITopic` uses read batching and reads 10 items at a time (if available) by default.

6.8.2 Slow Consumers

The Reliable `ITopic` provides control and a way to deal with slow consumers. It is unwise to keep events for a slow consumer in memory indefinitely since you do not know when it is going to catch up. You can control the size of the `Ringbuffer` by using its capacity. For the cases when a `Ringbuffer` runs out of its capacity, you can specify the following policies for the `TopicOverloadPolicy` configuration:

- `DISCARD_OLDEST`: Overwrite the oldest item, no matter if a TTL is set. In this case the fast producer supersedes a slow consumer
- `DISCARD_NEWEST`: Discard the newest item.
- `BLOCK`: Wait until the items are expired in the `Ringbuffer`.
- `FAIL`: Immediately throw `TopicOverloadException` if there is no space in the `Ringbuffer`.

RELATED INFORMATION

Please refer to the [Reliable Topic Configuration section](#) for more information on configuring the Reliable Topic.

6.9 Lock

`ILock` is the distributed implementation of `java.util.concurrent.locks.Lock`. Meaning if you lock using an `ILock`, the critical section that it guards is guaranteed to be executed by only one thread in the entire cluster. Even though locks are great for synchronization, they can lead to problems if not used properly. Also note that Hazelcast Lock does not support fairness.

6.9.1 Using Try-Catch Blocks with Locks

Always use locks with *try-catch* blocks. It will ensure that locks will be released if an exception is thrown from the code in a critical section. Also note that the `lock` method is outside the *try-catch* block, because we do not want to unlock if the lock operation itself fails.

```

import com.hazelcast.core.Hazelcast;
import java.util.concurrent.locks.Lock;

```

```

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();

```

```

Lock lock = hazelcastInstance.getLock( "myLock" );
lock.lock();
try {
    // do something here
} finally {
    lock.unlock();
}

```

6.9.2 Releasing Locks with tryLock Timeout

If a lock is not released in the cluster, another thread that is trying to get the lock can wait forever. To avoid this, use `tryLock` with a timeout value. You can set a high value (normally it should not take that long) for `tryLock`. You can check the return value of `tryLock` as follows:

```

if ( lock.tryLock ( 10, TimeUnit.SECONDS ) ) {
    try {
        // do some stuff here..
    } finally {
        lock.unlock();
    }
} else {
    // warning
}

```

6.9.3 Avoiding Waiting Threads with Lease Time

You can also avoid indefinitely waiting threads by using lock with lease time: the lock will be released in the given lease time. Lock can be safely unlocked before the lease time expires. Note that the unlock operation can throw an `IllegalMonitorStateException` if the lock is released because the lease time expires. If that is the case, critical section guarantee is broken.

Please see the below example.

```

lock.lock( 5, TimeUnit.SECONDS )
try {
    // do some stuff here..
} finally {
    try {
        lock.unlock();
    } catch ( IllegalMonitorStateException ex ){
        // WARNING Critical section guarantee can be broken
    }
}

```

6.9.4 Understanding Lock Behavior

- Locks are fail-safe. If a member holds a lock and some other members go down, the cluster will keep your locks safe and available. Moreover, when a member leaves the cluster, all the locks acquired by that dead member will be removed so that those locks are immediately available for live members.
- Locks are re-entrant: the same thread can lock multiple times on the same lock. Note that for other threads to be able to require this lock, the owner of the lock must call `unlock` as many times as the owner called `lock`.
- In the split-brain scenario, the cluster behaves as if it were two different clusters. Since two separate clusters are not aware of each other, two nodes from different clusters can acquire the same lock. For more information on places where split brain syndrome can be handled, please see split brain syndrome.

- Locks are not automatically removed. If a lock is not used anymore, Hazelcast will not automatically garbage collect the lock. This can lead to an `OutOfMemoryError`. If you create locks on the fly, make sure they are destroyed.
- Hazelcast `IMap` also provides locking support on the entry level with the method `IMap.lock(key)`. Although the same infrastructure is used, `IMap.lock(key)` is not an `ILock` and it is not possible to expose it directly.

6.9.5 Synchronizing Threads with `ICondition`

`ICondition` is the distributed implementation of the `notify`, `notifyAll` and `wait` operations on the Java object. You can use it to synchronize threads across the cluster. More specifically, you use `ICondition` when a thread's work depends on another thread's output. A good example can be producer/consumer methodology.

Please see the below code examples for a producer/consumer implementation.

Producer thread:

```
HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
Lock lock = hazelcastInstance.getLock( "myLockId" );
ICondition condition = lock.newCondition( "myConditionId" );

lock.lock();
try {
    while ( !shouldProduce() ) {
        condition.await(); // frees the lock and waits for signal
                          // when it wakes up it re-acquires the lock
                          // if available or waits for it to become
                          // available
    }
    produce();
    condition.signalAll();
} finally {
    lock.unlock();
}
```

Consumer thread:

```
HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
Lock lock = hazelcastInstance.getLock( "myLockId" );
ICondition condition = lock.newCondition( "myConditionId" );

lock.lock();
try {
    while ( !canConsume() ) {
        condition.await(); // frees the lock and waits for signal
                          // when it wakes up it re-acquires the lock if
                          // available or waits for it to become
                          // available
    }
    consume();
    condition.signalAll();
} finally {
    lock.unlock();
}
```

6.10 IAtomicLong

Hazelcast `IAtomicLong` is the distributed implementation of `java.util.concurrent.atomic.AtomicLong`. It offers most of `AtomicLong`'s operations such as `get`, `set`, `getAndSet`, `compareAndSet` and `incrementAndGet`. Since `IAtomicLong` is a distributed implementation, these operations involve remote calls and hence their performances differ from `AtomicLong`.

The following example code creates an instance, increments it by a million, and prints the count.

```
public class Member {
    public static void main( String[] args ) {
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        IAtomicLong counter = hazelcastInstance.getAtomicLong( "counter" );
        for ( int k = 0; k < 1000 * 1000; k++ ) {
            if ( k % 500000 == 0 ) {
                System.out.println( "At: " + k );
            }
            counter.incrementAndGet();
        }
        System.out.printf( "Count is %s\n", counter.get() );
    }
}
```

When you start other instances with the code above, you will see the count as *member count times a million*.

6.10.1 Sending Functions to IAtomicLong

You can send functions to an `IAtomicLong`. `Function` is a Hazelcast owned, single method interface. The following sample `Function` implementation doubles the original value.

```
private static class Add2Function implements Function <Long, Long> {
    @Override
    public Long apply( Long input ) {
        return input + 2;
    }
}
```

6.10.2 Executing Functions on IAtomicLong

You can use the following methods to execute functions on `IAtomicLong`.

- `apply`: It applies the function to the value in `IAtomicLong` without changing the actual value and returning the result.
- `alter`: It alters the value stored in the `IAtomicLong` by applying the function. It will not send back a result.
- `alterAndGet`: It alters the value stored in the `IAtomicLong` by applying the function, storing the result in the `IAtomicLong` and returning the result.
- `getAndAlter`: It alters the value stored in the `IAtomicLong` by applying the function and returning the original value.

The following sample code includes these methods.

```
public class Member {
    public static void main( String[] args ) {
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        IAtomicLong atomicLong = hazelcastInstance.getAtomicLong( "counter" );
```

```

    atomicLong.set( 1 );
    long result = atomicLong.apply( new Add2Function() );
    System.out.println( "apply.result: " + result);
    System.out.println( "apply.value: " + atomicLong.get() );

    atomicLong.set( 1 );
    atomicLong.alter( new Add2Function() );
    System.out.println( "alter.value: " + atomicLong.get() );

    atomicLong.set( 1 );
    result = atomicLong.alterAndGet( new Add2Function() );
    System.out.println( "alterAndGet.result: " + result );
    System.out.println( "alterAndGet.value: " + atomicLong.get() );

    atomicLong.set( 1 );
    result = atomicLong.getAndAlter( new Add2Function() );
    System.out.println( "getAndAlter.result: " + result );
    System.out.println( "getAndAlter.value: " + atomicLong.get() );
}
}

```

6.10.3 Reasons to Use Functions with IAtomic

The reason for using a function instead of a simple code line like `atomicLong.set(atomicLong.get() + 2)`; is that the `IAtomicLong` read and write operations are not atomic. Since `IAtomicLong` is a distributed implementation, those operations can be remote ones, which may lead to race problems. By using functions, the data is not pulled into the code, but the code is sent to the data. This makes it more scalable.



NOTE: *IAtomicLong* has 1 synchronous backup and no asynchronous backups. Its backup count is not configurable.

6.11 ISemaphore

Hazelcast `ISemaphore` is the distributed implementation of `java.util.concurrent.Semaphore`.

6.11.1 Controlling Thread Counts with Semaphore Permits

Semaphores offer **permits** to control the thread counts in the case of performing concurrent activities. To execute a concurrent activity, a thread grants a permit or waits until a permit becomes available. When the execution is completed, the permit is released.



NOTE: *Semaphore* with a single permit may be considered as a lock. But unlike the locks, when semaphores are used, any thread can release the permit and semaphores can have multiple permits.



NOTE: *Hazelcast Semaphore* does not support fairness.

When a permit is acquired on `ISemaphore`:

- if there are permits, the number of permits in the semaphore is decreased by one and the calling thread performs its activity. If there is contention, the longest waiting thread will acquire the permit before all other threads.

- if no permits are available, the calling thread blocks until a permit becomes available. When a timeout happens during this block, the thread is interrupted. In the case where the semaphore is destroyed, an `InstanceDestroyedException` is thrown.

6.11.2 Example Semaphore Code

The following example code uses an `IAtomicLong` resource 1000 times, increments the resource when a thread starts to use it, and decrements it when the thread completes.

```
public class SemaphoreMember {
    public static void main( String[] args ) throws Exception{
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        ISemaphore semaphore = hazelcastInstance.getSemaphore( "semaphore" );
        IAtomicLong resource = hazelcastInstance.getAtomicLong( "resource" );
        for ( int k = 0 ; k < 1000 ; k++ ) {
            System.out.println( "At iteration: " + k + ", Active Threads: " + resource.get() );
            semaphore.acquire();
            try {
                resource.incrementAndGet();
                Thread.sleep( 1000 );
                resource.decrementAndGet();
            } finally {
                semaphore.release();
            }
        }
        System.out.println("Finished");
    }
}
```

Let's limit the concurrent access to this resource by allowing at most 3 threads. You can configure it declaratively by setting the `initial-permits` property, as shown below.

```
<semaphore name="semaphore">
  <initial-permits>3</initial-permits>
</semaphore>
```



NOTE: If there is a shortage of permits while the semaphore is being created, value of this property can be set to a negative number.

If you execute the above `SemaphoreMember` class 5 times, the output will be similar to the following:

```
At iteration: 0, Active Threads: 1
At iteration: 1, Active Threads: 2
At iteration: 2, Active Threads: 3
At iteration: 3, Active Threads: 3
At iteration: 4, Active Threads: 3
```

As can be seen, the maximum count of concurrent threads is equal or smaller than 3. If you remove the semaphore acquire/release statements in `SemaphoreMember`, you will see that there is no limitation on the number of concurrent usages.

Hazelcast also provides backup support for `ISemaphore`. When a member goes down, another member can take over the semaphore with the permit information (permits are automatically released when a member goes down). To enable this, configure synchronous or asynchronous backup with the properties `backup-count` and `async-backup-count` (by default, synchronous backup is already enabled).

6.11.3 Example Semaphore Configuration

An example configuration is shown below.

```
<semaphore name="semaphore">
  <initial-permits>3</initial-permits>
  <backup-count>1</backup-count>
</semaphore>
```



NOTE: If high performance is more important (than not losing the permit information), you can disable the backups by setting `backup-count` to 0.

RELATED INFORMATION

Please refer to the [Semaphore Configuration section](#) for a full description of Hazelcast Distributed Semaphore configuration.

6.12 IAtomicReference

The `IAtomicLong` is very useful if you need to deal with a long, but in some cases you need to deal with a reference. That is why Hazelcast also supports the `IAtomicReference` which is the distributed version of the `java.util.concurrent.atomic.AtomicReference`.

Here is an `IAtomicReference` example.

```
public class Member {
    public static void main(String[] args) {
        Config config = new Config();

        HazelcastInstance hz = Hazelcast.newHazelcastInstance(config);

        IAtomicReference<String> ref = hz.getAtomicReference("reference");
        ref.set("foo");
        System.out.println(ref.get());
        System.exit(0);
    }
}
```

When you execute the above example, you will see the following output.

```
foo
```

6.12.1 Sending Functions to IAtomicReference

Just like `IAtomicLong`, `IAtomicReference` has methods that accept a ‘function’ as an argument, such as `alter`, `alterAndGet`, `getAndAlter` and `apply`. There are two big advantages of using these methods:

- From a performance point of view, it is better to send the function to the data than the data to the function. Often the function is a lot smaller than the data and therefore cheaper to send over the line. Also the function only needs to be transferred once to the target machine, and the data needs to be transferred twice.
- You do not need to deal with concurrency control. If you would perform a load, transform, store, you could run into a data race since another thread might have updated the value you are about to overwrite.

6.12.2 Using IAtomicReference

Below are some issues you need to know when you use IAtomicReference.

- IAtomicReference works based on the byte-content and not on the object-reference. If you use the `compareAndSet` method, do not change to original value because its serialized content will then be different. It is also important to know that if you rely on Java serialization, sometimes (especially with hashmaps) the same object can result in different binary content.
- IAtomicReference will always have 1 synchronous backup.
- All methods returning an object will return a private copy. You can modify the private copy, but the rest of the world will be shielded from your changes. If you want these changes to be visible to the rest of the world, you need to write the change back to the IAtomicReference; but be careful about introducing a data-race.
- The ‘in-memory format’ of an IAtomicReference is **binary**. The receiving side does not need to have the class definition available, unless it needs to be deserialized on the other side (e.g. because a method like ‘alter’ is executed). This deserialization is done for every call that needs to have the object instead of the binary content, so be careful with expensive object graphs that need to be deserialized.
- If you have an object with many fields or an object graph, and you only need to calculate some information or need a subset of fields, you can use the `apply` method. With the `apply` method, the whole object does not need to be sent over the line, only the information that is relevant.

6.13 ICountDownLatch

Hazelcast ICountDownLatch is the distributed implementation of `java.util.concurrent.CountDownLatch`.

6.13.1 Gate-Keeping Concurrent Activities

CountDownLatch is considered to be a gate keeper for concurrent activities. It enables the threads to wait for other threads to complete their operations.

The following code samples describe the mechanism of ICountDownLatch. Assume that there is a leader process and there are follower processes that will wait until the leader completes. Here is the leader:

```
public class Leader {
    public static void main( String[] args ) throws Exception {
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        ICountDownLatch latch = hazelcastInstance.getCountDownLatch( "countDownLatch" );
        System.out.println( "Starting" );
        latch.trySetCount( 1 );
        Thread.sleep( 30000 );
        latch.countDown();
        System.out.println( "Leader finished" );
        latch.destroy();
    }
}
```

Since only a single step is needed to be completed as a sample, the above code initializes the latch with 1. Then, the code sleeps for a while to simulate a process and starts the countdown. Finally, it clears up the latch. Let's write a follower:

```
public class Follower {
    public static void main( String[] args ) throws Exception {
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        ICountDownLatch latch = hazelcastInstance.getCountDownLatch( "countDownLatch" );
        System.out.println( "Waiting" );
        boolean success = latch.await( 10, TimeUnit.SECONDS );
    }
}
```

```

        System.out.println( "Complete: " + success );
    }
}

```

The follower class above first retrieves `ICountDownLatch` and then calls the `await` method to enable the thread to listen for the latch. The method `await` has a timeout value as a parameter. This is useful when the `countDown` method fails. To see `ICountDownLatch` in action, start the leader first and then start one or more followers. You will see that the followers will wait until the leader completes.

6.13.2 Recovering From Failure

In a distributed environment, the counting down cluster member may go down. In this case, all listeners are notified immediately and automatically by Hazelcast. The state of the current process just before the failure should be verified and ‘how to continue now’ should be decided (e.g. restart all process operations, continue with the first failed process operation, throw an exception, etc.).

6.13.3 Using ICountDownLatch

Although the `ICountDownLatch` is a very useful synchronization aid, you will probably not use it on a daily basis. Unlike Java’s implementation, Hazelcast’s `ICountDownLatch` count can be re-set after a countdown has finished but not during an active count.



NOTE: *ICountDownLatch has 1 synchronous backup and no asynchronous backups. Its backup count is not configurable. Also, the count cannot be re-set during an active count, it should be re-set after the countdown is finished.*

6.14 IdGenerator

Hazelcast `IdGenerator` is used to generate cluster-wide unique identifiers. Generated identifiers are long type primitive values between 0 and `Long.MAX_VALUE`.

6.14.1 Generating Cluster-Wide IDs

ID generation occurs almost at the speed of `AtomicLong.incrementAndGet()`. A group of 1 million identifiers is allocated for each cluster member. In the background, this allocation takes place with an `IAAtomicLong` incremented by 1 million. Once a cluster member generates IDs (allocation is done), `IdGenerator` increments a local counter. If a cluster member uses all IDs in the group, it will get another 1 million IDs. By this way, only one time of network traffic is needed, meaning that 999,999 identifiers are generated in memory instead of over the network. This is fast.

Let’s write a sample identifier generator.

```

public class IdGeneratorExample {
    public static void main( String[] args ) throws Exception {
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        IdGenerator idGen = hazelcastInstance.getIdGenerator( "newId" );
        while (true) {
            Long id = idGen.newId();
            System.err.println( "Id: " + id );
            Thread.sleep( 1000 );
        }
    }
}

```

Let’s run the above code two times. The output will be similar to the following.

```
Members [1] {
  Member [127.0.0.1]:5701 this
}
Id: 1
Id: 2
Id: 3
```

```
Members [2] {
  Member [127.0.0.1]:5701
  Member [127.0.0.1]:5702 this
}
Id: 1000001
Id: 1000002
Id: 1000003
```

6.14.2 Unique IDs and Duplicate IDs

You can see that the generated IDs are unique and counting upwards. If you see duplicated identifiers, it means your instances could not form a cluster.



NOTE: Generated IDs are unique during the life cycle of the cluster. If the entire cluster is restarted, IDs start from 0 again or you can initialize to a value using the `init()` method of `IdGenerator`.



NOTE: `IdGenerator` has 1 synchronous backup and no asynchronous backups. Its backup count is not configurable.

6.15 Replicated Map

A replicated map is a weakly consistent, distributed key-value data structure provided by Hazelcast.

6.15.1 Replicating Instead of Partitioning

All other data structures are partitioned in design. A replicated map does not partition data (it does not spread data to different cluster members); instead, it replicates the data to all members.

This leads to higher memory consumption. However, a replicated map has faster read and write access since the data are available on all members and writes take place on local members, eventually being replicated to all other members.

Weak consistency compared to eventually consistency means that replication is done on a best efforts basis. Lost or missing updates are neither tracked nor resent. This kind of data structure is suitable for immutable objects, catalogue data, or idempotent calculable data (like HTML pages).

Replicated map nearly fully implements the `java.util.Map` interface, but it lacks the methods from `java.util.concurrent.ConcurrentMap` since there are no atomic guarantees to writes or reads.

6.15.2 Example Replicated Map Code

Here is an example of replicated map code. The `HazelcastInstance` `getReplicatedMap` methods gets the replicated map, and the replicated map `put` creates map entries.

```
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.HazelcastInstance;
import java.util.Collection;
```

```
import java.util.Map;

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
Map<String, Customer> customers = hazelcastInstance.getReplicatedMap("customers");
customers.put( "1", new Customer( "Joe", "Smith" ) );
customers.put( "2", new Customer( "Ali", "Selam" ) );
customers.put( "3", new Customer( "Avi", "Noyan" ) );

Collection<Customer> colCustomers = customers.values();
for ( Customer customer : colCustomers ) {
    // process customer
}
```

`HazelcastInstance::getReplicatedMap` returns `com.hazelcast.core.ReplicatedMap` which, as stated above, extends the `java.util.Map` interface.

The `com.hazelcast.core.ReplicatedMap` interface has some additional methods for registering entry listeners or retrieving values in an expected order.



NOTE: *Replicated Map is in the beta stage.*

6.15.3 Read Write Considerations for Replicated Map

A replicated map **does not** support ordered writes! In case of a conflict caused by two nodes simultaneously written to the same key, a vector clock algorithm resolves and decides on one of the values.

Due to the weakly consistent nature and the previously mentioned behaviors of replicated map, there is a chance of reading stale data at any time. There is no read guarantee like there is for repeatable reads.

6.15.4 Breakage of the Map-Contract

Replicated Map offers a distributed `java.util.Map::clear` implementation, but due to the asynchronous nature and weakly consistency of this implementation, there is no point in time where you can say the map is empty. Every node applies that to its local dataset in “a near point in time”. If you need a definite point in time to empty the map, you may want to consider using a lock around the `clear` operation.

You can simulate the `clear` method by locking your user codebase and executing a remote operation that uses `DistributedObject::destroy` to destroy the node’s own proxy and storage of the Replicated Map. A new proxy instance and storage will be created on the next retrieval of the Replicated Map using `HazelcastInstance::getReplicatedMap`. You will have to reallocate the Replicated Map in your code. Afterwards, just release the lock when finished.

6.15.5 Configuration Design for Replicated Map

There are several technical design decisions you should consider when you configure a replicated map.

Initial provisioning

If a new member joins, there are two ways you can handle the initial provisioning that is executed to replicate all existing values to the new member. Each involves how you configure for async fill up.

First, you can configure `async fill up` to `true`, which does not block reads while the fill up operation is underway. That way, you have immediate access on the new member, but it will take time until all values are eventually accessible. Not yet replicated values are returned as non-existing (null). Write operations to already existing keys during this async phase can be lost, since the vector clock for an entry might not be initialized by another member yet, and it might be seen as an old update by other members.

Second, you can configure for a synchronous initial fill up (by configuring the `async` fill up to `false`), which blocks every read or write access to the map until the fill up operation is finished. Use this with caution since it might block your application from operating.

Replication delay

By default, the replication of values is delayed by 100 milliseconds when no current waiting replication is found. This collects multiple updates and minimizes the operations overhead on replication. A hard limit of 1000 replications is built into the system to prevent `OutOfMemory` situations where you put lots of data into the replicated map in a very short time. You can configure the replication delay. A value of “0” means immediate replication. You can configure the trade off between replication overhead and the time for the value to be replicated.

Concurrency Level

The concurrency level configuration defines the number of mutexes and segments inside the replicated map storage. A mutex/segment is chosen by calculating the `hashCode` of the key and using the module by the concurrency level. If multiple keys fall into the same mutex, they will wait for other mutex holders on the same mutex to finish their operation.

For a high amount of values, or for high contention on the mutexes, you can configure the concurrency level.

6.15.6 Configuring Replicated Map

Replicated Map can be configured using the following two ways (as with most other features in Hazelcast):

- Programmatic: the typical Hazelcast way, using the Config API seen above.
- Declarative: using `hazelcast.xml`.

6.15.6.1 Replicated Map Declarative Configuration

You can declare your Replicated Map configuration in the Hazelcast configuration file `hazelcast.xml`. You can use the configuration to tune the behavior of the internal replication algorithm, such as the replication delay which batches up the replication for better network utilization. See the following example declarative configuration.

```
<replicatedmap name="default">
  <in-memory-format>BINARY</in-memory-format>
  <concurrency-level>32</concurrency-level>
  <replication-delay-millis>100</replication-delay-millis>
  <async-fillup>true</async-fillup>
  <statistics-enabled>true</statistics-enabled>
  <entry-listeners>
    <entry-listener include-value="true">
      com.hazelcast.examples.EntryListener
    </entry-listener>
  </entry-listeners>
</replicatedmap>
```

- `in-memory-format`: Internal storage format. Please see the [In-Memory Format section](#). The default value is `BINARY`.
- `concurrency-level`: Number of parallel mutexes to minimize the contention on the keys. The default value is 32, which is a good number for lots of applications. If higher contention is seen on writes to values inside the replicated map, this value can be adjusted according to the needs.
- `replication-delay-millis`: Time in milliseconds after a put is executed that the put value is replicated to other nodes. During this time, multiple puts can be operated and the values are cached up to be sent all at once. This increases the latency for eventual consistency, but it lowers the I/O operations. The default value is 100ms before a replication is operated. If `replication-delay-millis` is set to 0, no delay is used (not cached) and all values are replicated one by one.

- **async-fillup**: Specifies if the replicated map is available for reads before the initial replication is completed. The default value is **true**. If set to **false** (i.e. synchronous initial fill up), no exception will be thrown when the replicated map is not yet ready, but the call will block until it is finished.
- **statistics-enabled**: If set to **true**, the statistics such as cache hits and misses are collected. The default value is **false**.
- **entry-listener**: Full canonical classname of the **EntryListener** implementation.
 - **entry-listener#include-value**: Specifies whether the event includes the value or not. Sometimes the key is enough to react on an event. In those situations, setting this value to **false** will save a deserialization cycle. The default value is **true**.
 - **entry-listener#local**: Not used for Replicated Map since listeners are always local.

6.15.6.2 Replicated Map Programmatic Configuration

You can use the Config API for programmatic configuration, as you can for all other data structures in Hazelcast. You must create the configuration upfront, when you instantiate the **HazelcastInstance**.

A basic example on how to configure the Replicated Map using the programmatic approach is shown in the following snippet.

```
Config config = new Config();

ReplicatedMapConfig replicatedMapConfig =
    config.getReplicatedMapConfig( "default" );

replicatedMapConfig.setInMemoryFormat( InMemoryFormat.BINARY );
replicatedMapConfig.setConcurrencyLevel( 32 );
```

All properties that can be configured using the declarative configuration are also available using programmatic configuration by transforming the tag names into getter or setter names.

6.15.6.3 In-Memory Format on Replicated Map

Currently, two **in-memory-format** values are usable with the Replicated Map.

- **OBJECT** (default): The data will be stored in deserialized form. This configuration is the default choice since the data replication is mostly used for high speed access. Please be aware that changing the values without a **Map::put** is not reflected on the other nodes but is visible on the changing nodes for later value accesses.
- **BINARY**: The data is stored in serialized binary format and has to be deserialized on every request. This option offers higher encapsulation since changes to values are always discarded as long as the newly changed object is not explicitly **Map::put** into the map again.

6.15.7 Using EntryListener on Replicated Map

A **com.hazelcast.core.EntryListener** used on a Replicated Map serves the same purpose as it would on other data structures in Hazelcast. You can use it to react on add, update, and remove operations. Replicated maps do not yet support eviction.

6.15.7.1 Difference in EntryListener on Replicated Map

The fundamental difference in Replicated Map behavior, compared to the other data structures, is that an **EntryListener** only reflects changes on local data. Since replication is asynchronous, all listener events are fired only when an operation is finished on a local node. Events can fire at different times on different nodes.

6.15.7.2 Example of Replicated Map EntryListener

Here is a code example for using EntryListener on a replicated map.

The HazelcastInstance method `getReplicatedMap` gets a replicated map (customers), and the `ReplicatedMap` method `addEntryListener` adds an entry listener to the replicated map. Then the `ReplicatedMap` `put` method adds a replicated map entry, then updates it, and then the `remove` method removes the entry.

```
import com.hazelcast.core.EntryEvent;
import com.hazelcast.core.EntryListener;
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.HazelcastInstance;
import com.hazelcast.core.ReplicatedMap;

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
ReplicatedMap<String, Customer> customers =
    hazelcastInstance.getReplicatedMap( "customers" );

customers.addEntryListener( new EntryListener<String, Customer>() {
    @Override
    public void entryAdded( EntryEvent<String, Customer> event ) {
        log( "Entry added: " + event );
    }

    @Override
    public void entryUpdated( EntryEvent<String, Customer> event ) {
        log( "Entry updated: " + event );
    }

    @Override
    public void entryRemoved( EntryEvent<String, Customer> event ) {
        log( "Entry removed: " + event );
    }

    @Override
    public void entryEvicted( EntryEvent<String, Customer> event ) {
        // Currently not supported, will never fire
    }
});

customers.put( "1", new Customer( "Joe", "Smith" ) ); // add event
customers.put( "1", new Customer( "Ali", "Selam" ) ); // update event
customers.remove( "1" ); // remove event
```


Chapter 7

Distributed Events

You can register for Hazelcast entry events so you will be notified when those events occur. Event Listeners are cluster-wide: when a listener is registered in one member of cluster, it is actually registered for events that originated at any member in the cluster. When a new member joins, events originated at the new member will also be delivered.

An Event is created only if you registered an event listener. If no listener is registered, then no event will be created. If you provided a predicate when you registered the event listener, pass the predicate before sending the event to the listener (member/client).

As a rule of thumb, your event listener should not implement heavy processes in its event methods which block the thread for a long time. If needed, you can use `ExecutorService` to transfer long running processes to another thread and thus offload the current listener thread.

7.1 Event Listeners for Hazelcast Members

Hazelcast offers the following event listeners:

- **Membership Listener** for cluster membership events.
- **Distributed Object Listener** for distributed object creation and destroy events.
- **Migration Listener** for partition migration start and complete events.
- **Partition Lost Listener** for partition lost events.
- **Lifecycle Listener** for `HazelcastInstance` lifecycle events.
- **Entry Listener** for `IMap` and `MultiMap` entry events (please refer to the [Listening to Map Events section](#)).
- **Item Listener** for `IQueue`, `ISet` and `IList` item events (please refer to the Event Registration and Configuration parts of the sections [Set](#) and [List](#)).
- **Message Listener** for `ITopic` message events.
- **Client Listener** for client connection events.

7.1.1 Listening for Member Events

The Membership Listener interface has methods that are invoked for the following events.

- **memberAdded**: A new member is added to the cluster.
- **memberRemoved**: An existing member leaves the cluster.
- **memberAttributeChanged**: An attribute of a member is changed. Please refer to the [Member Attributes section](#) to learn about member attributes.

To write a Membership Listener class, you implement the `MembershipListener` interface and its methods.

The following is an example Membership Listener class.

```

public class ClusterMembershipListener
    implements MembershipListener {

    public void memberAdded(MembershipEvent membershipEvent) {
        System.err.println("Added: " + membershipEvent);
    }

    public void memberRemoved(MembershipEvent membershipEvent) {
        System.err.println("Removed: " + membershipEvent);
    }

    public void memberAttributeChanged(MemberAttributeEvent memberAttributeEvent) {
        System.err.println("Member attribute changed: " + memberAttributeEvent);
    }

}

```

When a respective event is fired, the membership listener outputs the addresses of the members that joined and left, and also which attribute changed on which member.

7.1.2 Listening for Distributed Object Events

The Distributed Object Listener methods `distributedObjectCreated` and `distributedObjectDestroyed` are invoked when a distributed object is created and destroyed throughout the cluster. To write a Distributed Object Listener class, you implement the `DistributedObjectListener` interface and its methods.

The following is an example Distributed Object Listener class.

```

public class Sample implements DistributedObjectListener {
    public static void main(String[] args) {
        Sample sample = new Sample();

        Config config = new Config();
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance(config);
        hazelcastInstance.addDistributedObjectListener(sample);

        Collection<DistributedObject> distributedObjects = hazelcastInstance.getDistributedObjects();
        for (DistributedObject distributedObject : distributedObjects) {
            System.out.println(distributedObject.getName() + "," + distributedObject.getId());
        }
    }

    @Override
    public void distributedObjectCreated(DistributedObjectEvent event) {
        DistributedObject instance = event.getDistributedObject();
        System.out.println("Created " + instance.getName() + "," + instance.getId());
    }

    @Override
    public void distributedObjectDestroyed(DistributedObjectEvent event) {
        DistributedObject instance = event.getDistributedObject();
        System.out.println("Destroyed " + instance.getName() + "," + instance.getId());
    }
}

```

When a respective event is fired, the distributed object listener outputs the event type, and the name, service (for example, if a Map service provides the distributed object, then it is a Map object), and ID of the object.

7.1.3 Listening for Migration Events

The Migration Listener interface has methods that are invoked for the following events:

- `migrationStarted`: A partition migration is started.
- `migrationCompleted`: A partition migration is completed.
- `migrationFailed`: A partition migration failed.

To write a Migration Listener class, you implement the `DistributedObjectListener` interface and its methods.

The following is an example Migration Listener class.

```
public class ClusterMigrationListener implements MigrationListener {
    @Override
    public void migrationStarted(MigrationEvent migrationEvent) {
        System.err.println("Started: " + migrationEvent);
    }
    @Override
    public void migrationCompleted(MigrationEvent migrationEvent) {
        System.err.println("Completed: " + migrationEvent);
    }
    @Override
    public void migrationFailed(MigrationEvent migrationEvent) {
        System.err.println("Failed: " + migrationEvent);
    }
}
```

When a respective event is fired, the migration listener outputs the partition ID, status of the migration, the old member and the new member. The following is an example output.

```
Started: MigrationEvent{partitionId=98, oldOwner=Member [127.0.0.1]:5701,
newOwner=Member [127.0.0.1]:5702 this}
```

7.1.4 Listening for Partition Lost Events

Hazelcast provides fault-tolerance by keeping multiple copies of your data. For each partition, one of your cluster members become owner and some of the other members become replica members based on your configuration. Nevertheless, data loss may occur if a few members crash simultaneously.

Let's consider the following example with three members: N1, N2, N3 for a given partition-0. N1 is owner of partition-0, N2 and N3 are the first and second replicas respectively. If N1 and N2 crash simultaneously, partition-0 loses its data that is configured with less than 2 backups. For instance, if we configure a map with 1 backup, that map loses its data in partition-0 since both owner and first replica of partition-0 have crashed. However, if we configure our map with 2 backups, it does not lose any data since a copy of partition-0's data for the given map also resides in N3.

The Partition Lost Listener notifies for possible data loss occurrences with the information of how many replicas are lost for a partition. It listens to `PartitionLostEvent` instances. Partition lost events are dispatched per partition.

Partition loss detection is done after a member crash is detected by the other members and the crashed member is removed from the cluster. Please note that false-positive `PartitionLostEvent` instances may be fired on partial network split errors.

7.1.4.1 Writing a Partial Lost Listener Class

To write a Partial Lost Listener, you implement the `PartitionLostListener` interface and its `partitionLost` method, which is invoked when a partition loses its owner and all backups.

The following is an example of Partition Lost Listener.

```

public class ConsoleLoggingPartitionLostListener implements PartitionLostListener {
    @Override
    public void partitionLost(PartitionLostEvent event) {
        System.out.println(event);
    }
}

```

When a `PartitionLostEvent` is fired, the partition lost listener given above outputs the partition ID, the replica index that is lost and the member that has detected the partition loss. The following is an example output.

```

com.hazelcast.partition.PartitionLostEvent{partitionId=242, lostBackupCount=0,
eventSource=Address[192.168.2.49]:5701}

```

7.1.5 Listening for Lifecycle Events

The Lifecycle Listener notifies for the following events:

- **STARTING:** A member is starting.
- **STARTED:** A member started.
- **SHUTTING_DOWN:** A member is shutting down.
- **SHUTDOWN:** A member's shutdown has completed.
- **MERGING:** A member is merging with the cluster.
- **MERGED:** A member's merge operation has completed.
- **CLIENT_CONNECTED:** A Hazelcast Client connected to the cluster.
- **CLINET_DISCONNECTED:** A Hazelcast Client disconnected from the cluster.

The following is an example Lifecycle Listener class.

```

public class NodeLifecycleListener implements LifecycleListener {
    @Override
    public void stateChanged(LifecycleEvent event) {
        System.err.println(event);
    }
}

```

This listener is local to an individual member (node). It notifies the application that uses Hazelcast about the events mentioned above for a particular member.

7.1.6 Listening for Item Events

The Item Listener is used by the Hazelcast `IQueue`, `ISet` and `IList` interfaces.

To write an Item Listener class, you implement the `ItemListener` interface and its methods `itemAdded` and `itemRemoved`. These methods are invoked when an item is added or removed.

The following is an example Item Listener class.

```

public class Sample implements ItemListener {

    public static void main( String[] args ) {
        Sample sample = new Sample();
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        ISet<Price> set = hazelcastInstance.getSet( "default" );
        set.addItemListener( sample, true );
    }
}

```

```

    Price price = new Price( 10, time1 )
    set.add( price );
    set.remove( price );
}

public void itemAdded( Object item ) {
    System.out.println( "Item added = " + item );
}

public void itemRemoved( Object item ) {
    System.out.println( "Item removed = " + item );
}
}

```

7.1.7 Listening for Topic Messages

The Message Listener is used by the `ITopic` interface. It notifies when a message is received for the registered topic.

To write a Message Listener class, you implement the `MessageListener` interface and its method `onMessage`, which is invoked when a message is received for the registered topic.

The following is an example Message Listener class.

```

public class Sample implements MessageListener<MyEvent> {

    public static void main( String[] args ) {
        Sample sample = new Sample();
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        ITopic topic = hazelcastInstance.getTopic( "default" );
        topic.addMessageListener( sample );
        topic.publish( new MyEvent() );
    }

    public void onMessage( Message<MyEvent> message ) {
        MyEvent myEvent = message.getMessageObject();
        System.out.println( "Message received = " + myEvent.toString() );
        if ( myEvent.isHeavyweight() ) {
            messageExecutor.execute( new Runnable() {
                public void run() {
                    doHeavyweightStuff( myEvent );
                }
            } );
        }
    }
}

```

7.1.8 Listening for Clients

The Client Listener is used by the Hazelcast cluster members. It notifies the cluster members when a client is connected to or disconnected from the cluster.

To write a Client Listener class, you implement the `ClientListener` interface and its methods `clientConnected` and `clientDisconnected`, which are invoked when a client is connected to or disconnected from the cluster.



NOTE: You can also add event listeners to a Hazelcast client. Please refer to [Client Listenerconfig](#) for the related information.

7.2 Event Listeners for Hazelcast Clients

You can add event listeners to a Hazelcast Java client. You can configure the following listeners to listen to the events on the client side. Please see the respective sections under the [Event Listeners for Hazelcast Members section](#) for example code.

- **Lifecycle Listener**: Notifies when the client is starting, started, shutting down, and shutdown.
- **Membership Listener**: Notifies when a member joins to/leaves the cluster to which the client is connected, or when an attribute is changed in a member.
- **DistributedObject Listener**: Notifies when a distributed object is created or destroyed throughout the cluster to which the client is connected.

RELATED INFORMATION

Please refer to the [Client Listenerconfig section](#) for more information.

RELATED INFORMATION

Please refer to the [Listener Configurations section](#) for a configuration wrap-up of event listeners.

7.3 Global Event Configuration

- `hazelcast.event.queue.capacity`: default value is 1000000
- `hazelcast.event.queue.timeout.millis`: default value is 250
- `hazelcast.event.thread.count`: default value is 5

A striped executor in each cluster member controls and dispatches the received events. This striped executor also guarantees the event order. For all events in Hazelcast, the order in which events are generated and the order in which they are published are guaranteed for given keys. For map and multimap, the order is preserved for the operations on the same key of the entry. For list, set, topic and queue, the order is preserved for events on that instance of the distributed data structure.

To achieve the order guarantee, you make only one thread responsible for a particular set of events (entry events of a key in a map, item events of a collection, etc.) in `StripedExecutor` (within `com.hazelcast.util.executor`).

If the event queue reaches its capacity (`hazelcast.event.queue.capacity`) and the last item cannot be put into the event queue for the period specified in `hazelcast.event.queue.timeout.millis`, these events will be dropped with a warning message, such as “EventQueue overloaded”.

If event listeners perform a computation that takes a long time, the event queue can reach its maximum capacity and lose events. For map and multimap, you can configure `hazelcast.event.thread.count` to a higher value so that fewer collisions occur for keys, and therefore worker threads will not block each other in `StripedExecutor`. For list, set, topic and queue, you should offload heavy work to another thread. To preserve order guarantee, you should implement similar logic with `StripedExecutor` in the offloaded thread pool.

RELATED INFORMATION

Please refer to the [Listener Configurations section](#) on how to configure each listener.

Chapter 8

Distributed Computing

From Wikipedia: Distributed computing refers to the use of distributed systems to solve computational problems. In distributed computing, a problem is divided into many tasks, each of which is solved by one or more computers.

8.1 Executor Service

One of the coolest features of Java 1.5 is the Executor framework, which allows you to asynchronously execute your tasks (logical units of work), such as database query, complex calculation, and image rendering.

The default implementation of this framework (`ThreadPoolExecutor`) is designed to run within a single JVM. In distributed systems, this implementation is not desired since you may want a task submitted in one JVM and processed in another one. Hazelcast offers `IExecutorService` for you to use in distributed environments: it implements `java.util.concurrent.ExecutorService` to serve the applications requiring computational and data processing power.

With `IExecutorService`, you can execute tasks asynchronously and perform other useful tasks. If your task execution takes longer than expected, you can cancel the task execution. Tasks should be `Serializable` since they will be distributed.

In the Java Executor framework, you implement tasks two ways: `Callable` or `Runnable`.

- `Callable`: If you need to return a value and submit to Executor, implement the task as `java.util.concurrent.Callable`.
- `Runnable`: If you do not need to return a value, implement the task as `java.util.concurrent.Runnable`.

8.1.1 Implementing a Callable Task

In Hazelcast, when you implement a task as `java.util.concurrent.Callable` (a task that returns a value), you implement `Callable` and `Serializable`.

Below is an example of a `Callable` task. `SumTask` prints out map keys and returns the summed map values.

```
import com.hazelcast.core.HazelcastInstance;
import com.hazelcast.core.HazelcastInstanceAware;
import com.hazelcast.core.IMap;

import java.io.Serializable;
import java.util.concurrent.Callable;

public class SumTask
    implements Callable<Integer>, Serializable, HazelcastInstanceAware {

    private transient HazelcastInstance hazelcastInstance;
```

```

public void setHazelcastInstance( HazelcastInstance hazelcastInstance ) {
    this.hazelcastInstance = hazelcastInstance;
}

public Integer call() throws Exception {
    IMap<String, Integer> map = hazelcastInstance.getMap( "map" );
    int result = 0;
    for ( String key : map.localKeySet() ) {
        System.out.println( "Calculating for key: " + key );
        result += map.get( key );
    }
    System.out.println( "Local Result: " + result );
    return result;
}
}

```

Another example is the Echo callable below. In its call() method, it returns the local member and the input passed in. Remember that instance.getCluster().getLocalMember() returns the local member and toString() returns the member's address (IP + port) in String form, just to see which member actually executed the code for our example. Of course, the call() method can do and return anything you like.

```

import java.util.concurrent.Callable;
import java.io.Serializable;

public class Echo implements Callable<String>, Serializable {
    String input = null;

    public Echo() {
    }

    public Echo(String input) {
        this.input = input;
    }

    public String call() {
        Config cfg = new Config();
        HazelcastInstance instance = Hazelcast.newHazelcastInstance(cfg);
        return instance.getCluster().getLocalMember().toString() + ":" + input;
    }
}

```

8.1.1.1 Executing a Callable Task

To execute a callable task with the executor framework:

- Obtain an `ExecutorService` instance (generally via `Executors`).
- Submit a task which returns a `Future`.
- After executing the task, you do not have to wait for the execution to complete, you can process other things.
- When ready, use the `Future` object to retrieve the result as shown in the code example below.

Below, the Echo task is executed.

```

ExecutorService executorService = Executors.newSingleThreadExecutor();
Future<String> future = executorService.submit( new Echo( "myinput" ) );
//while it is executing, do some useful stuff
//when ready, get the result of your execution
String result = future.get();

```

Please note that the Echo callable in the above code sample also implements a Serializable interface, since it may be sent to another JVM to be processed.



NOTE: When a task is deserialized, `HazelcastInstance` needs to be accessed. To do this, the task should implement `HazelcastInstanceAware` interface. Please see the [HazelcastInstanceAware Interface section](#) for more information.

8.1.2 Implementing a Runnable Task

In Hazelcast, when you implement a task as `java.util.concurrent.runnable` (a task that does not return a value), you implement `Runnable` and `Serializable`.

Below is `Runnable` example code. It is a task that waits for some time and echoes a message.

```
public class EchoTask implements Runnable, Serializable {
    private final String msg;

    public EchoTask( String msg ) {
        this.msg = msg;
    }

    @Override
    public void run() {
        try {
            Thread.sleep( 5000 );
        } catch ( InterruptedException e ) {
        }
        System.out.println( "echo:" + msg );
    }
}
```

8.1.2.1 Executing a Runnable Task

To execute the runnable task:

- Retrieve the Executor from `HazelcastInstance`.
- Submit the tasks to the Executor.

Now let's write a class that submits and executes these echo messages. Executor is retrieved from `HazelcastInstance` and 1000 echo tasks are submitted.

```
public class MasterMember {
    public static void main( String[] args ) throws Exception {
        HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
        IExecutorService executor = hazelcastInstance.getExecutorService( "exec" );
        for ( int k = 1; k <= 1000; k++ ) {
            Thread.sleep( 1000 );
            System.out.println( "Producing echo task: " + k );
            executor.execute( new EchoTask( String.valueOf( k ) ) );
        }
        System.out.println( "EchoTaskMain finished!" );
    }
}
```

8.1.3 Configuring Executor Threads

By default, Executor is configured to have 8 threads in the pool. You can change that with the `pool-size` property in the declarative configuration (`hazelcast.xml`). An example is shown below (using the above Executor).

```
<executor-service name="exec">
  <pool-size>1</pool-size>
</executor-service>
```

RELATED INFORMATION

Please refer to the [Executor Service Configuration section](#) for a full description of Hazelcast Distributed Executor Service configuration.

8.1.4 Scaling The Executor Service

You can scale the Executor service both vertically (scale up) and horizontally (scale out).

To scale up, you should improve the processing capacity of the JVM. You can do this by increasing the `pool-size` property mentioned in [Configuring Executor Threads](#) (i.e., increasing the thread count). However, please be aware of your JVM's capacity. If you think it cannot handle such an additional load caused by increasing the thread count, you may want to consider improving the JVM's resources (CPU, memory, etc.). As an example, set the `pool-size` to 5 and run the above `MasterMember`. You will see that `EchoTask` is run as soon as it is produced.

To scale out, more JVMs should be added instead of increasing only one JVM's capacity. In reality, you may want to expand your cluster by adding more physical or virtual machines. For example, in the `EchoTask` example in the [Runnable section](#), you can create another Hazelcast instance. That instance will automatically get involved in the executions started in `MasterMember` and start processing.

8.1.5 Executing Code in the Cluster

The distributed executor service is a distributed implementation of `java.util.concurrent.ExecutorService`. It allows you to execute your code in the cluster. In this section, the code examples are based on the [Echo class above](#) (please note that the `Echo` class is `Serializable`). The code examples show how Hazelcast can execute your code (`Runnable`, `Callable`):

- `echoOnTheMember`: On a specific cluster member you choose with the `IExecutorService submitToMember` method.
- `echoOnTheMemberOwningTheKey`: On the member owning the key you choose with the `IExecutorService submitToKeyOwner` method.
- `echoOnSomewhere`: On the member Hazelcast picks with the `IExecutorService submit` method.
- `echoOnMembers`: On all or a subset of the cluster members with the `IExecutorService submitToMembers` method.

```
import com.hazelcast.core.Member;
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.IExecutorService;
import java.util.concurrent.Callable;
import java.util.concurrent.Future;
import java.util.Set;

public void echoOnTheMember( String input, Member member ) throws Exception {
    Callable<String> task = new Echo( input );
    HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
    IExecutorService executorService =
        hazelcastInstance.getExecutorService( "default" );
```

```

Future<String> future = executorService.submitToMember( task, member );
String echoResult = future.get();
}

public void echoOnTheMemberOwningTheKey( String input, Object key ) throws Exception {
    Callable<String> task = new Echo( input );
    HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
    IExecutorService executorService =
        hazelcastInstance.getExecutorService( "default" );

    Future<String> future = executorService.submitToKeyOwner( task, key );
    String echoResult = future.get();
}

public void echoOnSomewhere( String input ) throws Exception {
    HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
    IExecutorService executorService =
        hazelcastInstance.getExecutorService( "default" );

    Future<String> future = executorService.submit( new Echo( input ) );
    String echoResult = future.get();
}

public void echoOnMembers( String input, Set<Member> members ) throws Exception {
    HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
    IExecutorService executorService =
        hazelcastInstance.getExecutorService( "default" );

    Map<Member, Future<String>> futures = executorService
        .submitToMembers( new Echo( input ), members );

    for ( Future<String> future : futures.values() ) {
        String echoResult = future.get();
        // ...
    }
}

```



NOTE: You can obtain the set of cluster members via `HazelcastInstance#getCluster().getMembers()` call.

8.1.6 Canceling an Executing Task

A task in the code that you execute in a cluster might take longer than expected. If you cannot stop/cancel that task, it will keep eating your resources.

To cancel a task, you can use the standard Java executor framework's `cancel()` API. This framework encourages us to code and design for cancellations, a highly ignored part of software development.

8.1.6.1 Example Task to Cancel

The Fibonacci callable class below calculates the Fibonacci number for a given number. In the `calculate` method, we check if the current thread is interrupted so that the code can respond to cancellations once the execution is started.

```

public class Fibonacci<Long> implements Callable<Long>, Serializable {
    int input = 0;

```

```

public Fibonacci() {
}

public Fibonacci( int input ) {
    this.input = input;
}

public Long call() {
    return calculate( input );
}

private long calculate( int n ) {
    if ( Thread.currentThread().isInterrupted() ) {
        return 0;
    }
    if ( n <= 1 ) {
        return n;
    } else {
        return calculate( n - 1 ) + calculate( n - 2 );
    }
}
}

```

8.1.6.2 Example Method to Execute and Cancel the Task

The `fib()` method below submits the Fibonacci calculation task above for number ‘n’ and waits a maximum of 3 seconds for the result. If the execution does not completed in 3 seconds, `future.get()` will throw a `TimeoutException` and upon catching it, we cancel the execution, saving some CPU cycles.

```

long fib( int n ) throws Exception {
    HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
    IExecutorService es = hazelcastInstance.getExecutorService();
    Future future = es.submit( new Fibonacci( n ) );
    try {
        return future.get( 3, TimeUnit.SECONDS );
    } catch ( TimeoutException e ) {
        future.cancel( true );
    }
    return -1;
}

```

`fib(20)` will probably take less than 3 seconds. However, `fib(50)` will take much longer. (This is not an example for writing better Fibonacci calculation code, but for showing how to cancel a running execution that takes too long.) The method `future.cancel(false)` can only cancel execution before it is running (executing), but `future.cancel(true)` can interrupt running executions if your code is able to handle the interruption. If you are willing to cancel an already running task, then your task should be designed to handle interruptions. If the `calculate (int n)` method did not have the `(Thread.currentThread().isInterrupted())` line, then you would not be able to cancel the execution after it is started.

8.1.7 Callback When Task Completes

You can use the `ExecutionCallback` offered by Hazelcast to asynchronously be notified when the execution is done.

- To be notified when your task completes without an error, implement the `onResponse` method.
- To be notified when your task completes with an error, implement the `onFailure` method.

8.1.7.1 Example Task to Callback

Let's use the Fibonacci series to explain this. The example code below is the calculation that will be executed. Note that it is Callable and Serializable.

```
public class Fibonacci<Long> implements Callable<Long>, Serializable {
    int input = 0;

    public Fibonacci() {
    }

    public Fibonacci( int input ) {
        this.input = input;
    }

    public Long call() {
        return calculate( input );
    }

    private long calculate( int n ) {
        if (n <= 1) {
            return n;
        } else {
            return calculate( n - 1 ) + calculate( n - 2 );
        }
    }
}
```

8.1.7.2 Example Method to Callback the Task

The example code below submits the Fibonacci calculation to `ExecutionCallback` and prints the result asynchronously. `ExecutionCallback` has the methods `onResponse` and `onFailure`. In this example code, `onResponse` is called upon a valid response and prints the calculation result, whereas `onFailure` is called upon a failure and prints the stacktrace.

```
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.ExecutionCallback;
import com.hazelcast.core.IExecutorService;
import java.util.concurrent.Future;

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
IExecutorService es = hazelcastInstance.getExecutorService();
Callable<Long> task = new Fibonacci( 10 );

es.submit(task, new ExecutionCallback<Long> () {

    @Override
    public void onResponse( Long response ) {
        System.out.println( "Fibonacci calculation result = " + response );
    }

    @Override
    public void onFailure( Throwable t ) {
        t.printStackTrace();
    }
});
```

8.1.8 Selecting Members for Task Execution

As previously mentioned, it is possible to indicate where in the Hazelcast cluster the `Runnable` or `Callable` is executed. Usually, you will execute these in the cluster based on the location of a key, set of keys, or you will just allow Hazelcast to select a member.

If you want more control over where your code runs, use the `MemberSelector` interface. For example, you may want certain tasks to run only on certain members, or you may wish to implement some form of custom load balancing regime. The `MemberSelector` is an interface that you can implement and then provide to the `IExecutorService` when you submit or execute.

The `select(Member)` method is called for every available member in the cluster. Implement this method to decide if the member is going to be used or not.

In a simple example shown below, we select the cluster members based on the presence of an attribute.

```
public class MyMemberSelector implements MemberSelector {
    public boolean select(Member member) {
        return Boolean.TRUE.equals(member.getAttribute("my.special.executor"));
    }
}
```

8.2 Entry Processor

Hazelcast supports entry processing. An entry processor is a function that executes your code on a map entry in an atomic way.

An entry processor is a good option if you perform bulk processing on an `IMap`. Usually, you perform a loop of keys: executing `IMap.get(key)`, mutating the value, and finally putting the entry back in the map using `IMap.put(key, value)`. If you perform this process from a client or from a member where the keys do not exist, you effectively perform 2 network hops for each update: the first to retrieve the data and the second to update the mutated value.

If you are doing the above, you should consider using entry processors. An entry processor executes a read and updates upon the member where the data resides. This eliminates the costly network hops described previously.

8.2.1 Performing Fast In-Memory Map Operations

An entry processor enables fast in-memory operations on your map without you having to worry about locks or concurrency issues. It can be applied to a single map entry or to all map entries. It supports choosing target entries using predicates. You do not need any explicit lock on entry: Hazelcast locks the entry, runs the `EntryProcessor`, and then unlocks the entry.

Hazelcast sends the entry processor to each cluster member and these members apply it to map entries. Therefore, if you add more members, your processing is completed faster.

8.2.1.1 Using OBJECT In-Memory Format

If entry processing is the major operation for a map and if the map consists of complex objects, you should use `OBJECT` as the `in-memory-format` to minimize serialization cost. By default, the entry value is stored as a byte array (`BINARY` format). When it is stored as an object (`OBJECT` format), then the entry processor is applied directly on the object. In that case, no serialization or deserialization is performed. But if there is a defined event listener, a new entry value will be serialized when passing to the event publisher service.



NOTE: When `in-memory-format` is `OBJECT`, old value of the updated entry will be null.

8.2.1.2 Entry Processing with IMap Methods

The methods below are in the IMap interface for entry processing.

- `executeOnKey` processes an entry mapped by a key.
- `executeOnKeys` processes entries mapped by a collection of keys.
- `submitToKey` processes an entry mapped by a key while listening to event status.
- `executeOnEntries` processes all entries in a map.
- `executeOnEntries` can also process all entries in a map with a defined predicate.

```
/**
 * Applies the user defined EntryProcessor to the entry mapped by the key.
 * Returns the object which is the result of the process() method of EntryProcessor.
 */
Object executeOnKey( K key, EntryProcessor entryProcessor );

/**
 * Applies the user defined EntryProcessor to the entries mapped by the collection of keys.
 * Returns the results mapped by each key in the collection.
 */
Map<K, Object> executeOnKeys( Set<K> keys, EntryProcessor entryProcessor );

/**
 * Applies the user defined EntryProcessor to the entry mapped by the key with
 * specified ExecutionCallback to listen to event status and return immediately.
 */
void submitToKey( K key, EntryProcessor entryProcessor, ExecutionCallback callback );

/**
 * Applies the user defined EntryProcessor to all entries in the map.
 * Returns the results mapped by each key in the map.
 */
Map<K, Object> executeOnEntries( EntryProcessor entryProcessor );

/**
 * Applies the user defined EntryProcessor to the entries in the map which satisfies
 * provided predicate.
 * Returns the results mapped by each key in the map.
 */
Map<K, Object> executeOnEntries( EntryProcessor entryProcessor, Predicate predicate );
```

8.2.1.3 Entry Processing with EntryProcessor

The following is the EntryProcessor interface:

```
public interface EntryProcessor<K, V> extends Serializable {
    Object process( Map.Entry<K, V> entry );

    EntryBackupProcessor<K, V> getBackupProcessor();
}
```



NOTE: If you want to execute a task on a single key, you can also use `executeOnKeyOwner` provided by `Executor Service`. But, in this case, you need to perform a lock and serialization.

When using `executeOnEntries` method, if the number of entries is high and you do need the results, then returning null in `process()` method is a good practice. By this way, results of the processing is not stored in the map and hence out of memory errors are eliminated.

8.2.1.4 Processing Backup Entries

If your code modifies the data, then you should also provide a processor for backup entries. This is required to prevent the primary map entries from having different values than the backups; it causes the entry processor to be applied both on the primary and backup entries.

```
public interface EntryBackupProcessor<K, V> extends Serializable {
    void processBackup( Map.Entry<K, V> entry );
}
```



NOTE: You should explicitly call `setValue` method of `Map.Entry` when modifying data in Entry Processor. Otherwise, Entry Processor will be accepted as read-only.



NOTE: An `EntryProcessor` instance is not thread safe. If you are storing partition specific state between invocations be sure to register this in a thread-local. A `EntryProcessor` instance can be used by multiple partition threads.



NOTE: `EntryProcessors` run via Operation Threads that are dedicated to specific partitions. Therefore with long running `EntryProcessor` executions other partition operations cannot be processed, such as a `'map.put(key)'`. With this in mind it is good practice to make your `EntryProcessor` executions as quick as possible

8.2.2 Creating an Entry Processor

The `EntryProcessorTest` class has the following methods.

- `testMapEntryProcessor` puts one map entry and calls `executeOnKey` to process that map entry.
- `testMapEntryProcessor` puts all the entries in a map and calls `executeOnEntries` to process all the entries.

The static class `IncrementingEntryProcessor` creates an entry processor to process the map entries in the `EntryProcessorTest` class. It creates the entry processor class by:

- implementing the map interfaces `EntryProcessor` and `EntryBackupProcessor`.
- implementing the `Java.io.Serializable` interface.
- implementing the `EntryProcessor` methods `process` and `getBackupProcessor`.
- implementing the `EntryBackupProcessor` method `processBackup`.

```
public class EntryProcessorTest {

    @Test
    public void testMapEntryProcessor() throws InterruptedException {
        Config config = new Config().getMapConfig( "default" )
            .setInMemoryFormat( MapConfig.InMemoryFormat.OBJECT );

        HazelcastInstance hazelcastInstance1 = Hazelcast.newHazelcastInstance( config );
        HazelcastInstance hazelcastInstance2 = Hazelcast.newHazelcastInstance( config );
        IMap<Integer, Integer> map = hazelcastInstance1.getMap( "mapEntryProcessor" );
        map.put( 1, 1 );
        EntryProcessor entryProcessor = new IncrementingEntryProcessor();
```

```

    map.executeOnKey( 1, entryProcessor );
    assertEquals( map.get( 1 ), (Object) 2 );
    hazelcastInstance1.getLifecycleService().shutdown();
    hazelcastInstance2.getLifecycleService().shutdown();
}

@Test
public void testMapEntryProcessorAllKeys() throws InterruptedException {
    StaticNodeFactory factory = new StaticNodeFactory( 2 );
    Config config = new Config().getMapConfig( "default" )
        .setInMemoryFormat( MapConfig.InMemoryFormat.OBJECT );

    HazelcastInstance hazelcastInstance1 = factory.newHazelcastInstance( config );
    HazelcastInstance hazelcastInstance2 = factory.newHazelcastInstance( config );
    IMap<Integer, Integer> map = hazelcastInstance1
        .getMap( "mapEntryProcessorAllKeys" );

    int size = 100;
    for ( int i = 0; i < size; i++ ) {
        map.put( i, i );
    }
    EntryProcessor entryProcessor = new IncrementingEntryProcessor();
    Map<Integer, Object> res = map.executeOnEntries( entryProcessor );
    for ( int i = 0; i < size; i++ ) {
        assertEquals( map.get( i ), (Object) (i + 1) );
    }
    for ( int i = 0; i < size; i++ ) {
        assertEquals( map.get( i ) + 1, res.get( i ) );
    }
    hazelcastInstance1.getLifecycleService().shutdown();
    hazelcastInstance2.getLifecycleService().shutdown();
}

static class IncrementingEntryProcessor
    implements EntryProcessor, EntryBackupProcessor, Serializable {

    public Object process( Map.Entry entry ) {
        Integer value = (Integer) entry.getValue();
        entry.setValue( value + 1 );
        return value + 1;
    }

    public EntryBackupProcessor getBackupProcessor() {
        return IncrementingEntryProcessor.this;
    }

    public void processBackup( Map.Entry entry ) {
        entry.setValue( (Integer) entry.getValue() + 1 );
    }
}

```

8.2.3 Abstract Entry Processor

You can use the `AbstractEntryProcessor` when the same processing will be performed both on the primary and backup map entries (i.e. the same logic applies to them). If you use `EntryProcessor`, you need to apply the same logic to the backup entries separately. The `AbstractEntryProcessor` class makes this primary/backup processing

easier.

The code below is the Hazelcast `AbstractEntryProcessor` class. You use this to create your `AbstractEntryProcessor` class.

```
public abstract class AbstractEntryProcessor <K, V>
    implements EntryProcessor <K, V> {

    private final EntryBackupProcessor <K,V> entryBackupProcessor;
    public AbstractEntryProcessor() {
        this(true);
    }

    public AbstractEntryProcessor(boolean applyOnBackup) {
        if ( applyOnBackup ) {
            entryBackupProcessor = new EntryBackupProcessorImpl();
        } else {
            entryBackupProcessor = null;
        }
    }

    @Override
    public abstract Object process(Map.Entry<K, V> entry);

    @Override
    public final EntryBackupProcessor <K, V> getBackupProcessor() {
        return entryBackupProcessor;
    }

    private class EntryBackupProcessorImpl implements EntryBackupProcessor <K,V>{
        @Override
        public void processBackup(Map.Entry<K, V> entry) {
            process(entry);
        }
    }
}
```

In the above example, the method `getBackupProcessor` returns an `EntryBackupProcessor` instance. This means the same processing will be applied to both the primary and backup entries. If you want to apply the processing only upon the primary entries, then make the `getBackupProcessor` method return null.

Chapter 9

Distributed Query

Distributed queries access data from multiple data sources stored on either the same or different computers.

Hazelcast partitions your data and spreads it across cluster of servers. You can iterate over the map entries and look for certain entries (specified by predicates) you are interested in. However, this is not very efficient because you will have to bring the entire entry set and iterate locally. Instead, Hazelcast allows you to run distributed queries on your distributed map.

9.1 How Distributed Query Works

1. The requested predicate is sent to each member in the cluster.
2. Each member looks at its own local entries and filters them according to the predicate. At this stage, key/value pairs of the entries are deserialized and then passed to the predicate.
3. The predicate requester merges all the results coming from each member into a single set.

If you add new members to the cluster, the partition count for each member is reduced and hence the time spent by each member on iterating its entries is reduced. Therefore, the above querying approach is highly scalable. Another reason it is highly scalable is the pool of partition threads that evaluates the entries concurrently in each member. The network traffic is also reduced since only filtered data is sent to the requester.

Hazelcast offers the following APIs for distributed query purposes:

- Criteria API
- Distributed SQL Query

9.1.1 Employee Map Query Example

Assume that you have an “employee” map containing values of `Employee` objects, as coded below.

```
import java.io.Serializable;

public class Employee implements Serializable {
    private String name;
    private int age;
    private boolean active;
    private double salary;

    public Employee(String name, int age, boolean live, double price) {
        this.name = name;
        this.age = age;
        this.active = live;
    }
}
```

```

        this.salary = price;
    }

    public Employee() {
    }

    public String getName() {
        return name;
    }

    public int getAge() {
        return age;
    }

    public double getSalary() {
        return salary;
    }

    public boolean isActive() {
        return active;
    }
}

```

Now, let's look for the employees who are active and have an age less than 30 using the aforementioned APIs (Criteria API and Distributed SQL Query). The following subsections describe each query mechanism for this example.



NOTE: When using Portable objects, if one field of an object exists on one node but does not exist on another one, Hazelcast does not throw an unknown field exception. Instead, Hazelcast treats that predicate, which tries to perform a query on an unknown field, as an always false predicate.

9.1.2 Querying with Criteria API

Criteria API is a programming interface offered by Hazelcast that is similar to the Java Persistence Query Language (JPQL). Below is the code for the [above example query](#).

```

import com.hazelcast.core.IMap;
import com.hazelcast.query.Predicate;
import com.hazelcast.query.PredicateBuilder;
import com.hazelcast.query.EntryObject;
import com.hazelcast.config.Config;

IMap<String, Employee> map = hazelcastInstance.getMap( "employee" );

EntryObject e = new PredicateBuilder().getEntryObject();
Predicate predicate = e.is( "active" ).and( e.get( "age" ).lessThan( 30 ) );

Set<Employee> employees = map.values( predicate );

```

In the above example code, `predicate` verifies whether the entry is active and its `age` value is less than 30. This `predicate` is applied to the `employee` map using the `map.values(predicate)` method. This method sends the predicate to all cluster members and merges the results coming from them. Since the predicate is communicated between the members, it needs to be serializable.



NOTE: Predicates can also be applied to `keySet`, `entrySet` and `localKeySet` of Hazelcast distributed map.

9.1.2.1 Predicates Class Operators

The `Predicates` class offered by Hazelcast includes many operators for your query requirements. Some of them are explained below.

- `equal`: Checks if the result of an expression is equal to a given value.
- `notEqual`: Checks if the result of an expression is not equal to a given value.
- `instanceOf`: Checks if the result of an expression has a certain type.
- `like`: Checks if the result of an expression matches some string pattern. `%` (percentage sign) is placeholder for many characters, `(underscore)` is placeholder for only one character.
- `greaterThan`: Checks if the result of an expression is greater than a certain value.
- `greaterEqual`: Checks if the result of an expression is greater than or equal to a certain value.
- `lessThan`: Checks if the result of an expression is less than a certain value.
- `lessEqual`: Checks if the result of an expression is less than or equal to a certain value.
- `between`: Checks if the result of an expression is between 2 values (this is inclusive).
- `in`: Checks if the result of an expression is an element of a certain collection.
- `isNot`: Checks if the result of an expression is false.
- `regex`: Checks if the result of an expression matches some regular expression.

RELATED INFORMATION

Please see the `Predicates` class for all predicates provided.

9.1.2.2 Joining Predicates with AND, OR, NOT

You can join predicates using the `and`, `or` and `not` operators, as shown in the below examples.

```
public Set<Person> getWithNameAndAge( String name, int age ) {
    Predicate namePredicate = Predicates.equal( "name", name );
    Predicate agePredicate = Predicates.equal( "age", age );
    Predicate predicate = Predicates.and( namePredicate, agePredicate );
    return personMap.values( predicate );
}

public Set<Person> getWithNameOrAge( String name, int age ) {
    Predicate namePredicate = Predicates.equal( "name", name );
    Predicate agePredicate = Predicates.equal( "age", age );
    Predicate predicate = Predicates.or( namePredicate, agePredicate );
    return personMap.values( predicate );
}

public Set<Person> getNotWithName( String name ) {
    Predicate namePredicate = Predicates.equal( "name", name );
    Predicate predicate = Predicates.not( namePredicate );
    return personMap.values( predicate );
}
```

9.1.2.3 Simplifying with PredicateBuilder

You can simplify predicate usage with the `PredicateBuilder` class, which offers simpler predicate building. Please see the below example code which selects all people with a certain name and age.

```
public Set<Person> getWithNameAndAgeSimplified( String name, int age ) {
    EntryObject e = new PredicateBuilder().getEntryObject();
    Predicate agePredicate = e.get( "age" ).equal( age );
    Predicate predicate = e.get( "name" ).equal( name ).and( agePredicate );
    return personMap.values( predicate );
}
```

9.1.3 Querying with SQL

`com.hazelcast.query.SqlPredicate` takes the regular SQL `where` clause. Here is an example:

```
IMap<Employee> map = hazelcastInstance.getMap( "employee" );
Set<Employee> employees = map.values( new SqlPredicate( "active AND age < 30" ) );
```

9.1.3.1 Supported SQL Syntax

AND/OR: `<expression> AND <expression> AND <expression>...`

- `active AND age>30`
- `active=false OR age = 45 OR name = 'Joe'`
- `active AND (age > 20 OR salary < 60000)`

Equality: `=, !=, <, <=, >, >=`

- `<expression> = value`
- `age <= 30`
- `name = "Joe"`
- `salary != 50000`

BETWEEN: `<attribute> [NOT] BETWEEN <value1> AND <value2>`

- `age BETWEEN 20 AND 33 (same as age >= 20 AND age <= 33)`
- `age NOT BETWEEN 30 AND 40 (same as age < 30 OR age > 40)`

LIKE: `<attribute> [NOT] LIKE 'expression'`

The `%` (percentage sign) is placeholder for multiple characters, an `_` (underscore) is placeholder for only one character.

- `name LIKE 'Jo%'` (true for 'Joe', 'Josh', 'Joseph' etc.)
- `name LIKE 'Jo_'` (true for 'Joe'; false for 'Josh')
- `name NOT LIKE 'Jo_'` (true for 'Josh'; false for 'Joe')
- `name LIKE 'J_s%'` (true for 'Josh', 'Joseph'; false 'John', 'Joe')

IN: `<attribute> [NOT] IN (val1, val2,...)`

- `age IN (20, 30, 40)`
- `age NOT IN (60, 70)`
- `active AND (salary >= 50000 OR (age NOT BETWEEN 20 AND 30))`
- `age IN (20, 30, 40) AND salary BETWEEN (50000, 80000)`

9.1.4 Filtering with Paging Predicates

Hazelcast provides paging for defined predicates. With its `PagingPredicate` class, you can get a collection of keys, values, or entries page by page by filtering them with predicates and giving the size of the pages. Also, you can sort the entries by specifying comparators.

In the example code below:

- The `greaterEqual` predicate gets values from the “students” map. This predicate has a filter to retrieve the objects with a “age” greater than or equal to 18.

- Then a `PagingPredicate` is constructed in which the page size is 5, so there will be 5 objects in each page. The first time the values are called creates the first page.
- It gets subsequent pages with the `nextPage()` method of `PagingPredicate` and querying the map again with the updated `PagingPredicate`.

```
IMap<Integer, Student> map = hazelcastInstance.getMap( "students" );
Predicate greaterEqual = Predicates.greaterEqual( "age", 18 );
PagingPredicate pagingPredicate = new PagingPredicate( greaterEqual, 5 );
// Retrieve the first page
Collection<Student> values = map.values( pagingPredicate );
...
// Set up next page
pagingPredicate.nextPage();
// Retrieve next page
values = map.values( pagingPredicate );
...
```

If a comparator is not specified for `PagingPredicate`, but you want to get a collection of keys or values page by page, this collection must be an instance of `Comparable` (i.e. it must implement `java.lang.Comparable`). Otherwise, the `java.lang.IllegalArgumentException` exception is thrown.

Paging Predicate, also known as Order & Limit, is not supported in Transactional Context.



NOTE: *Currently, random page accessing is not supported.*

RELATED INFORMATION

Please see the `Predicates` class for all predicates provided.

9.1.5 Indexing Queries

Hazelcast distributed queries will run on each member in parallel and will return only the results to the caller. Then, on the caller side, the results will be merged.

When a query runs on a member, Hazelcast will iterate through the entire owned entries and find the matching ones. This can be made faster by indexing the mostly queried fields, just like you would do for your database. Indexing will add overhead for each `write` operation but queries will be a lot faster. If you query your map a lot, make sure to add indexes for the most frequently queried fields. For example, if you do an `active and age < 30` query, make sure you add an index for the `active` and `age` fields. The following example code does that by:

- getting the map from the Hazelcast instance, and
- adding indexes to the map with the `IMap addIndex` method.

```
IMap map = hazelcastInstance.getMap( "employees" );
// ordered, since we have ranged queries for this field
map.addIndex( "age", true );
// not ordered, because boolean field cannot have range
map.addIndex( "active", false );
```

9.1.5.1 Indexing Ranged Queries

`IMap.addIndex(fieldName, ordered)` is used for adding index. For each indexed field, if you have ranged queries such as `age>30`, `age BETWEEN 40 AND 60`, then you should set the `ordered` parameter to `true`. Otherwise, set it to `false`.

9.1.5.2 Configuring IMap Indexes

Also, you can define IMap indexes in configuration. An example is shown below.

```
<map name="default">
  ...
  <indexes>
    <index ordered="false">name</index>
    <index ordered="true">age</index>
  </indexes>
</map>
```

You can also define IMap indexes using programmatic configuration, as in the example below.

```
mapConfig.addMapIndexConfig( new MapIndexConfig( "name", false ) );
mapConfig.addMapIndexConfig( new MapIndexConfig( "age", true ) );
```

The following is the Spring declarative configuration for the same sample.

```
<hz:map name="default">
  <hz:indexes>
    <hz:index attribute="name"/>
    <hz:index attribute="age" ordered="true"/>
  </hz:indexes>
</hz:map>
```



NOTE: Non-primitive types to be indexed should implement Comparable.

9.1.6 Configuring Query Thread Pool

You can change the size of the thread pool dedicated to query operations using the `pool-size` property. Below is an example of that declarative configuration.

```
<executor-service name="hz:query">
  <pool-size>100</pool-size>
</executor-service>
```

Below is an example of the equivalent programmatic configuration.

```
Config cfg = new Config();
cfg.getExecutorConfig("hz:query").setPoolSize(100);
```

9.2 MapReduce

You have likely heard about MapReduce ever since Google released its research white paper on this concept. With Hadoop as the most common and well known implementation, MapReduce gained a broad audience and made it into all kinds of business applications dominated by data warehouses.

MapReduce is a software framework for processing large amounts of data in a distributed way. Therefore, the processing is normally spread over several machines. The basic idea behind MapReduce is to map your source data into a collection of key-value pairs and reducing those pairs, grouped by key, in a second step towards the final result.

The main idea can be summarized with the following steps.

1. Read the source data.
2. Map the data to one or multiple key-value pairs.
3. Reduce all pairs with the same key.

Use Cases

The best known examples for MapReduce algorithms are text processing tools, such as counting the word frequency in large texts or websites. Apart from that, there are more interesting examples of use cases listed below.

- Log Analysis
- Data Querying
- Aggregation and summing
- Distributed Sort
- ETL (Extract Transform Load)
- Credit and Risk management
- Fraud detection
- and more.

9.2.1 Understanding MapReduce

This section will give a deeper insight on the MapReduce pattern and helps you understand the semantics behind the different MapReduce phases and how they are implemented in Hazelcast.

In addition to this, the following sections compare Hadoop and Hazelcast MapReduce implementations to help adopters with Hadoop backgrounds to quickly get familiar with Hazelcast MapReduce.

9.2.1.1 MapReduce Workflow Example

The flowchart below demonstrates the basic workflow of the word count example (distributed occurrences analysis) mentioned in the [MapReduce section](#). From left to right, it iterates over all the entries of a data structure (in this case an IMap). In the mapping phase, it splits the sentence into single words and emits a key-value pair per word: the word is the key, 1 is the value. In the next phase, values are collected (grouped) and transported to their corresponding reducers, where they are eventually reduced to a single key-value pair, the value being the number of occurrences of the word. At the last step, the different reducer results are grouped up to the final result and returned to the requester.

In pseudo code, the corresponding map and reduce function would look like the following. A Hazelcast code example will be shown in the next section.

```
map( key:String, document:String ):Void ->
  for each w:word in document:
    emit( w, 1 )

reduce( word:String, counts:List[Int] ):Int ->
  return sum( counts )
```

9.2.1.2 MapReduce Phases

As seen in the workflow example, a MapReduce process consists of multiple phases. The original MapReduce pattern describes two phases (map, reduce) and one optional phase (combine). In Hazelcast, these phases are either only existing virtually to explain the data flow or are executed in parallel during the real operation while the general idea is still persisting.

$(K \times V)^* \rightarrow (L \times W)^*$

$[(k1, v1), \dots, (kn, vn)] \rightarrow [(l1, w1), \dots, (lm, wm)]$

Mapping Phase

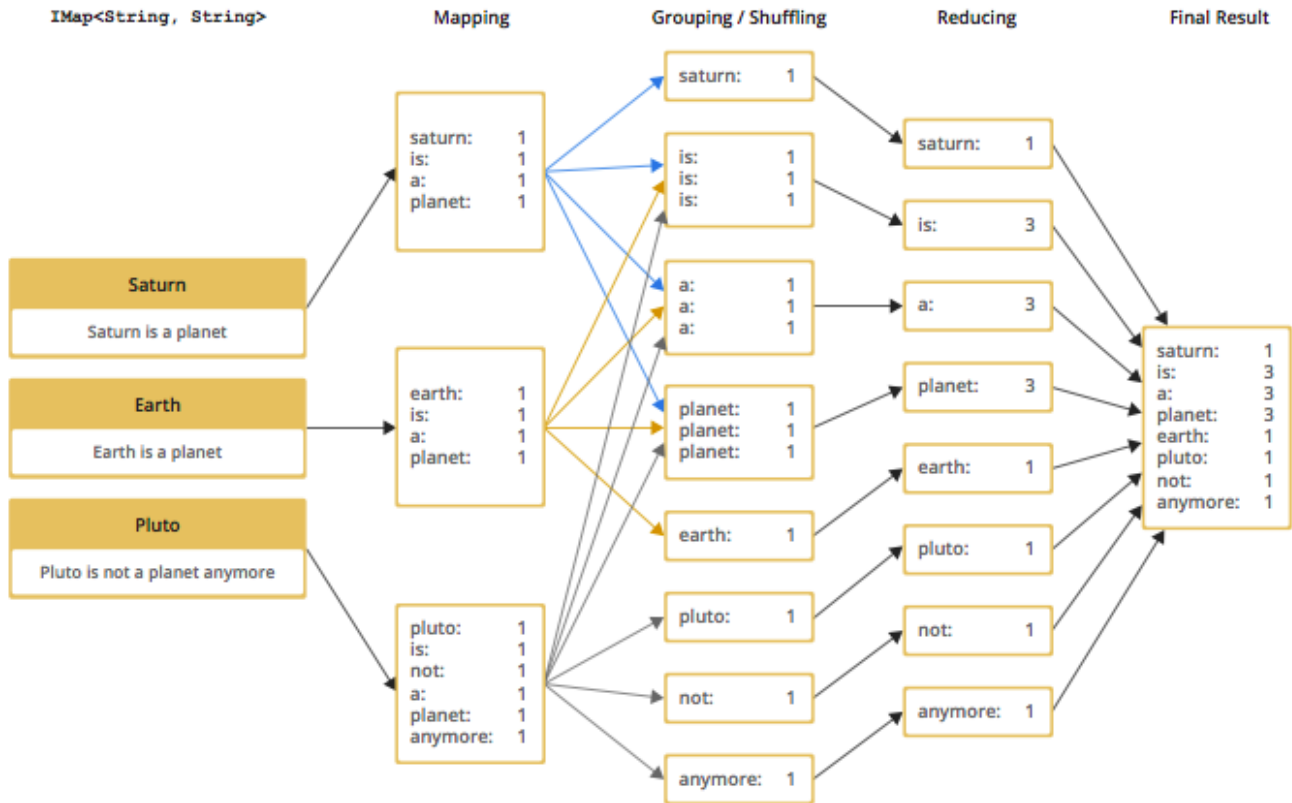


Figure 9.1:

The mapping phase iterates all key-value pairs of any kind of legal input source. The mapper then analyzes the input pairs and emits zero or more new key-value pairs.

$K \times V \rightarrow (L \times W)^*$

$(k, v) \rightarrow [(l_1, w_1), \dots, (l_n, w_n)]$

Combine Phase

In the combine phase, multiple key-value pairs with the same key are collected and combined to an intermediate result before being sent to the reducers. **Combine phase is also optional in Hazelcast, but is highly recommended to lower the traffic.**

In terms of the word count example, this can be explained using the sentences “Saturn is a planet but the Earth is a planet, too”. As shown above, we would send two key-value pairs (planet, 1). The registered combiner now collects those two pairs and combines them into an intermediate result of (planet, 2). Instead of two key-value pairs sent through the wire, there is now only one for the key “planet”.

The pseudo code for a combiner is similar to the reducer.

```
combine( word:String, counts:List[Int] ):Void ->
    emit( word, sum( counts ) )
```

Grouping / Shuffling Phase

The grouping or shuffling phase only exists virtually in Hazelcast since it is not a real phase; emitted key-value pairs with the same key are always transferred to the same reducer in the same job. They are grouped together, which is equivalent to the shuffling phase.

Reducing Phase

In the reducing phase, the collected intermediate key-value pairs are reduced by their keys to build the final by-key result. This value can be a sum of all the emitted values of the same key, an average value, or something completely different, depending on the use case.

Here is a reduced representation of this phase.

$L \times W^* \rightarrow X^*$

$(l, [w_1, \dots, w_n]) \rightarrow [x_1, \dots, x_n]$

Producing the Final Result

This is not a real MapReduce phase, but it is the final step in Hazelcast after all reducers are notified that reducing has finished. The original job initiator then requests all reduced results and builds the final result.

9.2.1.3 Additional MapReduce Resources

The Internet is full of useful resources to find deeper information on MapReduce. Below is a short collection of more introduction material. In addition, there are books written about all kinds of MapReduce patterns and how to write a MapReduce function for your use case. To name them all is out of scope of this documentation.

- <http://research.google.com/archive/mapreduce.html>
- <http://en.wikipedia.org/wiki/MapReduce>
- http://hci.stanford.edu/courses/cs448g/a2/files/map_reduce_tutorial.pdf
- <http://ksat.me/map-reduce-a-really-simple-introduction-kloudo/>
- <http://www.slideshare.net/franbandov/an-introduction-to-mapreduce-6789635>

9.2.2 Using the MapReduce API

This section explains the basics of the Hazelcast MapReduce framework. While walking through the different API classes, we will build the **word count example that was discussed earlier** and create it step by step.

The Hazelcast API for MapReduce operations consists of a fluent DSL-like configuration syntax to build and submit jobs. **JobTracker** is the basic entry point to all MapReduce operations and is retrieved from `com.hazelcast.core.HazelcastInstance` by calling `getJobTracker` and supplying the name of the required **JobTracker** configuration. The configuration for **JobTrackers** will be discussed later, for now we focus on the API itself. In addition, the complete submission part of the API is built to support a fully reactive way of programming.

To give an easy introduction to people used to Hadoop, we created the class names to be as familiar as possible to their counterparts on Hadoop. That means while most users will recognize a lot of similar sounding classes, the way to configure the jobs is more fluent due to the DSL-like styled API.

While building the example, we will go through as many options as possible, e.g. we create a specialized **JobTracker** configuration (at the end). Special **JobTracker** configuration is not required, because for all other Hazelcast features you can use “default” as the configuration name. However, special configurations offer better options to predict behavior of the framework execution.

The full example is available here as a ready to run Maven project.

9.2.2.1 Retrieving a JobTracker Instance

JobTracker creates Job instances, whereas every instance of `com.hazelcast.mapreduce.Job` defines a single MapReduce configuration. The same Job can be submitted multiple times, no matter if it is executed in parallel or after the previous execution is finished.



NOTE: After retrieving the **JobTracker**, be aware that it should only be used with data structures derived from the same **HazelcastInstance**. Otherwise, you can get unexpected behavior.

To retrieve a **JobTracker** from Hazelcast, we will start by using the “default” configuration for convenience reasons to show the basic way.

```
import com.hazelcast.mapreduce.*;

JobTracker jobTracker = hazelcastInstance.getJobTracker( "default" );
```

`JobTracker` is retrieved using the same kind of entry point as most other Hazelcast features. After building the cluster connection, you use the created `HazelcastInstance` to request the configured (or default) `JobTracker` from Hazelcast.

The next step will be to create a new `Job` and configure it to execute our first MapReduce request against cluster data.

9.2.2.2 Creating a Job

As mentioned in Retrieving a `JobTracker` Instance, you create a `Job` using the retrieved `JobTracker` instance. A `Job` defines exactly one configuration of a MapReduce task. Mapper, combiner and reducers will be defined per job. However, since the `Job` instance is only a configuration, it can be submitted multiple times, no matter if executions happen in parallel or one after the other.

A submitted job is always identified using a unique combination of the `JobTracker`'s name and a `jobId` generated on submit-time. The way to retrieve the `jobId` will be shown in one of the later sections.

To create a `Job`, a second class `com.hazelcast.mapreduce.KeyValueSource` is necessary. We will have a deeper look at the `KeyValueSource` class in the next section. `KeyValueSource` is used to wrap any kind of data or data structure into a well defined set of key-value pairs.

The example code below is a direct follow up of the example in Retrieving a `JobTracker` Instance. The example reuses the already created `HazelcastInstance` and `JobTracker` instances.

The example starts by retrieving an instance of our data map, and then it creates the `Job` instance. Implementations used to configure the `Job` will be discussed while walking further through the API documentation.



NOTE: Since the `Job` class is highly dependent upon generics to support type safety, the generics change over time and may not be assignment compatible to old variable types. To make use of the full potential of the fluent API, we recommend you use fluent method chaining as shown in this example to prevent the need for too many variables.

```
IMap<String, String> map = hazelcastInstance.getMap( "articles" );
KeyValueSource<String, String> source = KeyValueSource.fromMap( map );
Job<String, String> job = jobTracker.newJob( source );
```

```
CompletableFuture<Map<String, Long>> future = job
    .mapper( new TokenizerMapper() )
    .combiner( new WordCountCombinerFactory() )
    .reducer( new WordCountReducerFactory() )
    .submit();
```

```
// Attach a callback listener
future.andThen( buildCallback() );
```

```
// Wait and retrieve the result
Map<String, Long> result = future.get();
```

As seen above, we create the `Job` instance and define a mapper, combiner, reducer. Then we submit the request to the cluster. The `submit` method returns an `CompletableFuture` that can be used to attach our callbacks or to wait for the result to be processed in a blocking fashion.

There are more options available for job configurations, such as defining a general chunk size or on what keys the operation will operate. For more information, please refer to the [Hazelcast source code for Job.java](#).

9.2.2.3 Creating Key-Value Input Sources with KeyValueSource

`KeyValueSource` can either wrap Hazelcast data structures (like `IMap`, `MultiMap`, `IList`, `ISet`) into key-value pair input sources, or build your own custom key-value input source. The latter option makes it possible to feed Hazelcast MapReduce with all kinds of data, such as just-in-time downloaded web page contents or data files. People familiar with Hadoop will recognize similarities with the `Input` class.

You can imagine a `KeyValueSource` as a bigger `java.util.Iterator` implementation. Whereas most methods are required to be implemented, the `getAllKeys` method is optional to implement. If implementation is able to gather all keys upfront, it should be implemented and `isAllKeysSupported` must return `true`. That way, Job configured `KeyPredicates` are able to evaluate keys upfront before sending them to the cluster. Otherwise, they are serialized and transferred as well, to be evaluated at execution time.

As shown in the example above, the abstract `KeyValueSource` class provides a number of static methods to easily wrap Hazelcast data structures into `KeyValueSource` implementations already provided by Hazelcast. The data structures' generics are inherited into the resulting `KeyValueSource` instance. For data structures like `IList` or `ISet`, the key type is always `String`. While mapping, the key is the data structure's name whereas the value type and value itself are inherited from the `IList` or `ISet` itself.

```
// KeyValueSource from com.hazelcast.core.IMap
IMap<String, String> map = hazelcastInstance.getMap( "my-map" );
KeyValueSource<String, String> source = KeyValueSource.fromMap( map );

// KeyValueSource from com.hazelcast.core.MultiMap
MultiMap<String, String> multiMap = hazelcastInstance.getMultiMap( "my-multimap" );
KeyValueSource<String, String> source = KeyValueSource.fromMultiMap( multiMap );

// KeyValueSource from com.hazelcast.core.IList
IList<String> list = hazelcastInstance.getList( "my-list" );
KeyValueSource<String, String> source = KeyValueSource.fromList( list );

// KeyValueSource from com.hazelcast.core.ISet
ISet<String> set = hazelcastInstance.getSet( "my-set" );
KeyValueSource<String, String> source = KeyValueSource.fromSet( set );
```

PartitionIdAware

The `com.hazelcast.mapreduce.PartitionIdAware` interface can be implemented by the `KeyValueSource` implementation if the underlying data set is aware of the Hazelcast partitioning schema (as it is for all internal data structures). If this interface is implemented, the same `KeyValueSource` instance is reused multiple times for all partitions on the cluster member. As a consequence, the `close` and `open` methods are also executed multiple times but once per `partitionId`.

9.2.2.4 Implementing Mapping Logic with Mapper

Using the `Mapper` interface, you will implement the mapping logic. Mappers can transform, split, calculate, and aggregate data from data sources. In Hazelcast, you can also integrate data from more than the `KeyValueSource` data source by implementing `com.hazelcast.core.HazelcastInstanceAware` and requesting additional maps, multimaps, list, and/or sets.

The mappers `map` function is called once per available entry in the data structure. If you work on distributed data structures that operate in a partition based fashion, then multiple mappers work in parallel on the different cluster members, on the members' assigned partitions. Mappers then prepare and maybe transform the input key-value pair and emit zero or more key-value pairs for reducing phase.

For our word count example, we retrieve an input document (a text document) and we transform it by splitting the text into the available words. After that, as discussed in the [pseudo code](#), we emit every single word with a key-value pair with the word as the key and 1 as the value.

A common implementation of that `Mapper` might look like the following example:


```

public class TokenizerMapper implements Mapper<String, String, String, Long> {
    private static final Long ONE = Long.valueOf( 1L );

    @Override
    public void map(String key, String document, Context<String, Long> context) {
        StringTokenizer tokenizer = new StringTokenizer( document.toLowerCase() );
        while ( tokenizer.hasMoreTokens() ) {
            context.emit( tokenizer.nextToken(), ONE );
        }
    }
}

```

The code splits the mapped texts into their tokens, iterates over the tokenizer as long as there are more tokens, and emits a pair per word. Note that we're not yet collecting multiple occurrences of the same word, we just fire every word on its own.

LifecycleMapper / LifecycleMapperAdapter

The LifecycleMapper interface or its adapter class LifecycleMapperAdapter can be used to make the Mapper implementation lifecycle aware. That means it will be notified when mapping of a partition or set of data begins and when the last entry was mapped.

Only special algorithms might need those additional lifecycle events to prepare, clean up, or emit additional values.

9.2.2.5 Minimizing Cluster Traffic with Combiner

As stated in the introduction, a Combiner is used to minimize traffic between the different cluster members when transmitting mapped values from mappers to the reducers. It does this by aggregating multiple values for the same emitted key. This is a fully optional operation, but using it is highly recommended.

Combiners can be seen as an intermediate reducer. The calculated value is always assigned back to the key for which the combiner initially was created. Since combiners are created per emitted key, the Combiner implementation itself is not defined in the jobs configuration; instead, a CombinerFactory is created that is able to create the expected Combiner instance.

Because Hazelcast MapReduce is executing mapping and reducing phase in parallel, the Combiner implementation must be able to deal with chunked data. Therefore, you must reset its internal state whenever you call `finalizeChunk`. Calling the `finalizeChunk` method creates a chunk of intermediate data to be grouped (shuffled) and sent to the reducers.

Combiners can override `beginCombine` and `finalizeCombine` to perform preparation or cleanup work.

For our word count example, we are going to have a simple CombinerFactory and Combiner implementation similar to the following example.

```

public class WordCountCombinerFactory
    implements CombinerFactory<String, Long, Long> {

    @Override
    public Combiner<Long, Long> newCombiner( String key ) {
        return new WordCountCombiner();
    }

    private class WordCountCombiner extends Combiner<Long, Long> {
        private long sum = 0;

        @Override
        public void combine( Long value ) {
            sum++;
        }
    }
}

```



```

@Override
public Long finalizeChunk() {
    return sum;
}

@Override
public void reset() {
    sum = 0;
}
}
}

```

The Combiner must be able to return its current value as a chunk and reset the internal state by setting `sum` back to 0. Since combiners are always called from a single thread, no synchronization or volatility of the variables is necessary.

9.2.2.6 Doing Algorithm Work with Reducer

Reducers do the last bit of algorithm work. This can be aggregating values, calculating averages, or any other work that is expected from the algorithm.

Since values arrive in chunks, the `reduce` method is called multiple times for every emitted value of the creation key. This also can happen multiple times per chunk if no Combiner implementation was configured for a job configuration.

Different from combiners, a reducers `finalizeReduce` method is only called once per reducer (which means once per key). Therefore, a reducer does not need to reset its internal state at any time.

Reducers can override `beginReduce` to perform preparation work.

For our word count example, the implementation will look similar to the following code example.

```

public class WordCountReducerFactory implements ReducerFactory<String, Long, Long> {

    @Override
    public Reducer<Long, Long> newReducer( String key ) {
        return new WordCountReducer();
    }

    private class WordCountReducer extends Reducer<Long, Long> {
        private volatile long sum = 0;

        @Override
        public void reduce( Long value ) {
            sum += value.longValue();
        }

        @Override
        public Long finalizeReduce() {
            return sum;
        }
    }
}

```

9.2.2.6.1 Reducers Switching Threads Different from combiners, reducers tend to switch threads if running out of data to prevent blocking threads from the `JobTracker` configuration. They are rescheduled at a later point when new data to be processed arrives but are unlikely to be executed on the same thread as before. As of Hazelcast version 3.3.3 the guarantee for memory visibility on the new thread is ensured by the framework. This means the previous requirement for making fields volatile is dropped.

9.2.2.7 Modifying the Result with Collator

A Collator is an optional operation that is executed on the job emitting member and is able to modify the finally reduced result before returned to the user's codebase. Only special use cases are likely to use collators.

For an imaginary use case, we might want to know how many words were all over in the documents we analyzed. For this case, a Collator implementation can be given to the `submit` method of the Job instance.

A collator would look like the following snippet:

```
public class WordCountCollator implements Collator<Map.Entry<String, Long>, Long> {

    @Override
    public Long collate( Iterable<Map.Entry<String, Long>> values ) {
        long sum = 0;

        for ( Map.Entry<String, Long> entry : values ) {
            sum += entry.getValue().longValue();
        }
        return sum;
    }
}
```

The definition of the input type is a bit strange, but because Combiner and Reducer implementations are optional, the input type heavily depends on the state of the data. As stated above, collators are non-typical use cases and the generics of the framework always help in finding the correct signature.

9.2.2.8 Preselecting Keys with KeyPredicate

You can use `KeyPredicate` to pre-select whether or not a key should be selected for mapping in the mapping phase. If the `KeyValueSource` implementation is able to know all keys prior to execution, the keys are filtered before the operations are divided among the different cluster members.

A `KeyPredicate` can also be used to select only a special range of data (e.g. a time-frame) or similar use cases.

A basic `KeyPredicate` implementation that only maps keys containing the word “hazelcast” might look like the following code example:

```
public class WordCountKeyPredicate implements KeyPredicate<String> {

    @Override
    public boolean evaluate( String s ) {
        return s != null && s.toLowerCase().contains( "hazelcast" );
    }
}
```

9.2.2.9 Job Monitoring with TrackableJob

You can retrieve a `TrackableJob` instance after submitting a job. It is requested from the `JobTracker` using the unique `jobId` (per `JobTracker`). You can use it get runtime statistics of the job. The information available is limited to the number of processed (mapped) records and the processing state of the different partitions or members (if `KeyValueSource` is not `PartitionIdAware`).

To retrieve the `jobId` after submission of the job, use `com.hazelcast.mapreduce.JobCompletableFuture` instead of the `com.hazelcast.core.ICompletableFuture` as the variable type for the returned future.

The example code below gives a quick introduction on how to retrieve the instance and the runtime data. For more information, please have a look at the Javadoc corresponding your running Hazelcast version.

The example performs the following steps to get the job instance.

- It gets the map with the `hazelcastInstance.getMap()` method.
- From the map, it gets the source with the `KeyValueSource.fromMap()` method.
- From the source, it gets a job with the `JobTracker.newJob()` method.

```

IMap<String, String> map = hazelcastInstance.getMap( "articles" );
KeyValueSource<String, String> source = KeyValueSource.fromMap( map );
Job<String, String> job = jobTracker.newJob( source );

JobCompletableFuture<Map<String, Long>> future = job
    .mapper( new TokenizerMapper() )
    .combiner( new WordCountCombinerFactory() )
    .reducer( new WordCountReducerFactory() )
    .submit();

String jobId = future.getJobId();
TrackableJob trackableJob = jobTracker.getTrackableJob(jobId);

JobProcessInformation stats = trackableJob.getJobProcessInformation();
int processedRecords = stats.getProcessedRecords();
log( "ProcessedRecords: " + processedRecords );

JobPartitionState[] partitionStates = stats.getPartitionStates();
for ( JobPartitionState partitionState : partitionStates ) {
    log( "PartitionOwner: " + partitionState.getOwner()
        + ", Processing state: " + partitionState.getState().name() );
}

```



NOTE: *Caching of the `JobProcessInformation` does not work on Java native clients since current values are retrieved while retrieving the instance to minimize traffic between executing member and client.*

9.2.2.10 Configuring JobTracker

You configure `JobTracker` configuration to set up behavior of the Hazelcast MapReduce framework.

Every `JobTracker` is capable of running multiple MapReduce jobs at once; one configuration is meant as a shared resource for all jobs created by the same `JobTracker`. The configuration gives full control over the expected load behavior and thread counts to be used.

The following snippet shows a typical `JobTracker` configuration. The configuration properties are discussed below the example.

```

<jobtracker name="default">
  <max-thread-size>0</max-thread-size>
  <!-- Queue size 0 means number of partitions * 2 -->
  <queue-size>0</queue-size>
  <retry-count>0</retry-count>
  <chunk-size>1000</chunk-size>
  <communicate-stats>true</communicate-stats>
  <topology-changed-strategy>CANCEL_RUNNING_OPERATION</topology-changed-strategy>
</jobtracker>

```

- **max-thread-size:** Maximum thread pool size of the `JobTracker`.
- **queue-size:** Maximum number of tasks that are able to wait to be processed. A value of 0 means an unbounded queue. Very low numbers can prevent successful execution since job might not be correctly scheduled or intermediate chunks might be lost.

- **retry-count:** Currently not used. Reserved for later use where the framework will automatically try to restart / retry operations from an available save point.
- **chunk-size:** Number of emitted values before a chunk is sent to the reducers. If your emitted values are big or you want to better balance your work, you might want to change this to a lower or higher value. A value of 0 means immediate transmission, but remember that low values mean higher traffic costs. A very high value might cause an `OutOfMemoryError` to occur if the emitted values do not fit into heap memory before being sent to the reducers. To prevent this, you might want to use a combiner to pre-reduce values on mapping members.
- **communicate-stats:** Specifies whether the statistics (for example, statistics about processed entries) are transmitted to the job emitter. This can show progress to a user inside of an UI system, but it produces additional traffic. If not needed, you might want to deactivate this.
- **topology-changed-strategy:** Specifies how the MapReduce framework reacts on topology changes while executing a job. Currently, only `CANCEL_RUNNING_OPERATION` is fully supported, which throws an exception to the job emitter (will throw a `com.hazelcast.mapreduce.TopologyChangedException`).

RELATED INFORMATION

Please refer to the [MapReduce Jobtracker Configuration](#) section for a full description of Hazelcast MapReduce JobTracker configuration (includes an example programmatic configuration).

9.2.3 Hazelcast MapReduce Architecture

This section explains some of the internals of the MapReduce framework. This is more advanced information. If you're not interested in how it works internally, you might want to skip this section.

9.2.3.1 Node Interoperation Example

To understand the following technical internals, we first have a short look at what happens in terms of an example workflow.

As a simple example, think of an `IMap<String, Integer>` and emitted keys having the same types. Imagine you have a three node cluster (a cluster with three members) and you initiate the MapReduce job on the first node. After you requested the JobTracker from your running / connected Hazelcast, we submit the task and retrieve the `CompletableFuture` which gives us a chance to wait for the result to be calculated or to add a callback (and being more reactive).

The example expects that the chunk size is 0 or 1, so an emitted value is directly sent to the reducers. Internally, the job is prepared, started, and executed on all nodes as shown below. The first node acts as the job owner (job emitter).

```
Node1 starts MapReduce job
Node1 emits key=Foo, value=1
Node1 does PartitionService::getKeyOwner(Foo) => results in Node3

Node2 emits key=Foo, value=14
Node2 asks jobOwner (Node1) for keyOwner of Foo => results in Node3

Node1 sends chunk for key=Foo to Node3

Node3 receives chunk for key=Foo and looks if there is already a Reducer,
    if not creates one for key=Foo
Node3 processes chunk for key=Foo

Node2 sends chunk for key=Foo to Node3

Node3 receives chunk for key=Foo and looks if there is already a Reducer and uses
    the previous one
```

Node3 processes chunk for key=Foo

Node1 send LastChunk information to Node3 because processing local values finished

Node2 emits key=Foo, value=27

Node2 has cached keyOwner of Foo => results in Node3

Node2 sends chunk for key=Foo to Node3

Node3 receives chunk for key=Foo and looks if there is already a Reducer and uses
the previous one

Node3 processes chunk for key=Foo

Node2 send LastChunk information to Node3 because processing local values finished

Node3 finishes reducing for key=Foo

Node1 registers its local partitions are processed

Node2 registers its local partitions are processed

Node1 sees all partitions processed and requests reducing from all nodes

Node1 merges all reduced results together in a final structure and returns it

The flow is quite complex but extremely powerful since everything is executed in parallel. Reducers do not wait until all values are emitted, but they immediately begin to reduce (when first chunk for an emitted key arrives).

9.2.3.2 Internal MapReduce Packages

Beginning with the package level, there is one basic package: `com.hazelcast.mapreduce`. This includes the external API and the **impl** package which itself contains the internal implementation.

- The **impl** package contains all the default `KeyValueSource` implementations and abstract base and support classes for the exposed API.
- The **client** package contains all classes that are needed on client and server (node) side when a client offers a MapReduce job.
- The **notification** package contains all “notification” or event classes that notify other members about progress on operations.
- The **operation** package contains all operations that are used by the workers or job owner to coordinate work and sync partition or reducer processing.
- The **task** package contains all classes that execute the actual MapReduce operation. It features the supervisor, mapping phase implementation and mapping and reducing tasks.

9.2.3.3 MapReduce Job Walk-Through

And now to the technical walk-through: a MapReduce Job is always retrieved from a named `JobTracker`, which is implemented in `NodeJobTracker` (extends `AbstractJobTracker`) and is configured using the configuration DSL. All of the internal implementation is completely `ICompletableFuture`-driven and mostly non-blocking in design.

On submit, the Job creates a unique UUID which afterwards acts as a `jobId` and is combined with the `JobTracker`’s name to be uniquely identifiable inside the cluster. Then, the preparation is sent around the cluster and every member prepares its execution by creating a `JobSupervisor`, `MapCombineTask`, and `ReducerTask`. The job-emitting `JobSupervisor` gains special capabilities to synchronize and control `JobSupervisors` on other nodes for the same job.

If preparation is finished on all nodes, the job itself is started by executing a `StartProcessingJobOperation` on every node. This initiates a `MappingPhase` implementation (defaults to `KeyValueSourceMappingPhase`) and starts the actual mapping on the nodes.

The mapping process is currently a single threaded operation per node, but will be extended to run in parallel on multiple partitions (configurable per Job) in future versions. The Mapper is now called on every available value on the partition and eventually emits values. For every emitted value, either a configured `CombinerFactory` is called to create a `Combiner` or a cached one is used (or the default `CollectingCombinerFactory` is used to create `Combiners`). When the chunk limit is reached on a node, a `IntermediateChunkNotification` is prepared by collecting emitted keys to their corresponding nodes. This is either done by asking the job owner to assign members or by an already cached assignment. In later versions, a `PartitionStrategy` might also be configurable.

The `IntermediateChunkNotification` is then sent to the reducers (containing only values for this node) and is offered to the `ReducerTask`. On every offer, the `ReducerTask` checks if it is already running and if not, it submits itself to the configured `ExecutorService` (from the `JobTracker` configuration).

If reducer queue runs out of work, the `ReducerTask` is removed from the `ExecutorService` to not block threads but eventually will be resubmitted on next chunk of work.

On every phase, the partition state is changed to keep track of the currently running operations. A `JobPartitionState` can be in one of the following states with self-explanatory titles: `[WAITING, MAPPING, REDUCING, PROCESSED, CANCELLED]`. If you have a deeper interest of these states, look at the Javadoc.

- Node asks for new partition to process: `WAITING => MAPPING`
- Node emits first chunk to a reducer: `MAPPING => REDUCING`
- All nodes signal that they finished mapping phase and reducing is finished, too: `REDUCING => PROCESSED`

Eventually (or hopefully), all `JobPartitionStates` reach the state of `PROCESSED`. Then, the job emitter's `JobSupervisor` asks all nodes for their reduced results and executes a potentially offered `Collator`. With this `Collator`, the overall result is calculated before it removes itself from the `JobTracker`, doing some final cleanup and returning the result to the requester (using the internal `TrackableJobFuture`).

If a job is cancelled while execution, all partitions are immediately set to the `CANCELLED` state and a `CancelJobSupervisorOperation` is executed on all nodes to kill the running processes.

While the operation is running in addition to the default operations, some more operations like `ProcessStatsUpdateOperation` (updates processed records statistics) or `NotifyRemoteExceptionOperation` (notifies the nodes that the sending node encountered an unrecoverable situation and the Job needs to be cancelled - e.g. `NullPointerException` inside of a Mapper) are executed against the job owner to keep track of the process.

9.3 Aggregators

Based on the Hazelcast MapReduce framework, Aggregators are ready-to-use data aggregations. These are typical operations like sum up values, finding minimum or maximum values, calculating averages, and other operations that you would expect in the relational database world.

Aggregation operations are implemented, as mentioned above, on top of the MapReduce framework and all operations can be achieved using pure MapReduce calls. However, using the Aggregation feature is more convenient for a big set of standard operations.

9.3.1 Aggregations Basics

This section will quickly guide you through the basics of the Aggregations framework and some of its available classes. We also will implement a first base example.

9.3.1.1 Aggregations and Map Interfaces

Aggregations are available on both types of map interfaces, `com.hazelcast.core.IMap` and `com.hazelcast.core.MultiMap`, using the `aggregate` methods. Two overloaded methods are available that customize resource management of the underlying MapReduce framework by supplying a custom configured `com.hazelcast.mapreduce.JobTracker` instance. To find out how to configure the MapReduce framework, please see `Configuring JobTracker`. We will later see another way to configure the automatically used MapReduce framework if no special `JobTracker` is supplied.

9.3.1.2 Aggregations and Java

To make Aggregations more convenient to use and future proof, the API is heavily optimized for Java 8 and future versions. The API is still fully compatible with any Java version Hazelcast supports (Java 6 and Java 7). The biggest difference is how you work with the Java generics: on Java 6 and 7, the process to resolve generics is not as strong as on Java 8 and upcoming Java versions. In addition, the whole Aggregations API has full Java 8 Project Lambda (or Closure, JSR 335) support.

For illustration of the differences in Java 6 and 7 in comparison to Java 8, we will have a quick look at code examples for both. After that, we will focus on using Java 8 syntax to keep examples short and easy to understand, and we will see some hints as to what the code looks like in Java 6 or 7.

The first example will produce the sum of some `int` values stored in a Hazelcast IMap. This example does not use much of the functionality of the Aggregations framework, but it will show the main difference.

```
IMap<String, Integer> personAgeMapping = hazelcastInstance.getMap( "person-age" );
for ( int i = 0; i < 1000; i++ ) {
    String lastName = RandomUtil.randomLastName();
    int age = RandomUtil.randomAgeBetween( 20, 80 );
    personAgeMapping.put( lastName, Integer.valueOf( age ) );
}
```

With our demo data prepared, we can see how to produce the sums in different Java versions.

9.3.1.3 Aggregations and Java 6 or Java 7

Since Java 6 and 7 are not as strong on resolving generics as Java 8, you need to be a bit more verbose with the code you write. You might also consider using raw types, but breaking the type safety to ease this process.

For a short introduction on what the following code example means, look at the source code comments. We will later dig deeper into the different options.

```
// No filter applied, select all entries
Supplier<String, Integer, Integer> supplier = Supplier.all();
// Choose the sum aggregation
Aggregation<String, Integer, Integer> aggregation = Aggregations.integerSum();
// Execute the aggregation
int sum = personAgeMapping.aggregate( supplier, aggregation );
```

9.3.1.4 Aggregations and Java 8

With Java 8, the Aggregations API looks simpler because Java 8 can resolve the generic parameters for us. That means the above lines of Java 6/7 example code will end up in just one easy line on Java 8.

```
int sum = personAgeMapping.aggregate( Supplier.all(), Aggregations.integerSum() );
```

9.3.1.5 Aggregations and the MapReduce Framework

As mentioned before, the Aggregations implementation is based on the Hazelcast MapReduce framework and therefore you might find overlaps in their APIs. One overload of the `aggregate` method can be supplied with a `JobTracker` which is part of the MapReduce framework.

If you implement your own aggregations, you will use a mixture of the Aggregations and the MapReduce API. If you will implement your own aggregation, e.g. to make the life of colleagues easier, please read the [Implementing Aggregations section](#).

For the full MapReduce documentation please see the [MapReduce section](#).

9.3.2 Using the Aggregations API

We now look into the possible options of what can be achieved using the Aggregations API. To work on some deeper examples, let's quickly have a look at the available classes and interfaces and discuss their usage.

9.3.2.1 Supplier

The `com.hazelcast.mapreduce.aggregation.Supplier` provides filtering and data extraction to the aggregation operation. This class already provides a few different static methods to achieve the most common cases. `Supplier.all()` accepts all incoming values and does not apply any data extraction or transformation upon them before supplying them to the aggregation function itself.

For filtering data sets, you have two different options by default. - You can either supply a `com.hazelcast.query.Predicate` if you want to filter on values and / or keys, or - you can supply a `com.hazelcast.mapreduce.KeyPredicate` if you can decide directly on the data key without the need to deserialize the value.

As mentioned above, all APIs are fully Java 8 and Lambda compatible. Let's have a look on how we can do basic filtering using those two options.

9.3.2.1.1 Basic Filtering with KeyPredicate First, we have a look at a `KeyPredicate` and we only accept people whose last name is "Jones".

```
Supplier<...> supplier = Supplier.fromKeyPredicate(
    lastName -> "Jones".equalsIgnoreCase( lastName )
);

class JonesKeyPredicate implements KeyPredicate<String> {
    public boolean evaluate( String key ) {
        return "Jones".equalsIgnoreCase( key );
    }
}
```

9.3.2.1.2 Filtering on Values with Predicate Using the standard Hazelcast `Predicate` interface, we can also filter based on the value of a data entry. In the following example, you can only select values which are divisible by 4 without a remainder.

```
Supplier<...> supplier = Supplier.fromPredicate(
    entry -> entry.getValue() % 4 == 0
);

class DivisiblePredicate implements Predicate<String, Integer> {
    public boolean apply( Map.Entry<String, Integer> entry ) {
        return entry.getValue() % 4 == 0;
    }
}
```

9.3.2.1.3 Extracting and Transforming Data As well as filtering, `Supplier` can also extract or transform data before providing it to the aggregation operation itself. The following example shows how to transform an input value to a string.

```
Supplier<String, Integer, String> supplier = Supplier.all(
    value -> Integer.toString(value)
);
```

You can see a Java 6 / 7 example in the Aggregations Examples section.

Apart from the fact we transformed the input value of type `int` (or `Integer`) to a string, we can see that the generic information of the resulting `Supplier` has changed as well. This indicates that we now have an aggregation working on string values.

9.3.2.1.4 Chaining Multiple Filtering Rules Another feature of `Supplier` is its ability to chain multiple filtering rules. Let's combine all of the above examples into one rule set:

```
Supplier<String, Integer, String> supplier =
    Supplier.fromKeyPredicate(
        lastName -> "Jones".equalsIgnoreCase( lastName ),
        Supplier.fromPredicate(
            entry -> entry.getValue() % 4 == 0,
            Supplier.all( value -> Integer.toString(value) )
        )
    );
```

9.3.2.1.5 Implementing Supplier with Special Requirements You might prefer or need to implement your `Supplier` based on special requirements. This is a very basic task. The `Supplier` abstract class has just one method: the `apply` method.



NOTE: Due to a limitation of the Java Lambda API, you cannot implement abstract classes using Lambdas. Instead it is recommended that you create a standard named class.

```
class MyCustomSupplier extends Supplier<String, Integer, String> {
    public String apply( Map.Entry<String, Integer> entry ) {
        Integer value = entry.getValue();
        if (value == null) {
            return null;
        }
        return value % 4 == 0 ? String.valueOf( value ) : null;
    }
}
```

The `Supplier` `apply` methods are expected to return null whenever the input value should not be mapped to the aggregation process. This can be used, as in the example above, to implement filter rules directly. Implementing filters using the `KeyPredicate` and `Predicate` interfaces might be more convenient.

To use your own `Supplier`, just pass it to the `aggregate` method or use it in combination with other `Suppliers`.

```
int sum = personAgeMapping.aggregate( new MyCustomSupplier(), Aggregations.count() );
```

```
Supplier<String, Integer, String> supplier =
    Supplier.fromKeyPredicate(
        lastName -> "Jones".equalsIgnoreCase( lastName ),
        new MyCustomSupplier()
    );
int sum = personAgeMapping.aggregate( supplier, Aggregations.count() );
```

9.3.2.2 Defining the Aggregation Operation

The `com.hazelcast.mapreduce.aggregation.Aggregation` interface defines the aggregation operation itself. It contains a set of MapReduce API implementations like `Mapper`, `Combiner`, `Reducer`, and `Collator`. These implementations are normally unique to the chosen `Aggregation`. This interface can also be implemented with your aggregation operations based on MapReduce calls. For more information, refer to [Implementing Aggregations section](#).

The `com.hazelcast.mapreduce.aggregation.Aggregations` class provides a common predefined set of aggregations. This class contains type safe aggregations of the following types:

- Average (Integer, Long, Double, BigInteger, BigDecimal)

- Sum (Integer, Long, Double, BigInteger, BigDecimal)
- Min (Integer, Long, Double, BigInteger, BigDecimal, Comparable)
- Max (Integer, Long, Double, BigInteger, BigDecimal, Comparable)
- DistinctValues
- Count

Those aggregations are similar to their counterparts on relational databases and can be equated to SQL statements as set out below.

9.3.2.2.1 Average Calculates an average value based on all selected values.

```
map.aggregate( Supplier.all( person -> person.getAge() ),
               Aggregations.integerAvg() );
```

```
SELECT AVG(person.age) FROM person;
```

9.3.2.2.2 Sum Calculates a sum based on all selected values.

```
map.aggregate( Supplier.all( person -> person.getAge() ),
               Aggregations.integerSum() );
```

```
SELECT SUM(person.age) FROM person;
```

9.3.2.2.3 Minimum (Min) Finds the minimal value over all selected values.

```
map.aggregate( Supplier.all( person -> person.getAge() ),
               Aggregations.integerMin() );
```

```
SELECT MIN(person.age) FROM person;
```

9.3.2.2.4 Maximum (Max) Finds the maximal value over all selected values.

```
map.aggregate( Supplier.all( person -> person.getAge() ),
               Aggregations.integerMax() );
```

```
SELECT MAX(person.age) FROM person;
```

9.3.2.2.5 Distinct Values Returns a collection of distinct values over the selected values

```
map.aggregate( Supplier.all( person -> person.getAge() ),
               Aggregations.distinctValues() );
```

```
SELECT DISTINCT person.age FROM person;
```

9.3.2.2.6 Count Returns the element count over all selected values

```
map.aggregate( Supplier.all(), Aggregations.count() );
```

```
SELECT COUNT(*) FROM person;
```

9.3.2.3 Extracting Attribute Values with PropertyExtractor

We used the `com.hazelcast.mapreduce.aggregation.PropertyExtractor` interface before when we had a look at the example on how to use a `Supplier` to [transform a value to another type](#). It can also be used to extract attributes from values.

```
class Person {
    private String firstName;
    private String lastName;
    private int age;

    // getters and setters
}

PropertyExtractor<Person, Integer> propertyExtractor = (person) -> person.getAge();

class AgeExtractor implements PropertyExtractor<Person, Integer> {
    public Integer extract( Person value ) {
        return value.getAge();
    }
}
```

In this example, we extract the value from the person's age attribute. The value type changes from `Person` to `Integer` which is reflected in the generics information to stay type safe.

You can use `PropertyExtractors` for any kind of transformation of data. You might even want to have multiple transformation steps chained one after another.

9.3.2.4 Configuring Aggregations

As stated before, the easiest way to configure the resources used by the underlying MapReduce framework is to supply a `JobTracker` to the aggregation call itself by passing it to either `IMap::aggregate` or `MultiMap::aggregate`.

There is another way to implicitly configure the underlying used `JobTracker`. If no specific `JobTracker` was passed for the aggregation call, internally one will be created using the following naming specifications:

For `IMap` aggregation calls the naming specification is created as:

- `hz::aggregation-map-` and the concatenated name of the map.

For `MultiMap` it is very similar:

- `hz::aggregation-multimap-` and the concatenated name of the `MultiMap`.

Knowing that (the specification of the name), we can configure the `JobTracker` as expected (as described in [Retrieving a JobTracker Instance](#)) using the naming spec we just learned. For more information on configuration of the `JobTracker`, please see [Configuring Jobtracker](#).

To finish this section, let's have a quick example for the above naming specs:

```
IMap<String, Integer> map = hazelcastInstance.getMap( "mymap" );

// The internal JobTracker name resolves to 'hz::aggregation-map-mymap'
map.aggregate( ... );

MultiMap<String, Integer> multimap = hazelcastInstance.getMultiMap( "mymultimap" );

// The internal JobTracker name resolves to 'hz::aggregation-multimap-mymultimap'
multimap.aggregate( ... );
```

9.3.3 Aggregations Examples

For the final example, imagine you are working for an international company and you have an employee database stored in Hazelcast IMap with all employees worldwide and a MultiMap for assigning employees to their certain locations or offices. In addition, there is another IMap which holds the salary per employee.

9.3.3.1 Setting up the Data Model

Let's have a look at our data model.

```
class Employee implements Serializable {
    private String firstName;
    private String lastName;
    private String companyName;
    private String address;
    private String city;
    private String county;
    private String state;
    private int zip;
    private String phone1;
    private String phone2;
    private String email;
    private String web;

    // getters and setters
}

class SalaryMonth implements Serializable {
    private Month month;
    private int salary;

    // getters and setters
}

class SalaryYear implements Serializable {
    private String email;
    private int year;
    private List<SalaryMonth> months;

    // getters and setters

    public int getAnnualSalary() {
        int sum = 0;
        for ( SalaryMonth salaryMonth : getMonths() ) {
            sum += salaryMonth.getSalary();
        }
        return sum;
    }
}
```

The two IMaps and the MultiMap are keyed by the string of email. They are defined as follows:

```
IMap<String, Employee> employees = hz.getMap( "employees" );
IMap<String, SalaryYear> salaries = hz.getMap( "salaries" );
MultiMap<String, String> officeAssignment = hz.getMultiMap( "office-employee" );
```

So far, we know all the important information to work out some example aggregations. We will look into some deeper implementation details and how we can work around some current limitations that will be eliminated in future versions of the API.

9.3.3.2 Average Aggregation Example

Let's start with a very basic example. We want to know the average salary of all of our employees. To do this, we need a `PropertyExtractor` and the average aggregation for type `Integer`.

```
IMap<String, SalaryYear> salaries = hazelcastInstance.getMap( "salaries" );
PropertyExtractor<SalaryYear, Integer> extractor =
    (salaryYear) -> salaryYear.getAnnualSalary();
int avgSalary = salaries.aggregate( Supplier.all( extractor ),
                                    Aggregations.integerAvg() );
```

That's it. Internally, we created a MapReduce task based on the predefined aggregation and fired it up immediately. Currently, all aggregation calls are blocking operations, so it is not yet possible to execute the aggregation in a reactive way (using `com.hazelcast.core.ICompletableFuture`) but this will be part of an upcoming version.

9.3.3.3 Map Join Example

The following example is a little more complex. We only want to have our US based employees selected into the average salary calculation, so we need to execute some kind of a join operation between the employees and salaries maps.

```
class USEmployeeFilter implements KeyPredicate<String>, HazelcastInstanceAware {
    private transient HazelcastInstance hazelcastInstance;

    public void setHazelcastInstance( HazelcastInstance hazelcastInstance ) {
        this.hazelcastInstance = hazelcastInstance;
    }

    public boolean evaluate( String email ) {
        IMap<String, Employee> employees = hazelcastInstance.getMap( "employees" );
        Employee employee = employees.get( email );
        return "US".equals( employee.getCountry() );
    }
}
```

Using the `HazelcastInstanceAware` interface, we get the current instance of Hazelcast injected into our filter and we can perform data joins on other data structures of the cluster. We now only select employees that work as part of our US offices into the aggregation.

```
IMap<String, SalaryYear> salaries = hazelcastInstance.getMap( "salaries" );
PropertyExtractor<SalaryYear, Integer> extractor =
    (salaryYear) -> salaryYear.getAnnualSalary();
int avgSalary = salaries.aggregate( Supplier.fromKeyPredicate(
                                    new USEmployeeFilter(), extractor
                                ), Aggregations.integerAvg() );
```

9.3.3.4 Grouping Example

For our next example, we will do some grouping based on the different worldwide offices. Currently, a group aggregator is not yet available, so we need a small workaround to achieve this goal. (In later versions of the

Aggregations API this will not be required because it will be available out of the box in a much more convenient way.)

Again, let's start with our filter. This time, we want to filter based on an office name and we need to do some data joins to achieve this kind of filtering.

A short tip: to minimize the data transmission on the aggregation we can use **Data Affinity** rules to influence the partitioning of data. Be aware that this is an expert feature of Hazelcast.

```
class OfficeEmployeeFilter implements KeyPredicate<String>, HazelcastInstanceAware {
    private transient HazelcastInstance hazelcastInstance;
    private String office;

    // Deserialization Constructor
    public OfficeEmployeeFilter() {
    }

    public OfficeEmployeeFilter( String office ) {
        this.office = office;
    }

    public void setHazelcastInstance( HazelcastInstance hazelcastInstance ) {
        this.hazelcastInstance = hazelcastInstance;
    }

    public boolean evaluate( String email ) {
        MultiMap<String, String> officeAssignment = hazelcastInstance
            .getMultiMap( "office-employee" );

        return officeAssignment.containsKey( office, email );
    }
}
```

Now we can execute our aggregations. As mentioned before, we currently need to do the grouping on our own by executing multiple aggregations in a row.

```
Map<String, Integer> avgSalariesPerOffice = new HashMap<String, Integer>();

IMap<String, SalaryYear> salaries = hazelcastInstance.getMap( "salaries" );
MultiMap<String, String> officeAssignment =
    hazelcastInstance.getMultiMap( "office-employee" );

PropertyExtractor<SalaryYear, Integer> extractor =
    (salaryYear) -> salaryYear.getAnnualSalary();

for ( String office : officeAssignment.keySet() ) {
    OfficeEmployeeFilter filter = new OfficeEmployeeFilter( office );
    int avgSalary = salaries.aggregate( Supplier.fromKeyPredicate( filter, extractor ),
        Aggregations.integerAvg() );

    avgSalariesPerOffice.put( office, avgSalary );
}
```

9.3.3.5 Simple Count Example

After the previous example, we want to end this section by executing one final and easy aggregation. We want to know how many employees we currently have on a worldwide basis. Before reading the next lines of example code, you can try to do it on your own to see if you understood how to execute aggregations.

```
IMap<String, Employee> employees = hazelcastInstance.getMap( "employees" );
int count = employees.size();
```

Ok, after the quick joke of the previous two code lines, we look at the real two code lines:

```
IMap<String, Employee> employees = hazelcastInstance.getMap( "employees" );
int count = employees.aggregate( Supplier.all(), Aggregations.count() );
```

We now have an overview of how to use aggregations in real life situations. If you want to do your colleagues a favor, you might want to write your own additional set of aggregations. If so, then read the next section, [Implementing Aggregations](#).

9.3.4 Implementing Aggregations

This section explains how to implement your own aggregations in your own application. It is an advanced section, so if you do not intend to implement your own aggregation, you might want to stop reading here and come back later when you need to know how to implement your own aggregation.

An **Aggregation** implementation is defining a MapReduce task, but with a small difference: the **Mapper** is always expected to work on a **Supplier** that filters and / or transforms the mapped input value to some output value.

9.3.4.1 Aggregation Methods

The main interface for making your own aggregation is `com.hazelcast.mapreduce.aggregation.Aggregation`. It consists of four methods.

```
interface Aggregation<Key, Supplied, Result> {
    Mapper getMapper(Supplier<Key, ?, Supplied> supplier);
    CombinerFactory getCombinerFactory();
    ReducerFactory getReducerFactory();
    Collator<Map.Entry, Result> getCollator();
}
```

The `getMapper` and `getReducerFactory` methods should return non-null values. `getCombinerFactory` and `getCollator` are optional operations and you do not need to implement them. You can decide to implement them depending on the use case you want to achieve.

9.3.4.2 Aggregation Tips

For more information on how you implement mappers, combiners, reducers, and collators, refer to the [MapReduce section](#).

For best speed and traffic usage, as mentioned in the [MapReduce section](#), you should add a **Combiner** to your aggregation whenever it is possible to do some kind of pre-reduction step.

Your implementation also should use `DataSerializable` or `IdentifiedDataSerializable` for best compatibility and speed / stream-size reasons.

9.4 Continuous Query

Continuous query enables you to listen to the modifications performed on specific map entries. It is an entry listener with predicates. Please see the [Listening to Map Events section](#) for information on how to add entry listeners to a map.

9.4.1 Listening to Predicate Map Entries

As an example, let's listen to the changes made on an employee with the surname "Smith". First, let's create the `Employee` class.

```
import java.io.Serializable;

public class Employee implements Serializable {

    private final String surname;

    public Employee(String surname) {
        this.surname = surname;
    }

    @Override
    public String toString() {
        return "Employee{" +
            "surname='" + surname + '\'' +
            '}';
    }
}
```

Then, let's create the continuous query by adding the entry listener with the `surname` predicate.

```
import com.hazelcast.core.*;
import com.hazelcast.query.SqlPredicate;

public class ContinuousQuery {

    public static void main(String[] args) {
        HazelcastInstance hz = Hazelcast.newHazelcastInstance();
        IMap<String, String> map = hz.getMap("map");
        map.addEntryListener(new MyEntryListener(),
            new SqlPredicate("surname=smith"), true);
        System.out.println("Entry Listener registered");
    }

    static class MyEntryListener
        implements EntryListener<String, String> {
        @Override
        public void entryAdded(EntryEvent<String, String> event) {
            System.out.println("Entry Added:" + event);
        }

        @Override
        public void entryRemoved(EntryEvent<String, String> event) {
            System.out.println("Entry Removed:" + event);
        }

        @Override
        public void entryUpdated(EntryEvent<String, String> event) {
            System.out.println("Entry Updated:" + event);
        }

        @Override
        public void entryEvicted(EntryEvent<String, String> event) {
            System.out.println("Entry Evicted:" + event);
        }
    }
}
```



```

    }

    @Override
    public void mapEvicted(MapEvent event) {
        System.out.println("Map Evicted:" + event);
    }
}

```

And now, let's play with the employee "smith" and see how that employee will be listened to.

```

import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.HazelcastInstance;
import com.hazelcast.core.IMap;

public class Modify {

    public static void main(String[] args) {
        HazelcastInstance hz = Hazelcast.newHazelcastInstance();
        IMap<String, Employee> map = hz.getMap("map");

        map.put("1", new Employee("smith"));
        map.put("2", new Employee("jordan"));
        System.out.println("done");
        System.exit(0);
    }
}

```

When you first run the class `ContinuousQuery` and then run `Modify`, you will see output similar to the listing below.

```

entryAdded:EntryEvent {Address[192.168.178.10]:5702} key=1,oldValue=null,
value=Person{name= smith }, event=ADDED, by Member [192.168.178.10]:5702

```

9.5 Continuous Query Cache

Enterprise Only

Figure 9.2:



NOTE: This feature is supported for Hazelcast Enterprise 3.5 or higher.

A continuous query cache is used to cache the result of a continuous query. After the construction of a continuous query cache, all changes on the underlying `IMap` are immediately reflected to this cache as a stream of events. Therefore, this cache will be an always up-to-date view of the `IMap`.

9.5.1 Keeping Query Results Local and Ready

A continuous query cache is beneficial when you need to query the distributed `IMap` data in a very frequent and fast way. By using a continuous query cache, the result of the query will always be ready and local to the application.

9.5.2 Accessing Continuous Query from Server Side

The following code snippet shows how you can access a continuous query cache from the server side.

```
QueryCacheConfig queryCacheConfig = new QueryCacheConfig("cache-name");
queryCacheConfig.getPredicateConfig().setImplementation(new OddKeysPredicate());

MapConfig mapConfig = new MapConfig("map-name");
mapConfig.addQueryCacheConfig(queryCacheConfig);

Config config = new Config();
config.addMapConfig(mapConfig);

HazelcastInstance node = Hazelcast.newHazelcastInstance(config);
IEnterpriseMap<Integer, String> map = (IEnterpriseMap) node.getMap("map-name");

QueryCache<Integer, String> cache = map.getQueryCache("cache-name");
```

9.5.3 Accessing Continuous Query from Client Side

The following code snippet shows how you can access a continuous query cache from the client side. The difference in this code from the server side code above is that you configure and instantiate a client instance instead of a member (node) instance.

```
QueryCacheConfig queryCacheConfig = new QueryCacheConfig("cache-name");
queryCacheConfig.getPredicateConfig().setImplementation(new OddKeysPredicate());

ClientConfig clientConfig = new ClientConfig();
clientConfig.addQueryCacheConfig("map-name", queryCacheConfig);

HazelcastInstance client = HazelcastClient.newHazelcastClient(clientConfig);
IEnterpriseMap<Integer, Integer> clientMap = (IEnterpriseMap) client.getMap("map-name");

QueryCache<Integer, Integer> cache = clientMap.getQueryCache("cache-name");
```

9.5.4 Features of Continuous Query Cache

- You can enable/disable the initial query that is run on the existing IMap data during the continuous query cache construction, according to the supplied predicate via `QueryCacheConfig#setPopulate`.
- You can index and perform queries on a continuous query cache.
- A continuous query cache is evictable. Note that a continuous query cache has a default maximum capacity of 10000. If you need a non-evictable cache, you should configure the eviction via `QueryCacheConfig#setEvictionConfig`.
- You can listen to a continuous query cache using `QueryCache#addEntryListener`.
- The events on the IMap are reflected in a continuous query cache, keeping the same order of those events. Note that the order of the events implies the order in a partition. Therefore, you can only expect ordered events from the same partition. You can listen to the event losses using `EventLostListener` and events can be recoverable with the method `QueryCache#tryRecover`. If your buffer size on the node side is large enough, you can recover from a possible event loss scenario. Currently, setting the size of `QueryCacheConfig#setBufferSize` is the only option for recovery since the events which feed a continuous query cache have no backups. You can use the following example code for a recovery case.

```
```java

 QueryCache queryCache = map.getQueryCache("cache-name", new SqlPredicate("this > 20"), true);
 queryCache.addEntryListener(new EventLostListener() {
 @Override
 public void eventLost(EventLostEvent event) {
 queryCache.tryRecover();
 }
 }, false);
```
```

- You can perform event batching and coalescing on a continuous query cache.
- You can configure a continuous query cache declaratively or programmatically.
- You can populate a continuous query cache with only the keys of its entries and you can retrieve the subsequent values directly via `QueryCache#get` from the underlying `IMap`. This helps to decrease the initial population time when the values are very large.

Chapter 10

User Defined Services

In the case of special/custom needs, Hazelcast's SPI (Service Provider Interface) module allows users to develop their own distributed data structures and services.

10.1 A Counter User Defined Service

Throughout this section, we create a distributed counter that will be the guide to reveal the Hazelcast SPI usage.

Here is our counter.

```
public interface Counter{  
    int inc(int amount);  
}
```

This counter will have the following features: - It will be stored in Hazelcast. - Different cluster members can call it. - It will be scalable, meaning that the capacity for the number of counters scales with the number of cluster members. - It will be highly available, meaning that if a member hosting this counter goes down, a backup will be available on a different member.

All these features are done with the steps below. Each step adds a new functionality to this counter.

1. Create the class.
2. Enable the class.
3. Add properties.
4. Place a remote call.
5. Create the containers.
6. Enable partition migration.
7. Create the backups.

10.1.1 Creating the Service Class

To have the counter as a functioning distributed object, we need a class. This class (named `CounterService` in the following example code) is the gateway between Hazelcast internals and the counter, allowing us to add features to the counter. The following example code creates the class `CounterService`. Its lifecycle is managed by Hazelcast.

`CounterService` should implement the interface `com.hazelcast.spi.ManagedService` as shown below. The `com.hazelcast.spi.ManagedService` [source code is here](#).

`CounterService` implements the following methods.

- **init:** This is called when `CounterService` is initialized. `NodeEngine` enables access to Hazelcast internals such as `HazelcastInstance` and `PartitionService`. Also, the object `Properties` will provide us with the ability to create our own properties.
- **shutdown:** This is called when `CounterService` is shutdown. It cleans up the resources.
- **reset:** This is called when cluster members face the Split-Brain issue. This occurs when disconnected members that have created their own cluster are merged back into the main cluster. Services can also implement the `SplitBrainHandleService` to indicate that they can take part in the merge process. For `CounterService` we are going to implement `reset` as a no-op.

```
import com.hazelcast.spi.ManagedService;
import com.hazelcast.spi.NodeEngine;

import java.util.Properties;
import java.util.concurrent.ConcurrentHashMap;
import java.util.concurrent.ConcurrentMap;

public class CounterService implements ManagedService {
    private NodeEngine nodeEngine;

    @Override
    public void init( NodeEngine nodeEngine, Properties properties ) {
        System.out.println( "CounterService.init" );
        this.nodeEngine = nodeEngine;
    }

    @Override
    public void shutdown( boolean terminate ) {
        System.out.println( "CounterService.shutdown" );
    }

    @Override
    public void reset() {
    }
}
```

10.1.2 Enabling the Service Class

Now, we need to enable the class `CounterService`. The declarative way of doing this is shown below.

```
<network>
  <join><multicast enabled="true"/> </join>
</network>
<services>
  <service enabled="true">
    <name>CounterService</name>
    <class-name>CounterService</class-name>
  </service>
</services>
```

The `CounterService` is declared within the `services` configuration element.

- Set the `enabled` attribute to `true` to enable the service.
- Set the `name` attribute to the name of the service. It should be a unique name (`CounterService` in our case) since it will be looked up when a remote call is made. Note that the value of this attribute will be sent at each request, and that a longer `name` value means more data (de)serialization. A good practice is to give an understandable name with the shortest possible length.

- Set the `class-name` attribute to the class name of the service (`CounterService` in our case). The class should have a *no-arg* constructor. Otherwise, the object cannot be initialized.

Note that multicast is enabled as the join mechanism. In the later sections for the `CounterService` example, we will see why.

RELATED INFORMATION

Please refer to the [Services Configuration section](#) for a full description of Hazelcast SPI configuration.

10.1.3 Adding Properties to the Service

The `init` method for `CounterService` takes the `Properties` object as an argument. This means we can add properties to the service that are passed to the `init` method; see [Creating the Service Class](#). You can add properties declaratively as shown below. (You likely want to name your properties something other than `someproperty`.)

```
<service enabled="true">
  <name>CounterService</name>
  <class-name>CounterService</class-name>
  <properties>
    <someproperty>10</someproperty>
  </properties>
</service>
```

If you want to parse a more complex XML, you can use the interface `com.hazelcast.spi.ServiceConfigurationParser`. It gives you access to the XML DOM tree.

10.1.4 Starting the Service

Now, let's start a `HazelcastInstance` as shown below, which will start the `CounterService`.

```
import com.hazelcast.core.Hazelcast;

public class Member {
    public static void main(String[] args) {
        Hazelcast.newHazelcastInstance();
    }
}
```

Once it starts, the `CounterService` `init` method prints the following output.

```
CounterService.init
```

Once the `HazelcastInstance` is shutdown (for example, with Ctrl+C), the `CounterService` `shutdown` method prints the following output.

```
CounterService.shutdown
```

10.1.5 Placing a Remote Call via Proxy

In the previous sections for the `CounterService` example, we started `CounterService` as part of a `HazelcastInstance` startup.

Now, let's connect the `Counter` interface to `CounterService` and perform a remote call to the cluster member hosting the counter data. Then, we will return a dummy result.

Remote calls are performed via a proxy in Hazelcast. Proxies expose the methods at the client side. Once a method is called, proxy creates an operation object, sends this object to the cluster member responsible from executing that operation, and then sends the result.

10.1.5.1 Making Counter a Distributed Object

First, we need to make the `Counter` interface a distributed object by extending the `DistributedObject` interface, as shown below.

```
import com.hazelcast.core.DistributedObject;

public interface Counter extends DistributedObject {
    int inc(int amount);
}
```

10.1.5.2 Implementing ManagedService and RemoteService

Now, we need to make the `CounterService` class implement not only the `ManagedService` interface, but also the interface `com.hazelcast.spi.RemoteService`. This way, a client will be able to get a handle of a counter proxy. You can read the [source code for RemoteService here](#).

```
import com.hazelcast.core.DistributedObject;
import com.hazelcast.spi.ManagedService;
import com.hazelcast.spi.NodeEngine;
import com.hazelcast.spi.RemoteService;

import java.util.Properties;

public class CounterService implements ManagedService, RemoteService {
    public static final String NAME = "CounterService";

    private NodeEngine nodeEngine;

    @Override
    public DistributedObject createDistributedObject(String objectName) {
        return new CounterProxy(objectName, nodeEngine, this);
    }

    @Override
    public void destroyDistributedObject(String objectName) {
        // for the time being a no-op, but in the later examples this will be implemented
    }

    @Override
    public void init(NodeEngine nodeEngine, Properties properties) {
        this.nodeEngine = nodeEngine;
    }

    @Override
    public void shutdown(boolean terminate) {
    }

    @Override
    public void reset() {
    }
}
```

The `CounterProxy` returned by the method `createDistributedObject` is a local representation to (potentially) remote managed data and logic.



NOTE: Note that caching and removing the proxy instance are done outside of this service.

10.1.5.3 Implementing CounterProxy

Now, it is time to implement the CounterProxy as shown below. CounterProxy extends [AbstractDistributedObject](#), [source code here](#).

```
import com.hazelcast.spi.AbstractDistributedObject;
import com.hazelcast.spi.InvocationBuilder;
import com.hazelcast.spi.NodeEngine;
import com.hazelcast.util.ExceptionUtil;

import java.util.concurrent.Future;

public class CounterProxy extends AbstractDistributedObject<CounterService> implements Counter {
    private final String name;

    public CounterProxy(String name, NodeEngine nodeEngine, CounterService counterService) {
        super(nodeEngine, counterService);
        this.name = name;
    }

    @Override
    public String getServiceName() {
        return CounterService.NAME;
    }

    @Override
    public String getName() {
        return name;
    }

    @Override
    public int inc(int amount) {
        NodeEngine nodeEngine = getNodeEngine();
        IncOperation operation = new IncOperation(name, amount);
        int partitionId = nodeEngine.getPartitionService().getPartitionId(name);
        InvocationBuilder builder = nodeEngine.getOperationService()
            .createInvocationBuilder(CounterService.NAME, operation, partitionId);
        try {
            final Future<Integer> future = builder.invoke();
            return future.get();
        } catch (Exception e) {
            throw ExceptionUtil.rethrow(e);
        }
    }
}
```

CounterProxy is a local representation of remote data/functionality. It does not include the counter state. Therefore, the method `inc` should be invoked on the cluster member hosting the real counter. You can invoke it using Hazelcast SPI; then it will send the operations to the correct member and return the results.

Let's dig deeper into the method `inc`.

- First, we create `IncOperation` with a given `name` and `amount`.
- Then, we get the partition ID based on the `name`; by this way, all operations for a given name will result in the same partition ID.
- Then, we create an `InvocationBuilder` where the connection between operation and partition is made.
- Finally, we invoke the `InvocationBuilder` and wait for its result. This waiting is performed with a `future.get()`. In our case, timeout is not important. However, it is a good practice to use a timeout for a real system since operations should complete in a certain amount of time.

10.1.5.4 Dealing with Exceptions

Hazelcast's `ExceptionUtil` is a good solution when it comes to dealing with execution exceptions. When the execution of the operation fails with an exception, an `ExecutionException` is thrown and handled with the method `ExceptionUtil.rethrow(Throwable)`.

If it is an `InterruptedException`, we have two options: either propagate the exception or just use the `ExceptionUtil.rethrow` for all exceptions. Please see the example code below.

```
try {
    final Future<Integer> future = invocation.invoke();
    return future.get();
} catch (InterruptedException e) {
    throw e;
} catch (Exception e) {
    throw ExceptionUtil.rethrow(e);
}
```

10.1.5.5 Implementing the PartitionAwareOperation Interface

Now, let's write the `IncOperation`. It implements the `PartitionAwareOperation` interface, meaning that it will be executed on the partition that hosts the counter. See the [PartitionAwareOperation source code here](#).

The method `run` does the actual execution. Since `IncOperation` will return a response, the method `returnsResponse` returns `true`. If your method is asynchronous and does not need to return a response, it is better to return `false` since it will be faster. The actual response is stored in the field `returnValue`; retrieve it with the method `getResponse`.

There are two more methods in this code: `writeInternal` and `readInternal`. Since `IncOperation` needs to be serialized, these two methods are overridden, and hence, `objectId` and `amount` are serialized and available when those operations are executed.

For the deserialization, note that the operation must have a *no-arg* constructor.

```
import com.hazelcast.nio.ObjectDataInput;
import com.hazelcast.nio.ObjectDataOutput;
import com.hazelcast.spi.AbstractOperation;
import com.hazelcast.spi.PartitionAwareOperation;

import java.io.IOException;

class IncOperation extends AbstractOperation implements PartitionAwareOperation {
    private String objectId;
    private int amount, returnValue;

    // Important to have a no-arg constructor for deserialization
    public IncOperation() {
    }

    public IncOperation(String objectId, int amount) {
        this.amount = amount;
        this.objectId = objectId;
    }

    @Override
    public void run() throws Exception {
        System.out.println("Executing " + objectId + ".inc() on: " + getNodeEngine().getThisAddress());
        returnValue = 0;
    }
}
```

```

@Override
public boolean returnsResponse() {
    return true;
}

@Override
public Object getResponse() {
    return returnValue;
}

@Override
protected void writeInternal(ObjectDataOutput out) throws IOException {
    super.writeInternal(out);
    out.writeUTF(objectId);
    out.writeInt(amount);
}

@Override
protected void readInternal(ObjectDataInput in) throws IOException {
    super.readInternal(in);
    objectId = in.readUTF();
    amount = in.readInt();
}
}

```

10.1.5.6 Running the Code

Now, let's run our code.

```

import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.HazelcastInstance;

import java.util.UUID;

public class Member {
    public static void main(String[] args) {
        HazelcastInstance[] instances = new HazelcastInstance[2];
        for (int k = 0; k < instances.length; k++)
            instances[k] = Hazelcast.newHazelcastInstance();

        Counter[] counters = new Counter[4];
        for (int k = 0; k < counters.length; k++)
            counters[k] = instances[0].getDistributedObject(CounterService.NAME, k+"counter");

        for (Counter counter : counters)
            System.out.println(counter.inc(1));

        System.out.println("Finished");
        System.exit(0);
    }
}

```

Once run, you will see the output as below.

Executing 0counter.inc() on: Address[192.168.1.103]:5702

0

```

Executing 1counter.inc() on: Address[192.168.1.103]:5702
0
Executing 2counter.inc() on: Address[192.168.1.103]:5701
0
Executing 3counter.inc() on: Address[192.168.1.103]:5701
0
Finished

```

Note that counters are stored in different cluster members. Also note that increment is not active for now since the value remains as **0**.

Until now, we have performed the basics to get this up and running. In the next section, we will make a real counter, cache the proxy instances and deal with proxy instance destruction.

10.1.6 Creating Containers

Let's create a Container for every partition in the system. This container will contain all counters and proxies.

```

import java.util.HashMap;
import java.util.Map;

class Container {
    private final Map<String, Integer> values = new HashMap();

    int inc(String id, int amount) {
        Integer counter = values.get(id);
        if (counter == null) {
            counter = 0;
        }
        counter += amount;
        values.put(id, counter);
        return counter;
    }

    public void init(String objectName) {
        values.put(objectName, 0);
    }

    public void destroy(String objectName) {
        values.remove(objectName);
    }

    ...
}

```

Hazelcast guarantees that a single thread will be active in a single partition. Therefore, when accessing a container, concurrency control will not be an issue.

The code in our example uses a **Container** instance per partition approach. With this approach, there will not be any mutable shared state between partitions. This approach also makes operations on partitions simpler since you do not need to filter out data that does not belong to a certain partition.

The code performs the tasks below.

- It creates a container for every partition with the method `init`.
- It creates the proxy with the method `createDistributedObject`.
- It removes the value of the object with the method `destroyDistributedObject`, otherwise we may get an `OutOfMemory` exception.

10.1.6.1 Integrating the Container in the CounterService

Let's integrate the Container in the CounterService, as shown below.

```
import com.hazelcast.spi.ManagedService;
import com.hazelcast.spi.NodeEngine;
import com.hazelcast.spi.RemoteService;

import java.util.HashMap;
import java.util.Map;
import java.util.Properties;

public class CounterService implements ManagedService, RemoteService {
    public final static String NAME = "CounterService";
    Container[] containers;
    private NodeEngine nodeEngine;

    @Override
    public void init(NodeEngine nodeEngine, Properties properties) {
        this.nodeEngine = nodeEngine;
        containers = new Container[nodeEngine.getPartitionService().getPartitionCount()];
        for (int k = 0; k < containers.length; k++)
            containers[k] = new Container();
    }

    @Override
    public void shutdown(boolean terminate) {
    }

    @Override
    public CounterProxy createDistributedObject(String objectName) {
        int partitionId = nodeEngine.getPartitionService().getPartitionId(objectName);
        Container container = containers[partitionId];
        container.init(objectName);
        return new CounterProxy(objectName, nodeEngine, this);
    }

    @Override
    public void destroyDistributedObject(String objectName) {
        int partitionId = nodeEngine.getPartitionService().getPartitionId(objectName);
        Container container = containers[partitionId];
        container.destroy(objectName);
    }

    @Override
    public void reset() {
    }

    public static class Container {
        final Map<String, Integer> values = new HashMap<String, Integer>();

        private void init(String objectName) {
            values.put(objectName, 0);
        }

        private void destroy(String objectName){
            values.remove(objectName);
        }
    }
}
```

```

    }
}

```

10.1.6.2 Connecting the IncOperation.run Method to the Container

As the last step in creating a Container, we connect the method `IncOperation.run` to the Container, as shown below.

`partitionId` has a range between **0** and **partitionCount** and can be used as an index for the container array. Therefore, you can use `partitionId` to retrieve the container, and once the container has been retrieved, you can access the value.

```

import com.hazelcast.nio.ObjectDataInput;
import com.hazelcast.nio.ObjectDataOutput;
import com.hazelcast.spi.AbstractOperation;
import com.hazelcast.spi.PartitionAwareOperation;

import java.io.IOException;
import java.util.Map;

class IncOperation extends AbstractOperation implements PartitionAwareOperation {
    private String objectId;
    private int amount, returnValue;

    public IncOperation() {
    }

    public IncOperation(String objectId, int amount) {
        this.amount = amount;
        this.objectId = objectId;
    }

    @Override
    public void run() throws Exception {
        System.out.println("Executing " + objectId + ".inc() on: " + getNodeEngine().getThisAddress());
        CounterService service = getService();
        CounterService.Container container = service.containers[getPartitionId()];
        Map<String, Integer> valuesMap = container.values;

        Integer counter = valuesMap.get(objectId);
        counter += amount;
        valuesMap.put(objectId, counter);
        returnValue = counter;
    }

    @Override
    public boolean returnsResponse() {
        return true;
    }

    @Override
    public Object getResponse() {
        return returnValue;
    }

    @Override
    protected void writeInternal(ObjectDataOutput out) throws IOException {
        super.writeInternal(out);
    }
}

```

```

        out.writeUTF(objectId);
        out.writeInt(amount);
    }

    @Override
    protected void readInternal(ObjectDataInput in) throws IOException {
        super.readInternal(in);
        objectId = in.readUTF();
        amount = in.readInt();
    }
}

```

10.1.6.3 Running the Sample Code

Let's run the following sample code.

```

import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.HazelcastInstance;

public class Member {
    public static void main(String[] args) {
        HazelcastInstance[] instances = new HazelcastInstance[2];
        for (int k = 0; k < instances.length; k++)
            instances[k] = Hazelcast.newHazelcastInstance();

        Counter[] counters = new Counter[4];
        for (int k = 0; k < counters.length; k++)
            counters[k] = instances[0].getDistributedObject(CounterService.NAME, k+"counter");

        System.out.println("Round 1");
        for (Counter counter: counters)
            System.out.println(counter.inc(1));

        System.out.println("Round 2");
        for (Counter counter: counters)
            System.out.println(counter.inc(1));

        System.out.println("Finished");
        System.exit(0);
    }
}

```

The output will be as follows. It indicates that we have now a basic distributed counter up and running.

```

Round 1
Executing 0counter.inc() on: Address[192.168.1.103]:5702
1
Executing 1counter.inc() on: Address[192.168.1.103]:5702
1
Executing 2counter.inc() on: Address[192.168.1.103]:5701
1
Executing 3counter.inc() on: Address[192.168.1.103]:5701
1
Round 2
Executing 0counter.inc() on: Address[192.168.1.103]:5702
2
Executing 1counter.inc() on: Address[192.168.1.103]:5702

```

```

2
Executing 2counter.inc() on: Address[192.168.1.103]:5701
2
Executing 3counter.inc() on: Address[192.168.1.103]:5701
2
Finished

```

10.1.7 Partition Migration

In the previous section, we created a real distributed counter. Now, we need to make sure that the content of the partition containers is migrated to different cluster members when a member joins or leaves the cluster. To make this happen, first we need to add three new methods (`applyMigrationData`, `toMigrationData` and `clear`) to the `Container`.

- `toMigrationData`: This method is called when Hazelcast wants to start the partition migration from the member owning the partition. The result of the `toMigrationData` method is the partition data in a form that can be serialized to another member.
- `applyMigrationData`: This method is called when `migrationData` (created by the method `toMigrationData`) will be applied to the member that will be the new partition owner.
- `clear`: This method is called when the partition migration is successfully completed and the old partition owner gets rid of all data in the partition. This method is also called when the partition migration operation fails and the to-be-the-new partition owner needs to roll back its changes.

```

import java.util.HashMap;
import java.util.Map;

class Container {
    private final Map<String, Integer> values = new HashMap();

    int inc(String id, int amount) {
        Integer counter = values.get(id);
        if (counter == null) {
            counter = 0;
        }
        counter += amount;
        values.put(id, counter);
        return counter;
    }

    void clear() {
        values.clear();
    }

    void applyMigrationData(Map<String, Integer> migrationData) {
        values.putAll(migrationData);
    }

    Map<String, Integer> toMigrationData() {
        return new HashMap(values);
    }

    public void init(String objectName) {
        values.put(objectName, 0);
    }

    public void destroy(String objectName) {
        values.remove(objectName);
    }
}

```



```
    }
}
```

10.1.7.1 Transferring migrationData

After you add these three methods to the `Container`, you need to create a `CounterMigrationOperation` class that transfers `migrationData` from one member to another and calls the method `applyMigrationData` on the correct partition of the new partition owner.

An example is shown below.

```
import com.hazelcast.nio.ObjectDataInput;
import com.hazelcast.nio.ObjectDataOutput;
import com.hazelcast.spi.AbstractOperation;

import java.io.IOException;
import java.util.HashMap;
import java.util.Map;

public class CounterMigrationOperation extends AbstractOperation {

    Map<String, Integer> migrationData;

    public CounterMigrationOperation() {
    }

    public CounterMigrationOperation(Map<String, Integer> migrationData) {
        this.migrationData = migrationData;
    }

    @Override
    public void run() throws Exception {
        CounterService service = getService();
        Container container = service.containers[getPartitionId()];
        container.applyMigrationData(migrationData);
    }

    @Override
    protected void writeInternal(ObjectDataOutput out) throws IOException {
        out.writeInt(migrationData.size());
        for (Map.Entry<String, Integer> entry : migrationData.entrySet()) {
            out.writeUTF(entry.getKey());
            out.writeInt(entry.getValue());
        }
    }

    @Override
    protected void readInternal(ObjectDataInput in) throws IOException {
        int size = in.readInt();
        migrationData = new HashMap<String, Integer>();
        for (int i = 0; i < size; i++)
            migrationData.put(in.readUTF(), in.readInt());
    }
}
```



NOTE: During a partition migration, no other operations are executed on the related partition.

10.1.7.2 Letting Hazelcast Know CounterService Can Do Partition Migrations

We need to make our `CounterService` class implement the `MigrationAwareService` interface. This will let Hazelcast know that the `CounterService` can perform partition migration.

With the `MigrationAwareService` interface, some additional methods are exposed. For example, the method `prepareMigrationOperation` returns all the data of the partition that is going to be moved. You can read the [MigrationAwareService source code here](#).

The method `commitMigration` commits the data, meaning that in this case, it clears the partition container of the old owner.

```
import com.hazelcast.core.DistributedObject;
import com.hazelcast.partition.MigrationEndpoint;
import com.hazelcast.spi.*;

import java.util.Map;
import java.util.Properties;

public class CounterService implements ManagedService, RemoteService, MigrationAwareService {
    public final static String NAME = "CounterService";
    Container[] containers;
    private NodeEngine nodeEngine;

    @Override
    public void init(NodeEngine nodeEngine, Properties properties) {
        this.nodeEngine = nodeEngine;
        containers = new Container[nodeEngine.getPartitionService().getPartitionCount()];
        for (int k = 0; k < containers.length; k++)
            containers[k] = new Container();
    }

    @Override
    public void shutdown(boolean terminate) {
    }

    @Override
    public DistributedObject createDistributedObject(String objectName) {
        int partitionId = nodeEngine.getPartitionService().getPartitionId(objectName);
        Container container = containers[partitionId];
        container.init(objectName);
        return new CounterProxy(objectName, nodeEngine, this);
    }

    @Override
    public void destroyDistributedObject(String objectName) {
        int partitionId = nodeEngine.getPartitionService().getPartitionId(objectName);
        Container container = containers[partitionId];
        container.destroy(objectName);
    }

    @Override
    public void beforeMigration(PartitionMigrationEvent e) {
        //no-op
    }

    @Override
    public void clearPartitionReplica(int partitionId) {
        Container container = containers[partitionId];
    }
}
```

```

        container.clear();
    }

    @Override
    public Operation prepareReplicationOperation(PartitionReplicationEvent e) {
        if (e.getReplicaIndex() > 1) {
            return null;
        }
        Container container = containers[e.getPartitionId()];
        Map<String, Integer> data = container.toMigrationData();
        return data.isEmpty() ? null : new CounterMigrationOperation(data);
    }

    @Override
    public void commitMigration(PartitionMigrationEvent e) {
        if (e.getMigrationEndpoint() == MigrationEndpoint.SOURCE) {
            Container c = containers[e.getPartitionId()];
            c.clear();
        }

        //todo
    }

    @Override
    public void rollbackMigration(PartitionMigrationEvent e) {
        if (e.getMigrationEndpoint() == MigrationEndpoint.DESTINATION) {
            Container c = containers[e.getPartitionId()];
            c.clear();
        }
    }

    @Override
    public void reset() {
    }
}

```

10.1.7.3 Running the Sample Code

We can run the following code.

```

import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.HazelcastInstance;

public class Member {
    public static void main(String[] args) throws Exception {
        HazelcastInstance[] instances = new HazelcastInstance[3];
        for (int k = 0; k < instances.length; k++)
            instances[k] = Hazelcast.newHazelcastInstance();

        Counter[] counters = new Counter[4];
        for (int k = 0; k < counters.length; k++)
            counters[k] = instances[0].getDistributedObject(CounterService.NAME, k + "counter");

        for (Counter counter : counters)
            System.out.println(counter.inc(1));

        Thread.sleep(10000);
    }
}

```

```

    System.out.println("Creating new members");

    for (int k = 0; k < 3; k++) {
        Hazelcast.newHazelcastInstance();
    }

    Thread.sleep(10000);

    for (Counter counter : counters)
        System.out.println(counter.inc(1));

    System.out.println("Finished");
    System.exit(0);
}
}

```

And we get the following output.

```

Executing 0counter.inc() on: Address[192.168.1.103]:5702
Executing backup 0counter.inc() on: Address[192.168.1.103]:5703
1
Executing 1counter.inc() on: Address[192.168.1.103]:5703
Executing backup 1counter.inc() on: Address[192.168.1.103]:5701
1
Executing 2counter.inc() on: Address[192.168.1.103]:5701
Executing backup 2counter.inc() on: Address[192.168.1.103]:5703
1
Executing 3counter.inc() on: Address[192.168.1.103]:5701
Executing backup 3counter.inc() on: Address[192.168.1.103]:5703
1
Creating new members
Executing 0counter.inc() on: Address[192.168.1.103]:5705
Executing backup 0counter.inc() on: Address[192.168.1.103]:5703
2
Executing 1counter.inc() on: Address[192.168.1.103]:5703
Executing backup 1counter.inc() on: Address[192.168.1.103]:5704
2
Executing 2counter.inc() on: Address[192.168.1.103]:5705
Executing backup 2counter.inc() on: Address[192.168.1.103]:5704
2
Executing 3counter.inc() on: Address[192.168.1.103]:5704
Executing backup 3counter.inc() on: Address[192.168.1.103]:5705
2
Finished

```

You can see that the counters have moved. `0counter` moved from `192.168.1.103:5702` to `192.168.1.103:5705` and it is incremented correctly. Our counters can now move around in the cluster. You will see the counters will be redistributed once you add or remove a cluster member.

10.1.8 Creating Backups

Finally, we make sure that the counter data is available on another member when a member goes down. To do this, have the `IncOperation` class implement the `BackupAwareOperation` interface contained in the SPI package. See the following code.

```

class IncOperation extends AbstractOperation
    implements PartitionAwareOperation, BackupAwareOperation {
    ...

    @Override
    public int getAsyncBackupCount() {
        return 0;
    }

    @Override
    public int getSyncBackupCount() {
        return 1;
    }

    @Override
    public boolean shouldBackup() {
        return true;
    }

    @Override
    public Operation getBackupOperation() {
        return new IncBackupOperation(objectId, amount);
    }
}

```

The methods `getAsyncBackupCount` and `getSyncBackupCount` specify the count for asynchronous and synchronous backups. Our sample has one synchronous backup and no asynchronous backups. In the above code, counts of the backups are hard-coded, but they can also be passed to `IncOperation` as parameters.

The method `shouldBackup` specifies whether our `Operation` needs a backup or not. For our sample, it returns `true`, meaning the `Operation` will always have a backup even if there are no changes. Of course, in real systems, we want to have backups if there is a change. For `IncOperation` for example, having a backup when `amount` is null would be a good practice.

The method `getBackupOperation` returns the operation (`IncBackupOperation`) that actually performs the backup creation; the backup itself is an operation and will run on the same infrastructure.

If a backup should be made and `getSyncBackupCount` returns `3`, then three `IncBackupOperation` instances are created and sent to the three machines containing the backup partition. If fewer machines are available, then backups need to be created. Hazelcast will just send a smaller number of operations.

10.1.8.1 Performing the Backup with `IncBackupOperation`

Now, let's have a look at the `IncBackupOperation`. It implements `BackupOperation`, you can see the [source code for BackupOperation here](#).

```

public class IncBackupOperation
    extends AbstractOperation implements BackupOperation {
    private String objectId;
    private int amount;

    public IncBackupOperation() {
    }

    public IncBackupOperation(String objectId, int amount) {
        this.amount = amount;
        this.objectId = objectId;
    }
}

```

```

@Override
protected void writeInternal(ObjectDataOutput out) throws IOException {
    super.writeInternal(out);
    out.writeUTF(objectId);
    out.writeInt(amount);
}

@Override
protected void readInternal(ObjectDataInput in) throws IOException {
    super.readInternal(in);
    objectId = in.readUTF();
    amount = in.readInt();
}

@Override
public void run() throws Exception {
    CounterService service = getService();
    System.out.println("Executing backup " + objectId + ".inc() on: "
        + getNodeEngine().getThisAddress());
    Container c = service.containers[getPartitionId()];
    c.inc(objectId, amount);
}
}

```



NOTE: Hazelcast will also make sure that a new *IncOperation* for that particular key will not be executed before the (synchronous) backup operation has completed.

10.1.8.2 Running the Sample Code

Let's see the backup functionality in action with the following code.

```

public class Member {
    public static void main(String[] args) throws Exception {
        HazelcastInstance[] instances = new HazelcastInstance[2];
        for (int k = 0; k < instances.length; k++)
            instances[k] = Hazelcast.newHazelcastInstance();

        Counter counter = instances[0].getDistributedObject(CounterService.NAME, "counter");
        counter.inc(1);
        System.out.println("Finished");
        System.exit(0);
    }
}

```

Once it is run, the following output will be seen.

```

Executing counter0.inc() on: Address[192.168.1.103]:5702
Executing backup counter0.inc() on: Address[192.168.1.103]:5701
Finished

```

As it can be seen, both *IncOperation* and *IncBackupOperation* are executed. Notice that these operations have been executed on different cluster members to guarantee high availability.

10.2 WaitNotifyService

`WaitNotifyService` is an interface offered by SPI for the objects (e.g. Lock, Semaphore) to be used when a thread needs to wait for a lock to be released. You can see the [WaitNotifyService source code here](#).

`WaitNotifyService` keeps a list of waiters. For each notify operation:

- it looks for a waiter,
- it asks the waiter whether it wants to keep waiting,
- if the waiter responds *no*, the service executes its registered operation (operation itself knows where to send a response),
- it rinses and repeats until a waiter wants to keep waiting.

Each waiter can sit on a wait-notify queue for, at most, its operation's call timeout. For example, by default, each waiter can wait here for at most 1 minute. A continuous task scans expired/timed-out waiters and invalidates them with `CallTimeoutException`. Each waiter on the remote side should retry and keep waiting if it still wants to wait. This is a liveness check for remote waiters.

This way, it is possible to distinguish an unresponsive node and a long (~infinite) wait. On the caller side, if the waiting thread does not get a response for either a call timeout or for more than *2 times the call-timeout*, it will exit with `OperationTimeoutException`.

Note that this behavior breaks the fairness. Hazelcast does not support fairness for any of the data structures with blocking operations (i.e. lock and semaphore).

Chapter 11

Transactions

You can use Hazelcast in transactional context.

11.1 Creating a Transaction Interface

You create a `TransactionContext` object to begin, commit, and rollback a transaction. You can obtain transaction-aware instances of queues, maps, sets, lists, multimaps via `TransactionContext`, work with them, and commit/rollback in one shot. You can see the [TransactionContext source code here](#).

Hazelcast supports two types of transactions: `LOCAL` (One Phase) and `TWO_PHASE`. With the type, you have influence over how much guarantee you get when a member crashes while a transaction is committing. The default behavior is `TWO_PHASE`.

- **LOCAL:** Unlike the name suggests, `LOCAL` is a two phase commit. First, all cohorts are asked to prepare; if everyone agrees, then all cohorts are asked to commit. A problem can happen during the commit phase; if one or more members crash, then the system could be left in an inconsistent state.
- **TWO_PHASE:** The `TWO_PHASE` commit is more than the classic two phase commit (if you want a regular two phase commit, use `local`). Before `TWO_PHASE` commits, it copies the commit log to other members, so in case of member failure, another member can complete the commit.

```
import java.util.Queue;
import java.util.Map;
import java.util.Set;
import com.hazelcast.core.Hazelcast;
import com.hazelcast.core.Transaction;
```

```
HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
```

```
TransactionOptions options = new TransactionOptions()
    .setTransactionType( TransactionType.LOCAL );
```

```
TransactionContext context = hazelcastInstance.newTransactionContext( options );
context.beginTransaction();
```

```
TransactionalQueue queue = context.getQueue( "myqueue" );
TransactionalMap map = context.getMap( "mymap" );
TransactionalSet set = context.getSet( "myset" );
```

```
try {
    Object obj = queue.poll();
    //process obj
}
```

```

map.put( "1", "value1" );
set.add( "value" );
//do other things..
context.commitTransaction();
} catch ( Throwable t ) {
    context.rollbackTransaction();
}

```

In a transaction, operations will not be executed immediately. Their changes will be local to the `TransactionContext` until committed. However, they will ensure the changes via locks.

For the above example, when `map.put` is executed, no data will be put in the map but the key will be locked against changes. While committing, operations will be executed, the value will be put to the map, and the key will be unlocked.

Isolation level in Hazelcast Transactions is `READ_COMMITTED`. If you are in a transaction, you can read the data in your transaction and the data that is already committed. If you are not in a transaction, you can only read the committed data.



NOTE: The `REPEATABLE_READ` isolation level can also be exercised using the method `getForUpdate()` of `TransactionalMap`.

11.1.1 Queue/Set/List vs. Map/Multimap

Hazelcast implements queue/set/list operations differently than map/multimap operations. For queue operations (offer, poll), offered and/or polled objects are copied to the owner member in order to safely commit/rollback. For map/multimap, Hazelcast first acquires the locks for the write operations (put, remove) and holds the differences (what is added/removed/updated) locally for each transaction. When the transaction is set to commit, Hazelcast will release the locks and apply the differences. When rolling back, Hazelcast will release the locks and discard the differences.

`MapStore` and `QueueStore` do not participate in transactions. Hazelcast will suppress exceptions thrown by store in a transaction. Please refer to the XA Transactions section for further information.

11.1.2 LOCAL vs. TWO_PHASE

As discussed in [Creating a Transaction Interface](#), when you choose `LOCAL` as the transaction type, Hazelcast tracks all changes you make locally in a commit log, i.e. a list of changes. In this case, all the other members are asked to agree that the commit can succeed and once they agree, Hazelcast starts to write the changes. However, if the member that initiates the commit crashes after it has written to at least one member (but has not completed writing to all other members), your system may be left in an inconsistent state.

On the other hand, if you choose `TWO_PHASE` as the transaction type, the commit log is again tracked locally but it is copied to another cluster member. Therefore, when a failure happens (e.g. the member initiating the commit crashes), you still have the commit log in another member and that member can complete the commit. However, copying the commit log to another member makes the `TWO_PHASE` approach slow.

Consequently, it is recommended that you choose `LOCAL` as the transaction type if you want a better performance, and that you choose `TWO_PHASE` if reliability of your system is more important than the performance.

11.2 Providing XA Transactions

XA describes the interface between the global transaction manager and the local resource manager. XA allows multiple resources (such as databases, application servers, message queues, transactional caches, etc.) to be accessed within the same transaction, thereby preserving the ACID properties across applications. XA uses a two-phase commit to ensure that all resources either commit or rollback any particular transaction consistently (all do the same).

When you implement the `XAResource` interface, Hazelcast provides XA transactions. You can obtain the `HazelcastXAResource` instance via the `HazelcastInstance` `getXAResource` method. You can see the [HazelcastXAResource source code here](#).

Below is example code that uses Atomikos for transaction management.

```
UserTransactionManager tm = new UserTransactionManager();
tm.setTransactionTimeout(60);
tm.begin();

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
HazelcastXAResource xaResource = hazelcastInstance.getXAResource();

Transaction transaction = tm.getTransaction();
transaction.enlistResource(xaResource);
// other resources (database, app server etc...) can be enlisted

try {
    TransactionContext context = xaResource.getTransactionContext();
    TransactionalMap map = context.getMap("m");
    map.put("key", "value");
    // other resource operations

    transaction.delistResource(xaResource, XAResource.TMSUCCESS);
    tm.commit();
} catch (Exception e) {
    tm.rollback();
}
```

11.3 Integrating into J2EE

You can integrate Hazelcast into J2EE containers via the Hazelcast Resource Adapter (`hazelcast-jca-rar-version.rar`). After proper configuration, Hazelcast can participate in standard J2EE transactions.

```
<%@page import="javax.resource.ResourceException" %>
<%@page import="javax.transaction.*" %>
<%@page import="javax.naming.*" %>
<%@page import="javax.resource.cci.*" %>
<%@page import="java.util.*" %>
<%@page import="com.hazelcast.core.*" %>
<%@page import="com.hazelcast.jca.*" %>

<%
UserTransaction txn = null;
HazelcastConnection conn = null;
HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();

try {
    Context context = new InitialContext();
    txn = (UserTransaction) context.lookup( "java:comp/UserTransaction" );
    txn.begin();

    HazelcastConnectionFactory cf = (HazelcastConnectionFactory)
        context.lookup ( "java:comp/env/HazelcastCF" );

    conn = cf.getConnection();
```

```

TransactionalMap<String, String> txMap = conn.getTransactionMap( "default" );
txMap.put( "key", "value" );

txn.commit();

} catch ( Throwable e ) {
    if ( txn != null ) {
        try {
            txn.rollback();
        } catch ( Exception ix ) {
            ix.printStackTrace();
        };
    }
    e.printStackTrace();
} finally {
    if ( conn != null ) {
        try {
            conn.close();
        } catch (Exception ignored) {};
    }
}
%>

```

11.3.1 Sample Code for J2EE Integration

Please see our sample application for J2EE Integration.

11.3.2 Configuring Resource Adapter

Deploying and configuring the Hazelcast resource adapter is no different than configuring any other resource adapter since the Hazelcast resource adapter is a standard JCA one. However, resource adapter installation and configuration is container specific, so please consult your J2EE vendor documentation for details. The most common steps are:

1. Add the `hazelcast-version.jar` and `hazelcast-jca-version.jar` to the container's classpath. Usually there is a lib directory that is loaded automatically by the container on startup.
2. Deploy `hazelcast-jca-rar-version.rar`. Usually there is some kind of a deploy directory. The name of the directory varies by container.
3. Make container specific configurations when/after deploying `hazelcast-jca-rar-version.rar`. In addition to container specific configurations, set the JNDI name for the Hazelcast resource.
4. Configure your application to use the Hazelcast resource. Update `web.xml` and/or `ejb-jar.xml` to let the container know that your application will use the Hazelcast resource, and define the resource reference.
5. Make the container specific application configuration to specify the JNDI name used for the resource in the application.

11.3.3 Configuring a Glassfish v3 Web Application

To configure an example Glassfish v3 web application:

1. Place the `hazelcast-version.jar` and `hazelcast-jca-version.jar` into the `GLASSFISH_HOME/glassfish/domains/domain1/lib/ext/` folder.
2. Place the `hazelcast-jca-rar-version.rar` into `GLASSFISH_HOME/glassfish/domains/domain1/autodeploy/` folder.
3. Add the following lines to the `web.xml` file.

```
<resource-ref>
  <res-ref-name>HazelcastCF</res-ref-name>
  <res-type>com.hazelcast.jca.ConnectionFactoryImpl</res-type>
  <res-auth>Container</res-auth>
</resource-ref>
```

Notice that we did not have to put `sun-ra.xml` into the RAR file since it already comes with the `hazelcast-ra-version.rar` file.

If the Hazelcast resource is used from EJBs, you should configure `ejb-jar.xml` for resource reference and JNDI definitions, just like for the `web.xml` file.

11.3.4 Configuring a JBoss AS 5 Web Application

To configure a JBoss AS 5 web application:

- Place the `hazelcast-version.jar` and `hazelcast-jca-version.jar` into the `JBOSS_HOME/server/deploy/default/lib` folder.
- Place the `hazelcast-jca-rar-version.rar` into the `JBOSS_HOME/server/deploy/default/deploy` folder.
- Create a `hazelcast-ds.xml` file containing the following content in the `JBOSS_HOME/server/deploy/default/deploy` folder. Make sure to set the `rar-name` element to `hazelcast-ra-version.rar`.

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE connection-factories
  PUBLIC "-//JBoss//DTD JBoss JCA Config 1.5//EN"
  "http://www.jboss.org/j2ee/dtd/jboss-ds_1_5.dtd">

<connection-factories>
  <tx-connection-factory>
    <local-transaction/>
    <track-connection-by-tx>true</track-connection-by-tx>
    <jndi-name>HazelcastCF</jndi-name>
    <rar-name>hazelcast-jca-rar-<version>.rar</rar-name>
    <connection-definition>
      javax.resource.cci.ConnectionFactory
    </connection-definition>
  </tx-connection-factory>
</connection-factories>
```

- Add the following lines to the `web.xml` file.

```
<resource-ref>
  <res-ref-name>HazelcastCF</res-ref-name>
  <res-type>com.hazelcast.jca.ConnectionFactoryImpl</res-type>
  <res-auth>Container</res-auth>
</resource-ref>
```

- Add the following lines to the `jboss-web.xml` file.

```
<resource-ref>
  <res-ref-name>HazelcastCF</res-ref-name>
  <jndi-name>java:HazelcastCF</jndi-name>
</resource-ref>
```

If the Hazelcast resource is used from EJBs, you should configure `ejb-jar.xml` and `jboss.xml` for resource reference and JNDI definitions.

11.3.5 Configuring a JBoss AS 7 / EAP 6 Web Application

Deploying on JBoss AS 7 or JBoss EAP 6 is a straightforward process. The steps you perform are shown below. The only non-trivial step is the creation of a new JBoss module with Hazelcast libraries.

- Create the folder `<jboss_home>/modules/system/layers/base/com/hazelcast/main`.
- Place the `hazelcast-<version>.jar` and `hazelcast-jca-<version>.jar` into the folder you created in the previous step.
- Create the file `module.xml` and place it in the same folder. This file should have the following content.

```
<module xmlns="urn:jboss:module:1.0" name="com.hazelcast">
  <resources>
    <resource-root path="."/>
    <resource-root path="hazelcast-<version>.jar"/>
    <resource-root path="hazelcast-jca-<version>.jar"/>
  </resources>
  <dependencies>
    <module name="sun.jdk"/>
    <module name="javax.api"/>
    <module name="javax.resource.api"/>
    <module name="javax.validation.api"/>
    <module name="org.jboss.ironjacamar.api"/>
  </dependencies>
</module>
```

11.3.5.1 Starting JBoss

At this point, you have a new JBoss module with Hazelcast in it. You can now start JBoss and deploy the `hazelcast-jca-rar-<version>.rar` file via JBoss CLI or Administration Console.

11.3.5.2 Using the Resource Adapter

Once the Hazelcast Resource Adapter is deployed, you can start using it. The easiest way is to let a container inject `ConnectionFactory` into your beans.

```
package com.hazelcast.examples.rar;

import com.hazelcast.core.TransactionalMap;
import com.hazelcast.jca.HazelcastConnection;

import javax.annotation.Resource;
import javax.resource.ResourceException;
import javax.resource.cci.ConnectionFactory;
import java.util.logging.Level;
import java.util.logging.Logger;

@javax.ejb.Stateless
public class ExampleBean implements ExampleInterface {
    private final static Logger log = Logger.getLogger(ExampleBean.class.getName());

    @Resource(mappedName = "java:/HazelcastCF")
    protected ConnectionFactory connectionFactory;

    public void insert(String key, String value) {
        HazelcastConnection hzConn = null;
```

```

        try {
            hzConn = getConnection();
            TransactionalMap<String,String> txmap = hzConn.getTransactionMap("txmap");
            txmap.put(key, value);
        } finally {
            closeConnection(hzConn);
        }
    }

    private HazelcastConnection getConnection() {
        try {
            return (HazelcastConnection) connectionFactory.getConnection();
        } catch (ResourceException e) {
            throw new RuntimeException("Error while getting Hazelcast connection", e);
        }
    }

    private void closeConnection(HazelcastConnection hzConn) {
        if (hzConn != null) {
            try {
                hzConn.close();
            } catch (ResourceException e) {
                log.log(Level.WARNING, "Error while closing Hazelcast connection.", e);
            }
        }
    }
}

```

11.3.5.3 Known Issues

- There is a regression in JBoss EAP 6.1.0 causing failure during Hazelcast Resource Adapter deployment. The issue is fixed in JBoss EAP 6.1.1. Please see this for additional details.

Chapter 12

Hazelcast JCache

This chapter describes the basics of JCache: the standardized Java caching layer API. The JCache caching API is specified by the Java Community Process (JCP) as Java Specification Request (JSR) 107.

Caching keeps data in memory that either are slow to calculate/process or originate from another underlying backend system. Caching is used to prevent additional request round trips for frequently used data. In both cases, caching could be used to gain performance or decrease application latencies.

12.1 JCache Overview

Starting with Hazelcast release 3.3.1, Hazelcast offers a specification compliant JCache implementation. To show our commitment to this important specification that the Java world was waiting for over a decade, we do not just provide a simple wrapper around our existing APIs; we implemented a caching structure from the ground up to optimize the behavior to the needs of JCache. The Hazelcast JCache implementation is 100% TCK (Technology Compatibility Kit) compliant and therefore passes all specification requirements.

In addition to the given specification, we added some features like asynchronous versions of almost all operations to give the user extra power.

This chapter gives a basic understanding of how to configure your application and how to setup Hazelcast to be your JCache provider. It also shows examples of basic JCache usage as well as the additionally offered features that are not part of JSR-107. To gain a full understanding of the JCache functionality and provided guarantees of different operations, read the specification document (which is also the main documentation for functionality) at the specification page of JSR-107.

12.2 JCache Setup and Configuration

This sub-chapter shows what is necessary to provide the JCache API and the Hazelcast JCache implementation for your application. In addition, it demonstrates the different configuration options as well as a description of the configuration properties.

12.2.1 Setting up Your Application

To provide your application with this JCache functionality, your application needs the JCache API inside its classpath. This API is the bridge between the specified JCache standard and the implementation provided by Hazelcast.

The way to integrate the JCache API JAR into the application classpath depends on the build system used. For Maven, Gradle, SBT, Ivy and many other build systems, all using Maven based dependency repositories, perform the integration by adding the Maven coordinates to the build descriptor.

As already mentioned, next to the default Hazelcast coordinates that might be already part of the application, you have to add JCache coordinates.

For Maven users, the coordinates look like the following code:

```
<dependency>
  <groupId>javax.cache</groupId>
  <artifactId>cache-api</artifactId>
  <version>1.0.0</version>
</dependency>
```

With other build systems, you might need to describe the coordinates in a different way.

12.2.1.1 Activating Hazelcast as JCache Provider

To activate Hazelcast as the JCache provider implementation, add either `hazelcast-all.jar` or `hazelcast.jar` to the classpath (if not already available) by either one of the following Maven snippets.

If you use `hazelcast-all.jar`:

```
<dependency>
  <groupId>com.hazelcast</groupId>
  <artifactId>hazelcast-all</artifactId>
  <version>3.4</version>
</dependency>
```

If you use `hazelcast.jar`:

```
<dependency>
  <groupId>com.hazelcast</groupId>
  <artifactId>hazelcast</artifactId>
  <version>3.4</version>
</dependency>
```

The users of other build systems have to adjust the way of defining the dependency to their needs.

12.2.1.2 Connecting Clients to Remote Server

When the users want to use Hazelcast clients to connect to a remote cluster, the `hazelcast-client.jar` dependency is also required on the client side applications. This JAR is already included in `hazelcast-all.jar`. Or, you can add it to the classpath using the following Maven snippet:

```
<dependency>
  <groupId>com.hazelcast</groupId>
  <artifactId>hazelcast</artifactId>
  <version>3.4</version>
</dependency>
```

For other build systems, e.g. ANT, the users have to download these dependencies from either the JSR-107 specification and Hazelcast community website (<http://www.hazelcast.org>) or from the Maven repository search page (<http://search.maven.org>).

12.2.2 Example JCache Application

Before moving on to configuration, let's have a look at a basic introductory example. The following code shows how to use the Hazelcast JCache integration inside an application in an easy but typesafe way.

```
// Retrieve the CachingProvider which is automatically backed by
// the chosen Hazelcast server or client provider
CachingProvider cachingProvider = Caching.getCachingProvider();

// Create a CacheManager
CacheManager cacheManager = cachingProvider.getCacheManager();

// Create a simple but typesafe configuration for the cache
CompleteConfiguration<String, String> config =
    new MutableConfiguration<String, String>()
        .setTypes( String.class, String.class );

// Create and get the cache
Cache<String, String> cache = cacheManager.createCache( "example", config );
// Alternatively to request an already existing cache
// Cache<String, String> cache = cacheManager
//     .getCache( name, String.class, String.class );

// Put a value into the cache
cache.put( "world", "Hello World" );

// Retrieve the value again from the cache
String value = cache.get( "world" );

// Print the value 'Hello World'
System.out.println( value );
```

Although the example is simple, let's go through the code lines one by one.

12.2.2.1 Getting the Hazelcast JCache Implementation

First of all, we retrieve the `javax.cache.spi.CachingProvider` using the static method from `javax.cache.Caching::getCachingManager` which automatically picks up Hazelcast as the underlying JCache implementation, if available in the classpath. This way, the Hazelcast implementation of a `CachingProvider` will automatically start a new Hazelcast node or client (depending on the chosen provider type) and pick up the configuration from either the command line parameter or from the classpath. We will show how to use an existing `HazelcastInstance` later in this chapter, for now we keep it simple.

12.2.2.2 Setting up the JCache Entry Point

In the next line, we ask the `CachingProvider` to return a `javax.cache.CacheManager`. This is the general application's entry point into JCache. The `CachingProvider` creates and manages named caches.

12.2.2.3 Configuring the Cache Before Creating It

The next few lines create a simple `javax.cache.configuration.MutableConfiguration` to configure the cache before actually creating it. In this case, we only configure the key and value types to make the cache typesafe which is highly recommended and checked on retrieval of the cache.

12.2.2.4 Creating the Cache

To create the cache, we call `javax.cache.CacheManager::createCache` with a name for the cache and the previously created configuration; the call returns the created cache. If you need to retrieve a previously created cache, you can use the corresponding method overload `javax.cache.CacheManager::getCache`. If the cache was created using type parameters, you must retrieve the cache afterward using the type checking version of `getCache`.

12.2.2.5 get, put, and getAndPut

The following lines are simple `put` and `get` calls from the `java.util.Map` interface. The `javax.cache.Cache::put` has a `void` return type and does not return the previously assigned value of the key. To imitate the `java.util.Map::put` method, the JCache cache has a method called `getAndPut`.

12.2.3 Configuring for JCache

Hazelcast JCache provides two different ways for you to perform cache configuration:

- programmatically: the typical Hazelcast way, using the Config API seen above,
- and declaratively: using `hazelcast.xml` or `hazelcast-client.xml`.

12.2.3.1 JCache Declarative Configuration

You can declare your JCache cache configuration using the `hazelcast.xml` or `hazelcast-client.xml` configuration files. Using this declarative configuration makes creating the `javax.cache.Cache` fully transparent and automatically ensures internal thread safety. You do not need a call to `javax.cache.Cache::createCache` in this case: you can retrieve the cache using `javax.cache.Cache::getCache` overloads and by passing in the name defined in the configuration for the cache.

To retrieve the cache that you defined in the declaration files, you need only perform a simple call (example below) because the cache is created automatically by the implementation.

```
CachingProvider cachingProvider = Caching.getCachingProvider();
CacheManager cacheManager = cachingProvider.getCacheManager();
Cache<Object, Object> cache = cacheManager
    .getCache("default", Object.class, Object.class );
```

Note that this section only describes the JCache provided standard properties. For the Hazelcast specific properties, please see the [ICache Configuration section](#).

```
<cache name="default">
  <key-type class-name="java.lang.Object" />
  <value-type class-name="java.lang.Object" />
  <statistics-enabled>false</statistics-enabled>
  <management-enabled>false</management-enabled>

  <read-through>true</read-through>
  <write-through>true</write-through>
  <cache-loader-factory
    class-name="com.example.cache.MyCacheLoaderFactory" />
  <cache-writer-factory
    class-name="com.example.cache.MyCacheWriterFactory" />
  <expiry-policy-factory
    class-name="com.example.cache.MyExpirePolicyFactory" />

  <cache-entry-listeners>
```

```

<cache-entry-listener old-value-required="false" synchronous="false">
  <cache-entry-listener-factory
    class-name="com.example.cache.MyEntryListenerFactory" />
  <cache-entry-event-filter-factory
    class-name="com.example.cache.MyEntryEventFilterFactory" />
</cache-entry-listener>
...
</cache-entry-listeners>
</cache>

```

- **key-type#class-name:** Fully qualified class name of the cache key type. Its default value is `java.lang.Object`.
- **value-type#class-name:** Fully qualified class name of the cache value type. Its default value is `java.lang.Object`.
- **statistics-enabled:** If set to true, statistics like cache hits and misses are collected. Its default value is false.
- **management-enabled:** If set to true, JMX beans are enabled and collected statistics are provided. It doesn't automatically enable statistics collection. Defaults to false.
- **read-through:** If set to true, enables read-through behavior of the cache to an underlying configured `javax.cache.integration.CacheLoader` which is also known as lazy-loading. Its default value is false.
- **write-through:** If set to true, enables write-through behavior of the cache to an underlying configured `javax.cache.integration.CacheWriter` which passes any changed value to the external backend resource. Its default value is false.
- **cache-loader-factory#class-name:** Fully qualified class name of the `javax.cache.configuration.Factory` implementation providing a `javax.cache.integration.CacheLoader` instance to the cache.
- **cache-writer-factory#class-name:** Fully qualified class name of the `javax.cache.configuration.Factory` implementation providing a `javax.cache.integration.CacheWriter` instance to the cache.
- **expiry-policy-factory#-class-name:** Fully qualified class name of the `javax.cache.configuration.Factory` implementation providing a `javax.cache.expiry.ExpiryPolicy` instance to the cache.
- **cache-entry-listener:** A set of attributes and elements, explained below, to describe a `javax.cache.event.CacheEntryListener`.
 - **cache-entry-listener#old-value-required:** If set to true, previously assigned values for the affected keys will be sent to the `javax.cache.event.CacheEntryListener` implementation. Setting this attribute to true creates additional traffic. Its default value is false.
 - **cache-entry-listener#synchronous:** If set to true, the `javax.cache.event.CacheEntryListener` implementation will be called in a synchronous manner. Its default value is false.
 - **cache-entry-listener/entry-listener-factory#class-name:** Fully qualified class name of the `javax.cache.configuration.Factory` implementation providing a `javax.cache.event.CacheEntryListener` instance.
 - **cache-entry-listener/entry-event-filter-factory#class-name:** Fully qualified class name of the `javax.cache.configuration.Factory` implementation providing a `javax.cache.event.CacheEntryEventFilter` instance.



NOTE: The JMX MBeans provided by Hazelcast JCache show statistics of the local node only. To show the cluster-wide statistics, the user should collect statistic information from all nodes and accumulate them to the overall statistics.

12.2.3.2 JCache Programmatic Configuration

To configure the JCache programmatically:

- either instantiate `javax.cache.configuration.MutableConfiguration` if you will use only the JCache standard configuration,
- or instantiate `com.hazelcast.config.CacheConfig` for a deeper Hazelcast integration.

`com.hazelcast.config.CacheConfig` offers additional options that are specific to Hazelcast, such as asynchronous and synchronous backup counts. Both classes share the same supertype interface `javax.cache.configuration.CompleteConfiguration` which is part of the JCache standard.



NOTE: To stay vendor independent, try to keep your code as near as possible to the standard JCache API. We recommend that you use declarative configuration and that you use the `javax.cache.configuration.Configuration` or `javax.cache.configuration.CompleteConfiguration` interfaces in your code only when you need to pass the configuration instance throughout your code.

If you don't need to configure Hazelcast specific properties, we recommend that you instantiate `javax.cache.configuration.MutableConfiguration` and that you use the setters to configure Hazelcast as shown in the example in the [Example JCache Application section](#). Since the configurable properties are the same as the ones explained in the [JCache Declarative Configuration section](#), they are not mentioned here. For Hazelcast specific properties, please read the [ICache Configuration section](#).

12.3 JCache Providers

Use JCache providers to create caches for a specification compliant implementation. Those providers abstract the platform specific behavior and bindings, and provide the different JCache required features.

Hazelcast has two types of providers. Depending on your application setup and the cluster topology, you can use the Client Provider (used from Hazelcast clients) or the Server Provider (used by cluster nodes).

12.3.1 Configuring JCache Provider

You configure the JCache `javax.cache.spi.CachingProvider` by either specifying the provider at the command line or by declaring the provider inside the Hazelcast configuration XML file. For more information on setting properties in this XML configuration file, please see the [JCache Declarative Configuration section](#).

Hazelcast implements a delegating `CachingProvider` that can automatically be configured for either client or server mode and that delegates to the real underlying implementation based on the user's choice. Hazelcast recommends that you use this `CachingProvider` implementation.

The delegating `CachingProviders` fully qualified class name is:

```
com.hazelcast.cache.HazelcastCachingProvider
```

To configure the delegating provider at the command line, add the following parameter to the Java startup call, depending on the chosen provider:

```
-Dhazelcast.jcache.provider.type=[client|server]
```

By default, the delegating `CachingProvider` is automatically picked up by the JCache SPI and provided as shown above. In cases where multiple `javax.cache.spi.CachingProvider` implementations reside on the classpath (like in some Application Server scenarios), you can select a `CachingProvider` by explicitly calling `Caching::getCachingProvider` overloads and providing them using the canonical class name of the provider to be used. The class names of server and client providers provided by Hazelcast are mentioned in the following two subsections.



NOTE: Hazelcast advises that you use the `Caching::getCachingProvider` overloads to select a `CachingProvider` explicitly. This ensures that upgrading to later environments or Application Server versions doesn't result in unexpected behavior like choosing a wrong `CachingProvider`.

For more information on cluster topologies and Hazelcast clients, please see the [Hazelcast Topology section](#).

12.3.2 Configuring JCache with Client Provider

For cluster topologies where Hazelcast light clients are used to connect to a remote Hazelcast cluster, use the Client Provider to configure JCache.

The Client Provider provides the same features as the Server Provider. However, it does not hold data on its own but instead delegates requests and calls to the remotely connected cluster.

The Client Provider can connect to multiple clusters at the same time. This can be achieved by scoping the client side `CacheManager` with different Hazelcast configuration files. For more information, please see [Scoping to Join Clusters](#).

To request this `CachingProvider` using `Caching#getCachingProvider(String)` or `Caching#getCachingProvider(String, ClassLoader)`, use the following fully qualified class name:

```
com.hazelcast.client.cache.impl.HazelcastClientCachingProvider
```

12.3.3 Configuring JCache with Server Provider

If a Hazelcast node is embedded into an application directly and the Hazelcast client is not used, the Server Provider is required. In this case, the node itself becomes a part of the distributed cache and requests and operations are distributed directly across the cluster by its given key.

The Server Provider provides the same features as the Client provider, but it keeps data in the local Hazelcast node and also distributes non-owned keys to other direct cluster members.

Like the Client Provider, the Server Provider can connect to multiple clusters at the same time. This can be achieved by scoping the client side `CacheManager` with different Hazelcast configuration files. For more information please see [Scoping to Join Clusters](#).

To request this `CachingProvider` using `Caching#getCachingProvider(String)` or `Caching#getCachingProvider(String, ClassLoader)`, use the following fully qualified class name:

```
com.hazelcast.cache.impl.HazelcastServerCachingProvider
```

12.4 JCache API

This section explains the JCache API by providing simple examples and use cases. While walking through the examples, we will have a look at a couple of the standard API classes and see how these classes are used.

12.4.1 JCache API Application Example

The code in this subsection creates a small account application by providing a caching layer over an imagined database abstraction. The database layer will be simulated using single demo data in a simple DAO interface. To show the difference between the “database” access and retrieving values from the cache, a small waiting time is used in the DAO implementation to simulate network and database latency.

12.4.1.1 Creating User Class Example

Before we implement the JCache caching layer, let’s have a quick look at some basic classes we need for this example.

The `User` class is the representation of a user table in the database. To keep it simple, it has just two properties: `userId` and `username`.

```

public class User {
    private int userId;
    private String username;

    // Getters and setters
}

```

12.4.1.2 Creating DAO Interface Example

The DAO interface is also kept easy in this example. It provides a simple method to retrieve (find) a user by its `userId`.

```

public interface UserDao {
    User findUserById( int userId );
    boolean storeUser( int userId, User user );
    boolean removeUser( int userId );
    Collection<Integer> allUserIds();
}

```

12.4.1.3 Configuring JCache Example

To show most of the standard features, the configuration example is a little more complex.

```

// Create javax.cache.configuration.CompleteConfiguration subclass
CompleteConfiguration<Integer, User> config =
    new MutableConfiguration<Integer, User>()
        // Configure the cache to be typesafe
        .setTypes( Integer.class, User.class )
        // Configure to expire entries 30 secs after creation in the cache
        .setExpiryPolicyFactory( FactoryBuilder.factoryOf(
            new AccessedExpiryPolicy( new Duration( TimeUnit.SECONDS, 30 ) )
        ) )
        // Configure read-through of the underlying store
        .setReadThrough( true )
        // Configure write-through to the underlying store
        .setWriteThrough( true )
        // Configure the javax.cache.integration.CacheLoader
        .setCacheLoaderFactory( FactoryBuilder.factoryOf(
            new UserCacheLoader( userDao )
        ) )
        // Configure the javax.cache.integration.CacheWriter
        .setCacheWriterFactory( FactoryBuilder.factoryOf(
            new UserCacheWriter( userDao )
        ) )
        // Configure the javax.cache.event.CacheEntryListener with no
        // javax.cache.event.CacheEntryEventFilter, to include old value
        // and to be executed synchronously
        .addCacheEntryListenerConfiguration(
            new MutableCacheEntryListenerConfiguration<Integer, User>(
                new UserCacheEntryListenerFactory(),
                null, true, true
            )
        );

```

Let's go through this configuration line by line.

12.4.1.3.1 Setting the Cache Type and Expire Policy First, we set the expected types for the cache, which is already known from the previous example. On the next line, an `javax.cache.expiry.ExpirePolicy` is configured. Almost all integration `ExpirePolicy` implementations are configured using `javax.cache.configuration.Factory` instances. `Factory` and `FactoryBuilder` are explained later in this chapter.

12.4.1.3.2 Configuring Read-Through and Write-Through The next two lines configure the thread that will be read-through and write-through to the underlying backend resource that is configured over the next few lines. The JCache API offers `javax.cache.integration.CacheLoader` and `javax.cache.integration.CacheWriter` to implement adapter classes to any kind of backend resource, e.g. JPA, JDBC, or any other backend technology implementable in Java. The interfaces provides the typical CRUD operations like `create`, `get`, `update`, `delete` and some bulk operation versions of those common operations. We will look into the implementation of those implementations later.

12.4.1.3.3 Configuring Entry Listeners The last configuration setting defines entry listeners based on sub-interfaces of `javax.cache.event.CacheEventListener`. This config does not use a `javax.cache.event.CacheEventListener` since the listener is meant to be fired on every change that happens on the cache. Again we will look in the implementation of the listener in later in this chapter.

12.4.1.3.4 Full Example Code A full running example that is presented in this subsection is available in the code samples repository. The application is built to be a command line app. It offers a small shell to accept different commands. After startup, you can enter `help` to see all available commands and their descriptions.

12.4.2 JCache Base Classes

In the [Example JCache Application section](#), we have already seen a couple of the base classes and explained how those work. Following are quick descriptions of them.

`javax.cache.Caching`:

The access point into the JCache API. It retrieves the general `CachingProvider` backed by any compliant JCache implementation, such as Hazelcast JCache.

`javax.cache.spi.CachingProvider`:

The SPI that is implemented to bridge between the JCache API and the implementation itself. Hazelcast nodes and clients use different providers chosen as seen in the [Configuring JCache Provider section](#) which enable the JCache API to interact with Hazelcast clusters.

When a `javax.cache.spi.CachingProvider::getCacheManager` overload is used that takes a `java.lang.ClassLoader` argument, this classloader will be part of the scope of the created `java.cache.Cache` and it is not possible to retrieve it on other nodes. We advise not to use those overloads, those are not meant to be used in distributed environments!

`javax.cache.CacheManager`:

The `CacheManager` provides the capability to create new and manage existing JCache caches.



NOTE: A `javax.cache.Cache` instance created with key and value types in the configuration provides a type checking of those types at retrieval of the cache. For that reason, all non-types retrieval methods like `getCache` throw an exception because types cannot be checked.

`javax.cache.configuration.Configuration`, `javax.cache.configuration.MutableConfiguration`:

These two classes are used to configure a cache prior to retrieving it from a `CacheManager`. The `Configuration` interface, therefore, acts as a common super type for all compatible configuration classes such as `MutableConfiguration`.

Hazelcast itself offers a special implementation (`com.hazelcast.config.CacheConfig`) of the `Configuration` interface which offers more options on the specific Hazelcast properties that can be set to configure features like synchronous and asynchronous backups counts or selecting the underlying [In Memory Format](#) of the cache. For more information on this configuration class, please see the reference in [JCache Programmatic Configuration section](#).

javax.cache.Cache:

This interface represents the cache instance itself. It is comparable to `java.util.Map` but offers special operations dedicated to the caching use case. Therefore, for example `javax.cache.Cache::put`, unlike `java.util.Map::put`, does not return the old value previously assigned to the given key.



NOTE: Bulk operations on the *Cache* interface guarantee atomicity per entry but not over all given keys in the same bulk operations since no transactional behavior is applied over the whole batch process.

12.4.3 Implementing Factory and FactoryBuilder

The `javax.cache.configuration.Factory` implementations configure features like `CacheEntryListener`, `ExpirePolicy` and `CacheLoaders` or `CacheWriters`. These factory implementations are required to distribute the different features to nodes in a cluster environment like Hazelcast. Therefore, these factory implementations have to be serializable.

Factory implementations are easy to do: they follow the default Provider- or Factory-Pattern. The sample class `UserCacheEntryListenerFactory` shown below implements a custom JCache Factory.

```
public class UserCacheEntryListenerFactory
    implements Factory<CacheEntryListener<Integer, User>> {

    @Override
    public CacheEntryListener<Integer, User> create() {
        // Just create a new listener instance
        return new UserCacheEntryListener();
    }
}
```

To simplify the process for the users, JCache API offers a set of helper methods collected in `javax.cache.configuration.FactoryBuilder`. In the above configuration example, `FactoryBuilder::factoryOf` creates a singleton factory for the given instance.

12.4.4 Implementing CacheLoader

`javax.cache.integration.CacheLoader` loads cache entries from any external backend resource.

12.4.4.1 Cache read-through

If the cache is configured to be **read-through**, then `CacheLoader::load` is called transparently from the cache when the key or the value is not yet found in the cache. If no value is found for a given key, it returns null.

If the cache is not configured to be **read-through**, nothing is loaded automatically. The user code must call `javax.cache.Cache::loadAll` to load data for the given set of keys into the cache.

For the bulk load operation (`loadAll()`), some keys may not be found in the returned result set. In this case, a `javax.cache.integration.CompletionListener` parameter can be used as an asynchronous callback after all the key-value pairs are loaded because loading many key-value pairs can take lots of time.

12.4.4.2 CacheLoader Example

Let's look at the `UserCacheLoader` implementation. This implementation is quite straight forward.

- It implements `CacheLoader`.
- It overrides the `load` method to compute or retrieve the value corresponding to `key`.

- It overrides the `loadAll` method to compute or retrieve the values corresponding to `keys`.

An important note is that any kind of exception has to be wrapped into `javax.cache.integration.CacheLoaderException`.

```
public class UserCacheLoader
    implements CacheLoader<Integer, User>, Serializable {

    private final UserDao userDao;

    public UserCacheLoader( UserDao userDao ) {
        // Store the dao instance created externally
        this.userDao = userDao;
    }

    @Override
    public User load( Integer key ) throws CacheLoaderException {
        // Just call through into the dao
        return userDao.findUserById( key );
    }

    @Override
    public Map<Integer, User> loadAll( Iterable<? extends Integer> keys )
        throws CacheLoaderException {

        // Create the resulting map
        Map<Integer, User> loaded = new HashMap<Integer, User>();
        // For every key in the given set of keys
        for ( Integer key : keys ) {
            // Try to retrieve the user
            User user = userDao.findUserById( key );
            // If user is not found do not add the key to the result set
            if ( user != null ) {
                loaded.put( key, user );
            }
        }
        return loaded;
    }
}
```

12.4.5 CacheWriter

You use a `javax.cache.integration.CacheWriter` to update an external backend resource. If the cache is configured to be `write-through`, this process is executed transparently to the users code. Otherwise, there is currently no way to trigger writing changed entries to the external resource to a user-defined point in time.

If bulk operations throw an exception, `java.util.Collection` has to be cleaned of all successfully written keys so the cache implementation can determine what keys are written and can be applied to the cache state.

The following example performs the following tasks.

- It implements `CacheWriter`.
- It overrides the `write` method to write the specified entry to the underlying store.
- It overrides the `writeAll` method to write the specified entries to the underlying store.
- It overrides the `delete` method to delete the key entry from the store.
- It overrides the `deleteAll` method to delete the data and keys from the underlying store for the given collection of keys, if present.

```

public class UserCacheWriter
    implements CacheWriter<Integer, User>, Serializable {

    private final UserDao userDao;

    public UserCacheWriter( UserDao userDao ) {
        // Store the dao instance created externally
        this.userDao = userDao;
    }

    @Override
    public void write( Cache.Entry<? extends Integer, ? extends User> entry )
        throws CacheWriterException {

        // Store the user using the dao
        userDao.storeUser( entry.getKey(), entry.getValue() );
    }

    @Override
    public void writeAll( Collection<Cache.Entry<...>> entries )
        throws CacheWriterException {

        // Retrieve the iterator to clean up the collection from
        // written keys in case of an exception
        Iterator<Cache.Entry<...>> iterator = entries.iterator();
        while ( iterator.hasNext() ) {
            // Write entry using dao
            write( iterator.next() );
            // Remove from collection of keys
            iterator.remove();
        }
    }

    @Override
    public void delete( Object key ) throws CacheWriterException {
        // Test for key type
        if ( !( key instanceof Integer ) ) {
            throw new CacheWriterException( "Illegal key type" );
        }
        // Remove user using dao
        userDao.removeUser( ( Integer ) key );
    }

    @Override
    public void deleteAll( Collection<?> keys ) throws CacheWriterException {
        // Retrieve the iterator to clean up the collection from
        // written keys in case of an exception
        Iterator<?> iterator = keys.iterator();
        while ( iterator.hasNext() ) {
            // Write entry using dao
            delete( iterator.next() );
            // Remove from collection of keys
            iterator.remove();
        }
    }
}

```

Again the implementation is pretty straight forward and also as above all exceptions thrown by the external resource,

like `java.sql.SQLException` has to be wrapped into a `javax.cache.integration.CacheWriterException`. Note this is a different exception from the one thrown by `CacheLoader`.

12.4.6 Implementing EntryProcessor

With `javax.cache.processor.EntryProcessor`, you can apply an atomic function to a cache entry. In a distributed environment like Hazelcast, you can move the mutating function to the node that owns the key. If the value object is big, it might prevent traffic by sending the object to the mutator and sending it back to the owner to update it.

By default, Hazelcast JCache sends the complete changed value to the backup partition. Again, this can cause a lot of traffic if the object is big. Another option to prevent this is part of the Hazelcast ICache extension. Further information is available at [BackupAwareEntryProcessor](#).

An arbitrary number of arguments can be passed to the `Cache::invoke` and `Cache::invokeAll` methods. All of those arguments need to be fully serializable because in a distributed environment like Hazelcast, it is very likely that these arguments have to be passed around the cluster.

The following example performs the following tasks.

- It implements `EntryProcessor`.
- It overrides the `process` method to process an entry.

```
public class UserUpdateEntryProcessor
    implements EntryProcessor<Integer, User, User> {

    @Override
    public User process( MutableEntry<Integer, User> entry, Object... arguments )
        throws EntryProcessorException {

        // Test arguments length
        if ( arguments.length < 1 ) {
            throw new EntryProcessorException( "One argument needed: username" );
        }

        // Get first argument and test for String type
        Object argument = arguments[0];
        if ( !( argument instanceof String ) ) {
            throw new EntryProcessorException(
                "First argument has wrong type, required java.lang.String" );
        }

        // Retrieve the value from the MutableEntry
        User user = entry.getValue();

        // Retrieve the new username from the first argument
        String newUsername = ( String ) arguments[0];

        // Set the new username
        user.setUsername( newUsername );

        // Set the changed user to mark the entry as dirty
        entry.setValue( user );

        // Return the changed user to return it to the caller
        return user;
    }
}
```



NOTE: By executing the bulk `Cache::invokeAll` operation, atomicity is only guaranteed for a single cache entry. No transactional rules are applied to the bulk operation.



NOTE: `JCache EntryProcessor` implementations are not allowed to call `javax.cache.Cache` methods; this prevents operations from deadlocking between different calls.

In addition, when using a `Cache::invokeAll` method, a `java.util.Map` is returned that maps the key to its `javax.cache.processor.EntryProcessorResult`, and which itself wraps the actual result or a thrown `javax.cache.processor.EntryProcessorException`.

12.4.7 CacheEntryListener

The `javax.cache.event.CacheEntryListener` implementation is straight forward. `CacheEntryListener` is a super-interface which is used as a marker for listener classes in JCache. The specification brings a set of sub-interfaces.

- `CacheEntryCreatedListener`: Fires after a cache entry is added (even on read-through by a `CacheLoader`) to the cache.
- `CacheEntryUpdatedListener`: Fires after an already existing cache entry was updates.
- `CacheEntryRemovedListener`: Fires after a cache entry was removed (not expired) from the cache.
- `CacheEntryExpiredListener`: Fires after a cache entry has been expired. Expiry does not have to be parallel process, it is only required to be executed on the keys that are requested by `Cache::get` and some other operations. For a full table of expiry please see the <https://www.jcp.org/en/jsr/detail?id=107> point 6.

To configure `CacheEntryListener`, add a `javax.cache.configuration.CacheEntryListenerConfiguration` instance to the JCache configuration class, as seen in the above example configuration. In addition listeners can be configured to be executed synchronously (blocking the calling thread) or asynchronously (fully running in parallel).

In this example application, the listener is implemented to print event information on the console. That visualizes what is going on in the cache. This application performs the following tasks:

- It implements `CacheEntryCreatedListener`.
- It implements the `onCreated` method to call after an entry is created.
- It implements the `onUpdated` method to call after an entry is updated.
- It implements the `onRemoved` method to call after an entry is removed.
- It implements the `onExpired` method to call after an entry expires.
- It implements `printEvents` to print event information on the console.

```
public class UserCacheEntryListener
    implements CacheEntryCreatedListener<Integer, User>,
               CacheEntryUpdatedListener<Integer, User>,
               CacheEntryRemovedListener<Integer, User>,
               CacheEntryExpiredListener<Integer, User> {

    @Override
    public void onCreated( Iterable<CacheEntryEvent<...>> cacheEntryEvents )
        throws CacheEntryListenerException {

        printEvents( cacheEntryEvents );
    }

    @Override
    public void onUpdated( Iterable<CacheEntryEvent<...>> cacheEntryEvents )
        throws CacheEntryListenerException {

        printEvents( cacheEntryEvents );
    }
}
```

```

}

@Override
public void onRemoved( Iterable<CacheEntryEvent<...>> cacheEntryEvents )
    throws CacheEntryListenerException {

    printEvents( cacheEntryEvents );
}

@Override
public void onExpired( Iterable<CacheEntryEvent<...>> cacheEntryEvents )
    throws CacheEntryListenerException {

    printEvents( cacheEntryEvents );
}

private void printEvents( Iterable<CacheEntryEvent<...>> cacheEntryEvents ) {
    Iterator<CacheEntryEvent<...>> iterator = cacheEntryEvents.iterator();
    while ( iterator.hasNext() ) {
        CacheEntryEvent<...> event = iterator.next();
        System.out.println( event.getEventType() );
    }
}
}

```

12.4.8 ExpirePolicy

In JCache, `javax.cache.expiry.ExpirePolicy` implementations are used to automatically expire cache entries based on different rules.

Expiry timeouts are defined using `javax.cache.expiry.Duration`, which is a pair of `java.util.concurrent.TimeUnit`, which describes a time unit and a long, defining the timeout value. The minimum allowed `TimeUnit` is `TimeUnit.MILLISECONDS`. The long value `durationAmount` must be equal or greater than zero. A value of zero (or `Duration.ZERO`) indicates that the cache entry expires immediately.

By default, JCache delivers a set of predefined expiry strategies in the standard API.

- **AccessedExpiryPolicy**: Expires after a given set of time measured from creation of the cache entry, the expiry timeout is updated on accessing the key.
- **CreatedExpiryPolicy**: Expires after a given set of time measured from creation of the cache entry, the expiry timeout is never updated.
- **EternalExpiryPolicy**: Never expires, this is the default behavior, similar to **ExpiryPolicy** to be set to null.
- **ModifiedExpiryPolicy**: Expires after a given set of time measured from creation of the cache entry, the expiry timeout is updated on updating the key.
- **TouchedExpiryPolicy**: Expires after a given set of time measured from creation of the cache entry, the expiry timeout is updated on accessing or updating the key.

Because **EternalExpiryPolicy** does not expire cache entries, it is still possible to evict values from memory if an underlying **CacheLoader** is defined.

12.5 Hazelcast JCache Extension - ICache

Hazelcast provides extension methods to Cache API through the interface `com.hazelcast.cache.ICache`.

It has two sets of extensions:

- Asynchronous version of all cache operations. See Async Operations.

- Cache operations with custom `ExpiryPolicy` parameter to apply on that specific operation. See Custom `ExpiryPolicy`.

12.5.1 Scoping to Join Clusters

As mentioned before, you can scope a `CacheManager` in the case of client to connect to multiple clusters. In the case of an embedded node, you can scope a `CacheManager` to join different clusters at the same time. This process is called scoping. To apply scoping, request a `CacheManager` by passing a `java.net.URI` instance to `CachingProvider::getCacheManager`. The `java.net.URI` instance must point to either a Hazelcast configuration or to the name of a named `com.hazelcast.core.HazelcastInstance` instance.



NOTE: Multiple requests for the same `java.net.URI` result in returning a `CacheManager` instance that shares the same `HazelcastInstance` as the `CacheManager` returned by the previous call.

12.5.1.1 Applying Configuration Scope

To connect or join different clusters, apply a configuration scope to the `CacheManager`. If the same URI is used to request a `CacheManager` that was created previously, those `CacheManagers` share the same underlying `HazelcastInstance`.

To apply a configuration scope, pass in the path of the configuration file using the location property `HazelcastCachingProvider#HAZELCAST_CONFIG_LOCATION` (which resolves to `hazelcast.config.location`) as a mapping inside a `java.util.Properties` instance to the `CachingProvider#getCacheManager(uri, classLoader, properties)` call.

Here is an example of using Configuration Scope.

```
CachingProvider cachingProvider = Caching.getCachingProvider();

// Create Properties instance pointing to a Hazelcast config file
Properties properties = new Properties();
properties.setProperty( HazelcastCachingProvider.HAZELCAST_CONFIG_LOCATION,
    "classpath://my-configs/scoped-hazelcast.xml" );

URI cacheManagerName = new URI( "my-cache-manager" );
CacheManager cacheManager = cachingProvider
    .getCacheManager( cacheManagerName, null, properties );
```

Here is an example using `HazelcastCachingProvider::propertiesByLocation` helper method.

```
CachingProvider cachingProvider = Caching.getCachingProvider();

// Create Properties instance pointing to a Hazelcast config file
String configFile = "classpath://my-configs/scoped-hazelcast.xml";
Properties properties = HazelcastCachingProvider
    .propertiesByLocation( configFile );

URI cacheManagerName = new URI( "my-cache-manager" );
CacheManager cacheManager = cachingProvider
    .getCacheManager( cacheManagerName, null, properties );
```

The retrieved `CacheManager` is scoped to use the `HazelcastInstance` that was just created and was configured using the given XML configuration file.

Available protocols for config file URL include `classpath://` to point to a classpath location, `file://` to point to a filesystem location, `http://` an `https://` for remote web locations. In addition, everything that does not specify a protocol is recognized as a placeholder that can be configured using a system property.


```
String configFile = "my-placeholder";
Properties properties = HazelcastCachingProvider
    .propertiesByLocation( configFile );
```

You can set this on the command line.

```
-Dmy-placeholder=classpath://my-configs/scoped-hazelcast.xml
```



NOTE: No check is performed to prevent creating multiple *CacheManagers* with the same cluster configuration on different configuration files. If the same cluster is referred from different configuration files, multiple cluster members or clients are created.



NOTE: The configuration file location will not be a part of the resulting identity of the *CacheManager*. An attempt to create a *CacheManager* with a different set of properties but an already used name will result in undefined behavior.

12.5.1.2 Binding to a Named Instance

You can bind *CacheManager* to an existing and named *HazelcastInstance* instance. If the *instanceName* is specified in *com.hazelcast.config.Config*, it can be used directly by passing it to *CachingProvider* implementation. Otherwise (*instanceName* not set or instance is a client instance) you must get the instance name from *HazelcastInstance* instance via the *String getName()* method to pass the *CachingProvider* implementation. Please note that *instanceName* is not configurable for the client side *HazelcastInstance* instance and is auto-generated by using group name (if it is specified). In general, *String getName()* method over *HazelcastInstance* is safer and the preferable way to get the name of the instance. Multiple *CacheManagers* created using an equal *java.net.URI* will share the same *HazelcastInstance*.

A named scope is applied nearly the same way as the configuration scope: pass in the instance name using the *HazelcastCachingProvider#HAZELCAST_INSTANCE_NAME* (which resolves to *hazelcast.instance.name*) property as a mapping inside a *java.util.Properties* instance to the *CachingProvider#getCacheManager(uri, classLoader, properties)* call.

Here is an example of Named Instance Scope with specified name.

```
Config config = new Config();
config.setInstanceName( "my-named-hazelcast-instance" );
// Create a named HazelcastInstance
Hazelcast.newHazelcastInstance( config );

CachingProvider cachingProvider = Caching.getCachingProvider();

// Create Properties instance pointing to a named HazelcastInstance
Properties properties = new Properties();
properties.setProperty( HazelcastCachingProvider.HAZELCAST_INSTANCE_NAME,
    "my-named-hazelcast-instance" );

URI cacheManagerName = new URI( "my-cache-manager" );
CacheManager cacheManager = cachingProvider
    .getCacheManager( cacheManagerName, null, properties );
```

Here is an example of Named Instance Scope with auto-generated name.

```
Config config = new Config();
// Create a auto-generated named HazelcastInstance
HazelcastInstance instance = Hazelcast.newHazelcastInstance( config );
```

```
String instanceName = instance.getName();

CachingProvider cachingProvider = Caching.getCachingProvider();

// Create Properties instance pointing to a named HazelcastInstance
Properties properties = new Properties();
properties.setProperty( HazelcastCachingProvider.HAZELCAST_INSTANCE_NAME,
    instanceName );

URI cacheManagerName = new URI( "my-cache-manager" );
CacheManager cacheManager = cachingProvider
    .getCacheManager( cacheManagerName, null, properties );
```

Here is an example of Named Instance Scope with auto-generated name on client instance.

```
ClientConfig clientConfig = new ClientConfig();
ClientNetworkConfig networkConfig = clientConfig.getNetworkConfig();
networkConfig.addAddress("127.0.0.1", "127.0.0.2");

// Create a client side HazelcastInstance
HazelcastInstance instance = HazelcastClient.newHazelcastClient( clientConfig );
String instanceName = instance.getName();

CachingProvider cachingProvider = Caching.getCachingProvider();

// Create Properties instance pointing to a named HazelcastInstance
Properties properties = new Properties();
properties.setProperty( HazelcastCachingProvider.HAZELCAST_INSTANCE_NAME,
    instanceName );

URI cacheManagerName = new URI( "my-cache-manager" );
CacheManager cacheManager = cachingProvider
    .getCacheManager( cacheManagerName, null, properties );
```

Here is an example using `HazelcastCachingProvider::propertiesByInstanceName` method.

```
Config config = new Config();
config.setInstanceName( "my-named-hazelcast-instance" );
// Create a named HazelcastInstance
Hazelcast.newHazelcastInstance( config );

CachingProvider cachingProvider = Caching.getCachingProvider();

// Create Properties instance pointing to a named HazelcastInstance
Properties properties = HazelcastCachingProvider
    .propertiesByInstanceName( "my-named-hazelcast-instance" );

URI cacheManagerName = new URI( "my-cache-manager" );
CacheManager cacheManager = cachingProvider
    .getCacheManager( cacheManager, null, properties );
```



NOTE: The *instanceName* will not be a part of the resulting identity of the *CacheManager*. An attempt to create a *CacheManager* with a different set of properties but an already used name will result in undefined behavior.

12.5.2 Namespacing

The `java.net.URI`s that don't use the above mentioned Hazelcast specific schemes are recognized as namespacing. Those `CacheManagers` share the same underlying default `HazelcastInstance` created (or set) by the `CachingProvider`, but they cache with the same names and different namespaces on the `CacheManager` level, and therefore they won't share the same data. This is useful where multiple applications might share the same Hazelcast JCache implementation (e.g. on application or OSGi servers) but are developed by independent teams. To prevent interfering on caches using the same name, every application can use its own namespace when retrieving the `CacheManager`.

Here is an example of using namespacing.

```
CachingProvider cachingProvider = Caching.getCachingProvider();

URI nsApp1 = new URI( "application-1" );
CacheManager cacheManagerApp1 = cachingProvider.getCacheManager( nsApp1, null );

URI nsApp2 = new URI( "application-2" );
CacheManager cacheManagerApp2 = cachingProvider.getCacheManager( nsApp2, null );
```

That way both applications share the same `HazelcastInstance` instance but not the same caches.

12.5.3 Retrieving an ICache Instance

Besides [Scoping to Join Clusters](#) and [Namespacing](#), which are implemented using the URI feature of the specification, all other extended operations are required to retrieve the `com.hazelcast.cache.ICache` interface instance from the JCache `javax.cache.Cache` instance. For Hazelcast, both interfaces are implemented on the same object instance. It is recommended that you stay with the specification way to retrieve the `ICache` version, since `ICache` might be subject to change without notification.

To retrieve or unwrap the `ICache` instance, you can execute the following code example:

```
CachingProvider cachingProvider = Caching.getCachingProvider();
CacheManager cacheManager = cachingProvider.getCacheManager();
Cache<Object, Object> cache = cacheManager.getCache( ... );

ICache<Object, Object> unwrappedCache = cache.unwrap( ICache.class );
```

After unwrapping the `Cache` instance into an `ICache` instance, you have access to all of the following operations, e.g. [ICache Async Methods](#) and [Additional Methods](#).

12.5.4 ICache Configuration

As mentioned in the [JCache Declarative Configuration section](#), the Hazelcast `ICache` extension offers additional configuration properties over the default JCache configuration. These additional properties include internal storage format, backup counts, eviction policy and quorum reference.

The declarative configuration for `ICache` is a superset of the previously discussed JCache configuration:

```
<cache>
  <!-- ... default cache configuration goes here ... -->
  <backup-count>1</backup-count>
  <async-backup-count>1</async-backup-count>
  <in-memory-format>BINARY</in-memory-format>
  <eviction size="10000" max-size-policy="ENTRY_COUNT" eviction-policy="LRU" />
  <partition-lost-listeners>
    <partition-lost-listener>CachePartitionLostListenerImpl</partition-lost-listener>
```

```

</partition-lost-listeners>
<quorum-ref>quorum-name</quorum-ref>
</cache>

```

- **backup-count**: Number of synchronous backups. Those backups are executed before the mutating cache operation is finished. The mutating operation is blocked. **backup-count** default value is 1.
- **async-backup-count**: Number of asynchronous backups. Those backups are executed asynchronously so the mutating operation is not blocked and it will be done immediately. **async-backup-count** default value is 0.
- **in-memory-format**: Internal storage format. For more information, please see the [In Memory Format section](#). Default is BINARY.
- **eviction**: Defines the used eviction strategies and sizes for the cache. For more information on eviction, please see the [JCache Eviction](#).
 - **size**: Maximum number of records or maximum size in bytes depending on the **max-size-policy** property. Size can be any integer between 0 and `Integer.MAX_VALUE`. Default **max-size-policy** is `ENTRY_COUNT` and default size is 10.000.
 - **max-size-policy**: Maximum size. If maximum size is reached, the cache is evicted based on the eviction policy. Default **max-size-policy** is `ENTRY_COUNT` and default size is 10.000. The following eviction policies are available:
 - * `ENTRY_COUNT`: Maximum number of cache entries in the cache. **Available on heap based cache record store only.**
 - * `USED_NATIVE_MEMORY_SIZE`: Maximum used native memory size in megabytes for each instance. **Available on High-Density Memory cache record store only.**
 - * `USED_NATIVE_MEMORY_PERCENTAGE`: Maximum used native memory size percentage for each instance. **Available on High-Density Memory cache record store only.**
 - * `FREE_NATIVE_MEMORY_SIZE`: Maximum free native memory size in megabytes for each instance. **Available on High-Density Memory cache record store only.**
 - * `FREE_NATIVE_MEMORY_PERCENTAGE`: Maximum free native memory size percentage for each instance. **Available on High-Density Memory cache record store only.**
 - **eviction-policy**: Eviction policy which compares values to find the best matching eviction candidate. Default is LRU.
 - * LRU: Less Recently Used - finds the best eviction candidate based on the lastAccessTime.
 - * LFU: Less Frequently Used - finds the best eviction candidate based on the number of hits.
- **partition-lost-listeners** : Defines listeners for dispatching partition lost events for the cache. For more information, please see the [ICache Partition Lost Listener section](#).
- **quorum-ref** : Name of quorum configuration that you want this cache to use.

Since `javax.cache.configuration.MutableConfiguration` misses the above additional configuration properties, Hazelcast ICache extension provides an extended configuration class called `com.hazelcast.config.CacheConfig`. This class is an implementation of `javax.cache.configuration.CompleteConfiguration` and all the properties shown above can be configured using its corresponding setter methods.



NOTE: At the client side, ICache can be configured only programmatically.

RELATED INFORMATION

Please refer to the [Cache Configuration section](#) for a full description of ICache configuration.

12.5.5 ICache Async Methods

As another addition of Hazelcast ICache over the normal JCache specification, Hazelcast provides asynchronous versions of almost all methods, returning a `com.hazelcast.core.ICompletableFuture`. By using these methods and the returned future objects, you can use JCache in a reactive way by registering zero or more callbacks on the future to prevent blocking the current thread.

The asynchronous versions of the methods append the phrase **Async** to the method name. The example code below uses the method `putAsync()`.

```

ICache<Integer, String> unwrappedCache = cache.unwrap( ICache.class );
ICompletableFuture<String> future = unwrappedCache.putAsync( 1, "value" );
future.andThen( new ExecutionCallback<String>() {
    public void onResponse( String response ) {
        System.out.println( "Previous value: " + response );
    }

    public void onFailure( Throwable t ) {
        t.printStackTrace();
    }
} );

```

Following methods are available in asynchronous versions:

- `get(key)`:
 - `getAsync(key)`
 - `getAsync(key, expiryPolicy)`
- `put(key, value)`:
 - `putAsync(key, value)`
 - `putAsync(key, value, expiryPolicy)`
- `putIfAbsent(key, value)`:
 - `putIfAbsentAsync(key, value)`
 - `putIfAbsentAsync(key, value, expiryPolicy)`
- `getAndPut(key, value)`:
 - `getAndPutAsync(key, value)`
 - `getAndPutAsync(key, value, expiryPolicy)`
- `remove(key)`:
 - `removeAsync(key)`
- `remove(key, value)`:
 - `removeAsync(key, value)`
- `getAndRemove(key)`:
 - `getAndRemoveAsync(key)`
- `replace(key, value)`:
 - `replaceAsync(key, value)`
 - `replaceAsync(key, value, expiryPolicy)`
- `replace(key, oldValue, newValue)`:
 - `replaceAsync(key, oldValue, newValue)`
 - `replaceAsync(key, oldValue, newValue, expiryPolicy)`
- `getAndReplace(key, value)`:
 - `getAndReplaceAsync(key, value)`
 - `getAndReplaceAsync(key, value, expiryPolicy)`

The methods with a given `javax.cache.expiry.ExpiryPolicy` are further discussed in the [Defining a Custom ExpiryPolicy](#).



NOTE: *Asynchronous versions of the methods are not compatible with synchronous events.*

12.5.6 Defining a Custom ExpiryPolicy

The JCache specification has an option to configure a single `ExpiryPolicy` per cache. Hazelcast ICache extension offers the possibility to define a custom `ExpiryPolicy` per key by providing a set of method overloads with an `expiryPolicy` parameter, as in the list of asynchronous methods in the Async Methods section. This means that you can pass custom expiry policies to a cache operation.

Here is how an `ExpiryPolicy` is set on JCache configuration:

```
CompleteConfiguration<String, String> config =
    new MutableConfiguration<String, String>()
        .setExpiryPolicyFactory(
            AccessedExpiryPolicy.factoryOf( Duration.ONE_MINUTE )
        );
```

To pass a custom `ExpiryPolicy`, a set of overloads is provided. You can use them as shown in the following code example.

```
ICache<Integer, String> unwrappedCache = cache.unwrap( ICache.class );
unwrappedCache.put( 1, "value", new AccessedExpiryPolicy( Duration.ONE_DAY ) );
```

The `ExpiryPolicy` instance can be pre-created, cached, and re-used, but only for each cache instance. This is because `ExpiryPolicy` implementations can be marked as `java.io.Closeable`. The following list shows the provided method overloads over `javax.cache.Cache` by `com.hazelcast.cache.ICache` featuring the `ExpiryPolicy` parameter:

- `get(key)`:
 - `get(key, expiryPolicy)`
- `getAll(keys)`:
 - `getAll(keys, expiryPolicy)`
- `put(key, value)`:
 - `put(key, value, expiryPolicy)`
- `getAndPut(key, value)`:
 - `getAndPut(key, value, expiryPolicy)`
- `putAll(map)`:
 - `putAll(map, expiryPolicy)`
- `putIfAbsent(key, value)`:
 - `putIfAbsent(key, value, expiryPolicy)`
- `replace(key, value)`:
 - `replace(key, value, expiryPolicy)`
- `replace(key, oldValue, newValue)`:
 - `replace(key, oldValue, newValue, expiryPolicy)`
- `getAndReplace(key, value)`:
 - `getAndReplace(key, value, expiryPolicy)`

Asynchronous method overloads are not listed here. Please see [ICache Async Methods](#) for the list of asynchronous method overloads.

12.5.7 JCache Eviction

Caches are generally not expected to grow to an infinite size. Implementing an **expiry policy** is one way you can prevent the infinite growth, but sometimes it is hard to define a meaningful expiration timeout. Therefore, Hazelcast JCache provides the eviction feature. Eviction offers the possibility to remove entries based on the cache size or amount of used memory (Hazelcast Enterprise Only) and not based on timeouts.

12.5.7.1 General Information

Since a cache is designed for high throughput and fast reads, a lot of effort went into designing the eviction system as predictable as possible. All built-in implementations provide an amortized $O(1)$ runtime. The default operation runtime is rendered as $O(1)$ but can be faster than the normal runtime cost if the algorithm finds an expired entry while sampling.

Most importantly, in typical production system two common types of caches are found:

- **Reference Caches:** Caches for reference data are normally small and are used to speed up the de-referencing as a lookup table. Those caches are commonly tend to be small and contain a previously known, fixed number of elements (e.g. states of the USA or abbreviations of elements).
- **Active DataSet Caches:** The other type of caches normally caches an active data set. These caches run to their maximum size and evict the oldest or not frequently used entries to keep in memory bounds. They sit in front of a database or HTML generators to cache the latest requested data.

Hazelcast JCache eviction supports both types of caches using a slightly different approach based on the configured maximum size of the cache. For detailed information, please see the **Eviction Algorithm section**.

12.5.7.2 Eviction Policies

Hazelcast JCache provides two commonly known eviction policies, LRU and LFU, but loosens the rules for predictable runtime behavior. LRU, normally recognized as **Least Recently Used**, is implemented as **Less Recently Used**, and LFU known as **Least Frequently Used** is implemented as **Less Frequently Used**. The details about this difference is explained in the **Eviction Algorithm section**.

Eviction Policies are configured by providing the corresponding abbreviation to the configuration as shown in the **ICache Configuration section**. As already mentioned, two built-in policies are available:

To configure the use of the LRU (Less Recently Used) policy:

```
<eviction size="10000" max-size-policy="ENTRY_COUNT" eviction-policy="LRU" />
```

And to configure the use of the LFU (Less Frequently Used) policy:

```
<eviction size="10000" max-size-policy="ENTRY_COUNT" eviction-policy="LFU" />
```

The default eviction policy is LRU. Therefore, Hazelcast JCache does not offer the possibility to perform no eviction.

12.5.7.3 Eviction Strategy

Eviction strategies implement the logic of selecting one or more eviction candidates from the underlying storage implementation and passing them to the eviction policies. Hazelcast JCache provides an amortized $O(1)$ cost implementation for this strategy to select a fixed number of samples from the current partition that it is executed against.

The default implementation is `com.hazelcast.cache.impl.eviction.impl.strategy.sampling.SamplingBasedEvictionStrategy` which, as mentioned, samples random 15 elements. A detailed description of the algorithm will be explained in the next section.

12.5.7.4 Eviction Algorithm

The Hazelcast JCache eviction algorithm is specially designed for the use case of high performance caches and with predictability in mind. The built-in implementations provide an amortized $O(1)$ runtime and therefore provide a highly predictable runtime behavior which does not rely on any kind of background threads to handle the eviction. Therefore, the algorithm takes some assumptions into account to prevent network operations and concurrent accesses.

As an explanation of how the algorithm works, let's examine the following flowchart step by step.

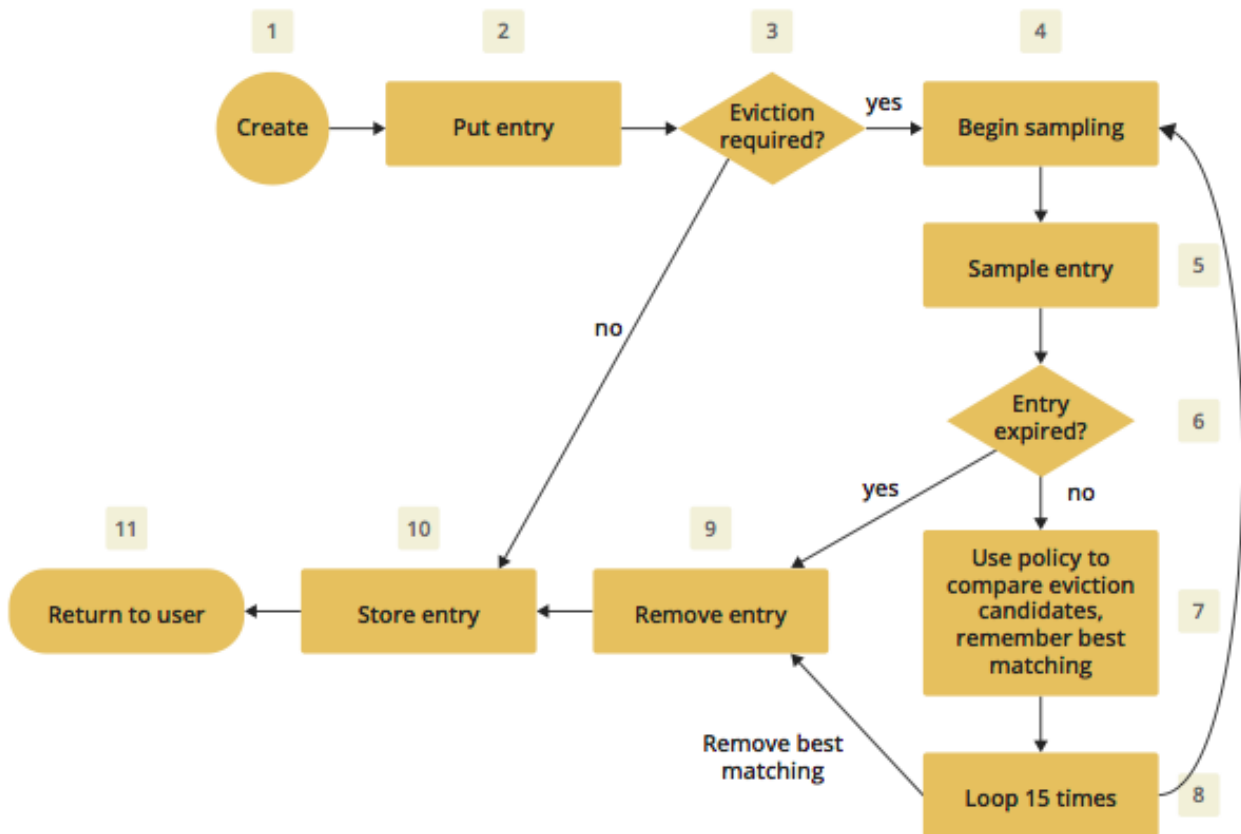


Figure 12.1:

1. A new cache is created. Without any special settings, the eviction is configured to kick in when the **cache** exceeds 10.000 elements and an LRU (Less Recently Used) policy is set up.
2. The user puts in a new entry (e.g. a key-value pair).
3. For every put, the eviction strategy evaluates the current cache size and decides if an eviction is necessary or not. If not the entry is stored in step 10.
4. If eviction is required, a new sampling is started. The built-in sampler is implemented as an lazy iterator.
5. The sampling algorithm selects a random sample from the underlying data storage.
6. The eviction strategy tests the sampled entry to already be expired (lazy expiration). If expired, the sampling stops and the entry is removed in step 9.
7. If not yet expired, the entry (eviction candidate) is compared to the last best matching candidate (based on the eviction policy) and the new best matching candidate is remembered.
8. The sampling is repeated for 15 times and then the best matching eviction candidate is returned to the eviction strategy.
9. The expired or best matching eviction candidate is removed from the underlying data storage.
10. The new put entry is stored.
11. The put operation returns to the user.

As seen by the flowchart, the general eviction operation is easy. As long as the cache does not reach its maximum capacity or you execute updates (put/replace), no eviction is executed.

To prevent network operations and concurrent access, as mentioned earlier, the cache size is estimated based on the size of the currently handled partition. Due to the imbalanced partitions, the single partitions might start to evict earlier than the other partitions.

As mentioned in the [General Information section](#), typically two types of caches are found in the production systems. For small caches, referred to as *Reference Caches*, the eviction algorithm has a special set of rules depending on the maximum configured cache size. Please see the [Reference Caches section](#) for details. The other type of cache is referred to as *Active DataSet Cache*, which in most cases makes heavy use of the eviction to keep the most active data set in the memory. Those kinds of caches using a very simple but efficient way to estimate the cluster-wide cache size.

All of the following calculations have a well known set of fixed variables:

- **GlobalCapacity:** User defined maximum cache size (cluster-wide).
- **PartitionCount:** Number of partitions in the cluster (defaults to 271).
- **BalancedPartitionSize:** Number of elements in a balanced partition state, $\text{BalancedPartitionSize} := \text{GlobalCapacity} / \text{PartitionCount}$.
- **Deviation:** An approximated standard deviation (tests proofed it to be pretty near), $\text{Deviation} := \text{sqrt}(\text{BalancedPartitionSize})$.

12.5.7.4.1 Reference Caches A Reference Cache is typically small and the number of elements to store in the reference caches is normally known prior to creating the cache. Typical examples of reference caches are lookup tables for abbreviations or the states of a country. They tend to have a fixed but small element number and the eviction is an unlikely event and rather undesirable behavior.

Since an imbalanced partition is the worst problem in the small and mid-sized caches than for the caches with millions of entries, the normal estimation rule (as discussed in a bit) is not applied to these kinds of caches. To prevent unwanted eviction on the small and mid-sized caches, Hazelcast implements a special set of rules to estimate the cluster size.

To adjust the imbalance of partitions as found in the typical runtime, the actual calculated maximum cache size (as known as the eviction threshold) is slightly higher than the user defined size. That means more elements can be stored into the cache than expected by the user. This needs to be taken into account especially for large objects, since those can easily exceed the expected memory consumption!

Small caches:

If a cache is configured with no more than 4.000 element, this cache is considered to be a small cache. The actual partition size is derived from the number of elements (**GlobalCapacity**) and the deviation using the following formula:

```
MaxPartitionSize := Deviation * 5 + BalancedPartitionSize
```

This formula ends up with big partition sizes which summed up exceed the expected maximum cache size (set by the user), but since the small caches typically have a well known maximum number of elements, this is not a big issue. Only if the small caches are used for a use case other than using it as a reference cache, this needs to be taken into account.

Mid-sized caches

A mid-sized cache is defined as a cache with a maximum number of elements that is bigger than 4.000 but not bigger than 1.000.000 elements. The calculation of mid-sized caches is similar to that of the small caches but with a different multiplier. To calculate the maximum number of elements per partition, the following formula is used:

```
MaxPartitionSize := Deviation * 3 + BalancedPartitionSize
```

12.5.7.4.2 Active DataSet Caches For large caches, where the maximum cache size is bigger than 1.000.000 elements, there is no additional calculation needed. The maximum partition size is considered to be equal to `BalancedPartitionSize` since statistically big partitions are expected to almost balance themselves. Therefore, the formula is as easy as the following:

```
MaxPartitionSize := BalancedPartitionSize
```

12.5.7.4.3 Cache Size Estimation As mentioned earlier, Hazelcast JCache provides an estimation algorithm to prevent cluster-wide network operations, concurrent access to other partitions and background tasks. It also offers a highly predictable operation runtime when the eviction is necessary.

The estimation algorithm is based on the previously calculated maximum partition size (please see the [Reference Caches section](#) and [Active DataSet Caches section](#)) and is calculated against the current partition only.

The algorithm to reckon the number of stored entries in the cache (cluster-wide) and if the eviction is necessary is shown in the following pseudo-code example:

```
RequiresEviction[Boolean] := CurrentPartitionSize >= MaxPartitionSize
```

12.5.8 JCache Near Cache

Cache entries in Hazelcast are stored as partitioned across the cluster. When you try to read a record with the key `k`, if the current node is not the owner of that key (i.e. not the owner of partition that the key belongs to), Hazelcast sends a remote operation to the owner node. Each remote operation means lots of network trips. If your cache is used for mostly read operations, it is advised to use a near cache storage in front of the cache itself to read

cache records faster and consume less network traffic.



NOTE: Near cache for JCache is only available for clients NOT servers.

However, using near cache comes with some trade-off for some cases:

- There will be extra memory consumption for storing near cache records at local.
- If invalidation is enabled and entries are updated frequently, there will be many invalidation events across the cluster.
- Near cache does not give strong consistency but gives eventual consistency guarantees. It is possible to read stale data.

12.5.8.1 JCache Near Cache Invalidation

Invalidation is the process of removing an entry from the near cache since the entry is not valid anymore (its value is updated or it is removed from actual cache). Near cache invalidation happens asynchronously at the cluster level, but synchronously in real-time at the current node. This means when an entry is updated (explicitly or via entry processor) or removed (deleted explicitly or via entry processor, evicted, expired), it is invalidated from all near caches asynchronously within the whole cluster but updated/removed at/from the current node synchronously. Generally, whenever the state of an entry changes in the record store by updating its value or removing it, the invalidation event is sent for that entry.

Invalidation events can be sent either individually or in batches. If there are lots of mutating operations such as put/remove on the cache, sending the events in batches is advised. This reduces the network traffic and keeps the eventing system less busy.

You can use the following system properties to configure the sending of invalidation events in batches:

- `hazelcast.cache.invalidation.batch.enabled`: Specifies whether the cache invalidation event batch sending is enabled or not. The default value is `true`.
- `hazelcast.cache.invalidation.batch.size`: Maximum number of cache invalidation events to be drained and sent to the event listeners in a batch. The default value is 100.

- `hazelcast.cache.invalidation.batchfrequency.seconds`: Cache invalidation event batch sending frequency in seconds. When event size does not reach to `hazelcast.cache.invalidation.batch.size` in the given time period, those events are gathered into a batch and sent to the target. The default value is 5 seconds.

So if there are so many clients or so many mutating operations, batching should remain enabled and the batch size should be configured with the `hazelcast.cache.invalidation.batch.size` system property to a suitable value.

12.5.8.2 JCache Near Cache Expiration

Expiration means the eviction of expired records. A record is expired: - if it is not touched (accessed/read) for `<max-idle-seconds>`, - `<time-to-live-seconds>` passed since it is put to near-cache.

Expiration is performed in two cases:

- When a record is accessed, it is checked about if it is expired or not. If it is expired, it is evicted and returns `null` to caller.
- In the background, there is an expiration task that periodically (currently 5 seconds) scans records and evicts the expired records.

12.5.8.3 JCache Near Cache Eviction

In the scope of near cache, eviction means evicting (clearing) the entries selected according to the given `eviction-policy` when the specified `max-size-policy` has been reached. Eviction is handled with `max-size-policy` and `eviction-policy` elements. Please see the [JCache Near Cache Configuration section](#).

12.5.8.3.1 max-size-policy This element defines the state when near cache is full and whether the eviction should be triggered. The following policies for maximum cache size are supported by the near cache eviction:

- **ENTRY_COUNT**: Maximum size based on the entry count in the near cache. Available only for `BINARY` and `OBJECT` in-memory formats.
- **USED_NATIVE_MEMORY_SIZE**: Maximum used native memory size of the specified near cache in MB to trigger the eviction. If the used native memory size exceeds this threshold, the eviction is triggered. Available only for `NATIVE` in-memory format. This is supported only by Hazelcast Enterprise.
- **USED_NATIVE_MEMORY_PERCENTAGE**: Maximum used native memory percentage of the specified near cache to trigger the eviction. If the native memory usage percentage (relative to maximum native memory size) exceeds this threshold, the eviction is triggered. Available only for `NATIVE` in-memory format. This is supported only by Hazelcast Enterprise.
- **FREE_NATIVE_MEMORY_SIZE**: Minimum free native memory size of the specified near cache in MB to trigger the eviction. If free native memory size goes down below of this threshold, eviction is triggered. Available only for `NATIVE` in-memory format. This is supported only by Hazelcast Enterprise.
- **FREE_NATIVE_MEMORY_PERCENTAGE**: Minimum free native memory percentage of the specified near cache to trigger eviction. If free native memory percentage (relative to maximum native memory size) goes down below of this threshold, eviction is triggered. Available only for `NATIVE` in-memory format. This is supported only by Hazelcast Enterprise.

12.5.8.3.2 eviction-policy Once a near cache is full (reached to its maximum size as specified with the `max-size-policy` element), an eviction policy determines which, if any, entries must be evicted. Currently, the following eviction policies are supported by near cache eviction:

- LRU (Least Recently Used)
- LFU (Least Frequently Used)

12.5.8.4 JCache Near Cache Configuration

The following are the example configurations.

Declarative:

```
<hazelcast-client>
...
<near-cache name="myCache">
  <in-memory-format>BINARY</in-memory-format>
  <invalidate-on-change>true</invalidate-on-change>
  <cache-local-entries>false</cache-local-entries>
  <time-to-live-seconds>3600000</time-to-live-seconds>
  <max-idle-seconds>600000</max-idle-seconds>
  <eviction size="1000" max-size-policy="ENTRY_COUNT" eviction-policy="LFU"/>
</near-cache>
...
</hazelcast-client>
```

Programmatic:

```
EvictionConfig evictionConfig = new EvictionConfig();
evictionConfig.setMaxSizePolicy(MaxSizePolicy.ENTRY_COUNT);
evictionConfig.setEvictionPolicy(EvictionPolicy.LFU);
evictionConfig.setSize(10000);

NearCacheConfig nearCacheConfig =
    new NearCacheConfig()
        .setName("myCache")
        .setInMemoryFormat(InMemoryFormat.BINARY)
        .setInvalidateOnChange(true)
        .setCacheLocalEntries(false)
        .setTimeToLiveSeconds(60 * 60 * 1000) // 1 hour TTL
        .setMaxIdleSeconds(10 * 60 * 1000) // 10 minutes max idle seconds
        .setEvictionConfig(evictionConfig);
...

clientConfig.addNearCacheConfig(nearCacheConfig);
```

The following are the definitions of the configuration elements and attributes.

- **in-memory-format:** Storage type of near cache entries. Available values are BINARY, OBJECT and NATIVE_MEMORY. NATIVE_MEMORY is available only for Hazelcast Enterprise. Default value is BINARY.
- **invalidate-on-change:** Specifies whether the cached entries are evicted when the entries are changed (updated or removed) on the local and global. Available values are **true** and **false**. Default value is **true**.
- **cache-local-entries:** Specifies whether the local cache entries are stored eagerly (immediately) to near cache when a put operation from the local is performed on the cache. Available values are **true** and **false**. Default value is **false**.
- **time-to-live-seconds:** Maximum number of seconds for each entry to stay in the near cache. Entries that are older than `<time-to-live-seconds>` will be automatically evicted from the near cache. It can be any integer between 0 and `Integer.MAX_VALUE`. 0 means **infinite**. Default value is 0.
- **max-idle-seconds:** Maximum number of seconds each entry can stay in the near cache as untouched (not-read). Entries that are not read (touched) more than `<max-idle-seconds>` value will be removed from the near cache. It can be any integer between 0 and `Integer.MAX_VALUE`. 0 means `Integer.MAX_VALUE`. Default is 0.
- **eviction:** Specifies when the eviction is triggered (**max-size** policy) and which eviction policy (LRU or LFU) is used for the entries to be evicted. The default value for **max-size-policy** is `ENTRY_COUNT`, default **size** is 10000 and default **eviction-policy** is LRU. For High-Density Memory Store near cache, since `ENTRY_COUNT` eviction policy is not supported yet, eviction must be explicitly configured with one of the supported policies:

- USED_NATIVE_MEMORY_SIZE
- USED_NATIVE_MEMORY_PERCENTAGE
- FREE_NATIVE_MEMORY_SIZE
- FREE_NATIVE_MEMORY_PERCENTAGE.

Near cache can be configured only at the client side.

12.5.8.5 Notes About Client Near Cache Configuration

Near cache configuration can be defined at the client side (using `hazelcast-client.xml` or `ClientConfig`) as independent configuration (independent from the `CacheConfig`). Near cache configuration lookup is handled as described below:

- Look for near cache configuration with the name of the cache given in the client configuration.
- If a defined near cache configuration is found, use this near cache configuration defined at the client.
- Otherwise:
 - If there is a defined default near cache configuration is found, use this default near cache configuration.
 - If there is no default near cache configuration, it means there is no near cache configuration for cache.

12.5.9 Additional Methods

In addition to the operations explained in [ICache Async Methods](#) and [Defining a Custom ExpiryPolicy](#), Hazelcast ICache also provides a set of convenience methods. These methods are not part of the JCache specification.

- `size()`: Returns the estimated size of the distributed cache.
- `destroy()`: Destroys the cache and removes the data from memory. This is different from the method `javax.cache.Cache::close`.
- `getLocalCacheStatistics()`: Returns a `com.hazelcast.cache.CacheStatistics` instance providing the same statistics data as the JMX beans. This method is not available yet on Hazelcast clients: the exception `java.lang.UnsupportedOperationException` is thrown when you use this method on a Hazelcast client.

12.5.10 BackupAwareEntryProcessor

Another feature, especially interesting for distributed environments like Hazelcast, is the JCache specified `javax.cache.processor.EntryProcessor`. For more general information, please see the [Implementing EntryProcessor section](#).

Since Hazelcast provides backups of cached entries on other nodes, the default way to backup an object changed by an `EntryProcessor` is to serialize the complete object and send it to the backup partition. This can be a huge network overhead for big objects.

Hazelcast offers a sub-interface for `EntryProcessor` called `com.hazelcast.cache.BackupAwareEntryProcessor`. This allows the user to create or pass another `EntryProcessor` to run on backup partitions and apply delta changes to the backup entries.

The backup partition `EntryProcessor` can either be the currently running processor (by returning `this`) or it can be a specialized `EntryProcessor` implementation (other from the currently running one) which does different operations or leaves out operations, e.g. sending emails.

If we again take the `EntryProcessor` example from the demonstration application provided in the [Implementing EntryProcessor section](#), the changed code will look like the following snippet.

```
public class UserUpdateEntryProcessor
    implements BackupAwareEntryProcessor<Integer, User, User> {

    @Override
```

```

public User process( MutableEntry<Integer, User> entry, Object... arguments )
    throws EntryProcessorException {

    // Test arguments length
    if ( arguments.length < 1 ) {
        throw new EntryProcessorException( "One argument needed: username" );
    }

    // Get first argument and test for String type
    Object argument = arguments[0];
    if ( !( argument instanceof String ) ) {
        throw new EntryProcessorException(
            "First argument has wrong type, required java.lang.String" );
    }

    // Retrieve the value from the MutableEntry
    User user = entry.getValue();

    // Retrieve the new username from the first argument
    String newUsername = ( String ) arguments[0];

    // Set the new username
    user.setUsername( newUsername );

    // Set the changed user to mark the entry as dirty
    entry.setValue( user );

    // Return the changed user to return it to the caller
    return user;
}

public EntryProcessor<K, V, T> createBackupEntryProcessor() {
    return this;
}
}

```

You can use the additional method `BackupAwareEntryProcessor::createBackupEntryProcessor` to create or return the `EntryProcessor` implementation to run on the backup partition (in the example above, the same processor again).



NOTE: For the backup runs, the returned value from the backup processor is ignored and not returned to the user.

12.5.11 ICache Partition Lost Listener

You can listen to `CachePartitionLostEvent` instances by registering an implementation of `CachePartitionLostListener`, which is also a sub-interface of `java.util.EventListener` from `ICache`.

Let's consider the following example code:

```

public static void main(String[] args) {
    CachingProvider cachingProvider = Caching.getCachingProvider();
    CacheManager cacheManager = cachingProvider.getCacheManager();
    Cache<Object, Object> cache = cacheManager.getCache( ... );

    ICache<Object, Object> unwrappedCache = cache.unwrap( ICache.class );
}

```

```

unwrappedCache.addPartitionLostListener(new CachePartitionLostListener() {
    @Override
    public void partitionLost(CachePartitionLostEvent event) {
        System.out.println(event);
    }
});
}

```

Within this example code, a `CachePartitionLostListener` implementation is registered to a cache and assume that this cache is configured with 1 backup. For this particular cache and any of the partitions in the system, if the partition owner member and its first backup member crash simultaneously, the given `CachePartitionLostListener` receives a corresponding `CachePartitionLostEvent`. If only a single member crashes in the cluster, a `CachePartitionLostEvent` is not fired for this cache since backups for the partitions owned by the crashed member are kept on other members.

Please refer to the Partition Lost Listener section for more information about partition lost detection and partition lost events.

12.6 JCache Specification Compliance

Hazelcast JCache is fully compliant with the JSR 107 TCK (Technology Compatibility Kit), therefore it is officially a JCache implementation. This is tested by running the TCK against the Hazelcast implementation.

You can test Hazelcast JCache for compliance by executing the TCK. Just perform the instructions below:

1. Checkout the TCK from <https://github.com/jsr107/jsr107tck>.
2. Change the properties in `tck-parent/pom.xml` as shown below.
3. Run the TCK by `mvn clean install`.

```

<properties>
<project.build.sourceEncoding>UTF-8</project.build.sourceEncoding>
<project.reporting.outputEncoding>UTF-8</project.reporting.outputEncoding>

<CacheInvocationContextImpl>
    javax.cache.annotation.impl.cdi.CdiCacheKeyInvocationContextImpl
</CacheInvocationContextImpl>

<domain-lib-dir>${project.build.directory}/domainlib</domain-lib-dir>
<domain-jar>domain.jar</domain-jar>

<!-- ##### -->
<!-- Change the following properties on the command line
    to override with the coordinates for your implementation-->
<implementation-groupId>com.hazelcast</implementation-groupId>
<implementation-artifactId>hazelcast</implementation-artifactId>
<implementation-version>3.4</implementation-version>

<!-- Change the following properties to your CacheManager and
    Cache implementation. Used by the unwrap tests. -->
<CacheManagerImpl>
    com.hazelcast.client.cache.impl.HazelcastClientCacheManager
</CacheManagerImpl>
<CacheImpl>com.hazelcast.cache.ICache</CacheImpl>
<CacheEntryImpl>
    com.hazelcast.cache.impl.CacheEntry
</CacheEntryImpl>

```

```
<!-- Change the following to point to your MBeanServer, so that
      the TCK can resolve it. -->
<javax.management.builder.initial>
  com.hazelcast.cache.impl.TCKMBeanServerBuilder
</javax.management.builder.initial>
<org.jsr107.tck.management.agentId>
  TCKMbeanServer
</org.jsr107.tck.management.agentId>
<jsr107.api.version>1.0.0</jsr107.api.version>

<!-- ##### -->
</properties>
```

This will run the tests using an embedded Hazelcast Member.

Chapter 13

Integrated Clustering

In this chapter, we show you how Hazelcast is integrated with Hibernate 2nd level cache and Spring, and how Hazelcast helps with your Filter, Tomcat and Jetty based web session replications.

The [Hibernate Second Level Cache section](#) tells how you should configure Hazelcast and Hibernate to integrate them. It explains the modes of Hazelcast that can be used by Hibernate and also provides how to perform advanced settings like accessing the underlying HazelcastInstance used by Hibernate.

The [Web Session Replication section](#) provides information on how to cluster user HTTP sessions automatically. Also, you can learn how to enable session replication for JEE web applications with Tomcat and Jetty containers. Please note that Tomcat and Jetty based web session replications are Hazelcast Enterprise only modules.

The [Spring Integration section](#) tells how you can integrate Hazelcast into a Spring project by explaining the Hazelcast instance and client configurations with the *hazelcast* namespace. It also lists the supported Spring bean attributes.

13.1 Hibernate Second Level Cache

Hazelcast provides distributed second level cache for your Hibernate entities, collections and queries.

13.1.1 Sample Code for Hibernate

Please see our sample application for Hibernate Second Level Cache.

13.1.2 Supported Hibernate Versions

- hibernate 3.3.x+
- hibernate 4.x

13.1.3 Hibernate Configuration

To configure for Hibernate, add `hazelcast-hibernate3-<hazelcastversion>.jar` or `hazelcast-hibernate4-<hazelcastversion>.jar` into your classpath depending on your Hibernate version.

Then add the following properties into your Hibernate configuration file (e.g. `hibernate.cfg.xml`).

Enabling the use of second level cache

```
<property name="hibernate.cache.use_second_level_cache">true</property>
```

Hibernate RegionFactory

- ***HazelcastCacheRegionFactory***

HazelcastCacheRegionFactory uses Hazelcast Distributed Map to cache the data, so all cache operations go through the wire.

```
<property name="hibernate.cache.region.factory_class">
    com.hazelcast.hibernate.HazelcastCacheRegionFactory
</property>
```

- ***HazelcastLocalCacheRegionFactory***

You can use HazelcastLocalCacheRegionFactory which stores data in a local node and sends invalidation messages when an entry is updated/deleted locally.

```
<property name="hibernate.cache.region.factory_class">
    com.hazelcast.hibernate.HazelcastLocalCacheRegionFactory
</property>
```

Optional Settings

- To enable use of query cache:

```
<property name="hibernate.cache.use_query_cache">true</property>
```

- To force minimal puts into query cache:

```
<property name="hibernate.cache.use_minimal_puts">true</property>
```

- To avoid `NullPointerException` when you have entities that have composite keys (using `@IdClass`):

```
```xml
yourFactoryName ""
```



**NOTE:** *QueryCache is always LOCAL to the node and never distributed across Hazelcast Cluster.*

### 13.1.4 Hazelcast Configuration for Hibernate

- To configure Hazelcast for Hibernate, put the configuration file named `hazelcast.xml` into the root of your classpath. If Hazelcast cannot find `hazelcast.xml`, then it will use the default configuration from `hazelcast.jar`.
- You can define a custom-named Hazelcast configuration XML file with one of these Hibernate configuration properties.

```
<property name="hibernate.cache.provider_configuration_file_resource_path">
 hazelcast-custom-config.xml
</property>
```

```
<property name="hibernate.cache.hazelcast.configuration_file_path">
 hazelcast-custom-config.xml
</property>
```

Hazelcast creates a separate distributed map for each Hibernate cache region. You can easily configure these regions via Hazelcast map configuration. You can define **backup**, **eviction**, **TTL** and **Near Cache** properties.

- Backup Configuration
- Eviction And TTL Configuration
- Near Cache Configuration

### 13.1.5 RegionFactory Options

**13.1.5.0.1 HazelcastCacheRegionFactory** HazelcastCacheRegionFactory uses standard Hazelcast Distributed Maps. All operations like `get`, `put`, and `remove` will be performed using the Distributed Map logic. The only downside of using HazelcastCacheRegionFactory may be the lower performance compared to HazelcastLocalCacheRegionFactory since operations are handled as distributed calls.



**NOTE:** If you use *HazelcastCacheRegionFactory*, you can see your maps on *Management Center*.

With HazelcastCacheRegionFactory, all of the following caches are distributed across Hazelcast Cluster.

- Entity Cache
- Collection Cache
- Timestamp Cache

**13.1.5.0.2 HazelcastLocalCacheRegionFactory** With HazelcastLocalCacheRegionFactory, each cluster member has a local map and each of them is registered to a Hazelcast Topic (ITopic). Whenever a `put` or `remove` operation is performed on a member, an invalidation message is generated on the ITopic and sent to the other members. Those other members remove the related key-value pair on their local maps as soon as they get these invalidation messages. The new value is only updated on this member when a `get` operation runs on that key. In the case of `get` operations, invalidation messages are not generated and reads are performed on the local map.

An illustration of the above logic is shown below.

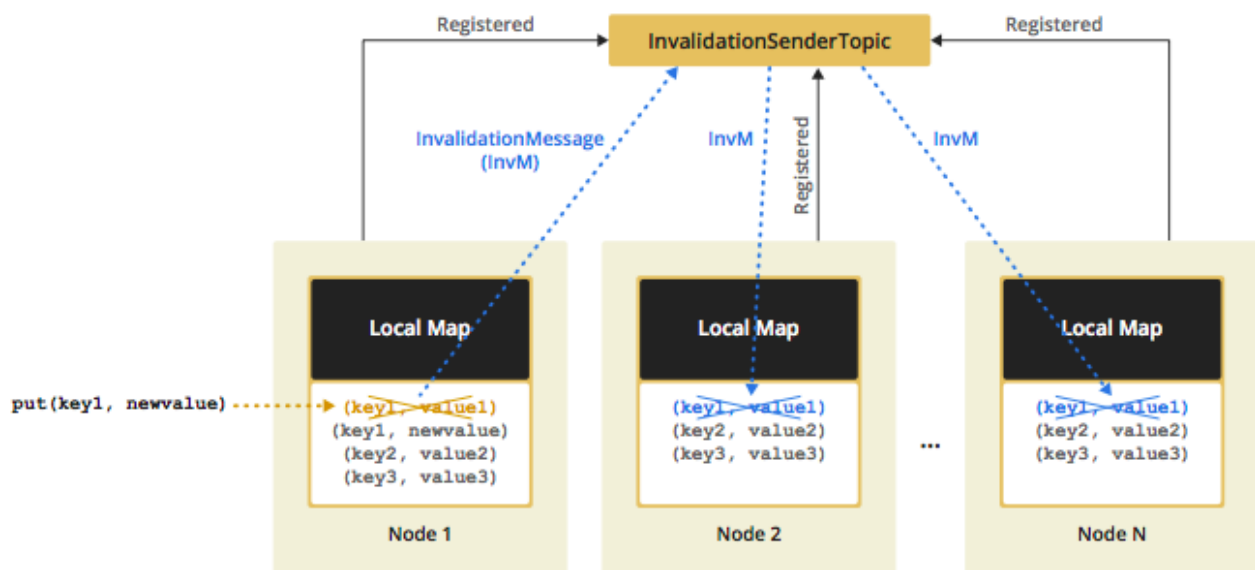


Figure 13.1: image

If your operations are mostly reads, then this option gives better performance.



**NOTE:** If you use *HazelcastLocalCacheRegionFactory*, you cannot see your maps on *Management Center*.

With HazelcastLocalCacheRegionFactory, all of the following caches are not distributed and are kept locally in the Hazelcast Node.

- Entity Cache

- Collection Cache
- Timestamp Cache

Entity and Collection are invalidated on update. When they are updated on a node, an invalidation message is sent to all other nodes in order to remove the entity from their local cache. When needed, each node reads that data from the underlying DB.

Timestamp cache is replicated. On every update, a replication message is sent to all the other nodes.

Eviction support is limited to maximum size of the map (defined by `max-size` configuration element) and TTL only. When maximum size is hit, 20% of the entries will be evicted automatically.

### 13.1.6 Hazelcast Modes for Hibernate Usage

Hibernate 2nd Level Cache can use Hazelcast in two modes: Peer-to-Peer and Client/Server.

#### 13.1.6.1 P2P (Peer-to-Peer)

With P2P mode, each Hibernate deployment launches its own Hazelcast Instance. You can also configure Hibernate to use an existing instance, so instead of creating a new `HazelcastInstance` for each `SessionFactory`, you can use an existing instance by setting the `hibernate.cache.hazelcast.instance_name` Hibernate property to the `HazelcastInstance`'s name. For more information, please see the Named `HazelcastInstance` section.

#### Disabling shutdown during `SessionFactory.close()`

Shutting down `HazelcastInstance` can be disabled during `SessionFactory.close()`. To achieve this set the Hibernate property `hibernate.cache.hazelcast.shutdown_on_session_factory_close` to false. (*In this case Hazelcast property `hazelcast.shutdownhook.enabled` should not be set to false.*) Default value is `true`.

#### 13.1.6.2 Client/Server

- You can set up Hazelcast to connect to the cluster as Native Client. Native client is not a member; it connects to one of the cluster members and delegates all cluster wide operations to it. When the relied cluster member dies, client will transparently switch to another live member.

```
<property name="hibernate.cache.hazelcast.use_native_client">true</property>
```

To set up Native Client, add the Hazelcast **group-name**, **group-password** and **cluster member address** properties. Native Client will connect to the defined member and will get the addresses of all members in the cluster. If the connected member dies or leaves the cluster, the client will automatically switch to another member in the cluster.

```
<property name="hibernate.cache.hazelcast.native_client_address">10.34.22.15</property>
<property name="hibernate.cache.hazelcast.native_client_group">dev</property>
<property name="hibernate.cache.hazelcast.native_client_password">dev-pass</property>
```



**NOTE:** To use Native Client, add `hazelcast-client-<version>.jar` into your classpath. Refer to Clients for more information.

### 13.1.7 Hibernate Concurrency Strategies

Hibernate has four cache concurrency strategies: *read-only*, *read-write*, *nonstrict-read-write* and *transactional*. Hibernate does not force cache providers to support all those strategies. Hazelcast supports the first three: *read-only*, *read-write*, and *nonstrict-read-write*. It has no support for *transactional* strategy yet.

- If you are using XML based class configurations, add a *cache* element into your configuration with the *usage* attribute set to one of the *read-only*, *read-write*, or *nonstrict-read-write* strategies.

```
<class name="eg.Immutable" mutable="false">
 <cache usage="read-only"/>

</class>

<class name="eg.Cat" >
 <cache usage="read-write"/>

 <set name="kittens" ... >
 <cache usage="read-write"/>

 </set>
</class>
```

- If you are using Hibernate-Annotations, then you can add a *\*class-cache\** or *\*collection-cache\** element

```
<class-cache usage="read-only" class="eg.Immutable"/>
<class-cache usage="read-write" class="eg.Cat"/>
<collection-cache collection="eg.Cat.kittens" usage="read-write"/>
```

- Or alternatively, you can put Hibernate Annotation's *@Cache* annotation on your entities and collections.

```
@Cache(usage = CacheConcurrencyStrategy.READ_WRITE)
public class Cat implements Serializable {
 ...
}
```

### 13.1.8 Advanced Settings

#### Accessing underlying HazelcastInstance

Using `com.hazelcast.hibernate.instance.HazelcastAccessor`, you can access the underlying `HazelcastInstance` used by `Hibernate SessionFactory`.

```
SessionFactory sessionFactory = ...;
HazelcastInstance hazelcastInstance = HazelcastAccessor
 .getHazelcastInstance(sessionFactory);
```

#### Changing/setting lock timeout value of *read-write* strategy

You can set a lock timeout value using the `hibernate.cache.hazelcast.lock_timeout_in_seconds` Hibernate property. The value should be in seconds. The default value is 300 seconds.

## 13.2 Web Session Replication

If you are using Tomcat as your web container, please see the [Tomcat based Web Session Replication section](#).

### 13.2.1 Filter Based Web Session Replication

**Sample Code:** Please see our sample application for Filter Based Web Session Replication.

Assume that you have more than one web server (A, B, C) with a load balancer in front of it. If server A goes down, your users on that server will be directed to one of the live servers (B or C), but their sessions will be lost.

We need to have all these sessions backed up somewhere if we do not want to lose the sessions upon server crashes. Hazelcast Web Manager (WM) allows you to cluster user HTTP sessions automatically. The following are required before enabling Hazelcast Session Clustering:

- Target application or web server should support Java 1.6 or higher.
- Target application or web server should support Servlet 3.0 or higher spec.
- Session objects that need to be clustered have to be Serializable.
- In the client/server architecture, session classes does not have to be present in the server classpath.

Here are the steps to setup Hazelcast Session Clustering:

- Put the `hazelcast` and `hazelcast-wm` jars in your `WEB-INF/lib` directory. Optionally, if you wish to connect to a cluster as a client, add `hazelcast-client` as well.
- Put the following XML into `web.xml` file. Make sure Hazelcast filter is placed before all the other filters if any; for example, you can put it at the top.

```
<filter>
<filter-name>hazelcast-filter</filter-name>
<filter-class>com.hazelcast.web.WebFilter</filter-class>
<!--
 Name of the distributed map storing
 your web session objects
-->
<init-param>
 <param-name>map-name</param-name>
 <param-value>my-sessions</param-value>
</init-param>
<!--
 TTL value of the distributed map storing
 your web session objects.
 Any integer between 0 and Integer.MAX_VALUE.
 Default is 0 which is infinite.
-->
<init-param>
 <param-name>session-ttl-seconds</param-name>
 <param-value>0</param-value>
</init-param>
<!--
 How is your load-balancer configured?
 sticky-session means all requests of a session
 is routed to the node where the session is first created.
 This is excellent for performance.
 If sticky-session is set to false, when a session is updated
 on a node, entry for this session on all other nodes is invalidated.
 You have to know how your load-balancer is configured before
 setting this parameter. Default is true.
-->
<init-param>
 <param-name>sticky-session</param-name>
```

```

 <param-value>true</param-value>
</init-param>
<!--
 Name of session id cookie
-->
<init-param>
 <param-name>cookie-name</param-name>
 <param-value>hazelcast.sessionId</param-value>
</init-param>
<!--
 Domain of session id cookie. Default is based on incoming request.
-->
<init-param>
 <param-name>cookie-domain</param-name>
 <param-value>.mywebsite.com</param-value>
</init-param>
<!--
 Should cookie only be sent using a secure protocol? Default is false.
-->
<init-param>
 <param-name>cookie-secure</param-name>
 <param-value>>false</param-value>
</init-param>
<!--
 Should HttpOnly attribute be set on cookie ? Default is false.
-->
<init-param>
 <param-name>cookie-http-only</param-name>
 <param-value>>false</param-value>
</init-param>
<!--
 Are you debugging? Default is false.
-->
<init-param>
 <param-name>debug</param-name>
 <param-value>true</param-value>
</init-param>
<!--
 Configuration xml location;
 * as servlet resource OR
 * as classpath resource OR
 * as URL
 Default is one of hazelcast-default.xml
 or hazelcast.xml in classpath.
-->
<init-param>
 <param-name>config-location</param-name>
 <param-value>/WEB-INF/hazelcast.xml</param-value>
</init-param>
<!--
 Do you want to use an existing HazelcastInstance?
 Default is null.
-->
<init-param>
 <param-name>instance-name</param-name>
 <param-value>default</param-value>
</init-param>
<!--

```

```

 Do you want to connect as a client to an existing cluster?
 Default is false.
-->
<init-param>
 <param-name>use-client</param-name>
 <param-value>>false</param-value>
</init-param>
<!--
 Client configuration location;
 * as servlet resource OR
 * as classpath resource OR
 * as URL
 Default is null.
-->
<init-param>
 <param-name>client-config-location</param-name>
 <param-value>/WEB-INF/hazelcast-client.properties</param-value>
</init-param>
<!--
 Do you want to shutdown HazelcastInstance during
 web application undeploy process?
 Default is true.
-->
<init-param>
 <param-name>shutdown-on-destroy</param-name>
 <param-value>>true</param-value>
</init-param>
<!--
 Do you want to cache sessions locally in each instance?
 Default is false.
-->
<init-param>
 <param-name>deferred-write</param-name>
 <param-value>>false</param-value>
</init-param>
</filter>
<filter-mapping>
 <filter-name>hazelcast-filter</filter-name>
 <url-pattern>/*</url-pattern>
 <dispatcher>FORWARD</dispatcher>
 <dispatcher>INCLUDE</dispatcher>
 <dispatcher>REQUEST</dispatcher>
</filter-mapping>

<listener>
 <listener-class>com.hazelcast.web.SessionListener</listener-class>
</listener>

```

- Package and deploy your war file as you would normally do.

It is that easy. All HTTP requests will go through Hazelcast WebFilter and it will put the session objects into Hazelcast distributed map if needed.

### 13.2.2 Spring Security Support

*Sample Code:* Please see our sample application for Spring Security Support.



If Spring based security is used for your application, you should use `com.hazelcast.web.spring.SpringAwareWebFilter` instead of `com.hazelcast.web.WebFilter` in your filter definition.

```
...

<filter>
 <filter-name>hazelcast-filter</filter-name>
 <filter-class>com.hazelcast.web.spring.SpringAwareWebFilter</filter-class>
 ...
</filter>

...
```

`SpringAwareWebFilter` notifies Spring by publishing events to Spring context. These events are used by the `org.springframework.security.core.session.SessionRegistry` instance.

As before, you must also define `com.hazelcast.web.SessionListener` in your `web.xml`. However, you do not need to define `org.springframework.security.web.session.HttpSessionEventPublisher` in your `web.xml` as before, since `SpringAwareWebFilter` already informs Spring about session based events like `create` or `destroy`.

### 13.2.2.1 Client Mode vs. P2P Mode

Hazelcast Session Replication works as P2P by default. To switch to Client/Server architecture, you need to set the `use-client` parameter to `true`. P2P mode is more flexible and requires no configuration in advance; in Client/Server architecture, clients need to connect to an existing Hazelcast Cluster. In case of connection problems, clients will try to reconnect to the cluster. The default retry count is 3. In the client/server architecture, if servers goes down, Hazelcast web manager will keep the updates in the local and after servers come back, the clients will update the distributed map.

### 13.2.2.2 Caching Locally with `deferred-write`

If the value for `deferred-write` is set as `true`, Hazelcast will cache the session locally and will update the local session when an attribute is set or deleted. At the end of the request, it will update the distributed map with all the updates. It will not update the distributed map upon each attribute update, but will only call it once at the end of the request. It will also cache it, i.e. whenever there is a read for the attribute, it will read it from the cache.

**Important note about `deferred-write=false` setting:**

If `deferred-write` is `false`, any update (i.e. `setAttribute`) on the session will directly be available in the cluster. One exception to this behavior is the changes to the session attribute objects. To update an attribute cluster-wide, `setAttribute` must be called after changes are made to the attribute object.

The following example explains how to update an attribute in the case of `deferred-write=false` setting:

```
session.setAttribute("myKey", new ArrayList());
List list1 = session.getAttribute("myKey");
list1.add("myValue");
session.setAttribute("myKey", list1); // changes updated in the cluster
```

### 13.2.2.3 SessionId Generation

`SessionId` generation is done by the Hazelcast Web Session Module if session replication is configured in the web application. The default cookie name for the `sessionId` is `hazelcast.sessionId`. This name is configurable with a `cookie-name` parameter in the `web.xml` file of the application. `hazelcast.sessionId` is just a UUID prefixed with "HZ" character and without "-" character, e.g. `HZ6F2D036789E4404893E99C05D8CA70C7`.

When called by the target application, the value of `HttpSession.getId()` is the same as the value of `hazelcast.sessionId`.

#### 13.2.2.4 Session Expiry

Hazelcast automatically removes sessions from the cluster if the sessions are expired on the Web Container. This removal is done by `com.hazelcast.web.SessionListener`, which is an implementation of `javax.servlet.http.HttpSessionListener`.

Default session expiration configuration depends on the Servlet Container that is being used. You can also define it in your `web.xml`.

```
<session-config>
 <session-timeout>60</session-timeout>
</session-config>
```

If you want to override session expiry configuration with a Hazelcast specific configuration, you can use `session-ttl-seconds` to specify TTL on the Hazelcast Session Replication Distributed Map.

#### 13.2.2.5 sticky-session

Hazelcast holds whole session attributes in a distributed map and in a local HTTP session. Local session is required for fast access to data and distributed map is needed for fail-safety.

- If `sticky-session` is not used, whenever a session attribute is updated in a node (in both node local session and clustered cache), that attribute should be invalidated in all other nodes' local sessions, because now they have dirty values. Therefore, when a request arrives at one of those other nodes, that attribute value is fetched from clustered cache.
- To overcome the performance penalty of sending invalidation messages during updates, you can use sticky sessions. If Hazelcast knows sessions are sticky, invalidation will not be sent because Hazelcast assumes there is no other local session at the moment. When a server is down, requests belonging to a session hold in that server will routed to other server, and that server will fetch session data from clustered cache. That means, using sticky sessions, one will not suffer the performance penalty of accessing clustered data and can benefit recover from a server failure.

#### 13.2.2.6 transient-attributes

If you have some attributes that you do not want them to be distributed, you can mark those attributes as transient. Transient attributes are kept in and when the server is shutdown, you lost the attribute values. You can set the transient attributes in your `web.xml` file. Here is an example:

```
...
<init-param>
 <param-name>transient-attributes</param-name>
 <param-value>key1,key2,key3</param-value>
</init-param>
...
```

### 13.2.3 Tomcat Based Web Session Replication

## Enterprise Only

Figure 13.2:



**NOTE:** This feature is supported for Hazelcast Enterprise 3.3 or higher.

**Sample Code:** Please see our sample application for Tomcat Based Web Session Replication.

### 13.2.3.1 Overview

Session Replication with Hazelcast Enterprise is a container specific module that enables session replication for JEE Web Applications without requiring changes to the application.

#### *Features*

1. Seamless Tomcat 6, 7 & 8 integration (Tomcat 8 is supported for Hazelcast Enterprise 3.5 or higher.)
2. Support for sticky and non-sticky sessions
3. Tomcat failover
4. Deferred write for performance boost

#### *Supported Containers*

Tomcat Web Session Replication Module has been tested against the following containers.

- Tomcat 6.0.x - It can be downloaded [here](#)).
- Tomcat 7.0.x - It can be downloaded [here](#)).
- Tomcat 8.0.x - It can be downloaded [here](#)).

The latest tested versions are **6.0.39**, **7.0.40** and **8.0.20**.

#### *Requirements*

- Tomcat instance must be running with Java 1.6 or higher.
- Session objects that need to be clustered have to be Serializable.

### 13.2.3.2 How Tomcat Session Replication works

Tomcat Session Replication in Hazelcast Enterprise is a Hazelcast Module where each created `HttpSession` Object is kept in the Hazelcast Distributed Map. If configured with Sticky Sessions, each Tomcat Instance has its own local copy of the session for performance boost.

Since the sessions are in Hazelcast Distributed Map, you can use all the available features offered by Hazelcast Distributed Map implementation, such as MapStore and WAN Replication.

Tomcat Web Sessions run in two different modes:

- **P2P**: all Tomcat instances launch its own Hazelcast Instance and join to the Hazelcast Cluster and,
- **Client/Server**: all Tomcat instances put/retrieve the session data to/from an existing Hazelcast Cluster.

### 13.2.3.3 P2P (Peer-to-Peer) Deployment

P2P deployment launches an embedded Hazelcast Node in each server instance.

#### *Features*

This type of deployment is simple: just configure your Tomcat and launch. There is no need for an external Hazelcast cluster.

#### *Sample P2P Configuration to use Hazelcast Session Replication*

- Go to [hazelcast.com](http://hazelcast.com) and download the latest Hazelcast Enterprise.
- Unzip the Hazelcast Enterprise zip file into the folder `$HAZELCAST_ENTERPRISE_ROOT`.
- Update `$HAZELCAST_ENTERPRISE_ROOT/bin/hazelcast.xml` with the provided Hazelcast Enterprise License Key.

- Put `$HAZELCAST_ENTERPRISE_ROOT/lib/hazelcast-enterprise-all-<version>.jar`, `$HAZELCAST_ENTERPRISE_ROOT/lib/hazelcast-enterprise-<tomcatversion>-<version>.jar` and `hazelcast.xml` in the folder `$CATALINA_HOME/lib/`.
- Put a `<Listener>` element into the file `$CATALINA_HOME/conf/server.xml` as shown below.

```
<Server>
...
 <Listener className="com.hazelcast.session.P2PLifecycleListener"/>
...
</Server>
```

- Put a `<Manager>` element into the file `$CATALINA_HOME/conf/context.xml` as shown below.

```
<Context>
...
 <Manager className="com.hazelcast.session.HazelcastSessionManager"/>
...
</Context>
```

- Start Tomcat instances with a configured load balancer and deploy the web application.

#### *Optional Attributes for Listener Element*

- Optionally, you can add `configLocation` attribute into the `<Listener>` element. If not provided, `hazelcast.xml` in the classpath is used by default. URL or full filesystem path as a `configLocation` value is supported.

#### 13.2.3.4 Client/Server Deployment

In this deployment type, Tomcat instances work as clients on an existing Hazelcast Cluster.

##### *Features*

- The existing Hazelcast cluster is used as the Session Replication Cluster.
- Offloading Session Cache from Tomcat to the Hazelcast Cluster.
- The architecture is completely independent. Complete reboot of Tomcat instances.

#### *Sample Client/Server Configuration to use Hazelcast Session Replication*

- Go to [hazelcast.com](http://hazelcast.com) and download the latest Hazelcast Enterprise.
- Unzip the Hazelcast Enterprise zip file into the folder `$HAZELCAST_ENTERPRISE_ROOT`.
- Put `$HAZELCAST_ENTERPRISE_ROOT/lib/hazelcast-client-<version>.jar`, `$HAZELCAST_ENTERPRISE_ROOT/lib/hazelcast-enterprise-<tomcatversion>-<version>.jar` in the folder `$CATALINA_HOME/lib/`.
- Put a `<Listener>` element into the `$CATALINA_HOME/conf/server.xml` as shown below.

```
<Server>
...
 <Listener className="com.hazelcast.session.ClientServerLifecycleListener"/>
...
</Server>
```

- Update the `<Manager>` element in the `$CATALINA_HOME/conf/context.xml` as shown below.

```
<Context>
 <Manager className="com.hazelcast.session.HazelcastSessionManager"
 clientOnly="true"/>
</Context>
```

- Launch a Hazelcast Instance using `$HAZELCAST_ENTERPRISE_ROOT/bin/server.sh` or `$HAZELCAST_ENTERPRISE_ROOT/bin/server.bat`.
- Start Tomcat instances with a configured load balancer and deploy the web application.

#### *Optional Attributes for Listener Element*

- Optionally, you can add `configLocation` attribute into the `<Listener>` element. If not provided, `hazelcast-client-default.xml` in `hazelcast-client-<version>.jar` file is used by default. Any client XML file in the classpath, URL or full filesystem path as a `configLocation` value is also supported.

#### 13.2.3.5 Optional Attributes for Manager Element

`<Manager>` element is used both in P2P and Client/Server mode. You can use the following attributes to configure Tomcat Session Replication Module to better serve your needs.

- Add `mapName` attribute into `<Manager>` element. Its default value is *default Hazelcast Distributed Map*. Use this attribute if you have a specially configured map for special cases like WAN Replication, Eviction, MapStore, etc.
- Add `sticky` attribute into `<Manager>` element. Its default value is *true*.
- Add `processExpiresFrequency` attribute into `<Manager>` element. It specifies the frequency of session validity check, in seconds. Its default value is *6* and the minimum value that you can set is *1*.
- Add `deferredWrite` attribute into `<Manager>` element. Its default value is *true*.

#### 13.2.3.6 Session Caching and deferredWrite parameter

Tomcat Web Session Replication Module has its own nature of caching. Attribute changes during the HTTP Request/HTTP Response cycle is cached by default. Distributing those changes to the Hazelcast Cluster is costly. Because of that, Session Replication is only done at the end of each request for updated and deleted attributes. The risk in this approach is losing data if a Tomcat crash happens in the middle of the HTTP Request operation.

You can change that behavior by setting `deferredWrite=false` in your `<Manager>` element. By disabling it, all updates that are done on session objects are directly distributed into Hazelcast Cluster.

#### 13.2.3.7 Session Expiry

Based on Tomcat configuration or `sessionTimeout` setting in `web.xml`, sessions are expired over time. This requires a cleanup on the Hazelcast Cluster since there is no need to keep expired sessions in the cluster.

`processExpiresFrequency`, which is defined in `<Manager>`, is the only setting that controls the behavior of session expiry policy in the Tomcat Web Session Replication Module. By setting this, you can set the frequency of the session expiration checks in the Tomcat Instance.

#### 13.2.3.8 Enabling Session Replication in Multi-App environment

Tomcat can be configured in two ways to enable Session Replication for deployed applications.

- Server Context.xml Configuration
- Application Context.xml Configuration

### *Server Context.xml Configuration*

By configuring `$CATALINA_HOME/conf/context.xml`, you can enable session replication for all applications deployed in the Tomcat Instance.

### *Application Context.xml Configuration*

By configuring `$CATALINA_HOME/conf/[enginename]/[hostname]/[applicationName].xml`, you can enable Session Replication per deployed application.

#### 13.2.3.9 Session Affinity

##### *Sticky Sessions (default)*

Sticky Sessions are used to improve the performance since the sessions do not move around the cluster.

Request goes always to the same instance where the session was firstly created. By using a sticky session, you eliminate session replication problems mostly, except for the failover cases. In case of failovers, Hazelcast helps you not lose existing sessions.

##### *Non-Sticky Sessions*

Non-Sticky Sessions are not good for performance because you need to move session data all over the cluster every time a new request comes in.

However, load balancing might be super easy with Non-Sticky caches. In case of heavy load, you can distribute the request to the least used Tomcat instance. Hazelcast supports Non-Sticky Sessions as well.

#### 13.2.3.10 Tomcat Failover and `jvmRoute` Parameter

Each HTTP Request is redirected to the same Tomcat instance if sticky sessions are enabled. The parameter `jvmRoute` is added to the end of session ID as a suffix, to make Load Balancer aware of the target Tomcat instance.

When Tomcat Failure happens and Load Balancer cannot redirect the request to the owning instance, it sends a request to one of the available Tomcat instances. Since the `jvmRoute` parameter of session ID is different than that of the target Tomcat instance, Hazelcast Session Replication Module updates the session ID of the session with the new `jvmRoute` parameter. That means that the Session is moved to another Tomcat instance and Load Balancer will redirect all subsequent HTTP Requests to the new Tomcat Instance.



**NOTE:** If `stickySession` is enabled, `jvmRoute` parameter must be set in `$CATALINA_HOME/conf/server.xml` and unique among Tomcat instances in the cluster.

```
<Engine name="Catalina" defaultHost="localhost" jvmRoute="tomcat-8080">
```

#### 13.2.4 Jetty Based Web Session Replication

## Enterprise Only

Figure 13.3:



**NOTE:** This feature is supported for Hazelcast Enterprise 3.4 or higher.

**Sample Code:** Please see our sample application for Jetty Based Web Session Replication.

#### 13.2.4.1 Overview

Jetty Web Session Replication with Hazelcast Enterprise is a container specific module that enables session replication for JEE Web Applications without requiring changes to the application.

##### *Features*

1. Jetty 7 & 8 & 9 support
2. Support for sticky and non-sticky sessions
3. Jetty failover
4. Deferred write for performance boost
5. Client/Server and P2P modes
6. Declarative and programmatic configuration

##### *Supported Containers*

Jetty Web Session Replication Module has been tested against the following containers.

- Jetty 7 - It can be downloaded [here](#).
- Jetty 8 - It can be downloaded [here](#).
- Jetty 9 - It can be downloaded [here](#).

Latest tested versions are **7.6.16.v20140903**, **8.1.16.v20140903** and **9.2.3.v20140905**

##### *Requirements*

- Jetty instance must be running with Java 1.6 or higher.
- Session objects that need to be clustered have to be Serializable.
- Hazelcast Jetty-based Web Session Replication is built on top of the `jetty-nosql` module. This module (`jetty-nosql-<*jettyversion*>.jar`) needs to be added to `$JETTY_HOME/lib/ext`. This module can be found [here](#).

#### 13.2.4.2 How Jetty Session Replication Works

Jetty Session Replication in Hazelcast Enterprise is a Hazelcast Module where each created `HttpSession` Object's state is kept in Hazelcast Distributed Map.

Since the session data are in Hazelcast Distributed Map, you can use all the available features offered by Hazelcast Distributed Map implementation, such as MapStore and WAN Replication.

Jetty Web Session Replication runs in two different modes:

- **P2P**: all Jetty instances launch its own Hazelcast Instance and join to the Hazelcast Cluster and,
- **Client/Server**: all Jetty instances put/retrieve the session data to/from an existing Hazelcast Cluster.

#### 13.2.4.3 P2P (Peer-to-Peer) Deployment

P2P deployment launches embedded Hazelcast Node in each server instance.

##### *Features*

This type of deployment is simple: just configure your Jetty and launch. There is no need for an external Hazelcast cluster.

##### *Sample P2P Configuration to use Hazelcast Session Replication*

- Go to [hazelcast.com](http://hazelcast.com) and download the latest Hazelcast Enterprise.
- Unzip the Hazelcast Enterprise zip file into the folder `$HAZELCAST_ENTERPRISE_ROOT`.

- Update `$HAZELCAST_ENTERPRISE_ROOT/bin/hazelcast.xml` with the provided Hazelcast Enterprise License Key.
- Put `hazelcast.xml` in the folder `$JETTY_HOME/etc`.
- Put `$HAZELCAST_ENTERPRISE_ROOT/lib/hazelcast-enterprise-all-<version>.jar`, `$HAZELCAST_ENTERPRISE_ROOT/lib/hazelcast-enterprise-<jettyversion>-<version>.jar` in the folder `$JETTY_HOME/lib/ext`.
- Configure Session ID Manager and Session Manager. Please see the following explanations for configuring these managers.

#### *Configuring the HazelcastSessionIdManager*

You need to configure a `com.hazelcast.session.HazelcastSessionIdManager` instance in `jetty.xml`. Add the following lines to your `jetty.xml`.

```
<Set name="sessionIdManager">
 <New id="hazelcastIdMgr" class="com.hazelcast.session.HazelcastSessionIdManager">
 <Arg><Ref id="Server"/></Arg>
 <Set name="configLocation">etc/hazelcast.xml</Set>
 </New>
</Set>
```

#### *Configuring the HazelcastSessionManager*

`HazelcastSessionManager` can be configured from a `context.xml` file. Each application has a context file in the `$CATALINA_HOME$/contexts` folder. You need to create this context file if it does not exist. The context filename must be the same as the application name, e.g. `example.war` should have a context file named `example.xml`.

The file `context.xml` should have the following content.

```
<Ref name="Server" id="Server">
 <Call id="hazelcastIdMgr" name="getSessionIdManager"/>
</Ref>
<Set name="sessionHandler">
 <New class="org.eclipse.jetty.server.session.SessionHandler">
 <Arg>
 <New id="hazelcastMgr" class="com.hazelcast.session.HazelcastSessionManager">
 <Set name="idManager">
 <Ref id="hazelcastIdMgr"/>
 </Set>
 </New>
 </Arg>
 </New>
</Set>
```

- Start Jetty instances with a configured load balancer and deploy the web application.



**NOTE:** In Jetty 9, there is no folder with the name `contexts`. You have to put the file `context.xml`\* under the `webapps` directory. And you need to add the following lines to `context.xml`.\*

```
<Ref name="Server" id="Server">
 <Call id="hazelcastIdMgr" name="getSessionIdManager"/>
</Ref>
<Set name="sessionHandler">
 <New class="org.eclipse.jetty.server.session.SessionHandler">
 <Arg>
 <New id="hazelcastMgr" class="com.hazelcast.session.HazelcastSessionManager">
 <Set name="sessionIdManager">
```



```

 <Ref id="hazelcastIdMgr"/>
 </Set>
</New>
</Arg>
</New>
</Set>

```

#### 13.2.4.4 Client/Server Deployment

In client/server deployment type, Jetty instances work as clients to an existing Hazelcast Cluster.

##### *Features*

- Existing Hazelcast cluster is used as the Session Replication Cluster.
- The architecture is completely independent. Complete reboot of Jetty instances without losing data.

##### *Sample Client/Server Configuration to use Hazelcast Session Replication*

- Go to [hazelcast.com](http://hazelcast.com) and download the latest Hazelcast Enterprise.
- Unzip the Hazelcast Enterprise zip file into the folder `$HAZELCAST_ENTERPRISE_ROOT`.
- Update `$HAZELCAST_ENTERPRISE_ROOT/bin/hazelcast.xml` with the provided Hazelcast Enterprise License Key.
- Put `hazelcast.xml` in the folder `$JETTY_HOME/etc`.
- Put `$HAZELCAST_ENTERPRISE_ROOT/lib/hazelcast-enterprise-all-<version>.jar`, `$HAZELCAST_ENTERPRISE_ROOT/lib/hazelcast-enterprise-<jettyversion>-<version>.jar` in the folder `$JETTY_HOME/lib/ext`.
- Configure Session ID Manager and Session Manager. Please see below explanations for configuring these managers.

##### *Configuring the HazelcastSessionIdManager*

You need to configure a `com.hazelcast.session.HazelcastSessionIdManager` instance in `jetty.xml`. Add the following lines to your `jetty.xml`.

```

<Set name="sessionIdManager">
 <New id="hazelcastIdMgr" class="com.hazelcast.session.HazelcastSessionIdManager">
 <Arg><Ref id="Server"/></Arg>
 <Set name="configLocation">etc/hazelcast.xml</Set>
 <Set name="clientOnly">true</Set>
 </New>
</Set>

```

##### *Configuring the HazelcastSessionManager*

`HazelcastSessionManager` can be configured from a `context.xml` file. Each application has a context file under the `$CATALINA_HOME$/contexts` folder. You need to create this context file if it does not exist. The context filename must be the same as the application name, e.g. `example.war` should have a context file named `example.xml`.

```

<Ref name="Server" id="Server">
 <Call id="hazelcastIdMgr" name="getSessionIdManager"/>
</Ref>
<Set name="sessionHandler">
 <New class="org.eclipse.jetty.server.session.SessionHandler">
 <Arg>
 <New id="hazelMgr" class="com.hazelcast.session.HazelcastSessionManager">
 <Set name="idManager">
 <Ref id="hazelcastIdMgr"/>
 </Set>
 </New>
 </Arg>
 </New>
</Set>

```

```

 </New>
 </Arg>
</New>
</Set>

```



**NOTE:** In Jetty 9, there is no folder with name `contexts`. You have to put the file `context.xml*` file under `webapps` directory. And you need to add below lines to `context.xml*`

```

<Ref name="Server" id="Server">
 <Call id="hazelcastIdMgr" name="getSessionIdManager"/>
</Ref>
<Set name="sessionHandler">
 <New class="org.eclipse.jetty.server.session.SessionHandler">
 <Arg>
 <New id="hazelMgr" class="com.hazelcast.session.HazelcastSessionManager">
 <Set name="sessionIdManager">
 <Ref id="hazelcastIdMgr"/>
 </Set>
 </New>
 </Arg>
 </New>
</Set>

```

- Launch a Hazelcast Instance using `$HAZELCAST_ENTERPRISE_ROOT/bin/server.sh` or `$HAZELCAST_ENTERPRISE_ROOT/bin/server.bat`.
- Start Tomcat instances with a configured load balancer and deploy the web application.

#### 13.2.4.5 Optional HazelcastSessionIdManager Parameters

`HazelcastSessionIdManager` is used both in P2P and Client/Server mode. Use the following parameters to configure the Jetty Session Replication Module to better serve your needs.

- `workerName`: Set this attribute to a unique value for each Jetty instance to enable session affinity with a sticky-session configured load balancer.
- `cleanUpPeriod`: Defines the working period of session clean-up task in milliseconds.
- `configLocation`: specifies the location of `hazelcast.xml`.

#### 13.2.4.6 Optional HazelcastSessionManager Parameters

`HazelcastSessionManager` is used both in P2P and Client/Server mode. Use the following parameters to configure Jetty Session Replication Module to better serve your needs.

- `savePeriod`: Sets the interval of saving session data to the Hazelcast cluster. Jetty Web Session Replication Module has its own nature of caching. Attribute changes during the HTTP Request/HTTP Response cycle are cached by default. Distributing those changes to the Hazelcast Cluster is costly, so Session Replication is only done at the end of each request for updated and deleted attributes. The risk with this approach is losing data if a Jetty crash happens in the middle of the HTTP Request operation. You can change that behavior by setting the `savePeriod` attribute.

Notes:

- If `savePeriod` is set to `-2`, `HazelcastSessionManager.save` method is called for every `doPutOrRemove` operation.
- If it is set to `-1`, the same method is never called if Jetty is not shut down.
- If it is set to `0` (the default value), the same method is called at the end of request.
- If it is set to `1`, the same method is called at the end of request if session is dirty.

#### 13.2.4.7 Session Expiry

Based on Tomcat configuration or `sessionTimeout` setting in `web.xml`, the sessions are expired over time. This requires a cleanup on Hazelcast Cluster, since there is no need to keep expired sessions in it.

`cleanUpPeriod`, which is defined in `HazelcastSessionIdManager`, is the only setting that controls the behavior of session expiry policy in Jetty Web Session Replication Module. By setting this, you can set the frequency of the session expiration checks in the Jetty Instance.

#### 13.2.4.8 Session Affinity

`HazelcastSessionIdManager` can work in sticky and non-sticky setups.

The clustered session mechanism works in conjunction with a load balancer that supports stickiness. Stickiness can be based on various data items, such as source IP address, or characteristics of the session ID, or a load-balancer specific mechanism. For those load balancers that examine the session ID, `HazelcastSessionIdManager` appends a node ID to the session ID, which can be used for routing. You must configure the `HazelcastSessionIdManager` with a `workerName` that is unique across the cluster. Typically the name relates to the physical node on which the instance is executed. If this name is not unique, your load balancer might fail to distribute your sessions correctly. If sticky sessions are enabled, the `workerName` parameter has to be set, as shown below.

```
<Set name="sessionIdManager">
 <New id="hazelcastIdMgr" class="com.hazelcast.session.HazelcastSessionIdManager">
 <Arg><Ref id="Server"/></Arg>
 <Set name="configLocation">etc/hazelcast.xml</Set>
 <Set name="workerName">unique-worker-1</Set>
 </New>
</Set>
```

## 13.3 Spring Integration

You can integrate Hazelcast with Spring and this chapter explains the configuration of Hazelcast within Spring context.

### 13.3.1 Supported Versions

- Spring 2.5+

### 13.3.2 Spring Configuration

*Sample Code: Please see our sample application for Spring Configuration.*

#### 13.3.2.1 Bean Declaration by Spring *beans* Namespace

##### *Classpath Configuration*

This configuration requires the following jar file in the classpath:

- `hazelcast-<version>.jar`

##### *Bean Declaration*

You can declare Hazelcast Objects using the default Spring *beans* namespace. You can find an example usage of Hazelcast Instance declaration as follows:

```

<bean id="instance" class="com.hazelcast.core.Hazelcast" factory-method="newHazelcastInstance">
 <constructor-arg>
 <bean class="com.hazelcast.config.Config">
 <property name="groupConfig">
 <bean class="com.hazelcast.config.GroupConfig">
 <property name="name" value="dev"/>
 <property name="password" value="pwd"/>
 </bean>
 </property>
 <!-- and so on ... -->
 </bean>
 </constructor-arg>
</bean>

<bean id="map" factory-bean="instance" factory-method="getMap">
 <constructor-arg value="map"/>
</bean>

```

### 13.3.2.2 Bean Declaration by *hazelcast* Namespace

#### *Classpath Configuration*

Hazelcast-Spring integration requires the following JAR files in the classpath:

- `hazelcast-spring-<version>.jar`
- `hazelcast-<version>.jar`

or

- `hazelcast-all-<version>.jar`

#### *Bean Declaration*

Hazelcast has its own namespace **hazelcast** for bean definitions. You can easily add the namespace declaration `xmlns:hz="http://www.hazelcast.com/schema/spring"` to the **beans** element in the context file so that *hz* namespace shortcut can be used as a bean declaration.

Here is an example schema definition for Hazelcast 3.3.x:

```

<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:hz="http://www.hazelcast.com/schema/spring"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-beans-3.0.xsd
 http://www.hazelcast.com/schema/spring
 http://www.hazelcast.com/schema/spring/hazelcast-spring.xsd">

```

### 13.3.2.3 Supported Configurations with *hazelcast* Namespace

- **Hazelcast Instance Configuration**

```

<hz:hazelcast id="instance">
 <hz:config>
 <hz:group name="dev" password="password"/>
 <hz:network port="5701" port-auto-increment="false">
 <hz:join>
 <hz:multicast enabled="false"

```

```

 multicast-group="224.2.2.3"
 multicast-port="54327"/>
 <hz:tcp-ip enabled="true">
 <hz:members>10.10.1.2, 10.10.1.3</hz:members>
 </hz:tcp-ip>
</hz:join>
</hz:network>
<hz:map name="map"
 backup-count="2"
 max-size="0"
 eviction-percentage="30"
 read-backup-data="true"
 eviction-policy="NONE"
 merge-policy="com.hazelcast.map.merge.PassThroughMergePolicy"/>
</hz:config>
</hz:hazelcast>

```

- **Hazelcast Client Configuration**

```

<hz:client id="client">
 <hz:group name="{cluster.group.name}" password="{cluster.group.password}" />
 <hz:network connection-attempt-limit="3"
 connection-attempt-period="3000"
 connection-timeout="1000"
 redo-operation="true"
 smart-routing="true">
 <hz:member>10.10.1.2:5701</hz:member>
 <hz:member>10.10.1.3:5701</hz:member>
 </hz:network>
</hz:client>

```

- **Hazelcast Supported Type Configurations and Examples**

- map
- multiMap
- replicatedmap
- queue
- topic
- set
- list
- executorService
- idGenerator
- atomicLong
- atomicReference
- semaphore
- countdownLatch
- lock

```

<hz:map id="map" instance-ref="client" name="map" lazy-init="true" />
<hz:multiMap id="multiMap" instance-ref="instance" name="multiMap"
 lazy-init="false" />
<hz:replicatedmap id="replicatedmap" instance-ref="instance"
 name="replicatedmap" lazy-init="false" />
<hz:queue id="queue" instance-ref="client" name="queue"
 lazy-init="true" depends-on="instance"/>
<hz:topic id="topic" instance-ref="instance" name="topic"

```

```

 depends-on="instance, client"/>
<hz:set id="set" instance-ref="instance" name="set" />
<hz:list id="list" instance-ref="instance" name="list"/>
<hz:executorService id="executorService" instance-ref="client"
 name="executorService"/>
<hz:idGenerator id="idGenerator" instance-ref="instance"
 name="idGenerator"/>
<hz:atomicLong id="atomicLong" instance-ref="instance" name="atomicLong"/>
<hz:atomicReference id="atomicReference" instance-ref="instance"
 name="atomicReference"/>
<hz:semaphore id="semaphore" instance-ref="instance" name="semaphore"/>
<hz:countDownLatch id="countDownLatch" instance-ref="instance"
 name="countDownLatch"/>
<hz:lock id="lock" instance-ref="instance" name="lock"/>

```

- **\*\*Supported Spring Bean Attributes\*\***

Hazelcast also supports lazy-init, scope and depends-on bean attributes.

```

<hz:hazelcast id="instance" lazy-init="true" scope="singleton">
 ...
</hz:hazelcast>
<hz:client id="client" scope="prototype" depends-on="instance">
 ...
</hz:client>

```

- **\*\*MapStore and NearCache Configuration\*\***

For map-store, you should set either the *class-name* or the *implementation* attribute.

```

<hz:config>
 <hz:map name="map1">
 <hz:near-cache time-to-live-seconds="0" max-idle-seconds="60"
 eviction-policy="LRU" max-size="5000" invalidate-on-change="true"/>

 <hz:map-store enabled="true" class-name="com.foo.DummyStore"
 write-delay-seconds="0"/>
 </hz:map>

 <hz:map name="map2">
 <hz:map-store enabled="true" implementation="dummyMapStore"
 write-delay-seconds="0"/>
 </hz:map>

 <bean id="dummyMapStore" class="com.foo.DummyStore" />
</hz:config>

```

### 13.3.3 Spring Managed Context with @SpringAware

Hazelcast Distributed Objects could be marked with @SpringAware if the object wants:

- to apply bean properties,
- to apply factory callbacks such as `ApplicationContextAware`, `BeanNameAware`,
- to apply bean post-processing annotations such as `InitializingBean`, `@PostConstruct`.

Hazelcast Distributed `ExecutorService`, or more generally any Hazelcast managed object, can benefit from these features. To enable SpringAware objects, you must first configure `HazelcastInstance` using *hazelcast* namespace as explained in the [Spring Configuration section](#) and add `<hz:spring-aware />` tag.

## 13.3.3.1 SpringAware Examples

- Configure a Hazelcast Instance (3.3.x) via Spring Configuration and define *someBean* as Spring Bean.
- Add `<hz:spring-aware />` to Hazelcast configuration to enable `@SpringAware`.

```
<beans xmlns="http://www.springframework.org/schema/beans"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:context="http://www.springframework.org/schema/context"
 xmlns:hz="http://www.hazelcast.com/schema/spring"
 xsi:schemaLocation="http://www.springframework.org/schema/beans
 http://www.springframework.org/schema/beans/spring-beans-3.0.xsd
 http://www.springframework.org/schema/context
 http://www.springframework.org/schema/context/spring-context-3.0.xsd
 http://www.hazelcast.com/schema/spring
 http://www.hazelcast.com/schema/spring/hazelcast-spring.xsd">

 <context:annotation-config />

 <hz:hazelcast id="instance">
 <hz:config>
 <hz:spring-aware />
 <hz:group name="dev" password="password"/>
 <hz:network port="5701" port-auto-increment="false">
 <hz:join>
 <hz:multicast enabled="false" />
 <hz:tcp-ip enabled="true">
 <hz:members>10.10.1.2, 10.10.1.3</hz:members>
 </hz:tcp-ip>
 </hz:join>
 </hz:network>
 ...
 </hz:config>
 </hz:hazelcast>

 <bean id="someBean" class="com.hazelcast.examples.spring.SomeBean"
 scope="singleton" />
 ...
</beans>
```

## Distributed Map Example:

- Create a class called `SomeValue` which contains Spring Bean definitions like `ApplicationContext` and `SomeBean`.

```
@SpringAware
@Component("someValue")
@Scope("prototype")
public class SomeValue implements Serializable, ApplicationContextAware {

 private transient ApplicationContext context;

 private transient SomeBean someBean;

 private transient boolean init = false;

 public void setApplicationContext(ApplicationContext applicationContext)
 throws BeansException {
```

```

 context = applicationContext;
}

@Autowired
public void setSomeBean(SomeBean someBean) {
 this.someBean = someBean;
}

@PostConstruct
public void init() {
 someBean.doSomethingUseful();
 init = true;
}
...
}

```

- Get SomeValue Object from Context and put it into Hazelcast Distributed Map on Node-1.

```

HazelcastInstance hazelcastInstance =
 (HazelcastInstance) context.getBean("hazelcast");
SomeValue value = (SomeValue) context.getBean("someValue");
IMap<String, SomeValue> map = hazelcastInstance.getMap("values");
map.put("key", value);

```

- Read SomeValue Object from Hazelcast Distributed Map and assert that init method is called since it is annotated with @PostConstruct.

```

HazelcastInstance hazelcastInstance =
 (HazelcastInstance) context.getBean("hazelcast");
IMap<String, SomeValue> map = hazelcastInstance.getMap("values");
SomeValue value = map.get("key");
Assert.assertTrue(value.init);

```

#### ExecutorService Example:

- Create a Callable Class called SomeTask which contains Spring Bean definitions like ApplicationContext, SomeBean.

```

@SpringAware
public class SomeTask
 implements Callable<Long>, ApplicationContextAware, Serializable {

 private transient ApplicationContext context;

 private transient SomeBean someBean;

 public Long call() throws Exception {
 return someBean.value;
 }

 public void setApplicationContext(ApplicationContext applicationContext)
 throws BeansException {
 context = applicationContext;
 }

 @Autowired

```



```

public void setSomeBean(SomeBean someBean) {
 this.someBean = someBean;
}
}

```

- Submit `SomeTask` to two Hazelcast Members and assert that `someBean` is autowired.

```

HazelcastInstance hazelcastInstance =
 (HazelcastInstance) context.getBean("hazelcast");
SomeBean bean = (SomeBean) context.getBean("someBean");

Future<Long> f = hazelcastInstance.getExecutorService().submit(new SomeTask());
Assert.assertEquals(bean.value, f.get().longValue());

// choose a member
Member member = hazelcastInstance.getCluster().getMembers().iterator().next();

Future<Long> f2 = (Future<Long>) hazelcast.getExecutorService()
 .submitToMember(new SomeTask(), member);
Assert.assertEquals(bean.value, f2.get().longValue());

```



**NOTE:** Spring managed properties/fields are marked as *transient*.

### 13.3.4 Spring Cache

*Sample Code:* Please see our sample application for Spring Cache.

As of version 3.1, Spring Framework provides support for adding caching into an existing Spring application.

#### 13.3.4.1 Declarative Spring Cache Configuration

```

<cache:annotation-driven cache-manager="cacheManager" />

<hz:hazelcast id="hazelcast">
 ...
</hz:hazelcast>

<bean id="cacheManager" class="com.hazelcast.spring.cache.HazelcastCacheManager">
 <constructor-arg ref="instance"/>
</bean>

```

#### 13.3.4.2 Annotation Based Spring Cache Configuration

Annotation Based Configuration does not require any XML definition.

- Implement a `CachingConfiguration` class with related Annotations.

```

@Configuration
@EnableCaching
public class CachingConfiguration implements CachingConfigurer{
 @Bean
 public CacheManager cacheManager() {
 ClientConfig config = new ClientConfig();
 HazelcastInstance client = HazelcastClient.newHazelcastClient(config);
 }
}

```

```

 return new HazelcastCacheManager(client);
 }
 @Bean
 public KeyGenerator keyGenerator() {
 return null;
 }

```

- Launch Application Context and register `CachingConfiguration`.

```

AnnotationConfigApplicationContext context = new AnnotationConfigApplicationContext();
context.register(CachingConfiguration.class);
context.refresh();

```

For more information about Spring Cache, please see Spring Cache Abstraction.

### 13.3.5 Hibernate 2nd Level Cache Config

*Sample Code:* Please see our sample application for *Hibernate 2nd Level Cache Config*.

If you are using Hibernate with Hazelcast as 2nd level cache provider, you can easily create `RegionFactory` instances within Spring configuration (by Spring version 3.1). That way, you can use the same `HazelcastInstance` as Hibernate L2 cache instance.

```

<hz:hibernate-region-factory id="regionFactory" instance-ref="instance"
 mode="LOCAL" />
...
<bean id="sessionFactory"
 class="org.springframework.orm.hibernate3.LocalSessionFactoryBean"
 scope="singleton">
 <property name="dataSource" ref="dataSource"/>
 <property name="cacheRegionFactory" ref="regionFactory" />
 ...
</bean>

```

#### Hibernate RegionFactory Modes

- LOCAL
- DISTRIBUTED

Please refer to the Hibernate [RegionFactory Options](#) section for more information.

### 13.3.6 Best Practices

Spring tries to create a new `Map/Collection` instance and fill the new instance by iterating and converting values of the original `Map/Collection` (`IMap`, `IQueue`, etc.) to required types when generic type parameters of the original `Map/Collection` and the target property/attribute do not match.

Since Hazelcast `Maps/Collections` are designed to hold very large data which a single machine cannot carry, iterating through whole values can cause out of memory errors.

To avoid this issue, the target property/attribute can be declared as un-typed `Map/Collection` as shown below.

```

public class SomeBean {
 @Autowired
 IMap map; // instead of IMap<K, V> map
}

```

```
@Autowired
IQueue queue; // instead of IQueue<E> queue

...
}
```

Or, parameters of injection methods (constructor, setter) can be un-typed as shown below.

```
public class SomeBean {

 IMap<K, V> map;

 IQueue<E> queue;

 // Instead of IMap<K, V> map
 public SomeBean(IMap map) {
 this.map = map;
 }

 ...

 // Instead of IQueue<E> queue
 public void setQueue(IQueue queue) {
 this.queue = queue;
 }

 ...
}
```

#### **RELATED INFORMATION**

*For more information please see [Spring issue-3407](#).*



# Chapter 14

## Storage

This chapter describes Hazelcast's High-Density Memory Store and its configuration and provides information on the High-Density Memory First Generation, also known as Hazelcast Elastic Memory. It also gives recommendations on the storage sizing.

### 14.1 High-Density Memory Store

## Enterprise Only

Figure 14.1:

Hazelcast High-Density Memory Store, the successor to Hazelcast Elastic Memory, is Hazelcast's new enterprise grade backend storage solution. This solution is used with the Hazelcast JCache implementation.

By default, Hazelcast offers a production ready, low garbage collection (GC) pressure, storage backend. Serialized keys and values are still stored in the standard Java map, such as data structures on the heap. The data structures are stored in serialized form for the highest data compaction, and are still subject to Java Garbage Collection.

In Hazelcast Enterprise, the High-Density Memory Store is built around a pluggable memory manager which enables multiple memory stores. These memory stores are all accessible using a common access layer that scales up to Terabytes of main memory on a single JVM. At the same time, by further minimizing the GC pressure, High-Density Memory Store enables predictable application scaling and boosts performance and latency while minimizing pauses for Java Garbage Collection.

This foundation includes, but is not limited to, storing keys and values next to the heap in a native memory region.

#### **RELATED INFORMATION**

Please refer to the [Hazelcast JCache chapter](#) for the details of Hazelcast JCache implementation. As mentioned, High-Density Memory Store is used with Hazelcast JCache implementation.

#### 14.1.1 Configuring Hi-Density Memory Store

To use the Hi-Density memory storage, the native memory usage must be enabled using the programmatic or declarative configuration. Also, you can configure its size, memory allocator type, minimum block size, page size and metadata space percentage.

- **size:** Size of the total native memory to allocate. Default value is **512 MB**.
- **allocator type:** Type of the memory allocator. Available values are:
  - STANDARD: allocate/free memory using default OS memory manager.
  - POOLED: manage memory blocks in thread local pools.

Default value is **POOLED**.

- **minimum block size:** Minimum size of the blocks in bytes to split and fragment a page block to assign to an allocation request. It is used only by the **POOLED** memory allocator. Default value is **16**.
- **page size:** Size of the page in bytes to allocate memory as a block. It is used only by the **POOLED** memory allocator. Default value is  $1 \ll 22 = 4194304$  Bytes, about **4 MB**.
- **metadata space percentage:** Defines the percentage of the allocated native memory that is used for the metadata such as indexes, offsets, etc. It is used only by the **POOLED** memory allocator. Default value is **12.5**.

The following is the programmatic configuration example.

```
MemorySize memorySize = new MemorySize(512, MemoryUnit.MEGABYTES);
NativeMemoryConfig nativeMemoryConfig =
 new NativeMemoryConfig()
 .setAllocatorType(NativeMemoryConfig.MemoryAllocatorType.POOLED)
 .setSize(memorySize)
 .setEnabled(true)
 .setMinBlockSize(16)
 .setPageSize(1 << 20);
```

The following is the declarative configuration example.

```
<native-memory enabled="true" allocator-type="POOLED">
 <size value="512" unit="MEGABYTES"/>
</native-memory>
```

## 14.2 Elastic Memory (High-Density Memory First Generation)

By default, Hazelcast stores your distributed data (map entries, queue items) into Java heap which is subject to garbage collection (GC). As your heap gets bigger, garbage collection might cause your application to pause tens of seconds, badly effecting your application performance and response times. Elastic Memory (High-Density Memory First Generation) is Hazelcast with off-heap memory storage to avoid GC pauses. Even if you have terabytes of cache in-memory with lots of updates, GC will have almost no effect; resulting in more predictable latency and throughput.

Here are the steps to enable Elastic Memory:

- Set the maximum direct memory JVM can allocate, e.g. `java -XX:MaxDirectMemorySize=60G`.
- Enable Elastic Memory by setting the `hazelcast.elastic.memory.enabled` property to true.
- Set the total direct memory size for HazelcastInstance by setting the `hazelcast.elastic.memory.total.size` property. Size can be in MB or GB and abbreviation can be used, such as 60G and 500M.
- Set the chunk size by setting the `hazelcast.elastic.memory.chunk.size` property. Hazelcast will partition the entire off-heap memory into chunks. Default chunk size is 1K.
- You can enable `sun.misc.Unsafe` based off-heap storage implementation instead of `java.nio.DirectByteBuffer` based one, by setting the `hazelcast.elastic.memory.unsafe.enabled` property to true. Default value is false.
- Configure maps that will use Elastic Memory by setting `InMemoryFormat` to `NATIVE`. Default value is `BINARY`.

Below is the declarative configuration.

```
<hazelcast>
...
<map name="default">
...
```

```

 <in-memory-format>NATIVE</in-memory-format>
 </map>
</hazelcast>

```

And, the programmatic configuration:

```

MapConfig mapConfig = new MapConfig();
mapConfig.setInMemoryFormat(InMemoryFormat.NATIVE);

```

And, the following are the High-Density Memory First Generation related system properties.

Property	Default Value	Type
<code>hazelcast.elastic.memory.enabled</code>	false	bool
<code>hazelcast.elastic.memory.total.size</code>	128	int
<code>hazelcast.elastic.memory.chunk.size</code>	1	int
<code>hazelcast.elastic.memory.shared.storage</code>	false	bool
<code>hazelcast.elastic.memory.unsafe.enabled</code>	false	bool

## 14.3 Sizing Practices

Data in Hazelcast is both active data and backup data for high availability, so the total memory footprint is the size of active data plus the size of backup data. If you use a single backup, it means the total memory footprint is two times the active data (active data + backup data). If you use, for example, two backups, then the total memory footprint is three times the active data (active data + backup data + backup data).

If you use only heap memory, each Hazelcast node with a 4 GB heap should accommodate a maximum of 3.5 GB of total data (active and backup). If you use the High-Density Memory Store, up to 75% of your physical memory footprint may be used for active and backup data, with headroom of 25% for normal fragmentation. In both cases, however, you should also keep some memory headroom available to handle any node failure or explicit node shutdown. When a node leaves the cluster, the data previously owned by the newly offline node will be distributed among the remaining servers. For this reason, we recommend that you plan to use only 60% of available memory, with 40% headroom to handle node failure or shutdown.





# Chapter 15

## Hazelcast Java Client

There are currently three ways to connect to a running Hazelcast cluster:

- Native Clients (Java, C++, .NET)
- **Memcache Client**
- **REST Client**

Native Clients enable you to perform almost all Hazelcast operations without being a member of the cluster. It connects to one of the cluster members and delegates all cluster wide operations to it (*dummy client*), or it connects to all of them and delegates operations smartly (*smart client*). When the relied cluster member dies, the client will transparently switch to another live member.

There can be hundreds or even thousands of clients connected to the cluster. By default, there are *core count \* 10* threads on the server side that will handle all the requests (e.g. if the server has 4 cores, it will be 40).

Imagine a trading application where all the trading data are stored and managed in a Hazelcast cluster with tens of nodes. Swing/Web applications at the traders' desktops can use Native Clients to access and modify the data in the Hazelcast cluster.

Currently, Hazelcast has Native Java, C++ and .NET Clients available. This chapter describes the Java Client.



**IMPORTANT:** Starting with the Hazelcast 3.5. release, a new Java Native Client Library is introduced in the release package: `hazelcast-client-new-<version>.jar`. This library contains clients which use the new Hazelcast Binary Client Protocol. This library does not exist for the releases before 3.5.

### 15.1 Hazelcast Clients Feature Comparison

Before detailing the Java Client, this section provides the below comparison matrix to show which features are supported by the Hazelcast clients.

Feature	Java Client	.NET Client
Map	Yes	Yes
Queue	Yes	Yes
Set	Yes	Yes
List	Yes	Yes
MultiMap	Yes	Yes
Replicated Map	Yes	No
Topic	Yes	Yes
MapReduce	Yes	No
Lock	Yes	Yes
Semaphore	Yes	Yes

Feature	Java Client	.NET Client
AtomicLong	Yes	Yes
AtomicReference	Yes	Yes
IdGenerator	Yes	Yes
CountDownLatch	Yes	Yes
Transactional Map	Yes	Yes
Transactional MultiMap	Yes	Yes
Transactional Queue	Yes	Yes
Transactional List	Yes	Yes
Transactional Set	Yes	Yes
JCache	Yes	No
Ringbuffer	Yes	No
Reliable Topic	No	No
Client Configuration Import	Yes	No
Hazelcast Client Protocol	Yes	Yes
Fail Fast on Invalid Configuration	Yes	No
Sub-Listener Interfaces for Map ListenerMap	Yes	No
Continuous Query Caching	Yes	No
Distributed Executor Service	Yes	No
Query	Yes	Yes
Near Cache	Yes	Yes
Heartbeat	Yes	Yes
Declarative Configuration	Yes	Yes
Programmatic Configuration	Yes	Yes
SSL Support	Yes	No
XA Transactions	Yes	No
Smart Client	Yes	Yes
Dummy Client	Yes	Yes
Lifecycle Service	Yes	Yes
Event Listeners	Yes	Yes
DataSerializable	Yes	Yes
IdentifiedDataSerializable	Yes	Yes
Portable	Yes	Yes

## 15.2 Java Client Overview

The Java client is the most full featured client. It is offered both with Hazelcast and Hazelcast Enterprise. The main idea behind the Java client is to provide the same Hazelcast functionality by proxying each operation through a Hazelcast node. It can access and change distributed data, and it can listen to distributed events of an already established Hazelcast cluster from another Java application.

### 15.2.1 Java Client Dependencies

You should include two dependencies in your classpath to start using the Hazelcast client: `hazelcast.jar` and `hazelcast-client.jar`.

After adding these dependencies, you can start using the Hazelcast client as if you are using the Hazelcast API. The differences are discussed in the below sections.

If you prefer to use maven, add the following lines to your `pom.xml`.

```
<dependency>
 <groupId>com.hazelcast</groupId>
 <artifactId>hazelcast-client</artifactId>
 <version>${LATEST_VERSION}</version>
```

```

</dependency>
<dependency>
 <groupId>com.hazelcast</groupId>
 <artifactId>hazelcast</artifactId>
 <version>$LATEST_VERSION$</version>
</dependency>

```

### 15.2.2 Getting Started with Client API

The first step is configuration. You can configure the Java client declaratively or programmatically. We will use the programmatic approach throughout this tutorial. Please refer to the [Java Client Declarative Configuration section](#) for details.

```

ClientConfig clientConfig = new ClientConfig();
clientConfig.getGroupConfig().setName("dev").setPassword("dev-pass");
clientConfig.getNetworkConfig().addAddress("10.90.0.1", "10.90.0.2:5702");

```

The second step is to initialize the HazelcastInstance to be connected to the cluster.

```
HazelcastInstance client = HazelcastClient.newHazelcastClient(clientConfig);
```

*This client interface is your gateway to access all Hazelcast distributed objects.*

Let's create a map and populate it with some data.

```

IMap<String, Customer> mapCustomers = client.getMap("customers"); //creates the map proxy

mapCustomers.put("1", new Customer("Joe", "Smith"));
mapCustomers.put("2", new Customer("Ali", "Selam"));
mapCustomers.put("3", new Customer("Avi", "Noyan"));

```

As a final step, if you are done with your client, you can shut it down as shown below. This will release all the used resources and will close connections to the cluster.

```
client.shutdown();
```

### 15.2.3 Java Client Operation modes

The client has two operation modes because of the distributed nature of the data and cluster.

**Smart Client:** In smart mode, clients connect to each cluster node. Since each data partition uses the well known and consistent hashing algorithm, each client can send an operation to the relevant cluster node, which increases the overall throughput and efficiency. Smart mode is the default mode.

**Dummy Client:** For some cases, the clients can be required to connect to a single node instead of to each node in the cluster. Firewalls, security, or some custom networking issues can be the reason for these cases.

In dummy client mode, the client will only connect to one of the configured addresses. This single node will behave as a gateway to the other nodes. For any operation requested from the client, it will redirect the request to the relevant node and return the response back to the client returned from this node.

### 15.2.4 Failure Handling

There are two main failure cases you should be aware of, and configurations you can perform to achieve proper behavior.

#### 15.2.4.1 Client Connection Failure

While the client is trying to connect initially to one of the members in the `ClientNetworkConfig.addressList`, all the members might be not available. Instead of giving up, throwing an exception and stopping the client, the client will retry as many as `connectionAttemptLimit` times. Please see the [Connection Attempt Limit section](#).

The client executes each operation through the already established connection to the cluster. If this connection(s) disconnects or drops, the client will try to reconnect as configured.

#### 15.2.4.2 Retry-able Operation Failure

While sending the requests to related nodes, operation can fail due to various reasons. Read-only operations are retried by default. If you want to enable this for the other operations, set the `redoOperation` to `true`. Please see the [Redo Operation section](#).

The number of retries is given with the property `hazelcast.client.request.retry.count` in `ClientProperties`. The client will resend the request as many as `RETRY-COUNT`, then it will throw an exception. Please see the [Client System Properties section](#).

### 15.2.5 Supported Distributed Data Structures

Most of the Distributed Data Structures are supported by the client. Please check for the exceptions for the clients in other languages.

As a general rule, you configure these data structures on the server side and access them through a proxy on the client side.

#### Map:

You can use any [Distributed Map](#) object with the client, as shown below.

```

Imap<Integer, String> map = client.getMap("myMap");

map.put(1, "Ali");
String value= map.get(1);
map.remove(1);

```

Locality is ambiguous for the client, so `addEntryListener` and `localKeySet` are not supported. Please see the [Distributed Map section](#) for more information.

#### MultiMap:

A MultiMap usage example is shown below.

```

MultiMap<Integer, String> multiMap = client.getMultiMap("myMultiMap");

multiMap.put(1,"ali");
multiMap.put(1,"veli");

Collection<String> values = multiMap.get(1);

```

`addEntryListener`, `localKeySet` and `getLocalMultiMapStats` are not supported because locality is ambiguous for the client. Please see the [Distributed MultiMap section](#) for more information.

#### Queue:

A sample usage is shown below.

```

IQueue<String> myQueue = client.getQueue("theQueue");
myQueue.offer("ali")

```

`getLocalQueueStats` is not supported because locality is ambiguous for the client. Please see the [Distributed Queue section](#) for more information.

**Topic:**

`getLocalTopicStats` is not supported because locality is ambiguous for the client.

**Other Supported Distributed Structures:**

The distributed data structures listed below are also supported by the client. Since their logic is the same in both the node side and client side, you can refer to their sections as listed below.

- [Replicated Map](#)
- [MapReduce](#)
- [List](#)
- [Set](#)
- [IAtomicLong](#)
- [IAtomicReference](#)
- [ICountDownLatch](#)
- [ISemaphore](#)
- [IdGenerator](#)
- [Lock](#)

## 15.2.6 Client Services

Below services are provided for some common functionalities on the client side.

**Distributed Executor Service:**

The distributed executor service is for distributed computing. It can be used to execute tasks on the cluster on a designated partition or on all the partitions. It can also be used to process entries. Please see the [Distributed Executor Service section](#) for more information.

```
IExecutorService executorService = client.getExecutorService("default");
```

After getting an instance of `IExecutorService`, you can use the instance as the interface with the one provided on the server side. Please see the [Distributed Computing chapter](#) for detailed usage.



**NOTE:** This service is only supported by the Java client.

**Client Service:**

If you need to track clients and you want to listen to their connection events, you can use the `clientConnected` and `clientDisconnected` methods of the `ClientService` class. This class must be run on the **node** side. The following is an example code.

```
final ClientService clientService = hazelcastInstance.getClientService();
final Collection<Client> connectedClients = clientService.getConnectedClients();

clientService.addClientListener(new ClientListener() {
 @Override
 public void clientConnected(Client client) {
 //Handle client connected event
 }

 @Override
 public void clientDisconnected(Client client) {
 //Handle client disconnected event
 }
});
```

**Partition Service:**

You use partition service to find the partition of a key. It will return all partitions. See the example code below.

```
PartitionService partitionService = client.getPartitionService();

//partition of a key
Partition partition = partitionService.getPartition(key);

//all partitions
Set<Partition> partitions = partitionService.getPartitions();
```

**Lifecycle Service:**

Lifecycle handling performs the following:

- checks to see if the client is running,
- shuts down the client gracefully,
- terminates the client ungracefully (forced shutdown), and
- adds/removes lifecycle listeners.

```
LifecycleService lifecycleService = client.getLifecycleService();

if(lifecycleService.isRunning()){
 //it is running
}

//shutdown client gracefully
lifecycleService.shutdown();
```

**15.2.7 Client Listeners**

You can configure listeners to listen to various event types on the client side. You can configure global events not relating to any distributed object through **Client ListenerConfig**. You should configure distributed object listeners like map entry listeners or list item listeners through their proxies. You can refer to the related sections under each distributed data structure in this reference manual.

**15.2.8 Client Transactions**

Transactional distributed objects are supported on the client side. Please see the **Transactions chapter** on how to use them.

**15.3 Java Client Configuration**

Hazelcast Java Client can be configured declaratively (XML) or programmatically (API).

For declarative configuration, the Hazelcast client looks at the following places for the client configuration file.

- **System property:** The client first checks if `hazelcast.client.config` system property is set to a file path, e.g. `-Dhazelcast.client.config=C:/myhazelcast.xml`.
- **Classpath:** If config file is not set as a system property, the client checks the classpath for `hazelcast-client.xml` file.

If the client does not find any configuration file, it starts with the default configuration (`hazelcast-client-default.xml`) located in the `hazelcast-client.jar` library. Before configuring the client, please try to work with the default configuration to see if it works for you. The default should be just fine for most users. If not, then consider custom configuration for your environment.

If you want to specify your own configuration file to create a `Config` object, the Hazelcast client supports the following.

- `Config cfg = new XmlClientConfigBuilder(xmlFileName).build();`
- `Config cfg = new XmlClientConfigBuilder(inputStream).build();`

For programmatic configuration of the Hazelcast Java Client, just instantiate a `ClientConfig` object and configure the desired aspects. An example is shown below.

```
ClientConfig clientConfig = new ClientConfig();
clientConfig.setGroupConfig(new GroupConfig("dev", "dev-pass");
clientConfig.setLoadBalancer(yourLoadBalancer);
...
...
```

### 15.3.1 Client Network Configuration

All network related configuration of Hazelcast Java Client is performed via the `network` element in the declarative configuration file, or in the class `ClientNetworkConfig` when using programmatic configuration. Let's first give the examples for these two approaches. Then we will look at its sub-elements and attributes.

**Declarative:**

```
<hazelcast-client xsi:schemaLocation=
 "http://www.hazelcast.com/schema/client-config hazelcast-client-config-<version>.xsd"
 xmlns="http://www.hazelcast.com/schema/client-config"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
...
<network>
 <cluster-members>
 <address>127.0.0.1</address>
 <address>127.0.0.2</address>
 </cluster-members>
 <smart-routing>true</smart-routing>
 <redo-operation>true</redo-operation>
 <socket-interceptor enabled="true">
 <class-name>com.hazelcast.XYZ</class-name>
 <properties>
 <property name="kerberos-host">kerb-host-name</property>
 <property name="kerberos-config-file">kerb.conf</property>
 </properties>
 </socket-interceptor>
 <aws enabled="true" connection-timeout-seconds="11">
 <inside-aws>false</inside-aws>
 <access-key>my-access-key</access-key>
 <secret-key>my-secret-key</secret-key>
 <region>us-west-1</region>
 <host-header>ec2.amazonaws.com</host-header>
 <security-group-name>hazelcast-sg</security-group-name>
 <tag-key>type</tag-key>
 <tag-value>hz-nodes</tag-value>
 </aws>
</network>
```

**Programmatic:**

```
ClientConfig clientConfig = new ClientConfig();
ClientNetworkConfig networkConfig = clientConfig.getNetworkConfig();
```

**15.3.1.1 Address List**

Address List is the initial list of cluster addresses to which the client will connect. The client uses this list to find an alive node. Although it may be enough to give only one address of a node in the cluster (since all nodes communicate with each other), it is recommended that you give the addresses for all the nodes.

**Declarative:**

```
<hazelcast-client>
...
<network>
 <cluster-members>
 <address>10.1.1.21</address>
 <address>10.1.1.22:5703</address>
 </cluster-members>
...
</network>
...
</hazelcast-client>
```

**Programmatic:**

```
ClientConfig clientConfig = new ClientConfig();
ClientNetworkConfig networkConfig = clientConfig.getNetworkConfig();
networkConfig().addAddress("10.1.1.21", "10.1.1.22:5703");
```

If the port part is omitted, then 5701, 5702, and 5703 will be tried in random order.

You can provide multiple addresses with ports provided or not, as seen above. The provided list is shuffled and tried in random order. Default value is *localhost*.

**15.3.1.2 Smart Routing**

Smart routing defines whether the client mode is smart or dummy. The following are example configurations.

**Declarative:**

```
...
<network>
...
 <smart-routing>true</smart-routing>
...
</network>
...
```

**Programmatic:**

```
ClientConfig clientConfig = new ClientConfig();
ClientNetworkConfig networkConfig = clientConfig.getNetworkConfig();
networkConfig().setSmartRouting(true);
```

The default is *smart client* mode.



### 15.3.1.3 Redo Operation

It enables/disables redo-able operations as described in [Retry-able Operation Failure](#). The following are the example configurations.

**Declarative:**

```
...
<network>
...
 <redo-operation>true</redo-operation>
...
</network>
```

**Programmatic:**

```
ClientConfig clientConfig = new ClientConfig();
ClientNetworkConfig networkConfig = clientConfig.getNetworkConfig();
networkConfig().setRedoOperation(true);
```

Default is *disabled*.

### 15.3.1.4 Connection Timeout

Connection timeout is the timeout value in milliseconds for nodes to accept client connection requests. The following are the example configurations.

**Declarative:**

```
...
<network>
...
 <connection-timeout>5000</connection-timeout>
...
</network>
```

**Programmatic:**

```
ClientConfig clientConfig = new ClientConfig();
clientConfig.getNetworkConfig().setConnectionTimeout(5000);
```

The default value is *5000* milliseconds.

### 15.3.1.5 Connection Attempt Limit

While the client is trying to connect initially to one of the members in the `ClientNetworkConfig.addressList`, all members might be not available. Instead of giving up, throwing an exception and stopping the client, the client will retry as many as `ClientNetworkConfig.connectionAttemptLimit` times. The following are example configurations.

**Declarative:**

```
...
<network>
...
 <connection-attempt-limit>5</connection-attempt-limit>
...
</network>
```

**Programmatic:**

```
ClientConfig clientConfig = new ClientConfig();
clientConfig.getNetworkConfig().setConnectionAttemptLimit(5);
```

Default value is *2*.

**15.3.1.6 Connection Attempt Period**

Connection timeout period is the duration in milliseconds between the connection attempts defined by `ClientNetworkConfig.connectionAttemptLimit`. The following are example configurations.

**Declarative:**

```
...
<network>
...
 <connection-attempt-period>5000</connection-attempt-period>
...
</network>
```

**Programmatic:**

```
ClientConfig clientConfig = new ClientConfig();
clientConfig.getNetworkConfig().setConnectionAttemptPeriod(5000);
```

Default value is *3000*.

**15.3.1.7 Client Socket Interceptor**

## Enterprise Only

Figure 15.1:

Following is a client configuration to set a socket interceptor. Any class implementing `com.hazelcast.nio.SocketInterceptor` is a socket Interceptor.

```
public interface SocketInterceptor {
 void init(Properties properties);
 void onConnect(Socket connectedSocket) throws IOException;
}
```

`SocketInterceptor` has two steps. First, it will be initialized by the configured properties. Second, it will be informed just after the socket is connected using `onConnect`.

```
SocketInterceptorConfig socketInterceptorConfig = clientConfig
 .getNetworkConfig().getSocketInterceptorConfig();
```

```
MyClientSocketInterceptor myClientSocketInterceptor = new MyClientSocketInterceptor();
```

```
socketInterceptorConfig.setEnabled(true);
socketInterceptorConfig.setImplementation(myClientSocketInterceptor);
```

If you want to configure the socket connector with a class name instead of an instance, see the example below.

```

SocketInterceptorConfig socketInterceptorConfig = clientConfig
 .getNetworkConfig().getSocketInterceptorConfig();

MyClientSocketInterceptor myClientSocketInterceptor = new MyClientSocketInterceptor();

socketInterceptorConfig.setEnabled(true);

//These properties are provided to interceptor during init
socketInterceptorConfig.setProperty("kerberos-host", "kerb-host-name");
socketInterceptorConfig.setProperty("kerberos-config-file", "kerb.conf");

socketInterceptorConfig.setClassName(myClientSocketInterceptor);

```

## RELATED INFORMATION

Please see the [Socket Interceptor section](#) for more information.

### 15.3.1.8 Client Socket Options

You can configure the network socket options using `SocketOptions`. It has the following methods.

- `socketOptions.setKeepAlive(x)`: Enables/disables the `SO_KEEPAIVE` socket option. The default value is `true`.
- `socketOptions.setTcpNoDelay(x)`: Enables/disables the `TCP_NODELAY` socket option. The default value is `true`.
- `socketOptions.setReuseAddress(x)`: Enables/disables the `SO_REUSEADDR` socket option. The default value is `true`.
- `socketOptions.setLingerSeconds(x)`: Enables/disables `SO_LINGER` with the specified linger time in seconds. The default value is 3.
- `socketOptions.setBufferSize(x)`: Sets the `SO_SNDBUF` and `SO_RCVBUF` options to the specified value in KB for this Socket. The default value is 32.

```

SocketOptions socketOptions = clientConfig.getNetworkConfig().getSocketOptions();
socketOptions.setBufferSize(32);
socketOptions.setKeepAlive(true);
socketOptions.setTcpNoDelay(true);
socketOptions.setReuseAddress(true);
socketOptions.setLingerSeconds(3);

```

### 15.3.1.9 Client SSL

## Enterprise Only

Figure 15.2:

You can use SSL to secure the connection between the client and the nodes. If you want SSL enabled for the client-cluster connection, you should set `SSLConfig`. Once set, the connection (socket) is established out of an SSL factory defined either by a factory class name or factory implementation. Please see the `SSLConfig` class in the `com.hazelcast.config` package at the JavaDocs page of the Hazelcast Documentation web site.

### 15.3.1.10 Client Configuration for AWS

The example declarative and programmatic configurations below show how to configure a Java client for connecting to a Hazelcast cluster in AWS.

**Declarative:**

```
...
<network>
 <aws enabled="true">
 <inside-aws>false</inside-aws>
 <access-key>my-access-key</access-key>
 <secret-key>my-secret-key</secret-key>
 <region>us-west-1</region>
 <host-header>ec2.amazonaws.com</host-header>
 <security-group-name>hazelcast-sg</security-group-name>
 <tag-key>type</tag-key>
 <tag-value>hz-nodes</tag-value>
 </aws>
...
</network>
```

**Programmatic:**

```
ClientConfig clientConfig = new ClientConfig();
ClientAwsConfig clientAwsConfig = new ClientAwsConfig();
clientAwsConfig.setInsideAws(false)
 .setAccessKey("my-access-key")
 .setSecretKey("my-secret-key")
 .setRegion("us-west-1")
 .setHostHeader("ec2.amazonaws.com")
 .setSecurityGroupName(">hazelcast-sg")
 .setTagKey("type")
 .setTagValue("hz-nodes");
clientConfig.getNetworkConfig().setAwsConfig(clientAwsConfig);
HazelcastInstance client = HazelcastClient.newHazelcastClient(clientConfig);
```



**NOTE:** If the `inside-aws*` parameter is not set, the private addresses of nodes will always be converted to public addresses. Also, the client will use public addresses to connect to the nodes. In order to use private addresses, set the `inside-aws` parameter to `true`. Also note that, when connecting outside from AWS, setting the `inside-aws` parameter to `true` will cause the client to not be able to reach the nodes.\*

## 15.3.2 Client Load Balancer Configuration

`LoadBalancer` allows you to send operations to one of a number of endpoints (Members). Its main purpose is to determine the next `Member` if queried. It is up to your implementation to use different load balancing policies. You should implement the interface `com.hazelcast.client.LoadBalancer` for that purpose.

If the client is configured in smart mode, only the operations that are not key-based will be routed to the endpoint that is returned by the `LoadBalancer`. If the client is not a smart client, `LoadBalancer` will be ignored.

The following are example configurations.

**Declarative:**

```
<hazelcast-client>
...
```

```

 <load-balancer type="random">
 yourLoadBalancer
 </load-balancer>
 ...
</hazelcast-client>

```

Programmatic:

```

ClientConfig clientConfig = new ClientConfig();
clientConfig.setLoadBalancer(yourLoadBalancer);

```

### 15.3.3 Client Near Cache Configuration

Hazelcast distributed map has a Near Cache feature to reduce network latencies. Since the client always requests data from the cluster nodes, it can be helpful for some of your use cases to configure a near cache on the client side. The client supports the same Near Cache that is used in Hazelcast distributed map.

You can create Near Cache on the client side by providing a configuration per map name, as shown below.

```

ClientConfig clientConfig = new ClientConfig();
CacheConfig nearCacheConfig = new NearCacheConfig();
nearCacheConfig.setName("mapName");
clientConfig.addNearCacheConfig(nearCacheConfig);

```

You can use wildcards for the map name, as shown below.

```

nearCacheConfig.setName("map*");
nearCacheConfig.setName("*map");

```

The following is an example declarative configuration for Near Cache.

```

</hazelcast-client>
...
...
<near-cache name="MENU">
 <max-size>2000</max-size>
 <time-to-live-seconds>0</time-to-live-seconds>
 <max-idle-seconds>0</max-idle-seconds>
 <eviction-policy>LFU</eviction-policy>
 <invalidate-on-change>true</invalidate-on-change>
 <in-memory-format>OBJECT</in-memory-format>
</near-cache>
...
</hazelcast-client>

```

Name of Near Cache on the client side must be the same as the name of IMap on the server for which this Near Cache is being created.

Near Cache can have its own `in-memory-format` which is independent of the `in-memory-format` of the servers.

### 15.3.4 Client Group Configuration

Clients should provide a group name and password in order to connect to the cluster. You can configure them using `GroupConfig`, as shown below.

```

clientConfig.setGroupConfig(new GroupConfig("dev", "dev-pass"));

```

### 15.3.5 Client Security Configuration

In the cases where the security established with `GroupConfig` is not enough and you want your clients connecting securely to the cluster, you can use `ClientSecurityConfig`. This configuration has a `credentials` parameter to set the IP address and UID. Please see `ClientSecurityConfig.java` in our code.

### 15.3.6 Client Serialization Configuration

For the client side serialization, use Hazelcast configuration. Please refer to the [Serialization chapter](#).

### 15.3.7 Client Listener Configuration

You can configure global event listeners using `ListenerConfig` as shown below.

```
ClientConfig clientConfig = new ClientConfig();
ListenerConfig listenerConfig = new ListenerConfig(LifecycleListenerImpl);
clientConfig.addListenerConfig(listenerConfig);

ClientConfig clientConfig = new ClientConfig();
ListenerConfig listenerConfig = new ListenerConfig("com.hazelcast.example.MembershipListenerImpl");
clientConfig.addListenerConfig(listenerConfig);
```

You can add three types of event listeners.

- `LifecycleListener`
- `MembershipListener`
- `DistributedObjectListener`

#### RELATED INFORMATION

Please refer to *LifecycleListener*, *MembershipListener* and *DistributedObjectListener*.

### 15.3.8 ExecutorPoolSize

Hazelcast has an internal executor service (different from the data structure *Executor Service*) that has threads and queues to perform internal operations such as handling responses. This parameter specifies the size of the pool of threads which perform these operations laying in the executor's queue. If not configured, this parameter has the value as **5 \* core size of the client** (i.e. it is 20 for a machine that has 4 cores).

### 15.3.9 ClassLoader

You can configure a custom `ClassLoader`. It will be used by the serialization service and to load any class configured in configuration, such as event listeners or `ProxyFactories`.

## 15.4 Client System Properties

There are some advanced client configuration properties to tune some aspects of Hazelcast Client. You can set them as property name and value pairs through declarative configuration, programmatic configuration, or JVM system property. Please see the [System Properties section](#) to learn how to set these properties.

The table below lists the client configuration properties with their descriptions.

Property Name	Default Value	Type	Description
<code>hazelcast.client.event.queue.capacity</code>	1000000	string	The default value of the capacity of executor
<code>hazelcast.client.event.thread.count</code>	5	string	The thread count for handling incoming event
<code>hazelcast.client.heartbeat.interval</code>	10000	string	The frequency of heartbeat messages sent by t
<code>hazelcast.client.heartbeat.timeout</code>	300000	string	Timeout for the heartbeat messages sent by t
<code>hazelcast.client.invocation.timeout.seconds</code>	120	string	Time to give up the invocation when a memb
<code>hazelcast.client.shuffle.member.list</code>	true	string	The client shuffles the given member list to p

## 15.5 Sample Codes for Client

Please refer to Client Code Samples.





## Chapter 16

# Other Client Implementations

This chapter describes the clients other than the Hazelcast Java Client.

### 16.1 C++ Client

## Enterprise Only

Figure 16.1:

You can use Native C++ Client to connect to Hazelcast nodes and perform almost all operations that a node can perform. Clients differ from nodes in that clients do not hold data. The C++ Client is by default a smart client, i.e. it knows where the data is and asks directly for the correct node. You can disable this feature (using the `ClientConfig::setSmart` method) if you do not want the clients to connect to every node.

The features of C++ Clients are:

- Access to distributed data structures (IMap, IQueue, MultiMap, ITopic, etc.).
- Access to transactional distributed data structures (TransactionalMap, TransactionalQueue, etc.).
- Ability to add cluster listeners to a cluster and entry/item listeners to distributed data structures.
- Distributed synchronization mechanisms with ILock, ISemaphore and ICountDownLatch.

#### 16.1.1 How to Setup

Hazelcast C++ Client is shipped with 32/64 bit, shared and static libraries. You only need to include the boost `shared_ptr.hpp` header in your compilation since the API makes use of the boost `shared_ptr`.

The downloaded release folder consists of:

- Mac\_64/
- Windows\_32/
- Windows\_64/
- Linux\_32/
- Linux\_64/
- docs/ (*HTML Doxygen documents are here*)

Each of the folders above contains the following:

- examples/

- testApp.exe => example command line client tool to connect hazelcast servers.
- TestApp.cpp => code of the example command line tool.
- hazelcast/
  - lib/ => Contains both shared and static library of hazelcast.
  - include/ => Contains headers of client.
- external/
  - include/ => Contains headers of dependencies. (boost::shared\_ptr)

### 16.1.2 Platform Specific Installation Guides

The C++ Client is tested on Linux 32/64-bit, Mac 64-bit and Windows 32/64-bit machines. For each of the headers above, it is assumed that you are in the correct folder for your platform. Folders are Mac\_64, Windows\_32, Windows\_64, Linux\_32 or Linux\_64.

#### 16.1.2.1 Linux

For Linux, there are two distributions: 32 bit and 64 bit.

Here is an example script to build with static library:

```
g++ main.cpp -pthread -I./external/include -I./hazelcast/include -L./hazelcast/lib/static/libHazelcastClientStatic.a
```

Here is an example script to build with shared library:

```
g++ main.cpp -lpthread -Wl,-no-as-needed -lrt -I./external/include -I./hazelcast/include -L./hazelcast/lib/shared -lHazelcastClientShared_64
```

#### 16.1.2.2 Mac

For Mac, there is one distribution: 64 bit.

Here is an example script to build with static library:

```
g++ main.cpp -I./external/include -I./hazelcast/include -L./hazelcast/lib/static/libHazelcastClientStatic.a
```

Here is an example script to build with shared library:

```
g++ main.cpp -I./external/include -I./hazelcast/include -L./hazelcast/lib/shared -lHazelcastClientShared_64
```

#### 16.1.2.3 Windows

For Windows, there are two distributions; 32 bit and 64 bit.

### 16.1.3 Code Examples

A Hazelcast node should be running to make the code examples work.



**NOTE:** The license key should be provided in the configuration as `config->getGroupConfig().setLicenseKey(PROVIDED_LICENSE_KEY)`

## 16.1.3.1 Map Example

```

#include <hazelcast/client/HazelcastAll.h>
#include <iostream>

using namespace hazelcast::client;

int main() {
 ClientConfig clientConfig;
 clientConfig->getGroupConfig().setLicenseKey(PROVIDED_ENTERPRISE_KEY);
 Address address("localhost", 5701);
 clientConfig.addAddress(address);

 HazelcastClient hazelcastClient(clientConfig);

 IMap<int,int> myMap = hazelcastClient.getMap<int ,int>("myIntMap");
 myMap.put(1,3);
 boost::shared_ptr<int> value = myMap.get(1);
 if(value.get() != NULL) {
 //process the item
 }

 return 0;
}

```

## 16.1.3.2 Queue Example

```

#include <hazelcast/client/HazelcastAll.h>
#include <iostream>
#include <string>

using namespace hazelcast::client;

int main() {
 ClientConfig clientConfig;
 clientConfig->getGroupConfig().setLicenseKey(PROVIDED_ENTERPRISE_KEY);
 Address address("localhost", 5701);
 clientConfig.addAddress(address);

 HazelcastClient hazelcastClient(clientConfig);

 IQueue<std::string> queue = hazelcastClient.getQueue<std::string>("q");
 queue.offer("sample");
 boost::shared_ptr<std::string> value = queue.poll();
 if(value.get() != NULL) {
 //process the item
 }
 return 0;
}

```

## 16.1.3.3 Entry Listener Example

```

#include "hazelcast/client/ClientConfig.h"
#include "hazelcast/client/EntryEvent.h"
#include "hazelcast/client/IMap.h"
#include "hazelcast/client/Address.h"
#include "hazelcast/client/HazelcastClient.h"

```

```

#include <iostream>
#include <string>

using namespace hazelcast::client;

class SampleEntryListener {
public:

 void entryAdded(EntryEvent<std::string, std::string> &event) {
 std::cout << "entry added " << event.getKey() << " "
 << event.getValue() << std::endl;
 };

 void entryRemoved(EntryEvent<std::string, std::string> &event) {
 std::cout << "entry added " << event.getKey() << " "
 << event.getValue() << std::endl;
 }

 void entryUpdated(EntryEvent<std::string, std::string> &event) {
 std::cout << "entry added " << event.getKey() << " "
 << event.getValue() << std::endl;
 }

 void entryEvicted(EntryEvent<std::string, std::string> &event) {
 std::cout << "entry added " << event.getKey() << " "
 << event.getValue() << std::endl;
 }
};

int main(int argc, char **argv) {
 ClientConfig clientConfig;
 Address address("localhost", 5701);
 clientConfig.addAddress(address);

 HazelcastClient hazelcastClient(clientConfig);

 IMap<std::string, std::string> myMap = hazelcastClient
 .getMap<std::string, std::string>("myIntMap");
 SampleEntryListener * listener = new SampleEntryListener();

 std::string id = myMap.addEntryListener(*listener, true);
 // Prints entryAdded
 myMap.put("key1", "value1");
 // Prints updated
 myMap.put("key1", "value2");
 // Prints entryRemoved
 myMap.remove("key1");
 // Prints entryEvicted after 1 second
 myMap.put("key2", "value2", 1000);

 // WARNING: deleting listener before removing it from hazelcast leads to crashes.
 myMap.removeEntryListener(id);
 // Delete listener after remove it from hazelcast.
 delete listener;
 return 0;
};

```

### 16.1.3.4 Serialization Example

Assume that you have the following two classes in Java and you want to use them with a C++ client.

```
class Foo implements Serializable {
 private int age;
 private String name;
}

class Bar implements Serializable {
 private float x;
 private float y;
}
```

First, let them implement Portable or IdentifiedDataSerializable as shown below.

```
class Foo implements Portable {
 private int age;
 private String name;

 public int getFactoryId() {
 // a positive id that you choose
 return 123;
 }

 public int getClassId() {
 // a positive id that you choose
 return 2;
 }

 public void writePortable(PortableWriter writer) throws IOException {
 writer.writeUTF("n", name);
 writer.writeInt("a", age);
 }

 public void readPortable(PortableReader reader) throws IOException {
 name = reader.readUTF("n");
 age = reader.readInt("a");
 }
}

class Bar implements IdentifiedDataSerializable {
 private float x;
 private float y;

 public int getFactoryId() {
 // a positive id that you choose
 return 4;
 }

 public int getId() {
 // a positive id that you choose
 return 5;
 }

 public void writeData(ObjectDataOutput out) throws IOException {
 out.writeFloat(x);
 out.writeFloat(y);
 }
}
```

```

 }

 public void readData(ObjectDataInput in) throws IOException {
 x = in.readFloat();
 y = in.readFloat();
 }
}

```

Then, implement the corresponding classes in C++ with same factory and class ID as shown below.

```

class Foo : public Portable {
public:
 int getFactoryId() const {
 return 123;
 };

 int getClassId() const {
 return 2;
 };

 void writePortable(serialization::PortableWriter &writer) const {
 writer.writeUTF("n", name);
 writer.writeInt("a", age);
 };

 void readPortable(serialization::PortableReader &reader) {
 name = reader.readUTF("n");
 age = reader.readInt("a");
 };

private:
 int age;
 std::string name;
};

class Bar : public IdentifiedDataSerializable {
public:
 int getFactoryId() const {
 return 4;
 };

 int getClassId() const {
 return 2;
 };

 void writeData(serialization::ObjectDataOutput& out) const {
 out.writeFloat(x);
 out.writeFloat(y);
 };

 void readData(serialization::ObjectDataInput& in) {
 x = in.readFloat();
 y = in.readFloat();
 };

private:
 float x;

```

```
float y;
};
```

Now, you can use the classes `Foo` and `Bar` in distributed structures. For example, use as Key or Value of `IMap` or as an Item in `IQueue`.

## 16.2 .NET Client

# Enterprise Only

Figure 16.2:

You can use the native .NET client to connect to Hazelcast nodes. All you need is to add `HazelcastClient3x.dll` into your .NET project references. The API is very similar to the Java native client.

.NET Client has the following distributed objects.

- `IMap<K,V>`
- `IMultiMap<K,V>`
- `IQueue<E>`
- `ITopic<E>`
- `IHList<E>`
- `IHSet<E>`
- `IIIdGenerator`
- `ILock`
- `ISemaphore`
- `ICountDownLatch`
- `IAtomicLong`
- `ITransactionContext`

`ITransactionContext` can be used to obtain:

- `ITransactionalMap<K,V>`,
- `ITransactionalMultiMap<K,V>`,
- `ITransactionalList<E>`, and
- `ITransactionalSet<E>`.

At present the following features are not available as in the Java Client:

- Distributed Executor Service
- Replicated Map
- JCache

A code example is shown below.

```
using Hazelcast.Config;
using Hazelcast.Client;
using Hazelcast.Core;
using Hazelcast.IO.Serialization;

using System.Collections.Generic;
```

```

namespace Hazelcast.Client.Example
{
 public class SimpleExample
 {

 public static void Test()
 {
 var clientConfig = new ClientConfig();
 clientConfig.GetNetworkConfig().AddAddress("10.0.0.1");
 clientConfig.GetNetworkConfig().AddAddress("10.0.0.2:5702");

 // Portable Serialization setup up for Customer Class
 clientConfig.GetSerializationConfig()
 .AddPortableFactory(MyPortableFactory.FactoryId, new MyPortableFactory());

 IHazelcastInstance client = HazelcastClient.NewHazelcastClient(clientConfig);
 // All cluster operations that you can do with ordinary HazelcastInstance
 IMap<string, Customer> mapCustomers = client.GetMap<string, Customer>("customers");
 mapCustomers.Put("1", new Customer("Joe", "Smith"));
 mapCustomers.Put("2", new Customer("Ali", "Selam"));
 mapCustomers.Put("3", new Customer("Avi", "Noyan"));

 ICollection<Customer> customers = mapCustomers.Values();
 foreach (var customer in customers)
 {
 //process customer
 }
 }
 }

 public class MyPortableFactory : IPortableFactory
 {
 public const int FactoryId = 1;

 public IPortable Create(int classId) {
 if (Customer.Id == classId)
 return new Customer();
 else
 return null;
 }
 }

 public class Customer : IPortable
 {
 private string name;
 private string surname;

 public const int Id = 5;

 public Customer(string name, string surname)
 {
 this.name = name;
 this.surname = surname;
 }

 public Customer() {}

 public int GetFactoryId()

```



```

 {
 return MyPortableFactory.FactoryId;
 }

 public int GetClassId()
 {
 return Id;
 }

 public void WritePortable(IPortableWriter writer)
 {
 writer.WriteUTF("n", name);
 writer.WriteUTF("s", surname);
 }

 public void ReadPortable(IPortableReader reader)
 {
 name = reader.ReadUTF("n");
 surname = reader.ReadUTF("s");
 }
}

```

### 16.2.1 Client Configuration

You can configure the Hazelcast .NET client via API or XML. To start the client, you can pass a configuration or leave it empty to use default values.



**NOTE:** .NET and Java clients are similar in terms of configuration. Therefore, you can refer to *Java Client* section for configuration aspects. For information on .NET API documentation, please refer to the API document provided along with the Hazelcast Enterprise license.

### 16.2.2 Client Startup

After configuration, you can obtain a client using one of the static methods of Hazelcast, as shown below.

```

IHazelcastInstance client = HazelcastClient.NewHazelcastClient(clientConfig);

...

IHazelcastInstance defaultClient = HazelcastClient.NewHazelcastClient();

...

IHazelcastInstance xmlConfClient = Hazelcast
 .NewHazelcastClient(@"..\Hazelcast.Net\Resources\hazelcast-client.xml");

```

The `IHazelcastInstance` interface is the starting point where all distributed objects can be obtained.

```

var map = client.GetMap<int,string>("mapName");

...

var lock= client.GetLock("thelock");

```

## 16.3 REST Client

Hazelcast provides a REST interface, i.e. it provides an HTTP service in each node so that you can access your `map` and `queue` using HTTP protocol. Assuming `mapName` and `queueName` are already configured in your Hazelcast, its structure is shown below.

```
http://node IP address:port/hazelcast/rest/maps/mapName/key
```

```
http://node IP address:port/hazelcast/rest/queues/queueName
```

For the operations to be performed, standard REST conventions for HTTP calls are used.

Assume that your cluster members are as shown below.

```
Members [5] {
 Member [10.20.17.1:5701]
 Member [10.20.17.2:5701]
 Member [10.20.17.4:5701]
 Member [10.20.17.3:5701]
 Member [10.20.17.5:5701]
}
```



**NOTE:** All of the requests below can return one of the following responses in case of a failure.

- If the HTTP request syntax is not known, the following response will be returned.

```
HTTP/1.1 400 Bad Request
Content-Length: 0
```

- In case of an unexpected exception, the following response will be returned.

```
< HTTP/1.1 500 Internal Server Error
< Content-Length: 0
```

---

### Creating/Updating Entries in a Map

You can put a new `key1/value1` entry into a map by using POST call to `http://10.20.17.1:5701/hazelcast/rest/maps/mapName/key1` URL. This call's content body should contain the value of the key. Also, if the call contains the MIME type, Hazelcast stores this information, too.

A sample POST call is shown below.

```
$ curl -v -X POST -H "Content-Type: text/plain" -d "bar"
 http://10.20.17.1:5701/hazelcast/rest/maps/mapName/foo
```

It will return the following response if successful:

```
< HTTP/1.1 200 OK
< Content-Type: text/plain
< Content-Length: 0
```

### Retrieving Entries from a Map

If you want to retrieve an entry, you can use a GET call to `http://10.20.17.1:5701/hazelcast/rest/maps/mapName/key1`. You can also retrieve this entry from another member of your cluster, such as `http://10.20.17.3:5701/hazelcast/rest/maps/mapName/key1`.

An example of a GET call is shown below.

```
$ curl -X GET http://10.20.17.3:5701/hazelcast/rest/maps/mapName/foo
```

It will return the following response if there is a corresponding value:

```
< HTTP/1.1 200 OK
< Content-Type: text/plain
< Content-Length: 3
bar
```

This GET call returned a value, its length, and also the MIME type (`text/plain`) since the POST call example shown above included the MIME type.

It will return the following if there is no mapping for the given key:

```
< HTTP/1.1 204 No Content
< Content-Length: 0
```

### Removing Entries from a Map

You can use a DELETE call to remove an entry. A sample DELETE call is shown below with its response.

```
$ curl -v -X DELETE http://10.20.17.1:5701/hazelcast/rest/maps/mapName/foo
```

```
< HTTP/1.1 200 OK
< Content-Type: text/plain
< Content-Length: 0
```

If you leave the key empty as follows, DELETE will delete all entries from the map.

```
$ curl -v -X DELETE http://10.20.17.1:5701/hazelcast/rest/maps/mapName
```

```
< HTTP/1.1 200 OK
< Content-Type: text/plain
< Content-Length: 0
```

### Offering Items on a Queue

You can use a POST call to create an item on the queue. A sample is shown below.

```
$ curl -v -X POST -H "Content-Type: text/plain" -d "foo"
http://10.20.17.1:5701/hazelcast/rest/queues/myEvents
```

The above call is equivalent to `HazelcastInstance#getQueue("myEvents").offer("foo");`.

It will return the following if successful:

```
< HTTP/1.1 200 OK
< Content-Type: text/plain
< Content-Length: 0
```

It will return the following if the queue is full and the item is not able to be offered to the queue:

```
< HTTP/1.1 503 Service Unavailable
< Content-Length: 0
```

### Retrieving Items from a Queue

You can use a DELETE call for retrieving items from a queue. Note that you should state the poll timeout while polling for queue events by an extra path parameter.

An example is shown below (**10** being the timeout value).

```
$ curl -v -X DELETE \http://10.20.17.1:5701/hazelcast/rest/queues/myEvents/10
```

The above call is equivalent to `HazelcastInstance#getQueue("myEvents").poll(10, SECONDS);`. Below is the response.

```
< HTTP/1.1 200 OK
< Content-Type: text/plain
< Content-Length: 3
foo
```

When the timeout is reached, the response will be `No Content` success, i.e. there is no item on the queue to be returned.

```
< HTTP/1.1 204 No Content
< Content-Length: 0
```

### Getting the size of the queue

```
$ curl -v -X GET \http://10.20.17.1:5701/hazelcast/rest/queues/myEvents/size
```

The above call is equivalent to `HazelcastInstance#getQueue("myEvents").size();`. Below is a sample response.

```
< HTTP/1.1 200 OK
< Content-Type: text/plain
< Content-Length: 1
5
```

RESTful access is provided through any member of your cluster. You can even put an HTTP load-balancer in front of your cluster members for load balancing and fault tolerance.



**NOTE:** You need to handle the failures on REST polls as there is no transactional guarantee.

## 16.4 Memcache Client



**NOTE:** Hazelcast Memcache Client only supports ASCII protocol. Binary Protocol is not supported.

A Memcache client written in any language can talk directly to a Hazelcast cluster. No additional configuration is required.

Assume that your cluster members are as shown below.

```
Members [5] {
 Member [10.20.17.1:5701]
 Member [10.20.17.2:5701]
 Member [10.20.17.4:5701]
 Member [10.20.17.3:5701]
 Member [10.20.17.5:5701]
}
```

Assume that you have a PHP application that uses PHP Memcache client to cache things in Hazelcast. All you need to do is have your PHP Memcache client connect to one of these members. It does not matter which member the client connects to because the Hazelcast cluster looks like one giant machine (Single System Image). Here is a PHP client code example.

```
<?php
$memcache = new Memcache;
$memcache->connect('10.20.17.1', 5701) or die ("Could not connect");
$memcache->set('key1', 'value1', 0, 3600);
$get_result = $memcache->get('key1'); // retrieve your data
var_dump($get_result); // show it
?>
```

Notice that Memcache client connects to 10.20.17.1 and uses port 5701. Here is a Java client code example with SpyMemcached client:

```
MemcachedClient client = new MemcachedClient(
 AddrUtil.getAddresses("10.20.17.1:5701 10.20.17.2:5701"));
client.set("key1", 3600, "value1");
System.out.println(client.get("key1"));
```

If you want your data to be stored in different maps (e.g. to utilize per map configuration), you can do that with a map name prefix as in the following example code.

```
MemcachedClient client = new MemcachedClient(
 AddrUtil.getAddresses("10.20.17.1:5701 10.20.17.2:5701"));
client.set("map1:key1", 3600, "value1"); // store to *hz_memcache_map1
client.set("map2:key1", 3600, "value1"); // store to hz_memcache_map2
System.out.println(client.get("key1")); // get from hz_memcache_map1
System.out.println(client.get("key2")); // get from hz_memcache_map2
```

*hz\_memcache prefix* separates Memcache maps from Hazelcast maps. If no map name is given, it will be stored in a default map named *hz\_memcache\_default*.

An entry written with a Memcache client can be read by another Memcache client written in another language.

### 16.4.1 Unsupported Operations

- CAS operations are not supported. In operations that get CAS parameters, such as append, CAS values are ignored.
- Only a subset of statistics are supported. Below is the list of supported statistic values.

```
- cmd_set
- cmd_get
- incr_hits
- incr_misses
- decr_hits
- decr_misses
```



# Chapter 17

## Serialization

You need to serialize the Java objects that you put into Hazelcast because Hazelcast is a distributed system. The data and its replicas are stored in different partitions on multiple nodes. The data you need may not be present on the local machine, and in that case, Hazelcast retrieves that data from another machine. This requires serialization.

Hazelcast serializes all your objects into an instance of `com.hazelcast.nio.serialization.Data`. Data is the binary representation of an object.

Serialization is used when:

- key/value objects are added to a map,
- items are put in a queue/set/list,
- a runnable is sent using an executor service,
- an entry processing is performed within a map,
- an object is locked, and
- a message is sent to a topic.

Hazelcast optimizes the serialization for the below types. You cannot override this behavior.

*Byte, Boolean, Character, Short, Integer, Long, Float, Double, byte[], char[], short[], int[]*

Hazelcast also optimizes the following types. However, you can override these types by creating a custom serializer and registering it. See [Custom Serialization](#) for more information.

*Date, BigInteger, BigDecimal, Class, Externalizable, Serializable*

Hazelcast optimizes all of the above object types. You do not need to worry about their (de)serializations.

### 17.1 Serialization Interfaces

For complex objects, the following interfaces are used for serialization and deserialization.

- `java.io.Serializable`
- `java.io.Externalizable`
- `com.hazelcast.nio.serialization.DataSerializable`
- `com.hazelcast.nio.serialization.IdentifiedDataSerializable`
- `com.hazelcast.nio.serialization.Portable`, and
- Custom Serialization (using `StreamSerializer`, `ByteArraySerializer`)

When Hazelcast serializes an object into `Data`:

- (1) It first checks whether the object is an instance of `com.hazelcast.nio.serialization.DataSerializable`.
- (2) If the above check fails, then Hazelcast checks if it is an instance of `com.hazelcast.nio.serialization.Portable`.
- (3) If the above check fails, then Hazelcast checks whether the object is a well-known type like `String`, `Long`, or `Integer`, or if it is a user-specified type like `ByteArraySerializer` or `StreamSerializer`.
- (4) If the above checks fail, Hazelcast will use Java serialization.

If all of the above checks do not work, then serialization will fail. When a class implements multiple interfaces, the above steps are important to determine the serialization mechanism that Hazelcast will use. When a class definition is required for any of these serializations, all the classes needed by the application should be on the classpath because Hazelcast does not download them automatically.

## 17.2 Comparison Table

Below table provides a comparison between the interfaces listed in the previous section to help you in deciding which interface to use in your applications.

<i>Serialization Interface</i>	<i>Advantages</i>
<b>Serializable</b>	- A standard and basic Java interface - Requires no implementation
<b>Externalizable</b>	- A standard Java interface - More CPU and memory usage efficient than <code>Serializable</code>
<b>DataSerializable</b>	- More CPU and memory usage efficient than <code>Serializable</code>
<b>IdentifiedDataSerializable</b>	- More CPU and memory usage efficient than <code>Serializable</code> - Reflection is not used during deserialization
<b>Portable</b>	- More CPU and memory usage efficient than <code>Serializable</code> - Reflection is not used during deserialization
<b>Custom Serialization</b>	- Does not require class to implement an interface - Convenient and flexible - Can be based on any serializer

Let's dig into the details of the above serialization mechanisms in the following sections.

## 17.3 Serializable & Externalizable

A class often needs to implement the `java.io.Serializable` interface; native Java serialization is the easiest way to do serialization. Let's take a look at the example code below.

```
public class Employee implements Serializable {
 private static final long serialVersionUID = 1L;
 private String surname;

 public Employee(String surname) {
 this.surname = surname;
 }
}
```

Here, the fields that are non-static and non-transient are automatically serialized. To eliminate class compatibility issues, it is recommended that you add a `serialVersionUID`, as shown above. Also, when you are using methods that perform byte-content comparisons (e.g. `IMap.replace()`) and if byte-content of equal objects is different, you may face unexpected behaviors. Therefore, if the class relies on, for example, a hash map, `replace` method may fail. The reason for this is the hash map is a serialized data structure with unreliable byte-content.

Hazelcast also supports `java.io.Externalizable`. This interface offers more control on the way fields are serialized or deserialized. Compared to native Java serialization, it also can have a positive effect on performance. With `java.io.Externalizable`, there is no need to add `serialVersionUID`.

Let's take a look at the example code below.



```

public class Employee implements Externalizable {
 private String surname;
 public Employee(String surname) {
 this.surname = surname;
 }

 @Override
 public void readExternal(ObjectInput in)
 throws IOException, ClassNotFoundException {
 this.surname = in.readUTF();
 }

 @Override
 public void writeExternal(ObjectOutputStream out)
 throws IOException {
 out.writeUTF(surname);
 }
}

```

Writing and reading of fields are performed explicitly. Note that reading should be performed in the same order as writing.

## 17.4 DataSerializable

As mentioned in the [Serializable & Externalizable section](#), Java serialization is an easy mechanism. However, we do not have a control on how fields are serialized or deserialized. Moreover, this mechanism can lead to excessive CPU loads since it keeps track of objects to handle the cycles and streams class descriptors. These are performance decreasing factors; thus, serialized data may not have an optimal size.

The `DataSerializable` interface of Hazelcast overcomes these issues. Here is an example of a class implementing the `com.hazelcast.nio.serialization.DataSerializable` interface.

```

public class Address implements DataSerializable {
 private String street;
 private int zipCode;
 private String city;
 private String state;

 public Address() {}

 //getters setters..

 public void writeData(ObjectDataOutput out) throws IOException {
 out.writeUTF(street);
 out.writeInt(zipCode);
 out.writeUTF(city);
 out.writeUTF(state);
 }

 public void readData(ObjectDataInput in) throws IOException {
 street = in.readUTF();
 zipCode = in.readInt();
 city = in.readUTF();
 state = in.readUTF();
 }
}

```

Let's take a look at another example which encapsulates a `DataSerializable` field.

```
public class Employee implements DataSerializable {
 private String firstName;
 private String lastName;
 private int age;
 private double salary;
 private Address address; //address itself is DataSerializable

 public Employee() {}

 //getters setters..

 public void writeData(ObjectDataOutput out) throws IOException {
 out.writeUTF(firstName);
 out.writeUTF(lastName);
 out.writeInt(age);
 out.writeDouble (salary);
 address.writeData (out);
 }

 public void readData(ObjectDataInput in) throws IOException {
 firstName = in.readUTF();
 lastName = in.readUTF();
 age = in.readInt();
 salary = in.readDouble();
 address = new Address();
 // since Address is DataSerializable let it read its own internal state
 address.readData(in);
 }
}
```

As you can see, since `address` field itself is `DataSerializable`, it is calling `address.writeData(out)` when writing and `address.readData(in)` when reading. Also note that, the order of writing and reading fields should be the same. While Hazelcast serializes a `DataSerializable`, it writes the `className` first. When Hazelcast de-serializes it, `className` is used to instantiate the object using reflection.



**NOTE:** Since Hazelcast needs to create an instance during deserialization, `DataSerializable` class has a no-arg constructor.



**NOTE:** `DataSerializable` is a good option if serialization is only needed for in-cluster communication.

### 17.4.1 IdentifiedDataSerializable

For a faster serialization of objects, avoiding reflection and long class names, Hazelcast recommends you implement `com.hazelcast.nio.serialization.IdentifiedDataSerializable` which is a slightly better version of `DataSerializable`.

`DataSerializable` uses reflection to create a class instance, as mentioned in the [DataSerializable section](#). But, `IdentifiedDataSerializable` uses a factory for this purpose and it is faster during deserialization which requires new instance creations.

`IdentifiedDataSerializable` extends `DataSerializable` and introduces two new methods.

- `int getId();`
- `int getFactoryId();`

`IdentifiedDataSerializable` uses `getId()` instead of class name, and it uses `getFactoryId()` to load the class when given the Id. To complete the implementation, `com.hazelcast.nio.serialization.DataSerializableFactory` should also be implemented and registered into `SerializationConfig` which can be accessed from `Config.getSerializationConfig()`. Factory's responsibility is to return an instance of the right `IdentifiedDataSerializable` object, given the Id. So far this is the most efficient way of Serialization that Hazelcast supports off the shelf.

Let's take a look at the example code below and configuration to see `IdentifiedDataSerializable` in action.

```
public class Employee
 implements IdentifiedDataSerializable {

 private String surname;

 public Employee() {}

 public Employee(String surname) {
 this.surname = surname;
 }

 @Override
 public void readData(ObjectDataInput in)
 throws IOException {
 this.surname = in.readUTF();
 }

 @Override
 public void writeData(ObjectDataOutput out)
 throws IOException {
 out.writeUTF(surname);
 }

 @Override
 public int getFactoryId() {
 return EmployeeDataSerializableFactory.FACTORY_ID;
 }

 @Override
 public int getId() {
 return EmployeeDataSerializableFactory.EMPLOYEE_TYPE;
 }

 @Override
 public String toString() {
 return String.format("Employee(surname=%s)", surname);
 }
}
```

The methods `getId` and `getFactoryId` return a unique positive number within the `EmployeeDataSerializableFactory`. Now, let's create an instance of this `EmployeeDataSerializableFactory`.

```
public class EmployeeDataSerializableFactory
 implements DataSerializableFactory{

 public static final int FACTORY_ID = 1;

 public static final int EMPLOYEE_TYPE = 1;
```

```

@Override
public IdentifiedDataSerializable create(int typeId) {
 if (typeId == EMPLOYEE_TYPE) {
 return new Employee();
 } else {
 return null;
 }
}
}

```

The only method you should implement is `create`, as seen in the above example. It is recommended that you use a `switch-case` statement instead of multiple `if-else` blocks if you have a lot of subclasses. Hazelcast throws an exception if null is returned for `typeId`.

As the last step, you need to register `EmployeeDataSerializableFactory` declaratively (declare in the configuration file `hazelcast.xml`) as shown below. Note that `factory-id` has the same value of `FACTORY_ID` in the above code. This is crucial to enable Hazelcast to find the correct factory.

```

<hazelcast>
...
<serialization>
 <data-serializable-factories>
 <data-serializable-factory
 factory-id="1">EmployeeDataSerializableFactory
 </data-serializable-factory>
 </data-serializable-factories>
</serialization>
...
</hazelcast>

```

## RELATED INFORMATION

Please refer to the [Serialization Configuration section](#) for a full description of Hazelcast Serialization configuration.

## 17.5 Portable

As an alternative to the existing serialization methods, Hazelcast offers a language/platform independent Portable serialization that has the following advantages:

- Supports multi-version of the same object type.
- Fetches individual fields without having to rely on reflection.
- Queries and indexing support without de-serialization and/or reflection.

In order to support these features, a serialized Portable object contains meta information like the version and the concrete location of the each field in the binary data. This way, Hazelcast navigates in the `byte[]` and de-serializes only the required field without actually de-serializing the whole object. This improves the Query performance.

With multi-version support, you can have two nodes where each of them have different versions of the same object. Hazelcast will store both meta information and use the correct one to serialize and de-serialize Portable objects depending on the node. This is very helpful when you are doing a rolling upgrade without shutting down the cluster.

Portable serialization is totally language independent and is used as the binary protocol between Hazelcast server and clients.

A sample Portable implementation of a `Foo` class would look like the following.

```

public class Foo implements Portable{
 final static int ID = 5;

 private String foo;

 public String getFoo() {
 return foo;
 }

 public void setFoo(String foo) {
 this.foo = foo;
 }

 @Override
 public int getFactoryId() {
 return 1;
 }

 @Override
 public int getClassId() {
 return ID;
 }

 @Override
 public void writePortable(PortableWriter writer) throws IOException {
 writer.writeUTF("foo", foo);
 }

 @Override
 public void readPortable(PortableReader reader) throws IOException {
 foo = reader.readUTF("foo");
 }
}

```

Similar to `IdentifiedDataSerializable`, a `Portable` Class must provide `classId` and `factoryId`. The `Factory` object creates the `Portable` object given the `classId`.

An example `Factory` could be implemented as following:

```

public class MyPortableFactory implements PortableFactory {

 @Override
 public Portable create(int classId) {
 if (Foo.ID == classId)
 return new Foo();
 else
 return null;
 }
}

```

The last step is to register the `Factory` to the `SerializationConfig`. Below are the programmatic and declarative configurations for this step.

```

Config config = new Config();
config.getSerializationConfig().addPortableFactory(1, new MyPortableFactory());

```

```

<hazelcast>
 <serialization>

```

```

<portable-version>0</portable-version>
<portable-factories>
 <portable-factory factory-id="1">
 com.hazelcast.nio.serialization.MyPortableFactory
 </portable-factory>
</portable-factories>
</serialization>
</hazelcast>

```

Note that the `id` that is passed to the `SerializationConfig` is the same as the `factoryId` that the `Foo` class returns.

### 17.5.1 Versions

More than one version of the same class may need to be serialized and deserialized. For example, a client may have an older version of a class, and the node to which it is connected can have a newer version of the same class.

Portable serialization supports versioning. You can declare `Version` in the configuration file `hazelcast.xml` using the `portable-version` element, as shown below.

```

<serialization>
 <portable-version>1</portable-version>
 <portable-factories>
 <portable-factory factory-id="1">
 PortableFactoryImpl
 </portable-factory>
 </portable-factories>
</serialization>

```

You should consider the following when you perform versioning.

- It is important to change the version whenever an update is performed in the serialized fields of a class (e.g. increment the version).
- If a client performs a Portable deserialization on a field, and then that Portable is updated by removing that field on the cluster side, this may lead to a problem.
- Portable serialization does not use reflection and hence, fields in the class and in the serialized content are not automatically mapped. Field renaming is a simpler process. Also, since the class ID is stored, renaming the Portable does not lead to problems.
- Types of fields need to be updated carefully. Hazelcast performs basic type upgradings (e.g. `int` to `float`).

### 17.5.2 Null Portable Serialization

Be careful when serializing null portables. Hazelcast lazily creates a class definition of portable internally when the user first serializes. This class definition is stored and used later for deserializing that portable class. When the user tries to serialize a null portable when there is no class definition at the moment, Hazelcast throws an exception saying that `com.hazelcast.nio.serialization.HazelcastSerializationException: Cannot write null portable without explicitly registering class definition!`.

There are two solutions to get rid of this exception. Either put a non-null portable class of the same type before any other operation, or manually register a class definition in serialization configuration as shown below.

```

Config config = new Config();
final ClassDefinition classDefinition = new ClassDefinitionBuilder(Foo.factoryId, Foo.getClassId)
 .addUTFField("foo").build();
config.getSerializationConfig().addClassDefinition(classDefinition);
Hazelcast.newHazelcastInstance(config);

```

### 17.5.3 DistributedObject Serialization

Putting a `DistributedObject` (Hazelcast Semaphore, Queue, etc.) in a machine and getting it from another one is not a straightforward operation. Passing the ID and type of the `DistributedObject` can be a solution. For deserialization, you can get the object from `HazelcastInstance`. For instance, if your object is an instance of `IQueue`, you can either use `HazelcastInstance.getQueue(id)` or `Hazelcast.getDistributedObject`.

You can use the `HazelcastInstanceAware` interface in the case of a deserialization of a Portable `DistributedObject` if it gets an ID to be looked up. `HazelcastInstance` is set after deserialization, so you first need to store the ID and then retrieve the `DistributedObject` using the `setHazelcastInstance` method.

#### RELATED INFORMATION

Please refer to the [Serialization Configuration section](#) for a full description of Hazelcast Serialization configuration.

## 17.6 Custom Serialization

Hazelcast lets you plug a custom serializer for serializing objects. You can use `StreamSerializer` and `ByteArraySerializer` interfaces for this purpose.

### 17.6.1 StreamSerializer

You can use a stream to serialize and deserialize data by using `StreamSerializer`. This is a good option for your own implementations. It can also be adapted to external serialization libraries like Kryo, JSON, and protocol buffers.

#### 17.6.1.1 StreamSerializer Example 1

First, let's create a simple object.

```
public class Employee {
 private String surname;

 public Employee(String surname) {
 this.surname = surname;
 }
}
```

Now, let's implement `StreamSerializer` for `Employee` class.

```
public class EmployeeStreamSerializer
 implements StreamSerializer<Employee> {

 @Override
 public int getTypeId () {
 return 1;
 }

 @Override
 public void write(ObjectDataOutput out, Employee employee)
 throws IOException {
 out.writeUTF(employee.getSurname());
 }

 @Override
 public Employee read(ObjectDataInput in)
```

```

 throws IOException {
 String surname = in.readUTF();
 return new Employee(surname);
}

@Override
public void destroy () {
}
}

```

In practice, classes may have many fields. Just make sure the fields are read in the same order as they are written. The type ID must be unique and greater than or equal to 1. Uniqueness of the type ID enables Hazelcast to determine which serializer will be used during deserialization.

As the last step, let's register the `EmployeeStreamSerializer` in the configuration file `hazelcast.xml`, as shown below.

```

<serialization>
 <serializers>
 <serializer type-class="Employee" class-name="EmployeeStreamSerializer" />
 </serializers>
</serialization>

```



**NOTE:** *StreamSerializer* cannot be created for well-known types (e.g. `Long`, `String`) and primitive arrays. Hazelcast already registers these types.

### 17.6.1.2 StreamSerializer Example 2

Let's take a look at another example implementing `StreamSerializer`.

```

public class Foo {
 private String foo;

 public String getFoo() {
 return foo;
 }

 public void setFoo(String foo) {
 this.foo = foo;
 }
}

```

Assume that our custom serialization will serialize `Foo` into XML. First we need to implement a `com.hazelcast.nio.serialization.StreamSerializer`. A very simple one that uses `XMLEncoder` and `XMLDecoder` could look like the following:

```

public static class FooXmlSerializer implements StreamSerializer<Foo> {

 @Override
 public int getTypeId() {
 return 10;
 }

 @Override
 public void write(ObjectDataOutput out, Foo object) throws IOException {

```



```

 ByteArrayOutputStream bos = new ByteArrayOutputStream();
 XMLEncoder encoder = new XMLEncoder(bos);
 encoder.writeObject(object);
 encoder.close();
 out.write(bos.toByteArray());
 }

 @Override
 public Foo read(ObjectDataInput in) throws IOException {
 InputStream inputStream = (InputStream) in;
 XMLDecoder decoder = new XMLDecoder(inputStream);
 return (Foo) decoder.readObject();
 }

 @Override
 public void destroy() {
 }
}

```

Note that `typeId` must be unique because Hazelcast will use it to look up the `StreamSerializer` while it deserializes the object. The last required step is to register the `StreamSerializer` to the Configuration. Below are the programmatic and declarative configurations for this step.

```

SerializerConfig sc = new SerializerConfig()
 .setImplementation(new FooXmlSerializer())
 .setTypeClass(Foo.class);
Config config = new Config();
config.getSerializationConfig().addSerializerConfig(sc);

```

```

<hazelcast>
 <serialization>
 <serializers>
 <serializer type-class="com.www.Foo">com.www.FooXmlSerializer</serializer>
 </serializers>
 </serialization>
</hazelcast>

```

From now on, Hazelcast will use `FooXmlSerializer` to serialize `Foo` objects. This way one can write an adapter (`StreamSerializer`) for any Serialization framework and plug it into Hazelcast.

## RELATED INFORMATION

Please refer to the [Serialization Configuration section](#) for a full description of Hazelcast Serialization configuration.

### 17.6.2 ByteArraySerializer

`ByteArraySerializer` exposes the raw `ByteArray` used internally by Hazelcast. It is a good option if the serialization library you are using deals with `ByteArrays` instead of streams.

Let's implement `ByteArraySerializer` for the `Employee` class mentioned in the [StreamSerializer section](#).

```

public class EmployeeByteArraySerializer
 implements ByteArraySerializer<Employee> {

 @Override
 public void destroy () {
 }
}

```

```

@Override
public int getTypeId () {
 return 1;
}

@Override
public byte[] write(Employee object)
 throws IOException {
 return object.getName().getBytes();
}

@Override
public Employee read(byte[] buffer)
 throws IOException {
 String surname = new String(buffer);
 return new Employee(surname);
}
}

```

As usual, let's register the `EmployeeByteArraySerializer` in the configuration file `hazelcast.xml`, as shown below.

```

<serialization>
 <serializers>
 <serializer type-class="Employee">EmployeeByteArraySerializer</serializer>
 </serializers>
</serialization>

```

## RELATED INFORMATION

Please refer to the [Serialization Configuration section](#) for a full description of Hazelcast Serialization configuration.

## 17.7 HazelcastInstanceAware Interface

You can implement the `HazelcastInstanceAware` interface to access distributed objects for cases where an object is deserialized and needs access to `HazelcastInstance`.

Let's implement it for the `Employee` class mentioned in the [Custom Serialization section](#).

```

public class Employee
 implements Serializable, HazelcastInstanceAware {

 private static final long serialVersionUID = 1L;
 private String surname;
 private transient HazelcastInstance hazelcastInstance;

 public Person(String surname) {
 this.surname = surname;
 }

 @Override
 public void setHazelcastInstance(HazelcastInstance hazelcastInstance) {
 this.hazelcastInstance = hazelcastInstance;
 System.out.println("HazelcastInstance set");
 }

 @Override

```

```
public String toString() {
 return String.format("Person(surname=%s)", surname);
}
}
```

After deserialization, the object is checked if it implements `HazelcastInstanceAware` and the method `setHazelcastInstance` is called. Notice the `hazelcastInstance` is `transient`. This is because this field should not be serialized.

It may be a good practice to inject a `HazelcastInstance` into a domain object (e.g. `Employee` in the above sample) when used together with `Runnable/Callable` implementations. These runnables/callables are executed by `IExecutorService` which sends them to another machine. And after a task is deserialized, run/call method implementations need to access `HazelcastInstance`.

We recommend you only to set the `HazelcastInstance` field while using `setHazelcastInstance` method and not to execute operations on the `HazelcastInstance`. Because, when `HazelcastInstance` is injected for a `HazelcastInstanceAware` implementation, it may not be up and running at the injection time.



# Chapter 18

## Management

This chapter provides information on managing and monitoring your Hazelcast cluster. It gives detailed instructions related to gathering statistics, monitoring via JMX protocol and managing the cluster with useful utilities. It also includes the usage explanations of Hazelcast Management Center.

### 18.1 Statistics API per Node

You can gather various statistics from your distributed data structures via Statistics API. Since the data structures are distributed in the cluster, the Statistics API provides statistics for the local portion (1/Number of Nodes) of data on each node.

#### 18.1.1 Map Statistics

The `IMap` interface has a `getLocalMapStats()` method which returns a `LocalMapStats` object that holds local map statistics.

```
HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
IMap<String, Customer> customers = hazelcastInstance.getMap("customers");
LocalMapStats mapStatistics = customers.getLocalMapStats();
System.out.println("number of entries owned on this node = "
 + mapStatistics.getOwnedEntryCount());
```

Below is the list of metrics that you can access via the `LocalMapStats` object.

```
/**
 * Returns the number of entries owned by this member.
 */
long getOwnedEntryCount();

/**
 * Returns the number of backup entries hold by this member.
 */
long getBackupEntryCount();

/**
 * Returns the number of backups per entry.
 */
int getBackupCount();

/**
```

```

* Returns memory cost (number of bytes) of owned entries in this member.
*/
long getOwnedEntryMemoryCost();

/**
* Returns memory cost (number of bytes) of backup entries in this member.
*/
long getBackupEntryMemoryCost();

/**
* Returns the creation time of this map on this member.
*/
long getCreationTime();

/**
* Returns the last access (read) time of the locally owned entries.
*/
long getLastAccessTime();

/**
* Returns the last update time of the locally owned entries.
*/
long getLastUpdateTime();

/**
* Returns the number of hits (reads) of the locally owned entries.
*/
long getHits();

/**
* Returns the number of currently locked locally owned keys.
*/
long getLockedEntryCount();

/**
* Returns the number of entries that the member owns and are dirty (updated
* but not persisted yet).
* dirty entry count is meaningful when there is a persistence defined.
*/
long getDirtyEntryCount();

/**
* Returns the number of put operations
*/
long getPutOperationCount();

/**
* Returns the number of get operations
*/
long getGetOperationCount();

/**
* Returns the number of Remove operations
*/
long getRemoveOperationCount();

/**
* Returns the total latency of put operations. To get the average latency,

```

```
 * divide by number of puts
 */
long getTotalPutLatency();

/**
 * Returns the total latency of get operations. To get the average latency,
 * divide by number of gets
 */
long getTotalGetLatency();

/**
 * Returns the total latency of remove operations. To get the average latency,
 * divide by number of gets
 */
long getTotalRemoveLatency();

/**
 * Returns the maximum latency of put operations. To get the average latency,
 * divide by number of puts
 */
long getMaxPutLatency();

/**
 * Returns the maximum latency of get operations. To get the average latency,
 * divide by number of gets
 */
long getMaxGetLatency();

/**
 * Returns the maximum latency of remove operations. To get the average latency,
 * divide by number of gets
 */
long getMaxRemoveLatency();

/**
 * Returns the number of Events Received
 */
long getEventOperationCount();

/**
 * Returns the total number of Other Operations
 */
long getOtherOperationCount();

/**
 * Returns the total number of total operations
 */
long total();

/**
 * Cost of map & near cache & backup in bytes
 * todo in object mode object size is zero.
 */
long getHeapCost();

/**
 * Returns statistics related to the Near Cache.
 */
```

```
NearCacheStats getNearCacheStats();
```

#### 18.1.1.1 Near Cache Statistics

You can access Near Cache statistics from the `LocalMapStats` object via the `getNearCacheStats()` method, which returns a `NearCacheStats` object.

```
HazelcastInstance node = Hazelcast.newHazelcastInstance();
IMap<String, Customer> customers = node.getMap("customers");
LocalMapStats mapStatistics = customers.getLocalMapStats();
NearCacheStats nearCacheStatistics = mapStatistics.getNearCacheStats();
System.out.println("near cache hit/miss ratio= "
 + nearCacheStatistics.getRatio());
```

Below is the list of metrics that you can access via the `NearCacheStats` object. This behavior applies to both client and node near caches.

```
/**
 * Returns the creation time of this NearCache on this member
 */
long getCreationTime();

/**
 * Returns the number of entries owned by this member.
 */
long getOwnedEntryCount();

/**
 * Returns memory cost (number of bytes) of entries in this cache.
 */
long getOwnedEntryMemoryCost();

/**
 * Returns the number of hits (reads) of the locally owned entries.
 */
long getHits();

/**
 * Returns the number of misses of the locally owned entries.
 */
long getMisses();

/**
 * Returns the hit/miss ratio of the locally owned entries.
 */
double getRatio();
```

#### 18.1.2 Multimap Statistics

The `MultiMap` interface has a `getLocalMultiMapStats()` method which returns a `LocalMultiMapStats` object that holds local `MultiMap` statistics.

```
HazelcastInstance node = Hazelcast.newHazelcastInstance();
MultiMap<String, Customer> customers = node.getMultiMap("customers");
LocalMultiMapStats multiMapStatistics = customers.getLocalMultiMapStats();
System.out.println("last update time = "
 + multiMapStatistics.getLastUpdateTime());
```



Below is the list of metrics that you can access via the `LocalMultiMapStats` object.

```
/**
 * Returns the number of entries owned by this member.
 */
long getOwnedEntryCount();

/**
 * Returns the number of backup entries hold by this member.
 */
long getBackupEntryCount();

/**
 * Returns the number of backups per entry.
 */
int getBackupCount();

/**
 * Returns memory cost (number of bytes) of owned entries in this member.
 */
long getOwnedEntryMemoryCost();

/**
 * Returns memory cost (number of bytes) of backup entries in this member.
 */
long getBackupEntryMemoryCost();

/**
 * Returns the creation time of this map on this member.
 */
long getCreationTime();

/**
 * Returns the last access (read) time of the locally owned entries.
 */
long getLastAccessTime();

/**
 * Returns the last update time of the locally owned entries.
 */
long getLastUpdateTime();

/**
 * Returns the number of hits (reads) of the locally owned entries.
 */
long getHits();

/**
 * Returns the number of currently locked locally owned keys.
 */
long getLockedEntryCount();

/**
 * Returns the number of entries that the member owns and are dirty (updated
 * but not persisted yet).
 * dirty entry count is meaningful when a persistence is defined.
 */
long getDirtyEntryCount();
```

```
/**
 * Returns the number of put operations
 */
long getPutOperationCount();

/**
 * Returns the number of get operations
 */
long getGetOperationCount();

/**
 * Returns the number of Remove operations
 */
long getRemoveOperationCount();

/**
 * Returns the total latency of put operations. To get the average latency,
 * divide by number of puts
 */
long getTotalPutLatency();

/**
 * Returns the total latency of get operations. To get the average latency,
 * divide by number of gets
 */
long getTotalGetLatency();

/**
 * Returns the total latency of remove operations. To get the average latency,
 * divide by number of gets
 */
long getTotalRemoveLatency();

/**
 * Returns the maximum latency of put operations. To get the average latency,
 * divide by number of puts
 */
long getMaxPutLatency();

/**
 * Returns the maximum latency of get operations. To get the average latency,
 * divide by number of gets
 */
long getMaxGetLatency();

/**
 * Returns the maximum latency of remove operations. To get the average latency,
 * divide by number of gets
 */
long getMaxRemoveLatency();

/**
 * Returns the number of Events Received
 */
long getEventOperationCount();

/**
```

```

* Returns the total number of Other Operations
*/
long getOtherOperationCount();

/**
 * Returns the total number of total operations
*/
long total();

/**
 * Cost of map & near cache & backup in bytes
 * todo in object mode object size is zero.
*/
long getHeapCost();

```

### 18.1.3 Queue Statistics

The IQueue interface has a `getLocalQueueStats()` method which returns a `LocalQueueStats` object that holds local queue statistics.

```

HazelcastInstance node = Hazelcast.newHazelcastInstance();
IQueue<Order> orders = node.getQueue("orders");
LocalQueueStats queueStatistics = orders.getLocalQueueStats();
System.out.println("average age of items = "
 + queueStatistics.getAvgAge());

```

Below is the list of metrics that you can access via the `LocalQueueStats` object.

```

/**
 * Returns the number of owned items in this member.
*/
long getOwnedItemCount();

/**
 * Returns the number of backup items in this member.
*/
long getBackupItemCount();

/**
 * Returns the min age of the items in this member.
*/
long getMinAge();

/**
 * Returns the max age of the items in this member.
*/
long getMaxAge();

/**
 * Returns the average age of the items in this member.
*/
long getAvgAge();

/**
 * Returns the number of offer/put/add operations.
 * Offers returning false will be included.
 * #getRejectedOfferOperationCount can be used

```

```

 * to get the rejected offers.
 */
 long getOfferOperationCount();

 /**
 * Returns the number of rejected offers. Offer
 * can be rejected because of max-size limit
 * on the queue.
 */
 long getRejectedOfferOperationCount();

 /**
 * Returns the number of poll/take/remove operations.
 * Polls returning null (empty) will be included.
 * #getEmptyPollOperationCount can be used to get the
 * number of polls returned null.
 */
 long getPollOperationCount();

 /**
 * Returns number of null returning poll operations.
 * Poll operation might return null, if the queue is empty.
 */
 long getEmptyPollOperationCount();

 /**
 * Returns number of other operations
 */
 long getOtherOperationsCount();

 /**
 * Returns number of event operations
 */
 long getEventOperationCount();

```

#### 18.1.4 Topic Statistics

The `ITopic` interface has a `getLocalTopicStats()` method which returns a `LocalTopicStats` object that holds local topic statistics.

```

HazelcastInstance node = Hazelcast.newHazelcastInstance();
ITopic<Object> news = node.getTopic("news");
LocalTopicStats topicStatistics = news.getLocalTopicStats();
System.out.println("number of publish operations = "
 + topicStatistics.getPublishOperationCount());

```

Below is the list of metrics that you can access via the `LocalTopicStats` object.

```

 /**
 * Returns the creation time of this topic on this member
 */
 long getCreationTime();

 /**
 * Returns the total number of published messages of this topic on this member
 */
 long getPublishOperationCount();

```

```

/**
 * Returns the total number of received messages of this topic on this member
 */
long getReceiveOperationCount();

```

### 18.1.5 Executor Statistics

The `IExecutorService` interface has a `getLocalExecutorStats()` method which returns a `LocalExecutorStats` object that holds local executor statistics.

```

HazelcastInstance node = Hazelcast.newHazelcastInstance();
IExecutorService orderProcessor = node.getExecutorService("orderProcessor");
LocalExecutorStats executorStatistics = orderProcessor.getLocalExecutorStats();
System.out.println("completed task count = "
 + executorStatistics.getCompletedTaskCount());

```

Below is the list of metrics that you can access via the `LocalExecutorStats` object.

```

/**
 * Returns the number of pending operations of the executor service
 */
long getPendingTaskCount();

/**
 * Returns the number of started operations of the executor service
 */
long getStartedTaskCount();

/**
 * Returns the number of completed operations of the executor service
 */
long getCompletedTaskCount();

/**
 * Returns the number of cancelled operations of the executor service
 */
long getCancelledTaskCount();

/**
 * Returns the total start latency of operations started
 */
long getTotalStartLatency();

/**
 * Returns the total execution time of operations finished
 */
long getTotalExecutionLatency();

```

## 18.2 JMX API per Node

Hazelcast members expose various management beans which include statistics about distributed data structures and the states of Hazelcast node internals.

The metrics are local to the nodes, i.e. they do not reflect cluster wide values.

You can find the JMX API definition below with descriptions and the API methods in parenthesis.

### **Atomic Long (IAtomicLong)**

- Name ( `name` )
- Current Value ( `currentValue` )
- Set Value ( `set(v)` )
- Add value and Get ( `addAndGet(v)` )
- Compare and Set ( `compareAndSet(e,v)` )
- Decrement and Get ( `decrementAndGet()` )
- Get and Add ( `getAndAdd(v)` )
- Get and Increment ( `getAndIncrement()` )
- Get and Set ( `getAndSet(v)` )
- Increment and Get ( `incrementAndGet()` )
- Partition key ( `partitionKey` )

### **Atomic Reference ( IAtomicReference )**

- Name ( `name` )
- Partition key ( `partitionKey` )

### **Countdown Latch ( ICountDownLatch )**

- Name ( `name` )
- Current count ( `count` )
- Countdown ( `countDown()` )
- Partition key ( `partitionKey` )

### **Executor Service ( IExecutorService )**

- Local pending operation count ( `localPendingTaskCount` )
- Local started operation count ( `localStartedTaskCount` )
- Local completed operation count ( `localCompletedTaskCount` )
- Local cancelled operation count ( `localCancelledTaskCount` )
- Local total start latency ( `localTotalStartLatency` )
- Local total execution latency ( `localTotalExecutionLatency` )

### **List ( IList )**

- Name ( `name` )
- Clear list ( `clear` )
- Total added item count ( `totalAddedItemCount` )
- Total removed item count ( `totalRemovedItemCount` )

### **Lock ( ILock )**

- Name ( `name` )
- Lock Object ( `lockObject` )
- Partition key ( `partitionKey` )

### **Map ( IMap )**

- Name ( `name` )

- Size ( size )
- Config ( config )
- Owned entry count ( localOwnedEntryCount )
- Owned entry memory cost ( localOwnedEntryMemoryCost )
- Backup entry count ( localBackupEntryCount )
- Backup entry cost ( localBackupEntryMemoryCost )
- Backup count ( localBackupCount )
- Creation time ( localCreationTime )
- Last access time ( localLastAccessTime )
- Last update time ( localLastUpdateTime )
- Hits ( localHits )
- Locked entry count ( localLockedEntryCount )
- Dirty entry count ( localDirtyEntryCount )
- Put operation count ( localPutOperationCount )
- Get operation count ( localGetOperationCount )
- Remove operation count ( localRemoveOperationCount )
- Total put latency ( localTotalPutLatency )
- Total get latency ( localTotalGetLatency )
- Total remove latency ( localTotalRemoveLatency )
- Max put latency ( localMaxPutLatency )
- Max get latency ( localMaxGetLatency )
- Max remove latency ( localMaxRemoveLatency )
- Event count ( localEventOperationCount )
- Other (keySet,entrySet etc..) operation count ( localOtherOperationCount )
- Total operation count ( localTotal )
- Heap Cost ( localHeapCost )
- Total added entry count ( totalAddedEntryCount )
- Total removed entry count ( totalRemovedEntryCount )
- Total updated entry count ( totalUpdatedEntryCount )
- Total evicted entry count ( totalEvictedEntryCount )
- Clear ( clear() )
- Values ( values(p) )
- Entry Set ( entrySet(p) )

### MultiMap ( MultiMap )

- Name ( name )
- Size ( size )
- Owned entry count ( localOwnedEntryCount )
- Owned entry memory cost ( localOwnedEntryMemoryCost )
- Backup entry count ( localBackupEntryCount )
- Backup entry cost ( localBackupEntryMemoryCost )
- Backup count ( localBackupCount )
- Creation time ( localCreationTime )
- Last access time ( localLastAccessTime )
- Last update time ( localLastUpdateTime )
- Hits ( localHits )
- Locked entry count ( localLockedEntryCount )
- Put operation count ( localPutOperationCount )
- Get operation count ( localGetOperationCount )
- Remove operation count ( localRemoveOperationCount )
- Total put latency ( localTotalPutLatency )
- Total get latency ( localTotalGetLatency )
- Total remove latency ( localTotalRemoveLatency )

- Max put latency ( `localMaxPutLatency` )
- Max get latency ( `localMaxGetLatency` )
- Max remove latency ( `localMaxRemoveLatency` )
- Event count ( `localEventOperationCount` )
- Other (keySet,entrySet etc..) operation count ( `localOtherOperationCount` )
- Total operation count ( `localTotal` )
- Clear ( `clear()` )

### Replicated Map ( `ReplicatedMap` )

- Name ( `name` )
- Size ( `size` )
- Config ( `config` )
- Owned entry count ( `localOwnedEntryCount` )
- Creation time ( `localCreationTime` )
- Last access time ( `localLastAccessTime` )
- Last update time ( `localLastUpdateTime` )
- Hits ( `localHits` )
- Put operation count ( `localPutOperationCount` )
- Get operation count ( `localGetOperationCount` )
- Remove operation count ( `localRemoveOperationCount` )
- Total put latency ( `localTotalPutLatency` )
- Total get latency ( `localTotalGetLatency` )
- Total remove latency ( `localTotalRemoveLatency` )
- Max put latency ( `localMaxPutLatency` )
- Max get latency ( `localMaxGetLatency` )
- Max remove latency ( `localMaxRemoveLatency` )
- Event count ( `localEventOperationCount` )
- Replication event count ( `localReplicationEventCount` )
- Other (keySet,entrySet etc..) operation count ( `localOtherOperationCount` )
- Total operation count ( `localTotal` )
- Total added entry count ( `totalAddedEntryCount` )
- Total removed entry count ( `totalRemovedEntryCount` )
- Total updated entry count ( `totalUpdatedEntryCount` )
- Clear ( `clear()` )
- Values ( `values()` )
- Entry Set ( `entrySet()` )

### Queue ( `IQueue` )

- Name ( `name` )
- Config ( `QueueConfig` )
- Partition key ( `partitionKey` )
- Owned item count ( `localOwnedItemCount` )
- Backup item count ( `localBackupItemCount` )
- Minimum age ( `localMinAge` )
- Maximum age ( `localMaxAge` )
- Average age ( `localAveAge` )
- Offer operation count ( `localOfferOperationCount` )
- Rejected offer operation count ( `localRejectedOfferOperationCount` )
- Poll operation count ( `localPollOperationCount` )
- Empty poll operation count ( `localEmptyPollOperationCount` )
- Other operation count ( `localOtherOperationsCount` )
- Event operation count ( `localEventOperationCount` )



- Total added item count ( `totalAddedItemCount` )
- Total removed item count ( `totalRemovedItemCount` )
- Clear ( `clear()` )

#### Semaphore ( `ISemaphore` )

- Name ( `name` )
- Available permits ( `available` )
- Partition key ( `partitionKey` )
- Drain ( `drain()` )
- Shrink available permits by given number ( `reduce(v)` )
- Release given number of permits ( `release(v)` )

#### Set ( `ISet` )

- Name ( `name` )
- Partition key ( `partitionKey` )
- Total added item count ( `totalAddedItemCount` )
- Total removed item count ( `totalRemovedItemCount` )
- Clear ( `clear()` )

#### Topic ( `ITopic` )

- Name ( `name` )
- Config ( `config` )
- Creation time ( `localCreationTime` )
- Publish operation count ( `localPublishOperationCount` )
- Receive operation count ( `localReceiveOperationCount` )
- Total message count ( `totalMessageCount` )

#### Hazelcast Instance ( `HazelcastInstance` )

- Name ( `name` )
- Version ( `version` )
- Build ( `build` )
- Configuration ( `config` )
- Configuration source ( `configSource` )
- Group name ( `groupName` )
- Network Port ( `port` )
- Cluster-wide Time ( `clusterTime` )
- Size of the cluster ( `memberCount` )
- List of members ( `Members` )
- Running state ( `running` )
- Shutdown the member ( `shutdown()` )
  - Node ( `HazelcastInstance.Node` )
    - \* Address ( `address` )
    - \* Master address ( `masterAddress` )

- **Event Service ( HazelcastInstance.EventService )**
  - Event thread count ( ``eventThreadCount`` )
  - Event queue size ( ``eventQueueSize`` )
  - Event queue capacity ( ``eventQueueCapacity`` )
- **Operation Service ( HazelcastInstance.OperationService )**
  - Response queue size ( ``responseQueueSize`` )
  - Operation executor queue size ( ``operationExecutorQueueSize`` )
  - Running operation count ( ``runningOperationsCount`` )
  - Remote operation count ( ``remoteOperationCount`` )
  - Executed operation count ( ``executedOperationCount`` )
  - Operation thread count ( ``operationThreadCount`` )
- **Proxy Service ( HazelcastInstance.ProxyService )**
  - Proxy count ( ``proxyCount`` )
- **Partition Service ( HazelcastInstance.PartitionService )**
  - Partition count ( ``partitionCount`` )
  - Active partition count ( ``activePartitionCount`` )
  - Cluster Safe State ( ``isClusterSafe`` )
  - LocalMember Safe State ( ``isLocalMemberSafe`` )
- **Connection Manager ( HazelcastInstance.ConnectionManager )**
  - Client connection count ( ``clientConnectionCount`` )
  - Active connection count ( ``activeConnectionCount`` )
  - Connection count ( ``connectionCount`` )
- **Client Engine ( HazelcastInstance.ClientEngine )**
  - Client endpoint count ( ``clientEndpointCount`` )
- **System Executor ( HazelcastInstance.ManagedExecutorService )**
  - Name ( ``name`` )
  - Work queue size ( ``queueSize`` )
  - Thread count of the pool ( ``poolSize`` )
  - Maximum thread count of the pool ( ``maximumPoolSize`` )
  - Remaining capacity of the work queue ( ``remainingQueueCapacity`` )
  - Is shutdown ( ``isShutdown`` )
  - Is terminated ( ``isTerminated`` )
  - Completed task count ( ``completedTaskCount`` )
- **Operation Executor ( HazelcastInstance.ManagedExecutorService )**
  - Name ( ``name`` )
  - Work queue size ( ``queueSize`` )
  - Thread count of the pool ( ``poolSize`` )
  - Maximum thread count of the pool ( ``maximumPoolSize`` )
  - Remaining capacity of the work queue ( ``remainingQueueCapacity`` )

- Is shutdown ( ``isShutdown`` )
  - Is terminated ( ``isTerminated`` )
  - Completed task count ( ``completedTaskCount`` )
- **Async Executor (HazelcastInstance.ManagedExecutorService)**
  - Name ( ``name`` )
  - Work queue size ( ``queueSize`` )
  - Thread count of the pool ( ``poolSize`` )
  - Maximum thread count of the pool ( ``maximumPoolSize`` )
  - Remaining capacity of the work queue ( ``remainingQueueCapacity`` )
  - Is shutdown ( ``isShutdown`` )
  - Is terminated ( ``isTerminated`` )
  - Completed task count ( ``completedTaskCount`` )
- **Scheduled Executor ( HazelcastInstance.ManagedExecutorService )**
  - Name ( ``name`` )
  - Work queue size ( ``queueSize`` )
  - Thread count of the pool ( ``poolSize`` )
  - Maximum thread count of the pool ( ``maximumPoolSize`` )
  - Remaining capacity of the work queue ( ``remainingQueueCapacity`` )
  - Is shutdown ( ``isShutdown`` )
  - Is terminated ( ``isTerminated`` )
  - Completed task count ( ``completedTaskCount`` )
- **Client Executor ( HazelcastInstance.ManagedExecutorService )**
  - Name ( ``name`` )
  - Work queue size ( ``queueSize`` )
  - Thread count of the pool ( ``poolSize`` )
  - Maximum thread count of the pool ( ``maximumPoolSize`` )
  - Remaining capacity of the work queue ( ``remainingQueueCapacity`` )
  - Is shutdown ( ``isShutdown`` )
  - Is terminated ( ``isTerminated`` )
  - Completed task count ( ``completedTaskCount`` )
- **Query Executor ( HazelcastInstance.ManagedExecutorService )**
  - Name ( ``name`` )
  - Work queue size ( ``queueSize`` )
  - Thread count of the pool ( ``poolSize`` )
  - Maximum thread count of the pool ( ``maximumPoolSize`` )
  - Remaining capacity of the work queue ( ``remainingQueueCapacity`` )
  - Is shutdown ( ``isShutdown`` )
  - Is terminated ( ``isTerminated`` )
  - Completed task count ( ``completedTaskCount`` )
- **IO Executor ( HazelcastInstance.ManagedExecutorService )**
  - Name ( ``name`` )

- Work queue size ( ``queueSize`` )
- Thread count of the pool ( ``poolSize`` )
- Maximum thread count of the pool ( ``maximumPoolSize`` )
- Remaining capacity of the work queue ( ``remainingQueueCapacity`` )
- Is shutdown ( ``isShutdown`` )
- Is terminated ( ``isTerminated`` )
- Completed task count ( ``completedTaskCount`` )

## 18.3 Monitoring with JMX

You can monitor your Hazelcast members via the JMX protocol.

- Add the following system properties to enable JMX agent:
  - `-Dcom.sun.management.jmxremote`
  - `-Dcom.sun.management.jmxremote.port=_portNo_` (to specify JMX port) (*optional*)
  - `-Dcom.sun.management.jmxremote.authenticate=false` (to disable JMX auth) (*optional*)
- Enable the Hazelcast property `hazelcast.jmx` (please refer to the [System Properties section](#)):
  - using Hazelcast configuration (API, XML, Spring).
  - or by setting the system property `-Dhazelcast.jmx=true`
- Use `jconsole`, `jvisualvm` (with `mbean` plugin) or another JMX compliant monitoring tool.

## 18.4 Cluster Utilities

This section provides information on programmatic utilities you can use to listen to the cluster events, to check whether the cluster and/or members are safe before shutting down a member, and to define the minimum number of cluster members required for the cluster to remain up and running.

### 18.4.1 Cluster Interface

Hazelcast allows you to register for membership events so you will be notified when members are added or removed. You can also get the set of cluster members.

```
import com.hazelcast.core.*;

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
Cluster cluster = hazelcastInstance.getCluster();
cluster.addMembershipListener(new MembershipListener() {
 public void memberAdded(MembershipEvent membershipEvent) {
 System.out.println("MemberAdded " + membershipEvent);
 }

 public void memberRemoved(MembershipEvent membershipEvent) {
 System.out.println("MemberRemoved " + membershipEvent);
 }
});

Member localMember = cluster.getLocalMember();
System.out.println ("my inetAddress= " + localMember.getInetAddress());
```

```

Set setMembers = cluster.getMembers();
for (Member member : setMembers) {
 System.out.println("isLocalMember " + member.localMember());
 System.out.println("member.inetAddress " + member.getInetAddress());
 System.out.println("member.port " + member.getPort());
}

```

### RELATED INFORMATION

Please refer to the *Membership Listener* section for more information on membership events.

## 18.4.2 Member Attributes

You can define various member attributes on your Hazelcast members. You can use these member attributes to tag your members as your business logic requirements.

In order to define member attribute on a member you can either:

- provide `MemberAttributeConfig` to your `Config` object,
- or provide member attributes at runtime via attribute setter methods on the `Member` interface.

For example, you can tag your members with their CPU characteristics and you can route CPU intensive tasks to those CPU-rich members.

```

MemberAttributeConfig fourCore = new MemberAttributeConfig();
memberAttributeConfig.setIntAttribute("CPU_CORE_COUNT", 4);
MemberAttributeConfig twelveCore = new MemberAttributeConfig();
memberAttributeConfig.setIntAttribute("CPU_CORE_COUNT", 12);
MemberAttributeConfig twentyFourCore = new MemberAttributeConfig();
memberAttributeConfig.setIntAttribute("CPU_CORE_COUNT", 24);

Config member1Config = new Config();
config.setMemberAttributeConfig(fourCore);
Config member2Config = new Config();
config.setMemberAttributeConfig(twelveCore);
Config member3Config = new Config();
config.setMemberAttributeConfig(twentyFourCore);

HazelcastInstance member1 = Hazelcast.newHazelcastInstance(member1Config);
HazelcastInstance member2 = Hazelcast.newHazelcastInstance(member2Config);
HazelcastInstance member3 = Hazelcast.newHazelcastInstance(member3Config);

IExecutorService executorService = member1.getExecutorService("processor");

executorService.execute(new CPUIntensiveTask(), new MemberSelector() {
 @Override
 public boolean select(Member member) {
 int coreCount = (int) member.getIntAttribute("CPU_CORE_COUNT");
 // Task will be executed at either member2 or member3
 if (coreCount > 8) {
 return true;
 }
 return false;
 }
});

```

```
HazelcastInstance member4 = Hazelcast.newHazelcastInstance();
// We can also set member attributes at runtime.
member4.setIntAttribute("CPU_CORE_COUNT", 2);
```

### 18.4.3 Cluster-Member Safety Check

To prevent data loss when shutting down a node, Hazelcast provides a graceful shutdown feature. You perform this by calling the method `HazelcastInstance.shutdown()`. Once this method is called, it checks the following conditions to ensure the node is safe to shutdown.

- There is no active migration.
- At least one backup of partitions are synced with primary ones.

Even if the above conditions are not met, `HazelcastInstance.shutdown()` will force them to be completed. Eventually, when this method returns, it means the node has been brought to a safe state and it can be shut down without any data loss.

What if you want to be sure that your **cluster** is in a safe state? What does it mean that cluster is safe to shutdown without any data loss?

There may be some use cases like rolling upgrades, development/testing or any logic that require a cluster/member to be safe. To provide this, Hazelcast offers the `PartitionService` interface with the methods `isClusterSafe`, `isMemberSafe`, `isLocalMemberSafe` and `forceLocalMemberToBeSafe`. These methods can be deemed as decoupled pieces from the method `Hazelcast.shutdown`.

```
public interface PartitionService {
 ...
 ...
 boolean isClusterSafe();
 boolean isMemberSafe(Member member);
 boolean isLocalMemberSafe();
 boolean forceLocalMemberToBeSafe(long timeout, TimeUnit unit);
}
```

The method `isClusterSafe` checks whether the cluster is in a safe state. It returns `true` if there are no active partition migrations and there are sufficient backups for each partition. Once it returns `true`, the cluster is safe and a node can be shut down without data loss.

The method `isMemberSafe` checks whether a specific node is in a safe state. This check controls if the first backups of partitions of the given node are synced with the primary ones. Once it returns `true`, the given node is safe and it can be shut down without data loss. Similarly, the method `isLocalMemberSafe` does the same check for the local member. The method `forceLocalMemberToBeSafe` forces the owned and backup partitions to be synchronized, making the local member safe.



**NOTE:** These methods are available starting with Hazelcast 3.3.

#### 18.4.3.1 Sample Codes

```
PartitionService partitionService = hazelcastInstance.getPartitionService();
if (partitionService.isClusterSafe()) {
 hazelcastInstance.shutdown(); // or terminate
}
```

OR

```
PartitionService partitionService = hazelcastInstance.getPartitionService();
if (partitionService.isLocalMemberSafe()) {
 hazelcastInstance.shutdown(); // or terminate
}
```

### RELATED INFORMATION

For more code samples please refer to *PartitionService Code Samples*.

## 18.4.4 Cluster Quorum

Hazelcast Cluster Quorum enables you to define the minimum number of machines required in a cluster for the cluster to remain in an operational state. If the number of machines is below the defined minimum at any time, the operations are rejected and the rejected operations return a `QuorumException` to their callers.

When a network partitioning happens, by default Hazelcast chooses to be available. With Cluster Quorum, you can tune your Hazelcast instance towards achieving better consistency by rejecting updates with a minimum threshold. This reduces the chance that the number of concurrent will update to an entry from two partitioned clusters. Note that the consistency defined here is the best effort, not full or strong consistency.

Hazelcast initiates a quorum when a change happens on the member list.



**NOTE:** Currently, cluster quorum only applies to the Map, Transactional Map and Cache, support for other data structures will be added soon. Also, lock methods in the IMap interface do not participate in a quorum.

### 18.4.4.1 Configuration

You can set up Cluster Quorum using either declarative or programmatic configuration.

Assume that you have a 5-node Hazelcast Cluster and you want to set the minimum number of 3 nodes for the cluster to continue operating. The following examples are configurations for this scenario.

#### 18.4.4.1.1 Declarative Configuration

```
<hazelcast>
...
<quorum name="quorumRuleWithThreeNodes" enabled="true">
 <quorum-size>3</quorum-size>
</quorum>

<map name="default">
 <quorum-ref>quorumRuleWithThreeNodes</quorum-ref>
</map>
...
</hazelcast>
```

#### 18.4.4.1.2 Programmatic Configuration

```
QuorumConfig quorumConfig = new QuorumConfig();
quorumConfig.setName("quorumRuleWithThreeNodes");
quorumConfig.setEnabled(true);
quorumConfig.setSize(3);
```

```
MapConfig mapConfig = new MapConfig();
mapConfig.setQuorumName("quorumRuleWithThreeNodes");
```

```
Config config = new Config();
config.addQuorumConfig(quorumConfig);
config.addMapConfig(mapConfig);
```



**NOTE:** Please refer to the [Quorum Configuration section](#) for the full description of quorum configuration.

#### 18.4.4.2 Quorum Listeners

You can register quorum listeners to be notified about quorum results. Quorum listeners are local to the node that they are registered, so they receive only events that occurred on that local node.

Quorum listeners can be configured via declarative or programmatic configuration. The following examples are such configurations.

##### 18.4.4.2.1 Declarative Configuration

```
<hazelcast>
...
<quorum name="quorumRuleWithThreeNodes" enabled="true">
 <quorum-size>3</quorum-size>
 <quorum-listeners>
 <quorum-listener>com.company.quorum.ThreeNodeQuorumListener</quorum-listener>
 </quorum-listeners>
</quorum>

<map name="default">
 <quorum-ref>quorumRuleWithThreeNodes</quorum-ref>
</map>
...
</hazelcast>
```

##### 18.4.4.2.2 Programmatic Configuration

```
QuorumListenerConfig listenerConfig = new QuorumListenerConfig();
// You can either directly set quorum listener implementation of your own
listenerConfig.setImplementation(new QuorumListener() {
 @Override
 public void onChange(QuorumEvent quorumEvent) {
 if (QuorumResult.PRESENT.equals(quorumEvent.getType())) {
 // handle quorum presence
 } else if (QuorumResult.ABSENT.equals(quorumEvent.getType())) {
 // handle quorum absence
 }
 }
});
// Or you can give the name of the class that implements QuorumListener interface.
listenerConfig.setClassName("com.company.quorum.ThreeNodeQuorumListener");

QuorumConfig quorumConfig = new QuorumConfig();
quorumConfig.setName("quorumRuleWithThreeNodes");
quorumConfig.setEnabled(true);
quorumConfig.setSize(3);
quorumConfig.addListenerConfig(listenerConfig);
```



```

MapConfig mapConfig = new MapConfig();
mapConfig.setQuorumName("quorumRuleWithThreeNodes");

Config config = new Config();
config.addQuorumConfig(quorumConfig);
config.addMapConfig(mapConfig);

```

#### 18.4.4.3 Quorum Service

Quorum service gives you the ability to query quorum results over the `Quorum` instances.

##### 18.4.4.3.1 Quorum

Quorum instances lets you query the quorum result of a particular quorum.

Here is a `Quorum` interface that you can interact with.

```

/**
 * {@link Quorum} provides access to the current status of a quorum.
 */
public interface Quorum {
 /**
 * Returns true if quorum is present, false if absent.
 *
 * @return boolean presence of the quorum
 */
 boolean isPresent();
}

```

You can retrieve the quorum instance for a particular quorum over the quorum service, as in the following example.

```

String quorumName = "at-least-one-storage-member";
QuorumConfig quorumConfig = new QuorumConfig();
quorumConfig.setName(quorumName);
quorumConfig.setEnabled(true);

MapConfig mapConfig = new MapConfig();
mapConfig.setQuorumName(quorumName);

Config config = new Config();
config.addQuorumConfig(quorumConfig);
config.addMapConfig(mapConfig);

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance(config);
QuorumService quorumService = hazelcastInstance.getQuorumService();
Quorum quorum = quorumService.getQuorum(quorumName);

boolean quorumPresence = quorum.isPresent();

```

## 18.5 Management Center

Hazelcast Management Center enables you to monitor and manage your nodes running Hazelcast. In addition to monitoring overall state of your clusters, you can also analyze and browse your data structures in detail, update map configurations and take thread dump from nodes. With its scripting and console module, you can run scripts (JavaScript, Groovy, etc.) and commands on your nodes.

### 18.5.1 Installation

You have two options for installing Hazelcast Management Center. You can either deploy the `mancenter-version.war` application into your Java application server/container or you can start Hazelcast Management Center from the command line and then have the Hazelcast nodes communicate with that web application. This means that your Hazelcast nodes should know the URL of the `mancenter` application before they start.

Here are the steps:

- Download the latest Hazelcast ZIP from [hazelcast.org](http://hazelcast.org). The ZIP contains the `mancenter-version.war` file.
- You can directly start `mancenter-version.war` file from the command line. The following command will start Hazelcast Management Center on port 8080 with context root ‘mancenter’ (<http://localhost:8080/mancenter>).

```
java -jar mancenter-*version*.war 8080 mancenter
```

- Or, you can deploy it to your web server (Tomcat, Jetty, etc.). Let us say it is running at <http://localhost:8080/mancenter>.
- After you perform the above steps, make sure that <http://localhost:8080/mancenter> is up.
- Configure your Hazelcast nodes by adding the URL of your web application to your `hazelcast.xml`. Hazelcast nodes will send their states to this URL.

```
<management-center enabled="true">
 http://localhost:8080/mancenter
</management-center>
```

- Start your Hazelcast cluster.
- Browse to <http://localhost:8080/mancenter> and login. **Initial login username/password is admin/admin**

The Management Center creates a folder with the name “mancenter” under your “user/home” folder to save data files. You can change the data folder by setting the `hazelcast.mancenter.home` system property.

#### RELATED INFORMATION

Please refer to the [Management Center Configuration section](#) for a full description of Hazelcast Management Center configuration.

### 18.5.2 Tool Overview

Once the page is loaded after selecting a cluster, the tool’s home page appears as shown below.

This page provides the fundamental properties of the selected cluster which are explained in the [Home Page](#) section. The page has a toolbar on the top and a menu on the left.

#### 18.5.2.1 Toolbar

The toolbar has the following buttons:

- **Home:** Loads the home page shown above. Please see the [Home Page section](#).
- **Scripting:** Loads the page used to write and execute user’s own scripts on the cluster. Please see the [Scripting section](#).
- **Console:** Loads the page used to execute commands on the cluster. Please see the [Console section](#).
- **Alerts:** Creates alerts by specifying filters. Please see the [Alerts section](#).

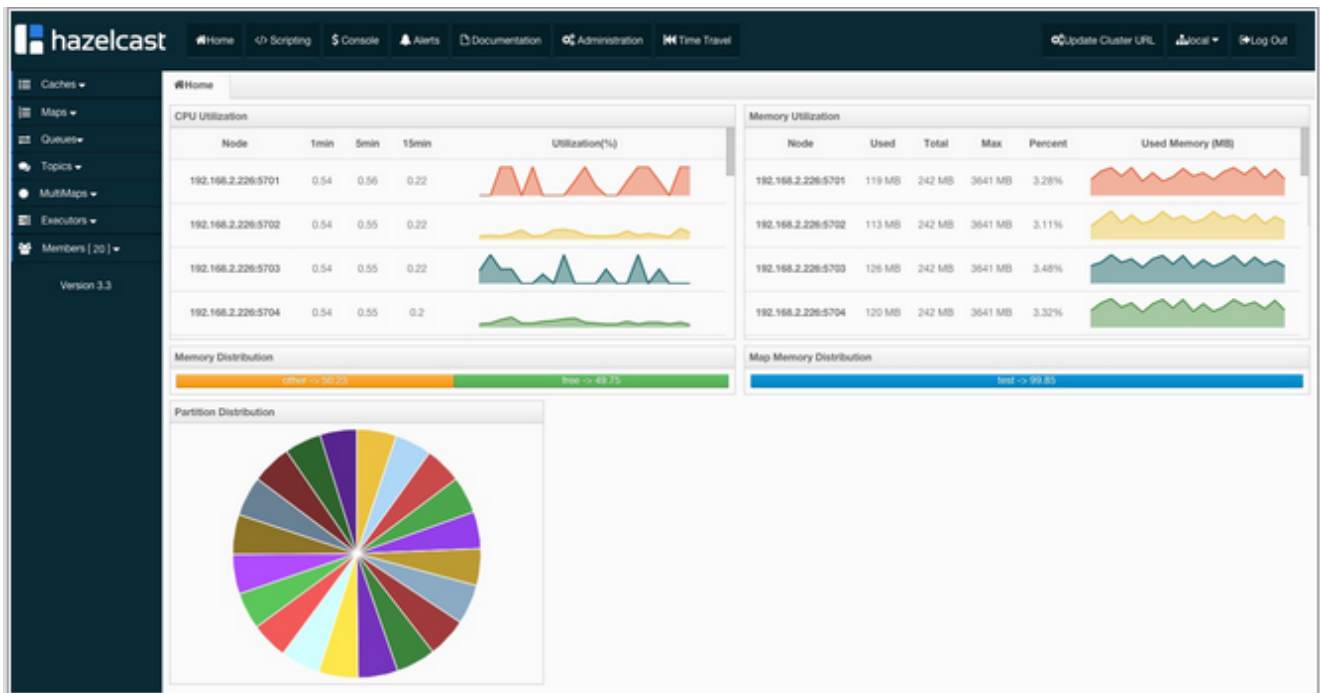


Figure 18.1:

- **Documentation:** Opens the Management Center documentation in a window inside the tool. Please see the [Documentation section](#).
- **Administration:** Used by the admin users to manage users in the system. Please see the [Administration section](#).
- **Time Travel:** Sees the cluster's situation at a time in the past. Please see the [Time Travel section](#).
- **Cluster Selector:** Switches between clusters. When the mouse is moved onto this item, a drop down list of clusters appears.

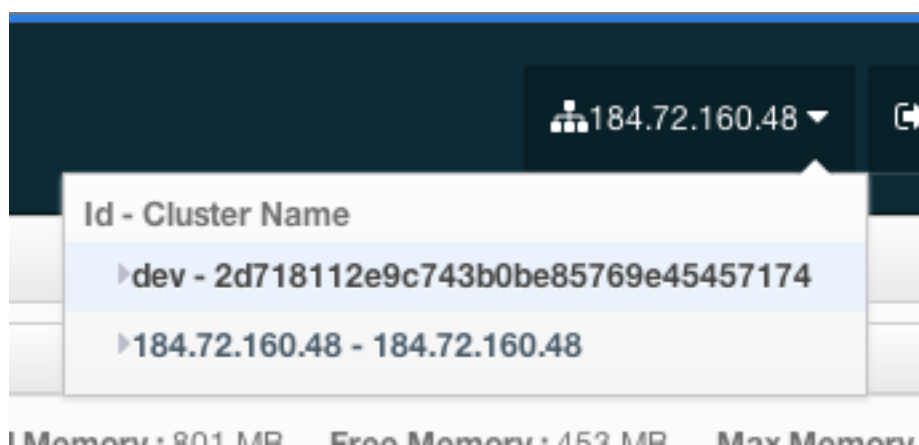


Figure 18.2:

The user can select any cluster and once selected, the page immediately loads with the selected cluster's information.

- **Logout:** Closes the current user's session.



**NOTE:** Some of the above listed toolbar items are not visible to users who are not admin or who have **read-only** permission. Also, some of the operations explained in the later sections cannot be performed by users with read-only permission. Please see the [Administration section](#) for details.

#### 18.5.2.2 Menu

The Home page includes a menu on the left which lists the distributed data structures in the cluster and all the cluster members (nodes), as shown below.

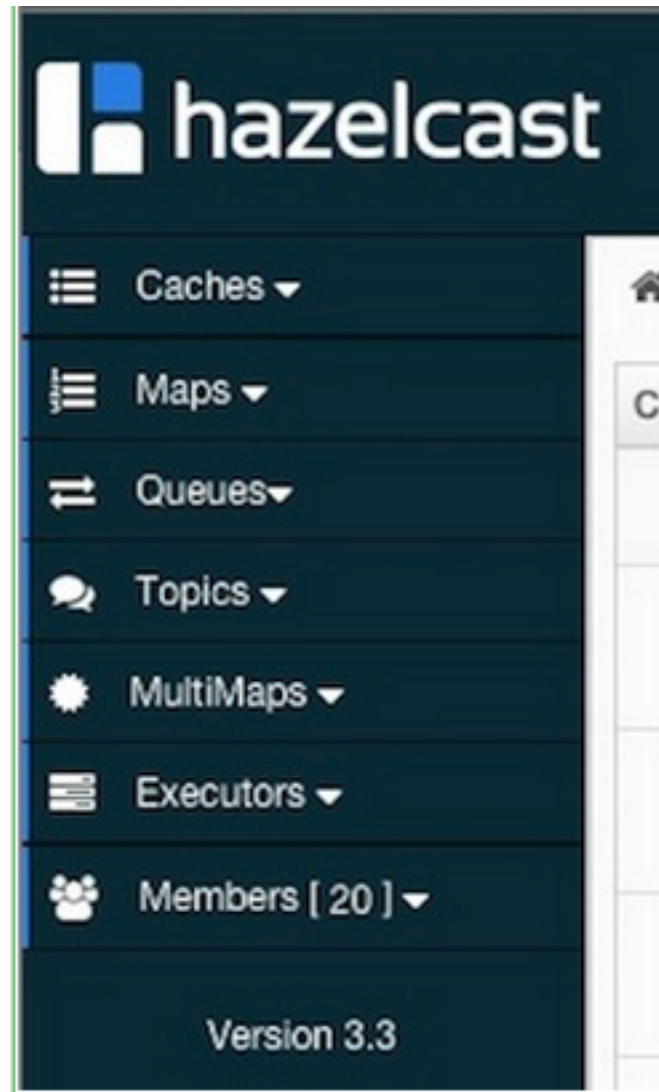


Figure 18.3:



**NOTE:** Distributed data structures will be shown there when the proxies are created for them.

You can expand and collapse menu items by clicking on them. Below is the list of menu items with links to their explanations.

- [Caches](#)
- [Maps](#)
- [Queues](#)
- [Topics](#)

- MultiMaps
- **Executors**
- **Members**

### 18.5.2.3 Tabbed View

Each time you select an item from the toolbar or menu, the item is added to the main view as a tab, as shown below.

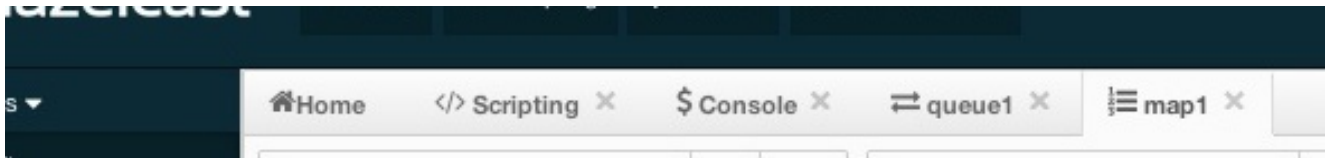


Figure 18.4:

In the above example, *Home*, *Scripting*, *Console*, *queue1* and *map1* windows can be seen as tabs. Windows can be closed using the icon on each tab (except the Home Page; it cannot be closed).

## 18.5.3 Home Page

This is the first page appearing after logging in. It gives an overview of the connected cluster. The following subsections describe each portion of the page.

### 18.5.3.1 CPU Utilization

This part of the page provides load and utilization information for the CPUs for each node, as shown below.

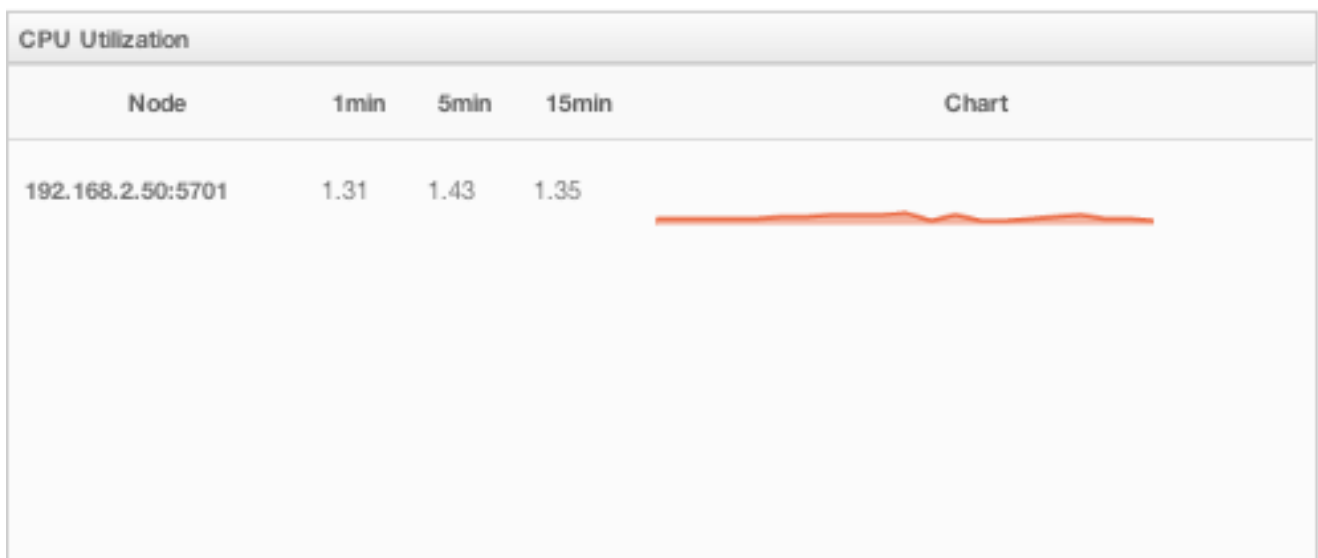


Figure 18.5:

The first column lists the nodes with their IPs and ports. The next columns list the loads on each CPU for the last 1, 5 and 15 minutes. The last column (**Chart**) graphically shows the utilization of CPUs. When you move the mouse cursor on a desired graph, you can see the CPU utilization at the time where the cursor is placed. Graphs under this column shows the CPU utilizations approximately for the last 2 minutes.

### 18.5.3.2 Memory Utilization

This part of the page provides information related to memory usages for each node, as shown below.

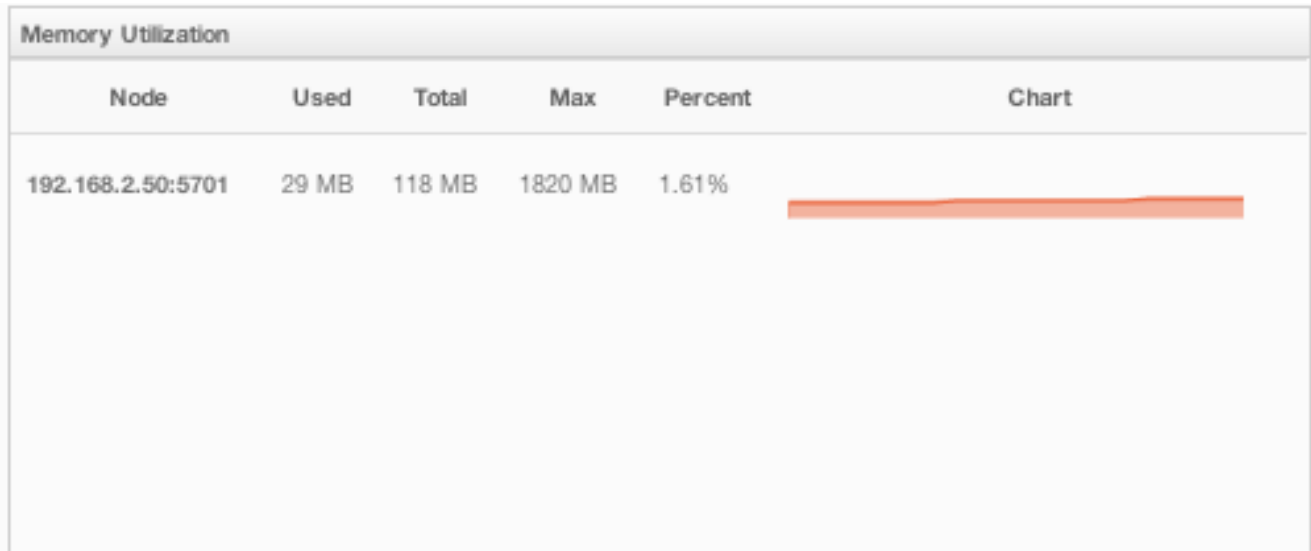


Figure 18.6:

The first column lists the nodes with their IPs and ports. The next columns show the used and free memories out of the total memory reserved for Hazelcast usage, in real-time. The **Max** column lists the maximum memory capacity of each node and the **Percent** column lists the percentage value of used memory out of the maximum memory. The last column (**Chart**) shows the memory usage of nodes graphically. When you move the mouse cursor on a desired graph, you can see the memory usage at the time where the cursor is placed. Graphs under this column shows the memory usages approximately for the last 2 minutes.

### 18.5.3.3 Memory Distribution

This part of the page graphically provides the cluster wise breakdown of memory, as shown below. The blue area is the memory used by maps, the dark yellow area is the memory used by non-Hazelcast entities, and the green area is the free memory out of the whole cluster's memory capacity.



Figure 18.7:

In the above example, you can see 0.32% of the total memory is used by Hazelcast maps (it can be seen by placing the mouse cursor on it), 58.75% is used by non-Hazelcast entities and 40.85% of the total memory is free.

### 18.5.3.4 Map Memory Distribution

This part is the breakdown of the blue area shown in the **Memory Distribution** graph explained above. It provides the percentage values of the memories used by each map, out of the total cluster memory reserved for all Hazelcast maps.

In the above example, you can see 49.55% of the total map memory is used by **map1** and 49.55% is used by **map2**.



Figure 18.8:

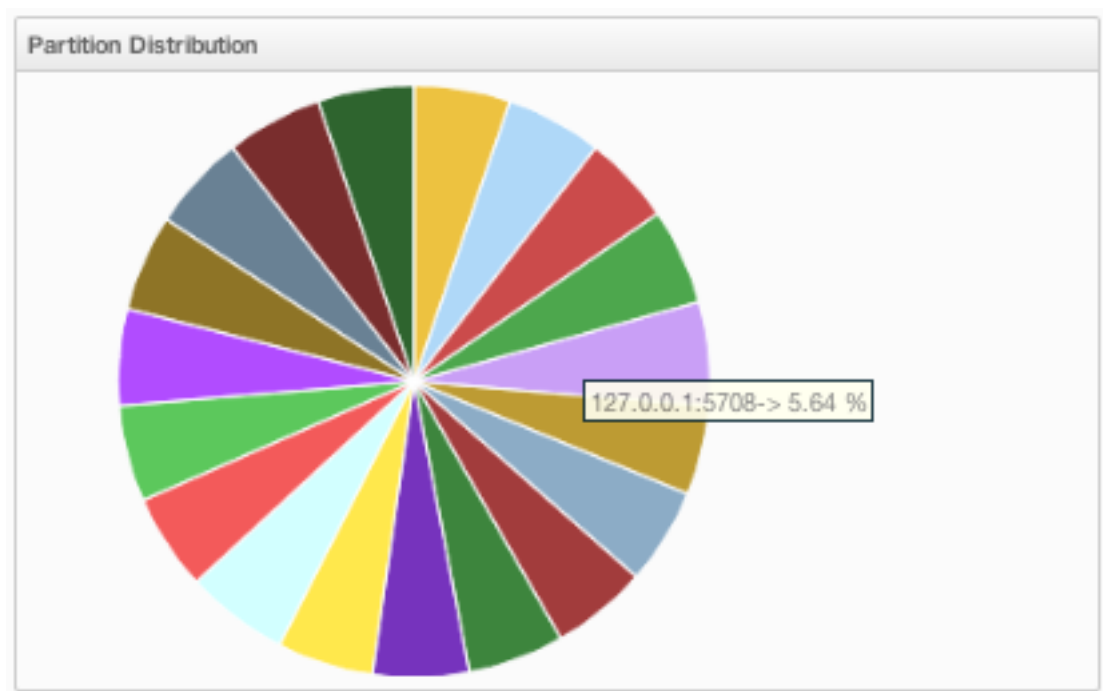


Figure 18.9:

### 18.5.3.5 Partition Distribution

This pie chart shows what percentage of partitions each node has, as shown below.

You can see each node's partition percentages by placing the mouse cursor on the chart. In the above example, you can see the node "127.0.0.1:5708" has 5.64% of the total partition count (which is 271 by default and configurable, please see the `hazelcast.partition.count` property explained in the [System Properties section](#)).

## 18.5.4 Caches

You can monitor your caches' metrics by clicking the cache name listed on the left panel under **Caches** menu item. A new tab for monitoring that cache instance is opened on the right, as shown below.

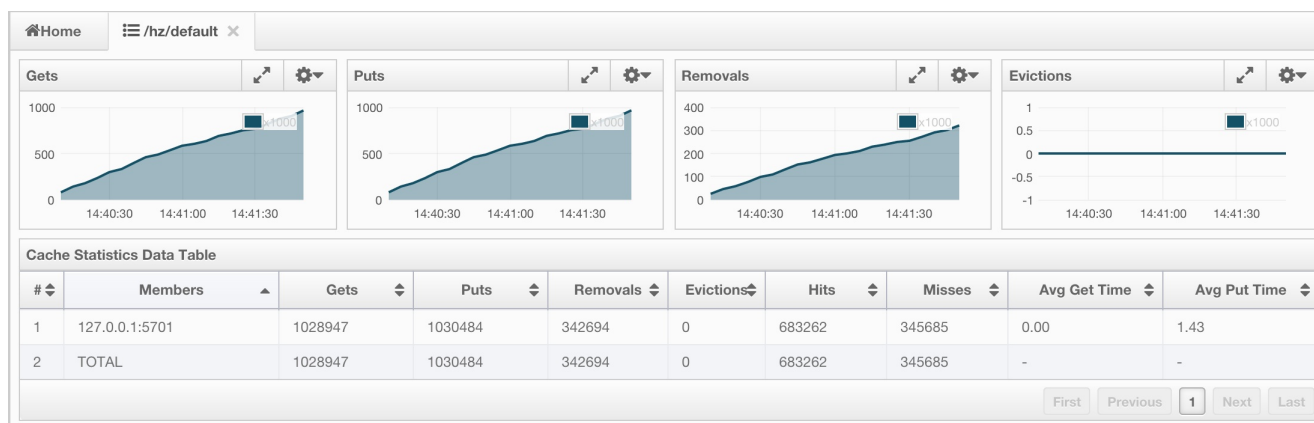


Figure 18.10:

On top of the page, four charts monitor the **Gets**, **Puts**, **Removals** and **Evictions** in real-time. The X-axis of all the charts show the current system time. To open a chart as a separate dialog, click on the button placed at the top right of each chart.

Under these charts is the Cache Statistics Data Table. From left to right, this table lists the IP addresses and ports of each node, get, put, removal, eviction, hit and miss count per second in real-time.

You can navigate through the pages using the buttons at the bottom right of the table (**First**, **Previous**, **Next**, **Last**). You can ascend or descend the order of the listings in each column by clicking on column headings.

## 18.5.5 Maps

Map instances are listed under the **Maps** menu item on the left. When you click on a map, a new tab for monitoring that map instance opens on the right, as shown below. In this tab, you can monitor metrics and also re-configure the selected map.

The below subsections explain the portions of this window.

### 18.5.5.1 Map Browser

Map Browser is a tool you can use to retrieve properties of the entries stored in the selected map. To open it, click on the **Map Browser** button, located at the top right of the window. Once opened, the tool appears as a dialog, as shown below.

Once the key and key's type is specified and the **Browse** button is clicked, the key's properties along with its value are listed.



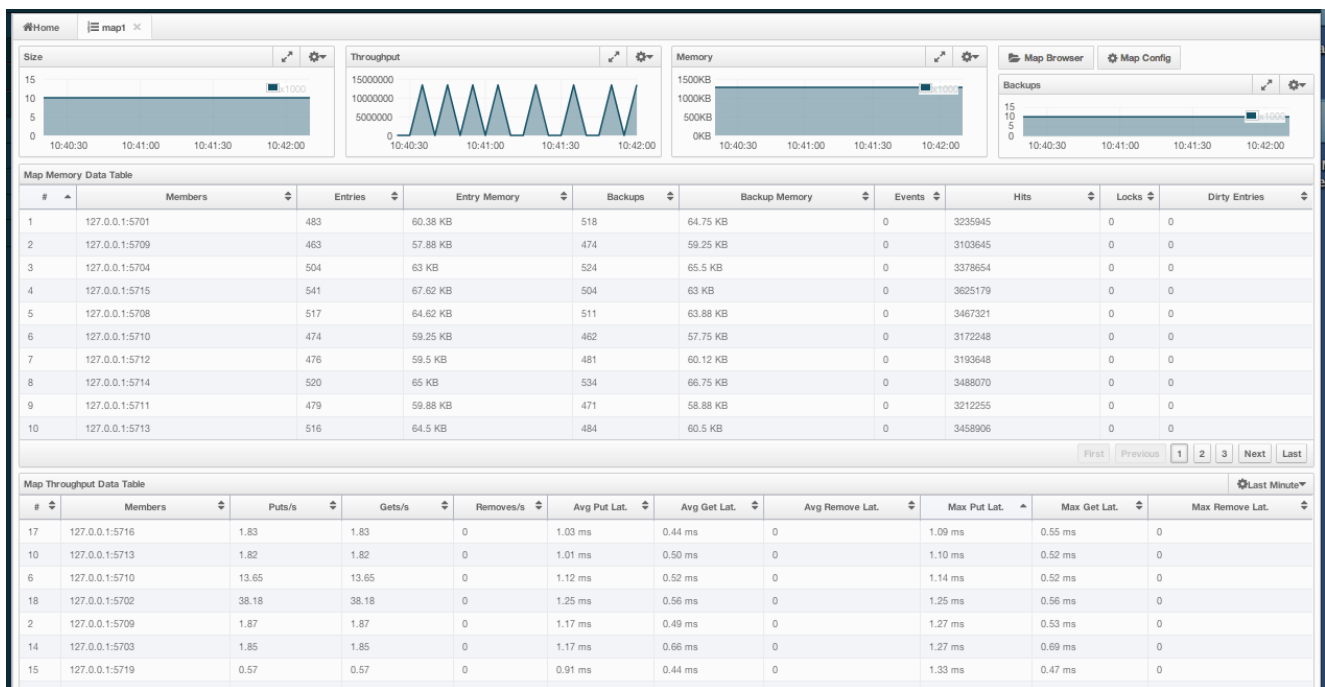


Figure 18.11:


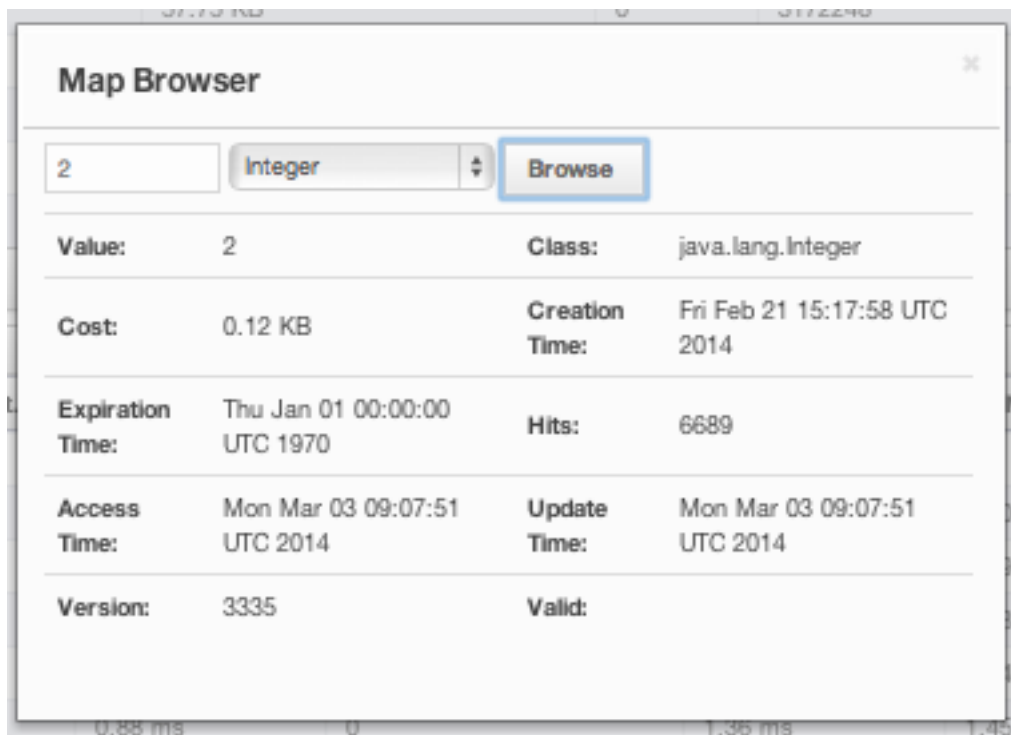


Figure 18.12:

### 18.5.5.2 Map Config

By using the Map Config tool, you can set selected map's attributes like the backup count, TTL, and eviction policy. To open it, click on the **Map Config** button, located at the top right of the window. Once opened, the tool appears as a dialog, as shown below.

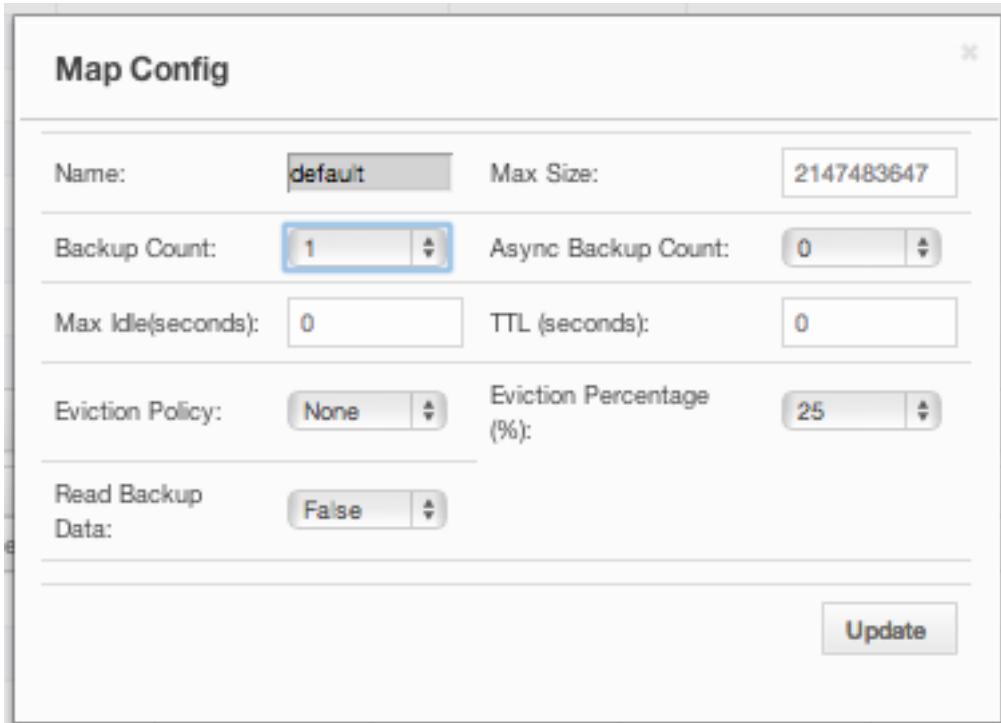

The **Map Config** dialog box contains the following settings:

Name:	default	Max Size:	2147483647
Backup Count:	1	Async Backup Count:	0
Max Idle(seconds):	0	TTL (seconds):	0
Eviction Policy:	None	Eviction Percentage (%):	25
Read Backup Data:	False		


An **Update** button is located at the bottom right of the dialog.


Figure 18.13:

Change any attribute as required and click the **Update** button to save changes.

### 18.5.5.3 Map Monitoring

Besides Map Browser and Map Config tools, this page has monitoring options explained below. All of these options perform real-time monitoring.

On top of the page, small charts monitor the size, throughput, memory usage, backup size, etc. of the selected map in real-time. The X-axis of all the charts show the current system time. You can select other small monitoring charts using the  button at the top right of each chart. When you click the button, the monitoring options are listed, as shown below.

When you click on a desired monitoring, the chart is loaded with the selected option. To open a chart as a separate dialog, click on the  button placed at the top right of each chart. The monitoring charts below are available:

- **Size:** Monitors the size of the map. Y-axis is the entry count (should be multiplied by 1000).
- **Throughput:** Monitors get, put and remove operations performed on the map. Y-axis is the operation count.
- **Memory:** Monitors the memory usage on the map. Y-axis is the memory count.
- **Backups:** Chart loaded when “Backup Size” is selected. Monitors the size of the backups in the map. Y-axis is the backup entry count (should be multiplied by 1000).
- **Backup Memory:** Chart loaded when “Backup Mem.” is selected. Monitors the memory usage of the backups. Y-axis is the memory count.
- **Hits:** Monitors the hit count of the map.
- **Puts/s, Gets/s, Removes/s:** These three charts monitor the put, get and remove operations (per second) performed on the selected map.

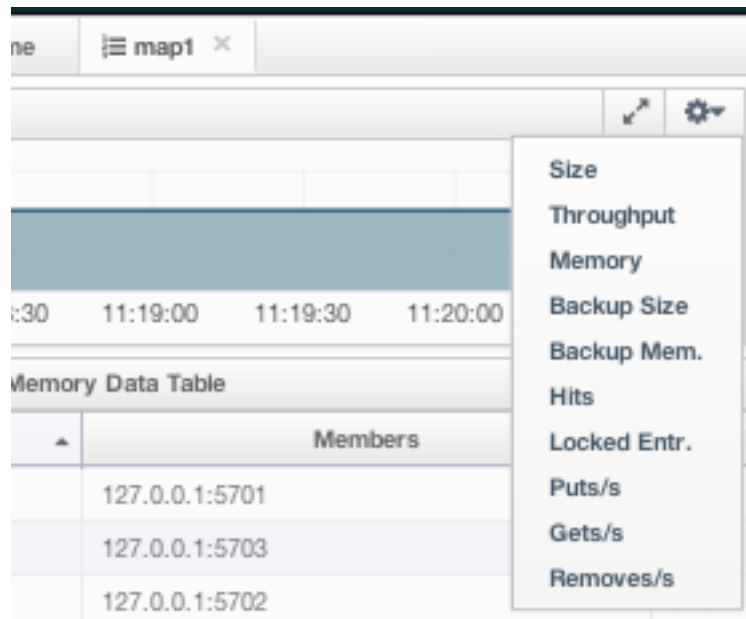


Figure 18.14:

Under these charts are **Map Memory** and **Map Throughput** data tables. The Map Memory data table provides memory metrics distributed over nodes, as shown below.

Map Memory Data Table									
# ▲	Members	Entries	Entry Memory	Backups	Backup Memory	Event	Hits	Lock	Dirty Entries
1	127.0.0.1:5701	515	64.38 KB	519	64.88 KB	0	73765	0	0
2	127.0.0.1:5703	498	62.25 KB	488	61 KB	0	71604	0	0
3	127.0.0.1:5702	525	65.62 KB	539	67.38 KB	0	75729	0	0
4	127.0.0.1:5708	542	67.75 KB	540	67.5 KB	0	77484	0	0
5	127.0.0.1:5707	489	61.12 KB	459	57.38 KB	0	70175	0	0
6	127.0.0.1:5706	494	61.75 KB	490	61.25 KB	0	71020	0	0
7	127.0.0.1:5709	486	60.75 KB	496	62 KB	0	70392	0	0
8	127.0.0.1:5704	516	64.5 KB	501	62.62 KB	0	74064	0	0
9	127.0.0.1:5713	511	63.88 KB	497	62.12 KB	0	73329	0	0
10	127.0.0.1:5716	468	58.5 KB	493	61.62 KB	0	67414	0	0

Figure 18.15:

From left to right, this table lists the IP address and port, entry counts, memory used by entries, backup entry counts, memory used by backup entries, events, hits, locks and dirty entries (in the cases where *MapStore* is enabled, these are the entries that are put to/removed from the map but not written to/removed from a database yet) of each node in the map. You can navigate through the pages using the buttons at the bottom right of the table (**First**, **Previous**, **Next**, **Last**). You can ascend or descend the order of the listings by clicking on the column headings.

Map Throughput data table provides information about the operations (get, put, remove) performed on each node in the map, as shown below.

From left to right, this table lists the IP address and port of each node, the put, get and remove operations on each node, the average put, get, remove latencies, and the maximum put, get, remove latencies on each node.

You can select the period in the combo box placed at the top right corner of the window, for which the table data will be shown. Available values are **Since Beginning**, **Last Minute**, **Last 10 Minutes** and **Last 1 Hour**.

You can navigate through the pages using the buttons placed at the bottom right of the table (**First**, **Previous**, **Next**, **Last**). To ascend or descent the order of the listings, click on the column headings.


Map Throughput Data Table										Last 10 Minute▼
#	Members	Puts/s	Gets/s	Removes/s	Avg Put Lat.	Avg Get Lat.	Avg Remove Lat.	Max Put Lat.	Max Get Lat.	Max Remove Lat.
8	127.0.0.1:5704	2.30	2.30	0	2.03 ms	0.69 ms	0	2.10 ms	0.85 ms	0
17	127.0.0.1:5714	2.30	2.30	0	2.01 ms	0.62 ms	0	3.49 ms	1.36 ms	0
7	127.0.0.1:5709	2.30	2.30	0	1.99 ms	0.66 ms	0	2.33 ms	0.82 ms	0
9	127.0.0.1:5713	2.27	2.27	0	1.97 ms	0.61 ms	0	2.01 ms	0.64 ms	0
13	127.0.0.1:5711	2.30	2.30	0	1.90 ms	0.65 ms	0	2.47 ms	0.93 ms	0
1	127.0.0.1:5701	2.27	2.27	0	1.87 ms	0.86 ms	0	2.24 ms	1.20 ms	0
18	127.0.0.1:5718	2.28	2.28	0	1.84 ms	0.60 ms	0	3.24 ms	0.67 ms	0
20	127.0.0.1:5720	2.30	2.30	0	1.80 ms	0.62 ms	0	1.88 ms	0.66 ms	0
5	127.0.0.1:5707	2.27	2.27	0	1.79 ms	0.63 ms	0	2.48 ms	0.79 ms	0
6	127.0.0.1:5706	2.30	2.30	0	1.78 ms	0.62 ms	0	3.91 ms	1.00 ms	0

First Previous 1 2 Next Last

Figure 18.16:

### 18.5.6 Queues

Using the menu item **Queues**, you can monitor your queues data structure. When you expand this menu item and click on a queue, a new tab for monitoring that queue instance is opened on the right, as shown below.

On top of the page, small charts monitor the size, offers and polls of the selected queue in real-time. The X-axis of all the charts shows the current system time. To open a chart as a separate dialog, click on the  button placed at the top right of each chart. The monitoring charts below are available:

- **Size:** Monitors the size of the queue. Y-axis is the entry count (should be multiplied by 1000).
- **Offers:** Monitors the offers sent to the selected queue. Y-axis is the offer count.
- **Polls:** Monitors the polls sent to the selected queue. Y-axis is the poll count.

Under these charts are **Queue Statistics** and **Queue Operation Statistics** tables. The Queue Statistics table provides item and backup item counts in the queue and age statistics of items and backup items at each node, as shown below.

From left to right, this table lists the IP address and port, items and backup items on the queue of each node, and maximum, minimum and average age of items in the queue. You can navigate through the pages using the buttons placed at the bottom right of the table (**First**, **Previous**, **Next**, **Last**). The order of the listings in each column can be ascended or descended by clicking on column headings.

Queue Operations Statistics table provides information about the operations (offers, polls, events) performed on the queues, as shown below.


From left to right, this table lists the IP address and port of each node, and counts of offers, rejected offers, polls, poll misses and events.

You can select the period in the combo box placed at the top right corner of the window to show the table data. Available values are **Since Beginning**, **Last Minute**, **Last 10 Minutes** and **Last 1 Hour**.

You can navigate through the pages using the buttons placed at the bottom right of the table (**First**, **Previous**, **Next**, **Last**). Click on the column headings to ascend or descend the order of the listings.

### 18.5.7 Topics

To monitor your topics' metrics, click the topic name listed on the left panel under the **Topics** menu item. A new tab for monitoring that topic instance opens on the right, as shown below.

On top of the page, two charts monitor the **Publishes** and **Receives** in real-time. They show the published and received message counts of the cluster, nodes of which are subscribed to the selected topic. The X-axis of both charts show the current system time. To open a chart as a separate dialog, click on the  button placed at the top right of each chart.

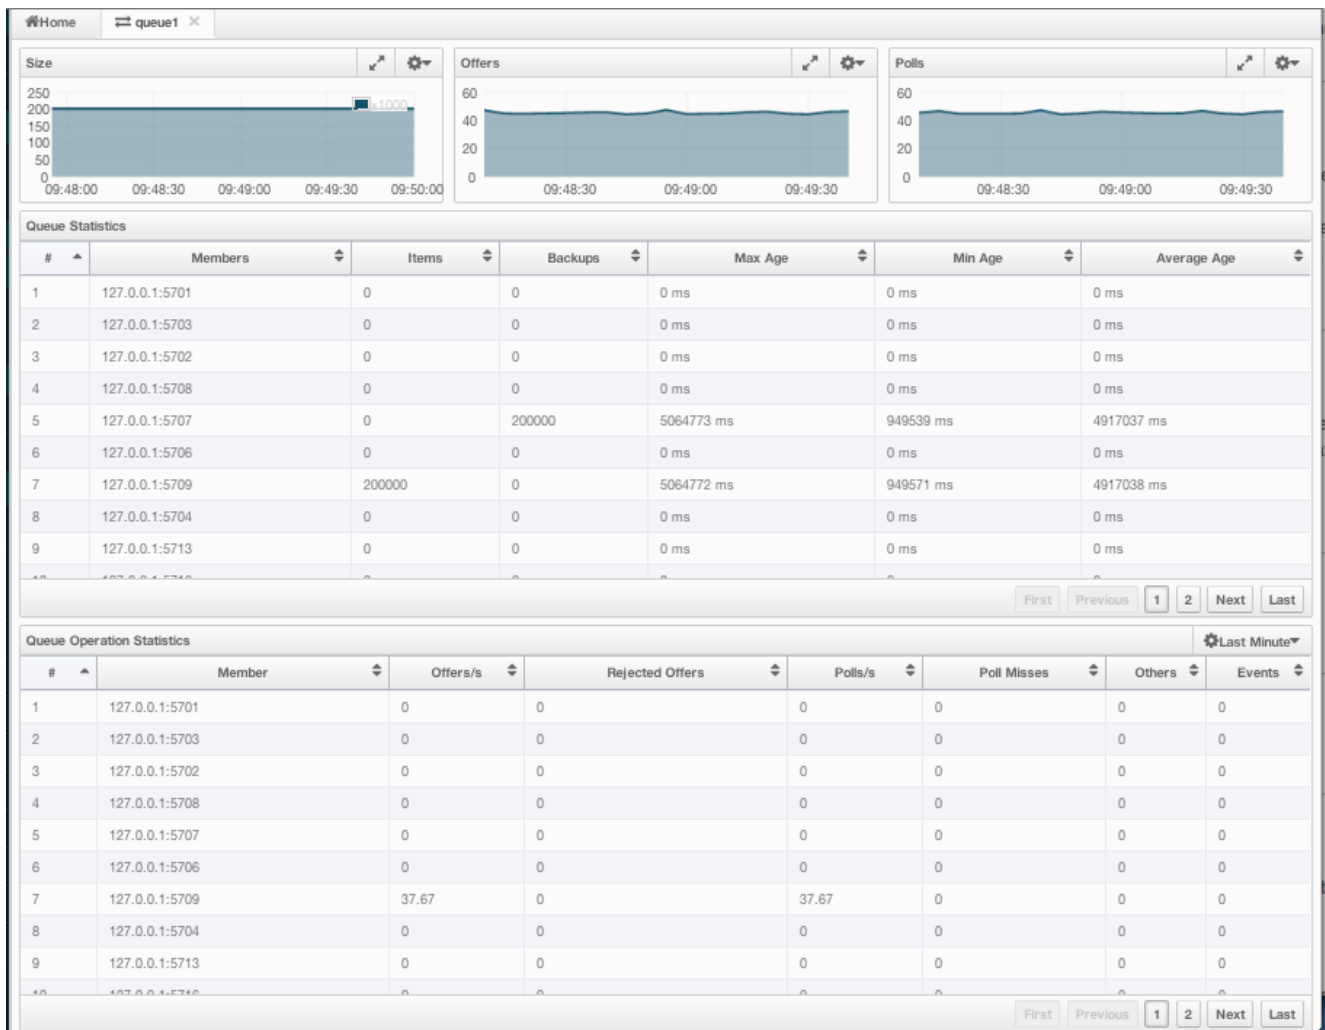


Figure 18.17:

#	Members	Items	Backups	Max Age	Min Age	Average Age
1	127.0.0.1:5701	0	0	0 ms	0 ms	0 ms
2	127.0.0.1:5703	0	0	0 ms	0 ms	0 ms
3	127.0.0.1:5702	0	0	0 ms	0 ms	0 ms
4	127.0.0.1:5708	0	0	0 ms	0 ms	0 ms
5	127.0.0.1:5707	0	200000	5064773 ms	949539 ms	4917037 ms
6	127.0.0.1:5706	0	0	0 ms	0 ms	0 ms
7	127.0.0.1:5709	200000	0	5064772 ms	949571 ms	4917038 ms
8	127.0.0.1:5704	0	0	0 ms	0 ms	0 ms
9	127.0.0.1:5713	0	0	0 ms	0 ms	0 ms
10	127.0.0.1:5716	0	0	0 ms	0 ms	0 ms

Figure 18.18:

Queue Operation Statistics							⚙️ Last Minute▼
# ▲	Member	Offers/s	Rejected Offers	Polls/s	Poll Misses	Others	Events
1	127.0.0.1:5701	0	0	0	0	0	0
2	127.0.0.1:5703	0	0	0	0	0	0
3	127.0.0.1:5702	0	0	0	0	0	0
4	127.0.0.1:5708	0	0	0	0	0	0
5	127.0.0.1:5707	0	0	0	0	0	0
6	127.0.0.1:5706	0	0	0	0	0	0
7	127.0.0.1:5709	37.67	0	37.67	0	0	0
8	127.0.0.1:5704	0	0	0	0	0	0
9	127.0.0.1:5713	0	0	0	0	0	0
10	127.0.0.1:5716	0	0	0	0	0	0

FirstPrevious12NextLast

Figure 18.19:

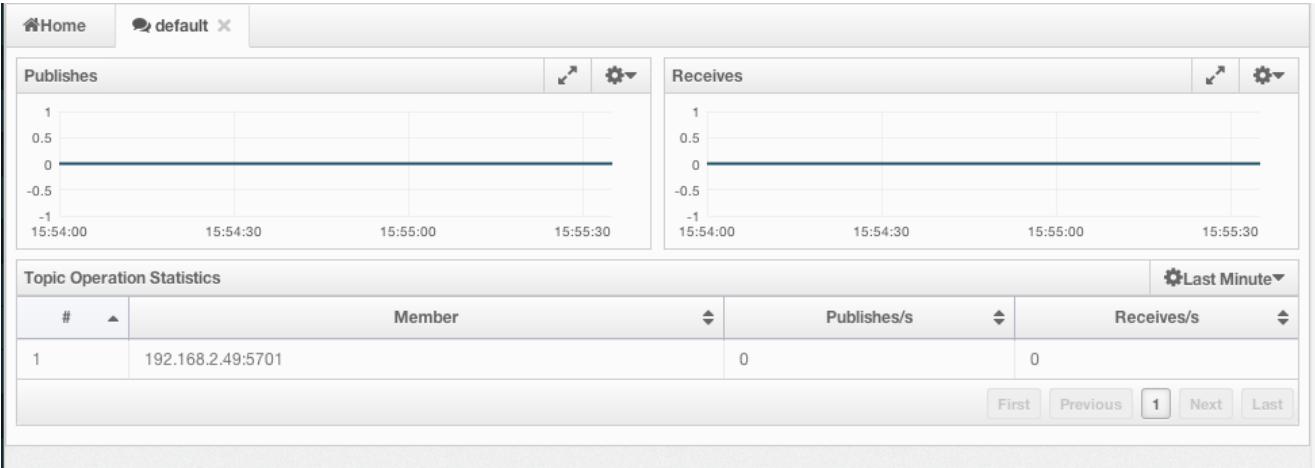


Figure 18.20:

Under these charts is the Topic Operation Statistics table. From left to right, this table lists the IP addresses and ports of each node, and counts of message published and receives per second in real-time. You can select the period in the combo box placed at top right corner of the table to show the table data. The available values are **Since Beginning**, **Last Minute**, **Last 10 Minutes** and **Last 1 Hour**.

You can navigate through the pages using the buttons placed at the bottom right of the table (**First**, **Previous**, **Next**, **Last**). Click on the column heading to ascend or descend the order of the listings.

### 18.5.8 MultiMaps

MultiMap is a specialized map where you can associate a key with multiple values. This monitoring option is similar to the **Maps** option: the same monitoring charts and data tables monitor MultiMaps. The differences are that you cannot browse the MultiMaps and re-configure it. Please see the [Maps section](#).

### 18.5.9 Executors

Executor instances are listed under the **Executors** menu item on the left. When you click on a executor, a new tab for monitoring that executor instance opens on the right, as shown below.

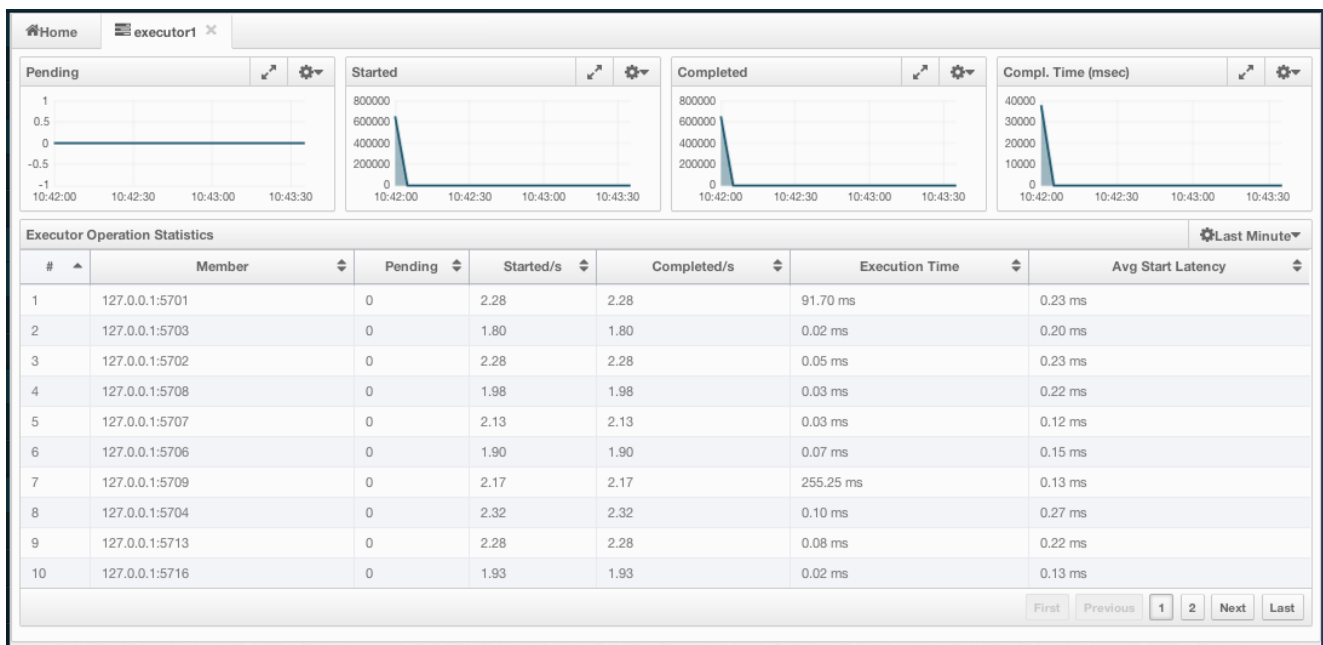


Figure 18.21:

On top of the page, small charts monitor the pending, started, completed, etc. executors in real-time. The X-axis of all the charts shows the current system time. You can select other small monitoring charts using the button placed at the top right of each chart. When it is clicked, the monitoring options are listed, as shown below.

When you click on a desired monitoring, the chart loads with the selected option. To open a chart as a separate dialog, click on the button placed at top right of each chart. The below monitoring charts are available:

- **Pending:** Monitors the pending executors. Y-axis is the executor count.
- **Started:** Monitors the started executors. Y-axis is the executor count.
- **Start Lat. (msec):** Shows the latency when executors are started. Y-axis is the duration in milliseconds.
- **Completed:** Monitors the completed executors. Y-axis is the executor count.
- **Comp. Time (msec):** Shows the completion period of executors. Y-axis is the duration in milliseconds.

Under these charts is the **Executor Operation Statistics** table, as shown below.

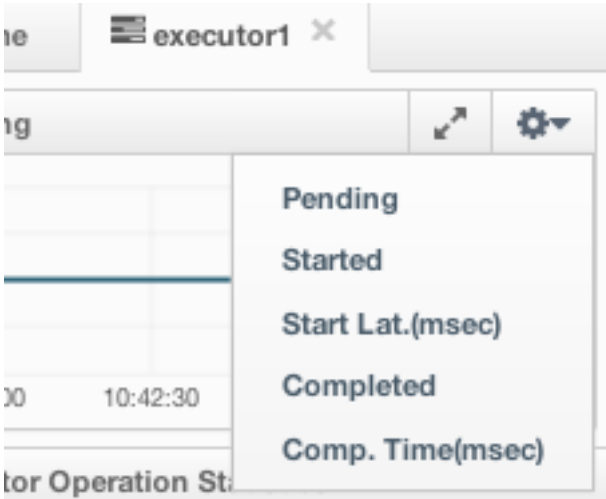


Figure 18.22:

Executor Operation Statistics							⚙️ Last Minute ▾
# ▲	Member ⇅	Pending ⇅	Started/s ⇅	Completed/s ⇅	Execution Time ⇅	Avg Start Latency ⇅	
1	127.0.0.1:5701	0	2.28	2.28	91.70 ms	0.23 ms	
2	127.0.0.1:5703	0	1.80	1.80	0.02 ms	0.20 ms	
3	127.0.0.1:5702	0	2.28	2.28	0.05 ms	0.23 ms	
4	127.0.0.1:5708	0	1.98	1.98	0.03 ms	0.22 ms	
5	127.0.0.1:5707	0	2.13	2.13	0.03 ms	0.12 ms	
6	127.0.0.1:5706	0	1.90	1.90	0.07 ms	0.15 ms	
7	127.0.0.1:5709	0	2.17	2.17	255.25 ms	0.13 ms	
8	127.0.0.1:5704	0	2.32	2.32	0.10 ms	0.27 ms	
9	127.0.0.1:5713	0	2.28	2.28	0.08 ms	0.22 ms	
10	127.0.0.1:5716	0	1.93	1.93	0.02 ms	0.13 ms	
							First Previous 1 2 Next Last

Figure 18.23:



From left to right, this table lists the IP address and port of nodes, the counts of pending, started and completed executors per second, and the execution time and average start latency of executors on each node. You can navigate through the pages using the buttons placed at the bottom right of the table (**First**, **Previous**, **Next**, **Last**). Click on the column heading to ascend or descend the order of the listings.

### 18.5.10 Members

Use this menu item to monitor each cluster member (node) and perform operations like running garbage collection (GC) and taking a thread dump. Once you select a member from the menu, a new tab for monitoring that member opens on the right, as shown below.

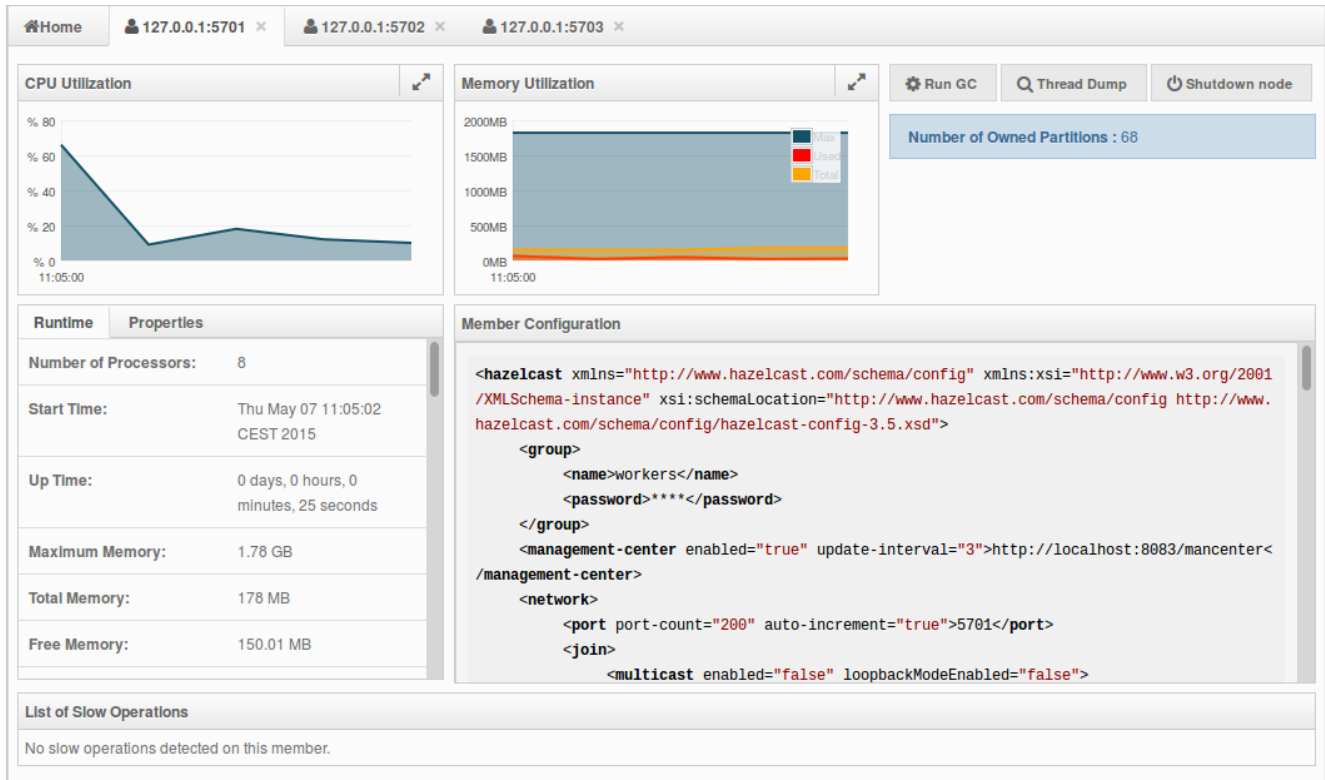


Figure 18.24:

The **CPU Utilization** chart shows the percentage of CPU usage on the selected member. The **Memory Utilization** chart shows the memory usage on the selected member with three different metrics (maximum, used and total memory). You can open both of these charts as separate windows using the button placed at top right of each chart; this gives you a clearer view of the chart.

The window titled **Partitions** shows which partitions are assigned to the selected member. **Runtime** is a dynamically updated window tab showing the processor number, the start and up times, and the maximum, total and free memory sizes of the selected member. Next to this, the **Properties** tab shows the system properties. The **Member Configuration** window shows the connected Hazelcast cluster's XML configuration.

The **List of Slow Operations** gives an overview of detected slow operations which occurred on that member. The data is collected by the [SlowOperationDetector](#).

By clicking on an entry you can open a dialog which shows the stacktrace and detailed information about each slow invocation of this operation.

Besides the aforementioned monitoring charts and windows, you can also perform operations on the selected member through this page. The operation buttons are located at the top right of the page, as explained below:

- **Run GC:** When pressed, garbage collection is executed on the selected member. A notification stating that the GC execution was successful will be shown.



- **Thread Dump:** When pressed, thread dump of the selected member is taken and shown as a separate dialog to the user.
- **Shutdown Node:** It is used to shutdown the selected member.

### 18.5.11 Scripting

You can use the scripting feature of this tool to execute codes on the cluster. To open this feature as a tab, select **Scripting** located at the toolbar on top. Once selected, the scripting feature opens as shown below.

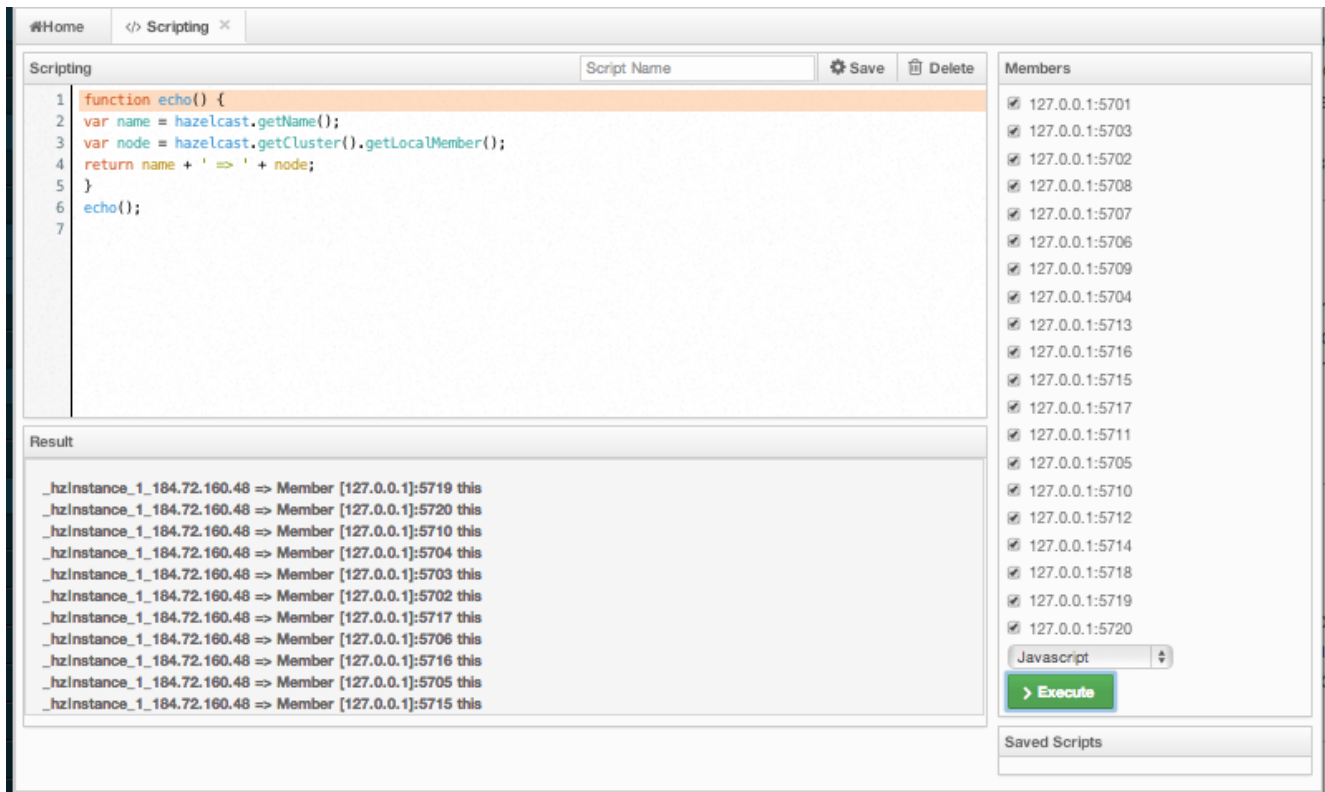


Figure 18.27:

In this window, the **Scripting** part is the actual coding editor. You can select the members on which the code will execute from the **Members** list shown at the right side of the window. Below the members list, a combo box enables you to select a scripting language: currently, JavaScript, Ruby, Groovy and Python languages are supported. After you write your script and press the **Execute** button, you can see the execution result in the **Result** part of the window.



**NOTE:** To use the scripting languages other than JavaScript on a member, the libraries for those languages should be placed in the classpath of that member.

There are **Save** and **Delete** buttons on the top right of the scripting editor. To save your scripts, press the **Save** button after you type a name for your script into the field next to this button. The scripts you saved are listed in the **Saved Scripts** part of the window, located at the bottom right of the page. Click on a saved script from this list to execute or edit it. If you want to remove a script that you wrote and saved before, select it from this list and press the **Delete** button.

In the scripting engine you have a `HazelcastInstance` bonded to a variable named `hazelcast`. You can invoke any method that `HazelcastInstance` has via the `hazelcast` variable. You can see example usage for JavaScript below.

```
var name = hazelcast.getName();
var node = hazelcast.getCluster().getLocalMember();
```

```
var employees = hazelcast.getMap("employees");
employees.put("1", "John Doe");
employees.get("1"); // will return "John Doe"
```

### 18.5.12 Console

The Management Center has a console feature that enables you to execute commands on the cluster. For example, you can perform puts and gets on a map, after you set the namespace with the command **ns** <name of your map>. The same is valid for queues, topics, etc. To execute your command, type it into the field below the console and press **Enter**. Type **help** to see all the commands that you can use.

Open a console window by clicking on the **Console** button located on the toolbar. Below is a sample view with some executed commands.

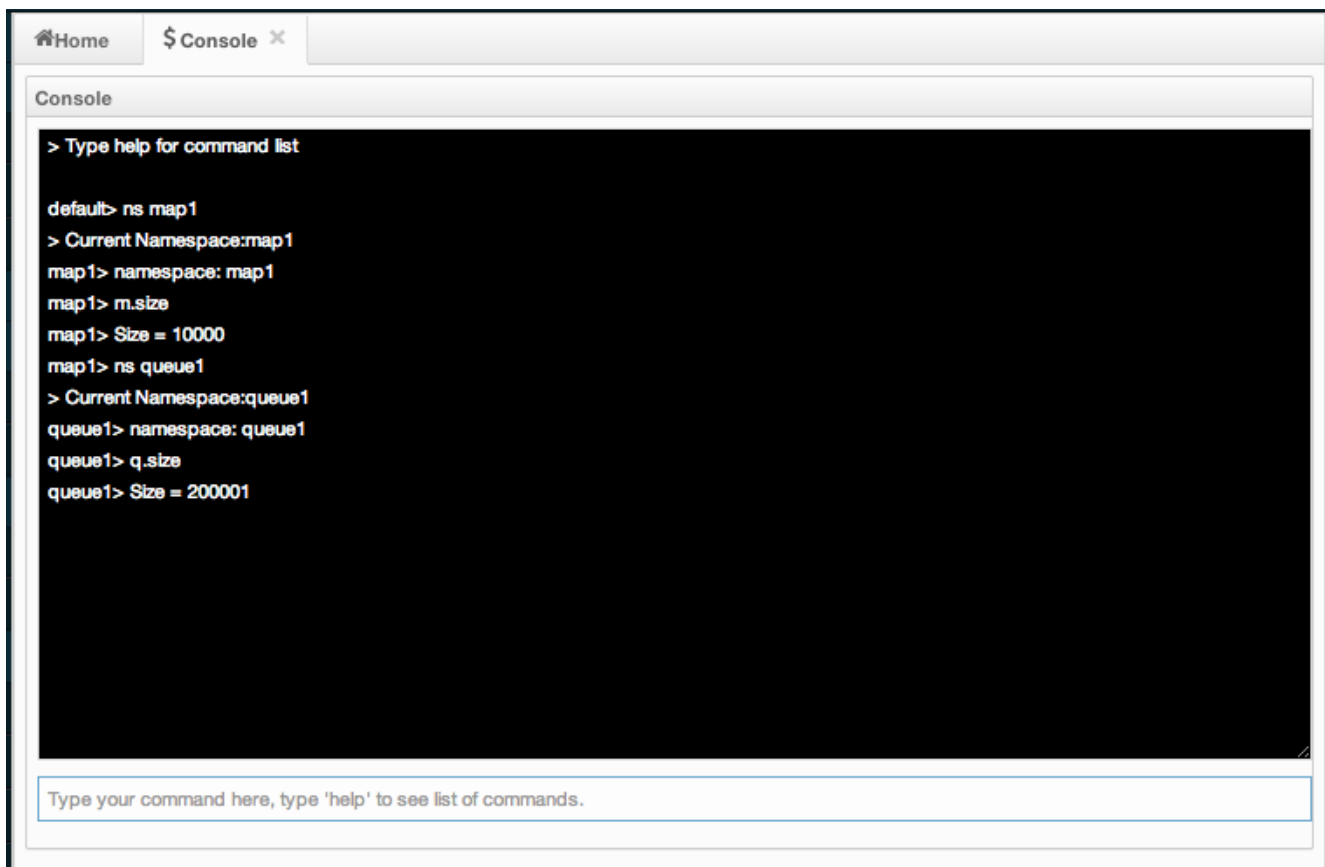


Figure 18.28:

### 18.5.13 Alerts

You can use the alerts feature of this tool to receive alerts by creating filters. In these filters, you can specify criteria for cluster, nodes or data structures. When the specified criteria are met for a filter, the related alert is shown as a pop-up message on the top right of the page.

Once you click the **Alerts** button located on the toolbar, the page shown below appears.

#### Creating Filters for Cluster

Select the **Cluster Alerts** check box to create a cluster wise filter. Once selected, the next screen asks for the items for which alerts will be created, as shown below.

Select the desired items and click the **Next** button. On the next page (shown below), specify the frequency of checks in **hour** and **min** fields, give a name for the filter, select whether notification e-mails will be sent (to no one,

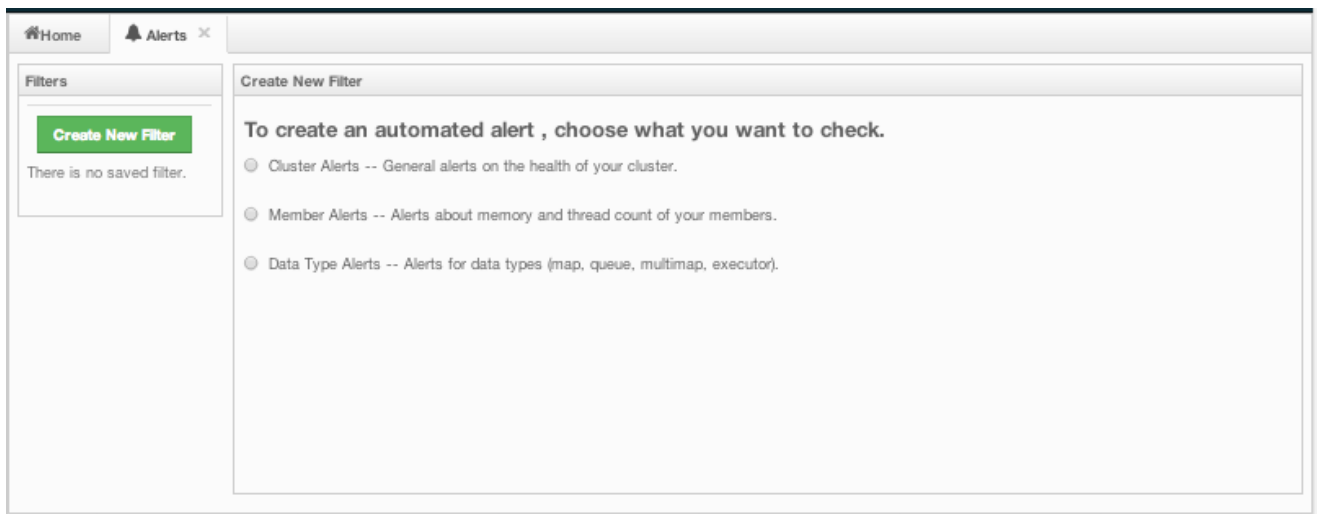


Figure 18.29:


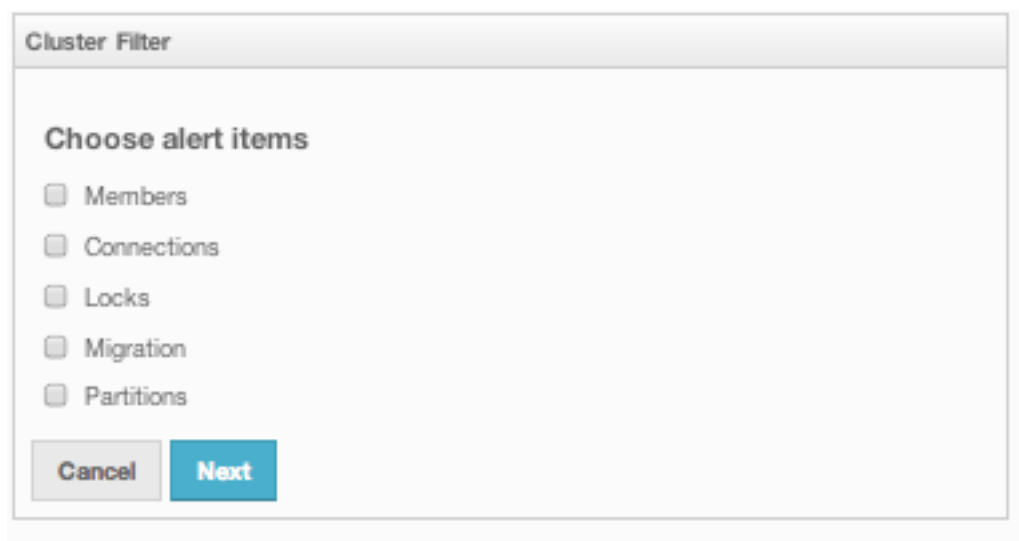


Figure 18.30:

only admin or to all users) and select whether the alert data will be written to the disk (if checked, you can see the alert log at the folder `/users//mancenter`).

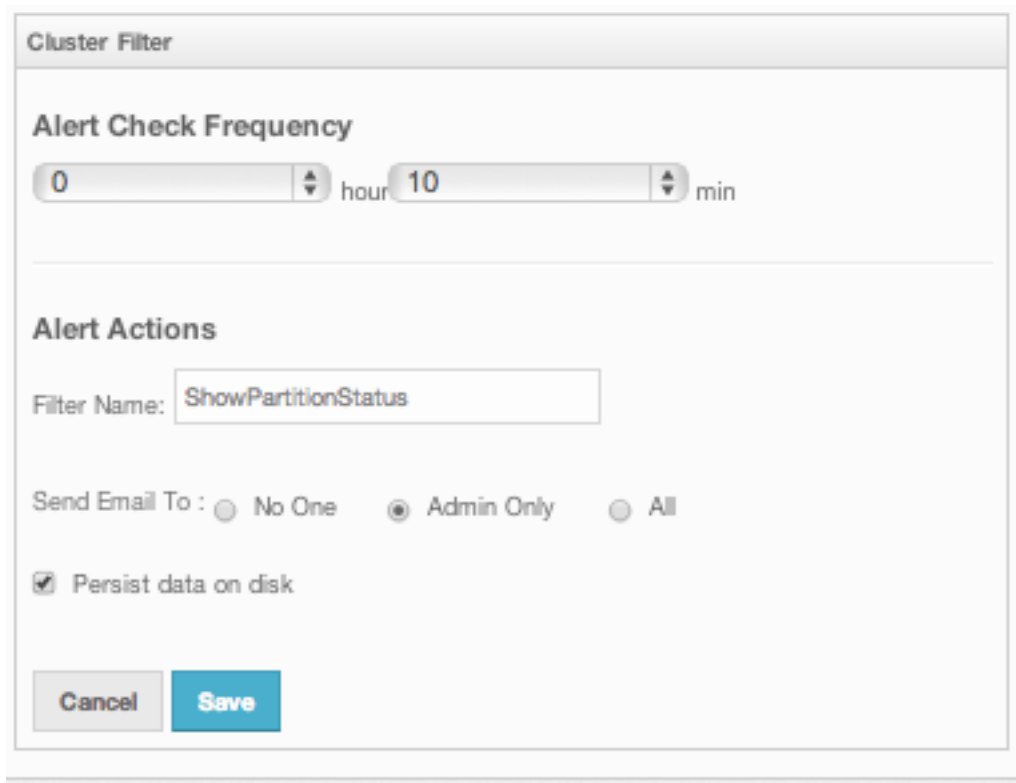


The **Cluster Filter** dialog box contains the following elements:

- Alert Check Frequency:** Two spinners. The first is set to 0 and labeled 'hour'. The second is set to 10 and labeled 'min'.
- Alert Actions:**
  - Filter Name:** A text input field containing 'ShowPartitionStatus'.
  - Send Email To :** Three radio buttons: 'No One' (unselected), 'Admin Only' (selected), and 'All' (unselected).
  - Persist data on disk:** A checked checkbox.
- Buttons:** 'Cancel' and 'Save' buttons at the bottom.

Figure 18.31:

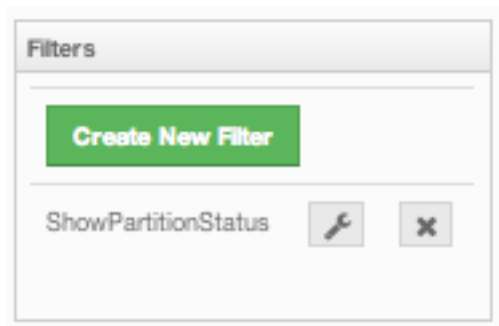

Click on the **Save** button; your filter will be saved and put into the **Filters** part of the page, as shown below.



The **Filters** panel shows:

- A green button labeled **Create New Filter**.
- A list of filters, currently showing 'ShowPartitionStatus'.
- Next to 'ShowPartitionStatus' are two icons: a wrench (edit) and an 'X' (delete).

Figure 18.32:

To edit the filter, click on the  icon. To delete the filter, click on the  icon.

### Creating Filters for Cluster Members

Select **Member Alerts** check box to create filters for some or all members in the cluster. Once selected, the next screen asks for which members the alert will be created. Select the desired members and click on the **Next** button. On the next page (shown below), specify the criteria.

Alerts can be created when:



- free memory on the selected nodes is less than the specified number.
- used heap memory is larger than the specified number.
- the number of active threads are less than the specified count.

Figure 18.33:

- the number of daemon threads are larger than the specified count.

When two or more criteria is specified they will be bound with the logical operator **AND**.

On the next page, give a name for the filter, select whether notification e-mails will be sent (to no one, only admin, or to all users) and select whether the alert data will be written to the disk (if checked, you can see the alert log at the folder `/users//mancenter`).

Click on the **Save** button; your filter will be saved and put into the **Filters** part of the page. To edit the filter, click on the  icon. To delete it, click on the  icon.



### Creating Filters for Data Types

Select the **Data Type Alerts** check box to create filters for data structures. The next screen asks for which data structure (maps, queues, multimaps, executors) the alert will be created. Once a structure is selected, the next screen immediately loads and you then select the data structure instances (i.e. if you selected *Maps*, it will list all the maps defined in the cluster, you can select one map or more). Select as desired, click on the **Next** button, and select the members on which the selected data structure instances will run.

The next screen, as shown below, is the one where you specify the criteria for the selected data structure.

As the screen shown above shows, you will select an item from the left combo box, select the operator in the middle one, specify a value in the input field, and click on the **Add** button. You can create more than one criteria in this page; those will be bound by the logical operator **AND**.

After you specify the criteria and click the **Next** button, give a name for the filter, select whether notification e-mails will be sent (to no one, only admin or to all users) and select whether the alert data will be written to the disk (if checked, you can see the alert log at the folder `/users//mancenter`).

Click on the **Save** button; your filter will be saved and put into the **Filters** part of the page. To edit the filter, click on the  icon. To delete it, click on the  icon.

#### 18.5.14 Administration



**NOTE:** This toolbar item is available only to admin users, i.e. the users who initially have **admin\*** as their both usernames and passwords.\*

**Data Type Filter**

**Data Type Settings**

You will be alerted, when :

Condition	Operator	Value	Action
# of Locks	>	1199	Add
# of Entries	>	1200	X
# of Locks	>	1199	X

Cancel Next

Figure 18.34:

The **Admin** user can add, edit, and remove users and specify the permissions for the users of Management Center. To perform these operations, click on the **Administration** button located on the toolbar. The page below appears.

**Administration**

**Users**

- admin
- + Add New User

**Add/Edit User**

Username:

Email:

Password:

Password(again):

is Admin: ☐

Permissions: ☒ Read Only ☐ Read/Write

Save

Figure 18.35:

To add a user to the system, specify the username, e-mail and password in the **Add/Edit User** part of the page. If the user to be added will have administrator privileges, select **isAdmin** checkbox. **Permissions** checkboxes have two values:

- **Read Only:** If this permission is given to the user, only *Home*, *Documentation* and *Time Travel* items will be visible at the toolbar at that user's session. Also, users with this permission cannot update a **map configuration**, run a garbage collection and take a thread dump on a node, or shutdown a node (please see the **Members** section).
- **Read/Write:** If this permission is given to the user, *Home*, *Scripting*, *Console*, *Documentation* and *Time Travel* items will be visible. The users with this permission can update a map configuration and perform operations on the nodes.

After you enter/select all fields, click **Save** button to create the user. You will see the newly created user's username on the left side, in the **Users** part of the page.



To edit or delete a user, select a username listed in the **Users**. Selected user information appears on the right side of the page. To update the user information, change the fields as desired and click the **Save** button. To delete the user from the system, click the **Delete** button.

### 18.5.15 Time Travel

Time Travel is used to check the status of the cluster at a time in the past. When this item is selected on the toolbar, a small window appears on top of the page, as shown below.

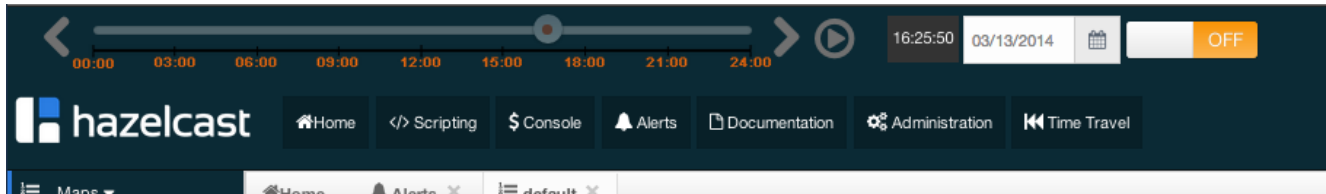


Figure 18.36:

To see the cluster status in a past time, Time Travel should be enabled first. Click on the area where it says **OFF** (on the right of Time Travel window). It will turn to **ON** after it asks whether to enable the Time Travel with a dialog: click on **Enable** in the dialog to enable Time Travel.

Once it is **ON**, the status of your cluster will be stored on your disk as long as your web server is alive.

You can go back in time using the slider and/or calendar and check your cluster's situation at the selected time. All data structures and members can be monitored as if you are using the management center normally (charts and data tables for each data structure and members). Using the arrow buttons placed at both sides of the slider, you can go back or further with steps of 5 seconds. It will show status if Time Travel has been **ON** at the selected time in past; otherwise, all the charts and tables will be shown as empty.

The historical data collected with Time Travel feature are stored in a file database on the disk. These files can be found in the folder <User's Home Directory>/mancenter<Hazelcast version>, e.g. /home/mancenter3.5. This folder can be changed using the `hazelcast.mancenter.home` property on the server where Management Center is running.

Time travel data files are created monthly. Their file name format is `[group-name]-[year][month].db` and `[group-name]-[year][month].lg`. Time travel data is kept in the `*.db` files. The files with the extension `lg` are temporary files created internally and you do not have to worry about them.

Management Center has no automatic way of removing or archiving old time travel data files. They remain in the aforementioned folder until you delete or archive them.

### 18.5.16 Documentation

To see the documentation, click on the **Documentation** button located at the toolbar. Management Center manual will appear as a tab.

### 18.5.17 Suggested Heap Size

#### For 2 Nodes

Mancenter Heap Size	# of Maps	# of Queues	# of Topics
256m	3k	1k	1k
1024m	10k	1k	1k

#### For 10 Nodes

Mancenter Heap Size	# of Maps	# of Queues	# of Topics
256m	50	30	30
1024m	2k	1k	1k

### For 20 Nodes

Mancenter Heap Size	# of Maps	# of Queues	# of Topics
256m*   N/A   N/A   N/A     1024m   1k   1k   1k			

\* With 256m heap, management center is unable to collect statistics.

## 18.6 Clustered JMX

# Enterprise Only

Figure 18.37:

Clustered JMX via Management Center allows you to monitor clustered statistics of distributed objects from a JMX interface.

### 18.6.1 Clustered JMX Configuration

In order to configure Clustered JMX, use two command line parameters for your Management Center deployment.

- `-Dhazelcast.mc.jmx.enabled=true` (default is false)
- `-Dhazelcast.mc.jmx.port=9000` (optional, default is 9999)

With embedded Jetty, you do not need to deploy your Management Center application to any container or application server.

You can start Management Center application with Clustered JMX enabled as shown below.

```
java -Dhazelcast.mc.jmx.enabled=true -Dhazelcast.mc.jmx.port=9999 -jar mancenter-3.3.jar
```

Once Management Center starts, you should see a log similar to below.

```
INFO: Management Center 3.3
Jun 05, 2014 11:55:32 AM com.hazelcast.webmonitor.service.jmx.impl.JMXService
INFO: Starting Management Center JMX Service on port :9999
```

You should be able to connect to Clustered JMX interface from the address `localhost:9999`.

You can use `jconsole` or any other JMX client to monitor your Hazelcast Cluster. As a sample, below is the `jconsole` screenshot of the Clustered JMX hierarchy.

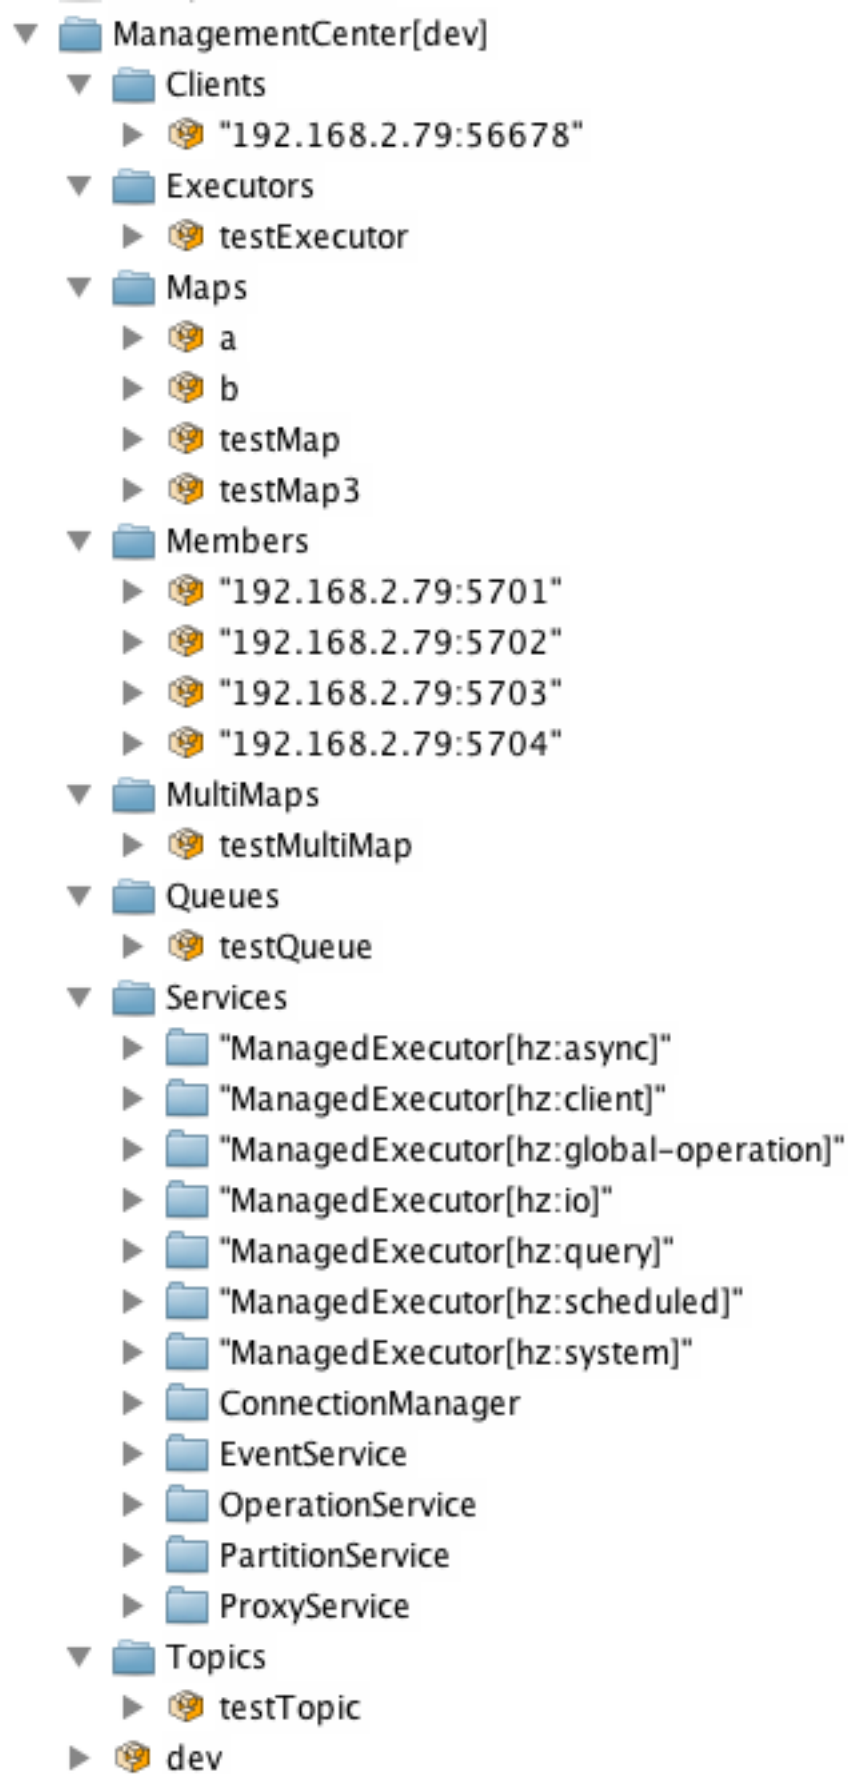


Figure 18.38:

### 18.6.2 API Documentation

The management beans are exposed with the following object name format.

`ManagementCenter[cluster name]:type=<object type>,name=<object name>,member="<cluster member IP address>"`

Object name starts with `ManagementCenter` prefix. Then it has the cluster name in brackets followed by a colon. After that, `type`, `name` and `member` attributes follows, each separated with a comma.

- `type` is the type of object. Values are `Clients`, `Executors`, `Maps`, `Members`, `MultiMaps`, `Queues`, `Services`, and `Topics`.
- `name` is the name of object.
- `member` is the node address of object (only required if the statistics are local to the node).

A sample bean is shown below.

`ManagementCenter[dev]:type=Services,name=OperationService,member="192.168.2.79:5701"`

Here is the list of attributes that are exposed from the Clustered JMX interface.

- **ManagementCenter[ClusterName]**
  - Clients
  - Address
  - ClientType
  - Uuid
  - Executors
  - Cluster
    - Name
    - StartedTaskCount
    - CompletedTaskCount
    - CancelledTaskCount
    - PendingTaskCount
  - Maps
    - Cluster
    - Name
    - BackupEntryCount
    - BackupEntryMemoryCost
    - CreationTime
    - DirtyEntryCount
    - Events
    - GetOperationCount
    - HeapCost
    - Hits
    - LastAccessTime
    - LastUpdateTime
    - LockedEntryCount
    - MaxGetLatency
    - MaxPutLatency
    - MaxRemoveLatency
    - OtherOperationCount
    - OwnedEntryCount
    - PutOperationCount

- RemoveOperationCount
- Members
  - ConnectedClientCount
  - HeapFreeMemory
  - HeapMaxMemory
  - HeapTotalMemory
  - HeapUsedMemory
  - IsMaster
  - OwnedPartitionCount
- MultiMaps
  - Cluster
  - Name
  - BackupEntryCount
  - BackupEntryMemoryCost
  - CreationTime
  - DirtyEntryCount
  - Events
  - GetOperationCount
  - HeapCost
  - Hits
  - LastAccessTime
  - LastUpdateTime
  - LockedEntryCount
  - MaxGetLatency
  - MaxPutLatency
  - MaxRemoveLatency
  - OtherOperationCount
  - OwnedEntryCount
  - PutOperationCount
  - RemoveOperationCount
- Queues
  - Cluster
  - Name
  - MinAge
  - MaxAge
  - AvgAge
  - OwnedItemCount
  - BackupItemCount
  - OfferOperationCount
  - OtherOperationsCount
  - PollOperationCount
  - RejectedOfferOperationCount
  - EmptyPollOperationCount
  - EventOperationCount
  - CreationTime
- Services
  - ConnectionManager
    - \* ActiveConnectionCount
    - \* ClientConnectionCount
    - \* ConnectionCount
  - EventService

- \* EventQueueCapacity
- \* EventQueueSize
- \* EventThreadCount
- OperationService
  - \* ExecutedOperationCount
  - \* OperationExecutorQueueSize
  - \* OperationThreadCount
  - \* RemoteOperationCount
  - \* ResponseQueueSize
  - \* RunningOperationsCount
- PartitionService
  - \* ActivePartitionCount
  - \* PartitionCount
- ProxyService
  - \* ProxyCount
- ManagedExecutor[hz::async]
  - \* Name
  - \* CompletedTaskCount
  - \* MaximumPoolSize
  - \* PoolSize
  - \* QueueSize
  - \* RemainingQueueCapacity
  - \* Terminated
- ManagedExecutor[hz::client]
  - \* Name
  - \* CompletedTaskCount
  - \* MaximumPoolSize
  - \* PoolSize
  - \* QueueSize
  - \* RemainingQueueCapacity
  - \* Terminated
- ManagedExecutor[hz::global-operation]
  - \* Name
  - \* CompletedTaskCount
  - \* MaximumPoolSize
  - \* PoolSize
  - \* QueueSize
  - \* RemainingQueueCapacity
  - \* Terminated
- ManagedExecutor[hz::io]
  - \* Name
  - \* CompletedTaskCount
  - \* MaximumPoolSize
  - \* PoolSize
  - \* QueueSize
  - \* RemainingQueueCapacity
  - \* Terminated
- ManagedExecutor[hz::query]
  - \* Name
  - \* CompletedTaskCount
  - \* MaximumPoolSize
  - \* PoolSize

- \* QueueSize
  - \* RemainingQueueCapacity
  - \* Terminated
  - ManagedExecutor[hz::scheduled]
    - \* Name
    - \* CompletedTaskCount
    - \* MaximumPoolSize
    - \* PoolSize
    - \* QueueSize
    - \* RemainingQueueCapacity
    - \* Terminated
  - ManagedExecutor[hz::system]
    - \* Name
    - \* CompletedTaskCount
    - \* MaximumPoolSize
    - \* PoolSize
    - \* QueueSize
    - \* RemainingQueueCapacity
    - \* Terminated
- Topics
    - Cluster
    - Name
    - CreationTime
    - PublishOperationCount
    - ReceiveOperationCount

### 18.6.3 New Relic Integration

Use the Clustered JMX interface to integrate Hazelcast Management Center with *New Relic*. To perform this integration, attach New Relic Java agent and provide an extension file that describes which metrics will be sent to New Relic.

Please see Custom JMX instrumentation by YAML on the New Relic webpage.

Below is an example Map monitoring .yaml file for New Relic.

```
name: Clustered JMX
version: 1.0
enabled: true

jmx:
 - object_name: ManagementCenter[clustername]:type=Maps,name=mapname
 metrics:
 - attributes: PutOperationCount, GetOperationCount, RemoveOperationCount, Hits,\
 BackupEntryCount, OwnedEntryCount, LastAccessTime, LastUpdateTime
 type: simple
 - object_name: ManagementCenter[clustername]:type=Members,name="node address in\
 double quotes"
 metrics:
 - attributes: OwnedPartitionCount
 type: simple
```

Put the .yaml file in the `extensions` folder in your New Relic installation. If an `extensions` folder does not exist there, create one.

After you set your extension, attach the New Relic Java agent and start Management Center as shown below.

```
java -javaagent:/path/to/newrelic.jar -Dhazelcast.mc.jmx.enabled=true\
-Dhazelcast.mc.jmx.port=9999 -jar mancenter-3.3.jar
```

If your logging level is set as `FINER`, you should see the log listing in the file `newrelic_agent.log`, which is located in the `logs` folder in your New Relic installation. Below is an example log listing.

```
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINE:
 JMX Service : querying MBeans (1)
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 JMX Service : MBeans query ManagementCenter[dev]:type=Members,
 name="192.168.2.79:5701", matches 1
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 Recording JMX metric OwnedPartitionCount : 68
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 JMX Service : MBeans query ManagementCenter[dev]:type=Maps,name=orders,
 matches 1
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 Recording JMX metric Hits : 46,593
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 Recording JMX metric BackupEntryCount : 1,100
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 Recording JMX metric OwnedEntryCount : 1,100
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 Recording JMX metric RemoveOperationCount : 0
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 Recording JMX metric PutOperationCount : 118,962
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 Recording JMX metric GetOperationCount : 0
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 Recording JMX metric LastUpdateTime : 1,401,962,426,811
Jun 5, 2014 14:18:43 +0300 [72696 62] com.newrelic.agent.jmx.JmxService FINER:
 Recording JMX metric LastAccessTime : 1,401,962,426,811
```

Then you can navigate to your New Relic account and create Custom Dashboards. Please see [Creating custom dashboards](#).

While you are creating the dashboard, you should see the metrics that you are sending to New Relic from Management Center in the **Metrics** section under the JMX folder.

### 18.6.4 AppDynamics Integration

Use the Clustered JMX interface to integrate Hazelcast Management Center with *AppDynamics*. To perform this integration, attach AppDynamics Java agent to the Management Center.

For agent installation, refer to [Install the App Agent for Java](#) page.

For monitoring on AppDynamics, refer to [Using AppDynamics for JMX Monitoring](#) page.

After installing AppDynamics agent, you can start Management Center as shown below.

```
java -javaagent:/path/to/javaagent.jar -Dhazelcast.mc.jmx.enabled=true\
-Dhazelcast.mc.jmx.port=9999 -jar mancenter-3.3.jar
```

When Management Center starts, you should see the logs below.

```
Started AppDynamics Java Agent Successfully.
Hazelcast Management Center starting on port 8080 at path : /mancenter
```



# Enterprise Only

Figure 18.39:

## 18.7 Clustered REST

The Clustered REST API is exposed from Management Center to allow you to monitor clustered statistics of distributed objects.

### 18.7.1 Enabling Clustered REST

To enable Clustered REST on your Management Center, pass the following system property at startup. This property is disabled by default.

```
-Dhazelcast.mc.rest.enabled=true
```

### 18.7.2 Clustered REST API Root

The entry point for Clustered REST API is `/rest/`.

This resource does not have any attributes.

### 18.7.3 Clusters Resource

This resource returns a list of clusters that are connected to the Management Center.

#### 18.7.3.0.1 Retrieve Clusters

- *Request Type:* GET
- *URL:* `/rest/clusters`
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters
```

- *Response:* 200 (application/json)
- *Body:*

```
["dev","qa"]
```

### 18.7.4 Cluster Resource

This resource returns information related to the provided cluster name.

#### 18.7.4.0.2 Retrieve Cluster Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/
```

- *Response:* 200 (application/json)
- *Body:*

```
{"masterAddress":"192.168.2.78:5701"}
```

### 18.7.5 Members Resource

This resource returns a list of members belonging to the provided clusters.

#### 18.7.5.0.3 Retrieve Members [GET] [/rest/clusters/{clustername}/members]

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/members
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/members
```

- *Response:* 200 (application/json)
- *Body:*

```
["192.168.2.78:5701","192.168.2.78:5702","192.168.2.78:5703","192.168.2.78:5704"]
```

### 18.7.6 Member Resource

This resource returns information related to the provided member.

#### 18.7.6.0.4 Retrieve Member Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/members/{member}
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/members/192.168.2.78:5701
```

- *Response:* 200 (application/json)
- *Body:*

```
{
 "cluster": "dev",
 "name": "192.168.2.78:5701",
 "maxMemory": 129957888,
 "ownedPartitionCount": 68,
 "usedMemory": 60688784,
 "freeMemory": 24311408,
 "totalMemory": 85000192,
 "connectedClientCount": 1,
 "master": true
}
```

#### 18.7.6.0.5 Retrieve Connection Manager Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/members/{member}/connectionManager
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/members/192.168.2.78:5701/connectionManager
```

- *Response:* 200 (application/json)
- *Body:*

```
{
 "clientConnectionCount": 2,
 "activeConnectionCount": 5,
 "connectionCount": 5
}
```

#### 18.7.6.0.6 Retrieve Operation Service Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/members/{member}/operationService
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/members/192.168.2.78:5701/operationService
```

- *Response:* 200 (application/json)
- *Body:*

```
{
 "responseQueueSize": 0,
 "operationExecutorQueueSize": 0,
 "runningOperationsCount": 0,
 "remoteOperationCount": 1,
 "executedOperationCount": 461139,
 "operationThreadCount": 8
}
```

#### 18.7.6.0.7 Retrieve Event Service Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/members/{member}/eventService
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/members/192.168.2.78:5701/eventService
```

- *Response:* 200 (application/json)
- *Body:*

```
{
 "eventThreadCount":5,
 "eventQueueCapacity":1000000,
 "eventQueueSize":0
}
```

#### 18.7.6.0.8 Retrieve Partition Service Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/members/{member}/partitionService
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/members/192.168.2.78:5701/partitionService
```

- *Response:* 200 (application/json)
- *Body:*

```
{
 "partitionCount":271,
 "activePartitionCount":68
}
```

#### 18.7.6.0.9 Retrieve Proxy Service Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/members/{member}/proxyService
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/members/192.168.2.78:5701/proxyService
```

- *Response:* 200 (application/json)
- *Body:*

```
{
 "proxyCount":8
}
```

#### 18.7.6.0.10 Retrieve All Managed Executors

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/members/{member}/managedExecutors
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/members/192.168.2.78:5701/managedExecutors
```

- *Response:* 200 (application/json)
- *Body:*

```
["hz:system","hz:scheduled","hz:client","hz:query","hz:io","hz:async"]
```

#### 18.7.6.0.11 Retrieve a Managed Executor

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/members/{member}/managedExecutors/{managedExecutor}
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/members/192.168.2.78:5701/managedExecutors/hz:system
```

- *Response:* 200 (application/json)
- *Body:*

```
{
 "name": "hz:system",
 "queueSize": 0,
 "poolSize": 0,
 "remainingQueueCapacity": 2147483647,
 "maximumPoolSize": 4,
 "completedTaskCount": 12,
 "terminated": false
}
```

### 18.7.7 Clients Resource

This resource returns a list of clients belonging to the provided cluster.

#### 18.7.7.0.12 Retrieve List of Clients

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/clients
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/clients
```

- *Response:* 200 (application/json)
- *Body:*

```
["192.168.2.78:61708"]
```

#### 18.7.7.0.13 Retrieve Client Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/clients/{client}
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/clients/192.168.2.78:61708
```

- *Response:* 200 (application/json)
- *Body:*

```
{
 "uuid": "6fae7af6-7a7c-4fa5-b165-cde24cf070f5",
 "address": "192.168.2.78:61708",
 "clientType": "JAVA"
}
```

### 18.7.8 Maps Resource

This resource returns a list of maps belonging to the provided cluster.

#### 18.7.8.0.14 Retrieve List of Maps

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/maps
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/maps
```

- *Response:* 200 (application/json)
- *Body:*

```
["customers","orders"]
```

#### 18.7.8.0.15 Retrieve Map Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/maps/{mapName}
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/maps/customers
```

- *Response:* 200 (application/json)
- *Body:*

```

{
 "cluster": "dev",
 "name": "customers",
 "ownedEntryCount": 1000,
 "backupEntryCount": 1000,
 "ownedEntryMemoryCost": 157890,
 "backupEntryMemoryCost": 113683,
 "heapCost": 297005,
 "lockedEntryCount": 0,
 "dirtyEntryCount": 0,
 "hits": 3001,
 "lastAccessTime": 1403608925777,
 "lastUpdateTime": 1403608925777,
 "creationTime": 1403602693388,
 "putOperationCount": 110630,
 "getOperationCount": 165945,
 "removeOperationCount": 55315,
 "otherOperationCount": 0,
 "events": 0,
 "maxPutLatency": 52,
 "maxGetLatency": 30,
 "maxRemoveLatency": 21
}

```

### 18.7.9 MultiMaps Resource

This resource returns a list of multimaps belonging to the provided cluster.

#### 18.7.9.0.16 Retrieve List of MultiMaps

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/multimaps
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/multimaps
```

- *Response:* 200 (application/json)
- *Body:*

```
["customerAddresses"]
```

#### 18.7.9.0.17 Retrieve MultiMap Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/multimaps/{multimapname}
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/multimaps/customerAddresses
```

- *Response:* 200 (application/json)
- *Body:*

```

{
 "cluster": "dev",
 "name": "customerAddresses",
 "ownedEntryCount": 996,
 "backupEntryCount": 996,
 "ownedEntryMemoryCost": 0,
 "backupEntryMemoryCost": 0,
 "heapCost": 0,
 "lockedEntryCount": 0,
 "dirtyEntryCount": 0,
 "hits": 0,
 "lastAccessTime": 1403603095521,
 "lastUpdateTime": 1403603095521,
 "creationTime": 1403602694158,
 "putOperationCount": 166041,
 "getOperationCount": 110694,
 "removeOperationCount": 55347,
 "otherOperationCount": 0,
 "events": 0,
 "maxPutLatency": 77,
 "maxGetLatency": 69,
 "maxRemoveLatency": 42
}

```

### 18.7.10 Queues Resource

This resource returns a list of queues belonging to the provided cluster.

#### 18.7.10.0.18 Retrieve List of Queues

- *Request Type:* GET
- *URL:* `/rest/clusters/{clustername}/queues`
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/queues
```

- *Response:* 200 (application/json)
- *Body:*

```
["messages"]
```

#### 18.7.10.0.19 Retrieve Queue Information

- *Request Type:* GET
- *URL:* `/rest/clusters/{clustername}/queues/{queueName}`
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/queues/messages
```

- *Response:* 200 (application/json)
- *Body:*



```
{
 "cluster": "dev",
 "name": "messages",
 "ownedItemCount": 55408,
 "backupItemCount": 55408,
 "minAge": 0,
 "maxAge": 0,
 "aveAge": 0,
 "numberOfOffers": 55408,
 "numberOfRejectedOffers": 0,
 "numberOfPolls": 0,
 "numberOfEmptyPolls": 0,
 "numberOfOtherOperations": 0,
 "numberOfEvents": 0,
 "creationTime": 1403602694196
}
```

### 18.7.11 Topics Resource

This resource returns a list of topics belonging to the provided cluster.

#### 18.7.11.0.20 Retrieve List of Topics

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/topics
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/topics
```

- *Response:* 200 (application/json)
- *Body:*

```
["news"]
```

#### 18.7.11.0.21 Retrieve Topic Information

- *Request Type:* GET
- *URL:* /rest/clusters/{clustername}/topics/{topicName}
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/topics/news
```

- *Response:* 200 (application/json)
- *Body:*

```
{
 "cluster": "dev",
 "name": "news",
 "numberOfPublishes": 56370,
 "totalReceivedMessages": 56370,
 "creationTime": 1403602693411
}
```

### 18.7.12 Executors Resource

This resource returns a list of executors belonging to the provided cluster.

#### 18.7.12.0.22 Retrieve List of Executors

- *Request Type:* GET
- *URL:* `/rest/clusters/{clustername}/executors`
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/executors
```

- *Response:* 200 (application/json)
- *Body:*

```
["order-executor"]
```

#### 18.7.12.0.23 Retrieve Executor Information [GET] [/rest/clusters/{clustername}/executors/{executorName}]

- *Request Type:* GET
- *URL:* `/rest/clusters/{clustername}/executors/{executorName}`
- *Request:*

```
curl http://localhost:8083/mancenter/rest/clusters/dev/executors/order-executor
```

- *Response:* 200 (application/json)
- *Body:*

```
{
 "cluster": "dev",
 "name": "order-executor",
 "creationTime": 1403602694196,
 "pendingTaskCount": 0,
 "startedTaskCount": 1241,
 "completedTaskCount": 1241,
 "cancelledTaskCount": 0
}
```

# Chapter 19

## Security

This chapter provides information on the security features of Hazelcast. These features allow you to perform security activities including intercepting socket connections and remote operations executed by the clients, encrypting the communications between the members at socket level and using SSL socket communication.

### 19.1 Enabling Security for Hazelcast Enterprise

#### Enterprise Only

Figure 19.1:

Hazelcast has an extensible, JAAS based security feature you can use to authenticate both cluster members and clients, and to perform access control checks on client operations. Access control can be done according to endpoint principal and/or endpoint address.

You can enable security declaratively or programmatically, as shown below.

```
<hazelcast xsi:schemaLocation="http://www.hazelcast.com/schema/config
 http://www.hazelcast.com/schema/config/hazelcast-config-3.3.xsd"
 xmlns="http://www.hazelcast.com/schema/config"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">

 ...

 <security enabled="true">
 ...
 </security>
</hazelcast>
```

```
Config cfg = new Config();
SecurityConfig securityCfg = cfg.getSecurityConfig();
securityCfg.setEnabled(true);
```

Also, see [Setting License Key](#).

### 19.2 Socket Interceptor

Hazelcast allows you to intercept socket connections before a node joins to cluster or a client connects to a node. This provides the ability to add custom hooks to join and perform connection procedures (like identity

# Enterprise Only

Figure 19.2:

checking using Kerberos, etc.). Implement `com.hazelcast.nio.MemberSocketInterceptor` for members and `com.hazelcast.nio.SocketInterceptor` for clients.

```
public class MySocketInterceptor implements MemberSocketInterceptor {
 public void init(SocketInterceptorConfig socketInterceptorConfig) {
 // initialize interceptor
 }

 void onConnect(Socket connectedSocket) throws IOException {
 // do something meaningful when connected
 }

 public void onAccept(Socket acceptedSocket) throws IOException {
 // do something meaningful when accepted a connection
 }
}

<hazelcast>
...
<network>
...
<socket-interceptor enabled="true">
 <class-name>com.hazelcast.examples.MySocketInterceptor</class-name>
 <properties>
 <property name="kerberos-host">kerb-host-name</property>
 <property name="kerberos-config-file">kerb.conf</property>
 </properties>
</socket-interceptor>
</network>
...
</hazelcast>

public class MyClientSocketInterceptor implements SocketInterceptor {
 void onConnect(Socket connectedSocket) throws IOException {
 // do something meaningful when connected
 }
}

ClientConfig clientConfig = new ClientConfig();
clientConfig.setGroupConfig(new GroupConfig("dev", "dev-pass"))
 .addAddress("10.10.3.4");

MyClientSocketInterceptor clientSocketInterceptor = new MyClientSocketInterceptor();
clientConfig.setSocketInterceptor(clientSocketInterceptor);
HazelcastInstance client = HazelcastClient.newHazelcastClient(clientConfig);
```

## 19.3 Security Interceptor

Hazelcast allows you to intercept every remote operation executed by the client. This lets you add a very flexible custom security logic. To do this, implement `com.hazelcast.security.SecurityInterceptor`.

## Enterprise Only

Figure 19.3:

```
public class MySecurityInterceptor implements SecurityInterceptor {

 public void before(Credentials credentials, String serviceName,
 String methodName, Parameters parameters)
 throws AccessControlException {
 // credentials: client credentials
 // serviceName: MapService.SERVICE_NAME, QueueService.SERVICE_NAME, ... etc
 // methodName: put, get, offer, poll, ... etc
 // parameters: holds parameters of the executed method, iterable.
 }

 public void after(Credentials credentials, String serviceName,
 String methodName, Parameters parameters) {
 // can be used for logging etc.
 }
}
```

The **before** method will be called before processing the request on the remote server. The **after** method will be called after the processing. Exceptions thrown while executing the **before** method will propagate to the client, but exceptions thrown while executing the **after** method will be suppressed.

## 19.4 Encryption

## Enterprise Only

Figure 19.4:

Hazelcast allows you to encrypt the entire socket level communication among all Hazelcast members. Encryption is based on Java Cryptography Architecture. In symmetric encryption, each node uses the same key, so the key is shared. Here is an example configuration for symmetric encryption.

```
<hazelcast>
...
<network>
...
<!--
 Make sure to set enabled=true
 Make sure this configuration is exactly the same on
 all members
-->
<symmetric-encryption enabled="true">
 <!--
 encryption algorithm such as
 DES/ECB/PKCS5Padding,
 PBESWithMD5AndDES,
 Blowfish,
 DESede
 -->
 <algorithm>PBESWithMD5AndDES</algorithm>
```

```

 <!-- salt value to use when generating the secret key -->
 <salt>thesalt</salt>

 <!-- pass phrase to use when generating the secret key -->
 <password>thepass</password>

 <!-- iteration count to use when generating the secret key -->
 <iteration-count>19</iteration-count>
 </symmetric-encryption>
</network>
...
</hazelcast>

```

### RELATED INFORMATION

Please see the [SSL section](#).

## 19.5 SSL

# Enterprise Only

Figure 19.5:

Hazelcast allows you to use SSL socket communication among all Hazelcast members. To use it, you need to implement `com.hazelcast.nio.ssl.SSLContextFactory` and configure the SSL section in network configuration.

```

public class MySSLContextFactory implements SSLContextFactory {
 public void init(Properties properties) throws Exception {
 }

 public SSLContext getSSLContext() {
 ...
 SSLContext sslCtx = SSLContext.getInstance(protocol);
 return sslCtx;
 }
}

```

```

<hazelcast>
...
<network>
...
 <ssl enabled="true">
 <factory-class-name>
 com.hazelcast.examples.MySSLContextFactory
 </factory-class-name>
 <properties>
 <property name="foo">bar</property>
 </properties>
 </ssl>
</network>
...
</hazelcast>

```

Hazelcast provides a default `SSLContextFactory`, `com.hazelcast.nio.ssl.BasicSSLContextFactory`, which uses configured keystore to initialize `SSLContext`. You define `keyStore` and `keyStorePassword`, and you can set

keyManagerAlgorithm (default SunX509), trustManagerAlgorithm (default SunX509) and protocol (default TLS).

```
<hazelcast>
...
<network>
...
<ssl enabled="true">
 <factory-class-name>
 com.hazelcast.nio.ssl.BasicSSLContextFactory
 </factory-class-name>
 <properties>
 <property name="keyStore">keyStore</property>
 <property name="keyStorePassword">keyStorePassword</property>
 <property name="keyManagerAlgorithm">SunX509</property>
 <property name="trustManagerAlgorithm">SunX509</property>
 <property name="protocol">TLS</property>
 </properties>
</ssl>
</network>
...
</hazelcast>
```

Hazelcast client also has SSL support. You can configure Client SSL programmatically as shown below.

```
Properties props = new Properties();
...
ClientConfig config = new ClientConfig();
config.getSocketOptions().setSocketFactory(new SSLSocketFactory(props));
```

You can also set keyStore and keyStorePassword with the following system properties.

- javax.net.ssl.keyStore
- javax.net.ssl.keyStorePassword



**NOTE:** You cannot use SSL when *Hazelcast Encryption* is enabled.

## 19.6 Credentials

### Enterprise Only

Figure 19.6:

One of the key elements in Hazelcast security is the `Credentials` object, which is used to carry all credentials of an endpoint (member or client). `Credentials` is an interface which extends `Serializable` and has three methods to implement. You can either implement the `Credentials` interface or extend the `AbstractCredentials` class, which is an abstract implementation of `Credentials`.

```
package com.hazelcast.security;
public interface Credentials extends Serializable {
 String getEndpoint();
 void setEndpoint(String endpoint);
 String getPrincipal();
}
```

Hazelcast calls the `Credentials.setEndpoint()` method when an authentication request arrives at the node before authentication takes place.

```
package com.hazelcast.security;
...
public abstract class AbstractCredentials implements Credentials, DataSerializable {
 private transient String endpoint;
 private String principal;
 ...
}
```

`UsernamePasswordCredentials`, a custom implementation of `Credentials`, is in the Hazelcast `com.hazelcast.security` package. `UsernamePasswordCredentials` is used for default configuration during the authentication process of both members and clients.

```
package com.hazelcast.security;
...
public class UsernamePasswordCredentials extends Credentials {
 private byte[] password;
 ...
}
```

## 19.7 ClusterLoginModule

# Enterprise Only

Figure 19.7:

All security attributes are carried in the `Credentials` object. `Credentials` is used by `LoginModule` s during the authentication process. User supplied attributes from `LoginModules` are accessed by `CallbackHandler` s. To access the `Credentials` object, Hazelcast uses its own specialized `CallbackHandler`. During initialization of `LoginModules`, Hazelcast passes this special `CallbackHandler` into the `LoginModule.initialize()` method.

`LoginModule` implementations should create an instance of `com.hazelcast.security.CredentialsCallback` and call the `handle(Callback[] callbacks)` method of `CallbackHandler` during the login process.

`CredentialsCallback.getCredentials()` returns the supplied `Credentials` object.

```
public class CustomLoginModule implements LoginModule {
 CallbackHandler callbackHandler;
 Subject subject;

 public void initialize(Subject subject, CallbackHandler callbackHandler,
 Map<String, ?> sharedState, Map<String, ?> options) {
 this.subject = subject;
 this.callbackHandler = callbackHandler;
 }

 public final boolean login() throws LoginException {
 CredentialsCallback callback = new CredentialsCallback();
 try {
 callbackHandler.handle(new Callback[] { callback });
 credentials = cb.getCredentials();
 } catch (Exception e) {
 throw new LoginException(e.getMessage());
 }
 }
}
```



```

 }
 ...
}
 ...
}

```

To use the default Hazelcast permission policy, you must create an instance of `com.hazelcast.security.ClusterPrincipal` that holds the `Credentials` object, and you must add it to `Subject.principals` on `LoginModule.commit()` as shown below.

```

public class MyCustomLoginModule implements LoginModule {
 ...
 public boolean commit() throws LoginException {
 ...
 Principal principal = new ClusterPrincipal(credentials);
 subject.getPrincipals().add(principal);

 return true;
 }
 ...
}

```

Hazelcast has an abstract implementation of `LoginModule` that does callback and cleanup operations and holds the resulting `Credentials` instance. `LoginModules` extending `ClusterLoginModule` can access `Credentials`, `Subject`, `LoginModule` instances and options, and `sharedState` maps. Extending the `ClusterLoginModule` is recommended instead of implementing all required stuff.

```

package com.hazelcast.security;
...
public abstract class ClusterLoginModule implements LoginModule {

 protected abstract boolean onLogin() throws LoginException;
 protected abstract boolean onCommit() throws LoginException;
 protected abstract boolean onAbort() throws LoginException;
 protected abstract boolean onLogout() throws LoginException;
}

```

### 19.7.1 Enterprise Integration

Using the above API, it should be possible to implement a `LoginModule` that performs authentication against the Security System of your choice, possibly an LDAP store like Apache Directory or some other corporate standard you have. For example, you may wish to have your clients send an identification token in the `Credentials` object. This token can then be sent to your back-end security system via the `LoginModule` that runs on the cluster side.

Additionally, the same system may authenticate the user and also then return the roles that are attributed to the user. These roles can then be used for data structure authorization.

#### **RELATED INFORMATION**

*Please refer to JAAS Reference Guide for further information.*

## 19.8 Cluster Member Security

Hazelcast supports standard Java Security (JAAS) based authentication between cluster members. To implement it, you configure one or more `LoginModules` and an instance of `com.hazelcast.security.ICredentialsFactory`. Although Hazelcast has default implementations using cluster group and group-password and `UsernamePasswordCredentials` on authentication, it is recommended that you implement the `LoginModules` and an instance of `com.hazelcast.security.ICredentialsFactory` according to your specific needs and environment.

# Enterprise Only

Figure 19.8:

```

<security enabled="true">
 <member-credentials-factory
 class-name="com.hazelcast.examples.MyCredentialsFactory">
 <properties>
 <property name="property1">value1</property>
 <property name="property2">value2</property>
 </properties>
 </member-credentials-factory>
 <member-login-modules>
 <login-module usage="required"
 class-name="com.hazelcast.examples.MyRequiredLoginModule">
 <properties>
 <property name="property3">value3</property>
 </properties>
 </login-module>
 <login-module usage="sufficient"
 class-name="com.hazelcast.examples.MySufficientLoginModule">
 <properties>
 <property name="property4">value4</property>
 </properties>
 </login-module>
 <login-module usage="optional"
 class-name="com.hazelcast.examples.MyOptionalLoginModule">
 <properties>
 <property name="property5">value5</property>
 </properties>
 </login-module>
 </member-login-modules>
 ...
</security>

```

You can define as many as LoginModules you wanted in configuration. They are executed in the given order. The `usage` attribute has 4 values: 'required', 'requisite', 'sufficient' and 'optional' as defined in `javax.security.auth.login.AppConfigurationEntry.LoginModuleControlFlag`.

```

package com.hazelcast.security;
/**
 * ICredentialsFactory is used to create Credentials objects to be used
 * during node authentication before connection accepted by master node.
 */
public interface ICredentialsFactory {

 void configure(GroupConfig groupConfig, Properties properties);

 Credentials newCredentials();

 void destroy();
}

```

Properties defined in configuration are passed to the `ICredentialsFactory.configure()` method as `java.util.Properties` and to the `LoginModule.initialize()` method as `java.util.Map`.

## 19.9 Native Client Security

# Enterprise Only

Figure 19.9:

Hazelcast's Client security includes both authentication and authorization.

### 19.9.1 Authentication

The authentication mechanism works the same as cluster member authentication. To implement client authentication, you configure a Credential and one or more LoginModules. The client side does not have and does not need a factory object to create Credentials objects like `ICredentialsFactory`. You must create the credentials at the client side and send them to the connected member during the connection process.

```
<security enabled="true">
 <client-login-modules>
 <login-module usage="required"
 class-name="com.hazelcast.examples.MyRequiredClientLoginModule">
 <properties>
 <property name="property3">value3</property>
 </properties>
 </login-module>
 <login-module usage="sufficient"
 class-name="com.hazelcast.examples.MySufficientClientLoginModule">
 <properties>
 <property name="property4">value4</property>
 </properties>
 </login-module>
 <login-module usage="optional"
 class-name="com.hazelcast.examples.MyOptionalClientLoginModule">
 <properties>
 <property name="property5">value5</property>
 </properties>
 </login-module>
 </client-login-modules>
 ...
</security>
```

You can define as many as LoginModules as you want in configuration. Those are executed in the given order. The `usage` attribute has 4 values: 'required', 'requisite', 'sufficient' and 'optional' as defined in `javax.security.auth.login.AppConfigurationEntry.LoginModuleControlFlag`.

```
ClientConfig clientConfig = new ClientConfig();
clientConfig.setCredentials(new UsernamePasswordCredentials("dev", "dev-pass"));
HazelcastInstance client = HazelcastClient.newHazelcastClient(clientConfig);
```

### 19.9.2 Authorization

Hazelcast client authorization is configured by a client permission policy. Hazelcast has a default permission policy implementation that uses permission configurations defined in the Hazelcast security configuration. Default policy permission checks are done against instance types (map, queue, etc.), instance names (map, queue, name, etc.), instance actions (put, read, remove, add, etc.), client endpoint addresses, and client principal defined by the Credentials object. Instance and principal names and endpoint addresses can be defined as wildcards(\*). Please see the [Network Configuration section](#) and [Using Wildcard section](#).

```

<security enabled="true">
 <client-permissions>
 <!-- Principal 'admin' from endpoint '127.0.0.1' has all permissions. -->
 <all-permissions principal="admin">
 <endpoints>
 <endpoint>127.0.0.1</endpoint>
 </endpoints>
 </all-permissions>

 <!-- Principals named 'dev' from all endpoints have 'create', 'destroy',
 'put', 'read' permissions for map named 'default'. -->
 <map-permission name="default" principal="dev">
 <actions>
 <action>create</action>
 <action>destroy</action>
 <action>put</action>
 <action>read</action>
 </actions>
 </map-permission>

 <!-- All principals from endpoints '127.0.0.1' or matching to '10.10.*.*'
 have 'put', 'read', 'remove' permissions for map
 whose name matches to 'com.foo.entity.*'. -->
 <map-permission name="com.foo.entity.*">
 <endpoints>
 <endpoint>10.10.*.*</endpoint>
 <endpoint>127.0.0.1</endpoint>
 </endpoints>
 <actions>
 <action>put</action>
 <action>read</action>
 <action>remove</action>
 </actions>
 </map-permission>

 <!-- Principals named 'dev' from endpoints matching to either
 '192.168.1.1-100' or '192.168.2.*'
 have 'create', 'add', 'remove' permissions for all queues. -->
 <queue-permission name="*" principal="dev">
 <endpoints>
 <endpoint>192.168.1.1-100</endpoint>
 <endpoint>192.168.2.*</endpoint>
 </endpoints>
 <actions>
 <action>create</action>
 <action>add</action>
 <action>remove</action>
 </actions>
 </queue-permission>

 <!-- All principals from all endpoints have transaction permission.-->
 <transaction-permission />
 </client-permissions>
</security>

```

You can also define your own policy by implementing `com.hazelcast.security.IPermissionPolicy`.

```

package com.hazelcast.security;
/**
 * IPermissionPolicy is used to determine any Subject's
 * permissions to perform a security sensitive Hazelcast operation.
 *
 */
public interface IPermissionPolicy {
 void configure(SecurityConfig securityConfig, Properties properties);

 PermissionCollection getPermissions(Subject subject,
 Class<? extends Permission> type);

 void destroy();
}

```

Permission policy implementations can access client-permissions in configuration by using `SecurityConfig.getClientPermissionConfigs()` when the method `configure(SecurityConfig securityConfig, Properties properties)` is called by Hazelcast.

The `IPermissionPolicy.getPermissions(Subject subject, Class<? extends Permission> type)` method is used to determine a client request that has been granted permission to perform a security-sensitive operation.

Permission policy should return a `PermissionCollection` containing permissions of the given type for the given Subject. The Hazelcast access controller will call `PermissionCollection.implies(Permission)` on returning `PermissionCollection` and will decide if the current Subject has permission to access the requested resources or not.

### 19.9.3 Permissions

- All Permission

```

<all-permissions principal="principal">
 <endpoints>
 ...
 </endpoints>
</all-permissions>

```

- Map Permission

```

<map-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</map-permission>

```

Actions: all, create, destroy, put, read, remove, lock, intercept, index, listen

- Queue Permission

```

<queue-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>

```

```

 ...
 </actions>
</queue-permission>

```

Actions: all, create, destroy, add, remove, read, listen

- Multimap Permission

```

<multimap-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</multimap-permission>

```

Actions: all, create, destroy, put, read, remove, listen, lock

- Topic Permission

```

<topic-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</topic-permission>

```

Actions: create, destroy, publish, listen

- List Permission

```

<list-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</list-permission>

```

Actions: all, create, destroy, add, read, remove, listen

- Set Permission

```

<set-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</set-permission>

```

Actions: all, create, destroy, add, read, remove, listen

- Lock Permission

```
<lock-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</lock-permission>
```

Actions: all, create, destroy, lock, read

- AtomicLong Permission

```
<atomic-long-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</atomic-long-permission>
```

Actions: all, create, destroy, read, modify

- CountDownLatch Permission

```
<countdown-latch-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</countdown-latch-permission>
```

Actions: all, create, destroy, modify, read

- IdGenerator Permission

```
<id-generator-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</id-generator-permission>
```

Actions: all, create, destroy, modify, read

- Semaphore Permission

```
<semaphore-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</semaphore-permission>
```

Actions: all, create, destroy, acquire, release, read

- Executor Service Permission

```
<executor-service-permission name="name" principal="principal">
 <endpoints>
 ...
 </endpoints>
 <actions>
 ...
 </actions>
</executor-service-permission>
```

Actions: all, create, destroy

- Transaction Permission

```
<transaction-permission principal="principal">
 <endpoints>
 ...
 </endpoints>
</transaction-permission>
```



# Chapter 20

## Performance

This chapter provides information on the performance features of Hazelcast including slow operations detector, back pressure and data affinity. Moreover, the chapter describes the best performance practices for Hazelcast deployed on Amazon EC2. It also describes the threading models for I/O, events, executors and operations.

### 20.1 Data Affinity

Data affinity ensures that related entries exist on the same node. If related data is on the same node, operations can be executed without the cost of extra network calls and extra wire data. This feature is provided by using the same partition keys for related data.

#### Co-location of related data and computation

Hazelcast has a standard way of finding out which member owns/manages each key object. The following operations will be routed to the same member, since all of them are operating based on the same key "key1".

```
HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
Map mapA = hazelcastInstance.getMap("mapA");
Map mapB = hazelcastInstance.getMap("mapB");
Map mapC = hazelcastInstance.getMap("mapC");

// since map names are different, operation will be manipulating
// different entries, but the operation will take place on the
// same member since the keys ("key1") are the same
mapA.put("key1", value);
mapB.get("key1");
mapC.remove("key1");

// lock operation will still execute on the same member
// of the cluster since the key ("key1") is same
hazelcastInstance.getLock("key1").lock();

// distributed execution will execute the 'runnable' on the
// same member since "key1" is passed as the key.
hazelcastInstance.getExecutorService().executeOnKeyOwner(runnable, "key1");
```

When the keys are the same, entries are stored on the same node. But we sometimes want to have related entries stored on the same node, such as a customer and his/her order entries. We would have a customers map with customerId as the key and an orders map with orderId as the key. Since customerId and orderId are different keys, a customer and his/her orders may fall into different members/nodes in your cluster. So how can we have them stored on the same node? We create an affinity between customer and orders. If we make them part of the same partition then these entries will be co-located. We achieve this by making orderIds **PartitionAware**.

```

public class OrderKey implements Serializable, PartitionAware {

 private final long customerId;
 private final long orderId;

 public OrderKey(long orderId, long customerId) {
 this.customerId = customerId;
 this.orderId = orderId;
 }

 public long getCustomerId() {
 return customerId;
 }

 public long getOrderId() {
 return orderId;
 }

 public Object getPartitionKey() {
 return customerId;
 }

 @Override
 public String toString() {
 return "OrderKey{"
 + "customerId=" + customerId
 + ", orderId=" + orderId
 + '}';
 }
}

```

Notice that `OrderKey` implements `PartitionAware` and that `getPartitionKey()` returns the `customerId`. This will make sure that the `Customer` entry and its `Orders` will be stored on the same node.

```

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();
Map mapCustomers = hazelcastInstance.getMap("customers");
Map mapOrders = hazelcastInstance.getMap("orders");

// create the customer entry with customer id = 1
mapCustomers.put(1, customer);

// now create the orders for this customer
mapOrders.put(new OrderKey(21, 1), order);
mapOrders.put(new OrderKey(22, 1), order);
mapOrders.put(new OrderKey(23, 1), order);

```

Assume that you have a `customers` map where `customerId` is the key and the `customer` object is the value. You want to remove one of the customer orders and return the number of remaining orders. Here is how you would normally do it.

```

public static int removeOrder(long customerId, long orderId) throws Exception {
 IMap<Long, Customer> mapCustomers = instance.getMap("customers");
 IMap mapOrders = hazelcastInstance.getMap("orders");

 mapCustomers.lock(customerId);
 mapOrders.remove(orderId);
 Set orders = orderMap.keySet(Predicates.equal("customerId", customerId));
}

```

```

mapCustomers.unlock(customerId);

return orders.size();
}

```

There are couple of things you should consider.

1. There are four distributed operations there: lock, remove, keySet, unlock. Can you reduce the number of distributed operations?
2. The customer object may not be that big, but can you not have to pass that object through the wire? Think about a scenario where you set order count to the customer object for fast access, so you should do a get and a put, and as a result, the customer object is passed through the wire twice.

Instead, why not move the computation over to the member (JVM) where your customer data resides. Here is how you can do this with distributed executor service.

1. Send a `PartitionAware Callable` task.
2. `Callable` does the deletion of the order right there and returns with the remaining order count.
3. Upon completion of the `Callable` task, return the result (remaining order count). You do not have to wait until the task is completed; since distributed executions are asynchronous, you can do other things in the meantime.

Here is some example code.

```

HazelcastInstance hazelcastInstance = Hazelcast.newHazelcastInstance();

public int removeOrder(long customerId, long orderId) throws Exception {
 IExecutorService executorService
 = hazelcastInstance.getExecutorService("ExecutorService");

 OrderDeletionTask task = new OrderDeletionTask(customerId, orderId);
 Future<Integer> future = executorService.submit(task);
 int remainingOrders = future.get();

 return remainingOrders;
}

public static class OrderDeletionTask
 implements Callable<Integer>, PartitionAware, Serializable {

 private long customerId;
 private long orderId;

 public OrderDeletionTask() {
 }

 public OrderDeletionTask(long customerId, long orderId) {
 this.customerId = customerId;
 this.orderId = orderId;
 }

 @Override
 public Integer call() {
 Map<Long, Customer> customerMap = hazelcastInstance.getMap("customers");
 IMap<OrderKey, Order> orderMap = hazelcastInstance.getMap("orders");
 }
}

```

```

mapCustomers.lock(customerId);
Customer customer = mapCustomers.get(customerId);
Predicate predicate = Predicates.equal("customerId", customerId);
Set<OrderKey> orderKeys = orderMap.localKeySet(predicate);
int orderCount = orderKeys.size();
for (OrderKey key : orderKeys) {
 if (key.orderId == orderId) {
 orderCount--;
 orderMap.delete(key);
 }
}
mapCustomers.unlock(customerId);

return orderCount;
}

@Override
public Object getPartitionKey() {
 return customerId;
}
}

```

The benefits of doing the same operation with distributed `ExecutorService` based on the key are:

- Only one distributed execution (`executorService.submit(task)`), instead of four.
- Less data is sent over the wire.
- Since lock/update/unlock cycle is done locally (local to the customer data), lock duration for the `Customer` entry is much less, thus enabling higher concurrency.

## 20.2 Back Pressure

Hazelcast uses operations to make remote calls. For example, a `map.get` is an operation and a `map.put` is one operation for the primary and one operation for each of the backups, i.e. `map.put` is executed for the primary and also for each backup. In most cases, there will be a natural balance between the number of threads performing operations and the number of operations being executed. However, there are two situations where this balance and operations can pile up and eventually lead to Out of Memory Exception (OOM):

- Asynchronous calls: With async calls, the system may be flooded with the requests.
- Asynchronous backups: The asynchronous backups may be piling up.

To prevent the system from crashing, Hazelcast provides back pressure. Back pressure works by:

- limiting the number of concurrent operation invocations,
- periodically making an async backup sync.

Back pressure is disabled by default and you can enable it using the following system property:

```
hazelcast.backpressure.enabled
```

To control the number of concurrent invocations, you can configure the number of invocations allowed per partition using the following system property:

```
hazelcast.backpressure.max.concurrent.invocations.per.partition
```

The default value of this system property is 100. Using a default configuration a system is allowed to have  $(271 + 1) * 100 = 27200$  concurrent invocations (271 partitions + 1 for generic operations).

Back pressure is only applied to normal operations. System operations like heart beats and partition migration operations are not influenced by back pressure. 27200 invocations might seem like a lot, but keep in mind that executing a task on `IExecutor` or acquiring a lock also requires an operation.

If the maximum number of invocations has been reached, Hazelcast will automatically apply an exponential back off policy. This gives the system some time to deal with the load. Using the following system property, you can configure the maximum time to wait before a `HazelcastOverloadException` is thrown:

```
hazelcast.backpressure.backoff.timeout.millis
```

This system property's default value is 60000 ms.

The Health Monitor keeps an eye on the usage of the invocations. If it sees a member has consumed 70% or more of the invocations, it starts to log health messages.

Apart from controlling the number of invocations, you also need to control the number of pending async backups. This is done by periodically making these backups sync instead of async. This forces all pending backups to get drained. For this, Hazelcast tracks the number of asynchronous backups for each partition. At every **Nth** call, one synchronization is forced. This **N** is controlled through the following property:

```
hazelcast.backpressure.syncwindow
```

This system property's default value is 100. It means, out of 100 *asynchronous* backups, Hazelcast makes 1 of them a *synchronous* one. A randomization is added, so the sync window with default configuration will be between 75 and 125 invocations.

## RELATED INFORMATION

Please refer to the [System Properties section](#) to learn how to configure the system properties.

## 20.3 Threading Model

Your application server has its own threads. Hazelcast does not use these; it manages its own threads.

### 20.3.1 I/O Threading

Hazelcast uses a pool of threads for I/O. A single thread does not perform all the I/O. Instead, multiple threads perform the I/O. On each cluster member, the I/O threading is split up in 3 types of I/O threads:

- I/O thread for the accept requests.
- I/O threads to read data from other members/clients.
- I/O threads to write data to other members/clients.

You can configure the number of I/O threads using the `hazelcast.io.thread.count` system property. Its default value is 3 per member. If 3 is used, in total there are 7 I/O threads: 1 accept I/O thread, 3 read I/O threads, and 3 write I/O threads. Each I/O thread has its own Selector instance and waits on the `Selector.select` if there is nothing to do.



**NOTE:** You can also specify counts for input and output threads separately. There are `hazelcast.io.input.thread.count` and `hazelcast.io.output.thread.count` properties for this purpose. Please refer to the [System Properties section](#) for information on these properties and how to set them.

Hazelcast periodically scans utilization of each I/O thread and can decide to migrate a connection to a new thread if the existing thread is servicing a disproportionate number of I/O events. You can customize the scanning interval by configuring the `hazelcast.io.balancer.interval.seconds` system property; its default interval is 20 seconds. You can disable the balancing process by setting this property to a negative value.

In case of the read I/O thread, when sufficient bytes for a packet have been received, the `Packet` object is created. This `Packet` object is then sent to the system where it is de-multiplexed. If the `Packet` header signals that it is an operation/response, the `Packet` is handed over to the operation service (please see the [Operation Threading section](#)). If the `Packet` is an event, it is handed over to the event service (please see the [Event Threading section](#)).

### 20.3.2 Event Threading

Hazelcast uses a shared event system to deal with components that rely on events, such as topic, collections, listeners, and Near Cache.

Each cluster member has an array of event threads and each thread has its own work queue. When an event is produced, either locally or remotely, an event thread is selected (depending on if there is a message ordering) and the event is placed in the work queue for that event thread.

The following properties can be set to alter the behavior of the system.

- `hazelcast.event.thread.count`: Number of event-threads in this array. Its default value is 5.
- `hazelcast.event.queue.capacity`: Capacity of the work queue. Its default value is 1000000.
- `hazelcast.event.queue.timeout.millis`: Timeout for placing an item on the work queue. Its default value is 250.

If you process a lot of events and have many cores, changing the value of `hazelcast.event.thread.count` property to a higher value is a good practice. This way, more events can be processed in parallel.

Multiple components share the same event queues. If there are 2 topics, say A and B, for certain messages they may share the same queue(s) and hence the same event thread. If there are a lot of pending messages produced by A, then B needs to wait. Also, when processing a message from A takes a lot of time and the event thread is used for that, B suffers from this. That is why it is better to offload processing to a dedicated thread (pool) so that systems are better isolated.

If the events are produced at a higher rate than they are consumed, the queue grows in size. To prevent overloading the system and running into an `OutOfMemoryException`, the queue is given a capacity of 1 million items. When the maximum capacity is reached, the items are dropped. This means that the event system is a ‘best effort’ system. There is no guarantee that you are going to get an event. Topic A might have a lot of pending messages and therefore B cannot receive messages because the queue has no capacity and messages for B are dropped.

### 20.3.3 IExecutor Threading

Executor threading is straight forward. When a task is received to be executed on Executor E, then E will have its own `ThreadPoolExecutor` instance and the work is placed in the work queue of this executor. Thus, Executors are fully isolated, but still share the same underlying hardware - most importantly the CPUs.

You can configure the `IExecutor` using the `ExecutorConfig` (programmatic configuration) or using `<executor>` (declarative configuration). Please also see the [Configuring Executor Threads section](#).

### 20.3.4 Operation Threading

There are 2 types of operations:

- Operations that are aware of a certain partition, e.g. `IMap.get(key)`.
- Operations that are not partition aware, such as the `IExecutorService.executeOnMember(command, member)` operation.

Each of these operation types has a different threading model explained in the following sections.

#### 20.3.4.1 Partition-aware Operations

To execute partition-aware operations, an array of operation threads is created. The size of this array has a default value of two times the number of cores and a minimum value of 2. This value can be changed using the `hazelcast.operation.thread.count` property.

Each operation thread has its own work queue and it consumes messages from this work queue. If a partition-aware operation needs to be scheduled, the right thread is found using the formula below.

```
threadIndex = partitionId % partition thread-count
```

After the `threadIndex` is determined, the operation is put in the work queue of that operation thread. This means the followings:

- A single operation thread executes operations for multiple partitions; if there are 271 partitions and 10 partition threads, then roughly every operation thread executes operations for 27 partitions.
- Each partition belongs to only 1 operation thread. All operations for a partition are always handled by exactly the same operation thread.
- Concurrency control is not needed to deal with partition-aware operations because once a partition-aware operation is put in the work queue of a partition-aware operation thread, only 1 thread is able to touch that partition.

Because of this threading strategy, there are two forms of false sharing you need to be aware of:

- False sharing of the partition - two completely independent data structures share the same partition. For example, if there is a map `employees` and a map `orders`, the method `employees.get("peter")` running on partition 25 may be blocked by the method `orders.get(1234)` also running on partition 25. If independent data structures share the same partition, a slow operation on one data structure can slow down the other data structures.
- False sharing of the partition-aware operation thread - each operation thread is responsible for executing operations on a number of partitions. For example, *thread 1* could be responsible for partitions 0, 10, 20, etc. and *thread-2* could be responsible for partitions 1, 11, 21, etc. If an operation for partition 1 takes a lot of time, it blocks the execution of an operation for partition 11 because both of them are mapped to the same operation thread.

You need to be careful with long running operations because you could starve operations of a thread. As a general rule, the partition thread should be released as soon as possible because operations are not designed as long running operations. That is why, for example, it is very dangerous to execute a long running operation using `AtomicReference.alter()` or an `IMap.executeOnKey()`, because these operations block other operations to be executed.

Currently, there is no support for work stealing. Different partitions that map to the same thread may need to wait till one of the partitions is finished, even though there are other free partition-aware operation threads available.

#### Example:

Take a 3 node cluster. Two members will have 90 primary partitions and one member will have 91 primary partitions. Let's say you have one CPU and 4 cores per CPU. By default, 8 operation threads will be allocated to serve 90 or 91 partitions.

#### 20.3.4.2 Operations that are Not Partition-aware

To execute operations that are not partition-aware, e.g. `IExecutorService.executeOnMember(command, member)`, generic operation threads are used. When the Hazelcast instance is started, an array of operation threads is created. The size of this array has a default value of the number of cores divided by two with a minimum value of 2. It can be changed using the `hazelcast.operation.generic.thread.count` property.

A non-partition-aware operation thread does not execute an operation for a specific partition. Only partition-aware operation threads execute partition-aware operations.

Unlike the partition-aware operation threads, all the generic operation threads share the same work queue: `genericWorkQueue`.

If a non-partition-aware operation needs to be executed, it is placed in that work queue and any generic operation thread can execute it. The big advantage is that you automatically have work balancing since any generic operation thread is allowed to pick up work from this queue.

The disadvantage is that this shared queue can be a point of contention. You may not see this contention in production since performance is dominated by I/O and the system does not run many non-partition-aware operations.

### 20.3.4.3 Priority Operations

In some cases, the system needs to run operations with a higher priority, e.g. an important system operation. To support priority operations, Hazelcast has the following features:

- For partition-aware operations: Each partition thread has its own work queue and it also has a priority work queue. The partition thread always checks the priority queue before it processes work from its normal work queue.
- For non-partition-aware operations: Next to the `genericWorkQueue`, there is also a `genericPriorityWorkQueue`. When a priority operation needs to be run, it is put in the `genericPriorityWorkQueue`. Like the partition-aware operation threads, a generic operation thread first checks the `genericPriorityWorkQueue` for work.

Since a worker thread blocks on the normal work queue (either partition specific or generic), a priority operation may not be picked up because it is not put in the queue where it is blocking. Hazelcast always sends a ‘kick the worker’ operation that only triggers the worker to wake up and check the priority queue.

### 20.3.4.4 Operation-response and Invocation-future

When an Operation is invoked, a Future is returned. Please see the example code below.

```
GetOperation operation = new GetOperation(mapName, key);
Future future = operationService.invoke(operation);
future.get();
```

The calling side blocks for a reply. In this case, `GetOperation` is set in the work queue for the partition of `key`, where it eventually is executed. Upon execution, a response is returned and placed on the `genericWorkQueue` where it is executed by a “generic operation thread”. This thread signals the `future` and notifies the blocked thread that a response is available. Hazelcast has a plan of exposing this `future` to the outside world, and we will provide the ability to register a completion listener so you can perform asynchronous calls.

### 20.3.4.5 Local Calls

When a local partition-aware call is done, an operation is made and handed over to the work queue of the correct partition operation thread, and a `future` is returned. When the calling thread calls `get` on that `future`, it acquires a lock and waits for the result to become available. When a response is calculated, the `future` is looked up and the waiting thread is notified.

In the future, this will be optimized to reduce the amount of expensive systems calls, such as `lock.acquire()/notify()` and the expensive interaction with the operation-queue. Probably, we will add support for a caller-runs mode, so that an operation is directly run on the calling thread.

## 20.4 SlowOperationDetector

The `SlowOperationDetector` monitors the operation threads and collects information about all slow operations. An Operation is a task executed by a generic or partition thread (see [Operation Threading](#)). An operation is considered as slow when it takes more computation time than the configured threshold.

The `SlowOperationDetector` stores the fully qualified classname of the operation and its stacktrace as well as operation details, start time and duration of each slow invocation. All collected data is available in the [Management Center](#).

The `SlowOperationDetector` is configured via the following system properties.



- `hazelcast.slow.operation.detector.enabled`
- `hazelcast.slow.operation.detector.log.purge.interval.seconds`
- `hazelcast.slow.operation.detector.log.retention.seconds`
- `hazelcast.slow.operation.detector.stacktrace.logging.enabled`
- `hazelcast.slow.operation.detector.threshold.millis`

Please refer to the [System Properties section](#) for explanations of these properties.

### 20.4.1 Logging of Slow Operations

The detected slow operations are logged as warnings in the Hazelcast log files:

```
WARN 2015-05-07 11:05:30,890 SlowOperationDetector: [127.0.0.1]:5701
 Slow operation detected: com.hazelcast.map.impl.operation.PutOperation
 Hint: You can enable the logging of stacktraces with the following config
 property: hazelcast.slow.operation.detector.stacktrace.logging.enabled
WARN 2015-05-07 11:05:30,891 SlowOperationDetector: [127.0.0.1]:5701
 Slow operation detected: com.hazelcast.map.impl.operation.PutOperation
 (2 invocations)
WARN 2015-05-07 11:05:30,892 SlowOperationDetector: [127.0.0.1]:5701
 Slow operation detected: com.hazelcast.map.impl.operation.PutOperation
 (3 invocations)
```

Stacktraces are always reported to the Management Center, but by default they are not printed to keep the log size small. If logging of stacktraces is enabled, the full stacktrace is printed every 100 invocations. All other invocations print a shortened version.

### 20.4.2 Purging of Slow Operation Logs

Since a Hazelcast cluster can run for a very long time, Hazelcast purges the slow operation logs periodically to prevent an OOME. You can configure the purge interval and the retention time for each invocation.

The purging removes each invocation whose retention time is exceeded. When all invocations are purged from a slow operation log, the log is deleted.

## 20.5 Hazelcast Performance on AWS

Amazon Web Services (AWS) platform can be an unpredictable environment compared to traditional in-house data centers. This is because the machines, databases or CPUs are shared with other unknown applications in the cloud, causing fluctuations. When you gear up your Hazelcast application from a physical environment to Amazon EC2, you should configure it so that any network outage or fluctuation is minimized and its performance is maximized. This section provides notes on improving the performance of Hazelcast on AWS.

### 20.5.1 Selecting EC2 Instance Type

Hazelcast is an in-memory data grid that distributes the data and computation to the nodes that are connected with a network, making Hazelcast very sensitive to the network. Not all EC2 Instance types are the same in terms of the network performance. It is recommended that you choose instances that have **10 Gigabit** or **High** network performance for Hazelcast deployments. Please see the below table for the recommended instances.

Instance Type	Network Performance
m3.2xlarge	High
m1.xlarge	High

Instance Type	Network Performance
c3.2xlarge	High
c3.4xlarge	High
c3.8xlarge	10 Gigabit
c1.xlarge	High
cc2.8xlarge	10 Gigabit
m2.4xlarge	High
cr1.8xlarge	10 Gigabit

### 20.5.2 Dealing with Network Latency

Since data is sent and received very frequently in Hazelcast applications, latency in the network becomes a crucial issue. In terms of the latency, AWS cloud performance is not the same for each region. There are vast differences in the speed and optimization from region to region.

When you do not pay attention to AWS regions, Hazelcast applications may run tens or even hundreds of times slower than necessary. The following notes are potential workarounds.

- Create a cluster only within a region. It is not recommended that you deploy a single cluster that spans across multiple regions.
- If a Hazelcast application is hosted on Amazon EC2 instances in multiple EC2 regions, you can reduce the latency by serving the end users' requests from the EC2 region which has the lowest network latency. Changes in network connectivity and routing result in changes in the latency between hosts on the Internet. Amazon has a web service (Route 53) that lets the cloud architects use DNS to route end-user requests to the EC2 region that gives the fastest response. This latency-based routing is based on latency measurements performed over a period of time. Please have a look at Route53.
- Move the deployment to another region. The CloudPing tool gives instant estimates on the latency from your location. By using it frequently, CloudPing can be helpful to determine the regions which have the lowest latency.
- The SpeedTest tool allows you to test the network latency and also the downloading/uploading speeds.

### 20.5.3 Selecting Virtualization

AWS uses two virtualization types to launch the EC2 instances: Para-Virtualization (PV) and Hardware-assisted Virtual Machine (HVM). According to the tests we performed, HVM provided up to three times higher throughput than PV. Therefore, we recommend you use HVM when you run Hazelcast on EC2.

# Chapter 21

## Hazelcast Simulator

Hazelcast Simulator is a production simulator used to test Hazelcast and Hazelcast-based applications in clustered environments. It also allows you to create your own tests and perform them on your Hazelcast clusters and applications that are deployed to cloud computing environments. In your tests, you can provide any property that can be specified on these environments (Amazon EC2, Google Compute Engine(GCE), or your own environment): properties such as hardware specifications, operating system, Java version, etc.

Hazelcast Simulator allows you to add potential production problems, such as real-life failures, network problems, overloaded CPU, and failing nodes to your tests. It also provides a benchmarking and performance testing platform by supporting performance tracking and also supporting various out-of-the-box profilers.

Hazelcast Simulator makes use of Apache jclouds®, an open source multi-cloud toolkit that is primarily designed for testing on the clouds like Amazon EC2 and GCE.

You can use Hazelcast Simulator for the following use cases:

- In your pre-production phase to simulate the expected throughput/latency of Hazelcast with your specific requirements.
- To test if Hazelcast behaves as expected when you implement a new functionality in your project.
- As part of your test suite in your deployment process.
- When you upgrade your Hazelcast version.

Hazelcast Simulator is available as a downloadable package on the Hazelcast web site. Please refer to the [Installing Simulator section](#) for more information.

### 21.1 Key Concepts

The following are the key concepts mentioned with Hazelcast Simulator.

- **Test** - A test class for the functionality you want to test, such as a Hazelcast map. This test class may seem like a JUnit test, but it uses custom annotations to define methods for different test phases (e.g. setup, warmup, run, verify).
- **TestSuite** - A property file that contains the name of the test class and the properties you want to set on that test class instance. In most cases, a **TestSuite** contains a single test class, but you can configure multiple tests within a single **TestSuite**.
- **Failure** - An indication that something has gone wrong. Failures are picked up by the **Agent** and sent back to the **Coordinator**. Please see the descriptions below for the **Agent** and **Coordinator**.
- **Worker** - A Java Virtual Machine (JVM) responsible for running a **TestSuite**. It can be configured to spawn a Hazelcast client or member instance.

- **Agent** - A JVM installed on a piece of hardware. Its main responsibility is spawning, monitoring and terminating **Workers**.
- **Coordinator** - A JVM that can run anywhere, such as on your local machine. **Coordinator** is actually responsible for running the test using the **Agents**. You configure it with a list of **Agent** IP addresses, and you run it by sending a command like “run this testsuite with 10 worker JVMs for 2 hours”.
- **Provisioner** - Spawns and terminates cloud instances, and installs **Agents** on the remote machines. It can be used in combination with EC2 (or any other cloud), but it can also be used in a static setup, such as a local machine or a cluster of machines in your data center.
- **Communicator** - A JVM that enables the communication between the **Agents** and **Workers**.
- `simulator.properties` - The configuration file you use to adapt the Hazelcast Simulator to your business needs (e.g. cloud selection and configuration).

## 21.2 Installing Simulator

Hazelcast Simulator needs a Unix shell to run. Ensure that your local and remote machines are running under Unix, Linux or Mac OS. Hazelcast Simulator may work with Windows using a Unix-like environment such as Cygwin, but that is not officially supported at the moment.

### 21.2.1 Firewall Settings

Please ensure that all remote machines are reachable via TCP ports 22, 9000 and 5701 to 5751 on their external network interface (for example, `eth0`). The first two ports are used by Hazelcast Simulator. The other ports are used by Hazelcast itself. Port 9001 is used on the loopback device on all remote machines for local communication.

### 21.2.2 Setting Up the Local Machine (Coordinator)

Hazelcast Simulator is provided as a separate downloadable package, in `zip` or `tar.gz` format. You can download either one [here](#).

After the download is completed, follow the below steps.

- Unpack the `tar.gz` or `zip` file to a folder that you prefer to be the home folder for Hazelcast Simulator. The file extracts with the name `hazelcast-simulator-<version>`. (If you are updating Hazelcast Simulator, perform this same unpacking, but skip the following steps.)
- Add the following lines to the file `~/.bashrc` (for Unix/Linux) or to the file `~/.profile` (for Mac OS).

```
export SIMULATOR_HOME=<extracted folder path>/hazelcast-simulator-<version>
PATH=$SIMULATOR_HOME/bin:$PATH
```

- Create a working folder for your Simulator TestSuite (`tests` is an example name in the following commands).

```
mkdir ~/tests
```

- Copy the `simulator.properties` file to your working folder.

```
cp $SIMULATOR_HOME/conf/simulator.properties ~/tests
```

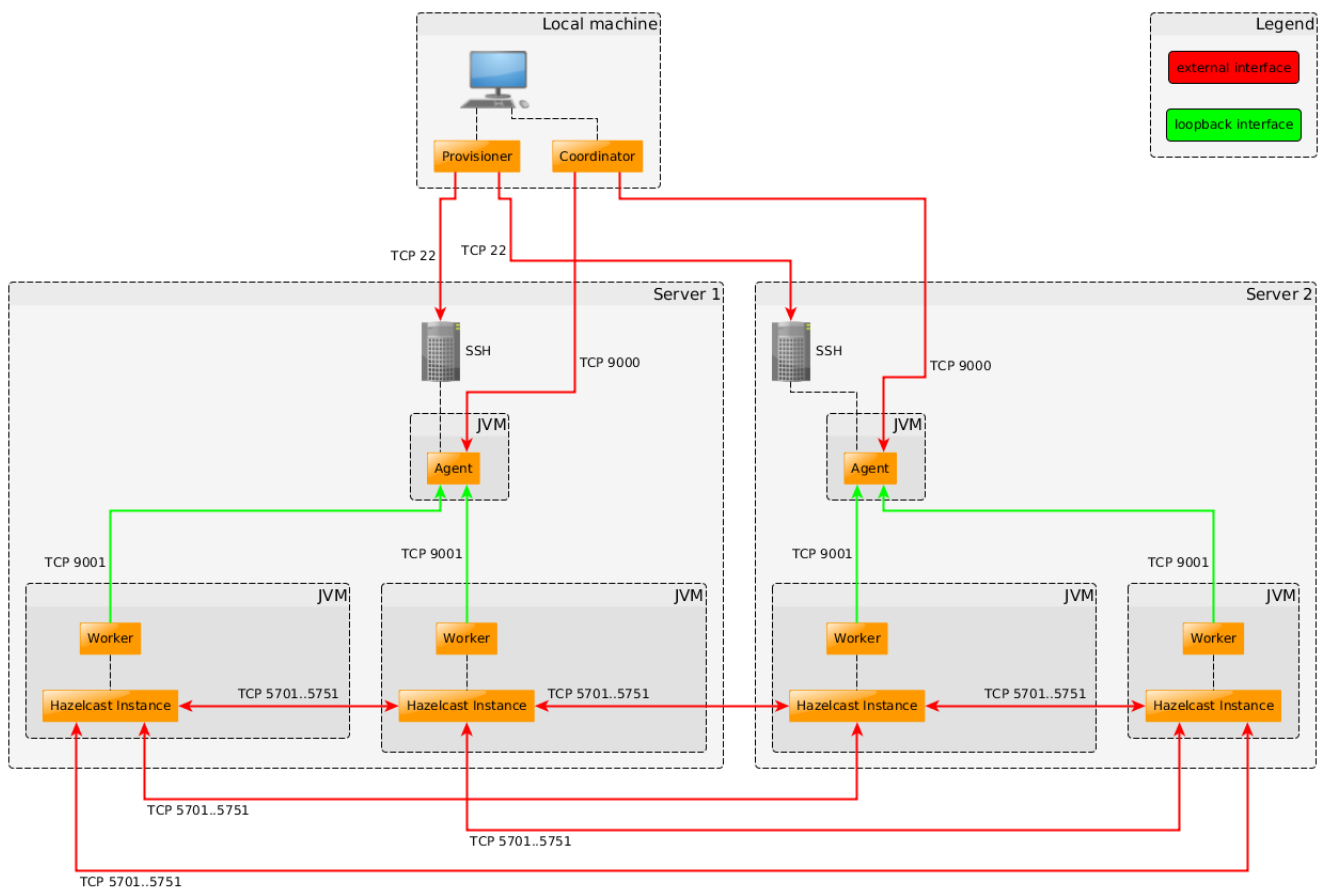


Figure 21.1:

### 21.2.3 Setting Up the Remote Machines (Agents, Workers)

After you have installed Hazelcast Simulator as described in the previous section, make sure you create a user on the remote machines upon which you want to run **Agents** and **Workers**. The default username used by Hazelcast Simulator is `simulator`. You can change this in the `simulator.properties` file in your working folder.

Please ensure that you can connect to the remote machines with the configured username and without password authentication (see the next section). The **Provisioner** terminates when it needs to access the remote machines and cannot connect automatically.

### 21.2.4 Setting Up the Public/Private Key Pair

The preferred method for password free authentication is using an RSA (Rivest, Shamir and Adleman cryptosystem) public/private key pair. The RSA key should not require you to enter the pass-phrase manually. A key with a pass-phrase and ssh-agent-forwarding is strongly recommended, but a key without a pass-phrase also works.

#### 21.2.4.1 Local Machine (Coordinator)

Make sure you have the files `id_rsa.pub` and `id_rsa` in your local `~/.ssh` folder.

If you do not have the RSA keys, you can generate a public/private key pair using the following command.

```
ssh-keygen -t rsa -C "your_email@example.com"
```

Press **[Enter]** for all questions. The value for the e-mail address is not relevant in this case. After you execute this command, you should have the files `id_rsa.pub` and `id_rsa` in your `~/.ssh` folder.

#### 21.2.4.2 Remote Machines (Agents, Workers)

Please ensure you have appended the public key (`id_rsa.pub`) to the `~/.ssh/authorized_keys` file on all remote machines (**Agents** and **Workers**). You can copy the public key to all your remote machines using the following command.

```
ssh-copy-id -i ~/.ssh/id_rsa.pub simulator@remote-ip-address
```

#### 21.2.4.3 SSH Connection Test

You can check if the connection works as expected using the following command from the **Coordinator** machine (it will print `ok` if everything is fine).

```
ssh -o BatchMode=yes simulator@remote-ip-address "echo ok" 2>&1
```

## 21.3 Setting Up For Amazon EC2

Having installed the Simulator, this section describes how to prepare the Simulator for testing a Hazelcast cluster deployed at Amazon EC2.

To do this, copy the file `SIMULATOR_HOME/conf/simulator.properties` to your working folder and edit this file. You should set the values for the following parameters that are included in this file.

- **CLOUD\_PROVIDER**: Maven artifact ID of the cloud provider. In this case it is `aws-ec2` for Amazon EC2. Please refer to the Simulator.Properties File Description section for a full list of cloud providers.
- **CLOUD\_IDENTITY**: The path to the file that contains your EC2 access key.
- **CLOUD\_CREDENTIAL**: The path to the file that contains your EC2 secret key.

- **MACHINE\_SPEC**: The parameter by which you can specify the EC2 instance type, operating system of the instance, EC2 region, etc.

The following is an example of a `simulator.properties` file with the parameters explained above. For this example, you should have created the files `~/ec2.identity` and `~/ec2.credential` that contain your EC2 access key and secret key, respectively.

```
CLOUD_PROVIDER=aws-ec2
CLOUD_IDENTITY=~/.ec2.identity
CLOUD_CREDENTIAL=~/.ec2.credential
MACHINE_SPEC=hardwareId=c3.xlarge,imageId=us-east-1/ami-1b3b2472
```



**NOTE:** Creating these files in your working folder instead of just setting the access and secret keys in the `simulator.properties` file is for security reasons. It is too easy to share your credentials with the outside world; now you can safely add the `simulator.properties` file in your source repository or share it with other people.



**NOTE:** For the full description of the `simulator.properties` file, please refer to the *Simulator.Properties File Description* section.

## 21.4 Setting Up For Google Compute Engine

To prepare the Simulator for testing a Hazelcast cluster deployed at Google Compute Engine (GCE), first you need an e-mail address to be used as a GCE service account. You can obtain this e-mail address in the Admin GUI console of GCE. In this console, select **Credentials** in the menu **API & Auth**. Then, click the **Create New Client ID** button and select **Service Account**. Usually, this e-mail address is in this form: `<your account ID>@developer.gserviceaccount.com`.

Save the **p12** keystore file that you obtained while creating your Service Account (you will refer to that path). In the `bin` folder of the Hazelcast Simulator package that you downloaded, edit the `setupGce.sh` script to specify the following parameters:

- **GCE\_id**: Your developer e-mail address that you obtained in the Admin GUI console of GCE.
- **p12File**: The path to your p12 file you saved while you were obtaining your developer e-mail address.

After you run the edited `setupGce.sh` script, the `simulator.properties` file that you need for a proper testing of your instances on GCE is created in the `conf` folder of Hazelcast Simulator.

## 21.5 Setting Up Machines Manually

You may want to set up Hazelcast Simulator on the environments different than your clusters placed on a cloud: for example, your local machines, a test laboratory, etc. In this case, perform the following steps.

1. Copy the `SIMULATOR_HOME/conf/simulator.properties` to your working directory.
2. Change `CLOUD_PROVIDER` to 'static'
3. Edit the `USER` in the `simulator.properties` file if you want to use a different user name than `simulator`.
4. Create an RSA key pair or use an existing one. Using the key should not require entering the pass-phrase manually. A key with pass-phrase and `ssh-agent-forwarding` is strongly recommended, but a key without a pass-phrase will also work.

You can check whether a key pair exists with this command:

```
ls -al ~/.ssh
```

If it does not exist, you can create a key pair on the client machine with this command:

```
ssh-keygen -t rsa
```

You will get a few more questions:

- \* Enter a file in which to save the key (/home/demo/.ssh/id\_rsa):
- \* Enter a pass-phrase (empty for no pass-phrase): (pass-phrase is optional)

5. Copy the public key into the ~/.ssh/authorized\_keys file on the remote machines with this command:

```
ssh-copy-id user@123.45.56.78
```

6. Create the `agents.txt` file and add the IP addresses of the machines. The content of the `agents.txt` file with the IP addresses added looks like the following:

```
98.76.65.54 10.28.37.46
```

7. Run the command `provisioner --restart` to verify.



**NOTE:** For the full description of the `simulator.properties` file, please refer to the *Simulator.Properties File Description* section.

## 21.6 Executing a Simulator Test

After you install and prepare the Hazelcast Simulator for your environment, it is time to perform a test. In the following sections, you are going to verify the setup by running a simple map test with strings as keys and values.

You can start with creating the working folder.

```
mkdir simulator-example
```

A path of working folder needs to be visible in the output of the provisioner/coordinator.

### 21.6.1 Creating and Editing Properties File

You need to create the file `test.properties` in the working folder. Execute the following command to create and edit this file.

```
cat > test.properties
```

Copy the following lines into the file `test.properties`.

```
class=com.hazelcast.simulator.tests.map.StringStringMapTest
threadCount=10
keyLocality=Random
keyLength=300
valueLength=300
keyCount=100000
putProb=0.2
basename=map
```



The property `class` defines the actual test case and the rest are the properties you want to bind to your test. If a property is not defined in this file, the default value of the property given in your test code is used. Please see the `properties` comment in the `StringStringMapTest`. You will see the following.

```
// properties
public int keyLength = 10;
public int valueLength = 10;
public int keyCount = 10000;
public int valueCount = 10000;
public String basename = "stringStringMap";
public KeyLocality keyLocality = KeyLocality.RANDOM;
public int minNumberOfMembers = 0;
```

After you created the file `test.properties` and set your properties successfully, you need to configure the simulator using the file `simulator.properties`.

Execute the following command to create and edit this file.

```
cat > simulator.properties
```

Copy the following lines into this file and set the properties.

```
CLOUD_PROVIDER=aws-ec2
CLOUD_IDENTITY=~/.ec2.identity
CLOUD_CREDENTIAL=~/.ec2.credential
MACHINE_SPEC=hardwareId=m3.medium,locationId=us-east-1,imageId=us-east-1/ami-fb8e9292
JDK_FLAVOR=oracle
JDK_VERSION=7
```

Please refer to here for information on `CLOUD_IDENTITY` and `CLOUD_CREDENTIAL`.

**NOTE:** For a full description of the file `simulator.properties`, please see the *Simulator.Properties File Description* section. You can find the sample simulator properties in the `dist/simulator-tests/simulator.properties`. You can also copy this file to the working folder and then edit according to your needs.

## 21.6.2 Running the Test

When in the working folder, execute the following commands step by step to run the test.

### 1. Starting Instances

First of all, you need agents to run the test on them. Execute the following command to start 4 EC2 instances and install Java and the agents to these instances.

```
provisioner --scale 4
```

The output of the command looks like the following.

```
INFO 09:05:06 Hazelcast Simulator Provisioner
INFO 09:05:06 Version: 0.5, Commit: c6e82c5, Build Time: 18.06.2015 @ 11:58:06 UTC
INFO 09:05:06 SIMULATOR_HOME: /disk1/hazelcast-simulator-0.5
INFO 09:05:07 Loading simulator.properties: /disk1/exampleSandbox/simulator.properties
INFO 09:05:07 =====
INFO 09:05:07 Provisioning 4 aws-ec2 machines
INFO 09:05:07 =====
INFO 09:05:07 Current number of machines: 0
INFO 09:05:07 Desired number of machines: 4
```

```

INFO 09:05:07 Using init script:/disk1/hazelcast-simulator-0.5/conf/init.sh
INFO 09:05:07 JDK spec: oracle 7
INFO 09:05:07 Hazelcast version-spec: outofthebox
INFO 09:05:11 Created compute
INFO 09:05:11 Machine spec: hardwareId=m3.medium,locationId=us-east-1,imageId=us-east-1/ami-fb8e9292
INFO 09:05:18 Created template
INFO 09:05:18 Login name to the remote machines: simulator
INFO 09:05:18 Security group: 'simulator' is found in region 'us-east-1'
INFO 09:05:18 Creating machines... (can take a few minutes)
INFO 09:06:18 54.211.146.186 LAUNCHED
INFO 09:06:18 54.166.1.79 LAUNCHED
INFO 09:06:18 54.147.196.63 LAUNCHED
INFO 09:06:18 54.144.235.111 LAUNCHED
INFO 09:06:30 54.211.146.186 JAVA INSTALLED
INFO 09:06:32 54.166.1.79 JAVA INSTALLED
INFO 09:06:32 54.144.235.111 JAVA INSTALLED
INFO 09:06:34 54.147.196.63 JAVA INSTALLED
INFO 09:06:40 54.166.1.79 SIMULATOR AGENT INSTALLED
INFO 09:06:40 Killing Agent on: 54.166.1.79
INFO 09:06:40 Starting Agent on: 54.166.1.79
INFO 09:06:40 54.211.146.186 SIMULATOR AGENT INSTALLED
INFO 09:06:40 Killing Agent on: 54.211.146.186
INFO 09:06:40 54.166.1.79 SIMULATOR AGENT STARTED
INFO 09:06:40 Starting Agent on: 54.211.146.186
INFO 09:06:40 54.211.146.186 SIMULATOR AGENT STARTED
INFO 09:06:42 54.144.235.111 SIMULATOR AGENT INSTALLED
INFO 09:06:42 Killing Agent on: 54.144.235.111
INFO 09:06:42 Starting Agent on: 54.144.235.111
INFO 09:06:43 54.144.235.111 SIMULATOR AGENT STARTED
INFO 09:06:47 54.147.196.63 SIMULATOR AGENT INSTALLED
INFO 09:06:47 Killing Agent on: 54.147.196.63
INFO 09:06:47 Starting Agent on: 54.147.196.63
INFO 09:06:47 54.147.196.63 SIMULATOR AGENT STARTED
INFO 09:06:47 Pausing for machine warmup... (10 sec)
INFO 09:06:57 Duration: 00d 00h 01m 49s
INFO 09:06:57 =====
INFO 09:06:57 Successfully provisioned 4 aws-ec2 machines
INFO 09:06:57 =====
INFO 09:06:57 Shutting down Provisioner...
INFO 09:06:57 Done!

```

You can also see the file `agents.txt` that was created automatically by the provisioner in the working folder. The file `agents.txt` includes IP addresses of the started EC2 instances. You can see this file's content using the following command.

```
less agents.txt
```

First column lists the public IP addresses and the second one lists the private IP addresses. A public IP address is used for the communication between the coordinator and agent. A private IP address is used for the communications between client and member and also between member and member. A private IP address cannot be connected to from the outside of EC2 environment.

## 2. Running the Test Suite

After you created the instances and agents are installed to them, execute the following command to run your test suite.

```
coordinator test.properties
```

Please refer to the [Coordinator section](#) for detailed information about the arguments of `coordinator`.

The output looks like the following.

```
INFO 09:57:17 Hazelcast Simulator Coordinator
INFO 09:57:17 Version: 0.5, Commit: c6e82c5, Build Time: 02.07.2015 @ 09:50:21 UTC
INFO 09:57:17 SIMULATOR_HOME: /disk1/hazelcast-simulator-0.5
INFO 09:57:17 Loading simulator.properties: /disk1/exampleSandbox/simulator.properties
INFO 09:57:17 Loading testsuite file: /disk1/exampleSandbox/test.properties
INFO 09:57:17 Loading Hazelcast configuration: /disk1/hazelcast-simulator-0.5/conf/hazelcast.xml
INFO 09:57:17 Loading Hazelcast client configuration: /disk1/hazelcast-simulator-0.5/conf/client-hazelcast.xml
INFO 09:57:17 Loading Log4j configuration for worker: /disk1/hazelcast-simulator-0.5/conf/worker-log4j.xml
INFO 09:57:17 Loading agents file: /disk1/exampleSandbox/agents.txt
INFO 09:57:17 HAZELCAST_VERSION_SPEC: maven=3.5
INFO 09:57:17 -----
INFO 09:57:17 Waiting for agents to start
INFO 09:57:17 -----
INFO 09:57:17 Connect to agent 54.211.146.186 OK
INFO 09:57:17 Connect to agent 54.166.1.79 OK
INFO 09:57:17 Connect to agent 54.147.196.63 OK
INFO 09:57:17 Connect to agent 54.144.235.111 OK
INFO 09:57:17 -----
INFO 09:57:17 All agents are reachable!
INFO 09:57:17 -----
INFO 09:57:21 Performance monitor enabled: false
INFO 09:57:21 Total number of agents: 4
INFO 09:57:21 Total number of Hazelcast member workers: 4
INFO 09:57:21 Total number of Hazelcast client workers: 0
INFO 09:57:21 Agent 54.211.146.186 members: 1 clients: 0 mode: MIXED
INFO 09:57:21 Agent 54.166.1.79 members: 1 clients: 0 mode: MIXED
INFO 09:57:21 Agent 54.147.196.63 members: 1 clients: 0 mode: MIXED
INFO 09:57:21 Agent 54.144.235.111 members: 1 clients: 0 mode: MIXED
INFO 09:57:21 Killing all remaining workers
INFO 09:57:21 Successfully killed all remaining workers
INFO 09:57:21 Starting 4 member workers
INFO 09:57:41 Successfully started member workers
INFO 09:57:41 Skipping client startup, since no clients are configured
INFO 09:57:41 Successfully started a grand total of 4 Workers JVMs after 20120 ms
INFO 09:57:41 Starting testsuite: 2015-07-02__09_57_17
INFO 09:57:41 Tests in testsuite: 1
INFO 09:57:41 Running time per test: 00d 00h 01m 00s
INFO 09:57:41 Expected total testsuite time: 00d 00h 01m 00s
INFO 09:57:41 Running 1 tests sequentially
INFO 09:57:41 -----
Running Test:
TestCase{
 id=
 , class=com.hazelcast.simulator.tests.map.StringStringMapTest
 , keyCount=100000
 , keyLength=300
 , keyLocality=Random
 , putProb=0.2
 , threadCount=10
 , valueLength=300
}

INFO 09:57:41 Starting Test initialization
INFO 09:57:42 Completed Test initialization
INFO 09:57:42 Starting Test setup
```

```

INFO 09:57:44 Completed Test setup
INFO 09:57:44 Starting Test local warmup
INFO 09:57:46 Waiting for localWarmup completion: 00d 00h 00m 00s
INFO 09:57:52 Waiting for localWarmup completion: 00d 00h 00m 06s
INFO 09:57:57 Waiting for localWarmup completion: 00d 00h 00m 12s
INFO 09:58:03 Waiting for localWarmup completion: 00d 00h 00m 18s
INFO 09:58:09 Waiting for localWarmup completion: 00d 00h 00m 24s
INFO 09:58:15 Waiting for localWarmup completion: 00d 00h 00m 30s
INFO 09:58:20 Waiting for localWarmup completion: 00d 00h 00m 35s
INFO 09:58:26 Waiting for localWarmup completion: 00d 00h 00m 41s
INFO 09:58:32 Completed Test local warmup
INFO 09:58:32 Starting Test global warmup
INFO 09:58:33 Completed Test global warmup
INFO 09:58:33 Starting Test start
INFO 09:58:34 Completed Test start
INFO 09:58:34 Test will run for 00d 00h 01m 00s
INFO 09:59:04 Running 00d 00h 00m 30s 50.00% complete
INFO 09:59:34 Running 00d 00h 01m 00s 100.00% complete
INFO 09:59:34 Test finished running
INFO 09:59:34 Starting Test stop
INFO 09:59:36 Completed Test stop
INFO 09:59:37 Starting Test global verify
INFO 09:59:39 Completed Test global verify
INFO 09:59:39 Starting Test local verify
INFO 09:59:41 Completed Test local verify
INFO 09:59:41 Starting Test global tear down
INFO 09:59:43 Finished Test global tear down
INFO 09:59:43 Starting Test local tear down
INFO 09:59:45 Completed Test local tear down
INFO 09:59:45 Terminating workers
INFO 09:59:45 All workers have been terminated
INFO 09:59:45 Starting cool down (10 sec)
INFO 09:59:55 Finished cool down
INFO 09:59:55 Total running time: 133 seconds
INFO 09:59:55 -----
INFO 09:59:55 No failures have been detected!
INFO 09:59:55 -----

```

### 3. Downloading the Results

Now you need the logs and results that the workers generated. You can get these requirements from agents via provisioner.

```
provisioner --download
```

The output looks like the following.

```

INFO 10:05:41 Hazelcast Simulator Provisioner
INFO 10:05:41 Version: 0.5, Commit: c6e82c5, Build Time: 02.07.2015 @ 09:50:21 UTC
INFO 10:05:41 SIMULATOR_HOME: /disk1/hazelcast-simulator-0.5
INFO 10:05:41 Loading simulator.properties: /disk1/exampleSandbox/simulator.properties
INFO 10:05:42 =====
INFO 10:05:42 Download artifacts of 4 machines
INFO 10:05:42 =====
INFO 10:05:42 Downloading from 54.211.146.186
INFO 10:05:42 Downloading from 54.166.1.79
INFO 10:05:42 Downloading from 54.147.196.63
INFO 10:05:42 Downloading from 54.144.235.111

```

```
INFO 10:05:43 =====
INFO 10:05:43 Finished Downloading Artifacts of 4 machines
INFO 10:05:43 =====
INFO 10:05:43 Shutting down Provisioner...
INFO 10:05:43 Done!
```

The artifacts (log files) are downloaded into the `workers` subfolder of the working folder.

#### 4. Terminating the Instances

If want to terminate the instances, execute the following command.

```
provisioner --terminate
```

If an EC2 machine with an agent running is idle for 2 hours, that machine will automatically terminate itself to prevent running into a big bill.

The output looks like the following.

```
INFO 10:26:46 Hazelcast Simulator Provisioner
INFO 10:26:46 Version: 0.5, Commit: c6e82c5, Build Time: 02.07.2015 @ 09:50:21 UTC
INFO 10:26:46 SIMULATOR_HOME: /disk1/hazelcast-simulator-0.5
INFO 10:26:46 Loading simulator.properties: /disk1/exampleSandbox/simulator.properties
INFO 10:26:46 =====
INFO 10:26:46 Terminating 4 aws-ec2 machines (can take some time)
INFO 10:26:46 =====
INFO 10:26:46 Current number of machines: 4
INFO 10:26:46 Desired number of machines: 0
INFO 10:27:10 54.211.146.186 Terminating
INFO 10:27:10 54.147.196.63 Terminating
INFO 10:27:10 54.144.235.111 Terminating
INFO 10:27:10 54.166.1.79 Terminating
INFO 10:28:13 Updating /disk1/exampleSandbox/agents.txt
INFO 10:28:13 Duration: 00d 00h 01m 27s
INFO 10:28:13 =====
INFO 10:28:13 Terminated 4 of 4, remaining=0
INFO 10:28:13 =====
INFO 10:28:13 Shutting down Provisioner...
INFO 10:28:13 Done!
```

#### 21.6.3 Running the Test with a Script

Another option to run the test is using a script. Execute the following command to create a script called, for example, `run.sh`.

```
cat > run.sh
```

This option is for your convenience. It gathers all the commands used to perform a test into one script. The following is the content of this example `run.sh` script.

```
#!/bin/bash
set -e
provisioner --scale 4
coordinator test.properties
provisioner --download
```

Note that you should make the script `run.sh` executable executing the following command.

```
chmod +x run.sh
```

### RELATED INFORMATION

Please see the [Provisioner section](#) and the [Coordinator section](#) for more *provisioner* and *coordinator* commands.

## 21.6.4 Using Maven Archetypes

Alternatively, you can execute tests using the Simulator archetype. Please see the following.

```
mvn archetype:generate \
 -DarchetypeGroupId=com.hazelcast.simulator \
 -DarchetypeArtifactId=archetype \
 -DarchetypeVersion=0.5 \
 -DgroupId=yourgroupid \
 -DartifactId=yourproject
```

This creates a fully working Simulator project, including the test having **yourgroupid**.

1. After this project is generated, go to the created folder and execute the following command.  

```
mvn clean install
```
2. Then, go to your working folder.  

```
cd <working folder>
```
3. Edit the `simulator.properties` file as explained in the Editing the Simulator.Properties File section.
4. Run the test from your working folder using the following command.  

```
./run.sh
```

The output is the same as shown in the [Running the Test section](#).

## 21.7 Provisioner

The provisioner is responsible for provisioning (starting/stopping) instances in a cloud. It will start an Operating System instance, install Java, open firewall ports and install Simulator Agents.

You can configure the behavior of the cluster—such as cloud, operating system, hardware, JVM version, Hazelcast version or region—through the file `simulator.properties`. Please see the Simulator.Properties File Description section for more information.

You can use the following arguments with the **provisioner**.

To start a cluster:

```
provisioner --scale 1
```

To scale to a 2 member cluster:

```
provisioner --scale 2
```

To scale back to a 1 member cluster:

```
provisioner --scale 1
```

To terminate all members in the cluster:

```
provisioner --terminate
```

or

```
provisioner --scale 0
```

If you want to restart all agents and also upload the newest JARs to the machines:

```
provisioner --restart
```

To download all the worker home folders (containing logs and whatever has been put inside):

```
provisioner --download
```

This command is also useful if you added a profiling because the profiling information will also be downloaded. The command is also useful when an out of memory exception is thrown because you can download the heap dump.

To remove all the worker home directories:

```
provisioner --clean
```

### 21.7.1 Accessing the Provisioned Machine

When a machine is provisioned, a user with the name `simulator` is created on the remote machine by default, and that user is added to the `sudousers` list. Also, the public key of your local user is copied to the remote machine and added to the file `~/.ssh/authorized_keys`. You can login to that machine using the following command.

```
ssh simulator@ip
```

You can change the name of the created user to something else by setting the `USER=<somename>` property in the file `simulator.properties`. Be careful not to pick a name that is used on the target image: for example, if you use `ec2-user/ubuntu`, and the default user of that image is `ec2-user/ubuntu`, then you can run into authentication problems.

## 21.8 Coordinator

The Coordinator is responsible for actually running the test using the agents.

You can deploy your test on the workers using the following command.

```
coordinator yourtest.properties.
```

This command creates a single worker per agent and runs the test for 60 seconds (the default duration for a Hazelcast Simulator test).

If your test properties file is called `test.properties`, then you can use the following command to have the coordinator pick up your `test.properties` file automatically.

```
coordinator
```

### 21.8.1 Controlling Hazelcast Declarative Configuration

By default, the coordinator uses the files `SIMULATOR_HOME/conf/hazelcast.xml` and `SIMULATOR_HOME/conf/client-hazelcast.xml` to generate the correct Hazelcast configuration. To use your own configuration files instead, use the following arguments:

```
coordinator --clientHzFile=your-client-hazelcast.xml --hzFile your-hazelcast.xml
```

### 21.8.2 Controlling Test Duration

You can control the duration of a single test using the `--duration` argument. The default duration is 60 seconds. You can specify your own durations using *m* for minutes, *d* for days or *s* for seconds with this argument.

You can see the usage of the `--duration` argument in the following example commands.

```
coordinator --duration 90s map.properties
```

```
coordinator --duration 3m map.properties
```

```
coordinator --duration 12h map.properties
```

```
coordinator --duration 2d map.properties
```

### 21.8.3 Controlling Client And Workers

By default, the provisioner starts the cluster members. You can also use the `--memberWorkerCount` and `--clientWorkerCount` arguments to control how many members and clients you want to have.

The following command creates a 4 node Hazelcast cluster and 8 clients, and all load will be generated through the clients. It also runs the `map.properties` test for a duration of 12 hours.

```
coordinator --memberWorkerCount 4 --clientWorkerCount 8 --duration 12h map.properties
```

Profiles are usually configured with some clients and some members. If you want to have members and no clients:

```
coordinator --memberWorkerCount 12 --duration 12h map.properties
```

If you want to have a JVM with embedded client plus member and all communication goes through the client:

```
coordinator --mixedWorkerCount 12 --duration 12h map.properties
```

If you want to run 2 member JVMs per machine:

```
coordinator --memberWorkerCount 24 --duration 12h map.properties
```

As you notice, you can play with the actual deployment.

## 21.9 Communicator

Communicator enables you to pass messages to Agents, Workers and Tests. You can use messages to simulate various conditions: for example, Hazelcast discomforts like network partitioning and high CPU utilization.



### 21.9.1 Example

```
$ communicator --message-address Agent=*,Worker=* spinCore
```

This will send the message `spinCore` to all Workers.

Each interaction with Communicator has to specify:

- Message Type
- Message Address

### 21.9.2 Message Types

- `kill` - Kills a JVM running a message recipient. In practice, you probably want to send this message to Worker(s) only. The reason for this is you rarely want to kill an Agent and it does not make sense to send this to just a single test; it would kill other tests sharing the same JVM as well.
- `blockHzTraffic` - Blocks the incoming traffic to TCP port range 5700:5800.
- `newMember` - Starts a new member. You can send this message to Agents only.
- `softKill` - Instructs a JVM that is running a message recipient to exit.
- `spinCore` - Starts a new busy-spinning thread. You can use it to simulate increased CPU consumption.
- `unblockTraffic` - Open ports blocked by the `blockHzTraffic` message.
- `oom` - Forces a message recipient to use all memory and cause an `OutOfMemoryError`.
- `terminateWorker` - Terminates a random Worker. This message type can be targeted to an Agent only.

### 21.9.3 Message Addressing

You can send a message to Agent, Worker or Test. These resources create a naturally hierarchy, making the messaging address hierarchical as well.

Syntax: `Agent=<mode>[,Worker=<mode>[,Test=<mode>]]`.

Mode can be either '\*' for broadcast or 'R' for a single random destination.

#### Addressing Example 1:

`Agent=*,Worker=R`: A message will be routed to all agents, then each agent will pass it to a single random worker, and each worker will pass the message for processing.

#### Addressing Example 2:

`Agent=*,Worker=R,Test=*`: A message will be routed to all agents, then each agent will pass the message to a single random worker and workers will pass the message to all tests for processing.

#### 21.9.3.1 Addressing Shortcuts

Hierarchical addressing is powerful, but it can be quite verbose. You can use convenient shortcuts, as shown below.

- `--oldest-member`: Sends a message to a worker with the oldest cluster member.
- `--random-agent`: Sends a message to a random agent.
- `--random-worker`: Sends a message to a random worker.

**Example:** The following command starts a busy-spinning thread in a JVM running a random Worker.

```
communicator --random-worker spinCore
```

## 21.10 Simulator.Properties File Description

The file `simulator.properties` is placed at the `conf` folder of your Hazelcast Simulator. This file is used to prepare the Simulator tests for their proper executions according to your business needs.



**NOTE:** *Currently, the main focuses are on the Simulator tests of Hazelcast on Amazon EC2 and Google Compute Engine (GCE). For the preparation of `simulator.properties` for GCE, please refer to the [Setting Up For GCE section](#). The following `simulator.properties` file description is mainly for Amazon EC2.*

This file includes the following parameters.

- **CLOUD\_PROVIDER:** The Maven artifact ID of your cloud provider. For example, it is `aws-ec2` if you are going to test your Hazelcast on Amazon EC2. For the full list of supported clouds, please refer to [here](#).
- **CLOUD\_IDENTITY:** The full path of the file containing your AWS access key.
- **CLOUD\_CREDENTIAL:** The full path of the file containing your AWS secret key.
- **CLOUD\_POLL\_INITIAL\_PERIOD:** The time in milliseconds between the requests (polls) from jclouds® to your cloud. Its default value is 50.
- **CLOUD\_POLL\_MAX\_PERIOD:** The maximum time in milliseconds between the polls to your cloud. Its default value is 1000.
- **CLOUD\_BATCH\_SIZE:** The number of machines to be started/terminated in one go. For Amazon EC2, its acceptable value is 20.
- **GROUP\_NAME:** The prefix for the agent name. You may want to give different names for different test clusters. For GCE, you need to be very careful using multiple group names, since for every port and every group name, a firewall rule is made and you can only have 100 firewall rules. If the name contains `${username}`, this section will be replaced by the actual user that runs the test. This makes it very easy to identify which user owns a certain machine.
- **USER:** The name of the user on your local machine. jclouds® automatically creates a new user on the remote machine with this name as the login name. It also copies the public key of your system to the remote machine and adds it to the file `~/.ssh/authorized_keys`. Therefore, once the instance is created, you can login with the command `ssh <USER>@<IP address>`. Its default value is `simulator`.
- **SSH\_OPTIONS:** The options added to SSH. You do not need to change these options.
- **SECURITY\_GROUP:** The name of the security group that includes the instances created for the Simulator test. For Amazon EC2, this group will be created automatically if it does not exist. If you do not specify a region for the parameter **MACHINE\_SPEC** (using the `locationId` attribute), the region will be `us-east-1`. If a security group already exists, please make sure the ports 22, 9000, 9001 and the ports between 5701 and 5751 are open. For GCE, this parameter is not used.
- **SUBNET\_ID:** The VPC Subnet ID for Amazon EC2. If this value is different from `default`, then the instances will be created in EC2 VPC and the parameter **SECURITY\_GROUP** will be ignored. For GCE, this parameter is not used.
- **MACHINE\_SPEC:** Specifications of the instance to be created. You can specify attributes such as the operating system, Amazon Machine Image (AMI), hardware properties, EC2 instance type and EC2 region. Please see the [Setting Up For EC2 section](#) for an example **MACHINE-SPEC** value and please refer to the `TemplateBuilderSpec` class of the `org.jclouds.compute.domain` package at jclouds® JavaDoc for a full list of machine specifications. Please refer to Amazon EC2 for more information, such as for Amazon EC2 instance types.
- **HAZELCAST\_VERSION\_SPEC:** The workers can be configured to use a specific version of Hazelcast. By this way, you do not need to depend on the Hazelcast version provided by the simulator. You can configure the Hazelcast version in one of the following ways:
  - **outofthebox:** This is the default value provided by the Simulator itself.
  - **maven=<version>:** Used to give a specific version from the maven repository (for examples, `maven=3.2`, `maven=3.3-SNAPSHOT`). Local Hazelcast artifacts will be preferred, so you can checkout, for example, an experimental branch and build the artifacts locally. This will all be done on the local machine, not on the agent machine.
  - **bringmyown:** Used to specify your own dependencies. For more information on the values, please see the `--workerClassPath` setting of the Controller.
  - **git=<version>:** If you want the Simulator to use a specific version of Hazelcast from GIT, you can use this parameter (for example, `git=f0288f713` to build a specific revision, or `git=v3.2.3` to build a

version from a GIT tag, or `git=<your repository>/<your branch>` to build a version from a branch in a specific repository). Use the parameter `GIT_CUSTOM_REPOSITORIES` to specify custom repositories, explained below. The main Hazelcast repository is always named as `origin`.

- `GIT_BUILD_DIR`: When you set the parameter `HAZELCAST_VERSION_SPEC` to `git=<version>`, the Hazelcast sources will be downloaded to this directory. Its default value is `$HOME/.hazelcast-build/`
- `GIT_CUSTOM_REPOSITORIES`: Comma separated list of additional GIT repositories to be fetched. Use this parameter when you set the parameter `HAZELCAST_VERSION_SPEC` to `git=<version>` and specify additional repositories. Hazelcast Simulator will always fetch the repository at <https://github.com/hazelcast/hazelcast>. This parameter specifies additional repositories. You can use both remote and local repositories. Remote repositories must be accessible for anonymous and local repositories must be accessible for the current user. Its default value is empty. Only the main Hazelcast repository is used by default.
- `MVN_EXECUTABLE`: This parameter specifies the path to a local Maven installation when you set the parameter `HAZELCAST_VERSION_SPEC` to `git=<version>`. Its default value is `/usr/bin/mvn`.
- `JDK_FLAVOR`: Available flavors are `oracle`, `openjdk`, `ibm` and `outofthebox`. `outofthebox` is the one provided by the image so no software is installed by the Simulator. If you select a flavor different than `outofthebox`, the correct behavior is that only 64-bit JVMs are going to be installed. Therefore, make sure that your operating system is 64-bit.
- `JDK_64_BITS`: Specifies whether a 64-bit JVM should be installed or not. For now, only `true` is allowed.
- `JDK_VERSION`: The version of Java to be installed. Oracle and IBM support 6, 7, and 8. OpenJDK supports 6 and 7.
- `PROFILER`: The worker can be configured with a profiler. Available options are `none`, `yourkit`, `hprof`, `perf`, `vtune` and `flightrecorder`. The `yourkit` profiles currently only work on 64-bit Linux (there is no support for Windows or Mac).
- `FLIGHTRECORDER_SETTINGS`: Includes the settings for the `flightrecorder` profiler. For options, please refer to [here](#).
- `YOURKIT_SETTINGS`: Includes the settings for the `yourkit` profiler. When `yourkit` is enabled, a snapshot is created and put in the worker home directory. Therefore, when the artifacts are downloaded, the snapshots are included and can be loaded with your Yourkit GUI. Make sure that the path matches the JVM 32/64 bits. The files `libypagent.so`, which are included in the Simulator, are for YourKit Java Profiler 2013. For more information on the Yourkit setting, please refer to [here](#) and [here](#).
- `HPROF_SETTINGS`: Includes the settings for the `hprof` profiler, which is a part of the JDK. By default, the file `java.hprof.txt` is created in the worker directory. This file can be downloaded using the command `provisioner --download` after a test has run. For configuration options, please refer to [here](#).
- `PERF_SETTINGS`: Includes the settings for the `perf` profiler, available only for Linux. For more information, please see [https://perf.wiki.kernel.org/index.php/Tutorial#Sampling\\_with\\_perf\\_record](https://perf.wiki.kernel.org/index.php/Tutorial#Sampling_with_perf_record).
- `VTUNE_SETTINGS`: Includes the settings for the `vtune` profiler. It requires Intel VTune to be installed on the system. For more information, please refer to [here](#).

## 21.11 Performance and Benchmarking

Hazelcast Simulator can use probes to record throughput and latency while running a test. Hazelcast Simulator can inject a probe into a test, and then it is the responsibility of the test to notify the probe about the start/end of each action.

There are two classes of probes:

- `SimpleProbe`: Counts the number of events. It does not have a notion of start/end.
- `IntervalProbe`: Differentiates between start/end of an action. Used to measure latency.

How to use probes is explained below.

1. Define a probe as a test property. Hazelcast Simulator will inject the appropriate probe implementation.

```
public class IntIntMapTest { private static final ILogger log = Logger.getLogger(IntIntMapTest.class);
 private enum Operation { PUT, GET } [...] // Probes will be injected
 by Hazelcast Simulator public IntervalProbe intervalProbe; public IntervalProbe
 anotherIntervalProbe; public SimpleProbe simpleProbe;
```

2. Use the probe in your test code.

```
getLatency.started(); map.get(key); getLatency.done();
```

3. Configure the probe in your `test.properties` file.

```
probe-intervalProbe=throughput probe-simpleProbe=throughput
```

The configuration format is `probe-<nameOfField>=<type>`, where `nameOfField` is the name you choose for the probe, and `type` is the type of probe. Please keep in mind that this format is likely to change in future versions of Hazelcast Simulator.

A probe of class `IntervalProbe` can have the following types.

- **latency**: Measures the latency distribution.
- **maxLatency**: Records the highest latency. Unlike the previous probe, it records only the single highest latency measured, not a full distribution.
- **hdr**: Same as latency, but it uses `HdrHistogram` under the hood. This will replace the latency probe in future versions of Simulator.
- **disabled**: Dummy probe. It does not record anything.

A probe of class `SimpleProbe` can have the following implementations.

- **throughput**: Measures throughput.
- **disabled**: Dummy probe. It does not record anything.

It is important to understand that the class of a probe does not mandate what the probe is actually measuring. Therefore, the tests just know a class of probe, but they do not know if the probe generates, for example, a full latency histogram or just a maximum recorded latency. This detail must be implemented from a point of view of a test.

# Chapter 22

## WAN

This chapter explains how you can replicate the state of your clusters over Wide Area Network (WAN) environments.

### 22.1 WAN Replication

There are cases where you need to synchronize multiple clusters to the same state. Synchronization of clusters, also known as WAN Replication, is mainly used for replicating state of different clusters over WAN environments like the Internet.

Imagine you have different data centers in New York, London and Tokyo each running an independent Hazelcast cluster. Every cluster would be operating at native speed in their own LAN (Local Area Network), but you also want some or all recordsets in these clusters to be replicated to each other: updates in the Tokyo cluster should also replicate to London and New York, in the meantime updates in the New York cluster are synchronized to the Tokyo and London clusters.

#### 22.1.1 Configuring WAN Replication

The current WAN Replication implementation supports two different operation modes.

- **Active-Passive:** This mode is mostly used for failover scenarios where you want to replicate an active cluster to one or more passive clusters, for the purpose of maintaining a backup.
- **Active-Active:** Every cluster is equal, each cluster replicate to all other clusters. This is normally used to connect different clients to different clusters for the sake of the shortest path between client and server.

Let's see how we can configure WAN Replication from the New York cluster to target the London and Tokyo clusters:

```
<hazelcast>
 <wan-replication name="my-wan-cluster">
 <target-cluster group-name="tokyo" group-password="tokyo-pass">
 <replication-impl>com.hazelcast.wan.impl.WanNoDelayReplication</replication-impl>
 <end-points>
 <address>10.2.1.1:5701</address>
 <address>10.2.1.2:5701</address>
 </end-points>
 </target-cluster>
 <target-cluster group-name="london" group-password="london-pass">
 <replication-impl>com.hazelcast.wan.impl.WanNoDelayReplication</replication-impl>
 <end-points>
 <address>10.3.5.1:5701</address>
 </end-points>
 </target-cluster>
 </wan-replication>
</hazelcast>
```

```

 <address>10.3.5.2:5701</address>
 </end-points>
</target-cluster>
</wan-replication>
...
</hazelcast>

```

Using this configuration, the cluster running in New York is replicating to Tokyo and London. The Tokyo and London clusters should have a similar configurations if you want to run in Active-Active mode.

If the New York and London cluster configurations contain the `wan-replication` element and the Tokyo cluster does not, it means New York and London are active endpoints and Tokyo is a passive endpoint.

When using Active-Active Replication, multiple clusters can simultaneously update the same entry in a distributed data structure. You can configure a merge-policy to resolve these potential conflicts.

```

<hazelcast>
 <wan-replication name="my-wan-cluster">
 <merge-policy>com.hazelcast.map.merge.PassThroughMergePolicy</merge-policy>
 ...
 </wan-replication>
 ...
</hazelcast>

```

Hazelcast can configure WAN replication on a per Map basis. Imagine you have different distributed maps, however only one map should be replicated to a target cluster. To achieve this, configure map to be replicated by adding the `wan-replication-ref` element in the map configuration as shown below.

```

<hazelcast>
 <wan-replication name="my-wan-cluster">
 ...
 </wan-replication>
 <map name="my-shared-map">
 <wan-replication-ref name="my-wan-cluster">
 <merge-policy>com.hazelcast.map.merge.PassThroughMergePolicy</merge-policy>
 ...
 </wan-replication-ref>
 </map>
 ...
</hazelcast>

```

You see that we have `my-shared-map` configured to replicate itself to the cluster targets defined in the earlier `wan-replication` element.

You will also have to define a `merge` policy for merging replica entries and resolving conflicts during the merge as mentioned before.

### 22.1.2 WAN Replication Additional Information

#### RELATED INFORMATION

You can download the white paper *Hazelcast on AWS: Best Practices for Deployment* from [Hazelcast.com](https://www.hazelcast.com/aws-whitepaper/).

#### RELATED INFORMATION

Please refer to the [WAN Replication Configuration](#) section for a full description of Hazelcast WAN Replication configuration.

# Enterprise Only

Figure 22.1:

## 22.2 Enterprise WAN Replication

### 22.2.1 Replication implementations

Enterprise WAN replication has two different replication implementations. These are `WanNoDelayReplication` and `WanBatchReplication` implementations. You can configure them using the configuration element `replication-impl`, as shown below.

```
<hazelcast>
 <wan-replication name="my-wan-cluster">
 <target-cluster group-name="tokyo" group-password="tokyo-pass">
 <replication-impl>com.hazelcast.enterprise.wan.replication.WanNoDelayReplication</replication-impl>
 ...
 </target-cluster>
 </wan-replication>
</hazelcast>

<hazelcast>
 <wan-replication name="my-wan-cluster">
 <target-cluster group-name="tokyo" group-password="tokyo-pass">
 <replication-impl>com.hazelcast.enterprise.wan.replication.WanBatchReplication</replication-impl>
 ...
 </target-cluster>
 </wan-replication>
</hazelcast>
```

`WanNoDelayReplication` sends replication events to the target cluster as soon as they are generated. `WanBatchReplication` waits until:

- a pre-defined number of replication events are generated, (please refer to the [Wan Replication Batch Size section](#)).
- or a pre-defined amount of time is passed (please refer to the [Wan Replication Batch Frequency section](#)).

### 22.2.2 WAN Replication Batch Size

When `WanBatchReplication` is preferred as the replication implementation, the maximum size of events that are sent in a single batch can be changed depending on your needs. Default value for batch size is 50.

To change the `WanBatchReplication` batch size, use the `hazelcast.enterprise.wanrep.batch.size` property in Hazelcast Enterprise.

You can do this by setting the property on the command line (where xxx is the batch size),

```
-Dhazelcast.enterprise.wanrep.batch.size=xxx
```

or by setting the property inside the `hazelcast.xml` (where xxx is the requested batch size):

```
<hazelcast>
 <properties>
 <property name="hazelcast.enterprise.wanrep.batch.size">xxx</property>
 </properties>
</hazelcast>
```

### 22.2.3 WAN Replication Batch Frequency

When using `WanBatchReplication` if the number of WAN replication events generated does not reach **WAN Replication Batch Size**, they are sent to the target cluster after a certain amount of time is passed.

Default value of for this duration is 5 seconds.

To change the `WanBatchReplication` batch sending frequency, set `hazelcast.enterprise.wanrep.batchfrequency.seconds` property.

You can set the property on the command line (where xxx is the batch sending frequency in seconds),

```
-Dhazelcast.enterprise.wanrep.batchfrequency.seconds=xxx
```

or by setting the properties inside the `hazelcast.xml` (where xxx is the requested batch sending frequency):

```
<hazelcast>
 <properties>
 <property name="hazelcast.enterprise.wanrep.batchfrequency.seconds">xxx</property>
 </properties>
</hazelcast>
```

### 22.2.4 WAN Replication Operation Timeout

After a replication event is sent to the target cluster, the source member waits for an acknowledge that event has reached the target. If confirmation is not received inside a timeout duration window, the event is resent to the target cluster.

Default value of for this duration is 5000 milliseconds.

You can change this duration depending on your network latency. The Hazelcast Enterprise user can set the `hazelcast.enterprise.wanrep.optimeout.millis` property to change the timeout duration.

You can do this by setting the property on the command line (where xxx is the timeout duration in milliseconds),

```
-Dhazelcast.enterprise.wanrep.optimeout.millis=xxx
```

or by setting the property inside the `hazelcast.xml` (where xxx is the requested timeout duration):

```
<hazelcast>
 <properties>
 <property name="hazelcast.enterprise.wanrep.optimeout.millis">xxx</property>
 </properties>
</hazelcast>
```

### 22.2.5 WAN Replication Queue Capacity

For huge clusters or high data mutation rates, you might need to increase the replication queue size. The default queue size for replication queues is 100000. This means, if you have heavy put/update/remove rates, you might exceed the queue size so that the oldest, not yet replicated, updates might get lost.

To increase the replication queue capacity, the Hazelcast Enterprise user can use the `hazelcast.enterprise.wanrep.queue.capacity` property.

You can do this by setting the property on the command line (where xxx is the queue size),

```
-Dhazelcast.enterprise.wanrep.queue.capacity=xxx
```

or by setting the properties inside the `hazelcast.xml` (where xxx is the requested queue size):



```
<hazelcast>
 <properties>
 <property name="hazelcast.enterprise.wanrep.queue.capacity">xxx</property>
 </properties>
</hazelcast>
```

### 22.2.6 Enterprise WAN Replication Additional Information

Each cluster in WAN topology has to have a unique `group-name` property for a proper handling of forwarded events.

*Please refer to the [Enterprise WAN Replication Configuration section](#) for a full description of Hazelcast WAN Replication configuration.*



## Chapter 23

# Hazelcast Configuration

This chapter covers all the elements and attributes used to configure Hazelcast. It includes the following sections:

- **Configuration Overview**: Provides the options used to configure Hazelcast.
- **Using Wildcard**: Describes the usage of the wildcard character (\*) while configuring Hazelcast.
- **Using Variables**: Describes how to use variables in declarative configurations.
- **Composing Declarative Configuration**: Describes how to produce a declarative configuration file out of several configuration files.

The rest of the chapter explains the configuration items listed below.

- Network
- Group
- Map
- MultiMap
- Queue
- Topic
- List
- Set
- Semaphore
- Executor Service
- Serialization
- MapReduce Jobtracker
- Services
- Management Center
- WAN Replication
- Partition Group
- Listeners
- Logging

The chapter ends with the configuration via **System Properties**.

### 23.1 Configuration Overview

Hazelcast can be configured declaratively (XML) or programmatically (API) or even by a mix of both.

#### 1- Declarative Configuration

If you are creating new Hazelcast instance by passing the `null` parameter to `Hazelcast.newHazelcastInstance(null)` or just using an empty factory method (`Hazelcast.newHazelcastInstance()`), Hazelcast will look in two places for the configuration file.

- **System property:** Hazelcast will first check if “hazelcast.config” system property is set to a file path. Example: `-Dhazelcast.config=C:/myhazelcast.xml`.
- **Classpath:** If config file is not set as a system property, Hazelcast will check classpath for `hazelcast.xml` file.

If Hazelcast does not find any configuration file, it will start with the default configuration (`hazelcast-default.xml`) located in `hazelcast.jar`. (Before configuring Hazelcast, please try to work with the default configuration to see if it works for you. Default should be just fine for most users. If not, then consider custom configuration for your environment.)

If you want to specify your own configuration file to create `Config`, Hazelcast supports several ways including filesystem, classpath, `InputStream`, `URL`, etc.:

- `Config cfg = new XmlConfigBuilder(xmlFileName).build();`
- `Config cfg = new XmlConfigBuilder(inputStream).build();`
- `Config cfg = new ClasspathXmlConfig(xmlFileName);`
- `Config cfg = new FileSystemXmlConfig(configFilename);`
- `Config cfg = new UrlXmlConfig(url);`
- `Config cfg = new InMemoryXmlConfig(xml);`

## 2- Programmatic Configuration

To configure Hazelcast programmatically, just instantiate a `Config` object and set/change its properties/attributes to your needs. Below is a code sample in which some network, map, map store, and near cache attributes are configured for a Hazelcast instance.

```
Config config = new Config();
config.getNetworkConfig().setPort(5900);
config.getNetworkConfig().setPortAutoIncrement(false);

NetworkConfig network = config.getNetworkConfig();
JoinConfig join = network.getJoin();
join.getMulticastConfig().setEnabled(false);
join.getTcpIpConfig().addMember("10.45.67.32").addMember("10.45.67.100")
 .setRequiredMember("192.168.10.100").setEnabled(true);
network.getInterfaces().setEnabled(true).addInterface("10.45.67.*");

MapConfig mapConfig = new MapConfig();
mapConfig.setName("testMap");
mapConfig.setBackupCount(2);
mapConfig.getMaxSizeConfig().setSize(10000);
mapConfig.setTimeToLiveSeconds(300);

MapStoreConfig mapStoreConfig = new MapStoreConfig();
mapStoreConfig.setClassName("com.hazelcast.examples.DummyStore")
 .setEnabled(true);
mapConfig.setMapStoreConfig(mapStoreConfig);

NearCacheConfig nearCacheConfig = new NearCacheConfig();
nearCacheConfig.setMaxSize(1000).setMaxIdleSeconds(120)
 .setTimeToLiveSeconds(300);
mapConfig.setNearCacheConfig(nearCacheConfig);

config.addMapConfig(mapConfig);
```

After creating a `Config` object, you can use it to create a new Hazelcast instance.

- `HazelcastInstance hazelcast = Hazelcast.newHazelcastInstance( config );`

- To create a named `HazelcastInstance` you should set `instanceName` of `Config` object.

```
Config config = new Config();
config.setInstanceName("my-instance");
Hazelcast.newHazelcastInstance(config);
```

- To retrieve an existing `HazelcastInstance` using its name, use;

```
`Hazelcast.getHazelcastInstanceByName("my-instance");`
```

- To retrieve all existing `HazelcastInstances`, use;

```
`Hazelcast.getAllHazelcastInstances();`
```



**NOTE:** Hazelcast performs the schema validation through the `hazelcast-config-<version>.xsd` file. It throws a meaningful exception if there is an error in the declarative or programmatic configuration.

## 23.2 Using Wildcard

Hazelcast supports wildcard configuration for all distributed data structures that can be configured using `Config` (i.e. for all except `IAtomicLong`, `IAtomicReference`). Using an asterisk (\*) character in the name, different instances of maps, queues, topics, semaphores, etc. can be configured by a single configuration.

A single (only one) asterisk (\*) can be placed anywhere inside the configuration name.

For instance, a map named `com.hazelcast.test.mymap` can be configured using one of the following configurations.

```
<map name="com.hazelcast.test.*">
...
</map>
```

```
<map name="com.hazel*">
...
</map>
```

```
<map name="*.test.mymap">
...
</map>
```

```
<map name="com.*test.mymap">
...
</map>
```

Or a queue `'com.hazelcast.test.myqueue'`:

```
<queue name="*hazelcast.test.myqueue">
...
</queue>
```

```
<queue name="com.hazelcast.*.myqueue">
...
</queue>
```

## 23.3 Using Variables

In your Hazelcast and/or Hazelcast Client declarative configuration, you can use variables to set the values of the elements. This is valid when you set a system property programmatically or you use the command line interface. You can use a variable in the declarative configuration to access the values of the system properties you set.

For example, see the following command that sets two system properties.

```
-Dgroup.name=dev -Dgroup.password=somepassword
```

Let's get the values of these system properties in the declarative configuration of Hazelcast, as shown below.

```
<hazelcast>
 <group>
 <name>${group.name}</name>
 <password>${group.password}</password>
 </group>
</hazelcast>
```

This also applies to the declarative configuration of Hazelcast Client, as shown below.

```
<hazelcast-client>
 <group>
 <name>${group.name}</name>
 <password>${group.password}</password>
 </group>
</hazelcast-client>
```

If you do not want to rely on the system properties, you can use the `XmlConfigBuilder` and explicitly set a `Properties` instance, as shown below.

```
Properties properties = new Properties();

// fill the properties, e.g. from database/LDAP, etc.

XmlConfigBuilder builder = new XmlConfigBuilder();
builder.setProperties(properties)
Config config = builder.build();
HazelcastInstance hz = Hazelcast.newHazelcastInstance(config);
```

## 23.4 Composing Declarative Configuration

You can compose the declarative configuration of your Hazelcast or Hazelcast Client from multiple declarative configuration snippets. In order to compose a declarative configuration, you can use the `<import/>` element to load different declarative configuration files. Please see the following examples.

Let's say you want to compose the declarative configuration for Hazelcast out of two configurations: `development-group-config.xml` and `development-network-config.xml`. These two configurations are shown below.

`development-group-config.xml`:

```
<hazelcast>
 <group>
 <name>dev</name>
 <password>dev-pass</password>
 </group>
</hazelcast>
```

development-network-config.xml:

```
<hazelcast>
 <network>
 <port auto-increment="true" port-count="100">5701</port>
 <join>
 <multicast enabled="true">
 <multicast-group>224.2.2.3</multicast-group>
 <multicast-port>54327</multicast-port>
 </multicast>
 </join>
 </network>
</hazelcast>
```

To get your example Hazelcast declarative configuration out of the above two, use the `<import/>` element as shown below.

```
<hazelcast>
 <import resource="development-group-config.xml"/>
 <import resource="development-network-config.xml"/>
</hazelcast>
```

This feature also applies to the declarative configuration of Hazelcast Client. Please see the following examples.

client-group-config.xml:

```
<hazelcast-client>
 <group>
 <name>dev</name>
 <password>dev-pass</password>
 </group>
</hazelcast-client>
```

client-network-config.xml:

```
<hazelcast-client>
 <network>
 <cluster-members>
 <address>127.0.0.1:7000</address>
 </cluster-members>
 </network>
</hazelcast-client>
```

To get a Hazelcast Client declarative configuration from the above two examples, use the `<import/>` element as shown below.

```
<hazelcast-client>
 <import resource="client-group-config.xml"/>
 <import resource="client-network-config.xml"/>
</hazelcast>
```



**NOTE:** You can only use `<import/>` element on top level of the XML hierarchy.

- XML resources can be loaded from classpath and filesystem. Please see the following example.

```
<hazelcast>
 <import resource="file:///etc/hazelcast/development-group-config.xml"/> <!-- loaded from filesystem -->
 <import resource="classpath:development-network-config.xml"/> <!-- loaded from classpath -->
</hazelcast>
```

- You can use property placeholders in the `<import/>` elements. Please see the following example.

```
<hazelcast>
 <import resource="${environment}-group-config.xml"/>
 <import resource="${environment}-network-config.xml"/>
</hazelcast>
```

## 23.5 Network Configuration



**NOTE:** When explaining configuration elements and attributes, most of the sections below use the tags used in the declarative configurations. We assume that the reader is familiar with these tags' programmatic equivalents, since declarative and programmatic approaches have the similar tag/method names. For example, the `port-count` tag in declarative configuration is equivalent to `setPortCount` in programmatic configuration.

All network related configuration is performed via the `network` element in the Hazelcast XML configuration file or the class `NetworkConfig` when using programmatic configuration. Let's first give the examples for these two approaches. Then we will look at its sub-elements and attributes.

### Declarative:

```
<network>
 <public-address>11.22.33.44:5555</public-address>
 <port auto-increment="true" port-count="100">5701</port>
 <outbound-ports>
 <ports>0</ports>
 </outbound-ports>
 <reuse-address>false</reuse-address>
 <join>
 <multicast enabled="true">
 <multicast-group>224.2.2.3</multicast-group>
 <multicast-port>54327</multicast-port>
 </multicast>
 <tcp-ip enabled="false">
 <interface>127.0.0.1</interface>
 </tcp-ip>
 <aws enabled="false">
 <access-key>my-access-key</access-key>
 <secret-key>my-secret-key</secret-key>
 <region>us-west-1</region>
 <host-header>ec2.amazonaws.com</host-header>
 <security-group-name>hazelcast-sg</security-group-name>
 <tag-key>type</tag-key>
 <tag-value>hz-nodes</tag-value>
 </aws>
 </join>
 <interfaces enabled="false">
 <interface>10.10.1.*</interface>
 </interfaces>
 <ssl enabled="false" />
 <socket-interceptor enabled="false" />
 <symmetric-encryption enabled="false">
```



```

 <algorithm>PBESWithMD5AndDES</algorithm>
 <salt>thesalt</salt>
 <password>thepass</password>
 <iteration-count>19</iteration-count>
 </symmetric-encryption>
</network>

```

#### Programmatic:

```

Network netConfig = new NetworkConfig();
netConfig.setReuseAddress(false);

AwsConfig awsConfig = new AwsConfig();
awsConfig.setTagKey("5551234").setTagValue("Node1234");

```

It has the following sub-elements which are described in the following sections.

- [Public Address](#)
- [Port](#)
- [Outbound Ports](#)
- [Reuse Address](#)
- [Join](#)
- [Interfaces](#)
- [SSL](#)
- [Socket Interceptor](#)
- [Symmetric Encryption](#)

### 23.5.1 Public Address

`public-address` overrides the public address of a node. By default, a node selects its socket address as its public address. But behind a network address translation (NAT), two endpoints (nodes) may not be able to see/access each other. If both nodes set their public addresses to their defined addresses on NAT, then that way they can communicate with each other. In this case, their public addresses are not an address of a local network interface but a virtual address defined by NAT. It is optional to set and useful when you have a private cloud. Note that, the value for this element should be given in the format *host IP address:port number*. See the following examples.

#### Declarative:

```

<network>
 <public-address>11.22.33.44:5555</public-address>
</network>

```

#### Programmatic:

```

Config config = new Config();
config.getNetworkConfig()
 .setPublicAddress("11.22.33.44", "5555");

```

### 23.5.2 Port

You can specify the ports that Hazelcast will use to communicate between cluster members. Its default value is 5701. The following are example configurations.

#### Declarative:

```
<network>
 <port port-count="20" auto-increment="false">5701</port>
</network>
```

#### Programmatic:

```
Config config = new Config();
config.getNetworkConfig().setPort("5701");
 .setPortCount("20").setPortAutoIncrement(false);
```

port has the following attributes.

- **port-count:** By default, Hazelcast will try 100 ports to bind. Meaning that, if you set the value of port as 5701, as members are joining to the cluster, Hazelcast tries to find ports between 5701 and 5801. You can choose to change the port count in the cases like having large instances on a single machine or willing to have only a few ports to be assigned. The parameter `port-count` is used for this purpose, whose default value is 100.
- **auto-increment:** According to the above example, Hazelcast will try to find free ports between 5701 and 5801. Normally, you will not need to change this value, but it will come very handy when needed. You may also want to choose to use only one port. In that case, you can disable the auto-increment feature of `port` by setting `auto-increment` to `false`.

The parameter `port-count` is ignored when the above configuration is made.

### 23.5.3 Outbound Ports

By default, Hazelcast lets the system pick up an ephemeral port during socket bind operation. But security policies/firewalls may require you to restrict outbound ports to be used by Hazelcast-enabled applications. To fulfill this requirement, you can configure Hazelcast to use only defined outbound ports. The following are example configurations.

#### Declarative:

```
<network>
 <outbound-ports>
 <!-- ports between 33000 and 35000 -->
 <ports>33000-35000</ports>
 <!-- comma separated ports -->
 <ports>37000,37001,37002,37003</ports>
 <ports>38000,38500-38600</ports>
 </outbound-ports>
</network>
```

#### Programmatic:

```
...
NetworkConfig networkConfig = config.getNetworkConfig();
// ports between 35000 and 35100
networkConfig.addOutboundPortDefinition("35000-35100");
// comma separated ports
networkConfig.addOutboundPortDefinition("36001, 36002, 36003");
networkConfig.addOutboundPort(37000);
networkConfig.addOutboundPort(37001);
...
```

**Note:** You can use port ranges and/or comma separated ports.

As shown in the programmatic configuration, you use the method `addOutboundPort` to add only one port. If you need to add a group of ports, then use the method `addOutboundPortDefinition`.

In the declarative configuration, the element `ports` can be used for both single and multiple port definitions.

### 23.5.4 Reuse Address

When you shutdown a cluster member, the server socket port will be in the `TIME_WAIT` state for the next couple of minutes. If you start the member right after shutting it down, you may not be able to bind it to the same port because it is in the `TIME_WAIT` state. If you set the `reuse-address` element to `true`, the `TIME_WAIT` state is ignored and you can bind the member to the same port again.

The following are example configurations.

**Declarative:**

```
<network>
 <reuse-address>true</reuse-address>
</network>
```

**Programmatic:**

```
...
NetworkConfig networkConfig = config.getNetworkConfig();

networkConfig.setReuseAddress(true);
...
```

### 23.5.5 Join

The `join` configuration element is used to enable the Hazelcast instances to form a cluster, i.e. to join the members. Three ways can be used to join the members: discovery by TCP/IP, by multicast, and by discovery on AWS (EC2 auto-discovery). The following are example configurations.

**Declarative:**

```
<network>
 <join>
 <multicast enabled="true">
 <multicast-group>224.2.2.3</multicast-group>
 <multicast-port>54327</multicast-port>
 <multicast-time-to-live>32</multicast-time-to-live>
 <multicast-timeout-seconds>2</multicast-timeout-seconds>
 <trusted-interfaces>
 <interface>192.168.1.102</interface>
 </trusted-interfaces>
 </multicast>
 <tcp-ip enabled="false">
 <required-member>192.168.1.104</required-member>
 <member>192.168.1.104</member>
 <members>192.168.1.105,192.168.1.106</members>
 </tcp-ip>
 <aws enabled="false">
 <access-key>my-access-key</access-key>
 <secret-key>my-secret-key</secret-key>
 <region>us-west-1</region>
 </aws>
 </join>
</network>
```

```

 <host-header>ec2.amazonaws.com</host-header>
 <security-group-name>hazelcast-sg</security-group-name>
 <tag-key>type</tag-key>
 <tag-value>hz-nodes</tag-value>
 </aws>
</join>
<network>

```

### Programmatic:

```

Config config = new Config();
NetworkConfig network = config.getNetworkConfig();
JoinConfig join = network.getJoin();
join.getMulticastConfig().setEnabled(false);
 .addTrustedInterface("192.168.1.102");
join.getTcpIpConfig().addMember("10.45.67.32").addMember("10.45.67.100")
 .setRequiredMember("192.168.10.100").setEnabled(true);

```

The join element has the following sub-elements and attributes.

#### 23.5.5.1 multicast element

The multicast element includes parameters to fine tune the multicast join mechanism.

- **enabled**: Specifies whether the multicast discovery is enabled or not, **true** or **false**.
- **multicast-group**: The multicast group IP address. Specify it when you want to create clusters within the same network. Values can be between 224.0.0.0 and 239.255.255.255. Default value is 224.2.2.3.
- **multicast-port**: The multicast socket port that the Hazelcast member listens to and sends discovery messages through. Default value is 54327.
- **multicast-time-to-live**: Time-to-live value for multicast packets sent out to control the scope of multicasts. See more information [here](#).
- **multicast-timeout-seconds**: Only when the nodes are starting up, this timeout (in seconds) specifies the period during which a node waits for a multicast response from another node. For example, if you set it as 60 seconds, each node will wait for 60 seconds until a leader node is selected. Its default value is 2 seconds.
- **trusted-interfaces**: Includes IP addresses of trusted members. When a node wants to join to the cluster, its join request will be rejected if it is not a trusted member. You can give an IP addresses range using the wildcard (\*) on the last digit of IP address (e.g. 192.168.1.\* or 192.168.1.100-110).

#### 23.5.5.2 tcp-ip element

The tcp-ip element includes parameters to fine tune the TCP/IP join mechanism.

- **enabled**: Specifies whether the TCP/IP discovery is enabled or not. Values can be **true** or **false**.
- **required-member**: IP address of the required member. Cluster will only formed if the member with this IP address is found.
- **member**: IP address(es) of one or more well known members. Once members are connected to these well known ones, all member addresses will be communicated with each other. You can also give comma separated IP addresses using the **members** element.



**NOTE:** *tcp-ip* element also accepts the *interface* parameter. Please refer to the *Interfaces element description*.

- **connection-timeout-seconds:** Defines the connection timeout. This is the maximum amount of time Hazelcast is going to try to connect to a well known member before giving up. Setting it to a too low value could mean that a member is not able to connect to a cluster. Setting it to a too high value means that member startup could slow down because of longer timeouts (e.g. when a well known member is not up). Increasing this value is recommended if you have many IPs listed and the members cannot properly build up the cluster. Its default value is 5.

### 23.5.5.3 aws element

The **aws** element includes parameters to allow the nodes to form a cluster on the Amazon EC2 environment.

- **enabled:** Specifies whether the EC2 discovery is enabled or not, **true** or **false**.
- **access-key, secret-key:** Access and secret keys of your account on EC2.
- **region:** The region where your nodes are running. Default value is **us-east-1**. You need to specify this if the region is other than the default one.
- **host-header:** The URL that is the entry point for a web service. It is optional.
- **security-group-name:** Name of the security group you specified at the EC2 management console. It is used to narrow the Hazelcast nodes to be within this group. It is optional.
- **tag-key, tag-value:** To narrow the members in the cloud down to only Hazelcast nodes, you can set these parameters as the ones you specified in the EC2 console. They are optional.
- **connection-timeout-seconds:** The maximum amount of time Hazelcast will try to connect to a well known member before giving up. Setting this value too low could mean that a member is not able to connect to a cluster. Setting the value too high means that member startup could slow down because of longer timeouts (for example, when a well known member is not up). Increasing this value is recommended if you have many IPs listed and the members cannot properly build up the cluster. Its default value is 5.



**NOTE:** If you are using a cloud provider other than AWS, you can use the programmatic configuration to specify a TCP/IP cluster. The members will need to be retrieved from that provider (e.g. JClouds).

**23.5.5.3.1 AWSClient Configuration** To make sure EC2 instances are found correctly, you can use the **AWSClient** class. It determines the private IP addresses of EC2 instances to be connected. Give the **AWSClient** class the values for the parameters that you specified in the **aws** element, as shown below. You will see whether your EC2 instances are found.

```
public static void main(String[] args)throws Exception{
 AwsConfig config = new AwsConfig();
 config.setSecretKey(...);
 config.setSecretKey(...);
 config.setRegion(...);
 config.setSecurityGroupName(...);
 config.setTagKey(...);
 config.setTagValue(...);
 config.setEnabled(true);
 AWSClient client = new AWSClient(config);
 List<String> ipAddresses = client.getPrivateIpAddresses();
 System.out.println("addresses found:" + ipAddresses);
 for (String ip: ipAddresses) {
 System.out.println(ip);
 }
}
```

## 23.5.6 Interfaces

You can specify which network interfaces that Hazelcast should use. Servers mostly have more than one network interface, so you may want to list the valid IPs. Range characters ('\*' and '-') can be used for simplicity. For

instance, 10.3.10.\* refers to IPs between 10.3.10.0 and 10.3.10.255. Interface 10.3.10.4-18 refers to IPs between 10.3.10.4 and 10.3.10.18 (4 and 18 included). If network interface configuration is enabled (it is disabled by default) and if Hazelcast cannot find an matching interface, then it will print a message on the console and will not start on that node.

The following are example configurations.

#### Declarative:

```
<hazelcast>
...
<network>
...
 <interfaces enabled="true">
 <interface>10.3.16.*</interface>
 <interface>10.3.10.4-18</interface>
 <interface>192.168.1.3</interface>
 </interfaces>
</network>
...
</hazelcast>
```

#### Programmatic:

```
Config config = new Config();
NetworkConfig network = config.getNetworkConfig();
InterfacesConfig interface = network.getInterfaces();
interface.setEnabled(true)
 .addInterface("192.168.1.3");
```

### 23.5.7 SSL

This is a Hazelcast Enterprise feature, please see the [Security chapter](#).

### 23.5.8 Socket Interceptor

This is a Hazelcast Enterprise feature, please see the [Security chapter](#).

### 23.5.9 Symmetric Encryption

This is a Hazelcast Enterprise feature, please see the [Security chapter](#).

### 23.5.10 IPv6 Support

Hazelcast supports IPv6 addresses seamlessly (This support is switched off by default, please see the note at the end of this section).

All you need is to define IPv6 addresses or interfaces in [network configuration](#). The only current limitation is that you cannot define wildcard IPv6 addresses in the TCP/IP join configuration (`tcp-ip` element). [Interfaces](#) configuration does not have this limitation, you can configure wildcard IPv6 interfaces in the same way as IPv4 interfaces.

```
<hazelcast>
...
<network>
```

```

<port auto-increment="true">5701</port>
<join>
 <multicast enabled="false">
 <multicast-group>FF02:0:0:0:0:0:0:1</multicast-group>
 <multicast-port>54327</multicast-port>
 </multicast>
 <tcp-ip enabled="true">
 <member>[fe80::223:6cff:fe93:7c7e]:5701</member>
 <interface>192.168.1.0-7</interface>
 <interface>192.168.1.*</interface>
 <interface>fe80:0:0:0:45c5:47ee:fe15:493a</interface>
 </tcp-ip>
</join>
<interfaces enabled="true">
 <interface>10.3.16.*</interface>
 <interface>10.3.10.4-18</interface>
 <interface>fe80:0:0:0:45c5:47ee:fe15:*</interface>
 <interface>fe80::223:6cff:fe93:0-5555</interface>
</interfaces>
...
</network>
...
</hazelcast>

```

JVM has two system properties for setting the preferred protocol stack (IPv4 or IPv6) as well as the preferred address family types (inet4 or inet6). On a dual stack machine, IPv6 stack is preferred by default, you can change this through the `java.net.preferIPv4Stack=<true|false>` system property. When querying name services, JVM prefers IPv4 addresses over IPv6 addresses and will return an IPv4 address if possible. You can change this through `java.net.preferIPv6Addresses=<true|false>` system property.

Also see additional details on IPv6 support in Java.



**NOTE:** *IPv6 support has been switched off by default, since some platforms have issues using the IPv6 stack. Some other platforms such as Amazon AWS have no support at all. To enable IPv6 support, just set configuration property `hazelcast.prefer.ipv4.stack` to false. Please refer to the [System Properties section](#) for details.*

## 23.6 Group Configuration

This configuration is used to create multiple Hazelcast clusters. The cluster members (nodes) and clients having the same group configuration (i.e., the same group name and password) forms a private cluster.

Each cluster will have its own group and it will not interfere with other clusters. The name of the element to configure cluster groups is `group`.

The following are example configurations.

### Declarative:

```

<group>
 <name>testCluster</name>
 <password>1q2w3e</password>
</group>

```

### Programmatic:

```

GroupConfig groupConfig = new GroupConfig();
groupConfig.setName("testCluster").setPassword("1q2w3e");

```

It has the following elements.

- **name:** Name of the group to be created.
- **password:** Password of the group to be created.

## 23.7 Map Configuration

The following are example map configurations.

**Declarative:**

```
<hazelcast>
 <map name="default">
 <in-memory-format>BINARY</in-memory-format>
 <statistics-enabled>true</statistics-enabled>
 <backup-count>0</backup-count>
 <async-backup-count>1</async-backup-count>
 <read-backup-data>true</read-backup-data>
 <time-to-live-seconds>0</time-to-live-seconds>
 <max-idle-seconds>0</max-idle-seconds>
 <eviction-policy>LRU</eviction-policy>
 <min-eviction-check-millis>150</min-eviction-check-millis>
 <max-size policy="PER_NODE">5000</max-size>
 <eviction-percentage>25</eviction-percentage>
 <optimize-queries>true</optimize-queries>
 <near-cache>
 <invalidate-on-change>true</invalidate-on-change>
 <cache-local-entries>false</cache-local-entries>
 </near-cache>
 <map-store enabled="true">
 <write-delay-seconds>60</write-delay-seconds>
 <write-batch-size>1000</write-batch-size>
 <write-coalescing>true</write-coalescing>
 </map-store>
 <indexes>
 <index ordered="true">id</index>
 <index ordered="false">name</index>
 </indexes>
 <entry-listeners>
 <entry-listener include-value="true" local="false">
 com.hazelcast.examples.EntryListener
 </entry-listener>
 </entry-listeners>
 </map>
</hazelcast>
```

**Programmatic:**

```
MapConfig mapConfig = new MapConfig();
mapConfig.setName("default").setInMemoryFormat(InMemoryFormat.BINARY);

mapConfig.setBackupCount(0).setAsyncBackupCount(1)
 .setReadBackupData("true");

MapStoreConfig mapStoreConfig = mapConfig.getMapStoreConfig();
mapStoreConfig.setWriteDelaySeconds(60)
```



```
.setWriteBatchSize(1000);
```

```
MapIndexConfig mapIndexConfig = mapConfig.getMapIndexConfig();
mapIndexConfig.setAttribute("id").setOrdered("true");
mapIndexConfig.setAttribute("name").setOrdered("false");
```

Map configuration has the following elements.

- **in-memory-format**: Determines how the data will be stored in memory. It has two values: **BINARY** and **OBJECT**. **BINARY** is the default option, storing the data in serialized binary format. If set to **OBJECT**, data will be stored in deserialized form.
- **backup-count**: Defines the count of synchronous backups. If it is set as 1, for example, backup of a partition will be placed on 1 other node. If it is 2, it will be placed on 2 other nodes.
- **async-backup-count**: The number of synchronous backups. Count behavior is the same as that of **backup-count** element.
- **read-backup-data**: When set to **true**, enables reading of local backup entries.
- **time-to-live-seconds**: Maximum time in seconds for each entry to stay in the map.
- **max-idle-seconds**: Maximum time in seconds for each entry to stay idle in the map.
- **eviction-policy**: Policy for evicting entries. It has three values: **NONE**, **LRU** (Least Recently Used) and **LFU** (Least Frequently Used). If set to **NONE**, no items will be evicted.
- **max-size**: Maximum size of the map (i.e. maximum entry count of the map). When the maximum size is reached, the map is evicted based on the eviction policy defined. It has four attributes: **PER\_NODE** (Maximum number of map entries in each JVM), **PER\_PARTITION** (Maximum number of map entries within each partition), **USED\_HEAP\_SIZE** (Maximum used heap size in megabytes for each JVM) and **USED\_HEAP\_PERCENTAGE** (Maximum used heap size percentage for each JVM).
- **eviction-percentage**: When the map reaches **max-size**, this specified percentage of the map will be evicted.
- **merge-policy**: Policy for merging maps after a split-brain syndrome was detected and the different network partitions need to be merged. The available merge policy classes are explained below.
  - **HigherHitsMapMergePolicy** causes the merging entry to be merged from the source map to the destination map if the source entry has more hits than the destination one.
  - **LatestUpdateMapMergePolicy** causes the merging entry to be merged from the source map to the destination map if the source entry has updated more recently than the destination entry. This policy can only be used if the machine clocks are in sync.
  - **PassThroughMergePolicy** causes the merging entry to be merged from source to destination map unless merging entry is null.
  - **PutIfAbsentMapMergePolicy** causes the merging entry to be merged from source to destination map if it does not exist in the destination map.
- **statistics-enabled**: You can retrieve statistics information like owned entry count, backup entry count, last update time, and locked entry count by setting **statistics-enabled** to **true**. The method for retrieving the statistics is `getLocalMapStats()`.
- **wan-replication-ref**: Hazelcast can replicate some or all of the cluster data. For example, suppose you can have 5 different maps but you want only one of these maps to replicate across clusters. To achieve this, you mark the maps to be replicated by adding this element in the map configuration.
- **optimize-queries**: If true, increases the speed of query processes in the map. Default value is false. It only works when **in-memory-format** is set as **BINARY** and performs a pre-caching on the entries queried.
- **min-eviction-check-millis**: The minimum time in milliseconds which should pass before checking if a partition of this map is evictable or not. Default value is 100 millis.

### 23.7.1 Map Store

- **class-name**: Name of the class implementing `MapLoader` and/or `MapStore`.
- **write-delay-seconds**: Number of seconds to delay to call the `MapStore.store(key, value)`. If the value is zero then it is write-through so `MapStore.store(key, value)` will be called as soon as the entry is updated. Otherwise it is write-behind so updates will be stored after **write-delay-seconds** value by calling `Hazelcast.storeAll(map)`. Default value is 0.

- **write-batch-size**: Used to create batch chunks when writing map store. In default mode, all map entries will be tried to be written in one go. To create batch chunks, the minimum meaningful value for write-batch-size is 2. For values smaller than 2, it works as in default mode.
- **write-coalescing**: In write-behind mode, by default Hazelcast coalesces updates on a specific key, i.e. applies only the last update on it. You can set this element to **false** to store all updates performed on a key to the data store.
- **enabled**: True to enable this map-store, false to disable. Default value is true.
- **initial-mode**: Sets the initial load mode. LAZY is the default load mode, where load is asynchronous. EAGER means load is blocked till all partitions are loaded.

### 23.7.2 Near Cache

Most of the map near cache properties (**max-size**, **time-to-live-seconds**, **max-idle-seconds**, **eviction-policy**, **in-memory-format**) have the same names and tasks explained in the map properties above. Below are the properties specific to near cache.

- **invalidate-on-change**: Determines whether the cached entries get evicted if the entries are updated or removed.
- **cache-local-entries**: If you want the local entries to be cached, set this element's value to **true**.

### 23.7.3 Indexes

This configuration lets you index the attributes of an object in the map and also order these attributes. See the above declarative and programmatic configuration examples.

### 23.7.4 Entry Listeners

This configuration lets you add listeners (listener classes) for the map entries. You can also set the attribute **include-value** to **true** if you want the entry event to contain the entry values, and you can set **local** to **true** if you want to listen to the entries on the local node.

## 23.8 MultiMap Configuration

The following are the example MultiMap configurations.

**Declarative:**

```
<hazelcast>
 <multimap name="default">
 <backup-count>0</backup-count>
 <async-backup-count>1</async-backup-count>
 <value-collection-type>SET</value-collection-type>
 <entry-listeners>
 <entry-listener include-value="false" local="false">
 com.hazelcast.examples.EntryListener
 </entry-listener>
 </entry-listeners>
 </multimap>
</hazelcast>
```

**Programmatic:**

```
MultiMapConfig mmConfig = new MultiMapConfig();
mmConfig.setName("default");

mmConfig.setBackupCount("0").setAsyncBackupCount("1");

mmConfig.setValueCollectionType("SET");
```

Most of the MultiMap configuration elements and attributes have the same names and functionalities explained in the [Map Configuration section](#). Below are the ones specific to MultiMap.

- **backup-count**: Defines the number of asynchronous backups. For example, if it is set to 1, backup of a partition will be placed on 1 other member. If it is 2, it will be placed on 2 other members.
- **async-backup-count**: The number of synchronous backups. Behavior is the same as that of the **backup-count** element.
- **statistics-enabled**: You can retrieve some statistics like owned entry count, backup entry count, last update time, locked entry count by setting this parameter's value as "true". The method for retrieving the statistics is `getLocalMultiMapStats()`.
- **value-collection-type**: Type of the value collection. It can be **Set** or **List**.
- **entry-listeners**: Lets you add listeners (listener classes) for the map entries. You can also set the attribute **include-value** to true if you want the item event to contain the entry values, and you can set **local** to true if you want to listen to the entries on the local node.

## 23.9 Queue Configuration

The following are example queue configurations.

**Declarative:**

```
<queue name="default">
 <max-size>0</max-size>
 <backup-count>1</backup-count>
 <async-backup-count>0</async-backup-count>
 <empty-queue-ttl>-1</empty-queue-ttl>
 <item-listeners>
 <item-listener>
 com.hazelcast.examples.ItemListener
 </item-listener>
 </item-listeners>
</queue>
<queue-store>
 <class-name>com.hazelcast.QueueStoreImpl</class-name>
 <properties>
 <property name="binary">false</property>
 <property name="memory-limit">10000</property>
 <property name="bulk-load">500</property>
 </properties>
</queue-store>
```

**Programmatic:**

```
Config config = new Config();
QueueConfig queueConfig = config.getQueueConfig();
queueConfig.setName("MyQueue").setBackupCount("1")
 .setMaxSize("0").setStatisticsEnabled("true");
queueConfig.getQueueStoreConfig()
```

```
.setEnabled ("true")
.setClassName("com.hazelcast.QueueStoreImpl")
.setProperty("binary", "false");
```

Queue configuration has the following elements.

- **max-size**: Maximum number of items in the Queue.
- **backup-count**: Number of synchronous backups. Queue is a non-partitioned data structure, so all entries of a Queue resides in one partition. When this parameter is '1', it means there will be 1 backup of that Queue in another node in the cluster. When it is '2', 2 nodes will have the backup.
- **async-backup-count**: Number of asynchronous backups.
- **empty-queue-ttl**: Used to purge unused or empty queues. If you define a value (time in seconds) for this element, then your queue will be destroyed if it stays empty or unused for that time.
- **item-listeners**: Lets you add listeners (listener classes) for the queue items. You can also set the attribute **include-value** to **true** if you want the item event to contain the item values, and you can set **local** to **true** if you want to listen to the items on the local node.
- **queue-store**: Includes the queue store factory class name and the properties *binary*, *memory limit* and *bulk load*. Please refer to [Queueing with Persistent Datastore](#).
- **statistics-enabled**: If set to **true**, you can retrieve statistics for this Queue using the method `getLocalQueueStats()`.

## 23.10 Topic Configuration

The following are example topic configurations.

**Declarative Configuration:**

```
<hazelcast>
...
<topic name="yourTopicName">
 <global-ordering-enabled>true</global-ordering-enabled>
 <statistics-enabled>true</statistics-enabled>
 <message-listeners>
 <message-listener>MessageListenerImpl</message-listener>
 </message-listeners>
</topic>
...
</hazelcast>
```

**Programmatic Configuration:**

```
TopicConfig topicConfig = new TopicConfig();
topicConfig.setGlobalOrderingEnabled(true);
topicConfig.setStatisticsEnabled(true);
topicConfig.setName("yourTopicName");
MessageListener<String> implementation = new MessageListener<String>() {
 @Override
 public void onMessage(Message<String> message) {
 // process the message
 }
};
topicConfig.addMessageListenerConfig(new ListenerConfig(implementation));
HazelcastInstance instance = Hazelcast.newHazelcastInstance()
```

Topic configuration has the following elements.

- `statistics-enabled`: Default is `true`, meaning statistics are calculated.
- `global-ordering-enabled`: Default is `false`, meaning there is no global order guarantee.
- `message-listeners`: Lets you add listeners (listener classes) for the topic messages.
- `name`: The name of the topic. Optional.

The following are topic-related but not topic-specific configuration parameters.

- ``hazelcast.event.queue.capacity``: default value is 1,000,000.
- ``hazelcast.event.queue.timeout.millis``: default value is 250.
- ``hazelcast.event.thread.count``: default value is 5.

### RELATED INFORMATION

For description of these parameters, please see [Global Event Configuration](#).

## 23.11 Reliable Topic Configuration

The following are example Reliable Topic configurations.

### Declarative:

```
<reliable-topic name="default">
 <statistics-enabled>true</statistics-enabled>
 <message-listeners>
 <message-listener>
 ...
 </message-listener>
 </message-listeners>
 <read-batch-size>10</read-batch-size>
 <topic-overload-policy>BLOCK</topic-overload-policy>
</reliable-topic>
```

### Programmatic:

```
Config config = new Config();
ReliableTopicConfig rtConfig = config.getReliableTopicConfig();
rtConfig.setTopicOverloadPolicy("BLOCK")
 .setReadBatchSize(10)
 .setStatisticsEnabled("true");
```

Reliable Topic configuration has the following elements.

- `statistics-enabled`: Enables or disables the statistics collection for the Reliable Topic. The default value is `true`.
- `message-listener`: Message listener class that listens to the messages when they are added or removed.
- `read-batch-size`: Minimum number of messages that Reliable Topic will try to read in batches. The default value is 10.
- `topic-overload-policy`: Policy to handle an overloaded topic. Available values are `DISCARD_OLDEST`, `DISCARD_NEWEST`, `BLOCK` and `ERROR`. The default value is `'BLOCK'`.

Reliable Topic configuration has the following attributes.

- `name`: Name of the reliable topic.

## 23.12 List Configuration

The following are example list configurations.

### Declarative:

```
<list name="default">
 <backup-count>1</backup-count>
 <async-backup-count>0</async-backup-count>
 <max-size>10</max-size>
 <item-listeners>
 <item-listener>
 com.hazelcast.examples.ItemListener
 </item-listener>
 </item-listeners>
</list>
```

### Programmatic:

```
Config config = new Config();
CollectionConfig collectionList = config.getCollectionConfig();
collectionList.setName("MyList").setBackupCount("1")
 .setMaxSize("10");
```

List configuration has the following elements.

- **statistics-enabled:** True (default) if statistics gathering is enabled on the list, false otherwise.
- **backup-count:** Number of synchronous backups. List is a non-partitioned data structure, so all entries of a List reside in one partition. When this parameter is '1', there will be 1 backup of that List in another node in the cluster. When it is '2', 2 nodes will have the backup.
- **async-backup-count:** Number of asynchronous backups.
- **max-size:** The maximum number of entries for this List.
- **item-listeners:** Lets you add listeners (listener classes) for the list items. You can also set the attribute `include-value` to `true` if you want the item event to contain the item values, and you can set the attribute `local` to `true` if you want to listen the items on the local node.

## 23.13 Set Configuration

The following are the example set configurations.

### Declarative:

```
<set name="default">
 <backup-count>1</backup-count>
 <async-backup-count>0</async-backup-count>
 <max-size>10</max-size>
 <item-listeners>
 <item-listener>
 com.hazelcast.examples.ItemListener
 </item-listener>
 </item-listeners>
</set>
```

### Programmatic:

```
Config config = new Config();
CollectionConfig collectionSet = config.getCollectionConfig();
collectionSet.setName("MySet").setBackupCount("1")
 .setMaxSize("10");
```

Set configuration has the following elements.

- **statistics-enabled**: True (default) if statistics gathering is enabled on the set, false otherwise.
- **backup-count**: Count of synchronous backups. Set is a non-partitioned data structure, so all entries of a Set reside in one partition. When this parameter is '1', it means there will be 1 backup of that Set in another node in the cluster. When it is '2', 2 nodes will have the backup.
- **async-backup-count**: Count of asynchronous backups.
- **max-size**: The maximum number of entries for this Set.
- **item-listeners**: Lets you add listeners (listener classes) for the list items. You can also set the attributes **include-value** to **true** if you want the item event to contain the item values, and you can set **local** to **true** if you want to listen to the items on the local node.

## 23.14 Ringbuffer Configuration

The following are example RingBuffer configurations.

### Declarative:

```
<ringbuffer name="default">
 <capacity>1000</capacity>
 <time-to-live-seconds>0</time-to-live-seconds>
 <backup-count>1</backup-count>
 <async-backup-count>0</async-backup-count>
 <in-memory-format>BINARY</in-memory-format>
</ringbuffer>
```

### Programmatic:

```
Config config = new Config();
RingbufferConfig rbConfig = config.getRingbufferConfig();
rbConfig.setCapacity(1000)
 .setTimeToLiveSeconds(0)
 .setBackupCount(1)
 .setAsyncBackupCount(0)
 .setInMemoryFormat("BINARY");
```

RingBuffer configuration has the following elements.

- **capacity**: Total number of items in the RingBuffer. The default value is 10000. If no time-to-live-seconds is set, the size will always be equal to capacity after the head completed the first loop around the ring. This is because no items are getting retired.
- **time-to-live-seconds**: The number of seconds that the RingBuffer retains the items before deleting them. When it is set to 0, it will be disabled. The default value is 0.
- **backup-count**: Number of synchronous backups. The default value is 1.
- **async-backup-count**: Number of asynchronous backups. The default value is 0.
- **in-memory-format**: In-memory format of an item when stored in the RingBuffer. Available values are **OBJECT** and **BINARY**. The default value is **BINARY**.

Ringbuffer configuration has the following attributes.

- **name**: Name of the ringbuffer. Required.

## 23.15 Semaphore Configuration

The following are example semaphore configurations.

### Declarative:

```
<semaphore name="semaphore">
 <backup-count>1</backup-count>
 <async-backup-count>0</async-backup-count>
 <initial-permits>3</initial-permits>
</semaphore>
```

### Programmatic:

```
Config config = new Config();
SemaphoreConfig semaphoreConfig = config.getSemaphoreConfig();
semaphoreConfig.setName("semaphore").setBackupCount("1")
 .setInitialPermits("3");
```

Semaphore configuration has the below elements.

- **initial-permits**: the thread count to which the concurrent access is limited. For example, if you set it to “3”, concurrent access to the object is limited to 3 threads.
- **backup-count**: Number of synchronous backups.
- **async-backup-count**: Number of asynchronous backups.

Semaphore configuration has the following attributes.

- **name**: The name of the semaphore. Required.

### 23.15.1 ReplicatedMap Configuration

#### Declarative:

```
<replicatedmap name="default">
 <in-memory-format>BINARY</in-memory-format>
 <concurrency-level>32</concurrency-level>
 <replication-delay-millis>100</replication-delay-millis>
 <async-fillup>true</async-fillup>
 <statistics-enabled>true</statistics-enabled>
 <entry-listeners>
 <entry-listener include-value="true">
 com.hazelcast.examples.EntryListener
 </entry-listener>
 </entry-listeners>
</replicatedmap>
```

#### Programmatic:

```
Config config = new Config();
ReplicatedMapConfig rmConfig = config.getReplicatedMapConfig("default");

rmConfig.setName("default").setInMemoryFormat(InMemoryFormat.BINARY)
 .setReplicationDelayMillis(100)
 .setAsyncFillup("true");
```



Replicated map configuration has the following elements.

- **in-memory-format**: Data type used to store entries. Possible values are BINARY, OBJECT and NATIVE.
- **concurrency-level**: Number of parallel mutexes to minimize contention on keys. The default value is 32, which is a good number for many applications. If higher contention is seen on writes to values inside of the replicated map, you can adjust this value to your needs.
- **replication-delay-millis**: The number of milliseconds after a **put** is executed before the value is replicated to other nodes. In this time, multiple puts can be operated and cached to be sent at once. This makes the latency higher for eventually consistency, but it lowers IO operations. The default value is 100ms before a replication is operated. If set to 0, no delay is used and all values are replicated one by one.
- **async-fillup**: This value defines if the replicated map is available for reads before the initial replication is completed. Default is true. If set to false, no Exception will be thrown when the replicated map is not yet ready but the call will block until finished.
- **statistics-enabled**: True (default) if statistics gathering is enabled on the replicated map, false otherwise.
- **entry-listeners**: Lets you add listeners (listener classes) for the replicated map entries. You can also set the attribute include-value to true if you want the item event to contain the entry values, and you can set local to true if you want to listen to the entries on the local node.

Replicated map configuration has the following attributes.

- **name**: Name for your replicated map.

## 23.16 Executor Service Configuration

Following are the example configurations for executor service.

**Declarative:**

```
<executor-service name="exec">
 <pool-size>1</pool-size>
 <queue-capacity>10</queue-capacity>
 <statistics-enabled>true</statistics-enabled>
</executor-service>
```

**Programmatic:**

```
Config config = new Config();
ExecutorConfig executorConfig = config.getExecutorConfig();
executorConfig.setPoolSize("1").setQueueCapacity("10")
 .setStatisticsEnabled(true);
```

Executor service configuration has the following elements.

- **pool-size**: The number of executor threads per Member for the Executor.
- **queue-capacity**: Executor's task queue capacity.
- **statistics-enabled**: Some statistics like pending operations count, started operations count, completed operations count, cancelled operations count can be retrieved by setting this parameter's value as **true**. The method for retrieving the statistics is `getLocalExecutorStats()`.

## 23.17 Cache Configuration

Following are examples of cache configurations.

**Declarative:**

```

<cache name="default">
 <key-type class-name="exampleClass"></key-type>
 <value-type class-name="exampleClass"></value-type>
 <statistics-enabled>true</statistics-enabled>
 <management-enabled>true</management-enabled>
 <read-through>false</read-through>
 <write-through>true</write-through>
 <cache-loader-factory class-name="exampleClass"></cache-loader-factory>
 <cache-writer-factory class-name="exampleClass"></cache-writer-factory>
 <expiry-policy-factory class-name="exampleClass"></expiry-policy-factory>
 <cache-entry-listeners>
 <cache-entry-listener old-value-required="true">
 <cache-entry-listener-factory class-name="exampleClass"></cache-entry-listener-factory>
 <cache-entry-event-filter-factory class-name="exampleClass"></cache-entry-event-filter-factory>
 </cache-entry-listener>
 </cache-entry-listeners>
 <in-memory-format>BINARY</in-memory-format>
 <backup-count>1</backup-count>
 <async-backup-count>0</async-backup-count>
 <eviction size="10000" max-size-policy="ENTRY_COUNT"></eviction>
 <partition-lost-listeners>
 <partition-lost-listener>CachePartitionLostListenerImpl</partition-lost-listener>
 </partition-lost-listeners>
 <quorum-ref>quorum-name</quorum-ref>
</cache>

```

### Programmatic:

```

ICache<Object, Object> cache = cacheManager.getCache().unwrap(ICache.class);
CacheConfig cacheConfig = cache.getConfigurations(CacheConfig.class);

cacheConfig.setStatisticsEnabled(true).setManagementEnabled(true);
cacheConfig.setReadThrough(true).setWriteThrough(true);
 .setBackupCount("1")
 .setAsyncBackupCount("0");

CacheEvictionConfig cacheEvictionConfig = cacheConfig.getEvictionConfig();
cacheEvictionConfig.setSize("10000").setMaxSizePolicy(CacheMaxSizePolicy.ENTRY_COUNT);

```

Cache configuration has the following elements.

- **name:** Name of the cache.
- **key-type:** Type of the keys provided as a full class name.
- **value-type:** Type of the values provided as a full class name.
- **statistics-enabled:** If set as `true`, you can retrieve statistics for this cache using the `getLocalCacheStatistics()` method.
- **management-enabled:** Defines whether the management is enabled on this cache. If you set it to `true`, you can monitor this cache on the Hazelcast Management Center.
- **read-through:** If you want to use the read-through caching mode, set this value to `true`.
- **write-through:** If you want to use the write-through caching mode, set this value to `true`.
- **cache-loader-factory:** Defines the cache loader factory class name.
- **cache-writer-factory:** Defines the cache writer factory class name.
- **expiry-policy-factory:** Defines the expiry policy factory class name.
- **cache-entry-listeners:** Includes the list of cache entry listeners.
- **in-memory-format:** Data type that will be used for storing the records. Possible values are `BINARY` (default), `OBJECT` and `NATIVE`. If you set it to `BINARY`, the keys and values will be stored as binary data. If you set it to

OBJECT, the values will be stored in their object forms. If it is NATIVE, the keys and values will be stored in the native memory.

- **backup-count**: Count of synchronous backups.
- **async-backup-count**: Count of asynchronous backups.
- **eviction**: When the maximum size is reached, the cache is evicted based on the eviction policy. It has the following attributes.
  - **size**: The cache size can be any integer between 0 and Integer.MAX\_VALUE. Default value is 0.
  - **max-size-policy**: Available policies are listed below.
    - \* **ENTRY\_COUNT**: Maximum number of cache entries in the cache. This is the default value.
    - \* **USED\_NATIVE\_MEMORY\_SIZE**: Maximum used native memory size in megabytes for each JVM.
    - \* **USED\_NATIVE\_MEMORY\_PERCENTAGE**: Maximum used native memory size percentage for each JVM.
    - \* **FREE\_NATIVE\_MEMORY\_SIZE**: Maximum free native memory size in megabytes for each JVM.
    - \* **FREE\_NATIVE\_MEMORY\_PERCENTAGE**: Maximum free native memory size percentage for each JVM.
  - **eviction-policy**: Available policies are LRU (Least Recently Used) and LFU (Least Frequently Used). Default value is LRU.
- **partition-lost-listeners** : Defines listeners for dispatching partition lost events for the cache. For more information, please see the [ICache Partition Lost Listener](#) section.
- **quorum-ref** : Name of quorum configuration that you want this cache to use.

## 23.18 Serialization Configuration

The following are example serialization configurations.

**Declarative:**

```
<serialization>
 <portable-version>2</portable-version>
 <use-native-byte-order>true</use-native-byte-order>
 <byte-order>BIG_ENDIAN</byte-order>
 <enable-compression>true</enable-compression>
 <enable-shared-object>false</enable-shared-object>
 <allow-unsafe>true</allow-unsafe>
 <data-serializable-factories>
 <data-serializable-factory factory-id="1001">
 abc.xyz.Class
 </data-serializable-factory>
 </data-serializable-factories>
 <portable-factories>
 <portable-factory factory-id="9001">
 xyz.abc.Class
 </portable-factory>
 </portable-factories>
 <serializers>
 <global-serializer>abc.Class</global-serializer>
 <serializer type-class="Employee" class-name="com.EmployeeSerializer">
 </serializer>
 </serializers>
 <check-class-def-errors>true</check-class-def-errors>
</serialization>
```

**Programmatic:**

```

Config config = new Config();
SerializationConfig srzConfig = config.getSerializationConfig();
srzConfig.setPortableVersion("2").setUseNativeByteOrder(true);
srzConfig.setAllowUnsafe(true).setEnableCompression(true);
srzConfig.setCheckClassDefErrors(true);

GlobalSerializerConfig globSrzConfig = srzConfig.getGlobalSerializerConfig();
globSrzConfig.setClassName("abc.Class");

SerializerConfig serializerConfig = srzConfig.getSerializerConfig();
serializerConfig.setTypeClass("Employee")
 .setClassName("com.EmployeeSerializer");

```

Serialization configuration has the following elements.

- **portable-version**: Defines versioning of the portable serialization. Portable version differentiates two of the same classes that have changes, such as adding/removing field or changing a type of a field.
- **use-native-byte-order**: Set to **true** to use native byte order for the underlying platform.
- **byte-order**: Defines the byte order that the serialization will use: **BIG\_ENDIAN** or **LITTLE\_ENDIAN**. The default value is **BIG\_ENDIAN**.
- **enable-compression**: Enables compression if default Java serialization is used.
- **enable-shared-object**: Enables shared object if default Java serialization is used.
- **allow-unsafe**: Set to **true** to allow **unsafe** to be used.
- **data-serializable-factory**: The **DataSerializableFactory** class to be registered.
- **portable-factory**: The **PortableFactory** class to be registered.
- **global-serializer**: The global serializer class to be registered if no other serializer is applicable.
- **serializer**: The class name of the serializer implementation.
- **check-class-def-errors**: When set to **true**, the serialization system will check for class definitions error at start and will throw a **Serialization Exception** with an error definition.

## 23.19 MapReduce Jobtracker Configuration

The MapReduce JobTracker configuration sets the behavior of the Hazelcast MapReduce framework. Every JobTracker is capable of running multiple MapReduce jobs at the same time. Therefore, one configuration is a shared resource for all jobs created by the same JobTracker. The configuration gives full control over the expected load behavior and thread counts to be used.

**Declarative:**

```

<job-tracker name="default">
 <max-thread-size>0</max-thread-size>
 <queue-size>0</queue-size>
 <retry-count>0</retry-count>
 <chunk-size>1000</chunk-size>
 <communicate-stats>true</communicate-stats>
 <topology-changed-strategy>CANCEL_RUNNING_OPERATION</topology-changed-strategy>
</job-tracker>

```

**Programmatic:**

```

Config config = new Config();
JobTrackerConfig JTcfg = config.getJobTrackerConfig()
JTcfg.setName("default").setQueueSize("0")
 .setChunkSize("1000");

```

MapReduce JobTracker configuration has the following elements.

- **max-thread-size**: The maximum thread pool size of the JobTracker.
- **queue-size**: The maximum number of tasks that can wait to be processed. A value of 0 means an unbounded queue. Very low numbers can prevent successful execution since the job might not be correctly scheduled or intermediate chunks are lost.
- **retry-count**: Currently not used but reserved for later use where the framework will automatically try to restart / retry operations from an available save point.
- **chunk-size**: Defines the number of emitted values before a chunk is sent to the reducers. If your emitted values are big or you want to better balance your work, you might want to change this to a lower or higher value. A value of 0 means immediate transmission, but remember that low values mean higher traffic costs. A very high value might cause an `OutOfMemoryError` if the emitted values do not fit into heap memory before being sent to reducers. To prevent this, you might want to use a combiner to pre-reduce values on mapping nodes.
- **communicate-stats**: Defines if statistics (for example, about processed entries) are transmitted to the job emitter. This might be used to show some kind of progress to a user inside of an UI system, but it produces additional traffic. If not needed, you might want to deactivate this.
- **topology-changed-strategy**: Defines how the MapReduce framework will react on topology changes while executing a job. Currently, only `CANCEL_RUNNING_OPERATION` is fully supported, which throws an exception to the job emitter (will throw a `com.hazelcast.mapreduce.TopologyChangedException`).

MapReduce JobTracker configuration has the following attributes.

- **name**: The name of the JobTracker. Required.

## 23.20 Services Configuration

This configuration is used for Hazelcast Service Provider Interface (SPI). The following are example configurations.

**Declarative:**

```
<services enable-defaults="true">
 <service enabled="true">
 <name>MyService</name>
 <class-name>MyServiceClass</class-name>
 <properties>
 <property>
 <property name="com.property.foo">value</property>
 </property>
 </properties>
 <configuration>
 abcConfig
 </configuration>
 </service>
</services>
```

**Programmatic:**

```
Config config = new Config();
ServicesConfig servicesConfig = config.getServicesConfig();

servicesConfig.setEnableDefaults(true);

ServiceConfig svcConfig = servicesConfig.getServiceConfig();
svcConfig.setEnabled(true).setName("MyService")
 .setClassName("MyServiceClass");

svcConfig.setProperty("com.property.foo", "value");
```

SPI configuration has the following elements.

- **name:** Name of the service to be registered.
- **class-name:** Name of the class that you develop for your service.
- **properties:** The custom properties that you can add to your service. You enable/disable these properties and set their values using this element.
- **configuration:** You can include configuration items which you develop using the `Config` object in your code.

## 23.21 Management Center Configuration

Management Center configuration is used to enable/disable Hazelcast Management Center and specify a time frequency for which the tool is updated with the cluster information.

The example configurations are shown below.

### Declarative:

```
<management-center enabled="true" update-interval="3">http://localhost:8080/
mancenter</management-center>
```

### Programmatic:

```
Config config = new Config();
config.getManagementCenterConfig().setEnabled(true)
 .setUrl("http://localhost:8080/mancenter")
 .setUpdateInterval(3);
```

Management Center configuration has the following attributes.

- **enabled:** Set to `true` to enable Management Center.
- **url:** The URL where Management Center will work.
- **updateInterval:** The time frequency (in seconds) for which Management Center will take information from Hazelcast cluster.

## 23.22 WAN Replication Configuration

The following are example WAN replication configurations.

### Declarative Configuration:

```
<wan-replication name="my-wan-cluster">
 <target-cluster group-name="tokyo" group-password="tokyo-pass">
 <replication-impl>com.hazelcast.wan.impl.WanNoDelayReplication</replication-impl>
 <end-points>
 <address>10.2.1.1:5701</address>
 <address>10.2.1.2:5701</address>
 </end-points>
 </target-cluster>
 <target-cluster group-name="london" group-password="london-pass">
 <replication-impl>com.hazelcast.wan.impl.WanNoDelayReplication</replication-impl>
 <end-points>
 <address>10.3.5.1:5701</address>
 <address>10.3.5.2:5701</address>
 </end-points>
 </target-cluster>
</wan-replication>
```

**Programmatic Configuration:**

```

Config config = new Config();
WanReplicationConfig wrConfig = config.getWanReplicationConfig();
WanTargetClusterConfig wtcConfig = wrConfig.getWanTargetClusterConfig();

wrConfig.setName("my-wan-cluster");
wtcConfig.setGroupName("tokyo").setGroupPassword("tokyo-pass");
wtcConfig.setReplicationImplObject("com.hazelcast.wan.impl.WanNoDelayReplication");

```

WAN replication configuration has the following elements.

- **name:** Name for your WAN replication configuration.
- **target-cluster:** Creates a group and its password.
- **replication-impl:** Name of the class implementation for the WAN replication.
- **end-points:** IP addresses of the cluster members for which the WAN replication is implemented.

## 23.23 Enterprise WAN Replication Configuration

### Enterprise Only

Figure 23.1:

The following are example Enterprise WAN replication configurations.

**Declarative Configuration:**

```

<wan-replication name="my-wan-cluster">
 <target-cluster group-name="tokyo" group-password="tokyo-pass">
 <replication-impl>com.hazelcast.enterprise.wan.replication.
 WanNoDelayReplication</replication-impl>
 <end-points>
 <address>10.2.1.1:5701</address>
 <address>10.2.1.2:5701</address>
 </end-points>
 </target-cluster>
</wan-replication>
<wan-replication name="my-wan-cluster-batch" snapshot-enabled="false">
 <target-cluster group-name="london" group-password="london-pass">
 <replication-impl>com.hazelcast.enterprise.wan.replication.
 WanBatchReplication</replication-impl>
 <end-points>
 <address>10.3.5.1:5701</address>
 <address>10.3.5.2:5701</address>
 </end-points>
 </target-cluster>
</wan-replication>

```

**Programmatic Configuration:**

```

Config config = new Config();

//No delay replication config
WanReplicationConfig wrConfig = new WanReplicationConfig();

```



```

WanTargetClusterConfig wtcConfig = wrConfig.getWanTargetClusterConfig();

wrConfig.setName("my-wan-cluster");
wtcConfig.setGroupName("tokyo").setGroupPassword("tokyo-pass");
wtcConfig.setReplicationImpl("com.hazelcast.enterprise.wan.replication.WanNoDelayReplication");

List<String> endpoints = new ArrayList<String>();
endpoints.add("10.2.1.1:5701");
endpoints.add("10.2.1.1:5701");
wtcConfig.setEndpoints(endpoints);
config.addWanReplicationConfig(wrConfig);

//Batch Replication Config
WanReplicationConfig wrConfig = new WanReplicationConfig();
WanTargetClusterConfig wtcConfig = wrConfig.getWanTargetClusterConfig();

wrConfig.setName("my-wan-cluster-batch");
wrConfig.setSnapshotEnabled(false);
wtcConfig.setGroupName("london").setGroupPassword("london");
wtcConfig.setReplicationImpl("com.hazelcast.enterprise.wan.replication.WanBatchReplication");

List<String> batchEndpoints = new ArrayList<String>();
batchEndpoints.add("10.3.5.1:5701");
batchEndpoints.add("10.3.5.2:5701");
wtcConfig.setEndpoints(batchEndpoints);
config.addWanReplicationConfig(wrConfig);

```

Enterprise WAN replication configuration has the following elements.

- **name**: Name for your WAN replication configuration.
- **snapshot-enabled**: Only valid when used with `WanBatchReplication`. When set to `true`, only the latest events (based on key) are selected and sent in a batch.
- **target-cluster**: Configures target cluster's group name and password.
- **replication-impl**: Name of the class implementation for the Enterprise WAN replication.
- **end-points**: IP addresses of the cluster members for which the Enterprise WAN replication is implemented.

### 23.23.1 IMap and ICache WAN Configuration

To enable WAN replication for an IMap or ICache instance, you can use `wan-replication-ref` element. Each IMap and ICache instance can have different WAN replication configurations.

**Declarative Configuration:**

```

<wan-replication name="my-wan-cluster">
 ...
</wan-replication>
<map name="testMap">
 <wan-replication-ref name="testWanRef">
 <merge-policy>TestMergePolicy</merge-policy>
 <republishing-enabled>false</republishing-enabled>
 </wan-replication-ref>
</map>
<cache name="testCache">
 <wan-replication-ref name="testWanRef">
 <merge-policy>com.hazelcast.cache.merge.PassThroughCacheMergePolicy</merge-policy>
 </wan-replication-ref>
</cache>

```



**Programmatic Configuration:**

```

Config config = new Config();

WanReplicationConfig wrConfig = new WanReplicationConfig();
WanTargetClusterConfig wtcConfig = wrConfig.getWanTargetClusterConfig();

wrConfig.setName("my-wan-cluster");
...
config.addWanReplicationConfig(wrConfig);

WanReplicationRef wanRef = new WanReplicationRef();
wanRef.setName("my-wan-cluster");
wanRef.setMergePolicy(PassThroughMergePolicy.class.getName());
wanRef.setRepublishingEnabled(true);
config.getMapConfig("testMap").setWanReplicationRef(wanRef);

WanReplicationRef cacheWanRef = new WanReplicationRef();
cacheWanRef.setName("my-wan-cluster");
cacheWanRef.setMergePolicy("com.hazelcast.cache.merge.PassThroughCacheMergePolicy");
cacheWanRef.setRepublishingEnabled(true);
config.getCacheConfig("testCache").setWanReplicationRef(cacheWanRef);

```



**NOTE:** Caches that are created dynamically do not support WAN replication functionality. Cache configurations should be defined either declaratively (by XML) or programmatically on both source and target clusters.

`wan-replication-ref` has the following elements;

- `name`: Name of `wan-replication` configuration. IMap or ICache instance uses this `wan-replication` config. Please refer to the [Enterprise WAN Replication Configuration section](#) for details about `wan-replication` configuration.
- `merge-policy`: Resolve conflicts that are occurred when target cluster already has the replicated entry key.
- `republishing-enabled`: When enabled, an incoming event to a member is forwarded to target cluster of that member.

**Merge policies:**

4 merge policy implementations for IMap and 2 merge policy implementations for ICache are provided out of the box.

IMap has the following merge policies:

- `com.hazelcast.map.merge.PutIfAbsentMapMergePolicy`: Incoming entry merges from the source map to the target map if it does not exist in the target map.
- `com.hazelcast.map.merge.HigherHitsMapMergePolicy`: Incoming entry merges from the source map to the target map if the source entry has more hits than the target one.
- `com.hazelcast.map.merge.PassThroughMergePolicy`: Incoming entry merges from the source map to the target map unless the incoming entry is not null.
- `com.hazelcast.map.merge.LatestUpdateMapMergePolicy`: Incoming entry merges from the source map to the target map if the source entry has been updated more recently than the target entry. Please note that this merge policy can only be used when the clusters' clocks are in sync.

ICache has the following merge policies:

- `com.hazelcast.cache.merge.HigherHitsCacheMergePolicy`: Incoming entry merges from the source cache to the target cache if the source entry has more hits than the target one.
- `com.hazelcast.cache.merge.PassThroughCacheMergePolicy`: Incoming entry merges from the source cache to the target cache unless the incoming entry is not null.

## 23.24 Quorum Configuration

The following are example list configurations.

**Declarative:**

```
<quorum name="quorumRuleWithThreeNodes" enabled="true">
 <quorum-size>3</quorum-size>
 <quorum-type>READ</quorum-type>
 <quorum-listeners>
 <quorum-listener>com.company.quorum.ThreeNodeQuorumListener</quorum-listener>
 </quorum-listeners>
</quorum>
```

**Programmatic:**

```
Config config = new Config();
QuorumConfig quorumCfg = config.getQuorumConfig();
quorumCfg.setName("quorumRuleWithThreeNodes")
 .setSize(3)
 .setEnabled("true")
 .setType("READ");
```

To define the quorum to the map:

```
MapConfig mapConfig = new MapConfig();
mapConfig.setQuorumName("quorumRuleWithThreeNodes");

Config config = new Config();
config.addQuorumConfig(quorumConfig);
config.addMapConfig(mapConfig);
```

Quorum configuration has the following elements.

- **quorum-size:** Minimum number of members required in a cluster for the cluster to remain in an operational state. If the number of members is below the defined minimum at any time, the operations are rejected and the rejected operations return a `QuorumException` to their callers.
- **quorum-type:** Type of the cluster quorum. Available values are `READ`, `WRITE` and `READ_WRITE`.
- **quorum-listeners:** Lets you register quorum listeners to be notified about quorum results. Quorum listeners are local to the member that they are registered, so they receive only events occurred on that local member.

## 23.25 Partition Group Configuration

Hazelcast distributes key objects into partitions using a consistent hashing algorithm. Those partitions are assigned to nodes. An entry is stored in the node that owns the partition to which the entry's key is assigned. The total partition count is 271 by default; you can change it with the configuration property `hazelcast.map.partition.count`. Please see the [System Properties section](#).

Along with those partitions, there are also copies of the partitions as backups. Backup partitions can have multiple copies due to the backup count defined in configuration, such as first backup partition, second backup partition, etc. A node cannot hold more than one copy of a partition (ownership or backup). By default, Hazelcast distributes partitions and their backup copies randomly and equally among cluster nodes, assuming all nodes in the cluster are identical.

But what if some nodes share the same JVM or physical machine or chassis and you want backups of these nodes to be assigned to nodes in another machine or chassis? What if processing or memory capacities of some nodes are different and you do not want an equal number of partitions to be assigned to all nodes?

You can group nodes in the same JVM (or physical machine) or nodes located in the same chassis. Or you can group nodes to create identical capacity. We call these groups **partition groups**. Partitions are assigned to those partition groups instead of to single nodes. Backups of these partitions are located in another partition group.

When you enable partition grouping, Hazelcast presents three choices for you to configure partition groups.

- You can group nodes automatically using the IP addresses of nodes, so nodes sharing the same network interface will be grouped together. All members on the same host (IP address or domain name) will be a single partition group. This helps to avoid data loss when a physical server crashes, because multiple replicas of the same partition are not stored on the same host. But if there are multiple network interfaces or domain names per physical machine, that will make this assumption invalid.

```
<partition-group enabled="true" group-type="HOST_AWARE" />
```

```
Config config = ...;
PartitionGroupConfig partitionGroupConfig = config.getPartitionGroupConfig();
partitionGroupConfig.setEnabled(true)
 .setGroupType(MemberGroupType.HOST_AWARE);
```

- You can do custom grouping using Hazelcast's interface matching configuration. This way, you can add different and multiple interfaces to a group. You can also use wildcards in the interface addresses. For example, the users can create rack aware or data warehouse partition groups using custom partition grouping.

```
<partition-group enabled="true" group-type="CUSTOM">
<member-group>
 <interface>10.10.0.*</interface>
 <interface>10.10.3.*</interface>
 <interface>10.10.5.*</interface>
</member-group>
<member-group>
 <interface>10.10.10.10-100</interface>
 <interface>10.10.1.*</interface>
 <interface>10.10.2.*</interface>
</member-group>
</partition-group>
```

```
Config config = ...;
PartitionGroupConfig partitionGroupConfig = config.getPartitionGroupConfig();
partitionGroupConfig.setEnabled(true)
 .setGroupType(MemberGroupType.CUSTOM);
```

```
MemberGroupConfig memberGroupConfig = new MemberGroupConfig();
memberGroupConfig.addInterface("10.10.0.*")
 .addInterface("10.10.3.*").addInterface("10.10.5.*");
```

```
MemberGroupConfig memberGroupConfig2 = new MemberGroupConfig();
memberGroupConfig2.addInterface("10.10.10.10-100")
 .addInterface("10.10.1.*").addInterface("10.10.2.*");
```

```
partitionGroupConfig.addMemberGroupConfig(memberGroupConfig);
partitionGroupConfig.addMemberGroupConfig(memberGroupConfig2);
```

- You can give every member its own group. Each member is a group of its own and primary and backup partitions are distributed randomly (not on the same physical member). This gives the least amount of protection and is the default configuration for a Hazelcast cluster.

```
<partition-group enabled="true" group-type="PER_MEMBER" />
```

```
Config config = ...;
PartitionGroupConfig partitionGroupConfig = config.getPartitionGroupConfig();
partitionGroupConfig.setEnabled(true)
 .setGroupType(MemberGroupType.PER_MEMBER);
```

## 23.26 Listener Configurations

You can add or remove event listeners to/from the related object using the Hazelcast API.

The downside of attaching listeners using this API is the possibility of missing events between the creation of an object and registering the listener. To overcome this race condition, Hazelcast allows you to register listeners in configuration. You can register listeners using declarative, programmatic, or Spring configuration.

### 23.26.0.1 MembershipListener

- Declarative Configuration

```
<listeners>
 <listener>com.hazelcast.examples.MembershipListener</listener>
</listeners>
```

- Programmatic Configuration

```
config.addListenerConfig(
new ListenerConfig("com.hazelcast.examples.MembershipListener"));
```

- Spring XML configuration

```
<hz:listeners>
 <hz:listener class-name="com.hazelcast.spring.DummyMembershipListener"/>
 <hz:listener implementation="dummyMembershipListener"/>
</hz:listeners>
```

### 23.26.0.2 DistributedObjectListener

- Declarative Configuration

```
<listeners>
 <listener>com.hazelcast.examples.DistributedObjectListener</listener>
</listeners>
```

- Programmatic Configuration

```
config.addListenerConfig(
new ListenerConfig("com.hazelcast.examples.DistributedObjectListener"));
```

- Spring XML configuration

```
<hz:listeners>
 <hz:listener class-name="com.hazelcast.spring.DummyDistributedObjectListener"/>
 <hz:listener implementation="dummyDistributedObjectListener"/>
</hz:listeners>
```

**23.26.0.3 MigrationListener**

- Declarative Configuration

```
<listeners>
 <listener>com.hazelcast.examples.MigrationListener</listener>
</listeners>
```

- Programmatic Configuration

```
config.addListenerConfig(
new ListenerConfig("com.hazelcast.examples.MigrationListener"));
```

- Spring XML configuration

```
<hz:listeners>
 <hz:listener class-name="com.hazelcast.spring.DummyMigrationListener"/>
 <hz:listener implementation="dummyMigrationListener"/>
</hz:listeners>
```

**23.26.0.4 LifecycleListener**

- Declarative Configuration

```
<listeners>
 <listener>com.hazelcast.examples.LifecycleListener</listener>
</listeners>
```

- Programmatic Configuration

```
config.addListenerConfig(
new ListenerConfig("com.hazelcast.examples.LifecycleListener"));
```

- Spring XML configuration

```
<hz:listeners>
 <hz:listener class-name="com.hazelcast.spring.DummyLifecycleListener"/>
 <hz:listener implementation="dummyLifecycleListener"/>
</hz:listeners>
```

**23.26.0.5 EntryListener for IMap**

- Declarative Configuration

```
<map name="default">
 ...
 <entry-listeners>
 <entry-listener include-value="true" local="false">
 com.hazelcast.examples.EntryListener
 </entry-listener>
 </entry-listeners>
</map>
```

- Programmatic Configuration

```
mapConfig.addEntryListenerConfig(
new EntryListenerConfig("com.hazelcast.examples.EntryListener", false, false));
```

- Spring XML configuration

```
<hz:map name="default">
 <hz:entry-listeners>
 <hz:entry-listener include-value="true"
 class-name="com.hazelcast.spring.DummyEntryListener"/>
 <hz:entry-listener implementation="dummyEntryListener" local="true"/>
 </hz:entry-listeners>
</hz:map>
```

### 23.26.0.6 EntryListener for MultiMap

- Declarative Configuration

```
<multimap name="default">
 <value-collection-type>SET</value-collection-type>
 <entry-listeners>
 <entry-listener include-value="true" local="false">
 com.hazelcast.examples.EntryListener
 </entry-listener>
 </entry-listeners>
</multimap>
```

- Programmatic Configuration

```
multiMapConfig.addEntryListenerConfig(
new EntryListenerConfig("com.hazelcast.examples.EntryListener", false, false));
```

- Spring XML configuration

```
<hz:multimap name="default" value-collection-type="LIST">
 <hz:entry-listeners>
 <hz:entry-listener include-value="true"
 class-name="com.hazelcast.spring.DummyEntryListener"/>
 <hz:entry-listener implementation="dummyEntryListener" local="true"/>
 </hz:entry-listeners>
</hz:multimap>
```

### 23.26.0.7 ItemListener for IQueue

- Declarative Configuration

```
<queue name="default">
 ...
 <item-listeners>
 <item-listener include-value="true">
 com.hazelcast.examples.ItemListener
 </item-listener>
 </item-listeners>
</queue>
```

- Programmatic Configuration

```
queueConfig.addItemListenerConfig(
new ItemListenerConfig("com.hazelcast.examples.ItemListener", true));
```

- Spring XML configuration

```
<hz:queue name="default" >
 <hz:item-listeners>
 <hz:item-listener include-value="true"
 class-name="com.hazelcast.spring.DummyItemListener"/>
 </hz:item-listeners>
</hz:queue>
```

#### 23.26.0.8 MessageListener for ITopic

- Declarative Configuration

```
<topic name="default">
 <message-listeners>
 <message-listener>
 com.hazelcast.examples.MessageListener
 </message-listener>
 </message-listeners>
</topic>
```

- Programmatic Configuration

```
topicConfig.addMessageListenerConfig(
new ListenerConfig("com.hazelcast.examples.MessageListener"));
```

- Spring XML configuration

```
<hz:topic name="default">
 <hz:message-listeners>
 <hz:message-listener
 class-name="com.hazelcast.spring.DummyMessageListener"/>
 </hz:message-listeners>
</hz:topic>
```

#### 23.26.0.9 ClientListener

- Declarative Configuration

```
<listeners>
 <listener>com.hazelcast.examples.ClientListener</listener>
</listeners>
```

- Programmatic Configuration

```
topicConfig.addMessageListenerConfig(
new ListenerConfig("com.hazelcast.examples.ClientListener"));
```

- Spring XML configuration

```
<hz:listeners>
 <hz:listener class-name="com.hazelcast.spring.DummyClientListener"/>
 <hz:listener implementation="dummyClientListener"/>
</hz:listeners>
```

## 23.27 Logging Configuration

Hazelcast has a flexible logging configuration and does not depend on any logging framework except JDK logging. It has built-in adaptors for a number of logging frameworks and it also supports custom loggers by providing logging interfaces.

To use built-in adaptors, set the `hazelcast.logging.type` property to one of the predefined types below.

- **\*\*jdk\*\***: JDK logging (default)
- **\*\*log4j\*\***: Log4j
- **\*\*slf4j\*\***: Slf4j
- **\*\*none\*\***: disable logging

You can set `hazelcast.logging.type` through declarative configuration, programmatic configuration, or JVM system property.



**NOTE:** If you choose to use *log4j* or *slf4j*, you should include the proper dependencies in the classpath.

### Declarative Configuration

```
<hazelcast xsi:schemaLocation="http://www.hazelcast.com/schema/config
 http://www.hazelcast.com/schema/config/hazelcast-config-3.0.xsd"
 xmlns="http://www.hazelcast.com/schema/config"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">

 <properties>
 <property name="hazelcast.logging.type">jdk</property>

 </properties>
</hazelcast>
```

### Programmatic Configuration

```
Config config = new Config() ;
config.setProperty("hazelcast.logging.type", "log4j");
```

### System Property

- Using JVM parameter: ``java -Dhazelcast.logging.type=slf4j``
- Using System class: ``System.setProperty( "hazelcast.logging.type", "none" );``

If the provided logging mechanisms are not satisfactory, you can implement your own using the custom logging feature. To use it, implement the `com.hazelcast.logging.LoggerFactory` and `com.hazelcast.logging.ILogger` interfaces and set the system property `hazelcast.logging.class` as your custom `LoggerFactory` class name.

```
-Dhazelcast.logging.class=foo.bar.MyLoggingFactory
```

You can also listen to logging events generated by Hazelcast runtime by registering `LogListeners` to `LoggingService`.



```

LogListener listener = new LogListener() {
 public void log(LogEvent logEvent) {
 // do something
 }
}
HazelcastInstance instance = Hazelcast.newHazelcastInstance();
LoggingService loggingService = instance.getLoggingService();
loggingService.addLogListener(Level.INFO, listener);

```

Through the `LoggingService`, you can get the currently used `ILogger` implementation and log your own messages too.



**NOTE:** If you are not using command line for configuring logging, you should be careful about Hazelcast classes. They may be defaulted to `jdk` logging before newly configured logging is read. When logging mechanism is selected, it will not change.

## 23.28 System Properties

Hazelcast has system properties to tune some aspects of Hazelcast. You can set them as property name and value pairs through declarative configuration, programmatic configuration or JVM system property.

### Declarative Configuration

```

<hazelcast xsi:schemaLocation="http://www.hazelcast.com/schema/config
 http://www.hazelcast.com/schema/config/hazelcast-config-3.0.xsd"
 xmlns="http://www.hazelcast.com/schema/config"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">

 <properties>
 <property name="hazelcast.property.foo">value</property>

 </properties>
</hazelcast>

```

### Programmatic Configuration

```

Config config = new Config() ;
config.setProperty("hazelcast.property.foo", "value");

```

### System Property

1. Using JVM parameter: `java -Dhazelcast.property.foo=value`
2. Using System class: `System.setProperty( "hazelcast.property.foo", "value" );`

The table below lists the system properties with their descriptions in alphabetical order.

Property Name	Default Value	Type	Description
<code>hazelcast.application.validation.token</code>		string	This property can be
<code>hazelcast.backpressure.backoff.timeout.millis</code>	60000	int	Controls the maximum
<code>hazelcast.backpressure.enabled</code>	false	bool	Enable back pressure.
<code>hazelcast.backpressure.max.concurrent.invocations.per.partition</code>	100	int	The maximum numbe
<code>hazelcast.backpressure.syncwindow</code>	1000	string	Used when back press
<code>hazelcast.cache.invalidation.batch.enabled</code>	true	bool	Specifies whether the

Property Name	Default Value	Type	Description
<code>hazelcast.cache.invalidation.batch.size</code>	100	int	Defines the maximum
<code>hazelcast.cache.invalidation.batchfrequency.seconds</code>	5	int	Defines cache invalida
<code>hazelcast.clientengine.thread.count</code>		int	Maximum number of
<code>hazelcast.client.event.queue.capacity</code>	1000000	string	Default value of the c
<code>hazelcast.client.event.thread.count</code>	5	string	Thread count for han
<code>hazelcast.client.heartbeat.interval</code>	10000	string	The frequency of hear
<code>hazelcast.client.heartbeat.timeout</code>	300000	string	Timeout for the heart
<code>hazelcast.client.invocation.timeout.seconds</code>	120	string	Time to give up the i
<code>hazelcast.client.max.no.heartbeat.seconds</code>	int	300	Time after which the
<code>hazelcast.client.shuffle.member.list</code>	true	string	The client shuffles the
<code>hazelcast.connect.all.wait.seconds</code>	120	int	Timeout to connect a
<code>hazelcast.connection.monitor.interval</code>	100	int	Minimum interval in m
<code>hazelcast.connection.monitor.max.faults</code>	3	int	Maximum IO error co
<code>hazelcast.enterprise.license.key</code>	null	string	Hazelcast Enterprise l
<code>hazelcast.enterprise.wanrep.batch.size</code>	50	int	Maximum number of
<code>hazelcast.enterprise.wanrep.batchfrequency.seconds</code>	5	int	Batch sending frequen
<code>hazelcast.enterprise.wanrep.optimeout.millis</code>	60000	int	Timeout duration (in
<code>hazelcast.enterprise.wanrep.queue.capacity</code>	100000	int	Event queue capacity
<code>hazelcast.event.queue.capacity</code>	1000000	int	Capacity of internal e
<code>hazelcast.event.queue.timeout.millis</code>	250	int	Timeout to enqueue e
<code>hazelcast.event.thread.count</code>	5	int	Number of event han
<code>hazelcast.graceful.shutdown.max.wait</code>	600	int	Maximum wait in seco
<code>hazelcast.health.monitoring.delay.seconds</code>	30	int	Health monitoring log
<code>hazelcast.health.monitoring.level</code>	SILENT	string	Health monitoring log
<code>hazelcast.heartbeat.interval.seconds</code>	1	int	Heartbeat send interv
<code>hazelcast.icmp.enabled</code>	false	bool	Enable ICMP ping.
<code>hazelcast.icmp.timeout</code>	1000	int	ICMP timeout in mill
<code>hazelcast.icmp.ttl</code>	0	int	ICMP TTL (maximum
<code>hazelcast.initial.min.cluster.size</code>	0	int	Initial expected cluste
<code>hazelcast.initial.wait.seconds</code>	0	int	Initial time in seconds
<code>hazelcast.io.balancer.interval.seconds</code>	20	int	Interval in seconds be
<code>hazelcast.io.input.thread.count</code>	3	int	Number of socket inpu
<code>hazelcast.io.output.thread.count</code>	3	int	Number of socket out
<code>hazelcast.io.thread.count</code>	3	int	Number of threads pe
<code>hazelcast.jcache.provider.type</code>		string	Type of the JCache p
<code>hazelcast.jmx</code>	false	bool	Enable <b>JMX</b> agent.
<code>hazelcast.logging.type</code>	jdk	enum	Name of <b>logging</b> fram
<code>hazelcast.map.expiry.delay.seconds</code>	10	int	Useful to deal with so
<code>hazelcast.map.load.chunk.size</code>	1000	int	Chunk size for <b>MapLo</b>
<code>hazelcast.map.replica.wait.seconds.for.scheduled.tasks</code>	10	int	Scheduler delay for m
<code>hazelcast.map.write.behind.queue.capacity</code>	50000	string	Maximum write-behin
<code>hazelcast.master.confirmation.interval.seconds</code>	30	int	Interval at which nod
<code>hazelcast.max.join.merge.target.seconds</code>	20	int	Split-brain merge tim
<code>hazelcast.max.join.seconds</code>	300	int	Join timeout, maximu
<code>hazelcast.max.no.heartbeat.seconds</code>	300	int	Maximum timeout of
<code>hazelcast.max.no.master.confirmation.seconds</code>	450	int	Max timeout of maste
<code>hazelcast.max.wait.seconds.before.join</code>	20	int	Maximum wait time b
<code>hazelcast.mc.max.visible.instance.count</code>	100	int	Management Center r
<code>hazelcast.mc.max.visible.slow.operations.count</code>	10	int	Management Center r
<code>hazelcast.mc.url.change.enabled</code>	true	bool	Management Center c
<code>hazelcast.member.list.publish.interval.seconds</code>	600	int	Interval at which mas
<code>hazelcast.memcache.enabled</code>	true	bool	Enable <b>Memcache</b> clie
<code>hazelcast.merge.first.run.delay.seconds</code>	300	int	Initial run delay of sp
<code>hazelcast.merge.next.run.delay.seconds</code>	120	int	Run interval of split b
<code>hazelcast.migration.min.delay.on.member.removed.seconds</code>	5	int	Minimum delay (in se
<code>hazelcast.operation.backup.timeout.millis</code>	5	int	Maximum time a call

Property Name	Default Value	Type	Description
hazelcast.operation.call.timeout.millis	60000	int	Timeout to wait for a
hazelcast.operation.generic.thread.count	-1	int	Number of generic op
hazelcast.operation.thread.count	-1	int	Number of partition b
hazelcast.partition.backup.sync.interval	30	int	Interval for syncing ba
hazelcast.partition.count	271	int	Total partition count.
hazelcast.partition.max.parallel.replications	5	int	Maximum number of
hazelcast.partition.migration.interval	0	int	Interval to run partiti
hazelcast.partition.migration.timeout	300	int	Timeout for partition
hazelcast.partition.table.send.interval	15	int	Interval for publishing
hazelcast.partitioning.strategy.class	null	string	Class name implemen
hazelcast.performance.monitor.max.rolled.file.count	10	int	The PerformanceMon
hazelcast.performance.monitor.max.rolled.file.size.mb	10	int	The performance mon
hazelcast.performance.monitoring.enabled		bool	Enable the performan
hazelcast.performance.monitoring.delay.seconds		int	The delay in seconds
hazelcast.prefer.ipv4.stack	true	bool	Prefer Ipv4 network in
hazelcast.query.max.local.partition.limit.for.precheck	3	int	Maximum value of loc
hazelcast.query.predicate.parallel.evaluation	false	bool	Each Hazelcast memb
hazelcast.query.result.size.limit	-1	int	Result size limit for q
hazelcast.rest.enabled	true	bool	Enable <b>REST</b> client r
hazelcast.shutdownhook.enabled	true	bool	Enable Hazelcast shut
hazelcast.slow.operation.detector.enabled	true	bool	Enables/disables the
hazelcast.slow.operation.detector.log.purge.interval.seconds	300	int	Purge interval for slo
hazelcast.slow.operation.detector.log.retention.seconds	3600	int	Defines the retention
hazelcast.slow.operation.detector.stacktrace.logging.enabled	false	bool	Defines if the stacktra
hazelcast.slow.operation.detector.threshold.millis	10000	int	Defines a threshold ab
hazelcast.socket.bind.any	true	bool	Bind both server-sock
hazelcast.socket.client.bind	true	bool	Bind client socket to a
hazelcast.socket.client.bind.any	true	bool	Bind client-sockets to
hazelcast.socket.client.receive.buffer.size	-1	int	Hazelcast creates all c
hazelcast.socket.client.send.buffer.size	-1	int	Hazelcast creates all c
hazelcast.socket.connect.timeout.seconds	0	int	Socket connection tim
hazelcast.socket.keep.alive	true	bool	Socket set keep alive
hazelcast.socket.linger.seconds	0	int	Set socket <b>SO_LINGER</b>
hazelcast.socket.no.delay	true	bool	Socket set TCP no de
hazelcast.socket.receive.buffer.size	32	int	Socket receive buffer
hazelcast.socket.send.buffer.size	32	int	Socket send buffer ( <b>SO</b>
hazelcast.socket.server.bind.any	true	bool	Bind server-socket to
hazelcast.tcp.join.port.try.count	3	int	The number of increm
hazelcast.version.check.enabled	true	bool	Enable Hazelcast new
hazelcast.wait.seconds.before.join	5	int	Wait time before join



## Chapter 24

# Network Partitioning - Split Brain Syndrome

Imagine that you have 10-node cluster and that the network is divided into two in a way that 4 servers cannot see the other 6. As a result, you end up having two separate clusters: 4-node cluster and 6-node cluster. Members in each sub-cluster think that the other nodes are dead even though they are not. This situation is called Network Partitioning (a.k.a. *Split-Brain Syndrome*).

However, these two clusters have a combination of the 271 (using default) primary and backup partitions. It's very likely that not all of the 271 partitions, including both primaries and backups, exist in both mini-clusters. Therefore, from each mini-cluster's perspective, data has been lost as some partitions no longer exist (they exist on the other segment).

### 24.1 Understanding Partition Recreation

If a MapStore was in use, those lost partitions would be reloaded from some database, making each mini-cluster complete. Each mini-cluster will then recreate the missing primary partitions and continue to store data in them, including backups on the other nodes.

### 24.2 Understanding Backup Partition Creation

When primary partitions exist without a backup, a backup version problem will be detected and a backup partition will be created. When backups exist without a primary, the backups will be promoted to primary partitions and new backups will be created with proper versioning. At this time, both mini-clusters have repaired themselves with all 271 partitions with backups, and continue to handle traffic without any knowledge of each other. Given that they have enough remaining memory (assumption), they are just smaller and can handle less throughput.

### 24.3 Understanding The Update Overwrite Scenario

If a MapStore is in use and the network to the database is available, one or both of the mini-clusters will write updates to the same database. There is a potential for the mini-clusters to overwrite the same cache entry records if modified in both mini-clusters. This overwrite scenario represents a potential data loss, and thus the database design should consider an insert and aggregate on read or version strategy rather than update records in place.

If the network to the database is not available, then based on the configured or coded consistency level or transaction, entry updates are held in cache or updates are rejected (fully synchronous and consistent). When held in cache, the updates will be considered dirty and will be written to the database when it becomes available. You can view the dirty entry counts per cluster member in the Management Center web console (please see the [Map Monitoring section](#)).

## 24.4 What Happens When The Network Failure Is Fixed

Since it is a network failure, there is no way to programmatically avoid your application running as two separate independent clusters. But what will happen after the network failure is fixed and connectivity is restored between these two clusters? Will these two clusters merge into one again? If they do, how are the data conflicts resolved, because you might end up having two different values for the same key in the same map?

When the network is restored, all 271 partitions should exist in both mini-clusters and they should all undergo the merge. Once all primaries are merged, all backups are rewritten so their versions are correct. You may want to write a merge policy using the `MapMergePolicy` interface that rebuilds the entry from the database rather than from memory.

The only metadata available for merge decisions are from the `EntryView` interface that includes object size (cost), hits count, last updated/stored dates, and a version number that starts at zero and is incremented for each entry update. You could also create your own versioning scheme or capture a time series of deltas to reconstruct an entry.

## 24.5 How Hazelcast Split Brain Merge Happens

Here is, step by step, how Hazelcast split brain merge happens:

1. The oldest member of the cluster checks if there is another cluster with the same *group-name* and *group-password* in the network.
2. If the oldest member finds such a cluster, then it figures out which cluster should merge to the other.
3. Each member of the merging cluster will do the following.
  - Pause.
  - Take locally owned map entries.
  - Close all of its network connections (detach from its cluster).
  - Join to the new cluster.
  - Send merge request for each of its locally owned map entry.
  - Resume.

Each member of the merging cluster rejoins the new cluster and sends a merge request for each of its locally owned map entries. Two important points:

- The smaller cluster will merge into the bigger one. If they have equal number of members then a hashing algorithm determines the merging cluster.
- Each cluster may have different versions of the same key in the same map. The destination cluster will decide how to handle merging entry based on the `MergePolicy` set for that map. There are built-in merge policies such as `PassThroughMergePolicy`, `PutIfAbsentMapMergePolicy`, `HigherHitsMapMergePolicy` and `LatestUpdateMapMergePolicy`. You can develop your own merge policy by implementing `com.hazelcast.map.merge.MapMergePolicy`. You should set the full class name of your implementation to the `merge-policy` configuration.

```
public interface MergePolicy {
 /**
 * Returns the value of the entry after the merge
 * of entries with the same key. Returning value can be
 * null. You should consider the case where existingEntry is null.
 */
 @param mapName name of the map
 @param mergingEntry entry merging into the destination cluster
 @param existingEntry existing entry in the destination cluster
 @return final value of the entry. If returns null then entry will be removed.
 */
 Object merge(String mapName, EntryView mergingEntry, EntryView existingEntry);
}
```

## 24.6 Specifying Merge Policies

Here is how merge policies are specified per map:

```
<hazelcast>
...
<map name="default">
 <backup-count>1</backup-count>
 <eviction-policy>NONE</eviction-policy>
 <max-size>0</max-size>
 <eviction-percentage>25</eviction-percentage>
 <!--
 While recovering from split-brain (network partitioning),
 map entries in the small cluster will merge into the bigger cluster
 based on the policy set here. When an entry merge into the
 cluster, there might an existing entry with the same key already.
 Values of these entries might be different for that same key.
 Which value should be set for the key? Conflict is resolved by
 the policy set here. Default policy is hz.ADD_NEW_ENTRY

 There are built-in merge policies such as
 There are built-in merge policies such as
 com.hazelcast.map.merge.PassThroughMergePolicy; entry will be added if
 there is no existing entry for the key.
 com.hazelcast.map.merge.PutIfAbsentMapMergePolicy ; entry will be
 added if the merging entry doesn't exist in the cluster.
 com.hazelcast.map.merge.HigherHitsMapMergePolicy ; entry with the
 higher hits wins.
 com.hazelcast.map.merge.LatestUpdateMapMergePolicy ; entry with the
 latest update wins.
 -->
 <merge-policy>MY_MERGE_POLICY_CLASS</merge-policy>
</map>

...
</hazelcast>
```



**NOTE:** Map is the only Hazelcast distributed data structure that merges after a split brain syndrome. For the other data structures (e.g. Queue, Topic, IdGenerator, etc. ), one instance of that data structure is chosen after split brain syndrome.





# Chapter 25

## License Questions

Hazelcast is distributed using the Apache License 2, therefore permissions are granted to use, reproduce and distribute it along with any kind of open source and closed source applications.

Hazelcast Enterprise is a commercial product of Hazelcast, Inc. and is distributed under a commercial license that must be acquired before using it in any type of released software. Feel free to contact Hazelcast sales department for more information on commercial offers.

Depending on the used feature-set, Hazelcast has certain runtime dependencies which might have different licenses. Following are dependencies and their respective licenses.

### 25.1 Embedded Dependencies

Embedded dependencies are merged (shaded) with the Hazelcast codebase at compile-time. These dependencies become an integral part of the Hazelcast distribution.

For license files of embedded dependencies, please see the `license` directory of the Hazelcast distribution, available at our download page.

#### **minimal-json:**

minimal-json is a JSON parsing and generation library which is a part of the Hazelcast distribution. It is used for communication between the Hazelcast cluster and the Management Center.

minimal-json is distributed under the MIT license and offers the same rights to add, use, modify, and distribute the source code as the Apache License 2.0 that Hazelcast uses. However, some other restrictions might apply.

### 25.2 Runtime Dependencies

Depending on the used features, additional dependencies might be added to the dependency set. Those runtime dependencies might have other licenses. See the following list of additional runtime dependencies.

#### **Spring Framework:**

Hazelcast offers a tight integration into the Spring Framework. Hazelcast can be configured and controlled using Spring.

The Spring Framework is distributed under the terms of the Apache License 2 and therefore it is fully compatible with Hazelcast.

#### **Hibernate:**

Hazelcast integrates itself into Hibernate as a second-level cache provider.

Hibernate is distributed under the terms of the Lesser General Public License 2.1, also known as LGPL. Please read carefully the terms of the LGPL since restrictions might apply.

**Apache Tomcat:**

Hazelcast Enterprise offers native integration into Apache Tomcat for web session clustering.

Apache Tomcat is distributed under the terms of the Apache License 2 and therefore fully compatible with Hazelcast.

**Eclipse Jetty:**

Hazelcast Enterprise offers native integration into Jetty for web session clustering.

Jetty is distributed with a dual licensing strategy. It is licensed under the terms of the Apache License 2 and under the Eclipse Public License v1.0, also known as EPL. Due to the Apache License, it is fully compatible with Hazelcast.

**JCache API (JSR 107):**

Hazelcast offers a native implementation for JCache (JSR 107), which has a runtime dependency to the JCache API.

The JCache API is distributed under the terms of the so called Specification License). Please read carefully the terms of this license since restrictions might apply.

**Boost C++ Libraries:**

Hazelcast Enterprise offers a native C++ client, which has a link-time dependency to the Boost C++ Libraries.

The Boost Libraries are distributed under the terms of the Boost Software License), which is very similar to the MIT or BSD license. Please read carefully the terms of this license since restrictions might apply.

## Chapter 26

# Common Exception Types

You may see the following exceptions in any Hazelcast operation when the following situations occur:

- **HazelcastInstanceNotActiveException:** Thrown when **HazelcastInstance** is not active (already shutdown or being shutdown) during an invocation.
- **HazelcastOverloadException:** Thrown when the system will not handle any more load due to an overload. This exception is thrown when back pressure is enabled.
- **DistributedObjectDestroyedException:** Thrown when an already destroyed **DistributedObject** (**IMap**, **IQueue**, etc.) is accessed or when a method is called over a destroyed **DistributedObject**.
- **MemberLeftException:** Thrown when a member leaves during an invocation or execution.

Hazelcast also throws the following exceptions in the cases of overall system problems such as networking issues and long pauses:

- **PartitionMigratingException:** Thrown when an operation is executed on a partition, but that partition is currently being moved.
- **TargetNotMemberException:** Thrown when an operation is sent to a machine that is not a member of the cluster.
- **CallerNotMemberException:** Thrown when an operation was sent by a machine which is not a member in the cluster when the operation is executed.
- **WrongTargetException:** Thrown when an operation is executed on the wrong machine, usually because the partition that operation belongs to has been moved to some other member.



## Chapter 27

# Frequently Asked Questions

### 27.1 Why 271 as the default partition count?

The partition count of 271, being a prime number, is a good choice because it will be distributed to the nodes almost evenly. For a small to medium sized cluster, the count of 271 gives an almost even partition distribution and optimal-sized partitions. As your cluster becomes bigger, you should make this count bigger to have evenly distributed partitions.

### 27.2 Is Hazelcast thread safe?

Yes. All Hazelcast data structures are thread safe.

## How do nodes discover each other?

When a node is started in a cluster, it will dynamically and automatically be discovered. There are three types of discovery.

- Multicast discovery: nodes in a cluster discover each other by multicast, by default.
- Discovery by TCP/IP: the first node created in the cluster (leader) will form a list of IP addresses of other joining nodes and will send this list to these nodes so the nodes will know each other.
- If your application is placed on Amazon EC2, Hazelcast has an automatic discovery mechanism. You will give your Amazon credentials and the joining node will be discovered automatically.

Once nodes are discovered, all the communication between them will be via TCP/IP. **RELATED INFORMATION**

Please refer to the [Discovering Cluster Members section](#) for detailed information.

### 27.3 What happens when a node goes down?

Once a node is gone (crashes), the following happens since data in each node has a backup in other nodes.

- First, the backups in other nodes are restored.
- Then, data from these restored backups are recovered.
- And finally, backups for these recovered data are formed.

So eventually, no data is lost.

## 27.4 How do I test the connectivity?

If you notice that there is a problem with a node joining a cluster, you may want to perform a connectivity test between the node to be joined and a node from the cluster. You can use the `iperf` tool for this purpose. For example, you can execute the below command on one node (i.e. listening on port 5701).

```
iperf -s -p 5701
```

And you can execute the below command on the other node.

```
iperf -c <IP address> -d -p 5701
```

The output should include connection information, such as the IP addresses, transfer speed, and bandwidth. Otherwise, if the output says `No route to host`, it means a network connection problem exists.

## 27.5 How do I choose keys properly?

When you store a key and value in a distributed Map, Hazelcast serializes the key and value, and stores the byte array version of them in local `ConcurrentHashMaps`. These `ConcurrentHashMaps` use `equals` and `hashCode` methods of byte array version of your key. It does not take into account the actual `equals` and `hashCode` implementations of your objects. So it is important that you choose your keys in a proper way.

Implementing `equals` and `hashCode` is not enough, it is also important that the object is always serialized into the same byte array. All primitive types like `String`, `Long`, `Integer`, etc. are good candidates for keys to be used in Hazelcast. An `unsorted Set` is an example of a very bad candidate because Java Serialization may serialize the same `unsorted set` in two different byte arrays.

## 27.6 How do I reflect value modifications?

Hazelcast always return a clone copy of a value. Modifying the returned value does not change the actual value in the map (or multimap, list, set). You should put the modified value back to make changes visible to all nodes.

```
V value = map.get(key);
value.updateSomeProperty();
map.put(key, value);
```

Collections which return values of methods (such as `IMap.keySet`, `IMap.values`, `IMap.entrySet`, `MultiMap.get`, `MultiMap.remove`, `IMap.keySet`, `IMap.values`) contain cloned values. These collections are NOT backed up by related Hazelcast objects. Therefore, changes to them are **NOT** reflected in the originals, and vice-versa.

## 27.7 How do I test my Hazelcast cluster?

Hazelcast allows you to create more than one instance on the same JVM. Each member is called `HazelcastInstance` and each will have its own configuration, socket and threads, so you can treat them as totally separate instances.

This enables you to write and to run cluster unit tests on a single JVM. Because you can use this feature for creating separate members different applications running on the same JVM (imagine running multiple web applications on the same JVM), you can also use this feature for testing your Hazelcast cluster.

Let's say you want to test if two members have the same size of a map.

```
@Test
public void testTwoMemberMapSizes() {
 // start the first member
 HazelcastInstance h1 = Hazelcast.newHazelcastInstance();
 // get the map and put 1000 entries
```

```

Map map1 = h1.getMap("testmap");
for (int i = 0; i < 1000; i++) {
 map1.put(i, "value" + i);
}
// check the map size
assertEquals(1000, map1.size());
// start the second member
HazelcastInstance h2 = Hazelcast.newHazelcastInstance();
// get the same map from the second member
Map map2 = h2.getMap("testmap");
// check the size of map2
assertEquals(1000, map2.size());
// check the size of map1 again
assertEquals(1000, map1.size());
}

```

In the test above, everything happens in the same thread. When developing a multi-threaded test, you need to carefully handle coordination of the thread executions. it is highly recommended that you use `CountDownLatch` for thread coordination (you can certainly use other ways). Here is an example where we need to listen for messages and make sure that we got these messages.

```

@Test
public void testTopic() {
 // start two member cluster
 HazelcastInstance h1 = Hazelcast.newHazelcastInstance();
 HazelcastInstance h2 = Hazelcast.newHazelcastInstance();
 String topicName = "TestMessages";
 // get a topic from the first member and add a messageListener
 ITopic<String> topic1 = h1.getTopic(topicName);
 final CountDownLatch latch1 = new CountDownLatch(1);
 topic1.addListener(new MessageListener() {
 public void onMessage(Object msg) {
 assertEquals("Test1", msg);
 latch1.countDown();
 }
 });
 // get a topic from the second member and add a messageListener
 ITopic<String> topic2 = h2.getTopic(topicName);
 final CountDownLatch latch2 = new CountDownLatch(2);
 topic2.addListener(new MessageListener() {
 public void onMessage(Object msg) {
 assertEquals("Test1", msg);
 latch2.countDown();
 }
 });
 // publish the first message, both should receive this
 topic1.publish("Test1");
 // shutdown the first member
 h1.shutdown();
 // publish the second message, second member's topic should receive this
 topic2.publish("Test1");
 try {
 // assert that the first member's topic got the message
 assertTrue(latch1.await(5, TimeUnit.SECONDS));
 // assert that the second members' topic got two messages
 assertTrue(latch2.await(5, TimeUnit.SECONDS));
 } catch (InterruptedException ignored) {
 }
}

```

```
}
}
```

You can start Hazelcast members with different configurations. Remember to call `Hazelcast.shutdownAll()` after each test case to make sure that there is no other running member left from the previous tests.

```
@After
public void cleanup() throws Exception {
 Hazelcast.shutdownAll();
}
```

For more information please check our existing tests.

## 27.8 Does Hazelcast support hundreds of nodes?

Yes. Hazelcast performed a successful test on Amazon EC2 with 200 nodes.

## 27.9 Does Hazelcast support thousands of clients?

Yes. However, there are some points you should consider. The environment should be LAN with a high stability and the network speed should be 10 Gbps or higher. If the number of nodes is high, the client type should be selected as Dummy, not Smart Client. In the case of Smart Clients, since each client will open a connection to the nodes, these nodes should be powerful enough (for example, more cores) to handle hundreds or thousands of connections and client requests. Also, you should consider using near caches in clients to lower the network traffic. And you should use the Hazelcast releases with the NIO implementation (which starts with Hazelcast 3.2).

Also, you should configure the clients attentively. Please refer to the [Java Client section](#) section for configuration notes.

## 27.10 What is the difference between old LiteMember and new Smart Client?

LiteMember supports task execution (distributed executor service), smart client does not. Also, LiteMember is highly coupled with cluster, smart client is not.

## 27.11 How do you give support?

We have two support services: community and commercial support. Community support is provided through our Mail Group and StackOverflow web site. For information on support subscriptions, please see [Hazelcast.com](#).

## 27.12 Does Hazelcast persist?

No. However, Hazelcast provides `MapStore` and `MapLoader` interfaces. For example, when you implement the `MapStore` interface, Hazelcast calls your store and load methods whenever needed.

## 27.13 Can I use Hazelcast in a single server?

Yes. But please note that Hazelcast's main design focus is multi-node clusters to be used as a distribution platform.



## 27.14 How can I monitor Hazelcast?

**Hazelcast Management Center** is what you use to monitor and manage the nodes running Hazelcast. In addition to monitoring the overall state of a cluster, you can analyze and browse data structures in detail, you can update map configurations, and you can take thread dumps from nodes.

Moreover, JMX monitoring is also provided. Please see the [Monitoring with JMX section](#) for details.

## 27.15 How can I see debug level logs?

By changing the log level to “Debug”. Below are sample lines for **log4j** logging framework. Please see the [Logging Configuration section](#) to learn how to set logging types.

First, set the logging type as follows.

```
String location = "log4j.configuration";
String logging = "hazelcast.logging.type";
System.setProperty(logging, "log4j");
/**if you want to give a new location. */
System.setProperty(location, "file:/path/mylog4j.properties");
```

Then set the log level to “Debug” in the properties file. Below is example content.

```
direct log messages to stdout
log4j.appender.stdout=org.apache.log4j.ConsoleAppender
log4j.appender.stdout.Target=System.out
log4j.appender.stdout.layout=org.apache.log4j.PatternLayout
log4j.appender.stdout.layout.ConversionPattern=%d{ABSOLUTE} %5p [%c{1}] - %m%n
log4j.logger.com.hazelcast=debug
#log4j.logger.com.hazelcast.cluster=debug
#log4j.logger.com.hazelcast.partition=debug
#log4j.logger.com.hazelcast.partition.InternalPartitionService=debug
#log4j.logger.com.hazelcast.nio=debug
#log4j.logger.com.hazelcast.hibernate=debug
```

The line `log4j.logger.com.hazelcast=debug` is used to see debug logs for all Hazelcast operations. Below this line, you can select to see specific logs (cluster, partition, hibernate, etc.).

## 27.16 What is the difference between client-server and embedded topologies?

In the embedded topology, nodes include both the data and application. This type of topology is the most useful if your application focuses on high performance computing and many task executions. Since application is close to data, this topology supports data locality.

In the client-server topology, you create a cluster of nodes and scale the cluster independently. Your applications are hosted on the clients, and the clients communicate with the nodes in the cluster to reach data.

Client-server topology fits better if there are multiple applications sharing the same data or if application deployment is significantly greater than the cluster size (for example, 500 application servers vs. 10 node cluster).

## 27.17 How do I know it is safe to kill the second node?

Below code snippet shuts down the cluster members if the cluster is safe for a member shutdown.

```
PartitionService partitionService = hazelcastInstance.getPartitionService();
if (partitionService.isClusterSafe()) {
 hazelcastInstance.shutdown(); // or terminate
}
```

Below code snippet shuts down the local member if the member is safe to be shutdown.

```
PartitionService partitionService = hazelcastInstance.getPartitionService();
if (partitionService.isLocalMemberSafe()) {
 hazelcastInstance.shutdown(); // or terminate
}
```

### RELATED INFORMATION

Please refer to the [Cluster-Member Safety Check section](#) for more information.

## 27.18 When do I need Native Memory solutions?

Native Memory solutions can be preferred:

- when the amount of data per node is large enough to create significant garbage collection pauses.
- when your application requires predictable latency.

## 27.19 Is there any disadvantage of using near-cache?

The only disadvantage when using Near Cache is that it may cause stale reads.

## 27.20 Is Hazelcast secure?

Hazelcast supports symmetric encryption, secure sockets layer (SSL), and Java Authentication and Authorization Service (JAAS). Please see the [Security chapter](#) for more information.

## 27.21 How can I set socket options?

Hazelcast allows you to set some socket options such as `SO_KEEPALIVE`, `SO_SNDBUF`, and `SO_RCVBUF` using Hazelcast configuration properties. Please see `hazelcast.socket.*` properties explained in the [System Properties section](#).

## 27.22 I periodically see client disconnections during idle time?

In Hazelcast, socket connections are created with the `SO_KEEPALIVE` option enabled by default. In most operating systems, default keep-alive time is 2 hours. If you have a firewall between clients and servers which is configured to reset idle connections/sessions, make sure that the firewall's idle timeout is greater than the TCP keep-alive defined in the OS.

For additional information please see:

- Using TCP keepalive under Linux
- Microsoft TechNet

## 27.23 How to get rid of “java.lang.OutOfMemoryError: unable to create new native thread”?

If you encounter an error of `java.lang.OutOfMemoryError: unable to create new native thread`, it may be caused by exceeding the available file descriptors on your operating system, especially if it is Linux. This exception is usually thrown on a running node, after a period of time when the thread count exhausts the file descriptor availability.

The JVM on Linux consumes a file descriptor for each thread created. The default number of file descriptors available in Linux is usually 1024. If you have many JVMs running on a single machine, it is possible to exceed this default number.

You can view the limit using the following command.

```
ulimit -a
```

At the operating system level, Linux users can control the amount of resources (and in particular, file descriptors) used via one of the following options.

1 - Editing the `limits.conf` file:

```
vi /etc/security/limits.conf
```

```
testuser soft nofile 4096

testuser hard nofile 10240

```

2 - Or using the `ulimit` command:

```
ulimit -Hn
```

```
10240
```

The default number of process per users is 1024. Adding the following to your `$HOME/.profile` could solve the issue:

```
ulimit -u 4096
```

## 27.24 Does repartitioning wait for Entry Processor?

Repartitioning is the process of redistributing the partition ownerships. Hazelcast performs the repartitioning in the cases where a node leaves the cluster or joins the cluster. If a repartitioning will happen while an entry processor is active in a node processing on an entry object, the repartitioning waits for the entry processor to complete its job.

## 27.25 Why do Hazelcast instances on different machines not see each other?

Assume you have two instances on two different machines and you develop a configuration as shown below.

```
Config config = new Config();
NetworkConfig network = config.getNetworkConfig();

JoinConfig join = network.getJoin();
join.getMulticastConfig().setEnabled(false);
join.getTcpIpConfig().addMember("IP1")
 .addMember("IP2").setEnabled(true);
network.getInterfaces().setEnabled(true)
 .addInterface("IP1").addInterface("IP2");
```

When you create the Hazelcast instance, you have to pass the configuration to the instance. If you create the instances without passing the configuration, each instance starts but cannot see each other. Therefore, a correct way to create the instance is the following:

```
HazelcastInstance instance = Hazelcast.newHazelcastInstance(config);
```

The following is an incorrect way:

```
HazelcastInstance instance = Hazelcast.newHazelcastInstance();
```

## 27.26 What Does “Replica: 1 has no owner” Mean?

When you start more nodes after the first one is started, you will see `replica: 1 has no owner` entry in the newly started node’s log. There is no need to worry about it since it refers to a transitory state. It only means the replica partition is not ready/assigned yet and eventually it will be.

## Chapter 28

# Glossary

Term	Definition
<b>2-phase Commit</b>	2-phase commit protocol is an atomic commitment protocol for distributed systems. It consists of t
<b>ACID</b>	A set of properties (Atomicity, Consistency, Isolation, Durability) guaranteeing that transactions a
<b>Cache</b>	A high-speed access area that can be either a reserved section of main memory or storage device.
<b>Garbage Collection</b>	Garbage collection is the recovery of storage that is being used by an application when that applica
<b>Hazelcast Cluster</b>	A virtual environment formed by Hazelcast members communicating with each other in the cluster
<b>Hazelcast Partitions</b>	Memory segments containing the data. Hazelcast is built-on the partition concept, it uses partition
<b>IMDG</b>	An in-memory data grid (IMDG) is a data structure that resides entirely in memory, and is distrib
<b>Invalidation</b>	The process of marking an object as being invalid across the distributed cache.
<b>Java heap</b>	Java heap is the space that Java can reserve and use in memory for dynamic memory allocation. A
<b>LRU, LFU</b>	LRU and LFU are two of eviction algorithms. LRU is the abbreviation for Least Recently Used. It
<b>Member</b>	A Hazelcast instance. Depending on your Hazelcast usage, it can refer to a server or a Java virtual
<b>Multicast</b>	A type of communication where data is addressed to a group of destination nodes simultaneously.
<b>Near Cache</b>	A caching model. When near cache is enabled, an object retrieved from a remote node is put into t
<b>NoSQL</b>	“Not Only SQL”. A database model that provides a mechanism for storage and retrieval of data th
<b>Race Condition</b>	This condition occurs when two or more threads can access shared data and they try to change it a
<b>RSA</b>	An algorithm developed by Rivest, Shamir and Adleman to generate, encrypt and decrypt keys for
<b>Serialization</b>	Process of converting an object into a stream of bytes in order to store the object or transmit it to
<b>Split Brain</b>	Split brain syndrome, in a clustering context, is a state in which a cluster of nodes gets divided (or
<b>Transaction</b>	Means a sequence of information exchange and related work (such as data store updating) that is t