# Configuration Register Values

| Value | Description |
|---|---|
| 0xnnn0 | Use ROM monitor mode (manually boot using the **b** command) |
| 0xnnn1 | Automatically boot from ROM (default if router has no Flash) |
| 0xnnn2 to 0xnnnF | Examine NVRAM for boot system commands (0xnnn2 is the default if the router has Flash) |

- Configuration register의 Boot Field setting
  - router(config)# config-register 0x2102
  - rommon1> confreg 0x2102
  - NVRAM(startup-config)의 boot system 명령에 따름
  - default : Flash
  - ex) (0x 2100) – rommon (0x 2101) – rom(boot)
    (0x 2102) – flash,startup (0x 2142) – flash,startup(x)

# Router Password Recovery

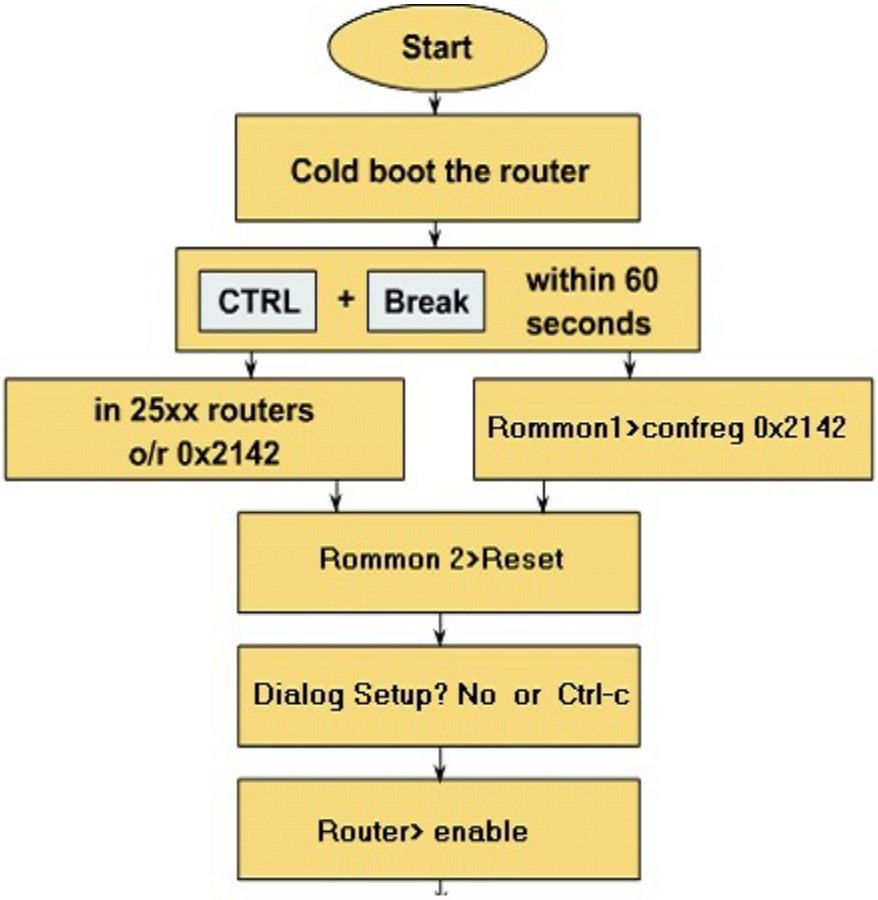


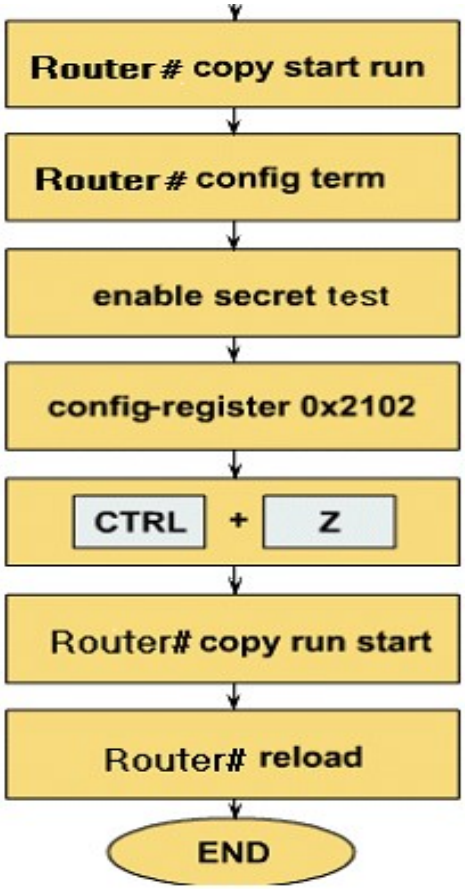

# TFTP를 이용한 Configuration Files 관리

```
GAD#copy running-config tftp
Address or name of remote host
[]?192.168.119.20
Destination filename [GAD-confg]?
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
624 bytes copied in 7.05 secs
GAD#copy tftp running-config
Address or name of remote host []?
192.168.119.20
Source filename []?GAD-confg
Destination filename [running-config]?
Accessing tftp://192.168.119.20/GAD-
confg…
Loading GAD-confg from 192.168.119.20
(via FastEthernet 0/0):
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
[OK-624 bytes]
624 bytes copied in 9.45 secs
GAD#
```

# TFTP를 이용한 IOS Image Upgrade

```
GAD#copy tftp flash
Address or name of remote host []?192.168.119.20
Source filename []? C2600-js-l_121-3.bin
Destination filename [C2600-js-l_121-3.bin]?
Accessing tftp://192.168.119.20/ C2600-js-l_121-3.bin
Erase flash: before copying? [confirm]
Erasing the flash file system will remove all files
Continue? [confirm]
Erasing device eeeeee…eeeeeeeeeeeee…erased
Loading C2600-js-l_121-3.bin from 192.168.119.20 (via
FastEthernet 0/0): !!!!!!!!!!!!!!…!!!!!!!!!!!!!!!!!!
Verifying Check sum ............OK
[OK-8906589 bytes]
8906589 bytes copied in 277.45 secs
GAD#
```

# Switch

- Switch 초기화

  # erase start → config.txt 파일 삭제 (router의 startup-config와 동일)

  # delete vlan.dat → vlan.dat 파일 삭제

  # reload

  # sh flash → vlan.dat 파일과 config.txt 파일 확인 가능

  # sh mac → MAC table 확인 가능

- 스위치는 Flash에 IOS, config 파일을 동시에 갖고 있음
- NVRAM이 존재하지 않음

# Switch 기본 설정

- Hostname 변경

  Switch(config)# hostname Switch_2950

- IP 주소 설정

  Switch(config)# int vlan1

  Switch(config-if)# ip add 192.168.0.2 255.255.255.0

  Switch(config-if)# no shut

- Gateway 설정

  Switch(config)# ip default-gateway 192.168.0.1