
SolariNet Quick Start Guide

The home network, explained in pictures. How to sign in, see that everything is fine, read an alert, add or install a machine, trust the house certificate and look after your Akoria account.

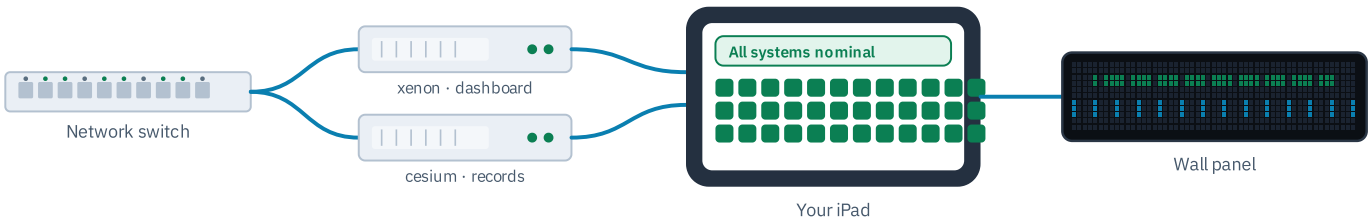

FOR
Everyone in the household. No computer background needed.

SYSTEM
dashboard.akoria.net
SolariNet release on main, November 2026

EDITION
1.0 · 5 November 2026
US Letter · screen and print

Companion manuals. The *User's Manual* explains every screen in depth, the *Developer's Manual* covers the code, and the *API Expansion Manual* covers integrations. This guide never contains passwords, codes or keys. If a step says **ask Jason**, that step needs the administrator.

CONTENTS

What is in this guide

0 **How to read this guide**
Pictures, badges, colours and the words used everywhere

1 **Sign in to the dashboard**
Safari, the SSO button, the Akoria page, and the Home Screen icon

2 **Is everything OK? Check the whole network**
Fleet Overview, the heatmap, the topology map and the alert bell

3 **Check one machine**
Node detail: the hero strip, criticality, gauges, trend and the operator buttons

4 **Read and acknowledge an alert**
The alert bell, the Active board, one row explained, Ack and Ack all

5 **Read the wall panel and stop its alarm**
What the LED panel shows, the buttons, the alarm and NO DATA / LINK LOST

6 **Install a new server from scratch**
Inventory check, plug in, Images & Stacks, stage, network boot, enrol

7 **Add a machine that is already running**
Discovery scan, + Monitor, the Monitor system dialog, optional client deploy, Sign

8 **From a barcode on the box to a running server**
Tags & Scan, Receive new stock, labels, adopt, Link entity, reimage

9 **Trust the house certificate (Akoria CA)**
iPad and iPhone step by step; then macOS and Windows briefly

10 **Your Akoria account**
One sign-in for everything: first login, passkeys and codes, password reset, signing out

11 **Find the manuals and get help**
The documentation portal, reading a manual, telling Jason, what never to share

12 **Set up a new user**
Create the account, choose the role, hand it over

13 **Update every machine at once**
Check, read the counts, Apply all updates, read the results

14 **Add one asset by hand**
Add asset, Scan to prefill, check the fields, Save asset

START HERE

How to read this guide

Five minutes here saves confusion later. The pictures, the badges and the words below are used the same way on every page.

Each task in this guide is a row of pictures. Read the pictures in number order and do what the sentence under each one says. The pictures are simplified drawings of the real screens, so the live screen has more detail and your own machine names.



Tap here
The blue ring marks the thing to tap or select in that picture.



Look here
A dashed ring points at something to read or check, not tap.



Numbered dot
Matches a number in the sentence under the picture.



Colours
Green is healthy, amber is degraded, red is down, grey is unknown, violet is maintenance, blue is information. Colour is always paired with a word.

Who can do what

Every task shows a badge. EVERYONE means anyone with an Akoria account can do it. OPERATOR means the account needs operator rights, which Jason grants. ASK JASON marks a step only the administrator can do. If a button does nothing, or a change fails with a message about an *operator role*, you have hit one of these limits. That is normal, not a fault.

Words you will meet

Dashboard	The SolariNet web page at dashboard.akoria.net. Works best on an iPad; it also works on a phone or computer.
Machine, system, host	One computer on the house network: a server, a Raspberry Pi, a NAS, a switch. The dashboard uses all three words for the same thing.
Fleet	All the machines together.
Alert	A message that something crossed a limit, for example a disk nearly full. Red is critical, amber is a warning.
Akoria SSO	The house sign-in service. One username and password for the dashboard and the other Akoria services (Task 10).
Client (agent)	A small program installed on a machine that reports its health to the dashboard every few seconds.
Inventory, tag	The list of things the house owns. A tag is the sticker with a barcode that identifies one item.
Reimage, provision	Wiping a machine and installing a fresh operating system on it over the network, then setting it up automatically.

Before you begin


- You need an Akoria account. If you do not have one, ask Jason.
- Use Safari on an iPad for the best fit. Turn the iPad sideways for the maps and the install screens.
- You must be on the house network (at home, or on the house VPN). The dashboard is not on the public internet.
- Nothing in this guide can break a machine except Task 6 and Task 8, which wipe one on purpose and say so loudly.

TASK 1


Sign in to the dashboard

EVERYONE


The dashboard is a web page at **dashboard.akoria.net**. You sign in once with your Akoria account, and it keeps you signed in while you use it.




The whole task at a glance. Five stops from a closed iPad to the home page of the dashboard.

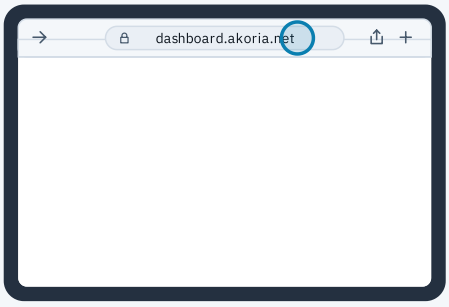


1 On your iPad, open **Safari** and type **dashboard.akoria.net** in the address bar. You must be at home or on the house VPN.

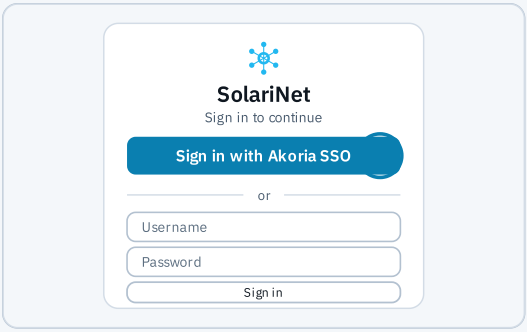


2 The sign-in screen appears. Tap **Sign in with Akoria SSO**. The username and password boxes below it are for emergency local accounts, which most people do not have.

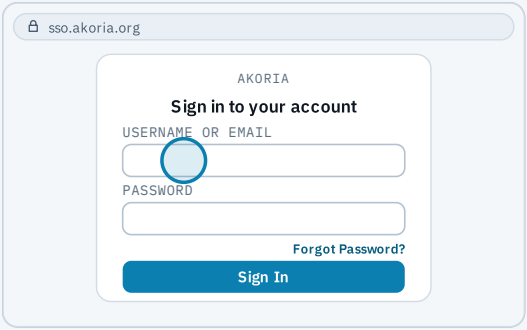


3 Safari moves to the Akoria sign-in page. Type your Akoria **username or email** and your **password**, then tap **Sign In**.

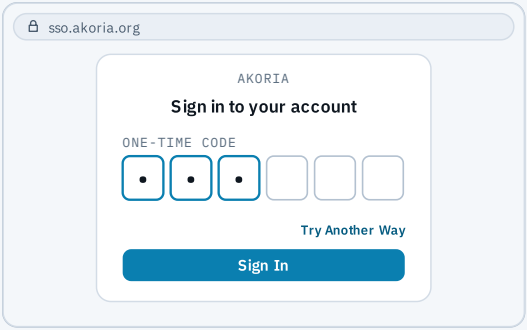

4 If your account has a second step, Akoria asks for it now: a six-digit code from your authenticator app, or a passkey with Face ID or Touch ID. Task 10 explains how to set these up.

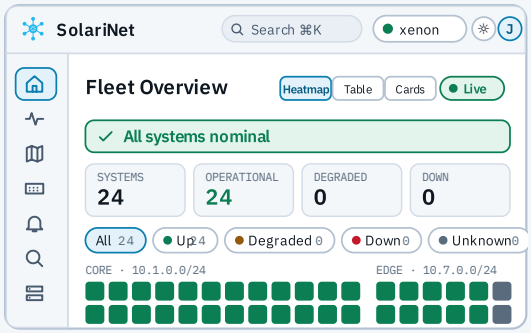

5 You are back on the dashboard, on **Fleet Overview**. A green **All systems nominal** banner means nothing needs you. Task 2 explains the rest of this page.

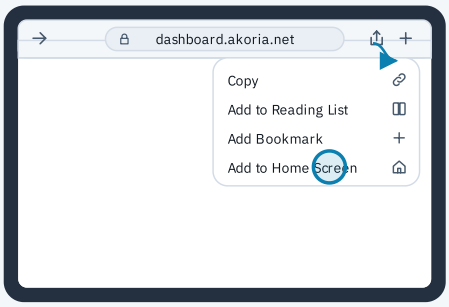

6 Optional, but handy: tap Safari's **Share** button, then **Add to Home Screen**, then **Add**. SolariNet gets its own icon and opens full screen like an app.

If something goes wrong

YOU SEE	WHAT TO DO
Invalid or expired SSO login attempt	The Akoria sign-in took longer than 10 minutes. Go back to the dashboard and tap **Sign in with Akoria SSO** again.
The page never loads, or Safari says it cannot find the server	You are probably not on the house network. Join the house Wi-Fi or the VPN and try again.
Safari warns that the connection is not private	The dashboard uses a house certificate that Safari does not know yet. Task 9 explains this; if the warning is on dashboard.akoria.net itself, ask Jason before continuing.
You were signed out by yourself	Sessions end after 30 minutes with no activity, and an Akoria sign-in lasts at most one hour. Sign in again.
You forgot your password	Task 10, step 6.

TASK 2


Is everything OK? Check the whole network

EVERYONE


One glance at **Fleet Overview** answers the usual question. The rest of the page tells you what, where and how bad.




The whole task at a glance. Everything you need is on the first two screens. The other three are for when you are curious.

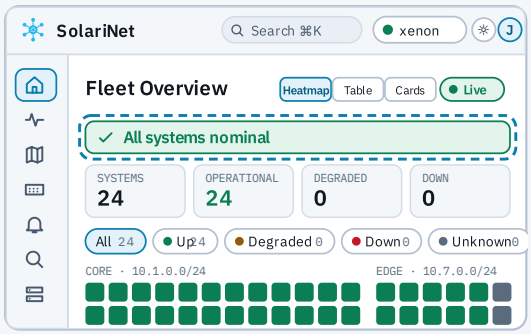


1 Open **Fleet Overview** (the house icon, and the page you land on). Read the banner first: green **All systems nominal** means everything is fine.

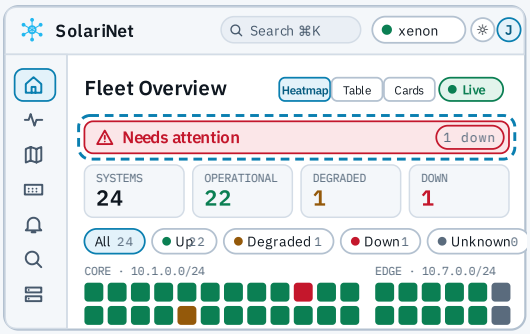


2 A red **Needs attention** banner lists what is wrong, worst first: machines that are down, then critical and warning alerts. Tap a line to jump to its cause.

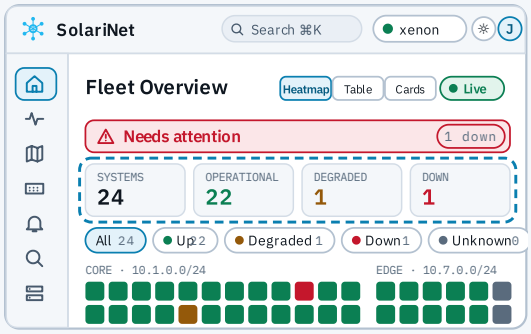


3 The four tiles count the fleet: **Systems**, **Operational**, **Degraded** and **Down**. Tap a tile to show only those machines.

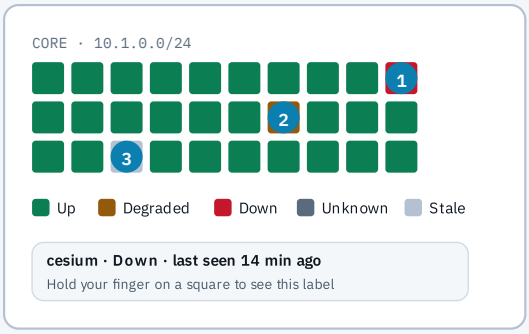


4 In the **Heatmap**, every square is one machine, grouped by network. Green is up, red is down 1, amber is degraded 2, and a dimmed square 3 stopped reporting. Long-press a square to see its name.

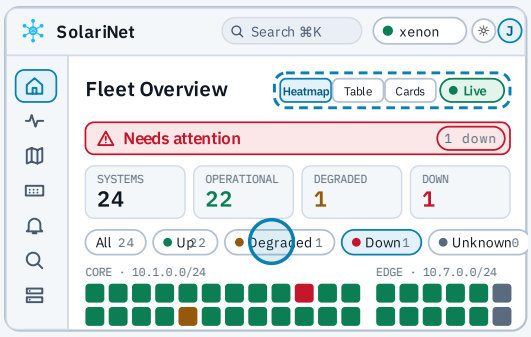

5 The **Live** pill confirms the page updates by itself. **Heatmap · Table · Cards** are three views of the same machines; Table is easiest on a phone. The chips filter by state, so tapping **Down** shows only the down machines.

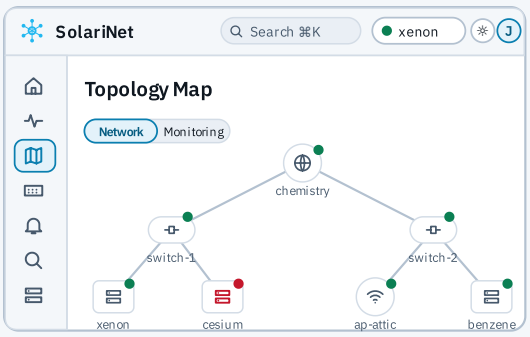

6 **Topology Map** draws the network: the gateway at the top, switches below, machines and access points under them. A red dot is a machine with a problem. Switch between **Network** and **Monitoring** at the top. The map cannot be zoomed, so use an iPad sideways.

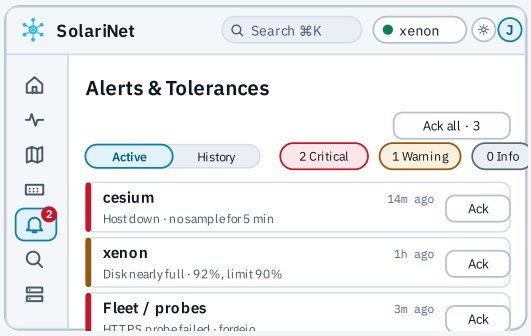

7 A number on the **Alerts** bell means open alerts. Task 4 shows how to read and acknowledge them. If the bell has no number and the banner is green, you are done.

If something goes wrong

YOU SEE	WHAT TO DO
Every square is grey (Unknown) or the Live pill is missing	The dashboard cannot reach its own server, or the server cannot reach the machines. Wait a minute, then reload. If it stays grey, ask Jason.
One square is dimmed	That machine stopped reporting, usually because it is switched off or unplugged. If it should be on, check its power and network cable, then tell Jason.
A *DEMO DATA* banner is showing	The page is showing sample data because the real data failed to load. Reload; if it persists, ask Jason.

TASK 3


Check one machine

EVERYONE


Every monitored machine has its own page. This is where you look when a square on the heatmap is not green, or when someone asks "is the NAS busy?".




The whole task at a glance. From a square on the heatmap to everything the dashboard knows about one machine.

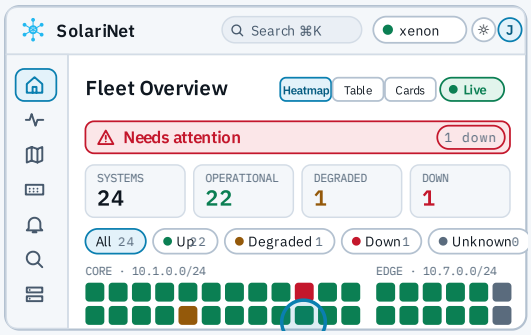


1 On **Fleet Overview**, tap the machine's square (or its row in Table view, or its card). You can also press **⌘K** on a keyboard and type its name.

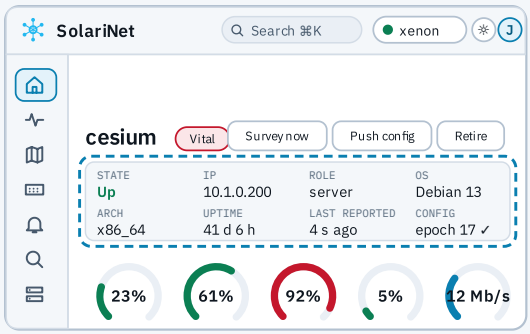


2 The machine's page opens. The strip under its name is the **hero**: whether it is **up**, its address, what it does, its operating system, how long it has been running and when it **last reported**. A report a few seconds old is healthy.

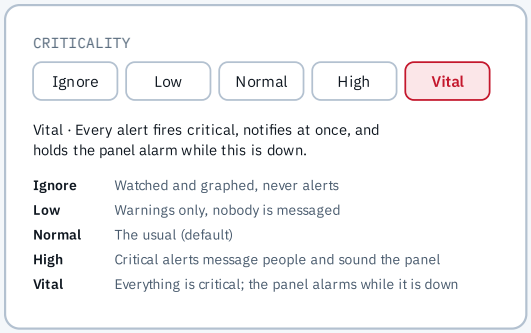


3 The **criticality** chip next to the name says how much the machine matters, from **Ignore** to **Vital**. A Vital machine that goes down sounds the wall panel (Task 5). Only operators can change it.

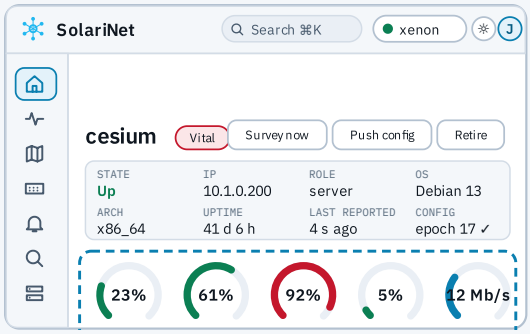

4 Five **gauges** show the machine's load right now: **CPU**, **memory**, the **fullest disk**, **swap** and **network** traffic. Red on the disk gauge, as here, means it is almost full.

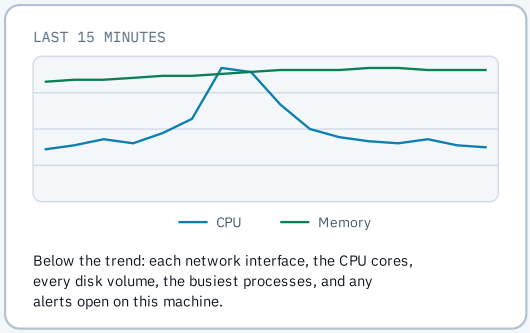

5 Scroll down for the **15-minute trend** of CPU and memory. A short spike is normal; a line pinned at the top for the whole window is worth mentioning to Jason.

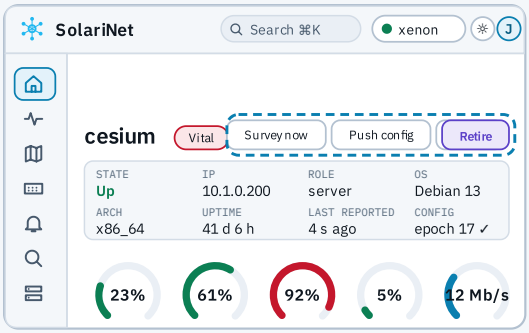

6 The buttons at the top right are for operators. **Survey now** asks for a fresh reading and **Push config** re-sends settings; both are harmless. **Retire** removes the machine from the roster, so leave that one to Jason.

OPERATOR

If something goes wrong


YOU SEE	WHAT TO DO
Last reported is minutes or hours ago	The machine has stopped talking to the dashboard. It may be off, unplugged or asleep. Check it physically, then tell Jason if it should be running.
The page is called *System detail* and has no gauges	That machine has no client installed, so it is only watched from outside by ping and service checks. Task 7, step 5 explains how a client gets installed.
A gauge is red	Not an emergency by itself. If an alert is open for it, Task 4. Otherwise mention it to Jason.

TASK 4


Read and acknowledge an alert

EVERYONE OPERATOR


An alert is SolariNet saying "something crossed a line". Anyone can read them; acknowledging needs an operator account.

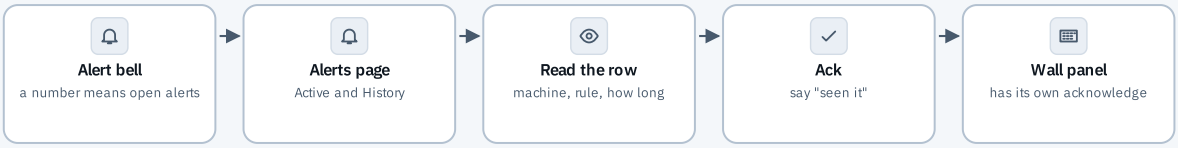


The whole task at a glance. Acknowledging records that a person has seen the alert. It does not fix anything, and it does not silence the wall panel.

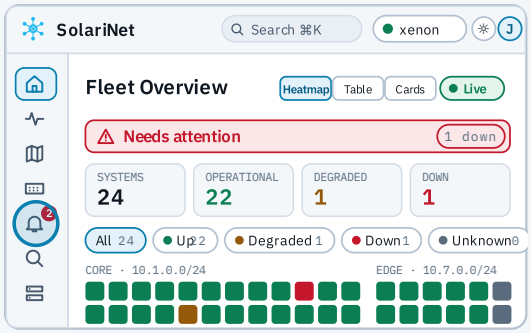


1 The **Alerts** bell in the sidebar shows how many alerts are open. Tap it. (On a narrow screen, open the menu with the ☰ button first.)

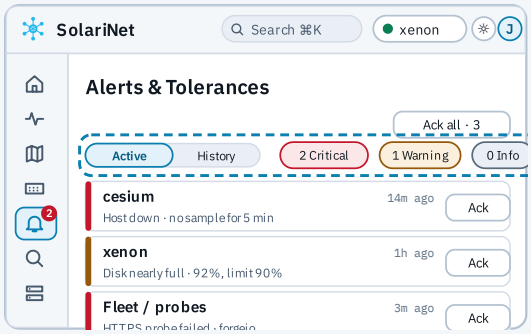


2 The **Active** board lists alerts nobody has acknowledged. **History** holds the acknowledged and the long-cleared ones. The chips count **Critical**, **Warning** and **Info**.

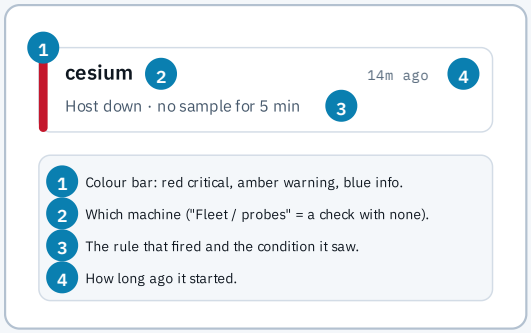


3 Read one row: the colour bar 1, the machine 2, the rule and what it saw 3, and the age 4. Tap the machine's name to open its page (Task 3).

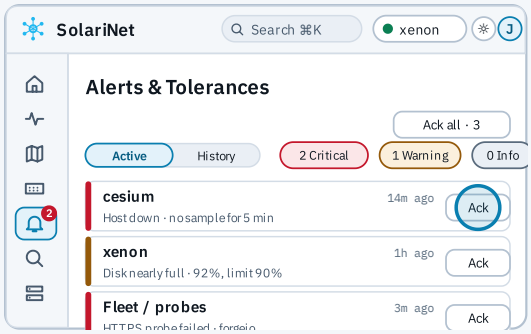

4 When you have looked at it, tap **Ack** on that row. This records that a person has seen it. It does not switch anything off. OPERATOR

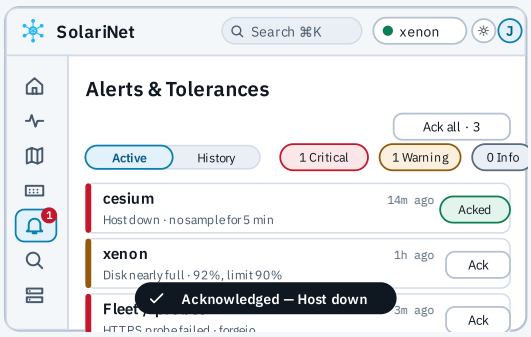

5 A message confirms **Acknowledged — rule** and the row moves to **History**. **Ack all** at the top does this for every active alert after a confirmation.

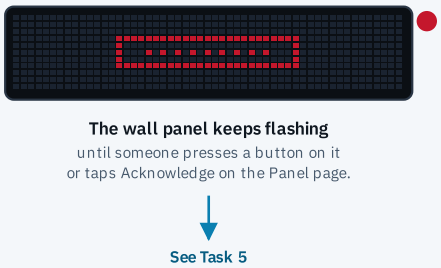

The wall panel keeps flashing
until someone presses a button on it
or taps Acknowledge on the Panel page.

See Task 5

6 Acknowledging here does **not** silence the wall panel's alarm. The panel has its own acknowledge (Task 5), and messages already sent to phones are not recalled.

If something goes wrong

YOU SEE	WHAT TO DO
Ack failed or *requires an authenticated operator role*	Your account can read alerts but not acknowledge them. Tell Jason what you saw; he can acknowledge it.
The same alert comes back every few minutes	Something is flapping between fine and broken. Acknowledging does not stop it; the machine needs attention. Tell Jason.
The alert says *Fleet / probes*	A check from the outside failed (for example a website on a machine stopped answering). Treat it like any other alert.

TASK 5


Read the wall panel and stop its alarm

EVERYONE

The small LED panel on the wall mirrors the dashboard so nobody has to open an iPad to know the house is fine. When something critical breaks, it is what tells you.




The whole task at a glance. The wall panel shows the same health as the dashboard, and it is the only thing in the house that makes a noise.

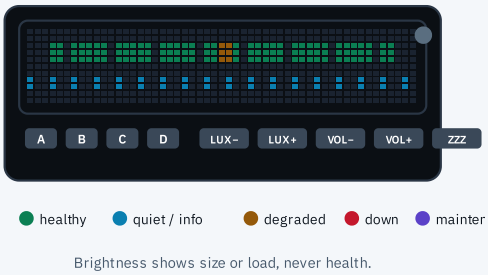


Brightness shows size or load, never health.

1 The panel is a grid of 53 × 11 lights. The colours mean exactly what they mean on the dashboard: green healthy, amber degraded, red down, blue information. Mostly green means all is well.

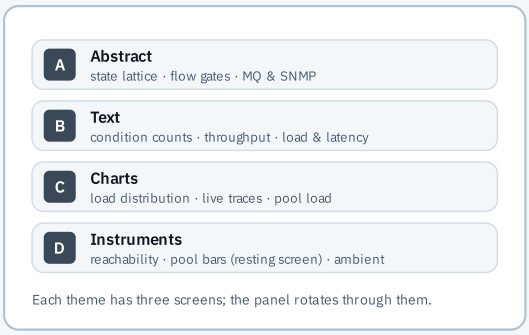


Each theme has three screens; the panel rotates through them.

2 It has four **themes**, each with three screens, and it rotates through them unless someone pins one. Press **A**, **B**, **C** or **D** on the panel to jump to that theme. D1, the pool bars, is the resting screen.

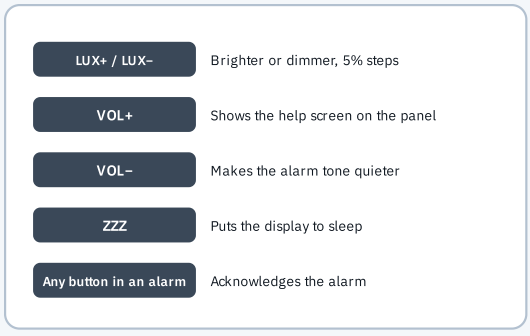


3 The other buttons: **LUX+** and **LUX−** change brightness, **VOL+** shows the on-panel help, **VOL−** makes the alarm quieter, **ZZZ** sends the display to sleep. None of them can break anything.

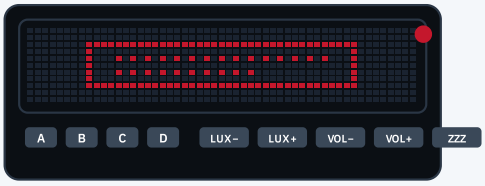

A red inset names the problem, the beacon lights, and a tone sounds about every 12 seconds.

At night the tone is silenced; the lights still show.


4 The **alarm** goes off when a critical alert opens, when too much of a group of machines is down, or when a **Vital** machine goes down. It is the only part of SolariNet that makes a sound.

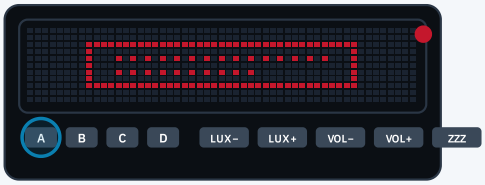

Press any button on the panel

The tone and the beacon stop for this episode.
If something new breaks, it sounds again.

5 To **acknowledge** it at the wall, press any button on the panel. The tone and beacon stop for this problem. A new problem starts a new alarm.

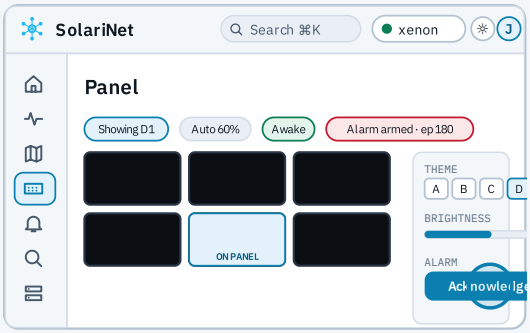

6 Or acknowledge from your iPad: open **Panel** in the sidebar and tap **Acknowledge** under **Alarm**. The page also shows the twelve screens live and the panel's state.

OPERATOR



NO DATA	Panel fine, no fresh data. It recovers itself.
LINK LOST	Lost its computer. Reseat USB, ask Jason.

7 Two words to know. **NO DATA**: the panel works but the dashboard is not feeding it; it recovers by itself. **LINK LOST**: the panel has lost its computer; reseat the USB cable and tell Jason.

If something goes wrong

YOU SEE	WHAT TO DO
The alarm is sounding and you cannot find the cause	Press any panel button to stop the tone, then open the dashboard: the red *Needs attention* banner on Fleet Overview names the problem (Task 2).
The panel is dark	Someone pressed ZZZ, or the panel is asleep. Press any button. If it stays dark, check its power.
Testing the alarm	The test is loud and real. Warn the household first, and leave testing to Jason.

TASK 6


Install a new server from scratch

OPERATOR ASK JASON

SolariNet installs a machine over the network: you choose it and an operating system on the iPad, switch the machine on, and it builds itself. Nothing is typed on the machine.




The whole task at a glance. Seven stops. The dashboard refuses to start until the first stop is really done, which is a feature.

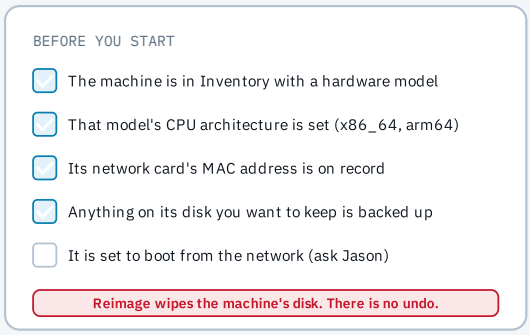


1 Check the list. The dashboard will only offer machines that are in Inventory with a known CPU type and a recorded network address. Task 8 shows how a machine gets there. **A reimage wipes the disk.**


ASK JASON

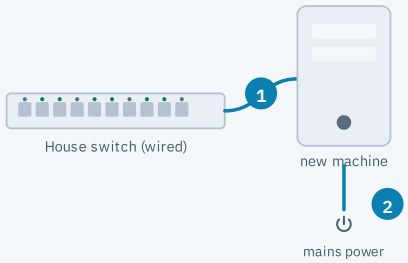


2 Put the machine where it will live. Plug in a network cable 1 to the house switch (Wi-Fi will not do for an install) and power 2. Leave it off for now.

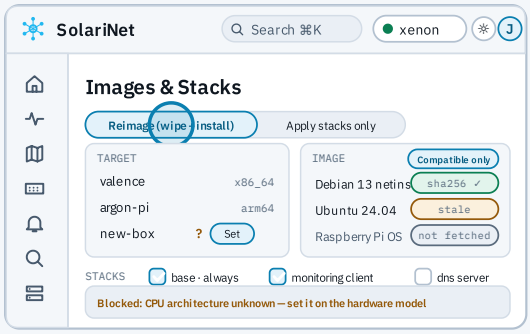


3 On the iPad, turned sideways, open **Manage → Images & Stacks**. Make sure the mode at the top is **Reimage (wipe + install)**.

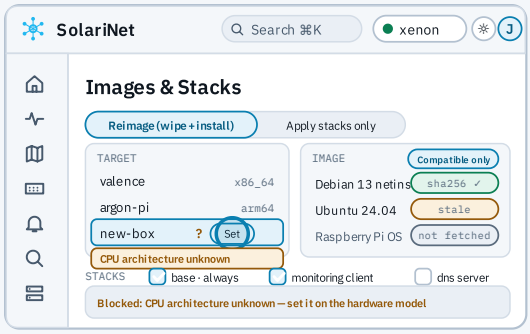


4 Pick the machine in the **Target** list. If it shows a **?** and **CPU architecture unknown**, tap **Set** and choose its type; this fixes every machine of that model.

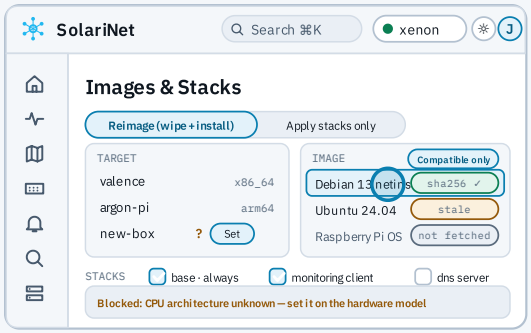


5 Choose an **image**, the operating system to install. Pick one marked **sha256** ✓. Greyed rows cannot be used and say why. Keep **Compatible only** on so you only see images that fit this machine.

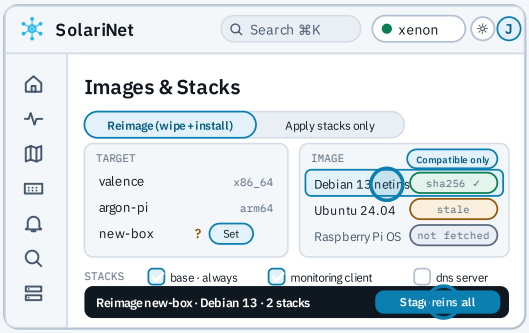


6 Tick the **stacks**, the software to set up afterwards; the ones marked *always* are added for you. When the dark bar at the bottom shows no blocker, tap **Stage reinstall**.

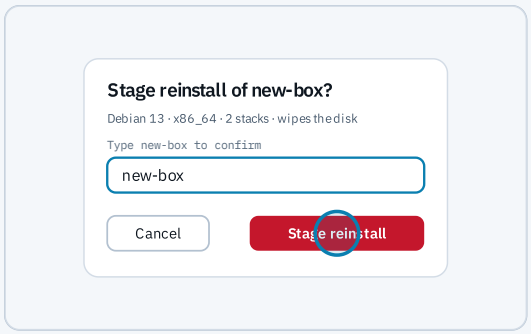

7 Read the summary. Type the machine's name exactly as shown, then tap **Stage reinstall**. The page confirms **Reinstall of new-box staged on** its network address.

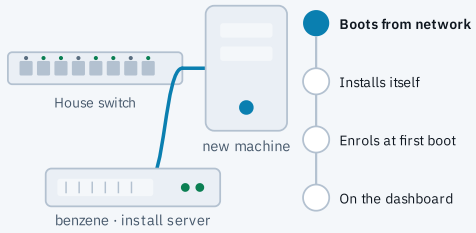


8 Now switch the machine on. It asks the house install server for its instructions, downloads the operating system and installs it on its own. Leave it alone; this takes a while. A screen, if attached, shows text scrolling.

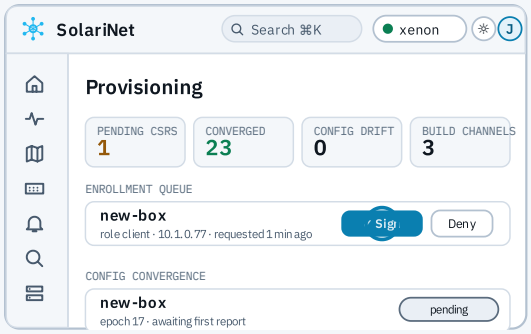


9 At its first boot the machine asks to join. Open **Manage → Provisioning**: it appears in the **Enrollment queue**. Check the name and address, then tap ✓ **Sign**. Tap **Deny** for anything you do not recognise.

ASK JASON

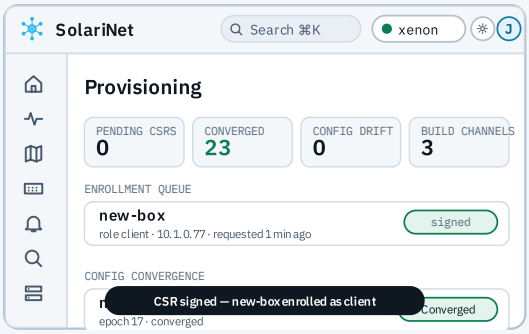

10 The page confirms **CSR signed — new-box enrolled as client**. The stacks install themselves next, and **Config convergence** turns to **Converged**.

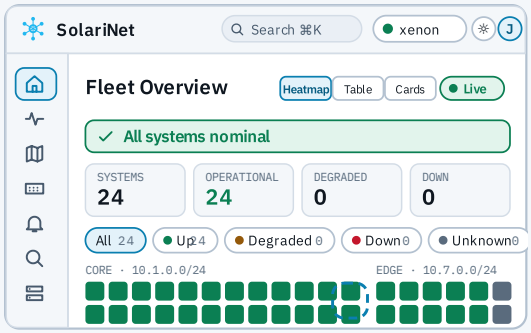

11 Back on **Fleet Overview**, the new machine has its own green square. Tap it to see its page (Task 3). Done.

? WHO DOES WHAT

Everything on the dashboard side of this task needs an operator account. Setting a machine to boot from the network, and signing it in to the fleet, are Jason's jobs unless he has said otherwise.

If something goes wrong

YOU SEE	WHAT TO DO
The machine is not in the Target list	It has no network address on record, or no hardware model. Task 8 steps 5 and 6 add it; or ask Jason.
Target CPU architecture unknown will not go away	Tap **Set** next to the machine, or open **Inventory**, find the hardware model and set its CPU architecture there.
Every image is greyed out	The images are the wrong type for this machine, or have not been downloaded. Jason refreshes images.
The machine boots into its old system instead of installing	It did not boot from the network. The boot order in its firmware needs changing; ask Jason.
Nothing appears in the Enrollment queue	The install has not finished, or the machine cannot reach the server. Give it 20 minutes, then check the machine's screen if it has one.

TASK 7


Add a machine that is already running

OPERATOR ASK JASON


A machine that already works, a NAS or a printer for instance, should not be reinstalled. Adopting it tells SolariNet to watch it as it is.




The whole task at a glance. Steps 1 to 4 are enough to watch a machine. Steps 5 to 7 add the client so you also get CPU, memory and disks.

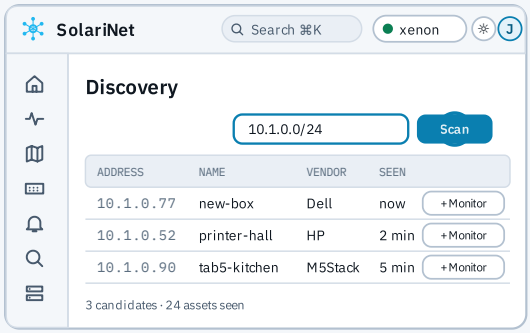


1 Open **Manage → Discovery**. Type the network range in the box at the top right, for example **10.1.0.0/24** (ask Jason which one), and tap **Scan**. Wait for *Scan complete*.

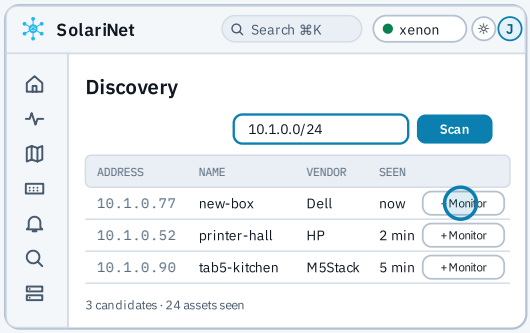


2 The list shows what the scan found: address, name if known, the maker. Find your machine and tap **+ Monitor** on its row.

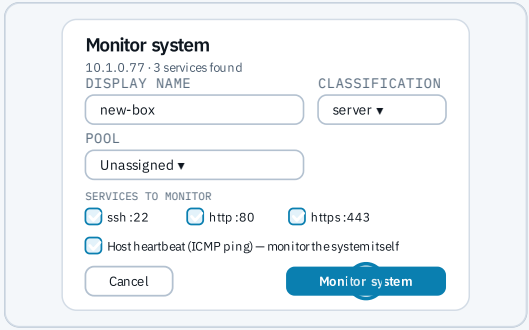

3 In **Monitor system**, check the **Display name**, choose a **Classification** (server, appliance, network, iot, host or other) and a **Pool**. Leave the ticks as they are unless you know a service should not be checked. Tap **Monitor system**.

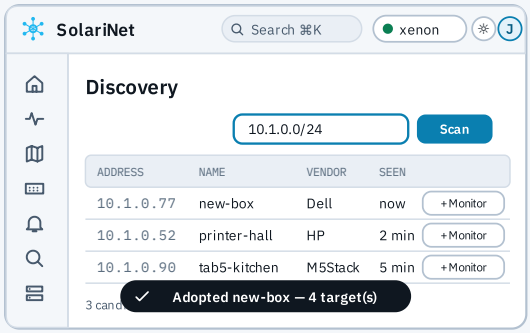


4 The page confirms **Adopted new-box — 4 target(s)**. From now on the dashboard pings it and checks its services from outside. It appears on **Systems** and **Reachability**. For many machines, this is all you need.

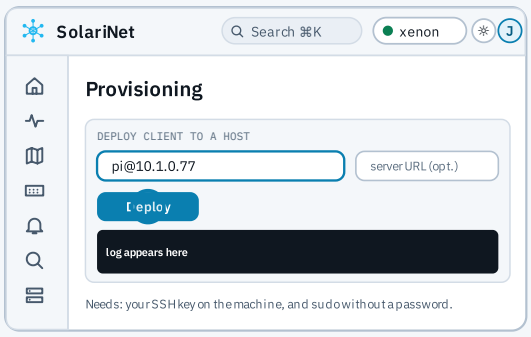


5 For full detail (CPU, memory, disks, Task 3), install the SolariNet client. Open **Manage → Provisioning**, find **Deploy client to a host**, type the login as **user@address** and tap **Deploy**.

ASK JASON

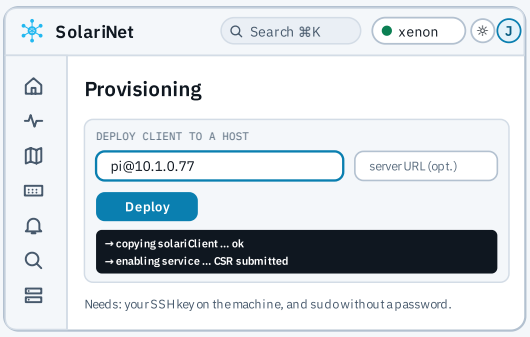


6 Watch the log under the form. This only works if the machine already accepts Jason's SSH key and allows *sudo* without a password, so in practice Jason runs this step.

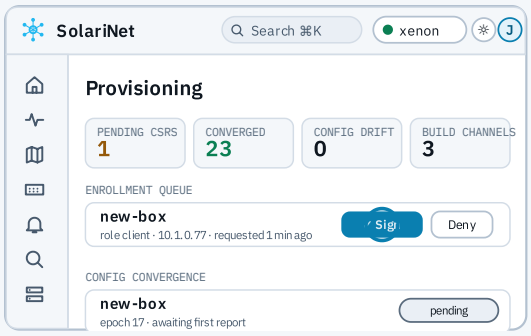

7 When the log finishes, the machine asks to join: it appears in the **Enrollment queue** (unless it was signed automatically). Check the name and address, then tap ✓ **Sign**.

ASK JASON

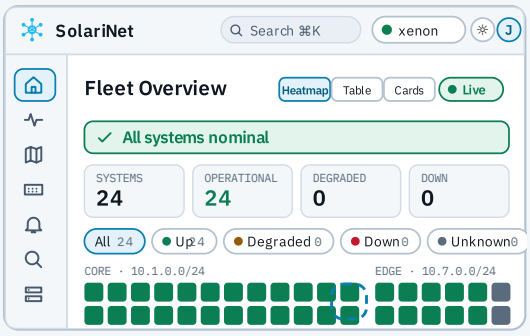

8 On **Fleet Overview** the machine now has a square, and its page shows gauges and a trend like any other client.

If something goes wrong

YOU SEE	WHAT TO DO
Enter a CIDR, e.g. 192.168.1.0/24	The range must be written as address/size. Ask Jason for the house ranges; 10.1.0.0/24 is the core network.
The scan is refused as too large	A range can hold at most 4,096 addresses (a /20). Scan a smaller one.
The machine is not in the list	It is off, on another network, or does not answer. Check it is on and wired, then scan again.
Deploy fails at once	The machine does not accept the SSH key or asks for a sudo password. Ask Jason.
The machine shows up but with no gauges	It was adopted (watched from outside) but has no client. Steps 5 to 7 add one.

TASK 8


From a barcode on the box to a running server

OPERATOR ASK JASON


Everything the house owns is tracked from the moment it arrives. This task follows one box all the way to a green square on the dashboard.




The whole task at a glance. The long road: a sealed box on the doorstep becomes a working, monitored server. Each stop reuses a task you have already seen.

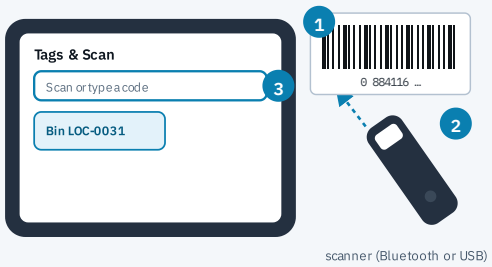


1 Open **Manage → Tags & Scan** on the iPad 3. The scanner 2 is paired like a keyboard, so you do not need to tap the scan box first. Scan the barcode on the box 1. (The iPad's camera cannot be used here.)

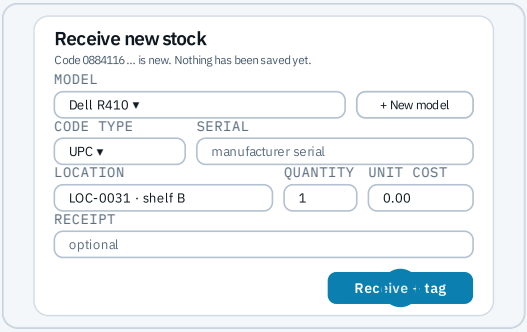


2 The code is new, so **Receive new stock** opens. Choose the **Model**, check **Code type** and **Serial**, pick the **Location** (the armed bin is preselected), enter the **Quantity** and **Unit cost**.

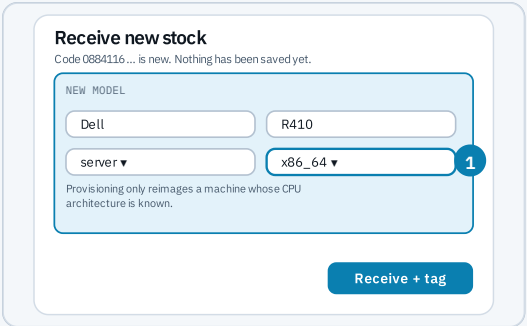


3 If the model is not in the list, tap **+ New model** and fill in **Make**, **Model**, **Type** and the **CPU architecture** 1. The CPU type matters: without it the machine cannot be reimaged later, and it can only be set here or on the hardware model, not on the item itself.

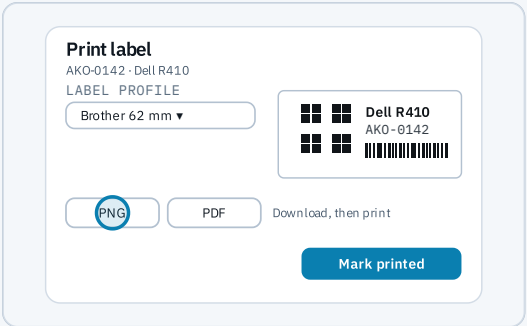


4 Tap **Receive + tag**. The item is recorded, gets an **AKO-** tag, and **Print label** opens. Download the **PNG** or **PDF**, print it, stick it on the machine, then tap **Mark printed**.

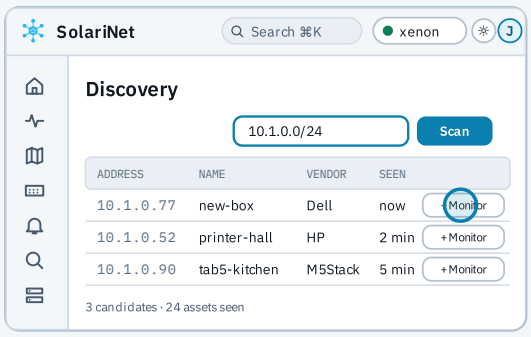

5 Unpack and connect the machine (Task 6, step 2), switch it on, then adopt it: **Discovery → Scan → + Monitor → Monitor system** (Task 7, steps 1 to 4). This puts the machine, with its network address, into the records.

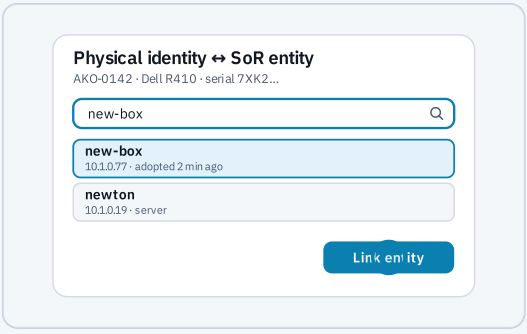


6 Tie the tag to the machine: open **Inventory**, find the item (search its AKO- tag), open its **Components** tab and tap **Link entity**. Search the machine's name, select it and tap **Link entity**. The page confirms **Entity association saved**.

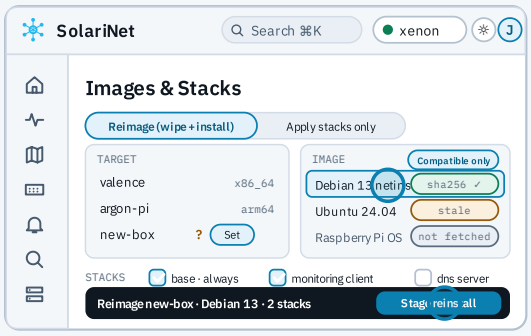

7 Now install it: **Images & Stacks → Reimage**, exactly as Task 6 steps 3 to 7. The machine is in the Target list because it now has a model, a CPU type and a network address.

ASK JASON

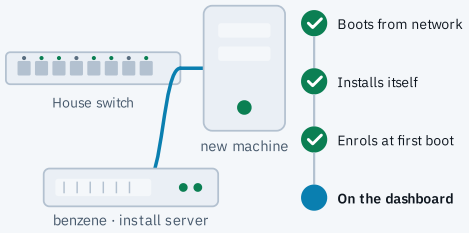

8 Boot it from the network, sign it in the **Enrollment queue** (Task 6, steps 8 and 9), and it appears on **Fleet Overview**. The tag on its case and the square on the dashboard are now the same machine.

HONEST LIMITS

The CPU architecture can no longer be set on an item form; it lives on the hardware model. And after adopting a machine, its network address may take a moment, or a nudge from Jason, to reach the records that Images & Stacks reads. If the machine is missing from the Target list, that is why.

If something goes wrong


YOU SEE	WHAT TO DO
Receive new stock did not open; the code was looked up instead	The code is already known: it belongs to a product type. Use **Inventory → Catalog** to record another item of that type.
Scanning does nothing	A dialog or the search palette is open and is swallowing the keystrokes. Close it and scan again. Scanning also needs an operator account.
The machine is not in the *Target* list on Images & Stacks	Its network address has not reached the records yet, or the model has no CPU type. Do steps 5 and 6 again, check the model, then ask Jason.
The label printer is not in the *Label profile* list	Download the PDF and print it from any printer; the size is on the file.

TASK 9


Trust the house certificate (Akoria CA)

EVERYONE ASK JASON


House websites use certificates signed by the house's own authority, **chlorine**. Teach your device to trust it once and the security warnings go away for those sites.

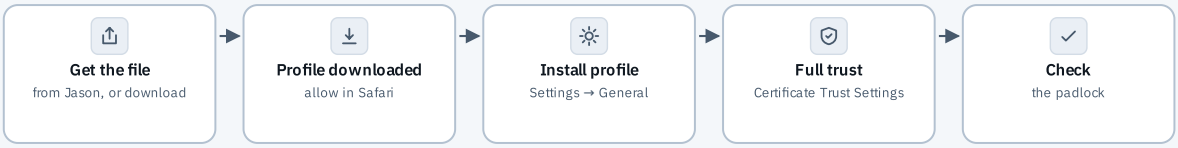

The whole task at a glance. Once on an iPad or iPhone. Then once on each Mac or Windows PC you use for house services.

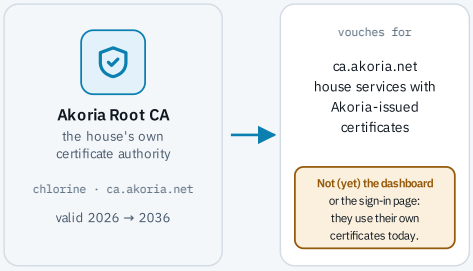


1 A certificate is how a device decides a website is genuine. Public sites are vouched for by companies your device already knows; house services are vouched for by the **Akoria Root CA**. Trusting it once removes the warnings for those services.

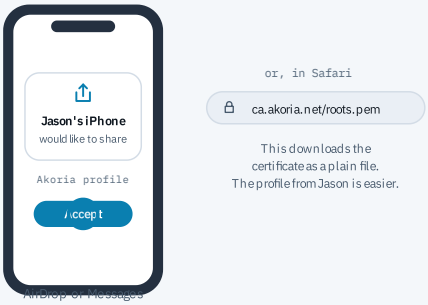


2 Ask Jason to send you the Akoria profile by **AirDrop** or **Messages** and tap **Accept**. (Alternatively, open **ca.akoria.net/roots.pem** in Safari; the profile is the easier route.)


ASK JASON

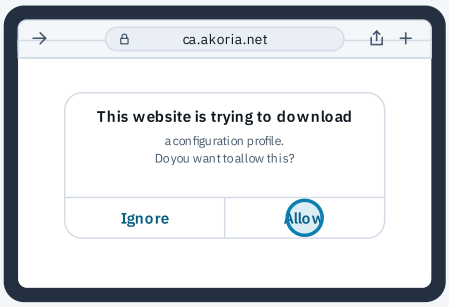


3 Safari asks **Do you want to allow this?** Tap **Allow**, then **Close** on the *Profile Downloaded* message.

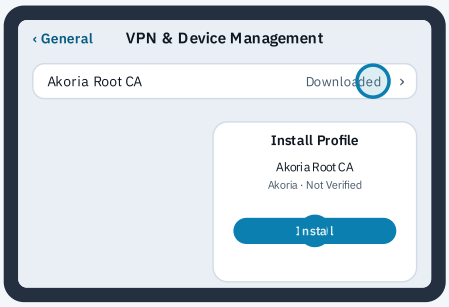


4 Open **Settings → General → VPN & Device Management**, tap **Akoria Root CA**, then **Install** (enter your passcode), **Install** again, and **Done**. *Not Verified* on this screen is normal for a house certificate.

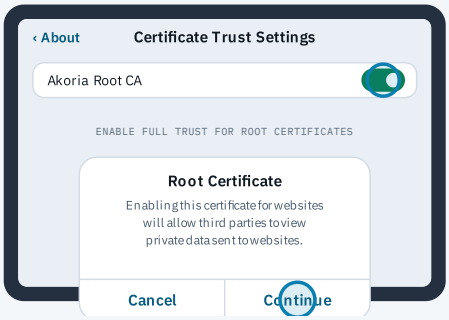

5 Then **Settings → General → About**, scroll to the bottom, **Certificate Trust Settings**. Switch on **Akoria Root CA** and tap **Continue**. This second step is the one people forget.

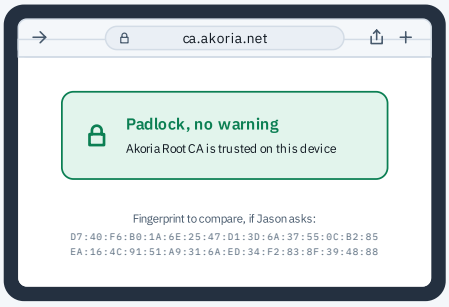


6 Check it: open **ca.akoria.net** in Safari. A padlock and no warning means it worked. The certificate's fingerprint is public and shown here in case Jason asks you to compare it.

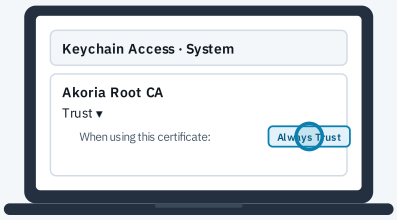

macOS

7 **On a Mac:** double-click the file to open it in **Keychain Access**, put it in the **System** keychain, double-click **Akoria Root CA**, open **Trust** and set *When using this certificate* to **Always Trust**. Enter your password to save.

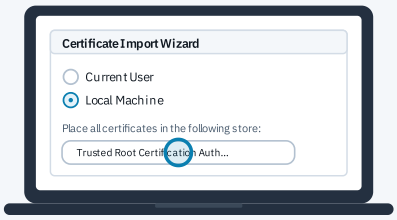

Windows

8 **On Windows:** rename the file so it ends in **.crt**, double-click it, choose **Install Certificate**, **Local Machine**, then **Place all certificates in the following store** and pick **Trusted Root Certification Authorities**. Finish, then restart the browser.

NEVER DO THIS FOR A STRANGER

Trusting a root certificate is a big deal: it lets whoever holds it vouch for any website. Only ever install the Akoria one, only from Jason or from ca.akoria.net, and remove any other profile someone asks you to install.

If something goes wrong


YOU SEE	WHAT TO DO
Safari still warns on dashboard.akoria.net or the sign-in page	Expected for now: those two use their own certificates, not Akoria's. Ask Jason before tapping through a warning on them.
The toggle is missing from Certificate Trust Settings	The profile was not installed (step 4). Go back to Settings → General → VPN & Device Management.
Firefox still warns on a Mac or PC	Firefox keeps its own list. Ask Jason; there is a Firefox policy file for it.
You are asked to type a password you do not have	Installing on a Mac or PC needs that computer's administrator password. Ask whoever set the computer up.

TASK 10

Your Akoria account

EVERYONE ASK JASON


Akoria SSO (single sign-on) is the house login service, run on **sso.akoria.org**. This task is about looking after your own account.

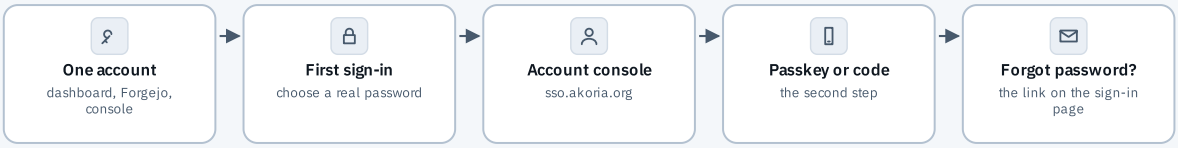


The whole task at a glance. Your Akoria account is the key to everything. Ten minutes setting up a passkey means you rarely type the password again.




1 **Akoria SSO** is one sign-in for the house: the SolariNet dashboard, **Forgejo** (where the code and documents live) and the account console itself all use it. Jason creates the account; it is yours from then on.

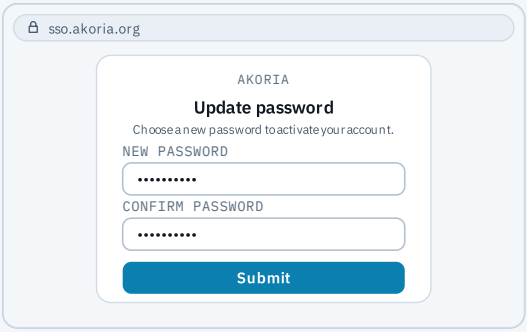


2 First time: sign in with the username and temporary password Jason gave you. Akoria asks you to choose a **new password**. Pick a long one you do not use anywhere else, and save it in your password manager.

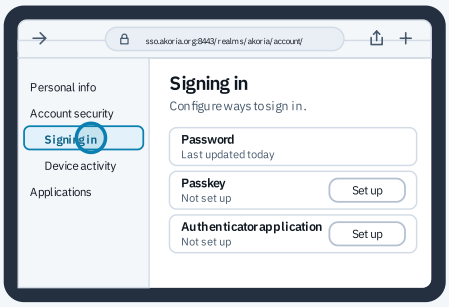


3 To manage your account open **sso.akoria.org:8443/realms/akoria/account/** and sign in. Under **Account security → Signing in** you can add a **passkey** or an **authenticator application**. These screens are Akoria's standard ones; if the names differ slightly, follow what you see.

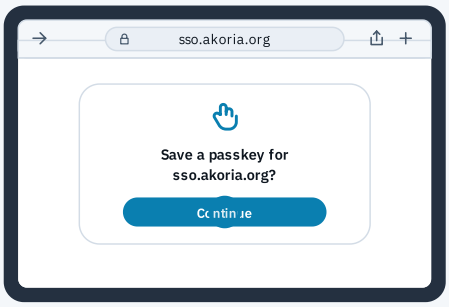

4 **Passkey** (recommended on Apple devices): tap **Set up** next to Passkey, then **Continue** when the iPad offers to save one. It lives in your iCloud Keychain, so the same passkey works on your iPhone. Signing in afterwards is Face ID or Touch ID, no password.

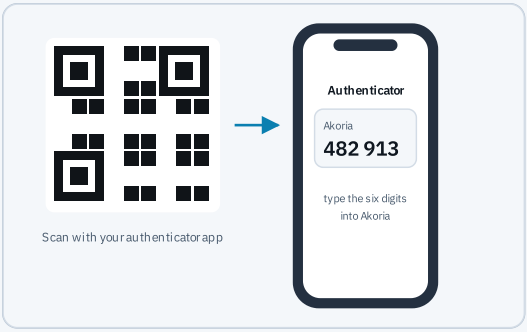


5 **Authenticator application** (works everywhere): tap **Set up**, scan the square code with an authenticator app on your phone, and type the six-digit code it shows. From then on Akoria asks for the current code after your password.

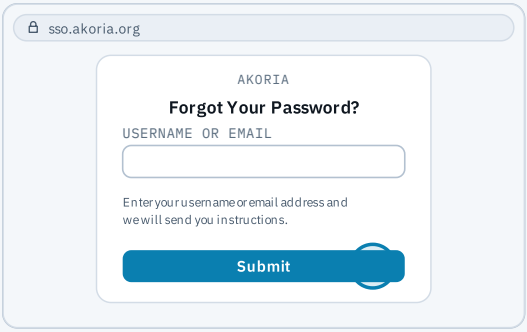

6 Forgot your password? On the Akoria sign-in page tap **Forgot Password?**, enter your username or email and tap **Submit**. Follow the link in the email. If no email arrives within a few minutes, ask Jason to reset it.

ASK JASON

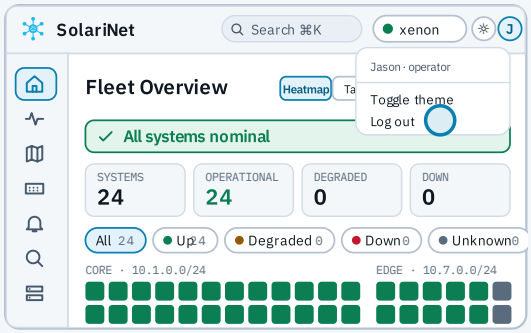

7 To sign out of the dashboard, tap the round initial at the top right and choose **Log out**. On a shared device also sign out of the account console, because the Akoria sign-in may otherwise let the next person straight back in.

If something goes wrong

YOU SEE	WHAT TO DO
Invalid username or password	Check caps lock and try once more. After five wrong tries in 15 minutes Akoria pauses sign-in for that name; wait, then try again.
Akoria asks for a code and you have lost the phone	Ask Jason. He can remove the old authenticator from your account so you can set up a new one.
You signed in but the dashboard says you are a viewer	Your account is not in an operator group. That is a setting Jason makes, not something you did wrong.

TASK 11


Find the manuals and get help

EVERYONE


This guide is deliberately short. When you want the whole story, the full manuals are one tap away, and Jason is one message away.




The whole task at a glance. Where the longer manuals live, and how to report a problem usefully.

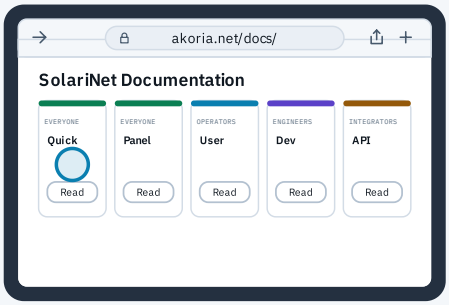


1 All the documentation is at **akoria.net/docs/**. This guide is the first card, and the Panel Screen Guide beside it explains every screen on the wall panel. The **User's Manual** explains every screen in depth when you want more than a quick start.

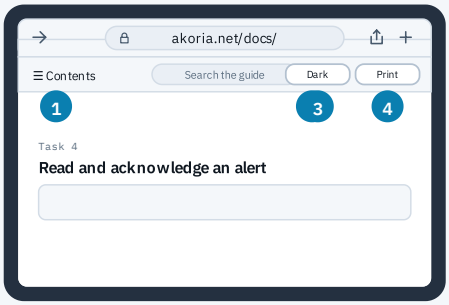

2 Inside a manual: 1 opens the contents, 2 searches every word, 3 switches light and dark, 4 prints or saves a PDF. The PDF button on the portal downloads a ready-made copy.

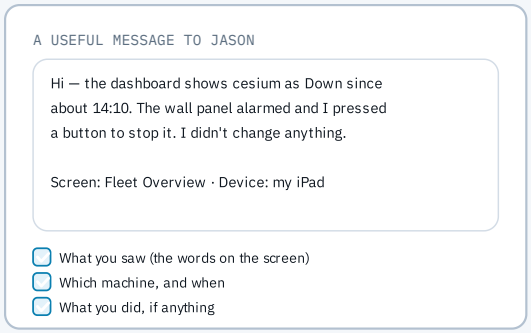

3 When something is wrong, tell Jason three things: the exact words you saw, which machine and when, and what you did. A photo of the screen is perfect. For bigger problems, Jason tracks them as issues on Forgejo.

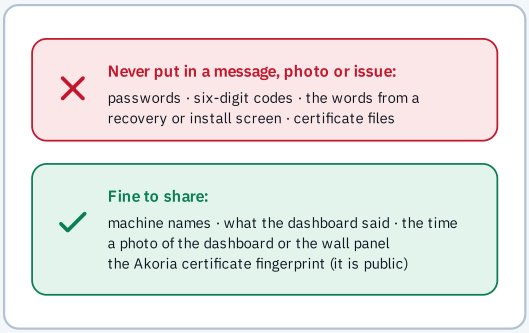

4 Nobody from the house will ever ask you for a password or a code, not even Jason. If a message does, it is not from him. Machine names, screenshots and times are always fine to share.

Where things are


YOU WANT TO	GO TO	TASK
See if the house is fine	Fleet Overview (the house icon)	2
Look at one machine	Tap its square on Fleet Overview	3
Read or acknowledge an alert	Alerts (the bell)	4
Stop the wall panel's alarm	Any panel button, or Panel → Acknowledge	5
Install a fresh machine	Manage → Images & Stacks	6
Watch a machine that already exists	Manage → Discovery → + Monitor	7
Record something new the house bought	Manage → Tags & Scan	8
Make certificate warnings go away	Settings on the device, with the Akoria profile	9
Change your password or add a passkey	sso.akoria.org:8443/realms/akoria/account/	10
Read the long manuals	akoria.net/docs/	11
Set up an account for someone new	radium, from a terminal	12
Update every machine at once	Manage → Provisioning → Operating system updates	13
Add one machine you know the address of	Manage → Discovery → Add asset	14

TASK 12


Set up a new user

OPERATOR

Everyone in the house signs in with one Akoria account. Jason creates it once in the directory on **radium**; the dashboard and Forgejo pick it up from there.

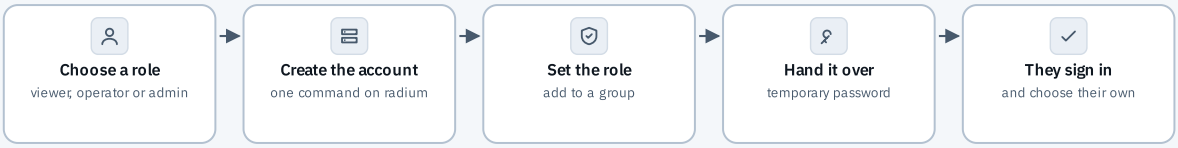

The whole task at a glance. An account made once in the directory works for the dashboard, Forgejo and every other Akoria sign-in.

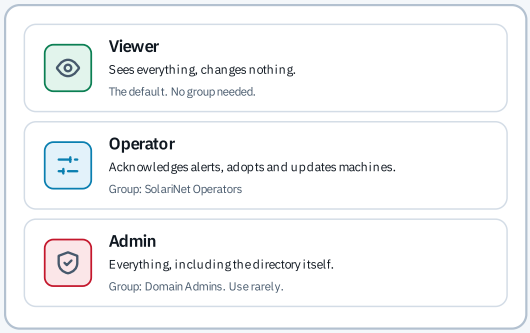

1 Decide what the person needs. Almost everyone is a **viewer**. Give **operator** to someone who looks after machines. **Admin** comes from **Domain Admins**, which also controls every account in the house, so keep it to yourself.




2 Accounts live in the directory on **radium**. Sign in there from a terminal and run this, with the person's own details and a temporary password of at least seven characters mixing upper case, lower case and digits. Akoria sees the new account straight away; there is nothing to sync.


JASON



3 For an operator, add them to **SolariNet Operators**. Skip this step for a viewer. The dashboard reads the group at sign-in and re-checks it while they use it, so there is no second list to keep.

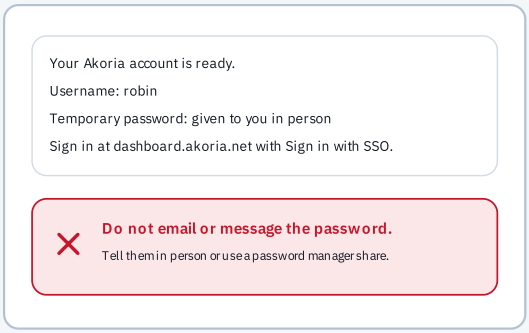

4 Give them the username and temporary password privately, and point them at Your Akoria account. They must use **Sign in with SSO**; the username and password boxes on the dashboard are only for local service accounts.

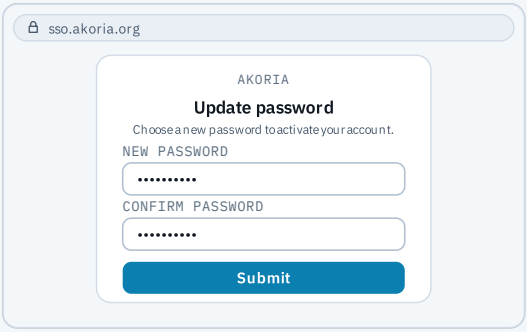

5 The first time they sign in, Akoria makes them choose their own password, so the temporary one stops working. Once they are in, the round initial at the top right of the dashboard shows their name and role. Check that it says what you intended.



6 When someone leaves, **disable** the account rather than deleting it. If someone is locked out, set a new temporary password the same way; samba-tool prompts for it, which keeps it out of the shell history.

If something goes wrong


YOU SEE	WHAT TO DO
Password does not meet complexity requirements	The directory wants at least seven characters mixing upper case, lower case and digits. Choose a stronger temporary password and run the command again.
They cannot sign in six weeks later	Directory passwords expire after 42 days. Set a new temporary password as in the last step. `sudo samba-tool user setexpiry robin --noexpiry` stops it recurring.
They signed in but still show as a viewer	Check the group name is exact, then have them log out and sign in again.
A *Sign in with SSO* error for every new user	Akoria cannot reach the directory. See Find the manuals and get help; this is a problem with radium, not the account.

TASK 13


Update every machine at once

OPERATOR


Rather than signing in to each machine, one page checks and updates them all. It only touches machines whose operating system is on record, and it leaves every reboot to you.

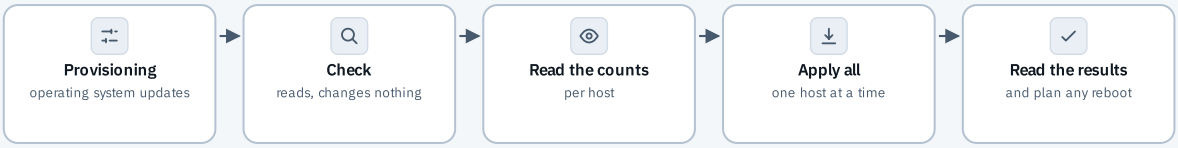


The whole task at a glance. One button brings every managed machine up to date. It never restarts a machine by itself.

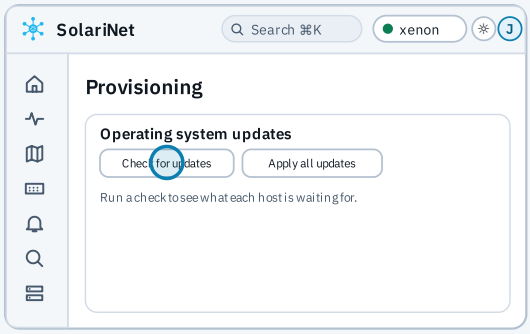


1 Open **Manage → Provisioning** and find **Operating system updates**. Tap **Check for updates**. This asks every machine what it is waiting for and changes nothing, so it is always safe. **Apply all updates** stays off until a check has finished.

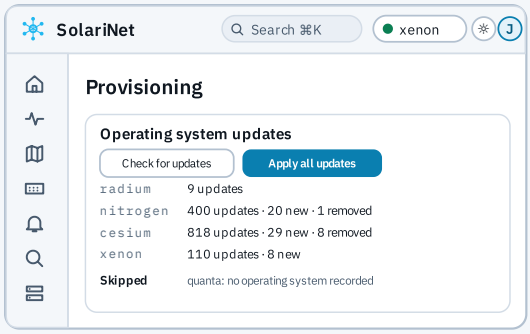


2 Each machine reports how many packages would be **updated**, **new** and **removed**. Read **Skipped** too: those machines will not be touched, and the reason is beside each one. A very large count, or anything removed, is worth asking Jason about first.

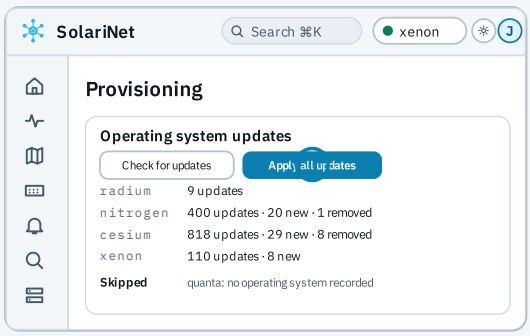

3 Tap **Apply all updates** and confirm when your browser asks. Choose a quiet time: services restart as their packages change, and the machines the house leans on hardest (cesium, benzene and xenon) go last.

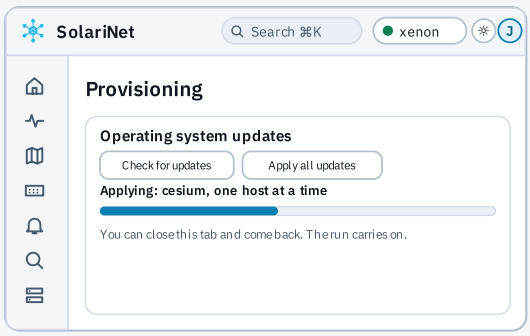

4 Machines update one at a time, so this can take a long while. You do not have to watch: close the tab, come back to the same page on the same device and the run picks up where it is. A second run cannot start while one is going.

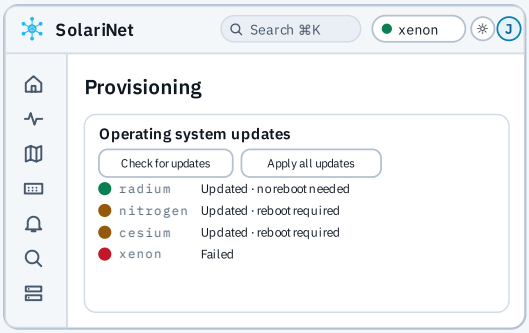

5 **Results** lists each machine as **Updated** or **Failed**, and says **reboot required** or **no reboot needed**. Nothing reboots by itself: restarting is a separate decision, so tell Jason which machines are waiting.

If something goes wrong

YOU SEE	WHAT TO DO
Apply all updates stays grey	Run **Check for updates** first and wait for it to finish. A viewer does not see these buttons at all.
the control host's login was refused	That machine does not yet accept the provisioning key. Ask Jason; everything else carries on.
unreachable	The machine is off or off the network. Turn it on and run the check again.
no operating system recorded	The inventory does not know what it runs, so it is left alone. Ask Jason to record it.
A machine shows **Failed**	The other machines still finish. Send Jason the machine's name; run the check again to see what is left.

TASK 14


Add one asset by hand

OPERATOR


When you already know the address, you do not need a network scan. Type it once and let a quick scan of that one machine do the form-filling.




The whole task at a glance. Typing one address is enough: a scan of that one machine fills in the rest, just as a network scan does.

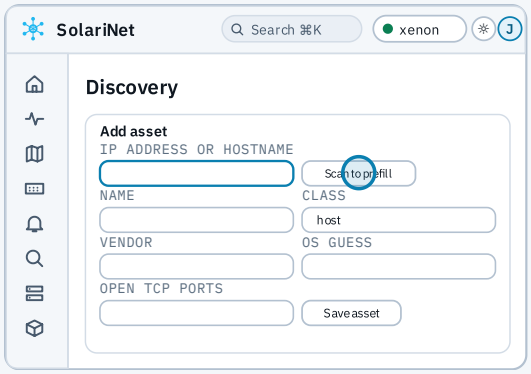


1 Open **Manage → Discovery** and tap **Add asset**. Type the machine's **IP address or hostname**, then tap **Scan to prefill**. Use this when you know the one machine you want; to look across a whole range, use Add a machine that is already running.

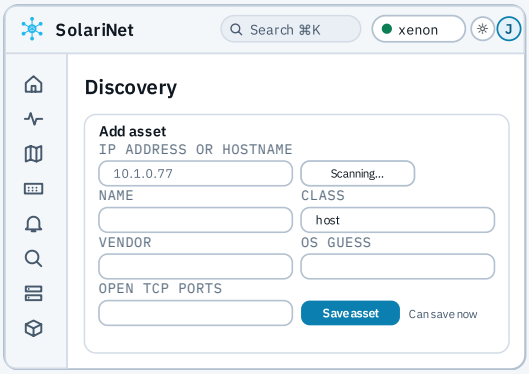

2 The dashboard runs nmap against that one address. You need not wait: if you are in a hurry, or the machine answers nothing, you can fill the fields yourself and save.

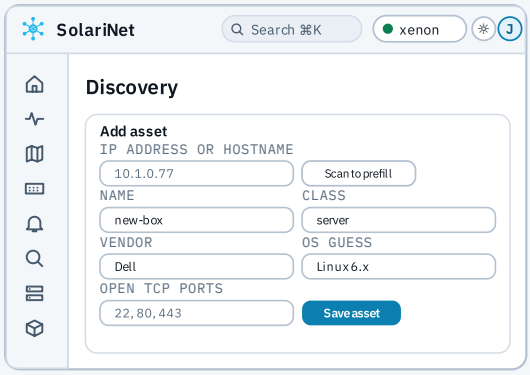

3 Name, class, vendor, operating system guess and open ports fill in. Anything you already typed stays as you typed it. Check them: the operating system is a guess, and the name is only filled when the machine has one. Delete any port you do not want watched.

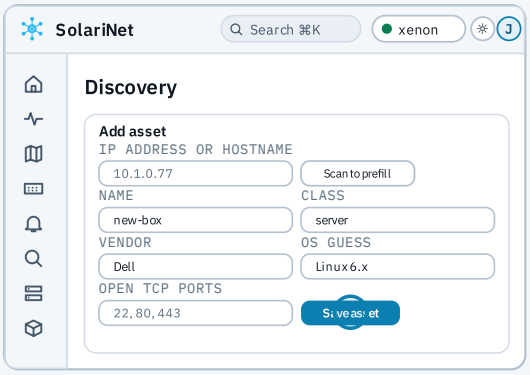

4 Tap **Save asset**. The machine joins **Systems** and **Reachability**, and each port in the list becomes a check. Vendor and operating system are saved in its **Notes**.

If something goes wrong

YOU SEE	WHAT TO DO
An asset with this address already exists	It is already on the books. Open it from **Systems** rather than adding it twice.
The scan finds nothing	The machine is off, firewalled or on another network. You can still type the details and save.
The name stays empty	The machine does not publish one. Type a short name, so the list reads well rather than showing a bare address.
Ports look wrong	The scan reports what answers right now. Edit the list before saving; it is only a starting point.