

APLC Design Summary

Instrument	SCDA
nPup	1024 x 1024 pixels
Coronagraphic throughput (transmitted energy)	0.5604
Core throughput (encircled energy)	0.441
Lytot stop inner diameter (% of inscribed circle)	0.005
Lytot stop outer diameter (% of inscribed circle)	0.0
Bandpass	10.0%
# wavelengths	3
FPM radius (grayscale)	$3.5 \lambda/D$
nFPM	150 pixels
IWA — OWA	$3.4\text{--}12.0 \lambda/D$
Contrast constraint	10^{-10}
Lytot Stop alignment tolerance	1 pixels


Input Files :

- ▷ Pupil file : SCDA/TelAp_LUVex_05-Hex_gy_clipped_ovsamps04_N1024.fits
- ▷ Lyot stop file : SCDA/LS_LUVex_05-Hex_ID0000_OD0982_no_struts_gy_ovsamps4_N1024.fits


Solution File :

- ▷ 2_SCDA_N1024_FPM350M0150_IWA0340_OWA01200_C10_BW10_NIam3_LS_IDex_ID_OD0_OD_is_982_no_strut.fits


Sun Apr 10 10:21:49 2022

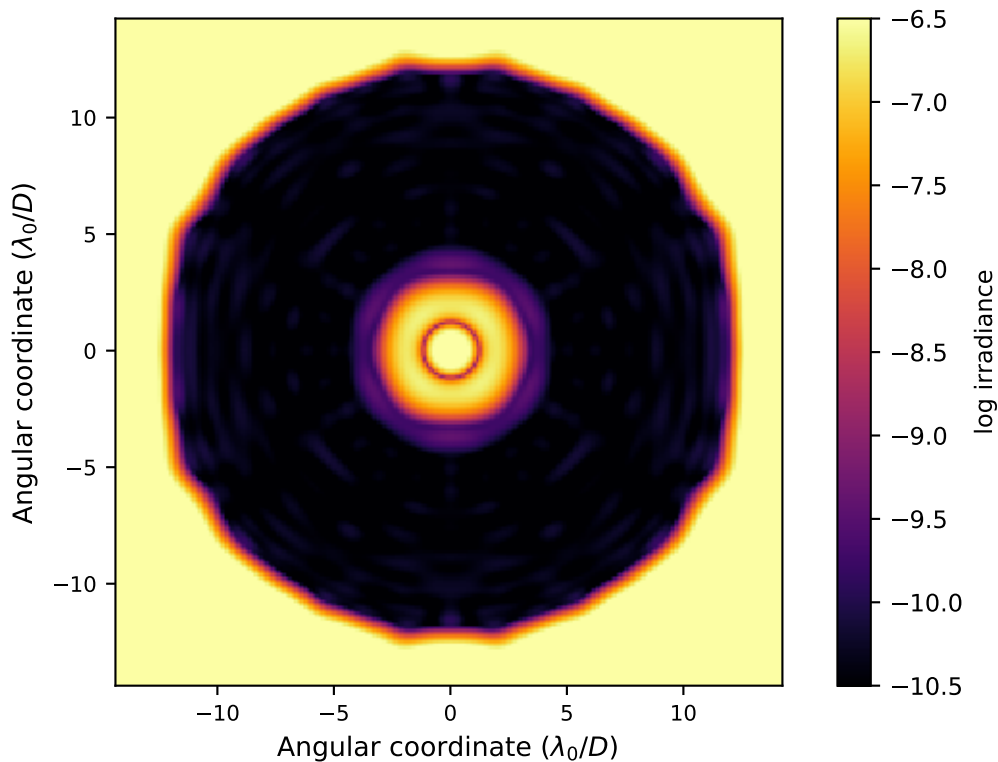


*On – axis PSF in log irradiance,
normalized to the peak irradiance value.*

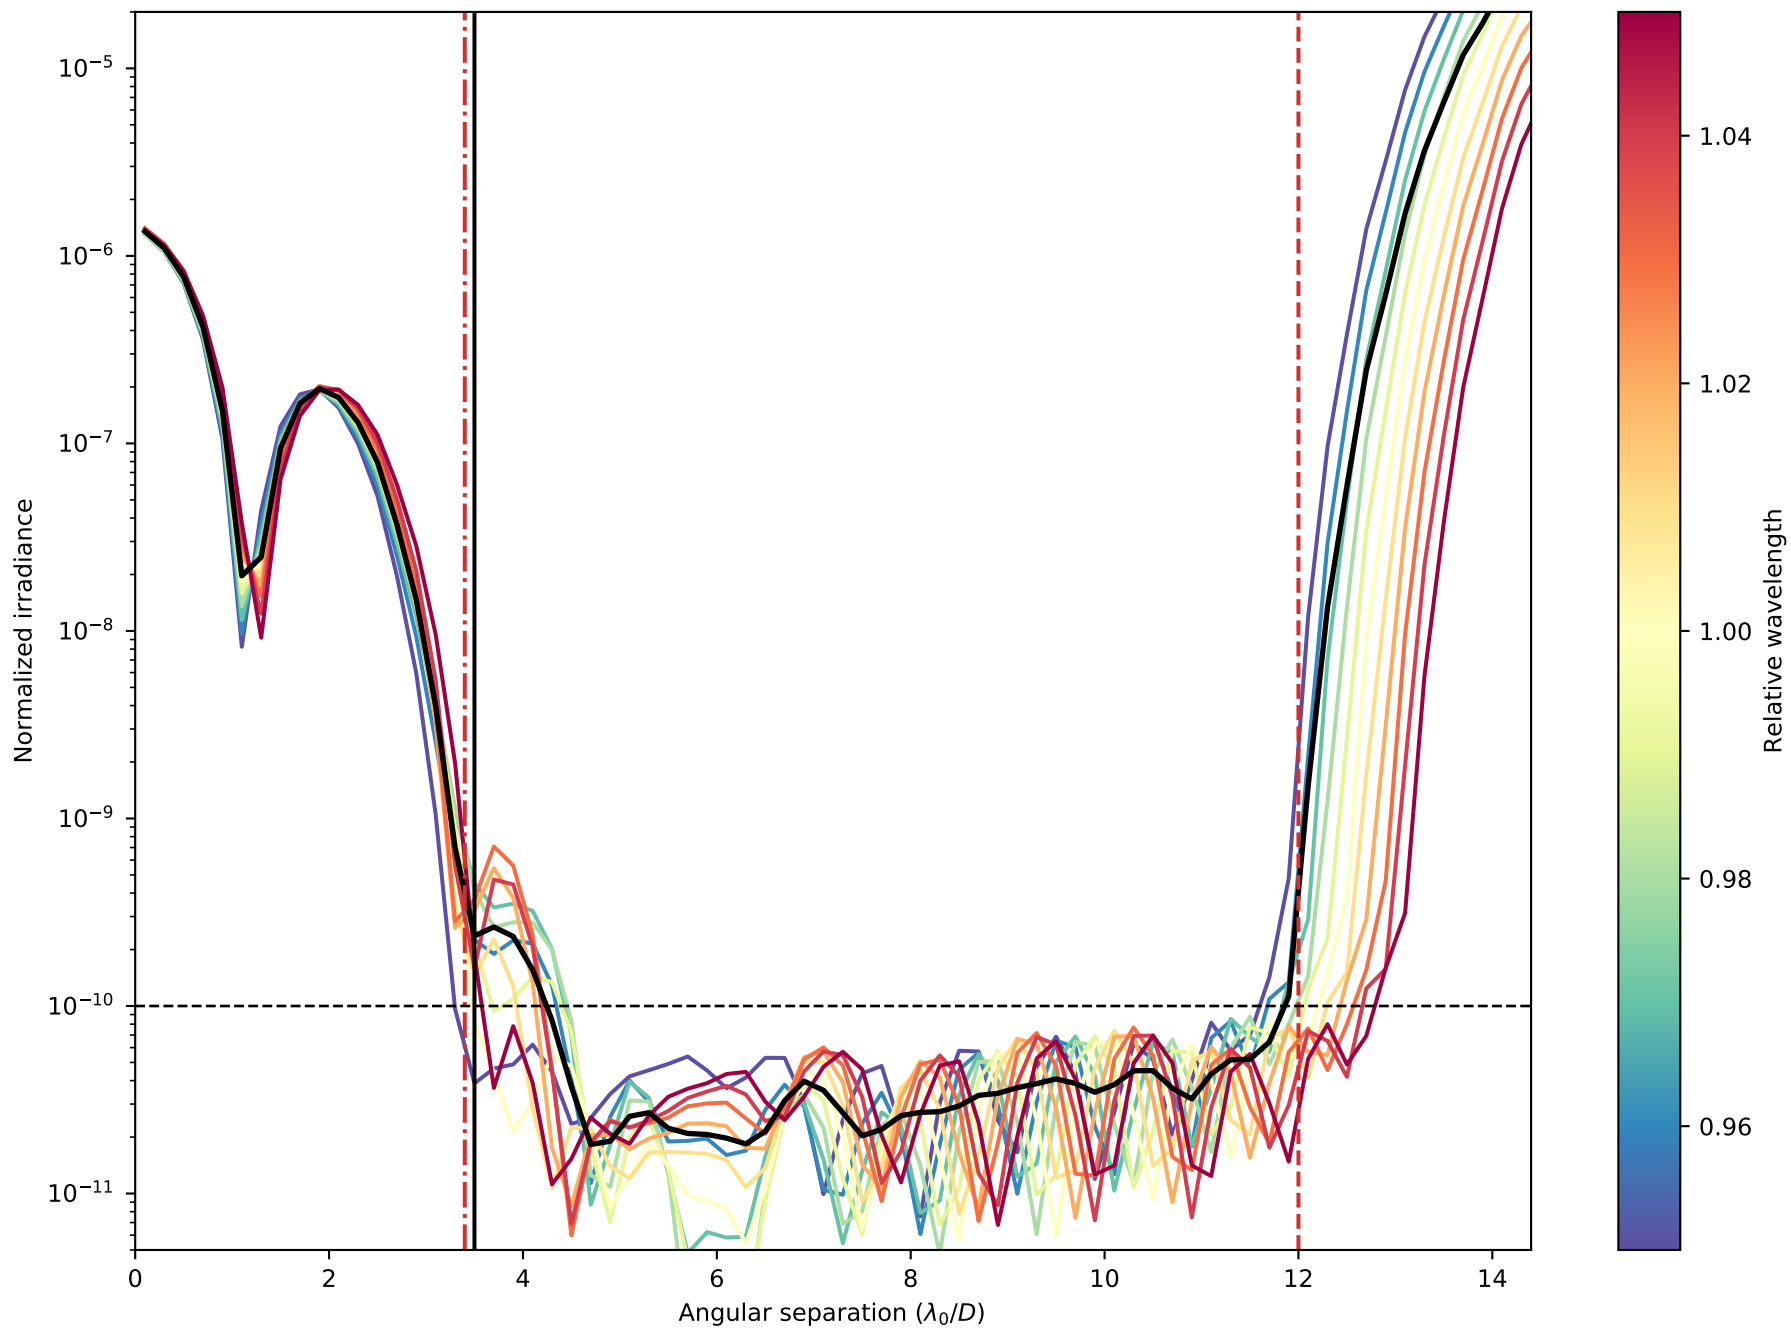


Radial intensity profile for the broadband APLC design at 11 simulated wavelengths centered around λ_0/D and equally spatially sampled over the 10.0% bandpass. The black curve shows the average intensity across the 11 wavelength samples. The dashed red vertical lines delimit the high-contrast dark zone (between 3.4 and $12.0 \lambda_0/D$). The blue dotted line delimits the FPM radius, set to $3.5 \lambda_0/D$.

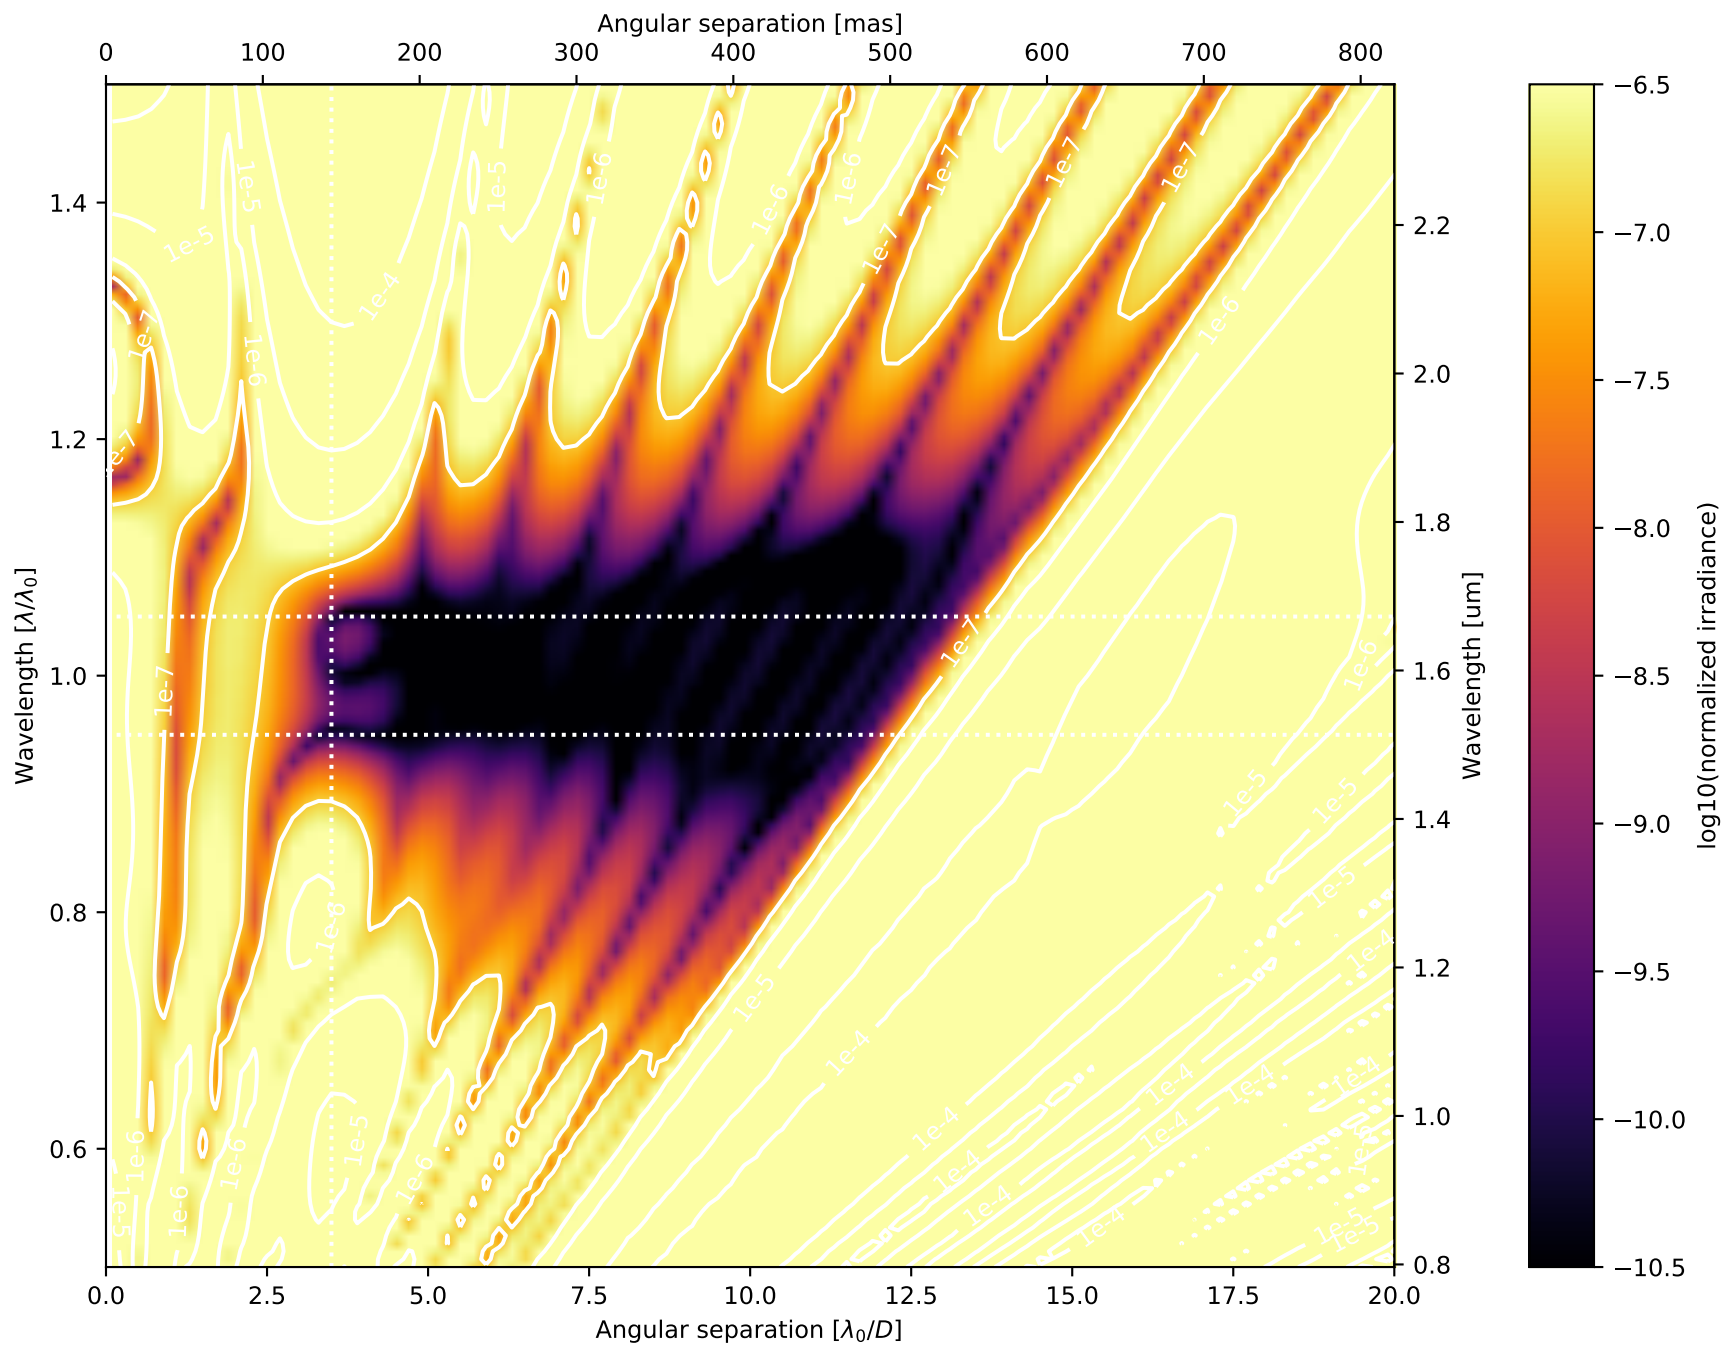

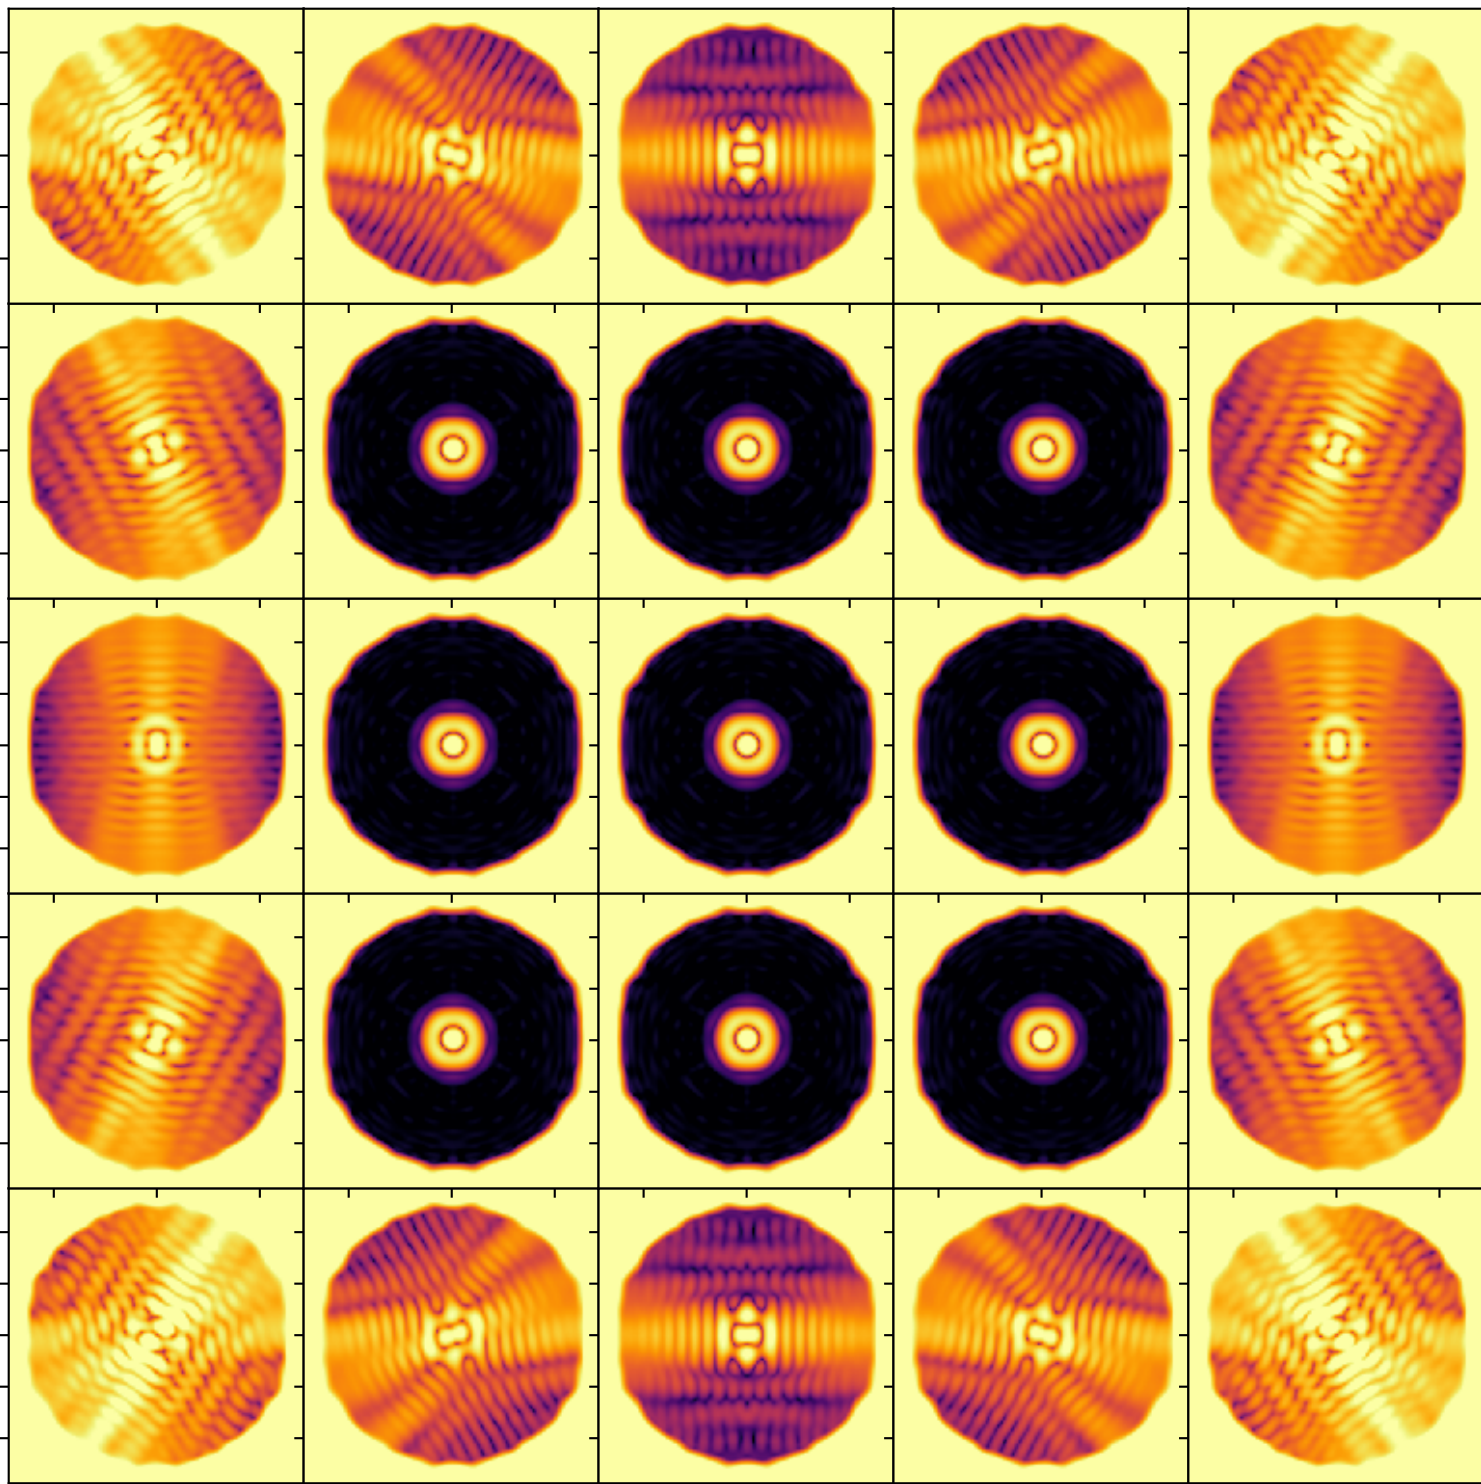

Average broadband normalized irradiance
within 1 pixels of Lyot stop misalignment.

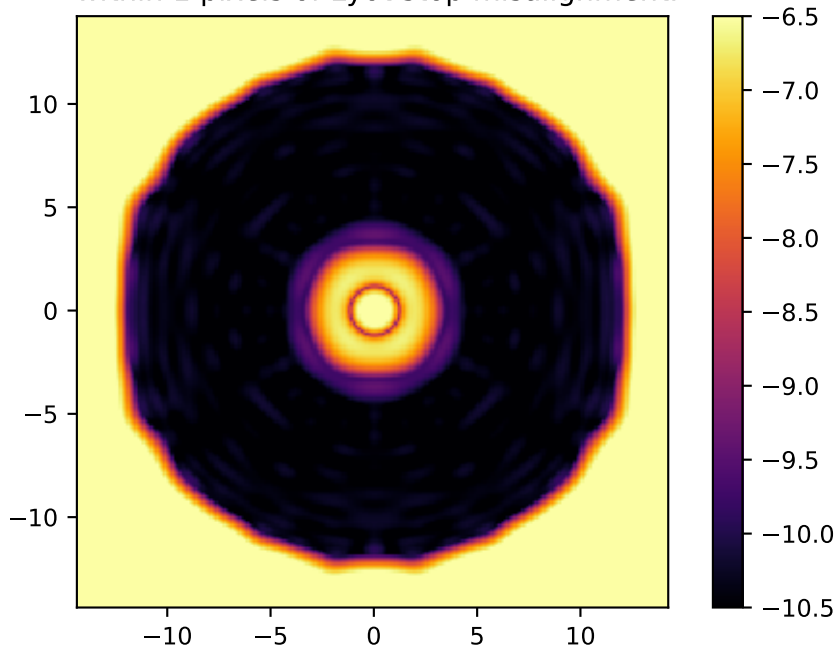

Analysis Summary

Apodizer &
Telescope Aperture




Image plane



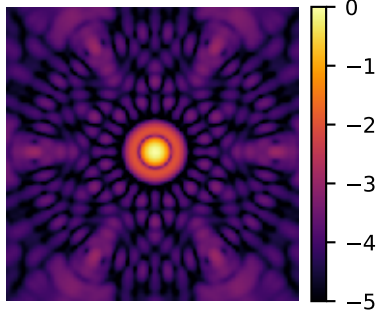



Image plane
w/FPM

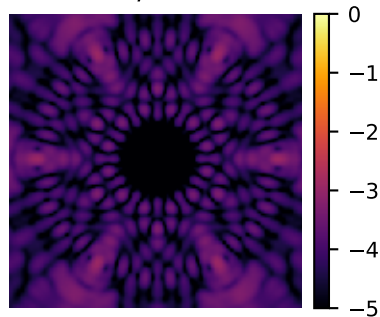


Lyot plane

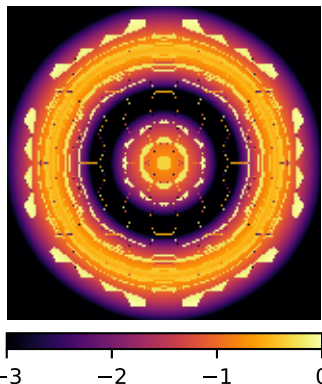


Lyot plane
w/lyot stop

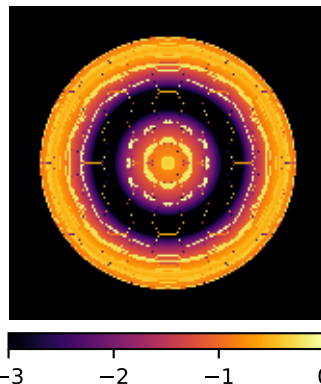


Final image plane

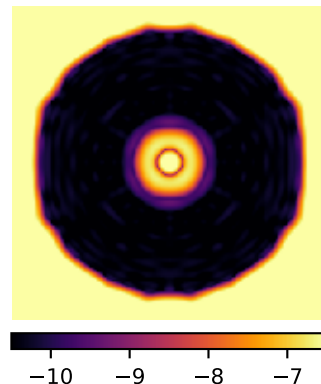

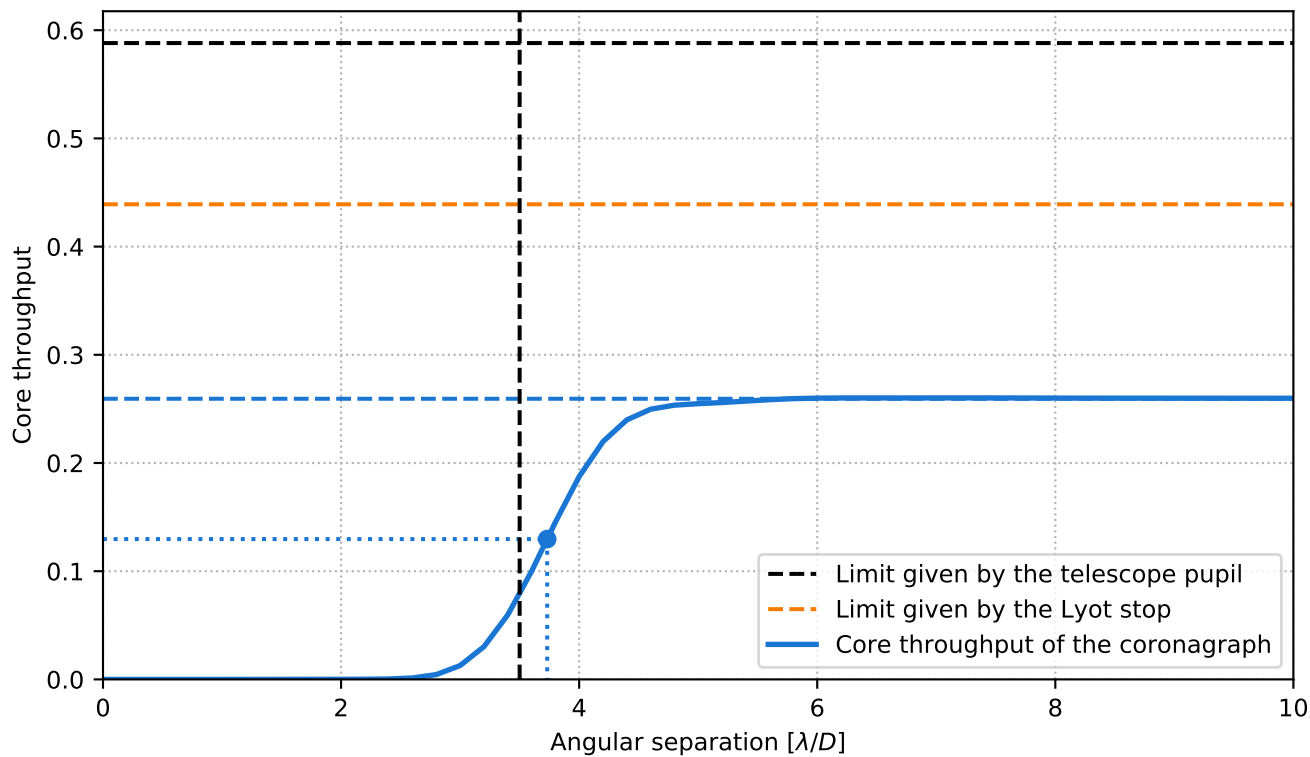


Pupil core throughput:	0.5881217989915151
Lyot stop core throughput:	0.43908270303727115
Maximum core throughput:	0.259373918420948
Maximum core throughput w.r.t. pupil core throughput:	0.441020752615718
Maximum core throughput w.r.t. Lyot stop core throughput:	0.5907176862736295
Inner working angle:	3.7314602247720723 λ_0/D


$2.75 \lambda_0/D$




$3.00 \lambda_0/D$




$3.25 \lambda_0/D$




$3.50 \lambda_0/D$




$3.75 \lambda_0/D$




$4.00 \lambda_0/D$



$4.25 \lambda_0/D$




$4.50 \lambda_0/D$




Broadband normalized irradiance for four representative levels of residual pointing jitter.


$\sigma_{\text{rms}} = 0.01 \lambda/D$

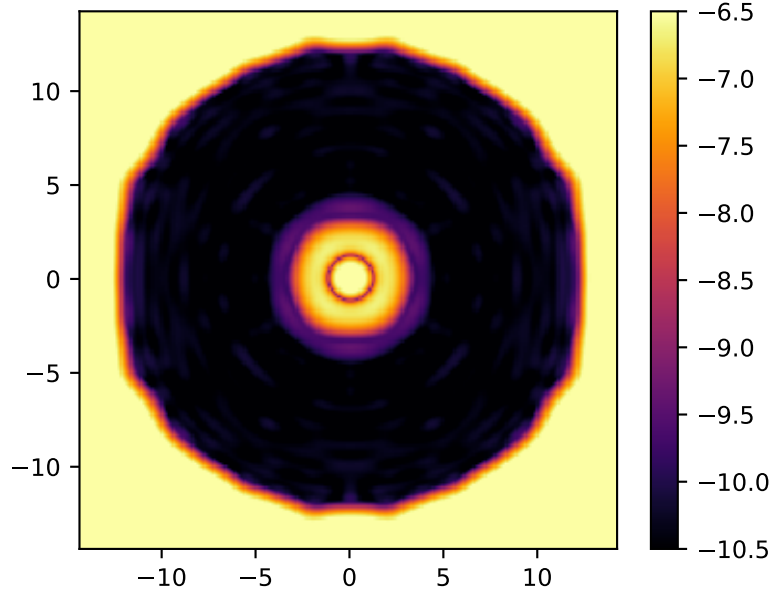


$\sigma_{\text{rms}} = 0.03 \lambda/D$

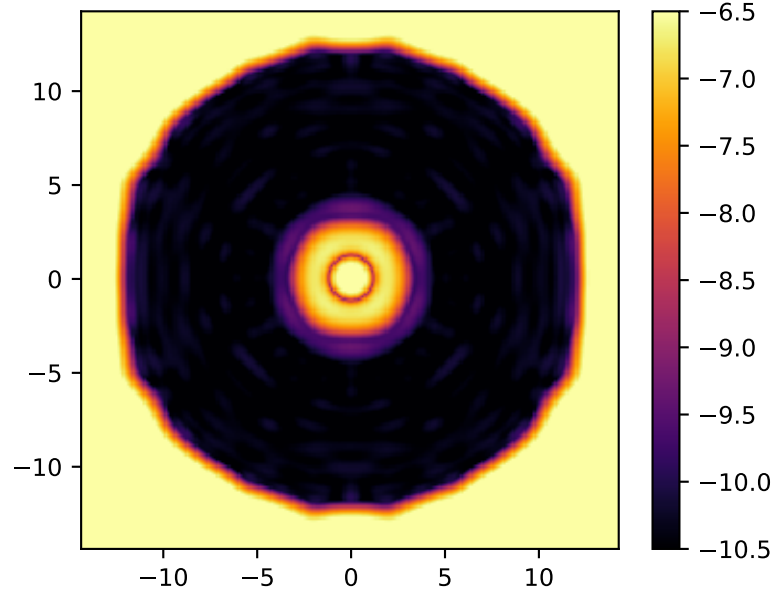


$\sigma_{\text{rms}} = 0.10 \lambda/D$

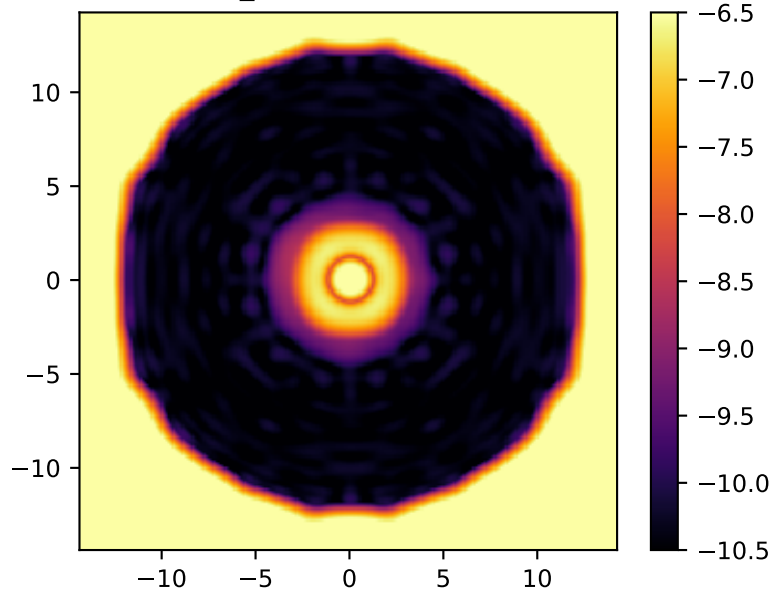

$\sigma_{\text{rms}} = 0.30 \lambda/D$

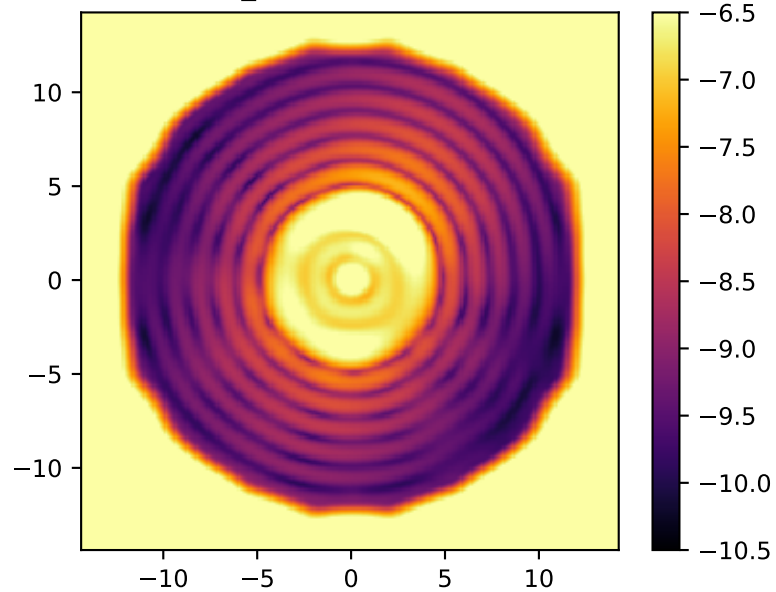

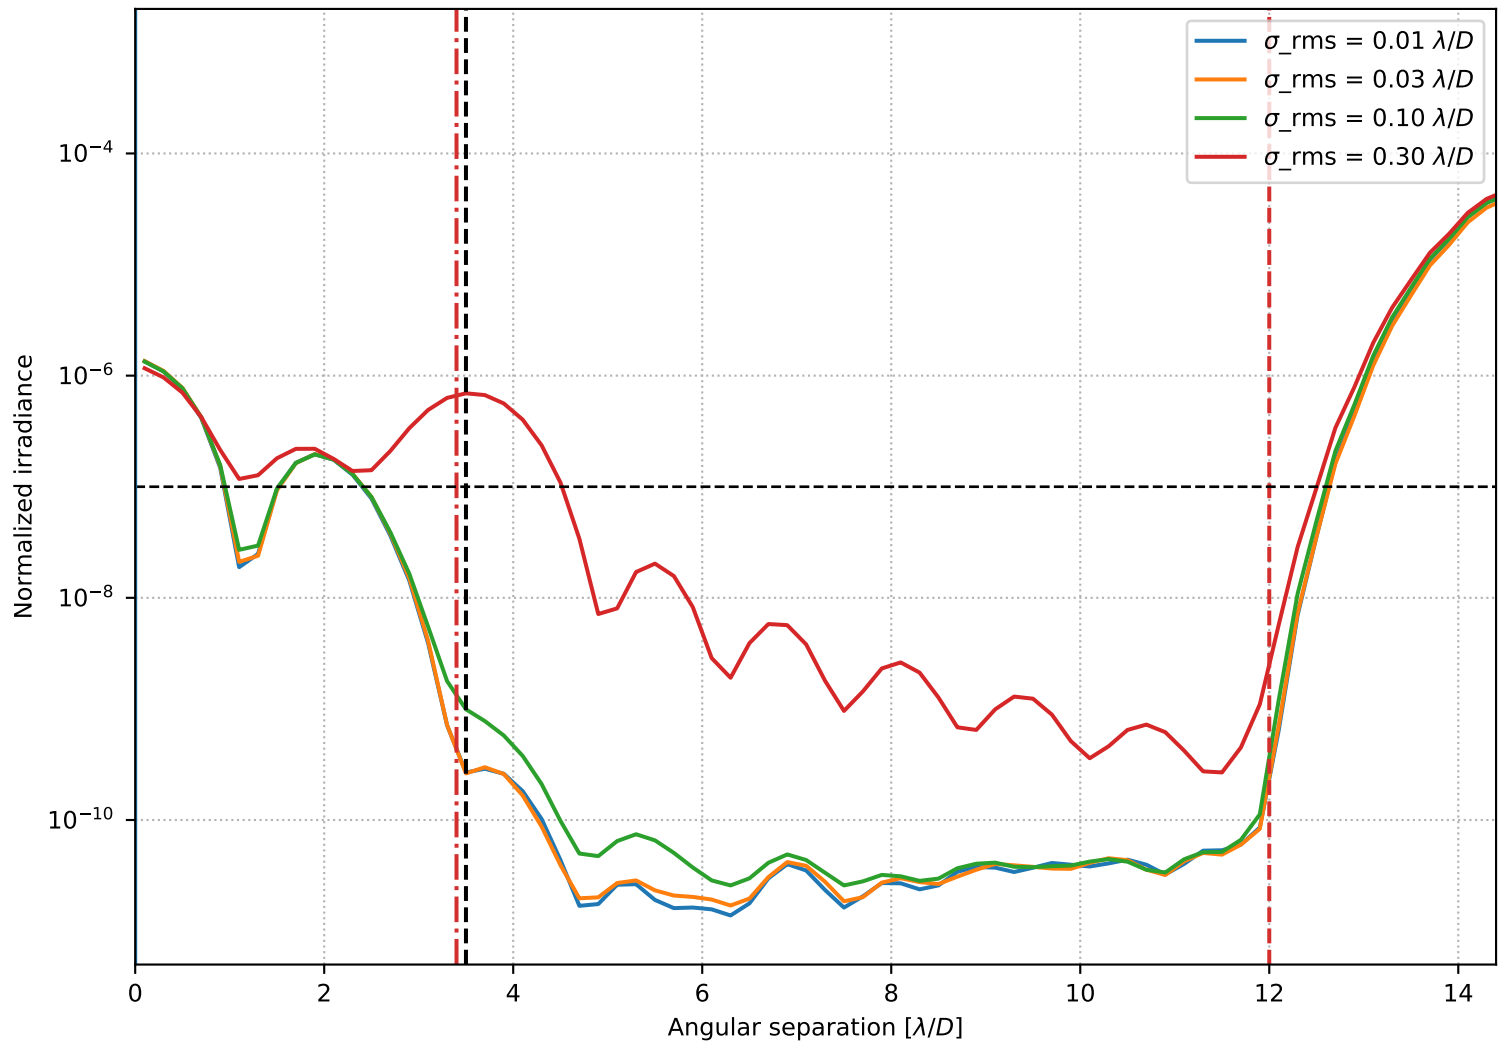

Azimuthally averaged raw contrast for four representative levels of rms residual pointing jitter.