

From Electrons to Apps

Levels of Abstraction in Computing

A 1-hour journey from physics to the apps you use every day


What actually happens when you double-click an icon?

- Somewhere, **electrons** start moving in a very specific pattern
- By the end of this hour, you'll be able to explain *every step* between "electron" and "app opens"

The Abstraction Tower 🗼

We'll climb it floor by floor:

1. Electrons & Transistors
2. Bits & Bytes
3. Logic Gates → CPU
4. Machine Code & Assembler
5. C — the "portable assembler"
6. Higher-Level Languages
7. Operating Systems
8. User Applications

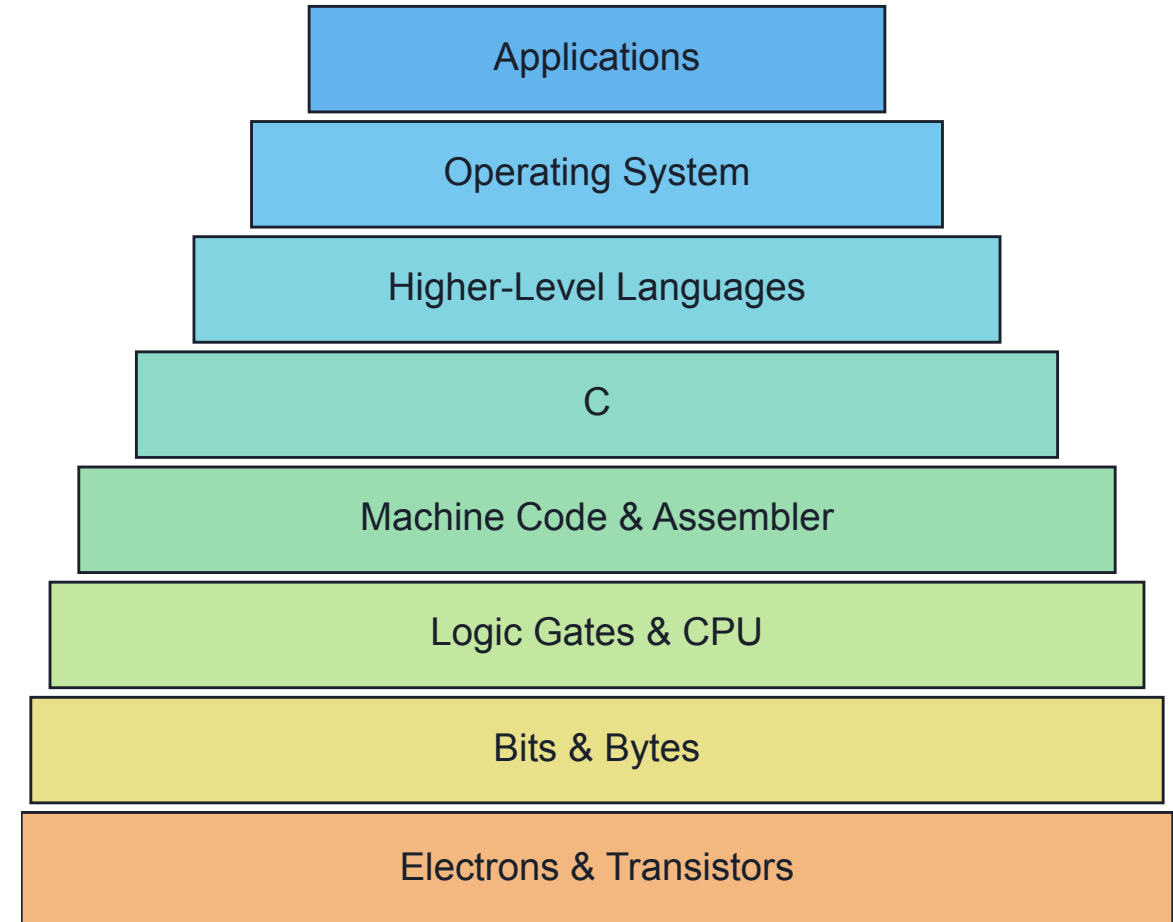

(This slide comes back between every section — watch the current floor light up)

1. Electrons & Transistors

Floor 0 — Physics


It starts with electricity

- Electricity = electrons flowing through a wire
- We can measure it as **voltage**: high voltage or low voltage
- Computers only care about **two states**: voltage present or not
 - High voltage → 1
 - Low voltage → 0

The transistor: a switch controlled by electricity

- A transistor is a tiny switch
- Normally, switches are flipped by hand (light switch)
- A transistor is flipped by **another electrical signal**
- This means: *electricity can control electricity*

Photo: real discrete transistors — modern chips shrink these to billions per chip



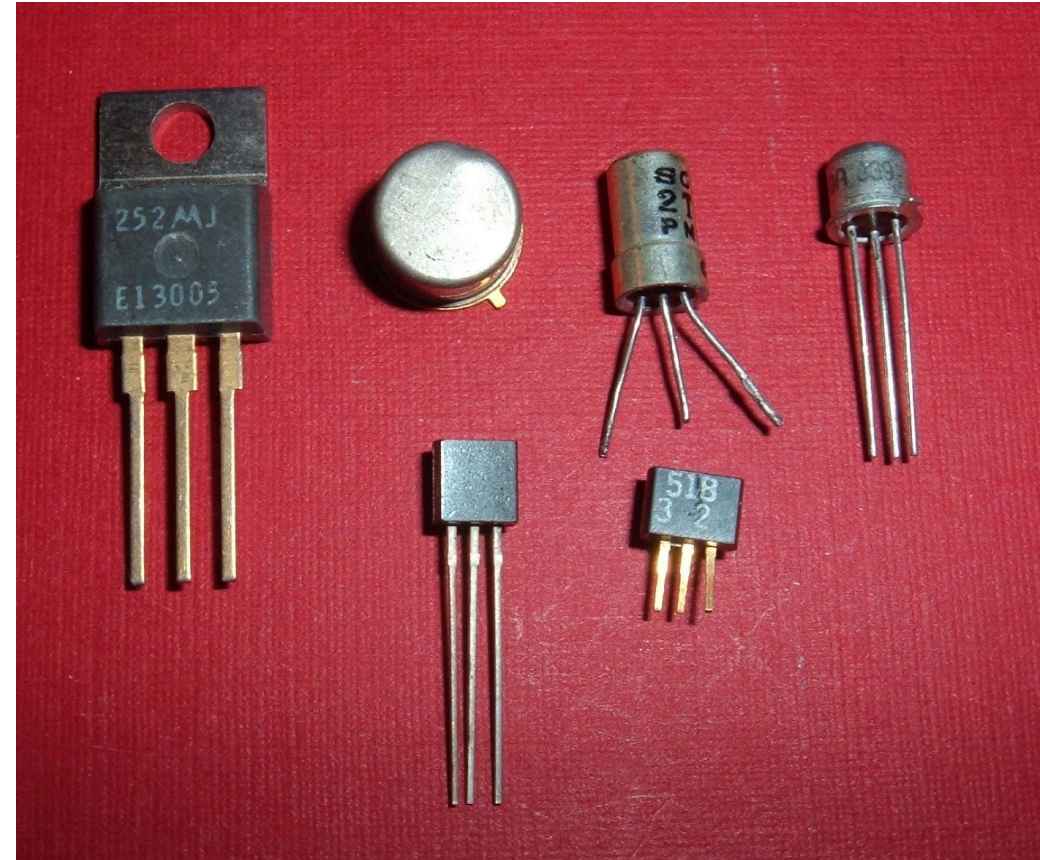


Why does that matter?

- If one signal can turn another on/off...
- ...we can chain millions of them together
- Each transistor makes a tiny **decision**: pass current, or don't

From switches to logic gates

- Combine a few transistors → build a **logic gate**
- Logic gates: AND, OR, NOT
 - AND → true only if *both* inputs are on
 - OR → true if *either* input is on
 - NOT → flips the signal



Key idea: everything below this point is just physics turning into a yes/no signal.

2. Bits & Bytes

Floor 1 — Representing Information

The bit

- **Bit** = one on/off signal = one 0 or one 1
- The smallest unit of information a computer can store

The byte


- **Byte** = a group of 8 bits
- Example: 0000 0001
- A single byte can represent 256 different values (0–255)

```
0000 0000 = 0
0000 0001 = 1
0000 0010 = 2
0000 0011 = 3
...
1111 1111 = 255
```

Why binary, not decimal?

- Building a reliable switch with exactly 2 states (on/off) is easy
- Building a reliable switch with 10 states would be very hard
- Binary isn't a choice for convenience — it's a choice for **reliability**

Photo: a silicon wafer — the raw material chips are cut from

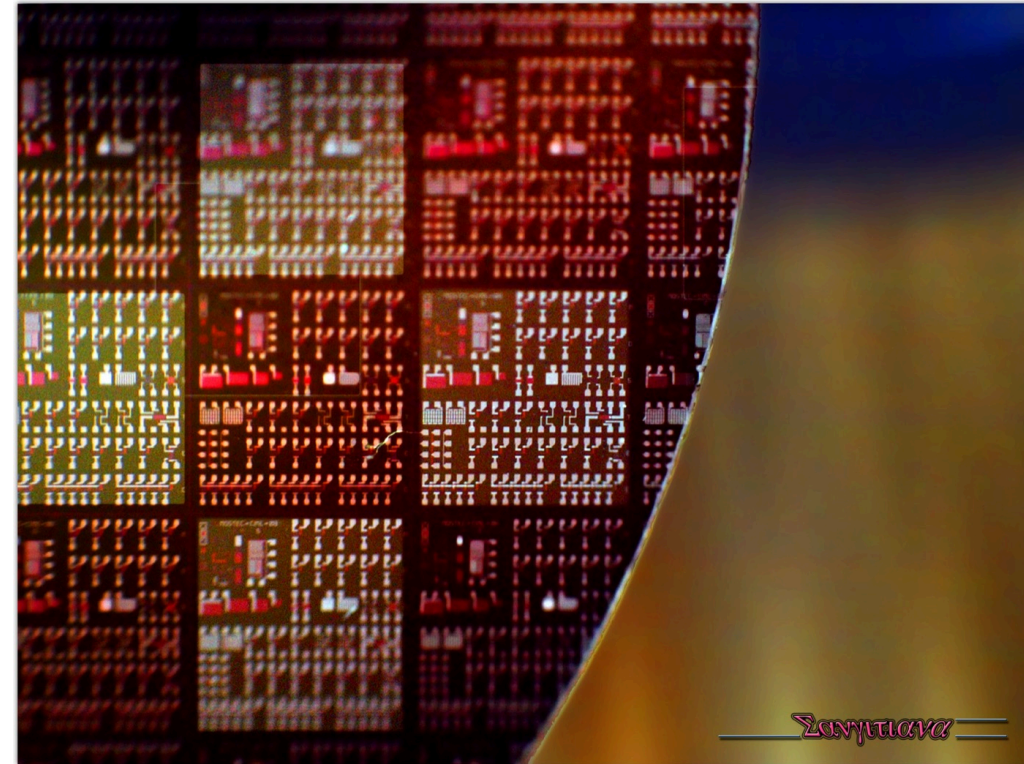

Bits represent *everything*

- Numbers → straightforward binary counting
- Letters → each letter mapped to a number (e.g. ASCII: 'A' = 65)
- Colors → red/green/blue values as numbers
- Sound → sampled amplitude values, thousands of times per second

Key idea: bits don't "know" what they mean — the program interpreting them decides.

3. Logic Gates → CPU

Floor 2 — Building a Calculator from Switches

Combining gates: an adder


- Take two 1-bit numbers, want to add them
- A small circuit of AND/OR/NOT gates can compute the sum + carry
- This is a real circuit: **the binary adder**

Zoom out: millions of these

- Chain adders together → add whole bytes, whole numbers
- Add more circuits → multiply, compare, move data around
- Package **millions to billions** of transistors into one chip

That chip is the CPU

Photo: a real microprocessor die, magnified — every rectangle is functional circuitry

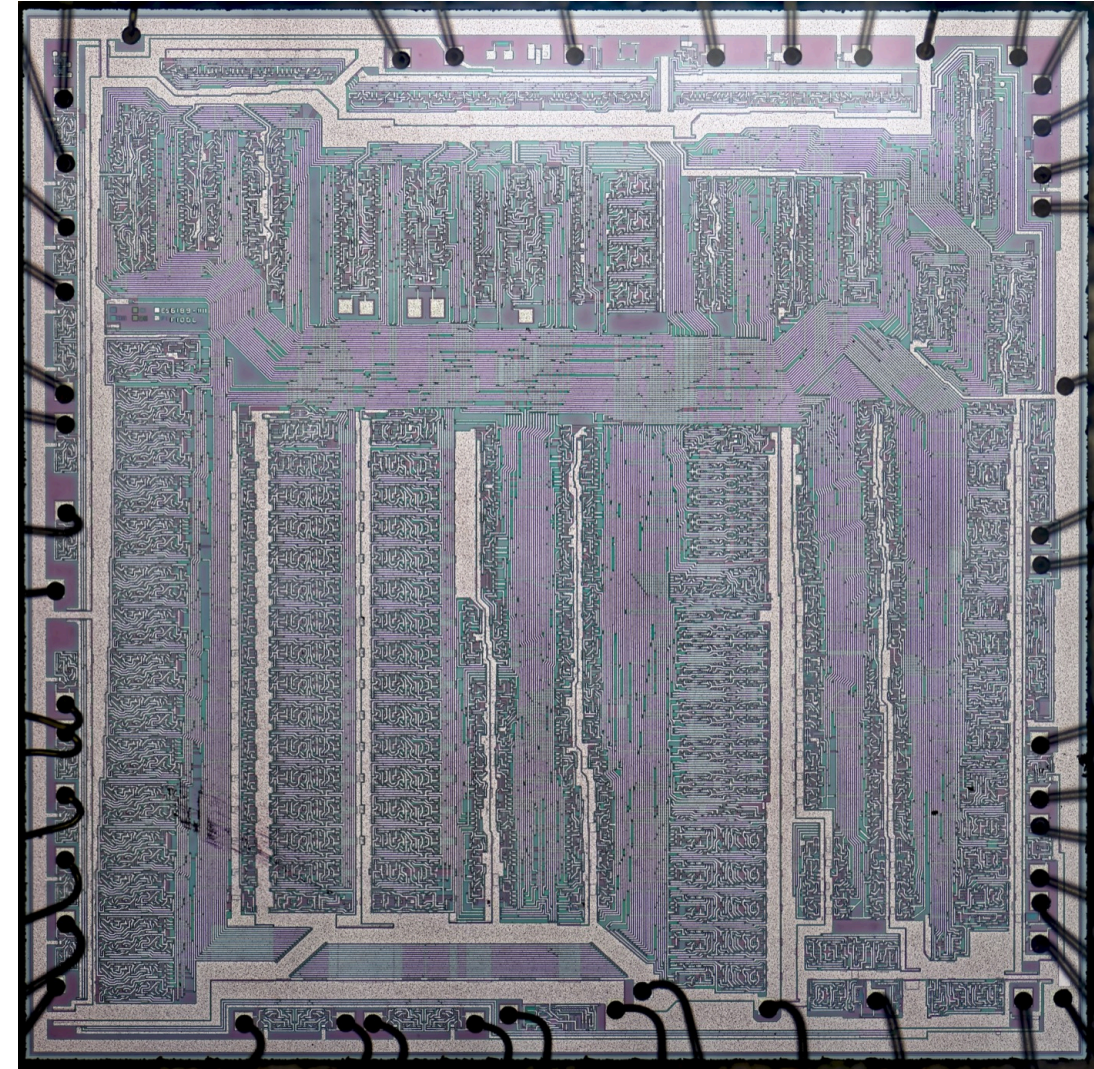

Two more ingredients

- **Registers** — tiny, extremely fast storage slots inside the CPU
- **Clock** — a ticking signal that paces every step
(modern CPUs tick billions of times per second — GHz)

Key idea: the CPU is a huge, fast calculator made entirely of on/off switches.

4. Machine Code & Assembler

Floor 3 — Talking to the CPU

Machine code

- The CPU only understands raw binary instructions
- Example (simplified): `10110000 01100001`
→ "put the value 97 into register A"
- Every CPU family has its own machine code "dialect"

Assembler: a thin translation layer

- Machine code is unreadable for humans
- **Assembly language** gives instructions short names:

```
MOV A, 97    ; put 97 into register A
ADD A, B     ; add register B to register A
JMP loop     ; jump back to "loop"
```

- Each assembly line maps almost 1:1 to one machine code instruction

Demo: peeking at real machine instructions

- Compile a tiny "Hello World" program
- Run `objdump -d` (or similar) on it
- Look at the disassembly: short, cryptic instructions
- *You don't need to understand every line — just see that it's real and small*

Key idea: assembler is a direct, human-readable translation of machine code.

5. C — the "Portable Assembler"

Floor 4 — Structured, Reusable Code

The problem with assembly

- Tied to *one specific* CPU type
- Extremely tedious to write
- Very easy to make mistakes (no safety nets)

Enter C

```
int add(int a, int b) {  
    return a + b;  
}
```

- Introduces **variables**, **functions**, **loops** as readable text
- Still maps closely to what the machine actually does
- Nicknamed "portable assembler" — same ideas, works on many CPUs

The compiler

- A program that translates C source code → machine code
- Different compiler per target CPU, same C source code
- This is what makes C "portable"

Where C lives today

- Operating system kernels (Linux, parts of Windows/macOS)
- Embedded systems (microwaves, cars, routers)
- Performance-critical software

6. Higher-Level Languages

Floor 5 — Closer to Human Thinking

The problem C still has

- You manage memory yourself (easy to get wrong)
- Verbose — lots of code for simple ideas
- Still thinking like the machine, not like a human

Higher-level languages

- Python, JavaScript, Java, and many others
- Automatic memory management — the language cleans up after you
- Rich ecosystems: huge libraries for almost any task
- Example — same idea as our C function, in Python:

```
def add(a, b):  
    return a + b
```

Compiled vs. interpreted (just the vocabulary)

- Some languages are **compiled ahead of time** (like C)
- Some languages are **interpreted** — translated and run on the fly
- Many modern languages do a mix of both
- *(We'll go deeper into this in a future lecture)*

Key idea: every layer trades a bit of performance/control for speed of writing and readability.

7. Operating Systems

Floor 6 — Sharing the Machine

What does an OS actually do?

- Manages the hardware: CPU, memory, disk, screen, network
- Shares that hardware safely between **many** running programs
- Without it, every app would need to know how to talk to every device directly


A few key concepts

- **Process** — a running program, with its own slice of memory and CPU time
- **File** — a named chunk of data stored on disk, managed by the OS
- **Driver** — small piece of software that lets the OS talk to specific hardware

Same idea, different implementations

- **Windows, macOS, Linux** (and Android, which is built on Linux)
- All solve the same core problems: process management, files, drivers, security
- Different design choices, same fundamental job

Tux the penguin — mascot of the Linux kernel

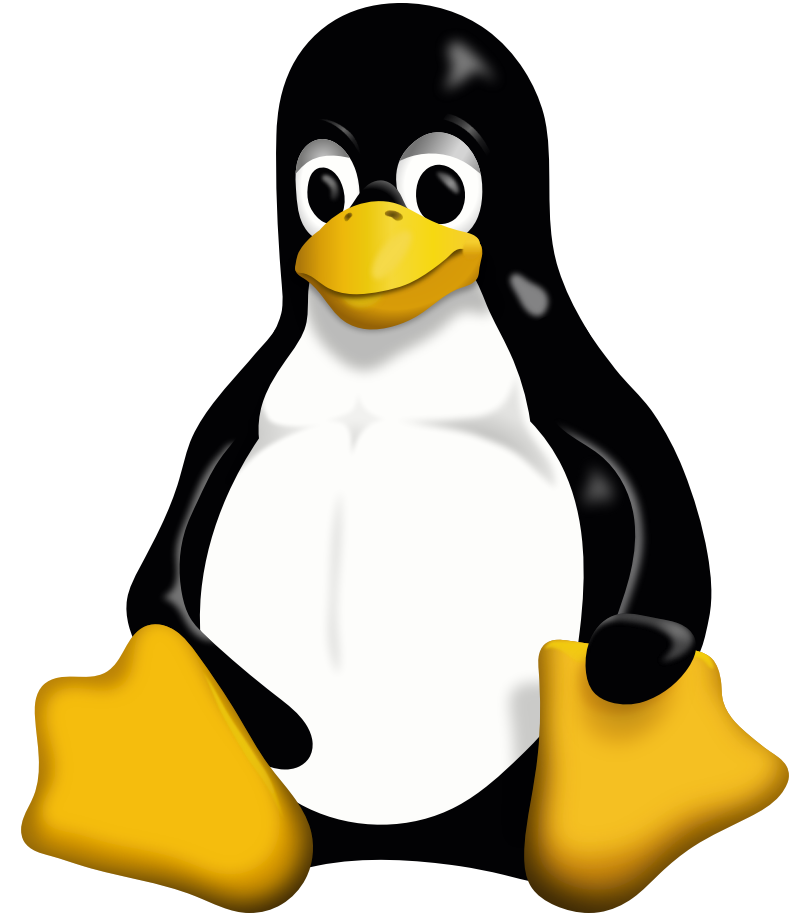

Demo: seeing processes live

- Open Task Manager (Windows) or Activity Monitor (macOS)
- Point out: dozens of processes running *right now*
- This is the OS doing its job, visibly, in real time

8. User Applications

Floor 7 — What You Actually See

Apps are built on everything below

- A browser, a game, a word processor:
 - Written in a higher-level language (or C/C++)
 - Compiled/interpreted down through the layers
 - Uses OS services (files, network, screen, input)
 - Ultimately runs as CPU instructions
 - Which are, in the end, electrons flipping switches — billions of times per second

Full circle

Double-click icon

- OS loads the program into memory
- CPU starts executing its instructions
- Instructions are just patterns of bits
- Bits are just voltage levels
- Voltage levels are just electrons moving through transistors

Putting It All Together

The full ladder, one line each

1. **Electrons** flow through transistors (switches)
2. Transistors form **logic gates**
3. Logic gates form a **CPU** that runs **bits & bytes**
4. The CPU executes **machine code**, written via **assembler**
5. **C** gives structure while staying close to the machine
6. **Higher-level languages** let us think more like humans
7. The **operating system** shares hardware between programs
8. **Applications** are what we actually see and use

Programming is choosing which floor of this tower to work on.

Questions?

Image Credits

- Diagrams (tower, logic gates): original, made for this deck
- Transistors photo: ArnoldReinhold, CC BY-SA 3.0, Wikimedia Commons
- Silicon wafer photo: Sangitiana Fararano, CC BY-SA 2.0, Wikimedia Commons
- CPU die photo: Revaldinho, CC BY 4.0, Wikimedia Commons
- Tux: Larry Ewing / Simon Budig / Anja Gerwinski, Wikimedia Commons

(full details in `images/CREDITS.md`)