



React Client-Components

Outline

1. Introduction
2. React Components
3. State
4. Components Communication
5. React Tools and Component Libraries

React Introduction



Used by Facebook, Instagram, Netflix, Dropbox, Outlook, Yahoo, Khan Academy,

<https://intellisoft.io/15-popular-sites-built-with-react-js/>


What is React?



- React is an open-source JavaScript library for building **components-based user interfaces (UI)**
 - UI is **composed** of small reusable **components**
 - A component encapsulates **UI elements** and the **behavior** associated with them
- Ease creating a Single Page Application (SPA)
 - SPA is a Web app that load a single HTML page and **dynamically loads components** as the user interacts with the app
- Open-sourced by Facebook mid-2013 - <https://react.dev/>
- Competing with Angular <https://angular.dev/> and Vue.js <https://vuejs.org/>


Components of Single Page Application (SPA)

- A **Single-Page Application (SPA)** has **1 main shell page** and **multiple UI components loaded** in response to user actions


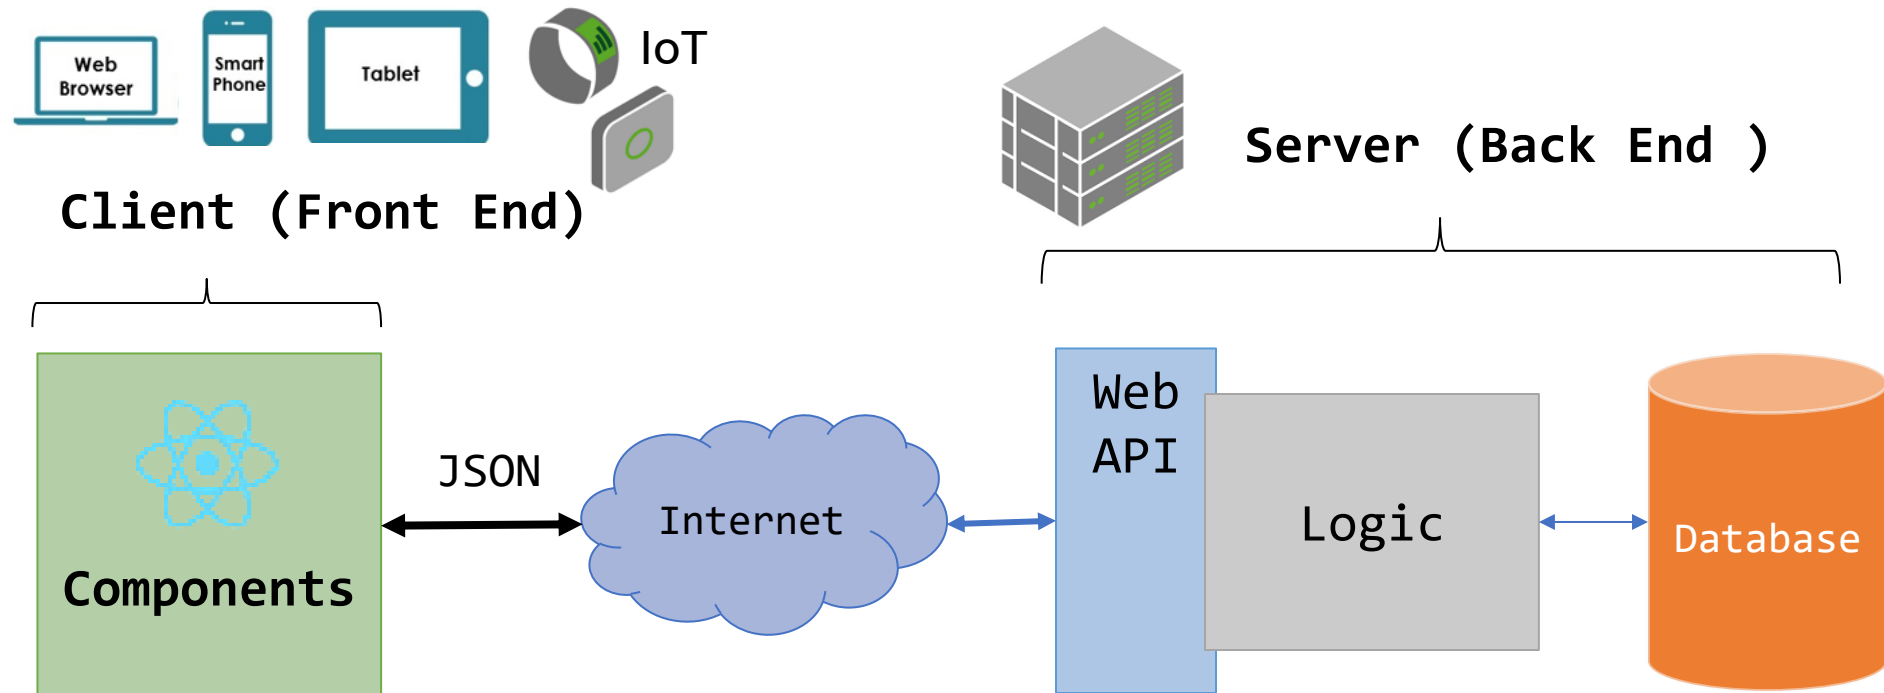


Web App Architecture using Next.js

- Front-end made-up of **multiple UI components loaded** in response to user actions
- Back-end Web API and Web pages

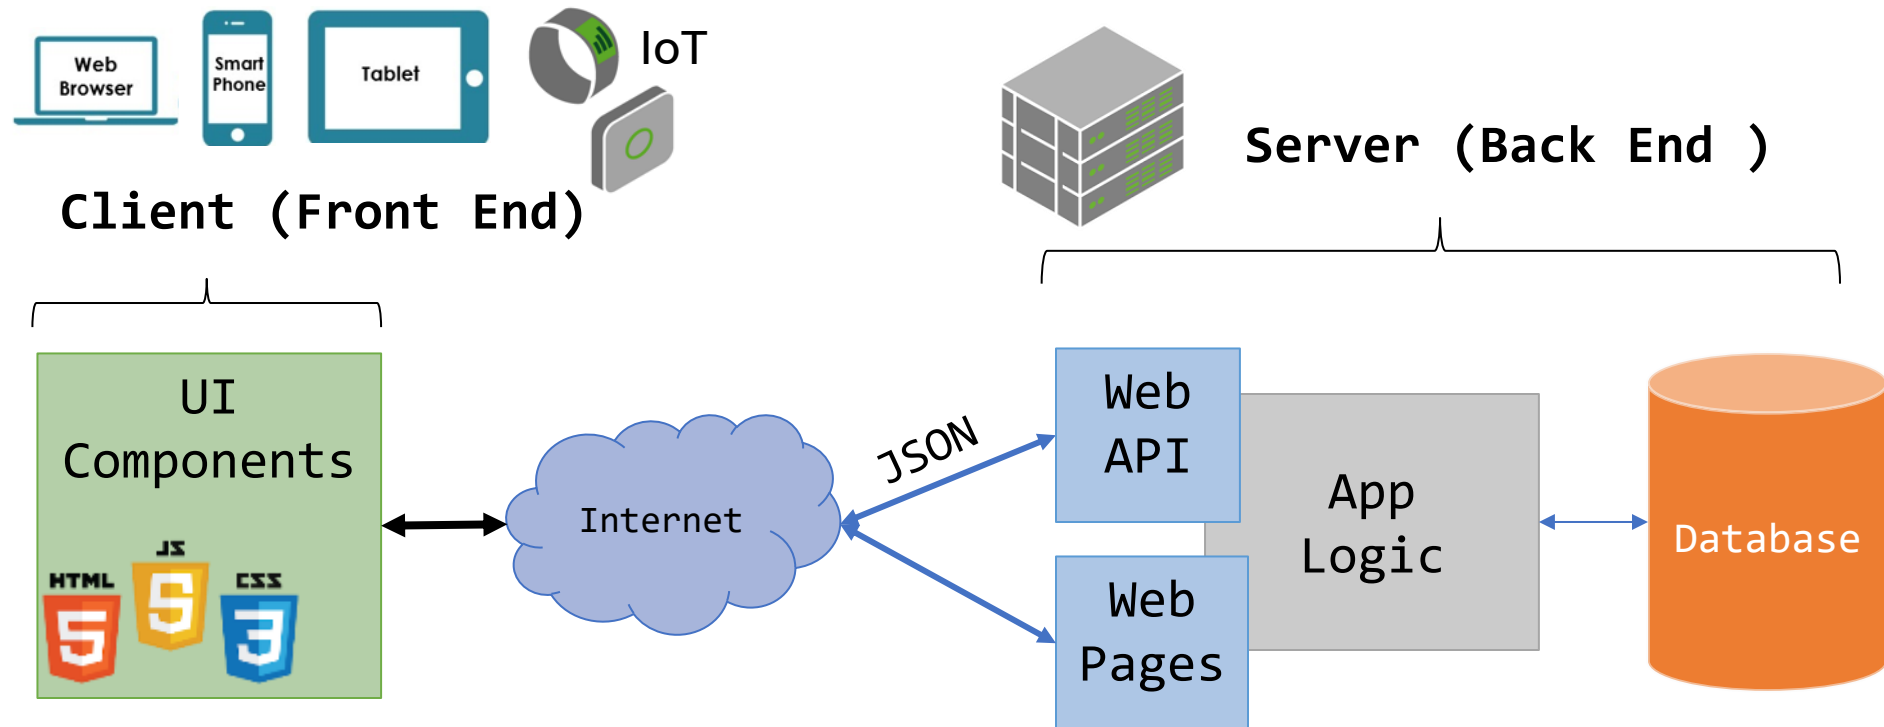

React Components

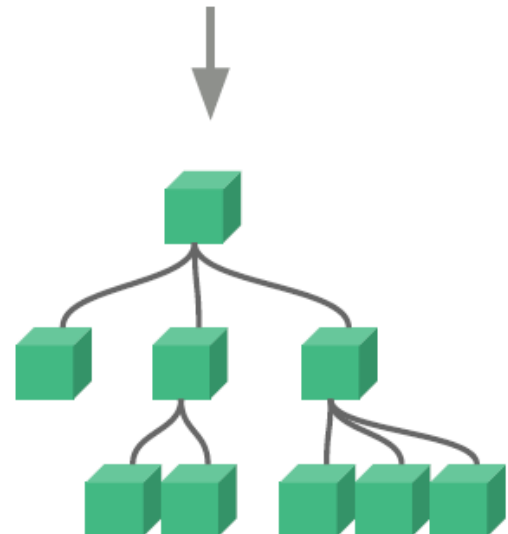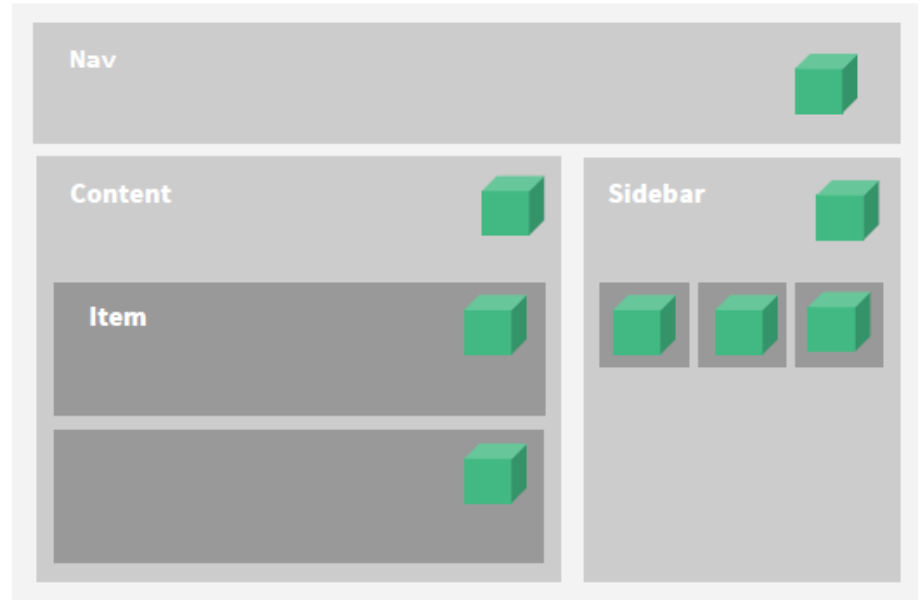

Getting started

- Install latest **Node.js** <https://nodejs.org/en/>
- Download **VS Code** <https://code.visualstudio.com/>
- Create an empty folder (with no space in the name use **dash** - instead)
- Create a next app

npx create-next-app@latest .

- Run the app

npm run dev

React Component

- React App = composition of **components**
- A ***component***:
 - Return **HTML *elements*** to provide the UI
 - Encapsulate **state** (internal component data) and **functions** to ***handle events*** raised from the UI elements
- Component = UI + display logic
- Components allows creating new '**HTML tags**'

React = A declarative component-based programming model

- UI is built using JavaScript functions
 - Each function define a piece the app's UI programmatically
 - As **state** changes the UI automatically updates (Reactive UI)
 - without imperatively mutating DOM
- Declarative = you define the UI content and structure, combined with different states (e.g., "is a modal open or closed?")
 - Then you leave it up to React to figure out the appropriate DOM instructions



How to define a piece of UI?

UI is **composed** of small reusable **components**

UI Component = a **function**:

- Takes some inputs and emits a piece of UI
- Function that converts the state (i.e., app data) into UI



- **UI = $f(\text{state})$: UI is a visual representation of state**
(e.g., display a tweet and associated comments)
- **State changes trigger automatic update of the UI**



Component Example

- Create a **Welcome** component
 - Returns **JSX** : an HTML-like syntax to define the component UI
 - Can accept a parameter called **props**
 - to configure the component with different content / attributes - just like how HTML works (makes the component reusable)
 - **props** are read-only
 - Component name must start with a capital letter

```
function Welcome(props) {  
  return (<h1>Welcome to {props.appName}</h1>);  
}  
export default Welcome;
```

You can embed JavaScript expressions in JSX

- Use the **Welcome** component

```
<Welcome appName='React Demo App' />
```

What is JSX?

- React uses JSX (JavaScript XML) HTML-like markup to describe the component's UI
- Embraces the fact that rendering logic is inherently coupled with other UI logic
- JSX allows us to write HTML like syntax which gets transformed to JavaScript objects

JSX

```
const element = (  
  <h1 className="greeting">  
    Hello, world!  
  </h1>  
);
```

JavaScript

```
const element = React.createElement(  
  'h1',  
  {className: 'greeting'},  
  'Hello, world!'  
);
```

It's just JavaScript!!

Props destructuring

- In a **react** component you can destructure **props into variables**

```
function UserInfo(props) {  
  return (  
    <div>  
      First Name: {props.firstName}  
      Last Name: {props.lastName}  
    </div>  
  );  
}
```

Becomes

```
function UserInfo({ firstName, lastName }) {  
  return (  
    <div>  
      First Name: {firstName}  
      Last Name: {lastName}  
    </div>  
  );  
}
```

Special "children" Prop

- The children property holds the content you might have provided between the component's opening and closing tags
 - A special children property auto-added by react

```
<Welcome name="Ali Faleh">  
  <h2>Welcome to QU</h2>  
</Welcome>
```

```
function Welcome({name, children}) {  
  return (  
    <>  
      <h1>Welcome {name}</h1>  
      {children}  
    </>  
  );  
}
```

Rendering a List of items (with .map())

Lists are handled using **.map** array function

```
function FriendsList({friends}) {  
  return <ul>  
    {friends.map( (friend, i) =>  
      <li key={i}>{friend}</li>  
    )}  
  </ul>  
}
```

- Fatima
- Mouza
- Sarah

```
<FriendsList>  
  <ul>  
    <li key="0">Fatima</li>  
    <li key="1">Mouza</li>  
    <li key="2">Sarah</li>  
  </ul>  
</FriendsList>
```

Key helps identify which items have changed, added or removed

- Use the **FriendsList** component

```
<FriendsList friends={['Fatima', 'Mouza', 'Sarah']}/>
```


List of item keys

Keys are very important in lists for the following reasons:

- A key is a unique identifier used to identify which list items have changed, are added, or are deleted from the list
- It also helps to determine which components need to be re-rendered instead of re-rendering all the components every time.
 - Therefore, it increases performance, as only the updated components are re-rendered

State

$$f(\text{State } \begin{matrix} \text{name: John} \\ \text{surname: Dough} \end{matrix}) =$$

View

John

Dough

OK

Component State

- A component can store its own local data (**state**)
 - Private and fully controlled by the component
 - Can be passed as **props** to children
- Use **useState** hook to create a *state variable* and an *associated function* to update the state

```
const [count, setCount] = useState(0);
```

useState returns a state variable *count* initialized with 0 and a function *setCount* to be used to update it

- Calling *setCount* causes React to **re-render the app components** and **update the DOM** to reflect the state changes



Never change the state directly by assigning a value to the state variable => otherwise React will NOT re-render the UI


State

- State = any value that can change overtime
 - State variable must be declared using **useState** hook to act as **Change Notifiers**
 - 👍 • They **are observed** by the React runtime
 - Any change of a state variable will trigger the **re-rendering** of any functions that **reads** the state variable
 - Both props and state changes trigger a render update
- => UI is **auto-updated** to reflect the updated app state

Observer Pattern at the heart of Jetpack Compose

Observer Pattern Real-Life Example: A celebrity who has many fans on Tweeter

- Fans want to get all the latest updates (posts and photos)
- Here fans are **Observers** and celebrity is an **Observable** (analogous **state variable** in React)
- A **State variable** is an **observable data holder**: React runtime **observes its changes** and updates the UI accordingly

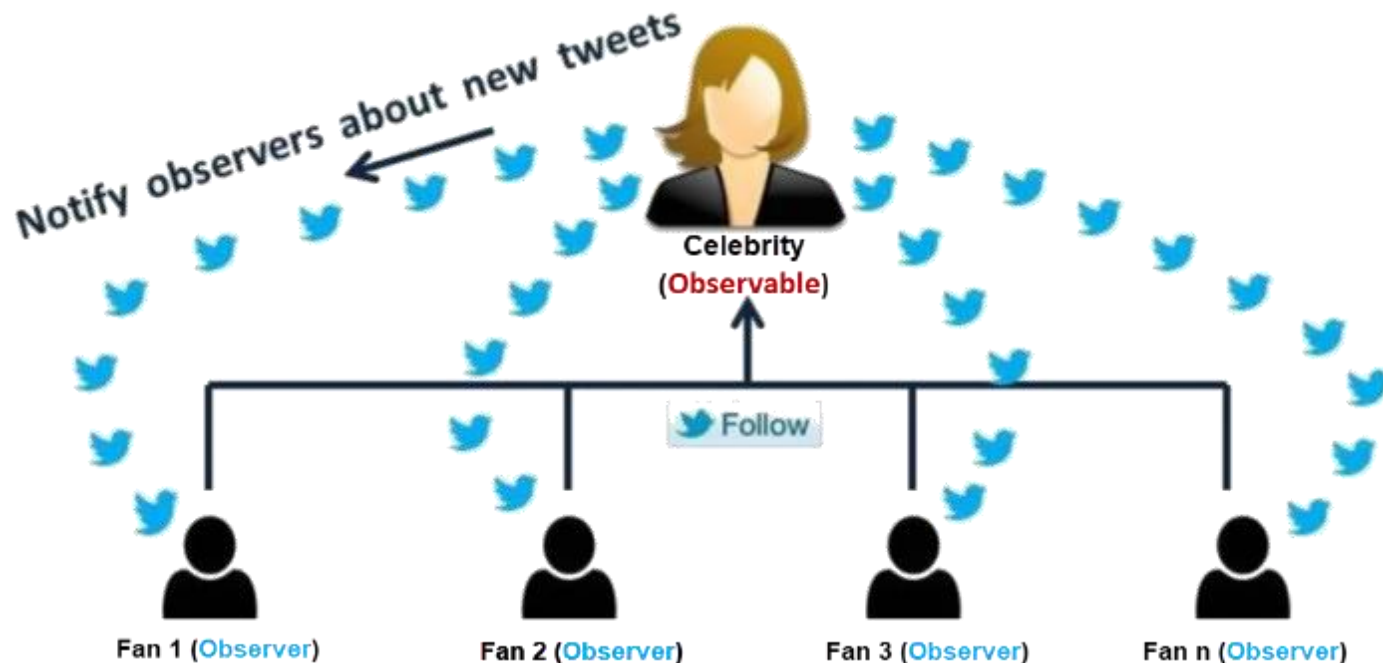

Imperative UI vs. Declarative UI

- Imperative UI – manipulate DOM to change its internal state / UI

```
document.querySelector('#bulbImage').src = 'images/bulb-on.png';  
document.querySelector('#switchBtn').value = "Turn off";
```



UI in React is immutable

- In react you should NOT access/update UI elements directly (as done in the imperative approach)
- Instead update the UI is by updating the state variable(s) used by the UI elements – this triggers automatic UI update
 - E.g., change the bulb image by updating the **isBulbOn** state variable

```
<input type="button"  
  value= {isBulbOn ? "Turn off" : "Turn on"}  
  onClick={() => setIsBulbOn(!isBulbOn)} />
```

useState Hook

State Variable

Setter Function

Initial Value



```
// State with Hooks  
const [count, setCount] = useState(0);
```

Diagram illustrating the useState Hook usage:

- The **State Variable** label points to `count` in the array `[count, setCount]`.
- The **Setter Function** label points to `setCount` in the array `[count, setCount]`.
- The **Initial Value** label points to the initial value `0` passed to `useState`.

Component with State + Events Handling

```
import React, { useState } from "react";
```

Count: 4

+

-

```
function Counter({ startValue }) {  
  const [count, setCount] = useState(startValue);  
  const increment = () => { setCount(prev => prev + 1); };  
  
  const decrement = () => { setCount(prev => prev - 1); };  
  
  return <div>  
    Count: {count}  
    <button type="button" onClick={increment}>+</button>  
    <button type="button" onClick={decrement}>-</button>  
  </div>  
}  
export default Counter;
```




Handling events is done the way events are handled on DOM elements

- Use the **Counter** component

```
<Counter startValue={3}/>
```


Uni-directional Data Flow:

Props vs. State




- **Props** = data passed to the child component from the parent component
- **Props** parameters are **read only**

- **State** = internal data managed by the component (cannot be accessed and modified outside of the component)
- **State** variables are **Private** and **Modifiable** inside the component only (through **set** functions returned by `useState`)

👍 React **automatically re-render the UI** whenever **state** or **props** are updated


Event Handlers update the State and React updates the UI

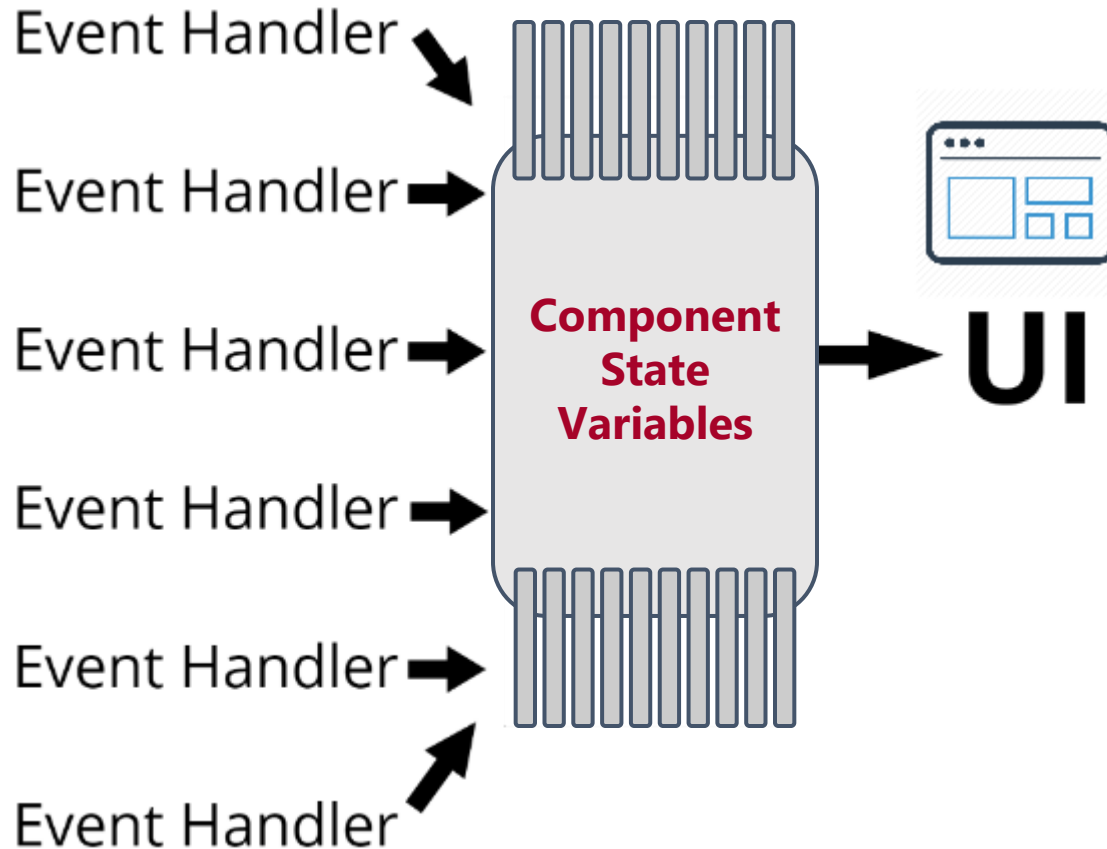


Every place a state variable is displayed is guaranteed to be auto-updated

Virtual DOM

- Virtual DOM = Pure JavaScript lightweight DOM, totally separate from the browser's slow JavaScript/C++ DOM API
- Every time the component **updates its state** or **receives new data via props**
 - A new virtual DOM tree is generated
 - New tree is **diffed** against old...
 - ...producing a minimum set of changes to be performed on real DOM to bring it up to date

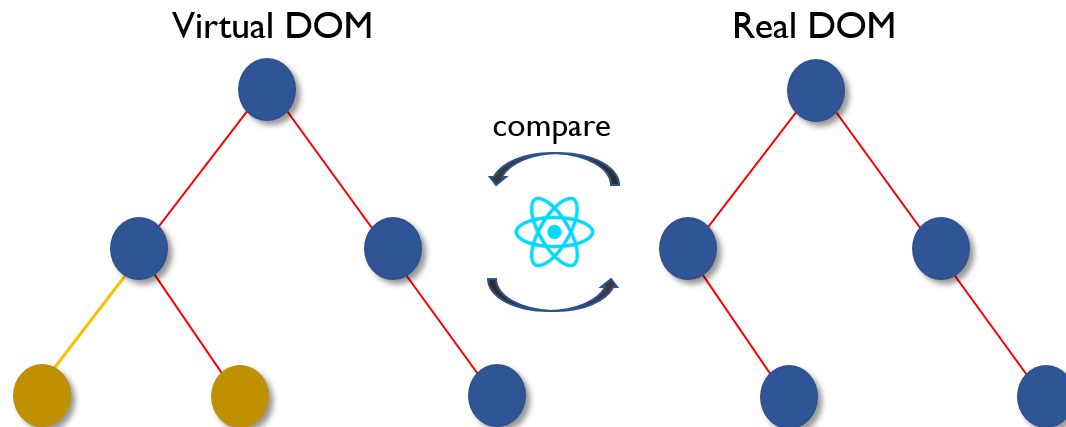

Unidirectional Data Flow in Forms

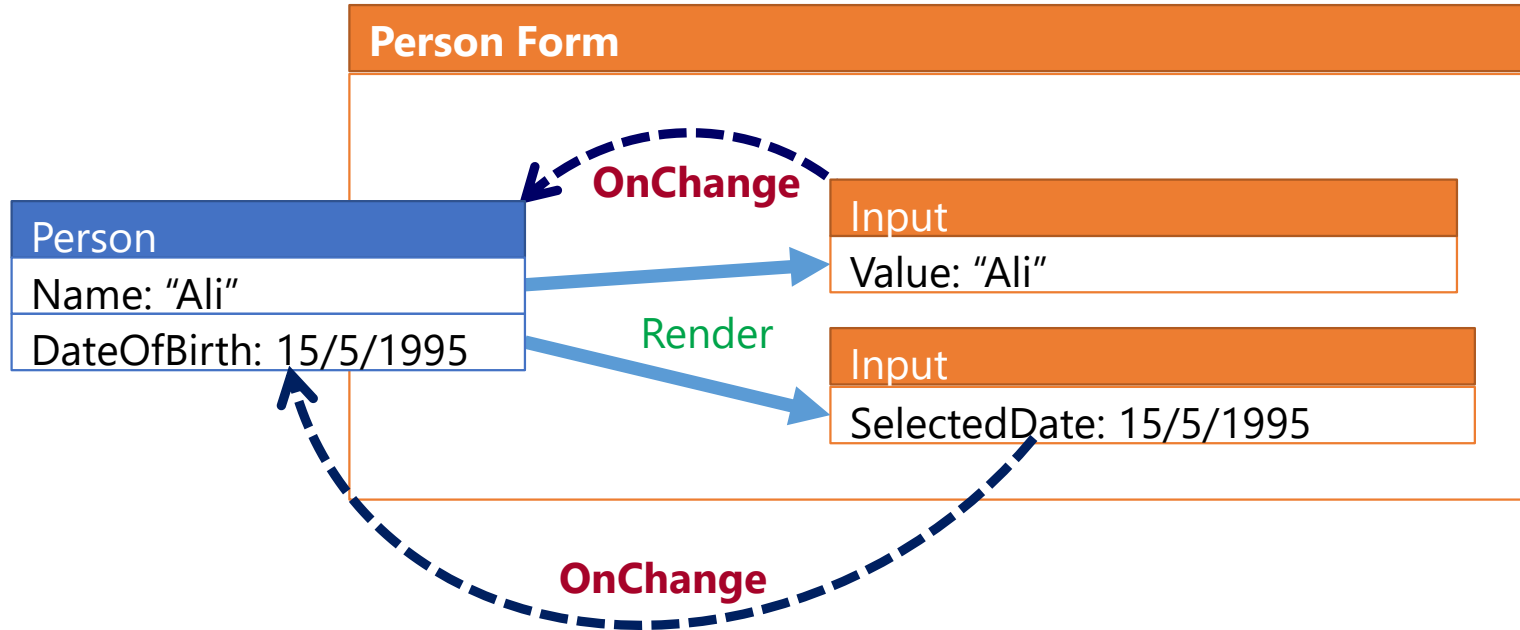

Common Events: `onClick` - `onSubmit` - `onChange`

Forms with React

Form UI

```
<form onSubmit={handleSubmit}>
  <input
    name="email"
    type="email" required
    value={state.user}
    onChange={handleChange} />
  <input
    name="password"
    type="password" required
    value={state.password}
    onChange={handleChange} />
  <input type="submit" />
</form>
```


```
const [state, setState] = useState({ email: "", password: "" });
```

```
const handleChange = e => {
  const name = e.target.name;
  const value = e.target.value;
  //Merge the object before change with the updated property
  setState({ ...state, [name]: value });
};
```

```
const handleSubmit = e => {
  e.preventDefault();
  alert(JSON.stringify(state));
};
```


Form State and Event Handlers

Components Communication

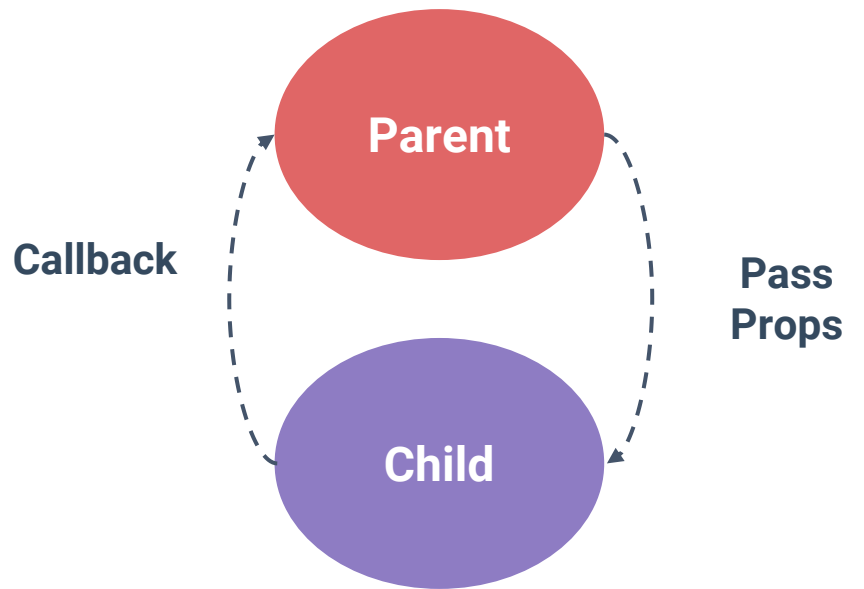


Composing Components

- Components are meant to be used together, most commonly in parent-child relationships
- Parent passes data down to the child via **props**
- The child notify its parent of a **state change via callbacks** (a parent must pass the child a callback as a parameter)

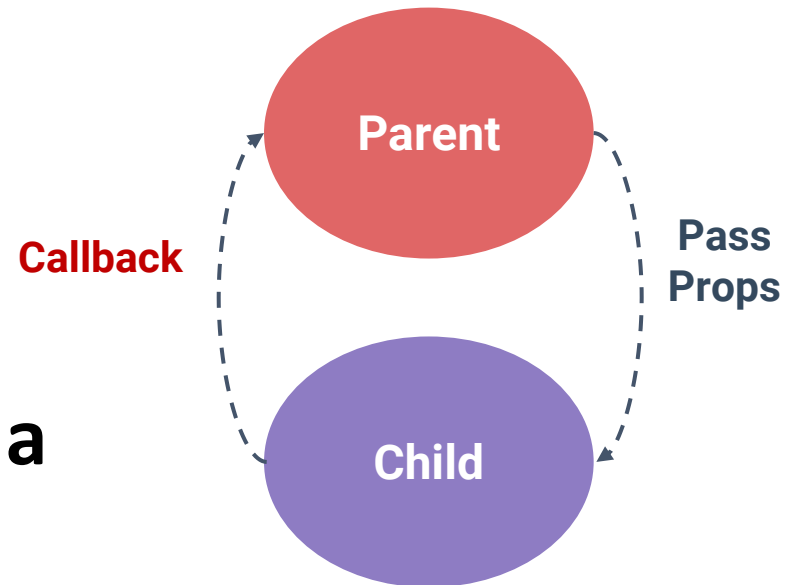

Parent-Child Communication

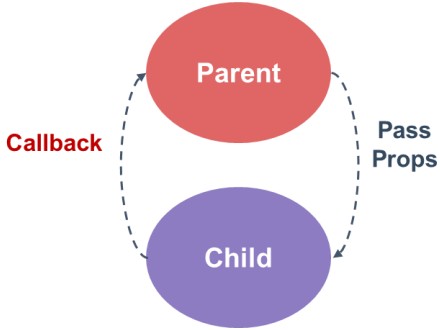

Parent

```
function Main => <Counter startValue={3}  
  onChange={count => console.log(`Count from the child component: ${count}`)}/>
```

Child

```
function Counter(props) {  
  const [count, setCount] = useState(props.startValue);  
  
  const increment = () => {  
    const updatedCount = count + 1;  
    setCount(updatedCount);  
    props.onChange(updatedCount);  
  };  
  
  return <div>  
    Count: {count}  
    <button type="button" onClick={increment}>+</button>  
  </div>  
}
```



React Tools and Component Libraries

- **React Dev Tools**
- **React Components Libraries**

React Dev Tools

- React Dev Tools

<https://chrome.google.com/webstore/detail/react-developer-tools/fmkadmapgofadopljbjfkapdkoienihi?hl=en>

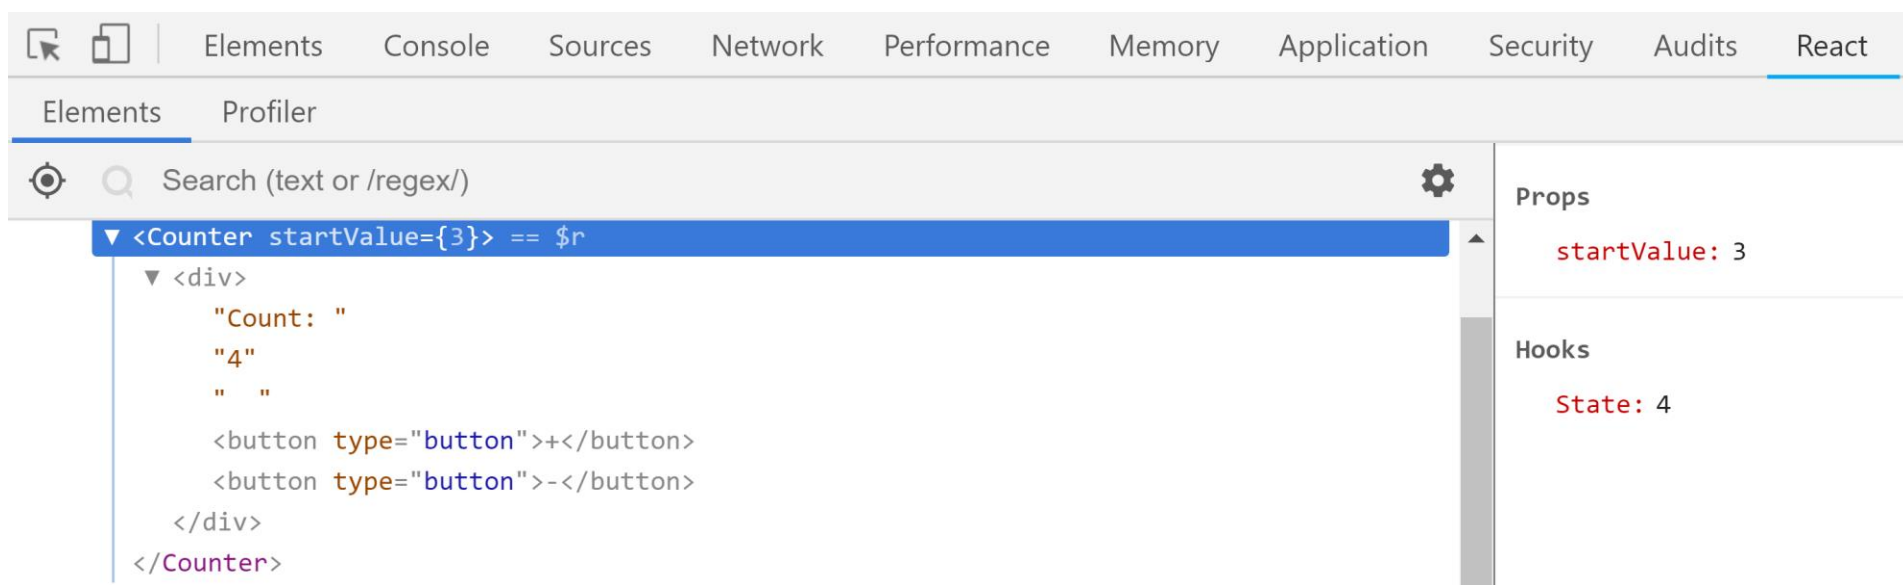

React Component Libraries

- **Shadcn**

<https://ui.shadcn.com/>

- **Material-UI**: React components with Material Design

<https://mui.com/>

Summary

- React = a declarative way to define the UI
- Decompose UI into self-contained and often reusable components
- Why React:
 - Component-based
 - Virtual DOM
 - Declarative
- React uses JSX syntax to define component's UI

Resources

- Thinking in React

<https://reactjs.org/docs/thinking-in-react.html>

- React Router

<https://reactrouter.com/>

- Useful list of resources

<https://github.com/enaqx/awesome-react>