What the proxy takes from a package

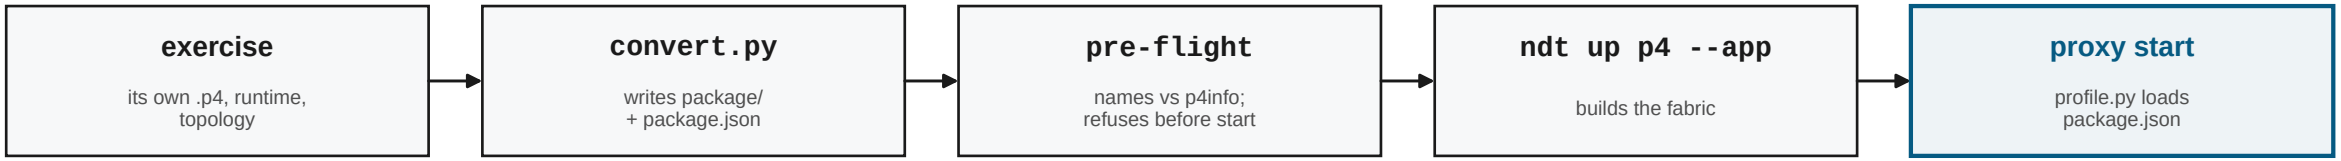

package.json field	acts on it	what it decides
`topology`	fabric · proxy · kernel	how many switches, their names and links, where each host plugs in — one file all three read
`hosts`	fabric	each host's address, MAC and start commands; must match the topology or loading stops
`switches.<N>.pipeline`	proxy	the program pushed to switch N; not NDTwin's own → no LLDP, no BFS routes, heartbeat watchdog
`switches.<N>.entries`	proxy	switch N's start-up entries, written by p4info name; its multicast groups and clone sessions
`control_plane.mode`	proxy	ndtwin: the proxy owns the tables · external: read-only, the exercise's controller writes
`control_plane.election_id`	proxy	which P4Runtime election id the proxy claims mastership with
`roles.ipv4_route`	proxy	the one table NDTwin's route writes go to, and the start-up routes; absent → 501 unsupported
`telemetry.source`	proxy · fabric	samples cloned by the program, or tc sampling on the veths; a program that cannot → refused
`links`	fabric	bandwidth and delay shaping, only where the package declares it

read by the proxy