basic: one packet through the program

READ · p4lang/tutorials c80d83e

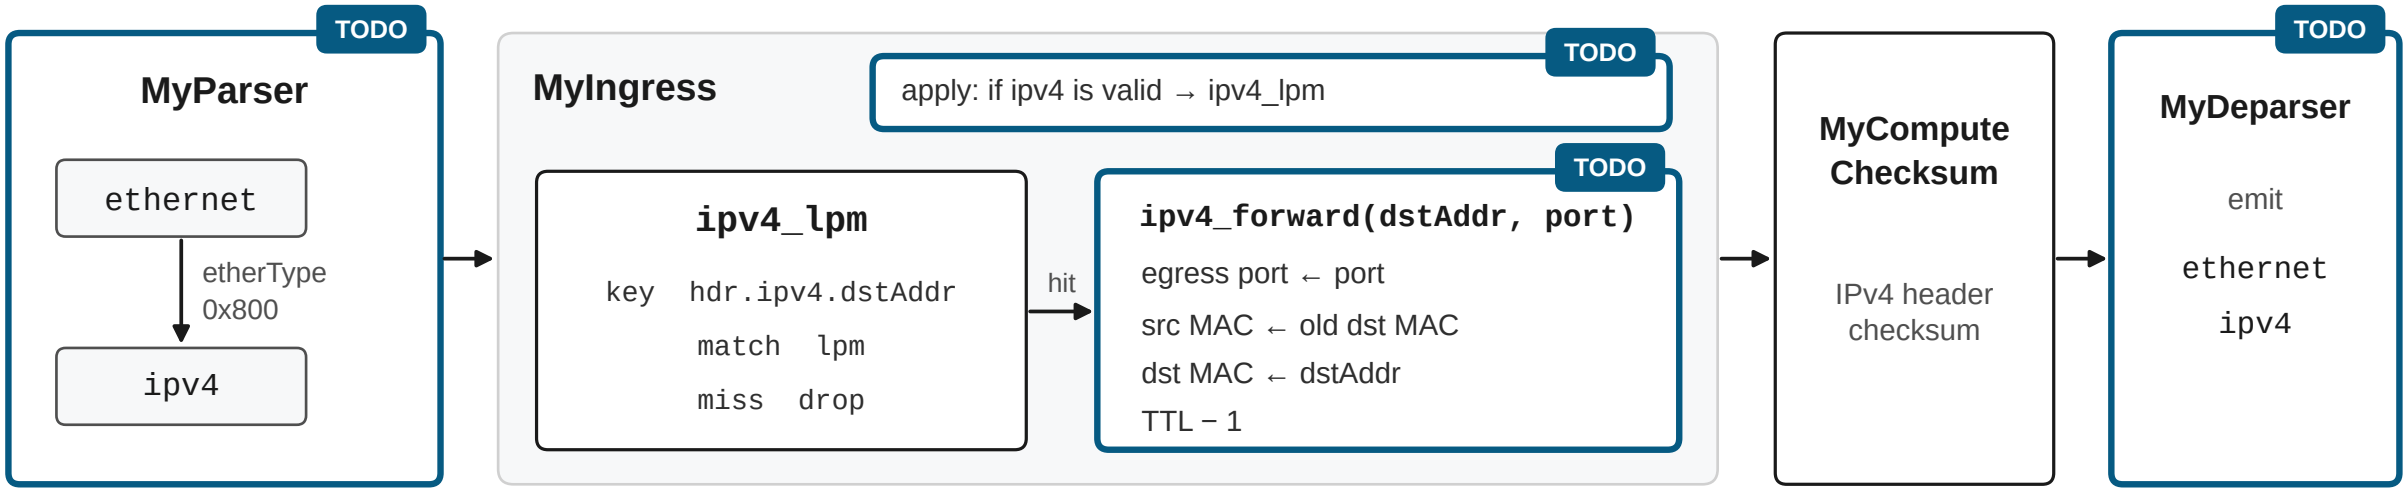

pod-topo/topology.json · h1 → 10.0.3.3

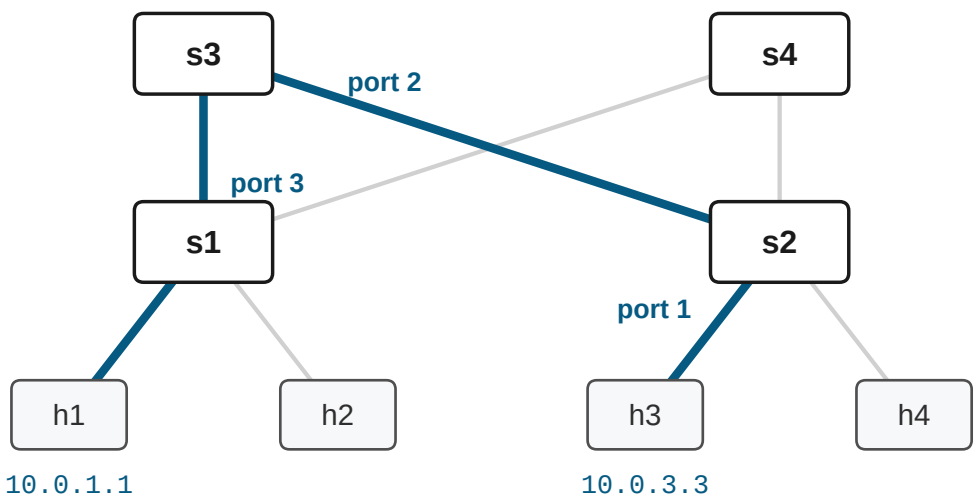

pod-topo/s1-runtime.json · installed at start

hdr.ipv4.dstAddr	action	dstAddr	port
10.0.1.1/32	ipv4_forward	08:00:00:00:01:11	1
10.0.2.2/32	ipv4_forward	08:00:00:00:02:22	2
10.0.3.3/32	ipv4_forward	08:00:00:00:03:00	3
10.0.4.4/32	ipv4_forward	08:00:00:00:04:00	4
default	drop		

TODO you write it: the skeleton leaves a TODO

skeleton: drops every packet