basic_tunnel: its own header, its own table

READ · p4lang/tutorials c80d83e

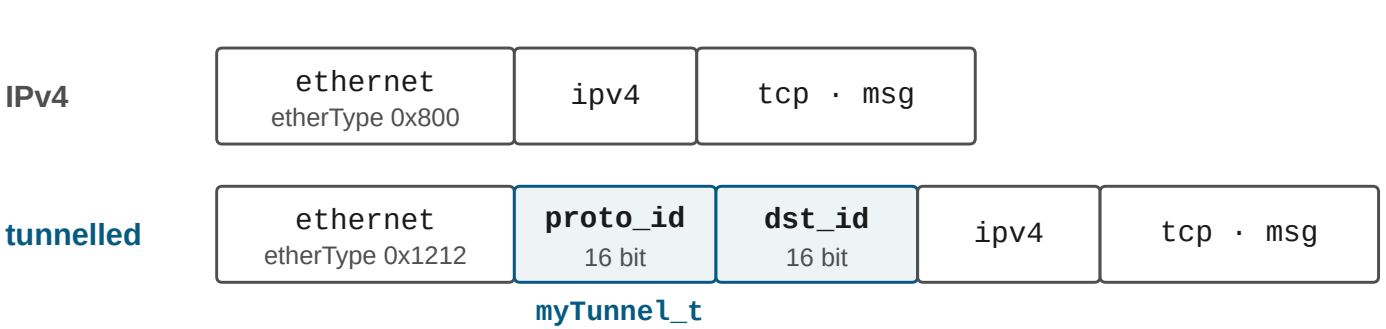

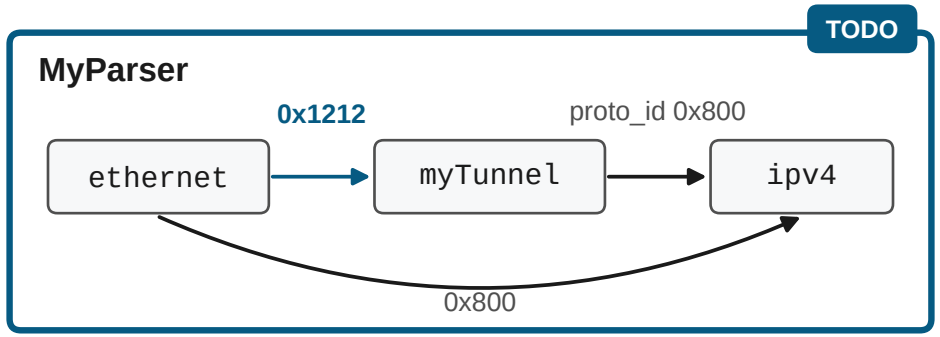

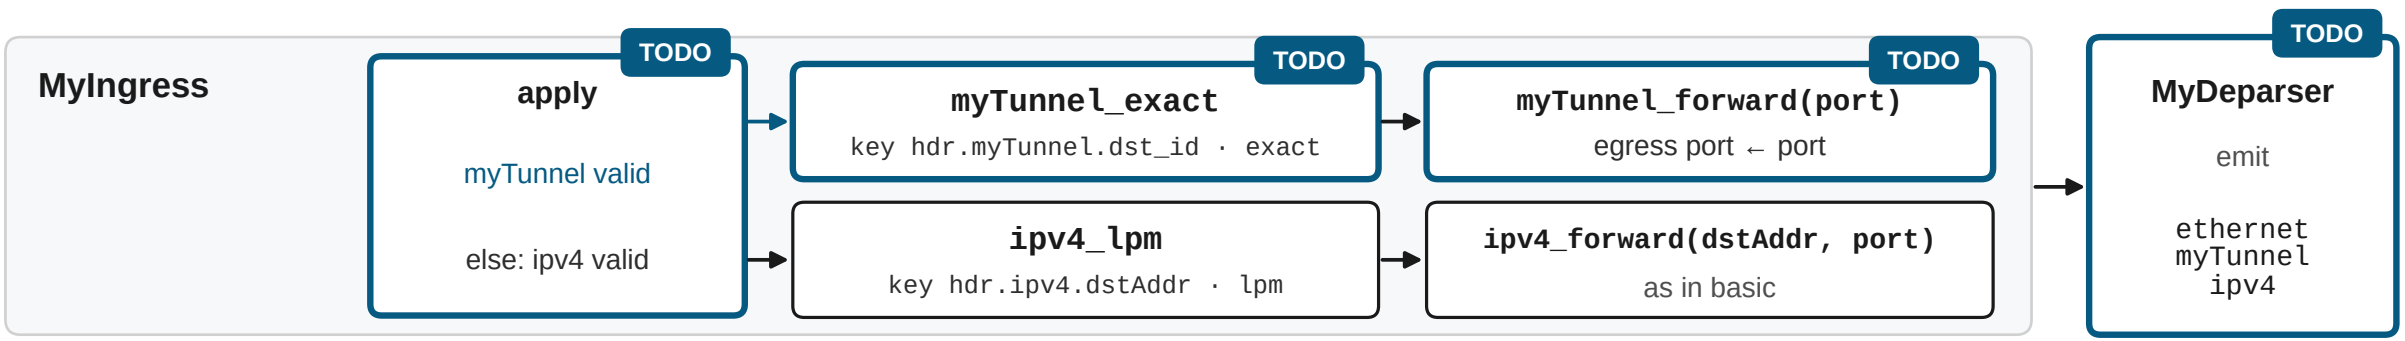

topology.json · h1 sends to 10.0.3.3

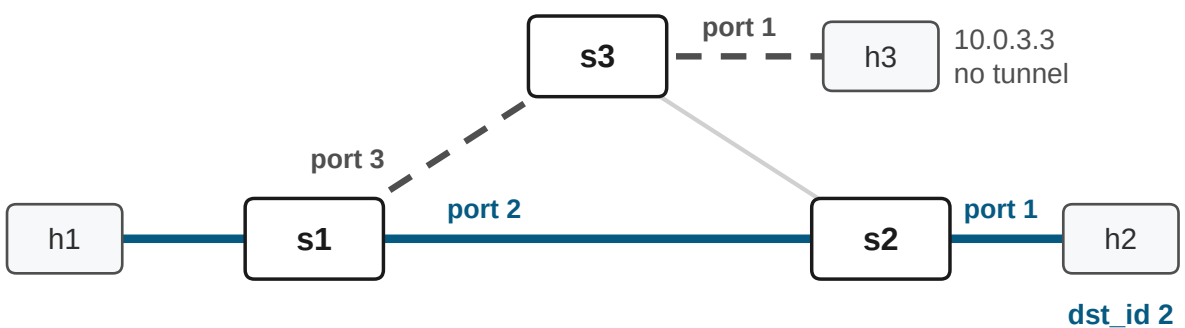

s1-runtime.json · installed at start

myTunnel_exact: dst_id	action	port
1	myTunnel_forward	1
2	myTunnel_forward	2
3	myTunnel_forward	3

+ 3 ipv4_lpm entries

TODO you write it: the skeleton leaves a TODO