



การ Setup VDSL Modem Huawei HG630 Multi_vlan

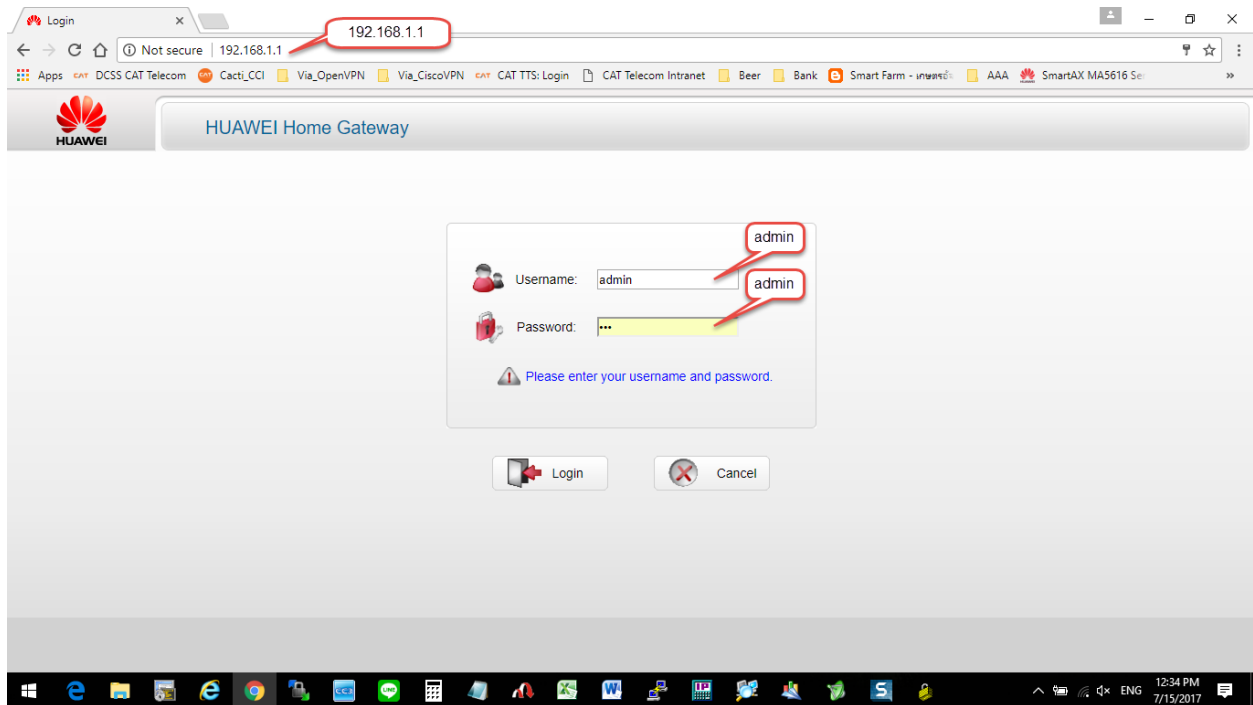

1. Basic → Link Interface → ATM

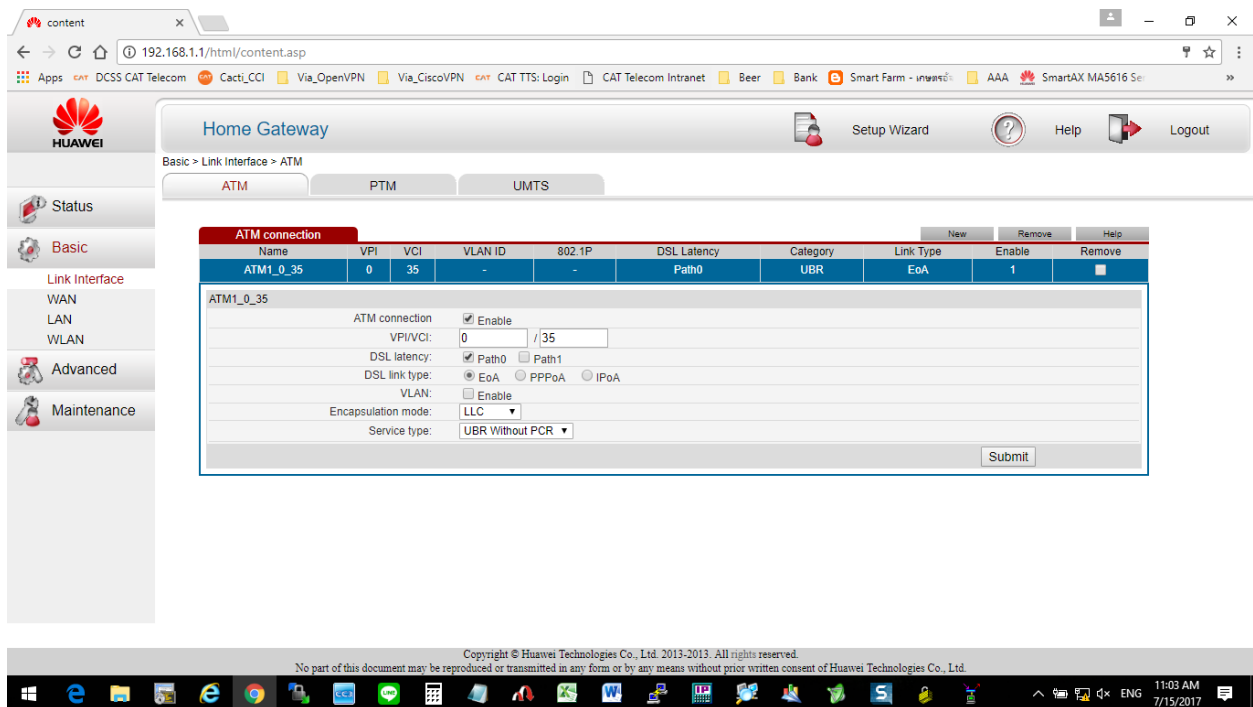

2. ทำการ Remove ATM Connection ออกทั้งหมด (ไม่ใช่หัวข้อ ATM)

Home Gateway

Basic > Link Interface > ATM

ATM

Name	VPI	VCI	VLAN ID	802.1P	DSL Latency	Category	Link Type	Enable	Remove
ATM1_0_35	0	35	-	-	Path0	UBR	EoA	1	<input checked="" type="checkbox"/>

ATM1_0_35

ATM connection: ☒ Enable

VPI/VCI: 0 / 35

DSL latency: ☒ Path0 ☐ Path1

DSL link type: ☒ EoA ☐ PPPoA ☐ IPoA

VLAN: ☐ Enable

Encapsulation mode: LLC

Service type: UBR Without PCR

Submit

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

11:04 AM 7/15/2017

Home Gateway

Basic > Link Interface > ATM

ATM

192.168.1.1 says:
Related IP/PPP connections will also be deleted. Are you sure you delete?

OK Cancel

Name	VPI	VCI	VLAN ID	802.1P	DSL Latency	Category	Link Type	Enable	Remove
ATM1_0_35	0	35	-	-	Path0	UBR	EoA	1	<input checked="" type="checkbox"/>

ATM1_0_35

ATM connection: ☒ Enable

VPI/VCI: 0 / 35

DSL latency: ☒ Path0 ☐ Path1

DSL link type: ☒ EoA ☐ PPPoA ☐ IPoA

VLAN: ☐ Enable

Encapsulation mode: LLC

Service type: UBR Without PCR

Submit

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

11:06 AM 7/15/2017

content 192.168.1.1/html/content.asp

Apps CAT DCSS CAT Telecom Cacti_CCI Via_OpenVPN Via_CiscoVPN CAT TTS: Login CAT Telecom Intranet Beer Bank Smart Farm - unware AAA SmartAX MA5616 Se

HUAWEI Home Gateway Setup Wizard Help Logout

Basic > Link Interface > ATM

ATM PTM UMTS

ATM connection

Name	VPI	VCI	VLAN ID	802.1P	DSL Latency	Category	Link Type	Enable	Remove
Settings ATM connection: <input checked="" type="checkbox"/> Enable VPI/VCI: <input type="text"/> / <input type="text"/> DSL latency: <input checked="" type="checkbox"/> Path0 <input type="checkbox"/> Path1 DSL link type: <input checked="" type="radio"/> EoA <input type="radio"/> PPPoA <input type="radio"/> iPoA VLAN: <input type="checkbox"/> Enable Encapsulation mode: <input type="text"/> LLC Service type: <input type="text"/> UBR Without PCR <input type="button" value="Submit"/>									

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

11:11 AM 7/15/2017

3.Basic→Link Interface→PTM

content 192.168.1.1/html/content.asp

Apps CAT DCSS CAT Telecom Cacti_CCI Via_OpenVPN Via_CiscoVPN CAT TTS: Login CAT Telecom Intranet Beer Bank Smart Farm - unware AAA SmartAX MA5616 Se

HUAWEI Home Gateway Setup Wizard Help Logout

Basic > Link Interface > PTM

ATM PTM UMTS

PTM Connection

Name	DSL Latency	PTM Priority	VLAN ID	802.1P	Remove
PTM2_VID_100	Path0	Normal	100	0	<input type="button" value="Remove"/>

PTM2_VID_100

DSL latency: ☒ Path0 ☐ Path1
 PTM priority: ☒ Normal Priority: ☐ High Priority:
 VLAN: ☒ Enable
 VLAN ID: 100 [1-4094]
 802.1P: 0 [0-7]

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

11:09 AM 7/15/2017

4. ทำการ Remove PTM Connection เดิมออกทั้งหมด พร้อมทั้งกำหนด Connection ขึ้นมาใหม่

The screenshot shows the Huawei Home Gateway web interface. The left sidebar contains navigation links: Status, Basic, Link Interface, WAN, LAN, WLAN, Advanced, and Maintenance. The main content area is titled 'Home Gateway' and shows the 'Basic > Link Interface > PTM' configuration page. The 'PTM' tab is selected. The 'PTM Connection' table lists the following connections:

Name	DSL Latency	PTM Priority	VLAN ID	802.1P	Remove
PTM2_VID_100	Path0	Normal	100	0	<input checked="" type="checkbox"/>

The 'Remove' button is highlighted with a red circle and the number 2. The 'Remove' checkbox for the PTM2_VID_100 connection is highlighted with a red circle and the number 1.

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

The screenshot shows the Huawei Home Gateway web interface. The left sidebar contains navigation links: Status, Basic, Link Interface, WAN, LAN, WLAN, Advanced, and Maintenance. The main content area is titled 'Home Gateway' and shows the 'Basic > Link Interface > PTM' configuration page. The 'PTM' tab is selected. The 'PTM Connection' table lists the following connections:

Name	DSL Latency	PTM Priority	VLAN ID	802.1P	Remove
PTM2_VID_100	Path0	Normal	100	0	<input checked="" type="checkbox"/>

A confirmation dialog box is displayed, asking 'Related IP/PPP connections will also be deleted. Are you sure you want to delete?'. The 'OK' button is highlighted with a red circle and the number 3.

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

content x

192.168.1.1/html/content.asp

Apps DCSS CAT Telecom Cacti_CCI Via_OpenVPN Via_CiscoVPN CAT TTS: Login CAT Telecom Intranet Beer Bank Smart Farm - unware AAA SmartAX MA5616 Se

HUAWEI

Home Gateway

Setup Wizard ? Help Logout

Basic > Link Interface > PTM

ATM PTM UMTS

PTM Connection

Name	DSL Latency	PTM Priority	VLAN ID	802.1P	
					802.1P Remove

Settings

DSL latency: ☒ Path0 ☐ Path1

PTM priority: ☒ Normal Priority: ☐ High Priority:

VLAN: ☐ Enable

Submit

4

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

11:35 AM 7/15/2017

content x

192.168.1.1/html/content.asp

Apps DCSS CAT Telecom Cacti_CCI Via_OpenVPN Via_CiscoVPN CAT TTS: Login CAT Telecom Intranet #SMART POWER EQ: 45 45 45 Beer Bank Smart Farm - unware

HUAWEI

Home Gateway

Setup Wizard ? Help Logout

Basic > Link Interface > PTM

ATM PTM UMTS

PTM Connection

Name	DSL Latency	PTM Priority	VLAN ID	802.1P	
					802.1P Remove

Settings

DSL latency: ☒ Path0 ☐ Path1

PTM priority: ☒ Normal Priority: ☐ High Priority:

VLAN: ☒ Enable

VLAN ID: 33 [1-4094]

802.1P: 0 [0-7]

Submit

5

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

3:49 PM 7/21/2017

content x

192.168.1.1/html/content.asp

Apps CAT DCSS CAT Telecom Cacti_CCI Via_OpenVPN Via_CiscoVPN CAT TTS: Login CAT Telecom Intranet #SMART POWER EQ: 7/21/2017

HUAWEI

Home Gateway

Setup Wizard ? Help Logout

Basic > Link Interface > PTM

ATM PTM UMTS

PTM Connection

Name	DSL Latency	PTM Priority	VLAN ID	802.1P	
PTM1_VID_33	Path0	Normal	33	0	

PTM1_VID_33

DSL latency: ☒ Path0 ☐ Path1

PTM priority: ☒ Normal Priority: ☐ High Priority:

VLAN: ☒ Enable

VLAN ID: 33 [1-4094]

802.1P: 0 [0-7]

Submit

6

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Windows taskbar: 3:51 PM 7/21/2017

content x

192.168.1.1/html/content.asp

Apps CAT DCSS CAT Telecom Cacti_CCI Via_OpenVPN Via_CiscoVPN CAT TTS: Login CAT Telecom Intranet #SMART POWER EQ: 7/21/2017

HUAWEI

Home Gateway

Setup Wizard ? Help Logout

Basic > Link Interface > PTM

ATM PTM UMTS

PTM Connection

Name	DSL Latency	PTM Priority	VLAN ID	802.1P	
PTM1_VID_33	Path0	Normal	33	0	

PTM1_VID_33

DSL latency: ☒ Path0 ☐ Path1

PTM priority: ☒ Normal Priority: ☐ High Priority:

VLAN: ☒ Enable

VLAN ID: 729 [1-4094]

802.1P: 0 [0-7]

Submit

7

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Windows taskbar: 3:52 PM 7/21/2017

content 192.168.1.1/html/content.asp

Apps CAT DCSS CAT Telecom Cacti_CCI Via_OpenVPN Via_CiscoVPN CAT TTS: Login CAT Telecom Intranet SMART POWER EQ. Beer Bank Smart Farm - unware

HUAWEI Home Gateway Setup Wizard Help Logout

Basic > Link Interface > PTM

ATM **PTM** UMTS

PTM Connection						New	Remove	Help
Name	DSL Latency	PTM Priority	VLAN ID	802.1P				
PTM1_VID_33	Path0	Normal	33	0				
PTM2_VID_729	Path0	Normal	729	0				

PTM1_VID_33

DSL latency: ☒ Path0 ☐ Path1

PTM priority: ☒ Normal Priority: ☐ High Priority:

VLAN: ☒ Enable

VLAN ID: 33 [1-4094]

802.1P: 0 [0-7]

Submit

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Windows taskbar: 3:33 PM 7/21/2017

5. Basic→Link Interface→WAN

HUAWEI Home Gateway Setup Wizard Help Logout

Basic > WAN

WAN

WAN Connection						New	Remove	Help
Name	Connection Type	Connection Status	IP Type	Enable				
INTERNET_R_USB	IP_Routed (PPP)	Disconnected		Enable				

INTERNET_R_USB

WAN connection: ☒ Enable

Service list: ☒ INTERNET ☐ TR069

Bind list: ☐ LAN1 ☐ LAN2 ☐ LAN3 ☐ LAN4
☐ SSID1 ☐ SSID2 ☐ SSID3 ☐ SSID4

Connection type: IP_Routed (PPP)

IP type: IPv4

NAT: NAT

Authentication mode: Auto

Connection trigger: AlwaysOn

User name: admin

Password: *****

APN: 1234

Dial number: *99#

Tunnel Type: None

MRU: Auto Size: 1492

MSS: Auto Size: 1452

Submit

192.168.1.1/html/ntwll/wan.asp#

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

6. ทำการ Remove ค่า WAN Connection เดิมออกให้หมด พร้อมทั้งสร้าง Connection ขึ้นมาใหม่

Home Gateway

Basic > WAN

WAN Connection

Name	Connection Type	Connection Status	IP Type	Enable	Remove
INTERNET_R_USB	IP_Routed (PPP)	Disconnected		Enable	<input checked="" type="checkbox"/>

INTERNET_R_USB

WAN connection: ☒ Enable

Service list: ☒ INTERNET ☐ TR069

Bind list: ☐ LAN1 ☐ LAN2 ☐ LAN3 ☐ LAN4 ☐ SSID1 ☐ SSID2 ☐ SSID3 ☐ SSID4

Connection type: IP_Routed (PPP)

IP type: IPv4

NAT: NAPT

Authentication mode: Auto

Connection trigger: AlwaysOn

User name:

Password:

APN: 1234

Dial number: *99#

Tunnel Type: None

MRU: Auto Size: 1492

MSS: Auto Size: 1452

Submit

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Home Gateway

Basic > WAN

WAN Connection

Name	Connection Type	Connection Status	IP Type	Enable	Remove
INTERNET_R_USB	IP_Routed (PPP)	Disconnected		Enable	<input checked="" type="checkbox"/>

INTERNET_R_USB

WAN connection: ☒ Enable

Service list: ☒ INTERNET ☐ TR069

Bind list: ☐ LAN1 ☐ LAN2 ☐ LAN3 ☐ LAN4 ☐ SSID1 ☐ SSID2 ☐ SSID3 ☐ SSID4

Connection type: IP_Routed (PPP)

IP type: IPv4

NAT: NAPT

Authentication mode: Auto

Connection trigger: AlwaysOn

User name:

Password:

APN: 1234

Dial number: *99#

Tunnel Type: None

MRU: Auto Size: 1492

MSS: Auto Size: 1452

Submit

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

192.168.1.1 says:
The rules (such as NAT, IGMP, Route) relating to this WAN connection will be removed, do you want to continue?

OK Cancel

7. กำหนดค่า New Wan setting

7.1 เลือก vlan ใช้งาน vlan ที่ 1 และเลือก Port lan เพื่อใช้งาน

- Connection Device : PTM1_VID_33 --->เลือก vlan ที่ 1

- Wan Connection : Enable

- Service list Internet : เลือก

- Bind list : เลือก Port Lan ที่ต้องการใช้งาน->ตามตัวอย่างจะใช้เฉพาะ Lan1 และ Lan2

: เลือกกำหนด SSID

-Connection type : กรณี set เป็นแบบ pppoe เลือก → IP_Routed (PPP)

กรณีบริการแบบ AAA แล้ว set เป็น Mode Router เลือก →IP Routed (IP)

กรณี set เป็น Bridge งบประมาณ pppoe และ AAA เลือก → Bridge

Home Gateway

Basic > WAN

WAN

WAN Connection

Name	Connection Type	Connection Status	IP Type	Enable	Remove
Settings					

Connection device: PTM1_VID_33

WAN connection: ☒ Enable

Service list: ☒ INTERNET ☒ TR069

Bind list: ☒ LAN1 ☒ LAN2 ☐ LAN3 ☐ LAN4 ☒ SSID1 ☐ SSID2 ☐ SSID3 ☐ SSID4

Connection type: IP_Routed (PPP)

IP type: IPv4

NAT: NAT

Authentication mode: Auto

Connection trigger: AlwaysOn

User name: xxx

Password: ***

Tunnel Type: 6to4


Tunnel endpoint:

MRU: Auto Size: 1492

MSS: Auto Size: 1452

Submit

Copyright © Huawei Technologies Co., Ltd. 2013-2015. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

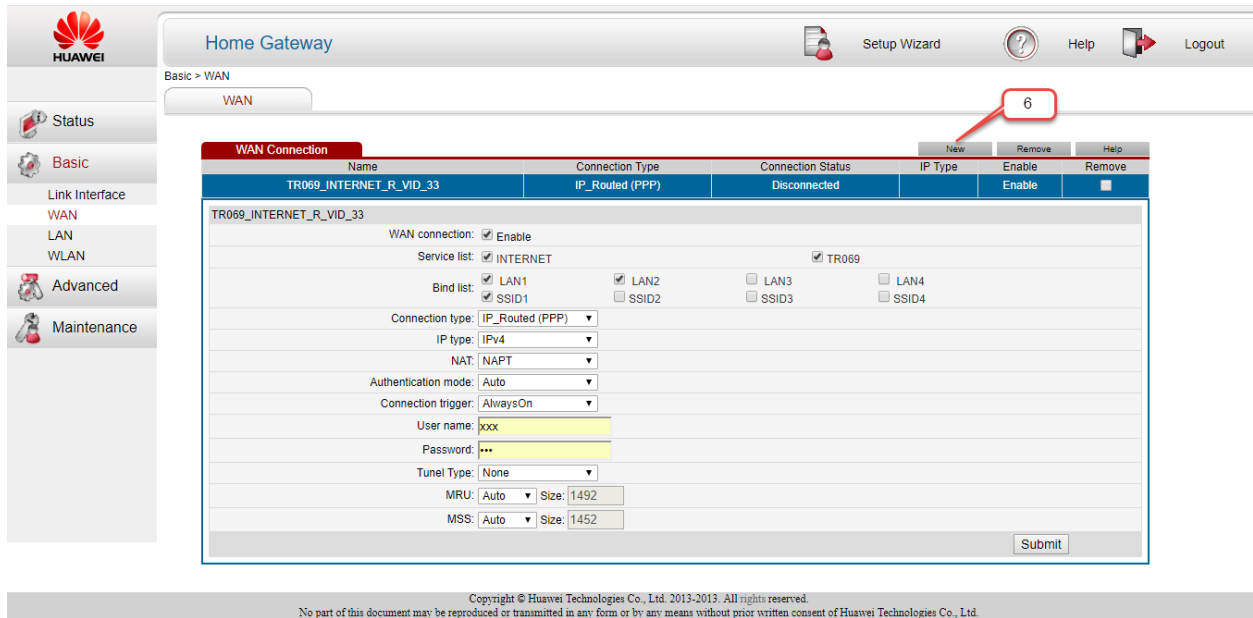

7.2 เลือก vlan ใช้งาน vlan ที่ 2 และเลือก Port lan เพื่อใช้งาน

- Connection Device : PTM1_VID_729 --->เลือก vlan ที่ 2
- Wan Connection : Enable
- Service list Internet : เลือก
- Bind list : เลือก Port Lan ที่ต้องการใช้งาน->ตามตัวอย่างจะใช้เฉพาะ Lan3 และ Lan4
- Connection type : กรณี set เป็นแบบ pppoe เลือก → IP_Routed (PPP)

กรณีบริการแบบ AAA แล้ว set เป็น Mode Router เลือก → IP Routed (IP)

กรณี set เป็น Bridge งบประมาณ pppoe และ AAA เลือก → Bridge

content x

Not secure | 192.168.1.1/html/content.asp

Apps CAT DCSS CAT Telecom Cacti_CCI Via_OpenVPN Via_CiscoVPN CAT TTS: Login CAT Telecom Intranet SMART POWER EQ: 7/21/2017

HUAWEI

Home Gateway

Setup Wizard Help Logout

Basic > WAN

WAN

WAN Connection

Name	Connection Type	Connection Status	IP Type	Enable	Remove
TR069_INTERNET_R_VID_33	IP_Routed (PPP)	Disconnected	---	Enable	<input type="checkbox"/>

Settings

Connection device: PTM2_VID_729

WAN connection: ☒ Enable

Service list: ☒ INTERNET ☐ TR069

Bind list: ☐ LAN1 ☐ LAN2 ☒ LAN3 ☒ LAN4
☐ SSID1 ☐ SSID2 ☐ SSID3 ☐ SSID4

Connection type: Bridged

Submit

7

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Windows taskbar: 4:10 PM 7/21/2017

content x

Not secure | 192.168.1.1/html/content.asp

Apps CAT DCSS CAT Telecom Cacti_CCI Via_OpenVPN Via_CiscoVPN CAT TTS: Login CAT Telecom Intranet SMART POWER EQ: 7/21/2017

HUAWEI

Home Gateway

Setup Wizard Help Logout

Basic > WAN

WAN

WAN Connection

Name	Connection Type	Connection Status	IP Type	Enable	Remove
INTERNET_B_VID_729	Bridged	Disconnected	---	Enable	<input type="checkbox"/>
TR069_INTERNET_R_VID_33	IP_Routed (PPP)	Disconnected	---	Enable	<input type="checkbox"/>

INTERNET_B_VID_729

WAN connection: ☒ Enable

Service list: ☒ INTERNET ☐ TR069

Bind list: ☐ LAN1 ☐ LAN2 ☒ LAN3 ☒ LAN4
☐ SSID1 ☐ SSID2 ☐ SSID3 ☐ SSID4

Connection type: Bridged

Submit

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Windows taskbar: 4:12 PM 7/21/2017

8. Basic → Link Interface → Lan เพื่อกำหนดค่า Lan

The screenshot shows the Huawei Home Gateway web interface. The left sidebar contains navigation options: Status, Basic, Link Interface (with sub-options WAN, LAN, and WLAN), Advanced, and Maintenance. The main content area is titled 'Home Gateway' and shows the configuration path 'Basic > LAN > DHCPv4 Server'. There are three tabs: 'DHCPv4 Server' (selected), 'DHCPv6 Server', and 'SLAAC'.

LAN Host Settings

IP address:	192.168.1.1
Subnet mask:	255.255.255.0

Submit

DHCP Server

DHCP server:	<input checked="" type="checkbox"/> Enable
Start IP address:	192.168.1.2
End IP address:	192.168.1.254
Lease duration:	<input type="checkbox"/> Permanent lease
	1 day(s) 0 hour(s) 0 minute(s) 0 second(s)
Primary DNS server address:	
Secondary DNS server address:	

Submit

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

9. Basic → Link Interface → WLAN เพื่อกำหนดค่า Wireless

The screenshot shows the Huawei Home Gateway web interface. The left sidebar contains navigation options: Status, Basic, Link Interface (with sub-options WAN, LAN, and WLAN), Advanced, and Maintenance. The main content area is titled 'Home Gateway' and shows the configuration path 'Basic > WLAN > WLAN'. There are three tabs: 'WLAN', 'WLAN Filtering' (selected), and 'WLAN WDS'.


☒ Enable WLAN

Wireless Settings

Mode:	802.11b/g/n
Region Code:	UNITED STATES
Channel:	Auto
Band Width:	20/40
Guard Interval:	long
Transmit power:	100%
SSID Index:	SSID1
SSID:	HG630-GK7BKC
Maximum Number of Accessing Devices:	16
Enable SSID:	<input checked="" type="checkbox"/> Enable
Hide Broadcast:	<input type="checkbox"/> Enable
Enable WMM:	<input checked="" type="checkbox"/> Enable
Security Mode:	WPA-PSK/WPA2-PSK
WPA Pre-Shared Key:	*****
WPA Encryption:	AES
Enable WPS:	<input checked="" type="checkbox"/> Enable
WPS Mode:	PBC


Submit


Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

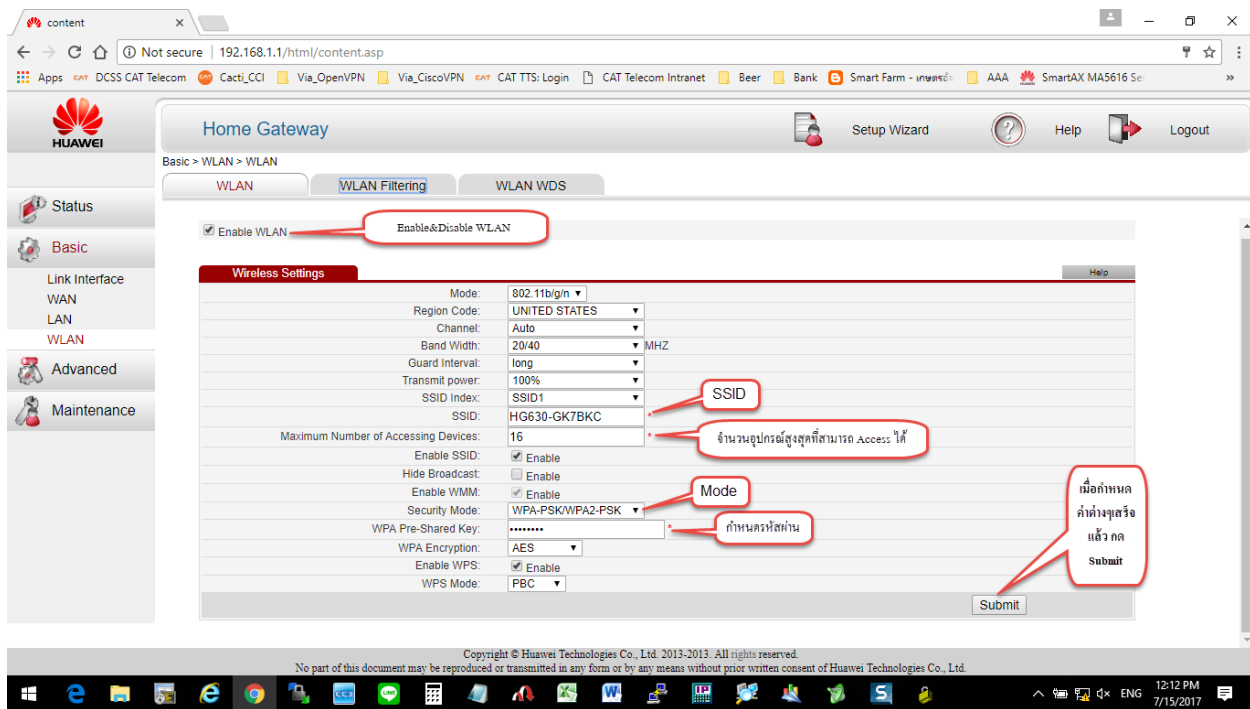




10. Advanced→ ACL เพื่อกำหนดให้สามารถ Remote Management ผ่านทาง WAN ได้

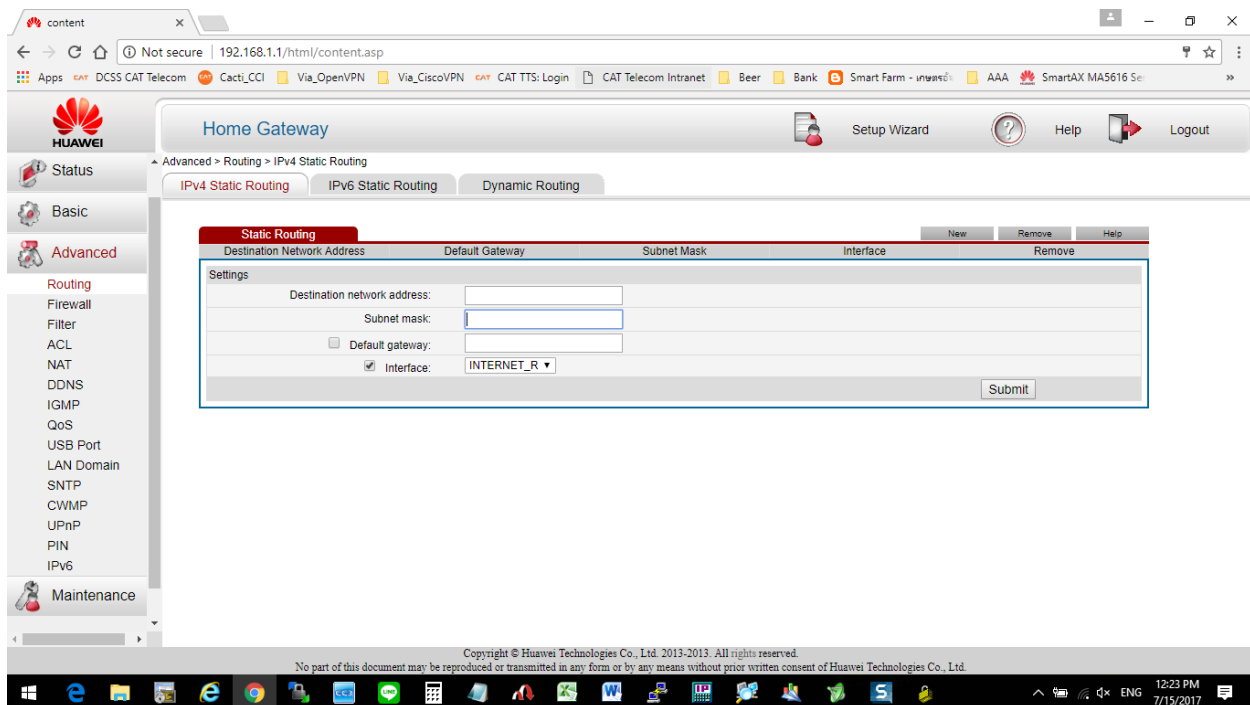(กำหนดร่วมกับหัวข้อ Advaned→CWMP)





Home Gateway

 Setup Wizard  Help  Logout

Advanced > ACL

ACL

StatusBasicAdvancedRoutingFirewallFilterACLNATDDNSIGMPQoSUSB PortLAN DomainSNTPCWMPUPnPPIPv6Maintenance

ACL

NewRemoveHelp

Service Type	Access Direction	Start IP Address	End IP Address	Operation	Remove
HTTP	LAN	any	any	ACCEPT	<input checked="" type="checkbox"/>
ICMP	LAN	any	any	ACCEPT	<input type="checkbox"/>
IPP	LAN	any	any	ACCEPT	<input type="checkbox"/>

Settings

Service type: HTTP


Access direction: LAN

Start IP address:




End IP address:

Submit

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.



Home Gateway

 Setup Wizard  Help  Logout

Advanced > ACL

ACL

StatusBasicAdvancedRoutingFirewallFilterACLNATDDNSIGMPQoSUSB PortLAN DomainSNTPCWMPUPnPPIPv6Maintenance

ACL

NewRemoveHelp

Service Type	Access Direction	Start IP Address	End IP Address	Operation	Remove
HTTP	LAN	any	any	ACCEPT	<input type="checkbox"/>
ICMP	LAN	any	any	ACCEPT	<input type="checkbox"/>
IPP	LAN	any	any	ACCEPT	<input type="checkbox"/>
---	---	---	---	---	---

Settings

Service type: HTTPS


Access direction: WAN

Start IP address:

End IP address:

Submit

Copyright © Huawei Technologies Co., Ltd. 2013-2013. All rights reserved.
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

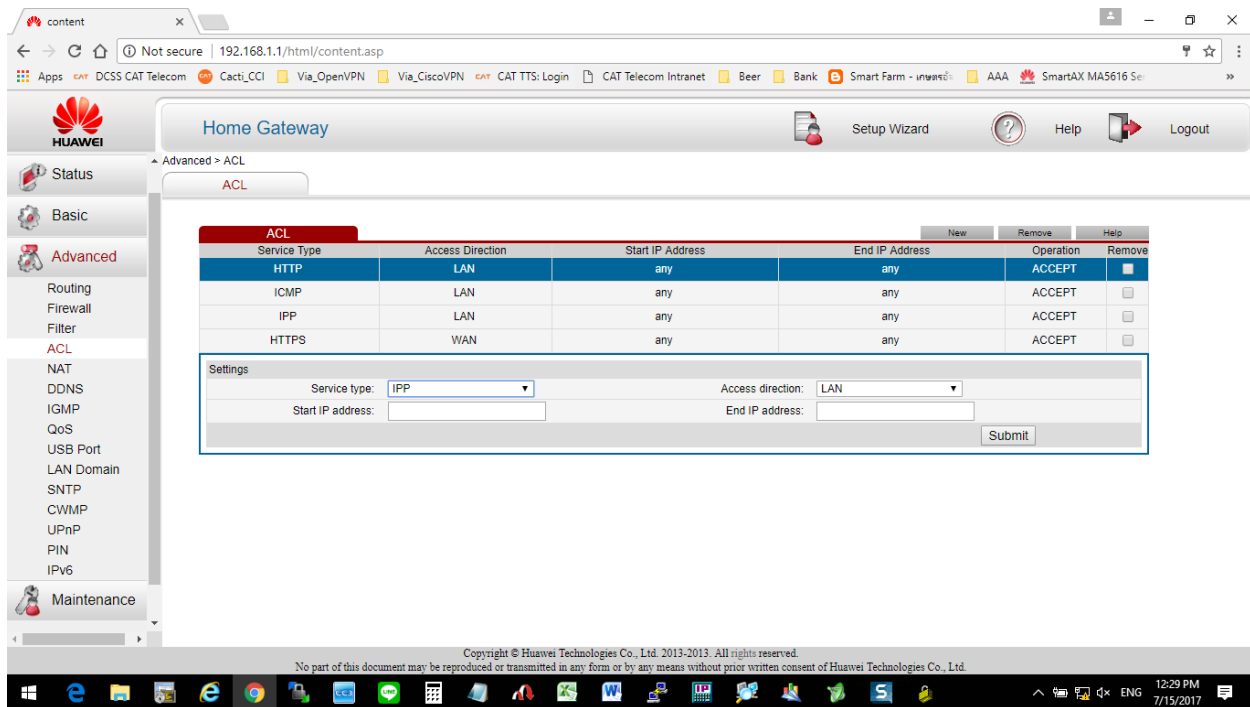

11. Advanced→ CWMP เพื่อกำหนดให้สามารถ Remote Management ผ่านทาง WAN ได้

(กำหนดร่วมกับหัวข้อ Advaned→ACL)

