




normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 0-5 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

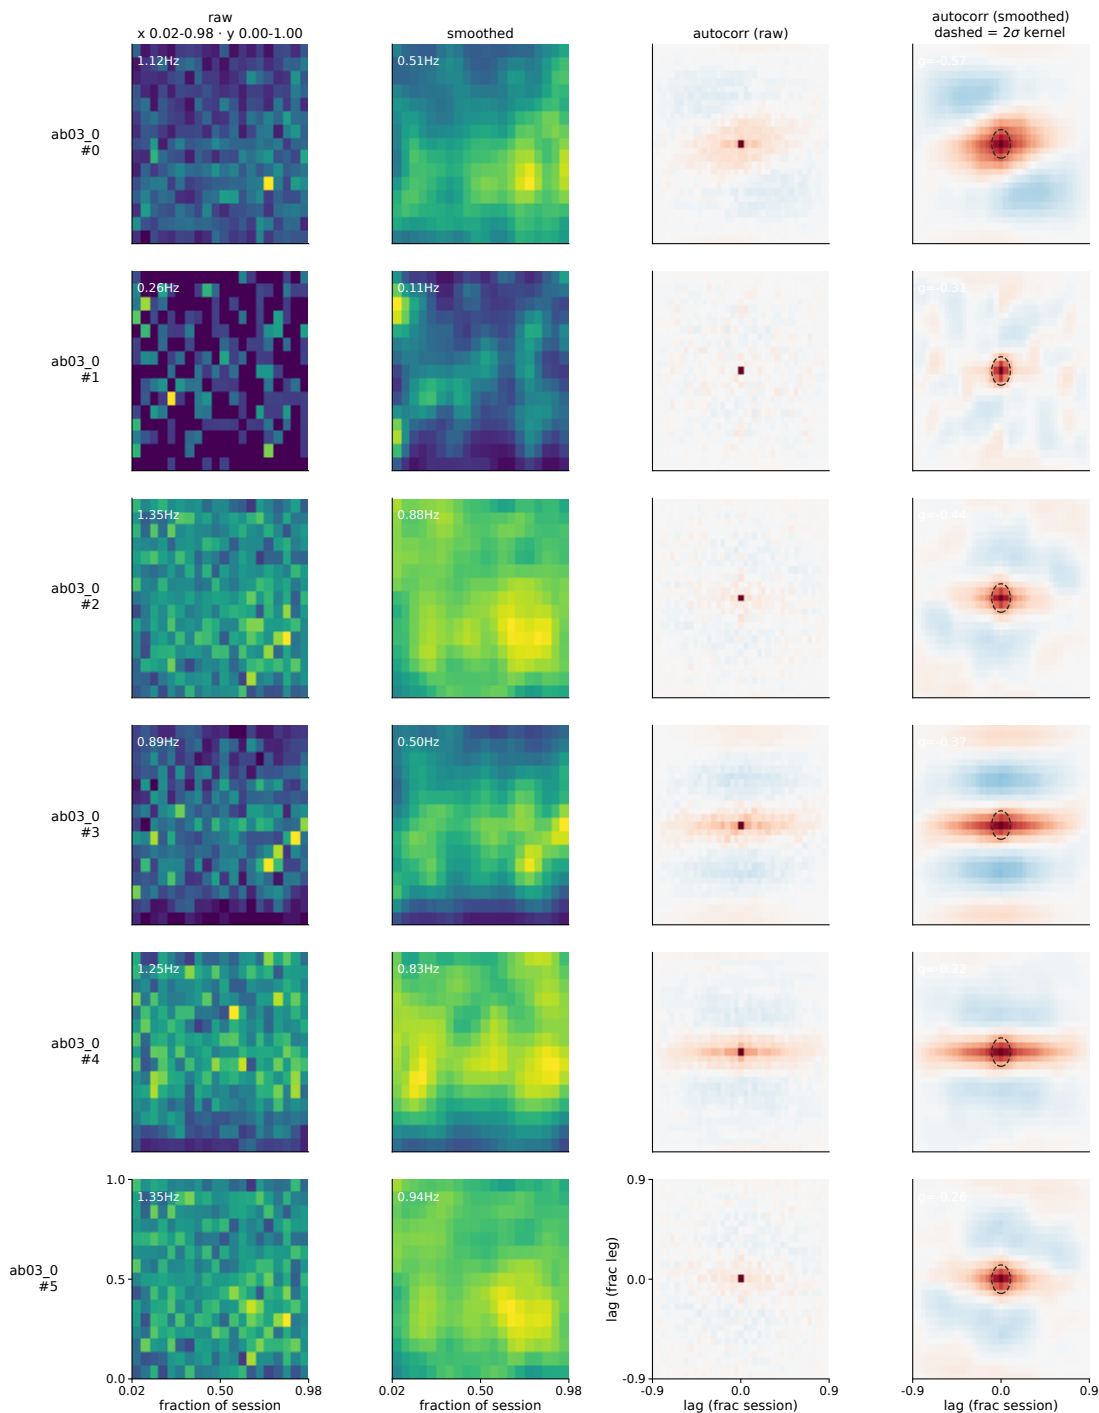


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 6-11 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

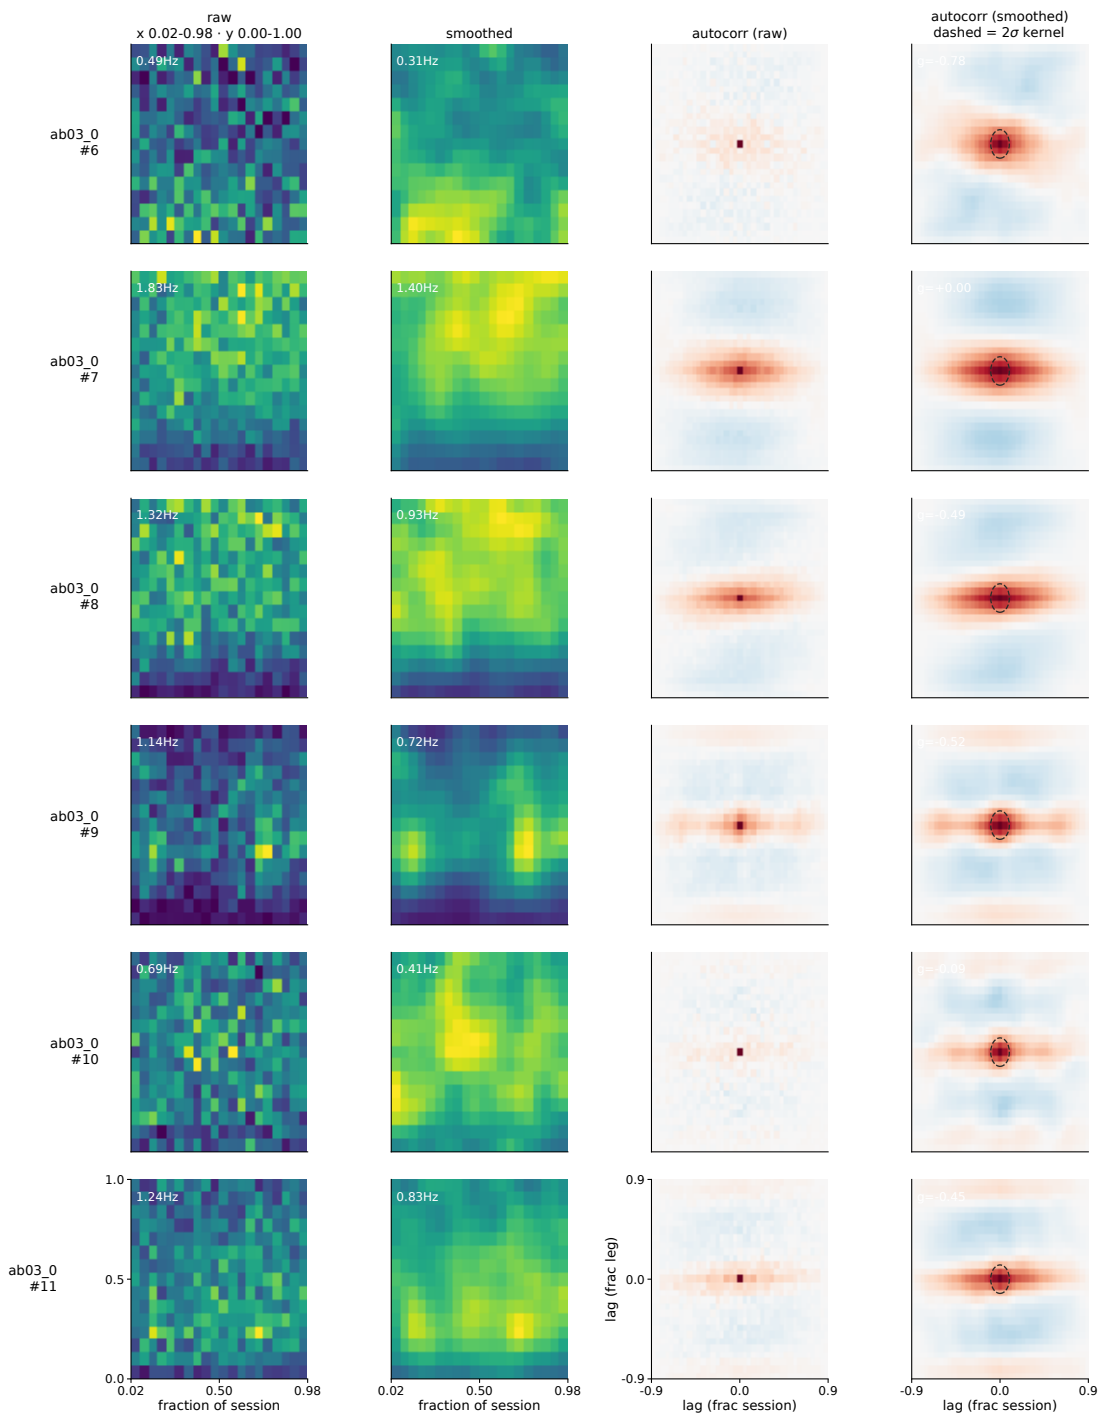


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 12-17 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

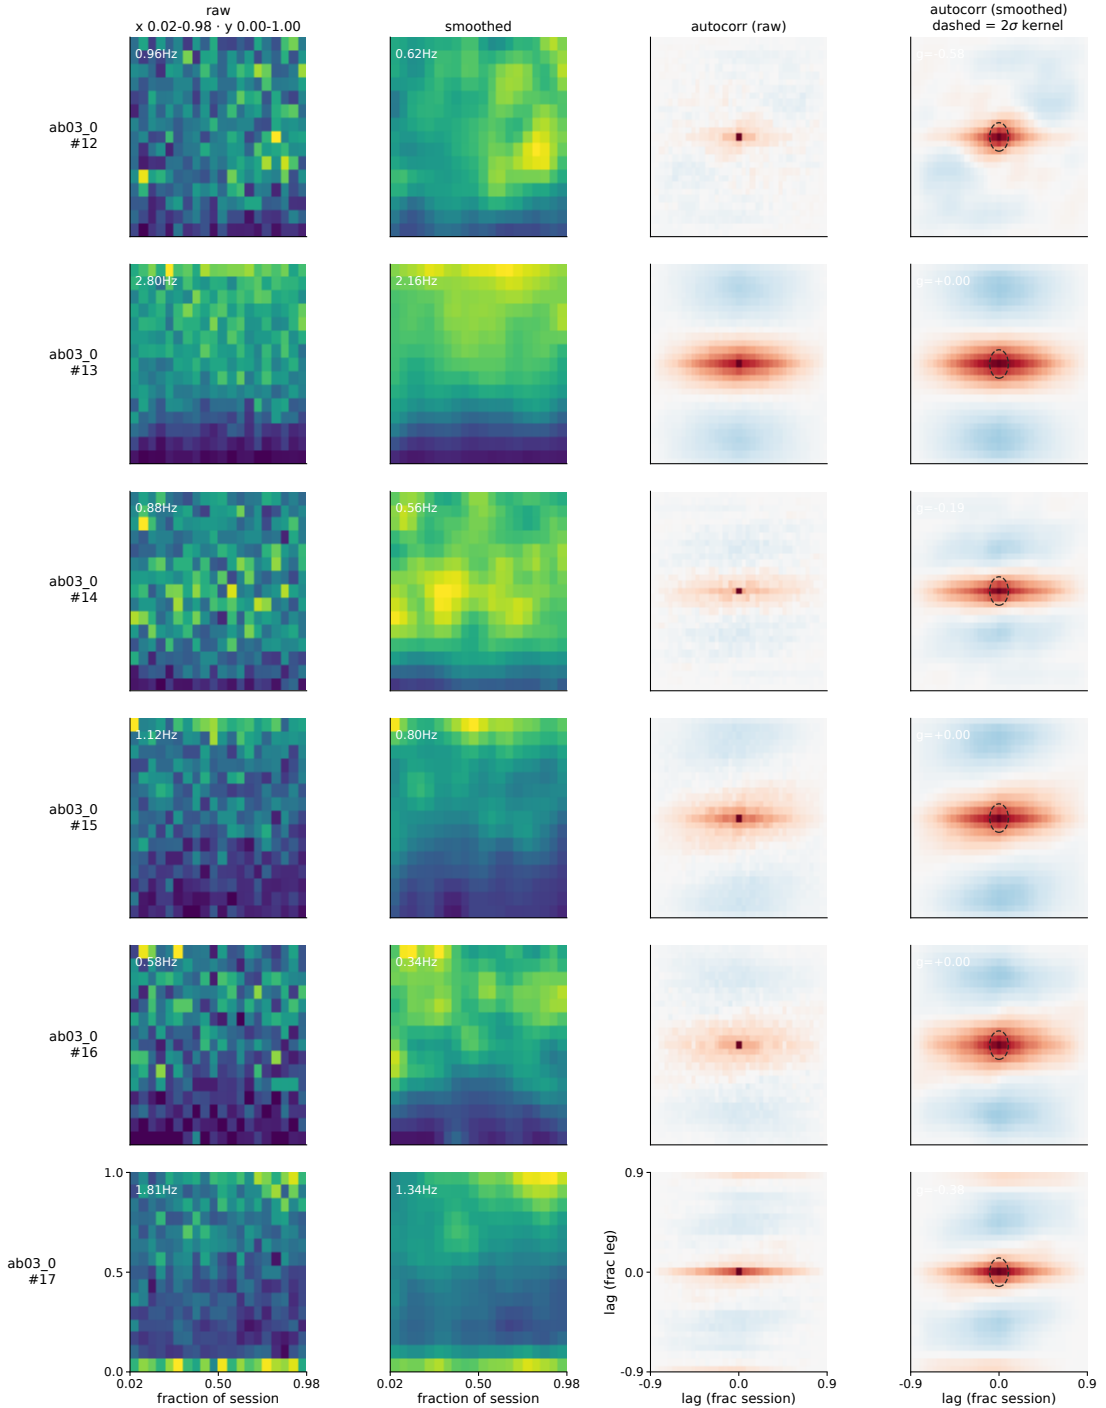


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 18-23 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

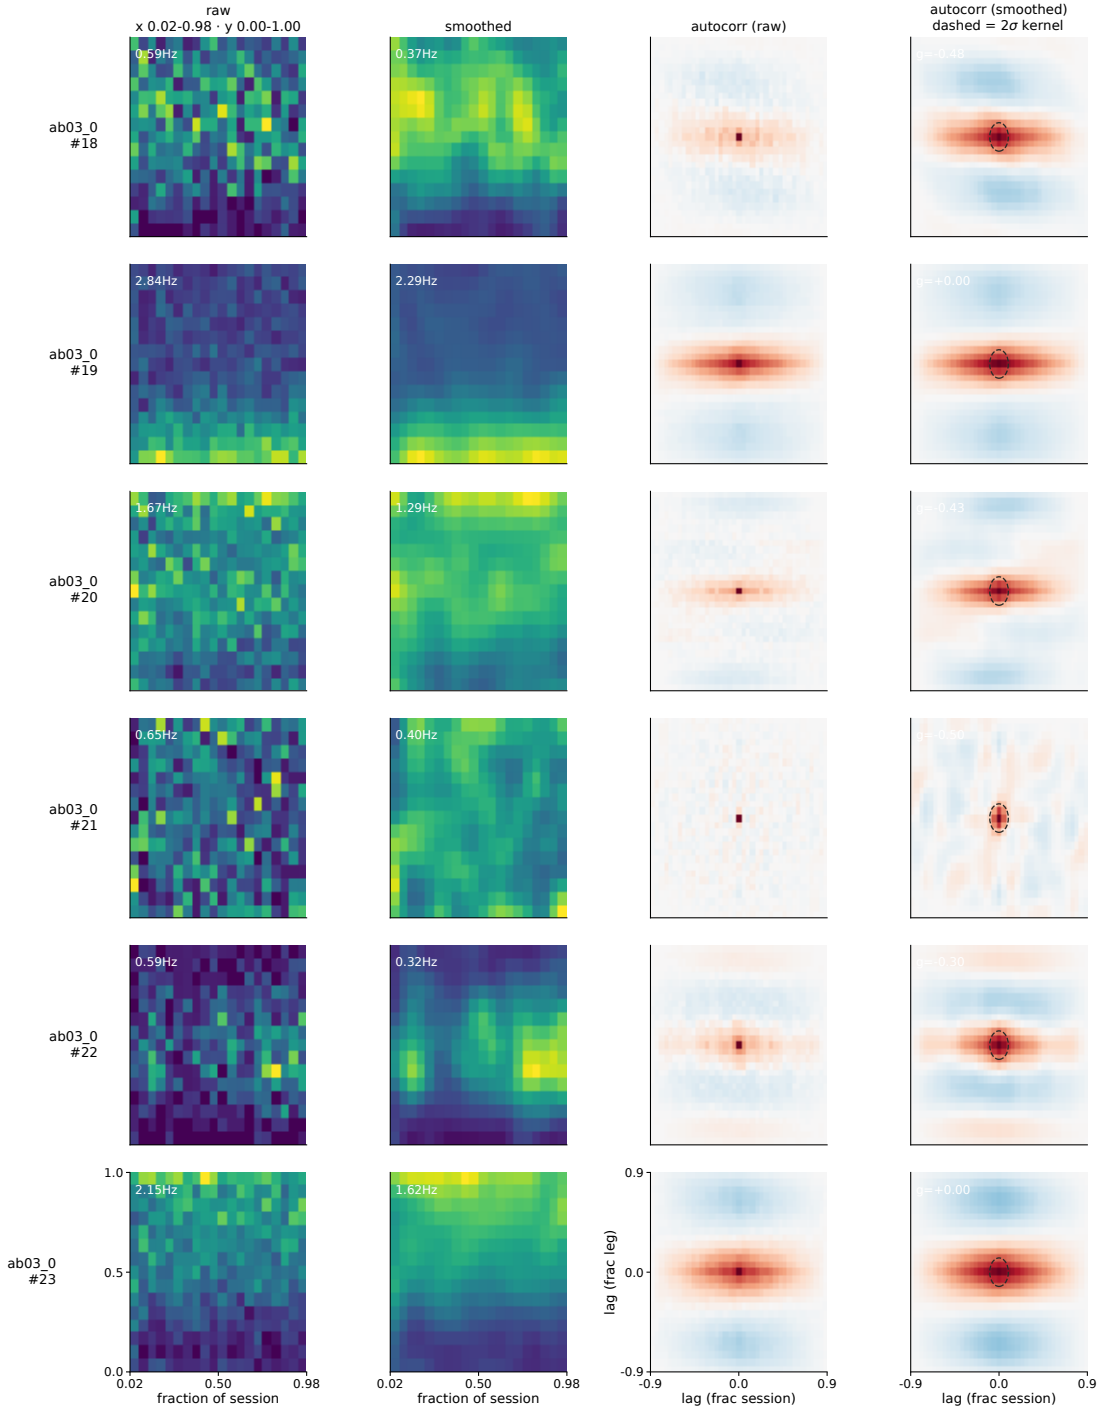


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 24-29 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

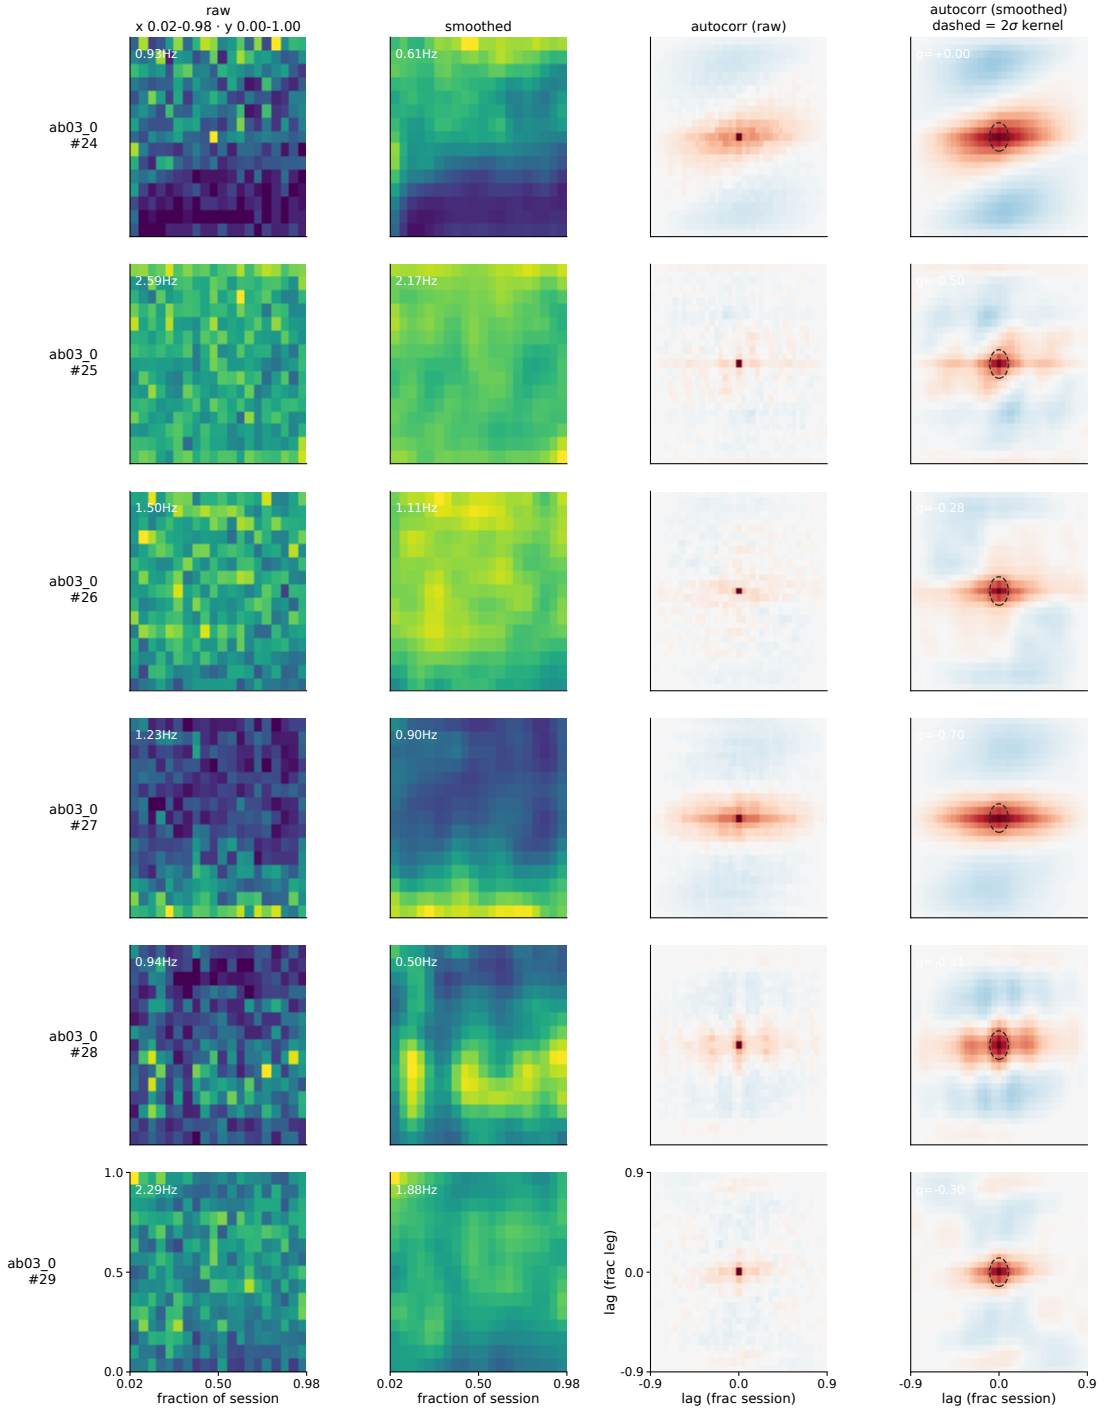


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 30-35 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

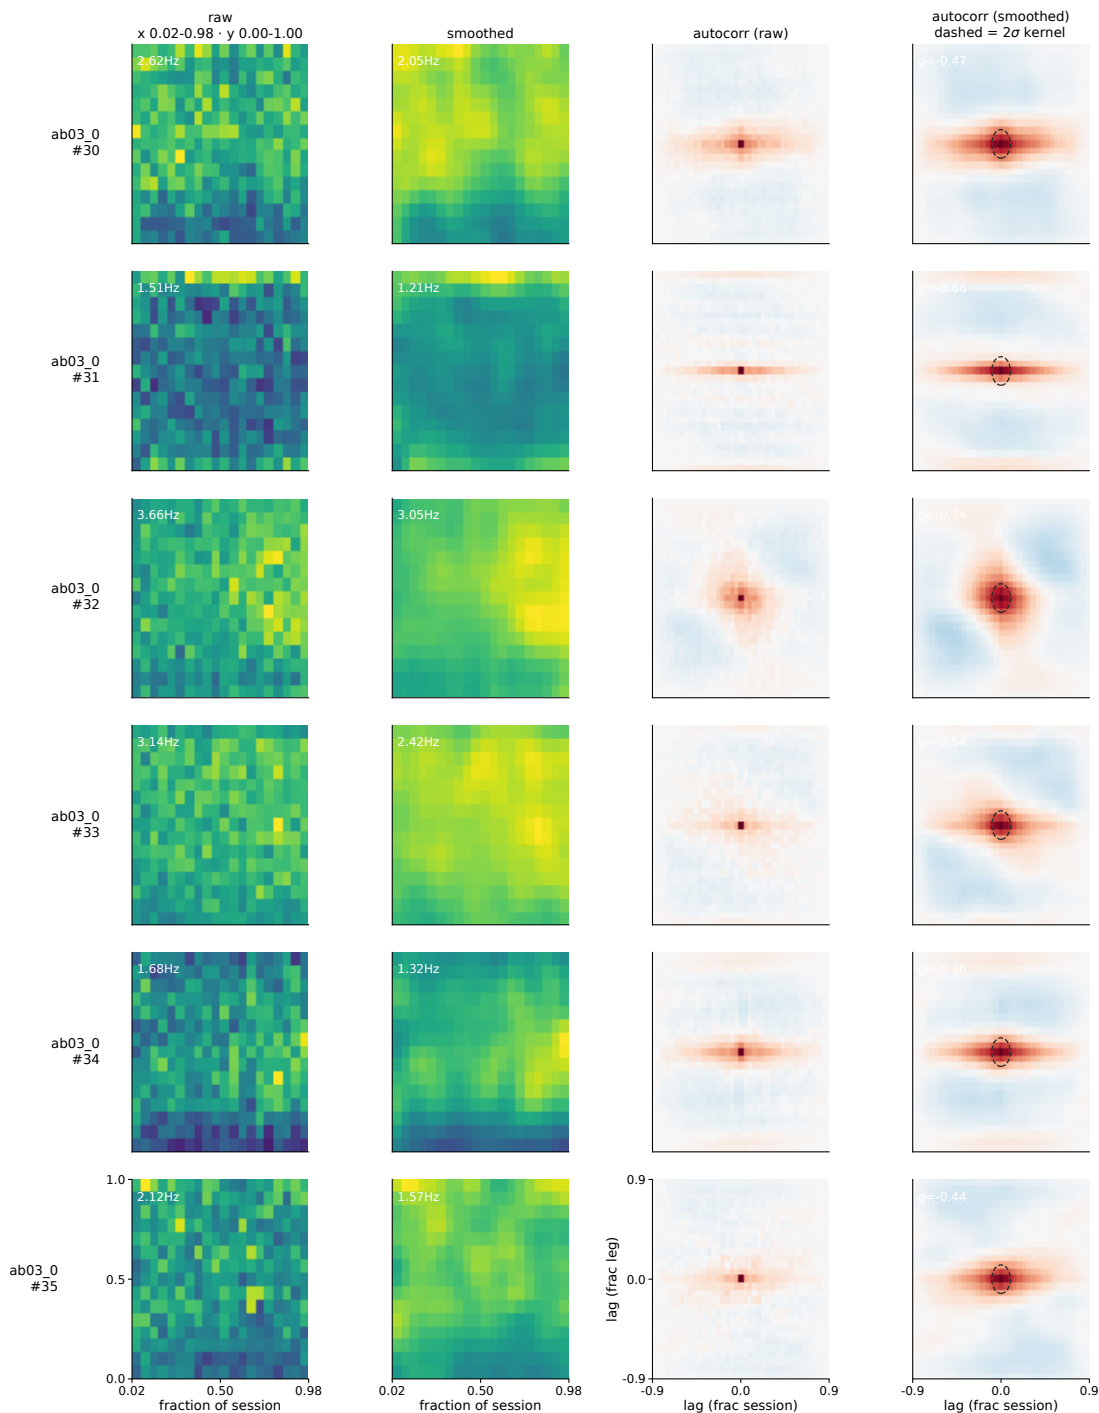


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 42-47 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

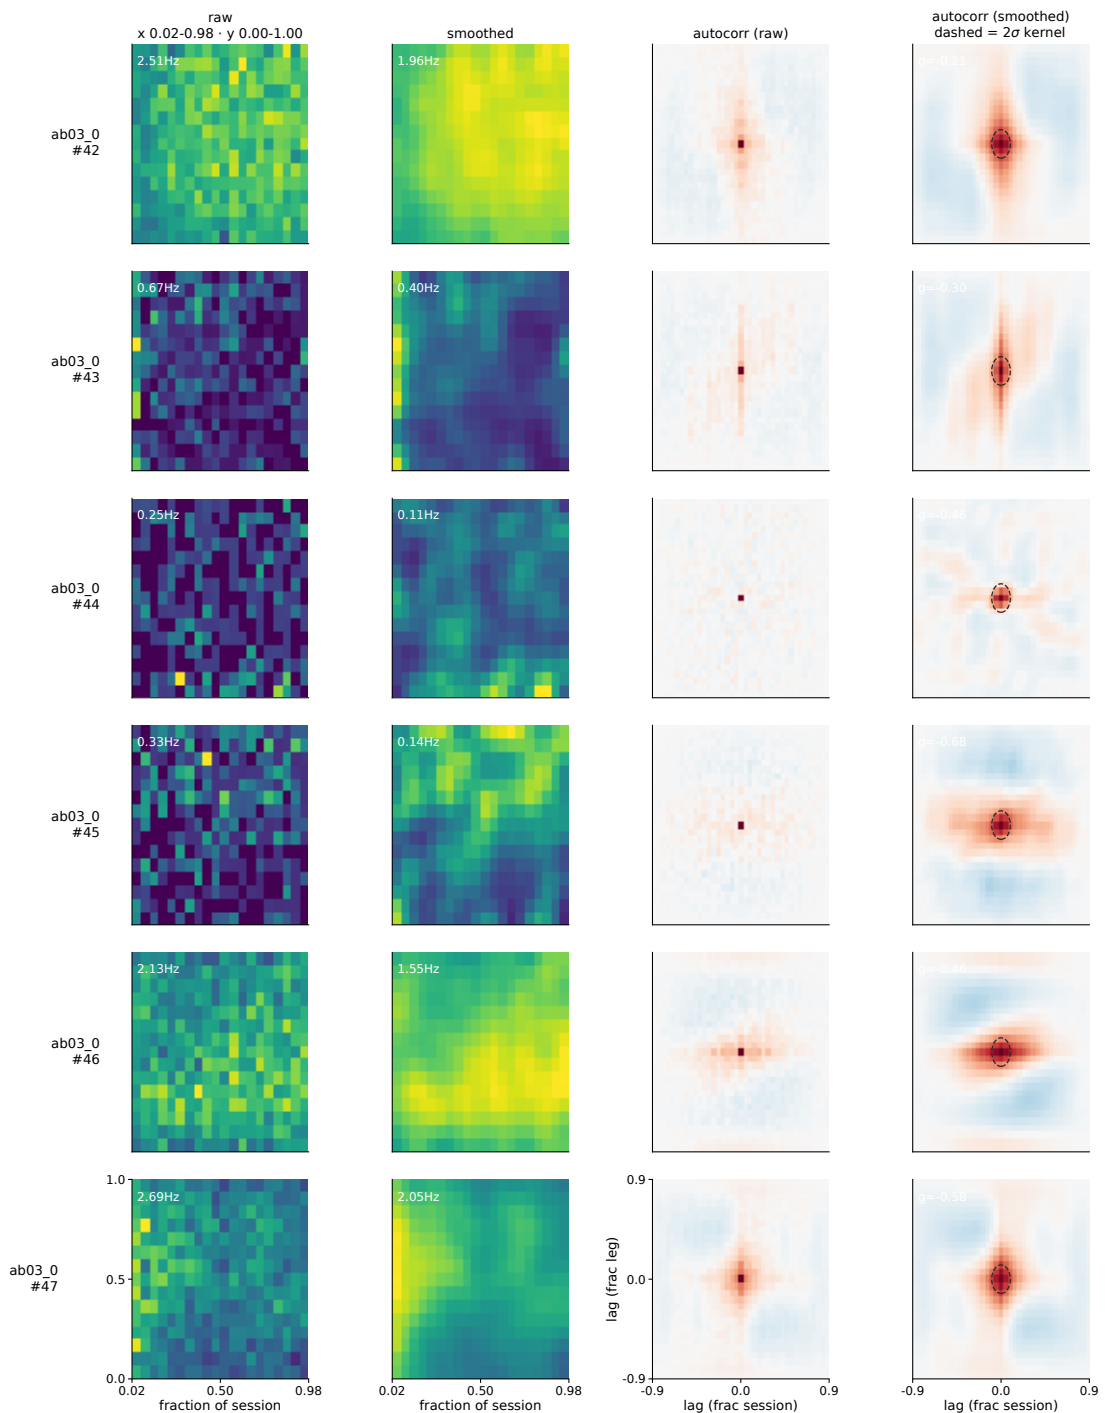


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 48-53 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

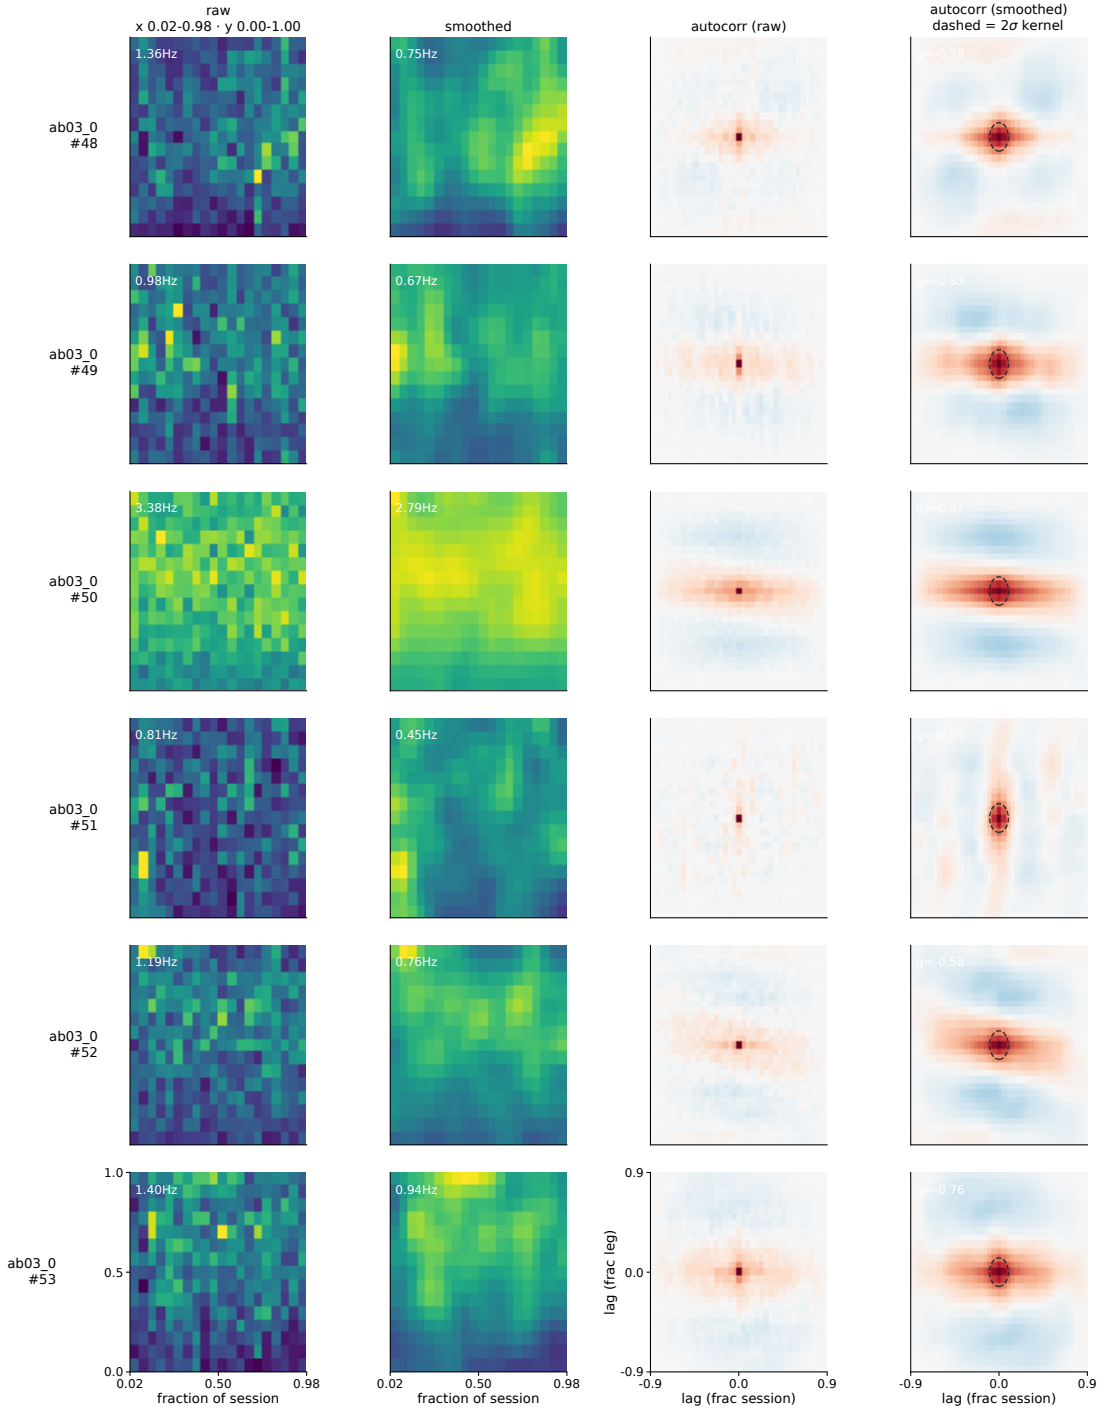


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 54-59 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

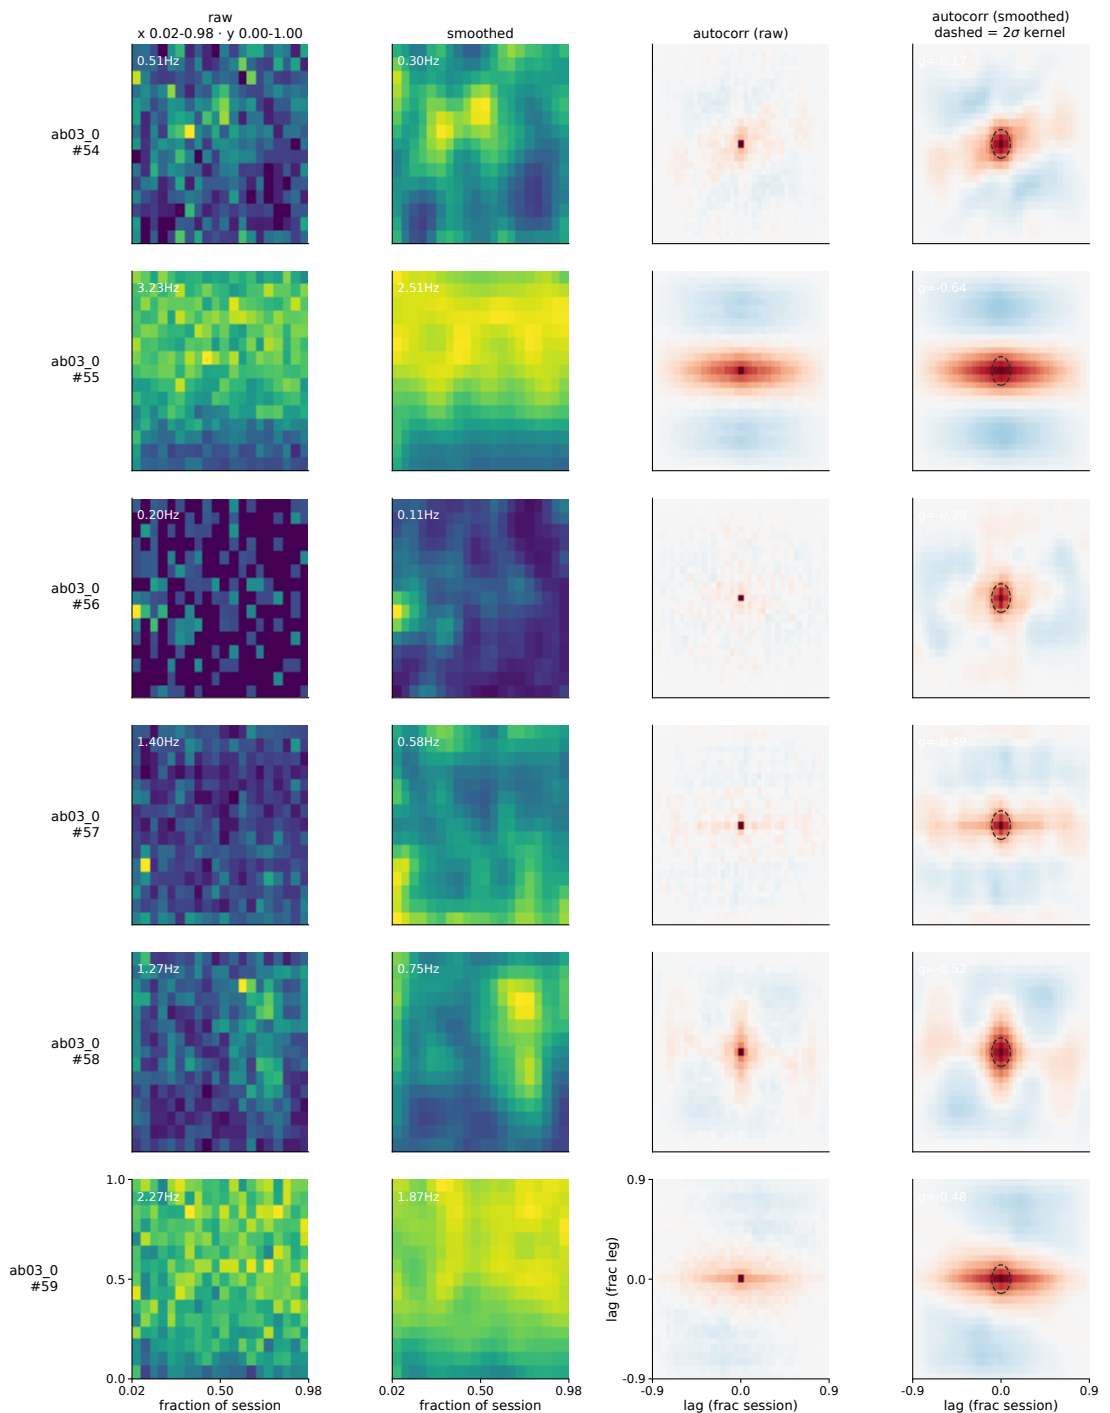


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 60-65 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

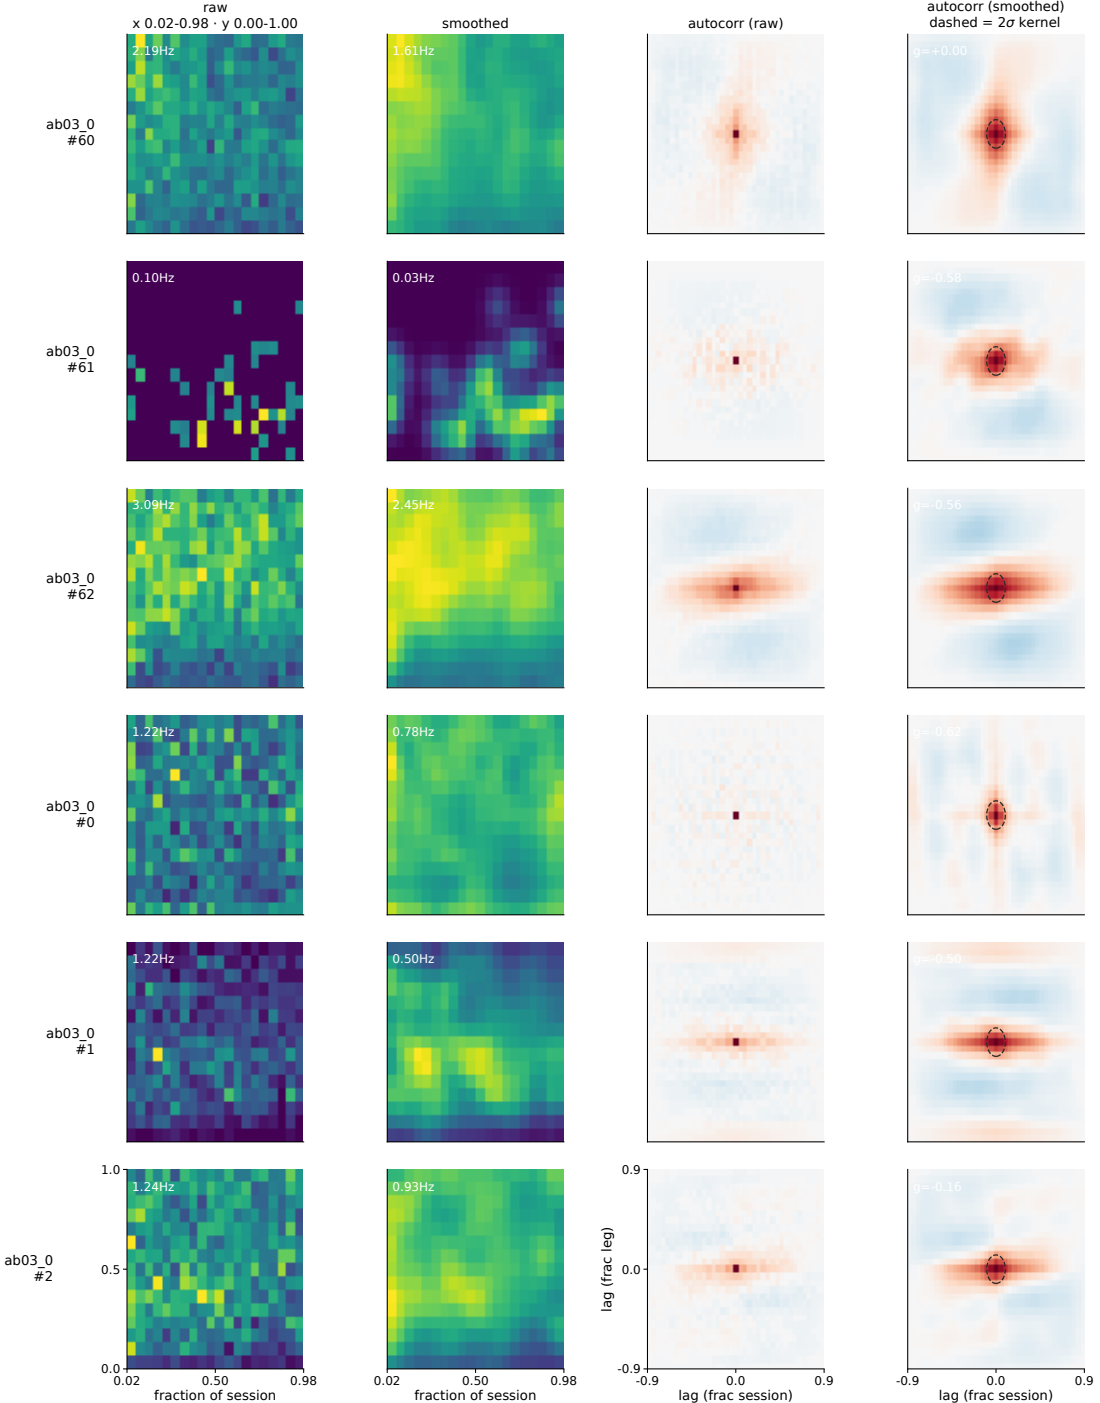


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 66-71 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

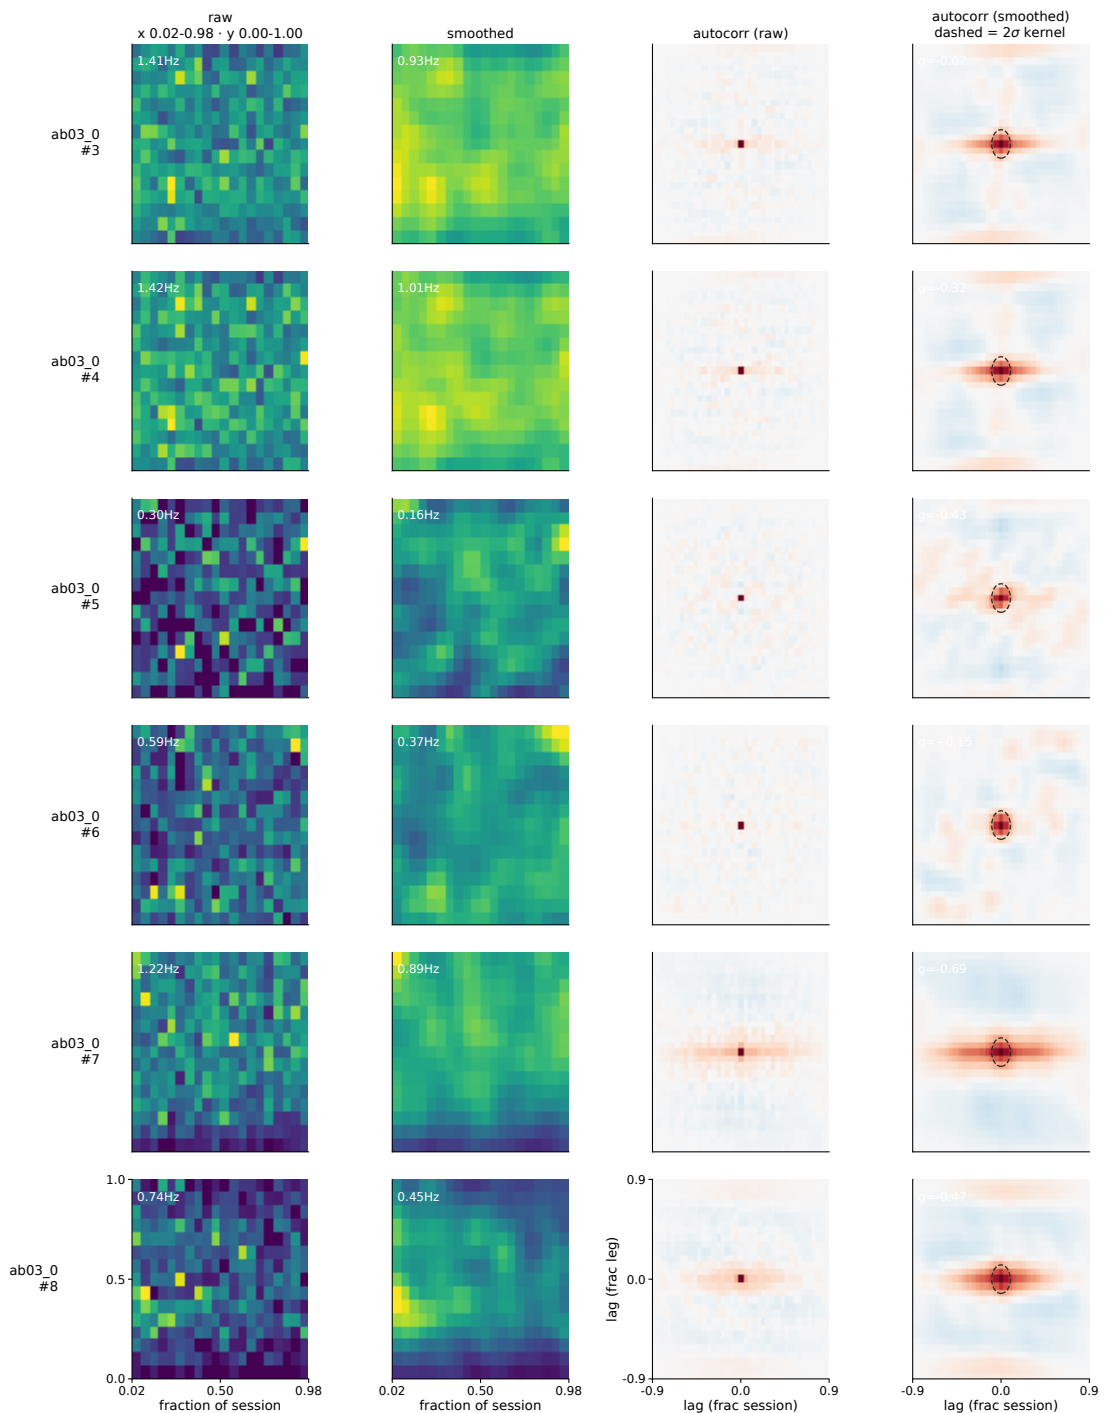


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 72-77 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

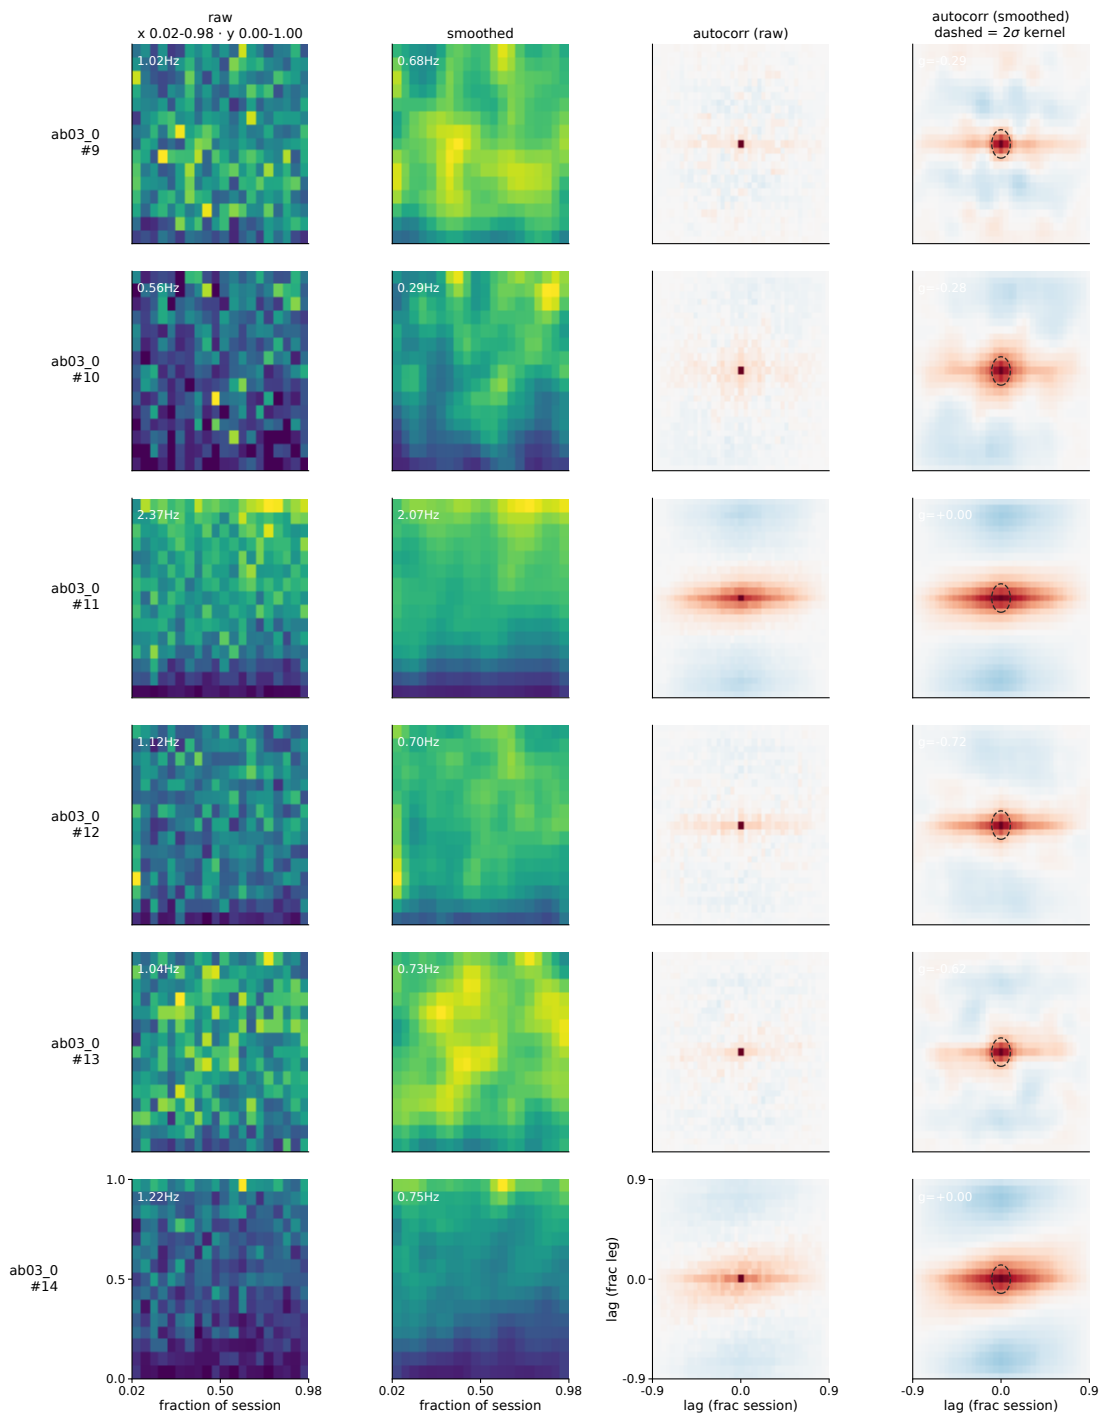


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 78-83 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

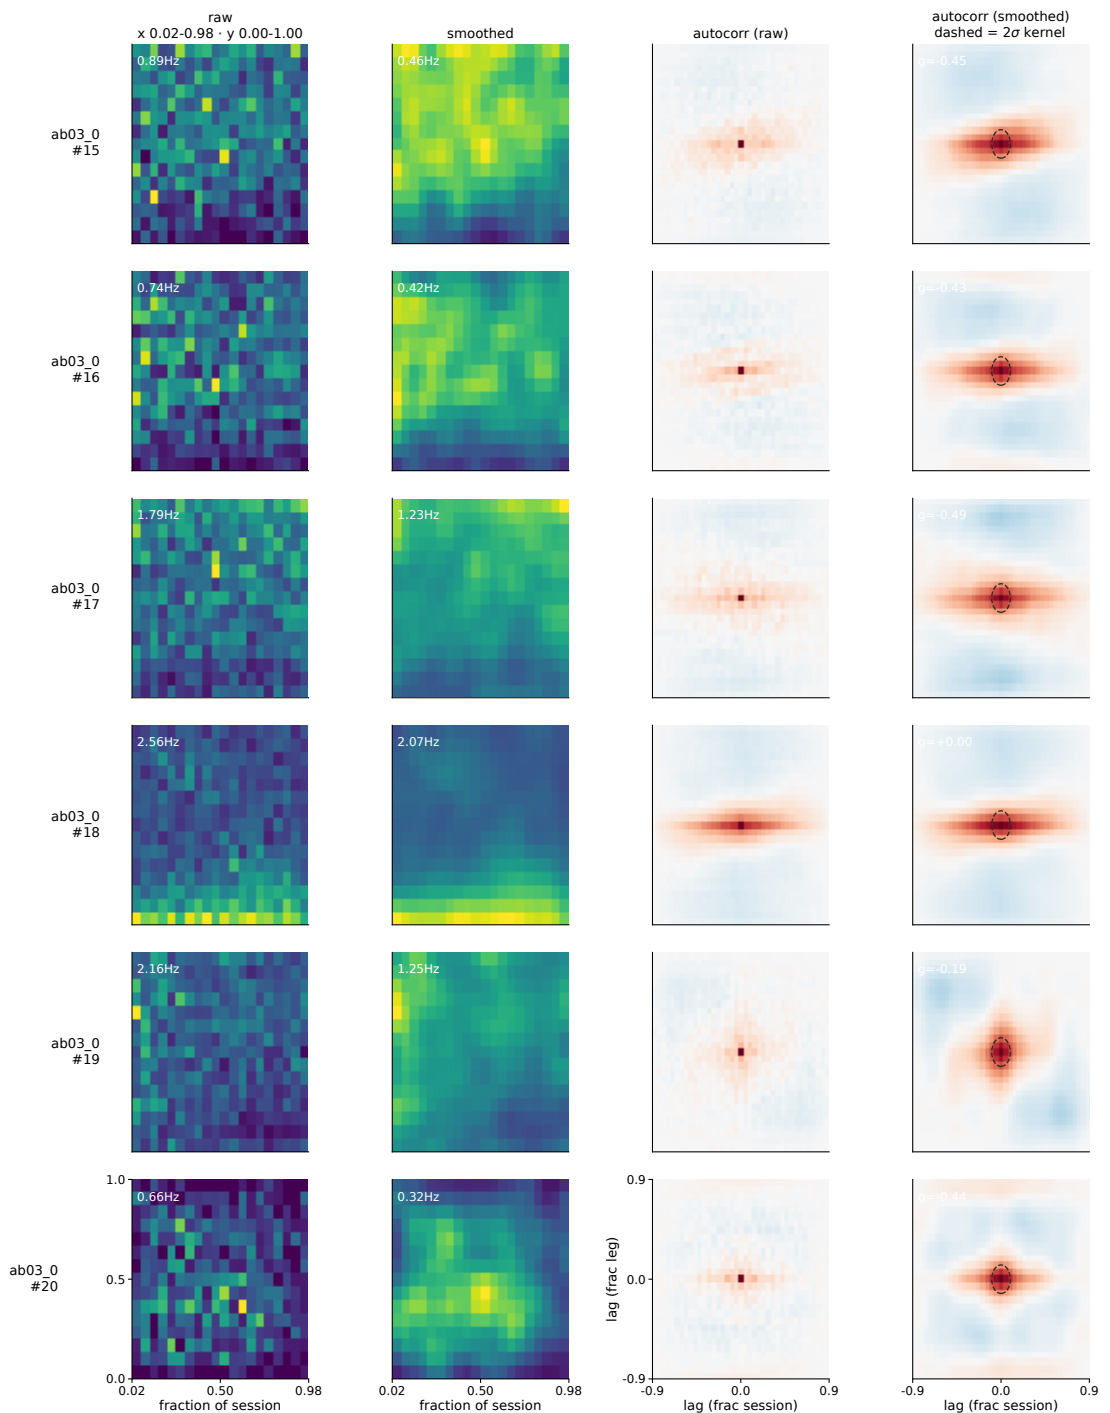


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 84-89 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

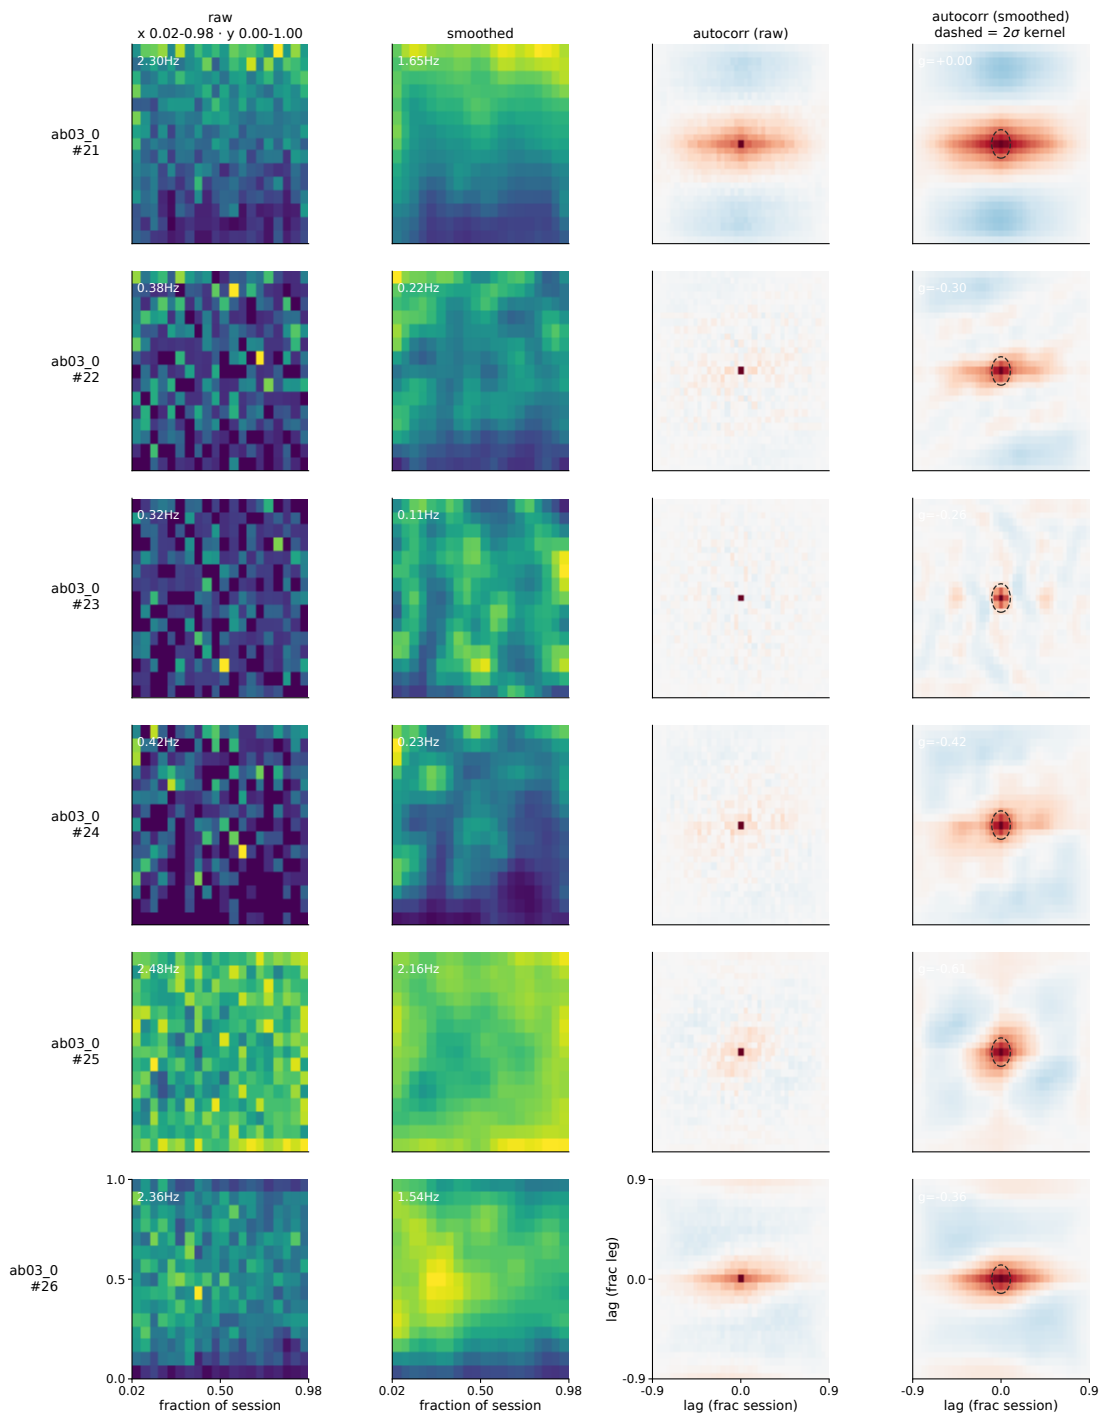


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 90-95 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

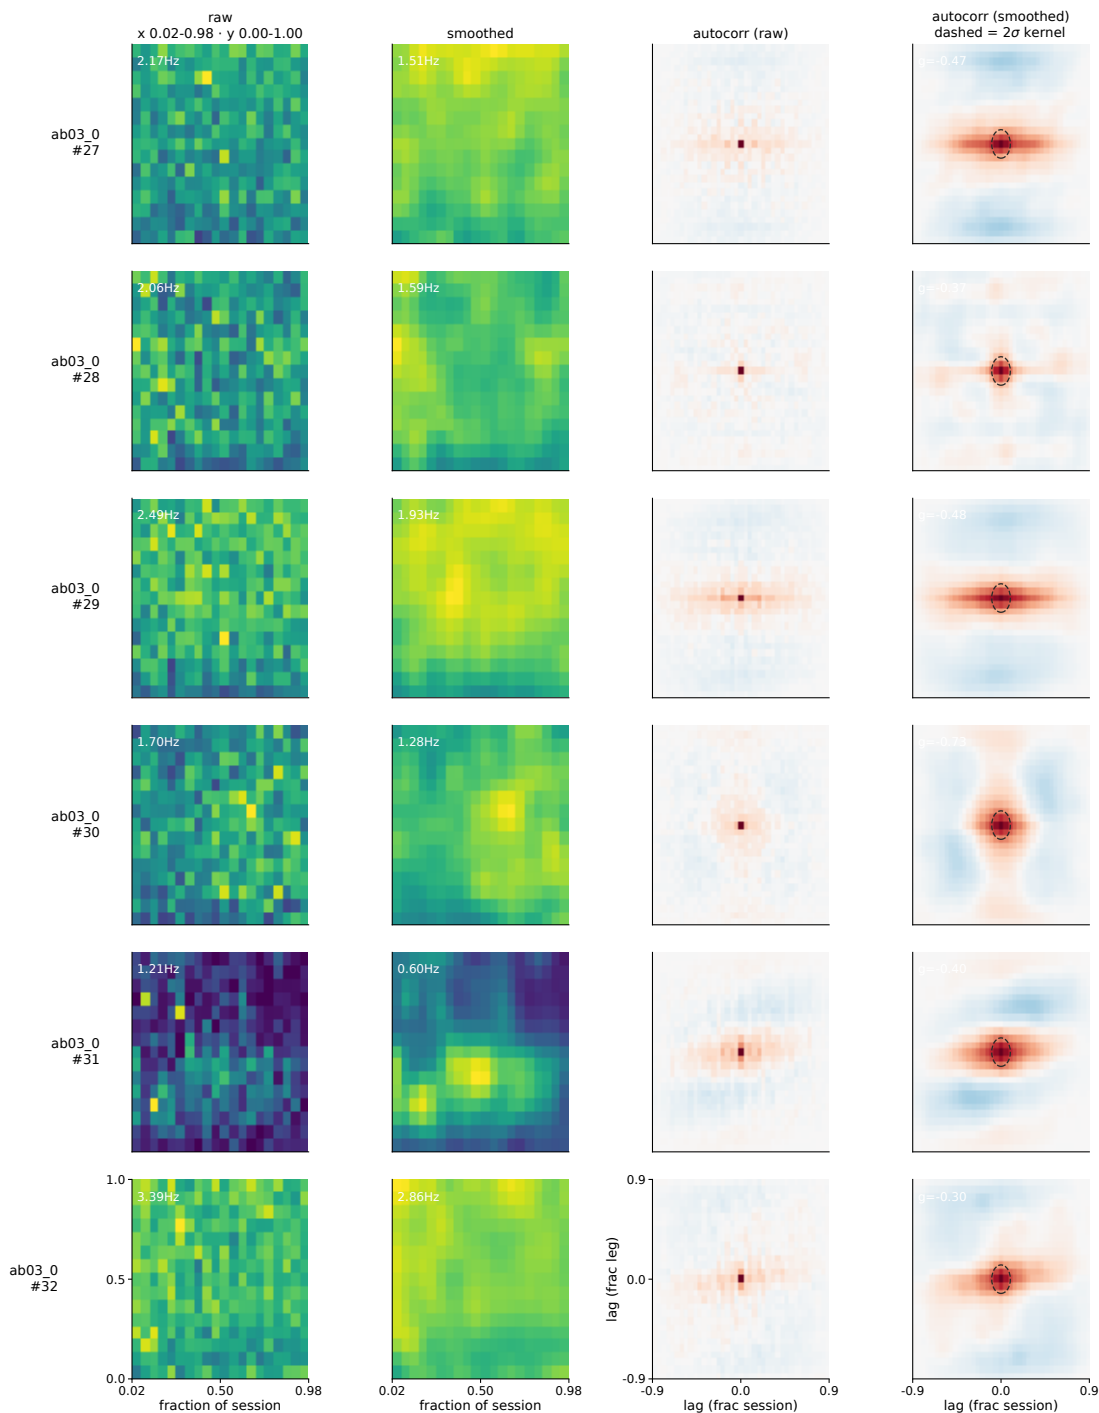


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 96-101 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

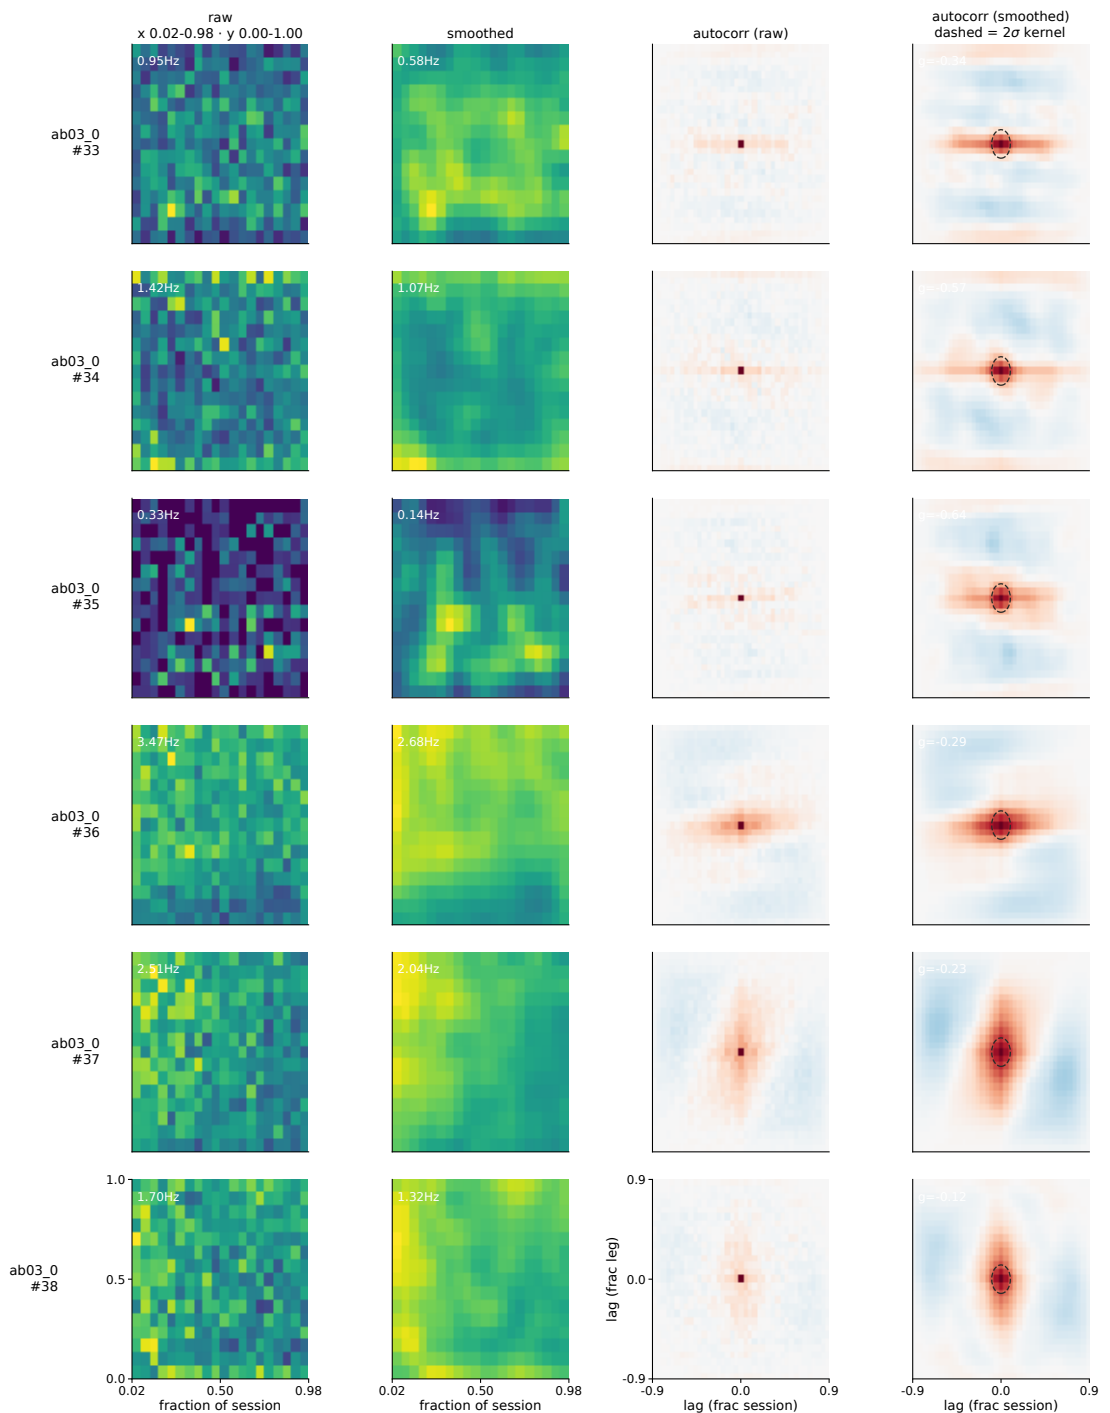


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 102-107 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

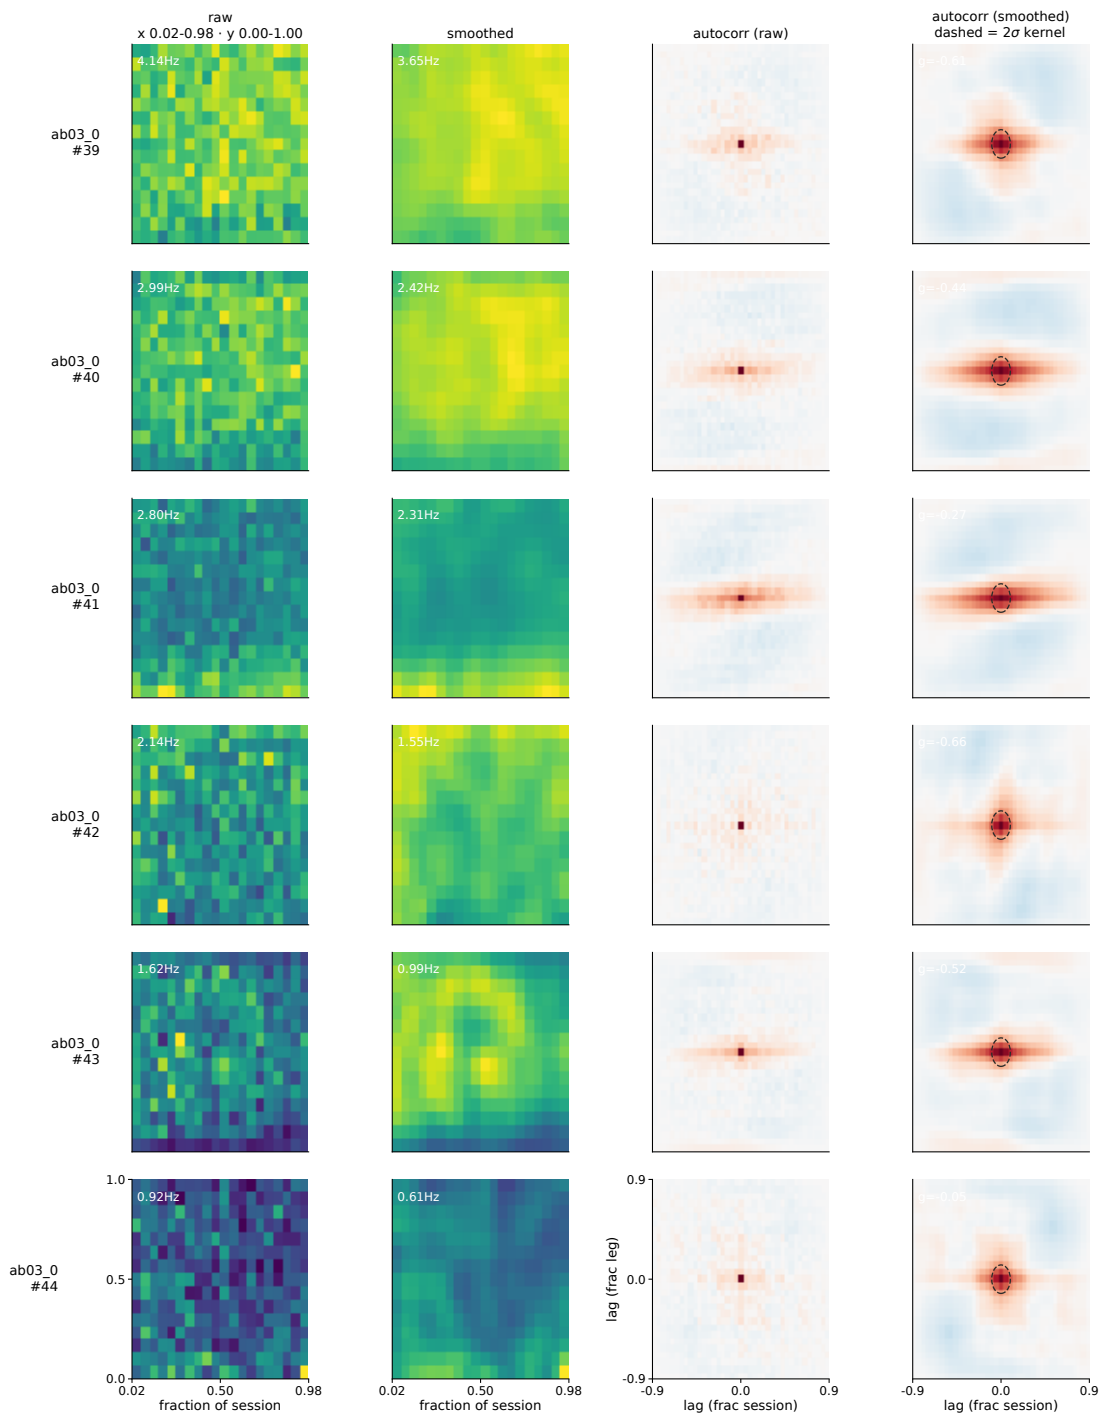


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 108-113 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

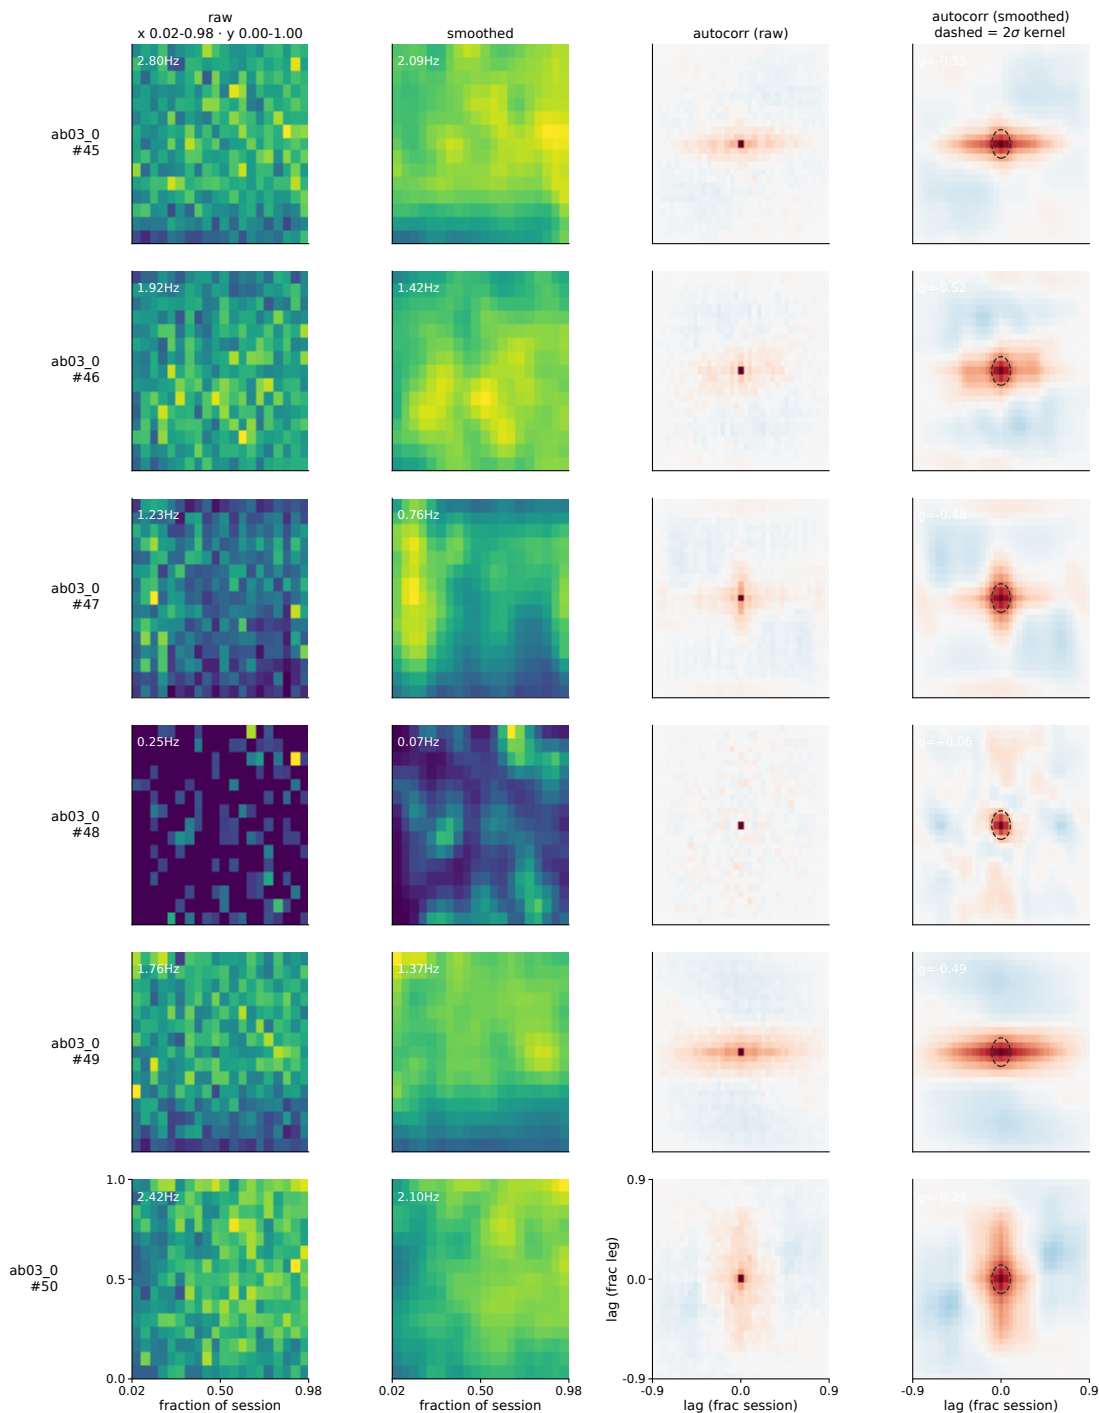


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 114-119 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

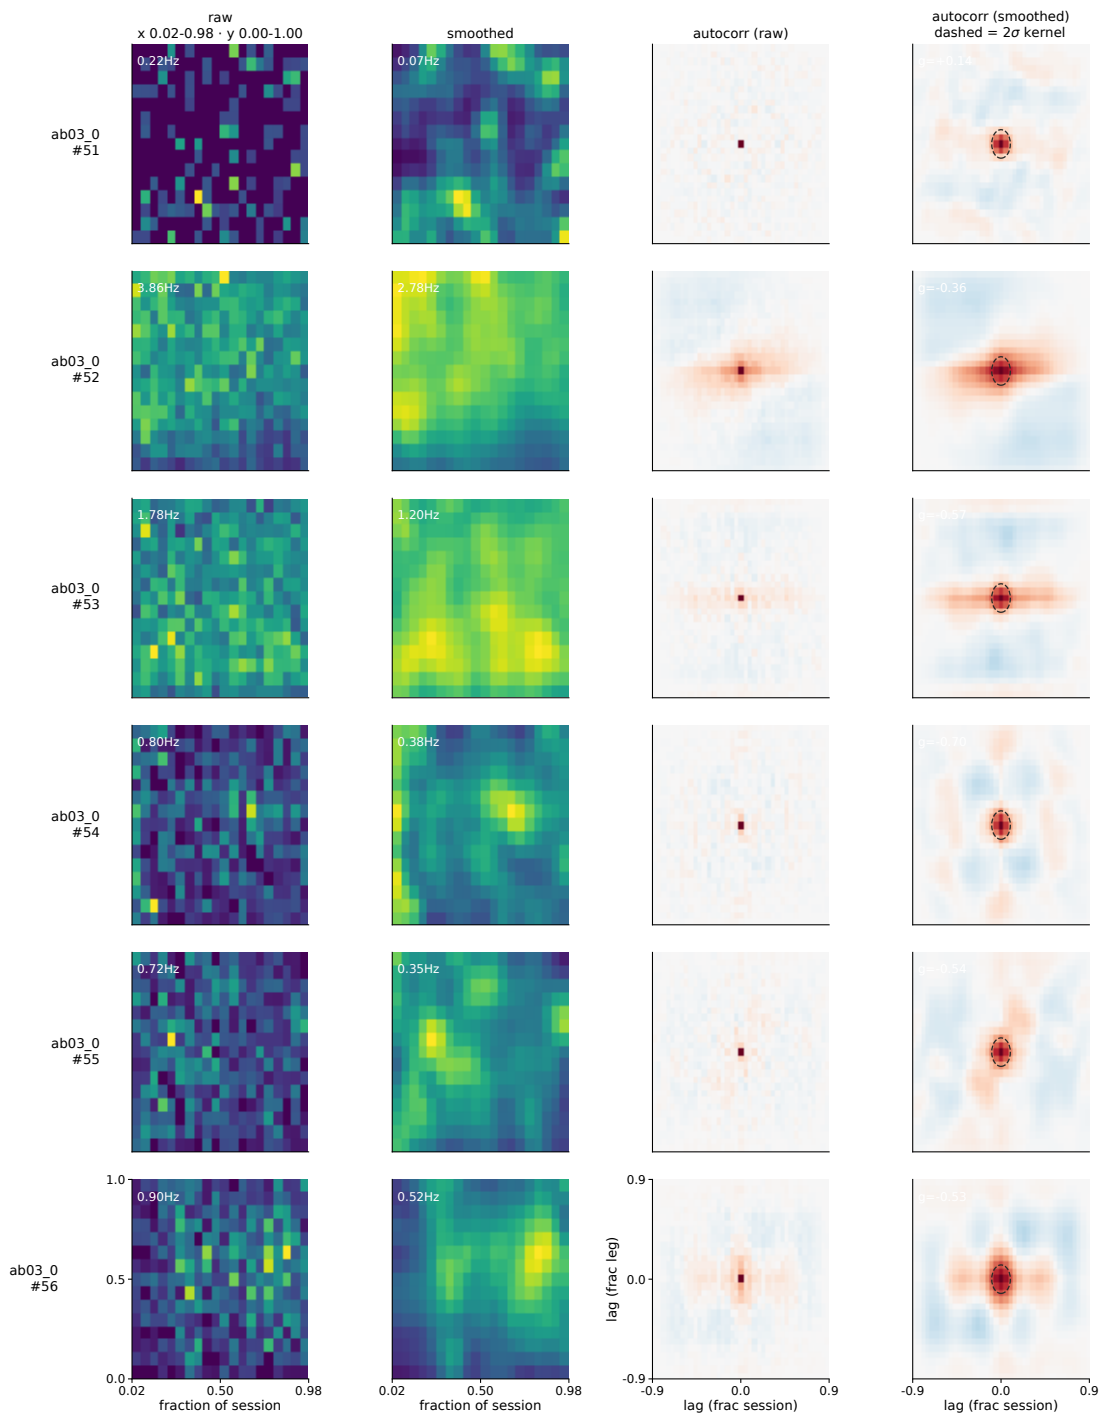


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 120-125 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

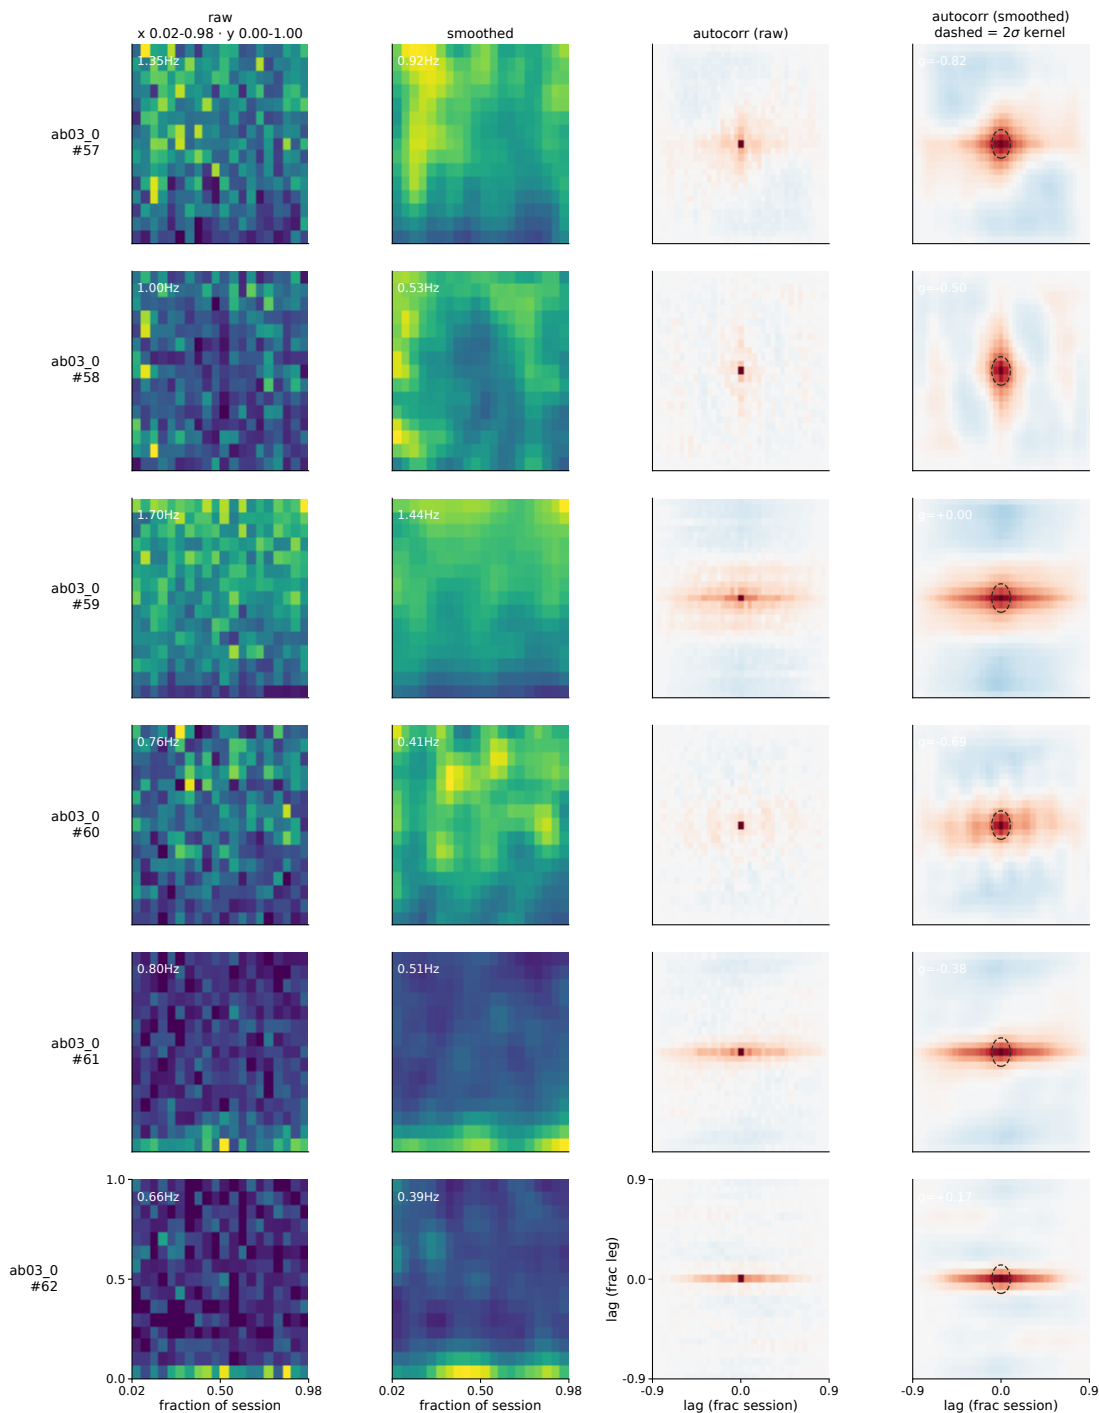


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 126-131 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

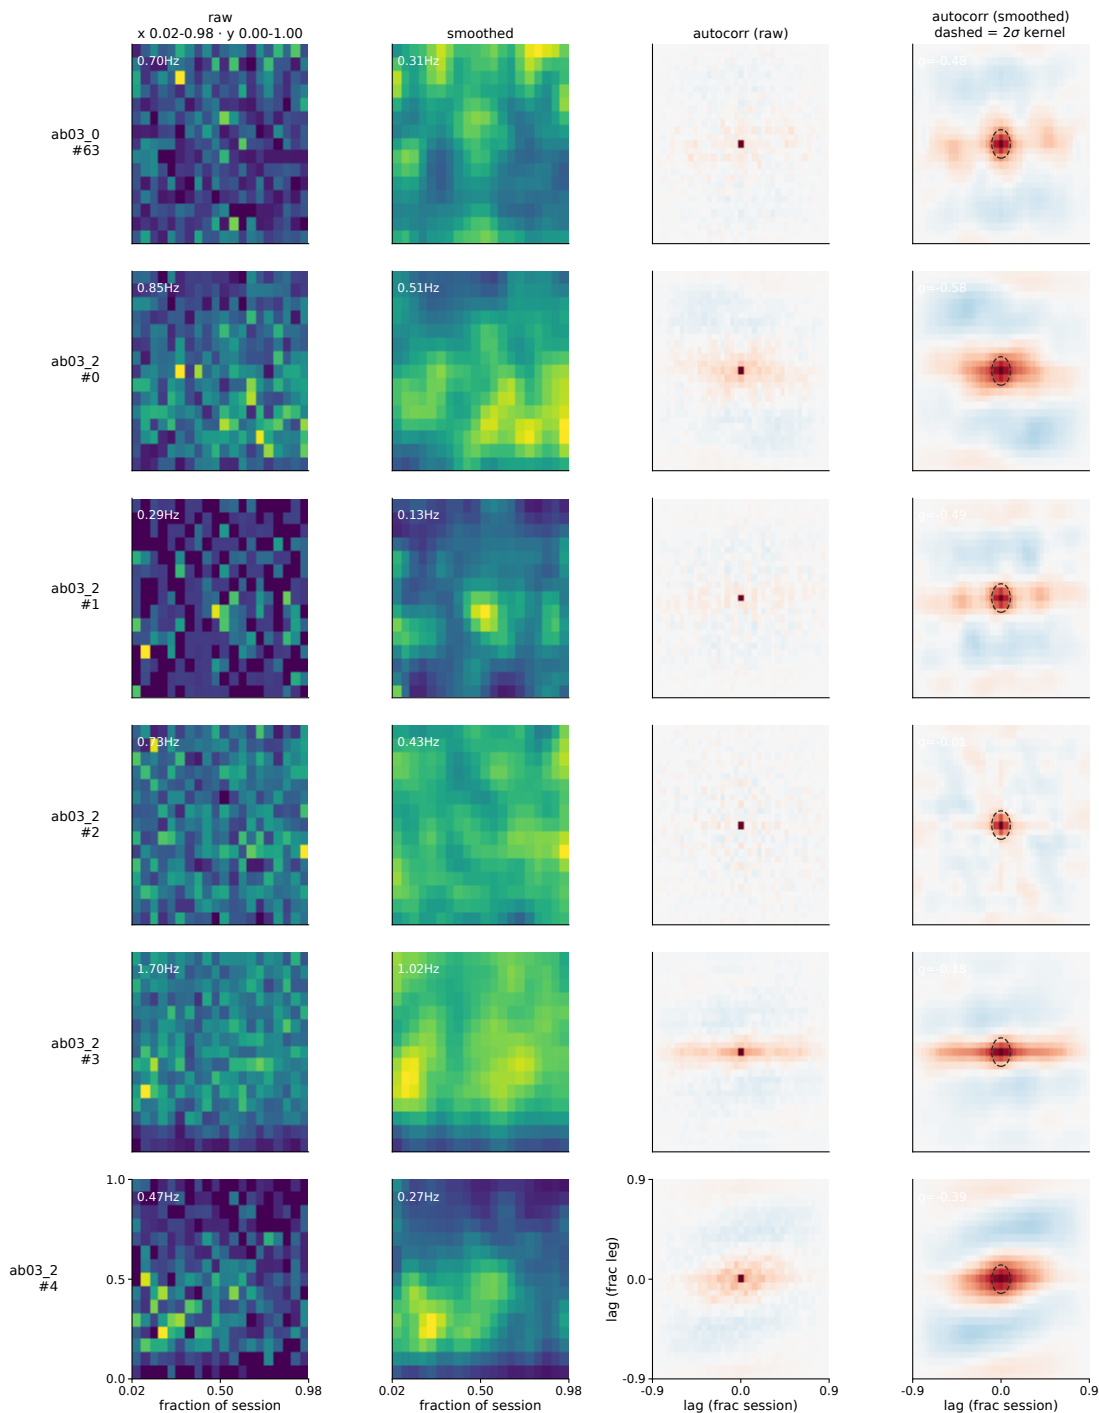


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 132-137 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

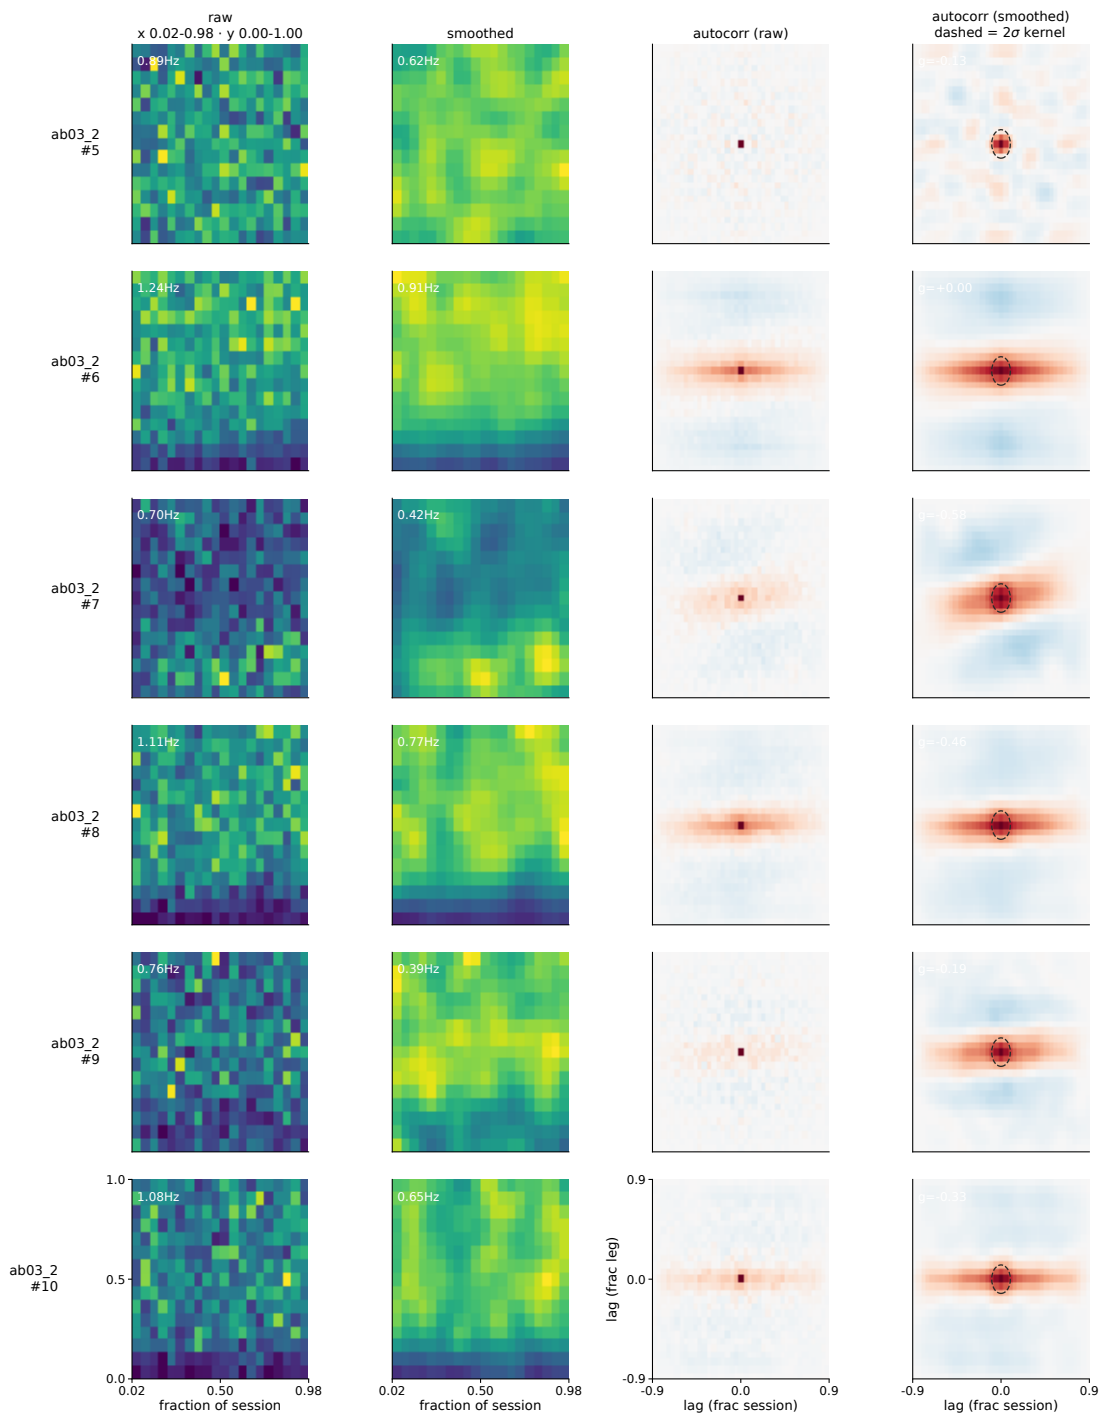


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 138-143 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

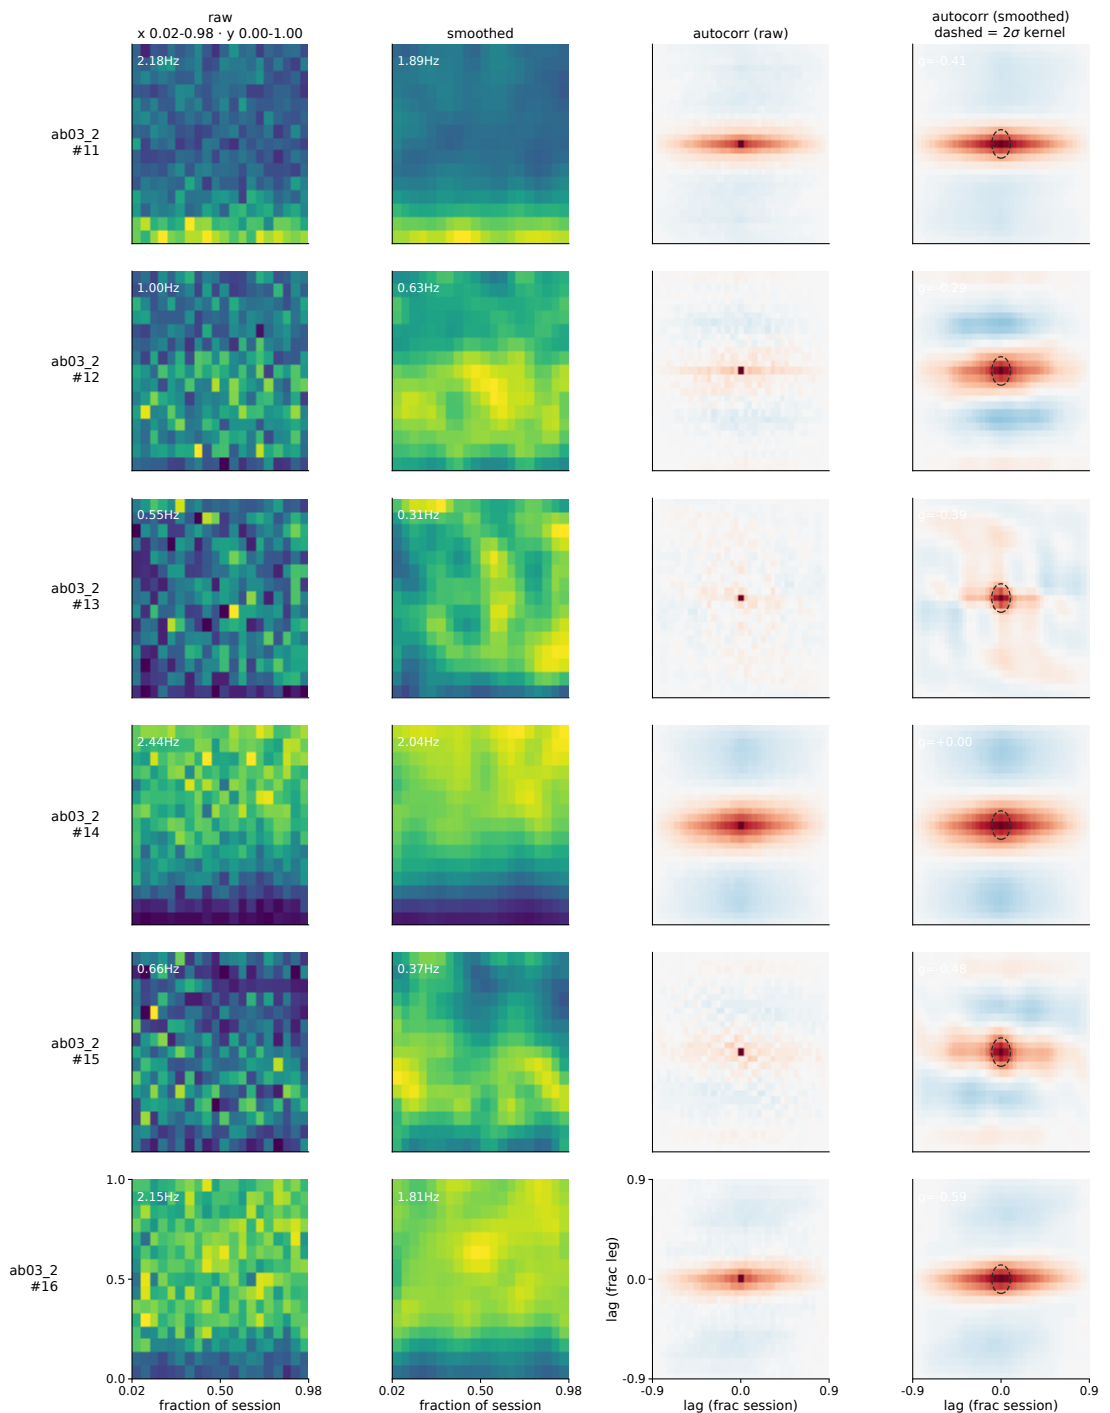


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 144-149 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

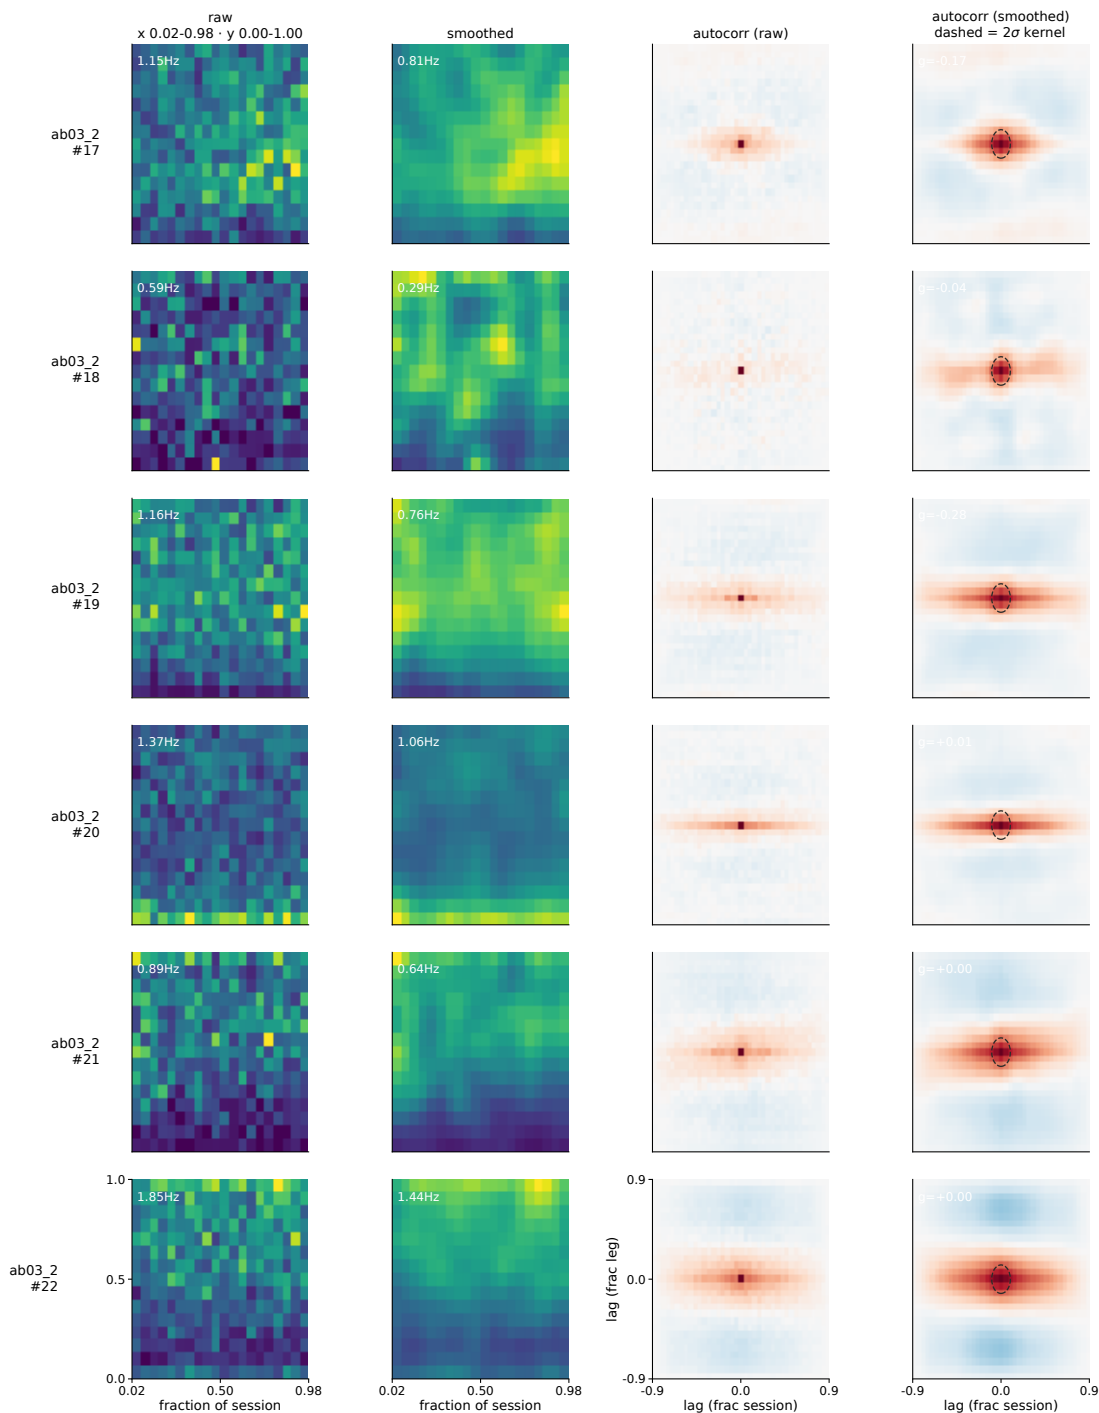


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 150-155 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

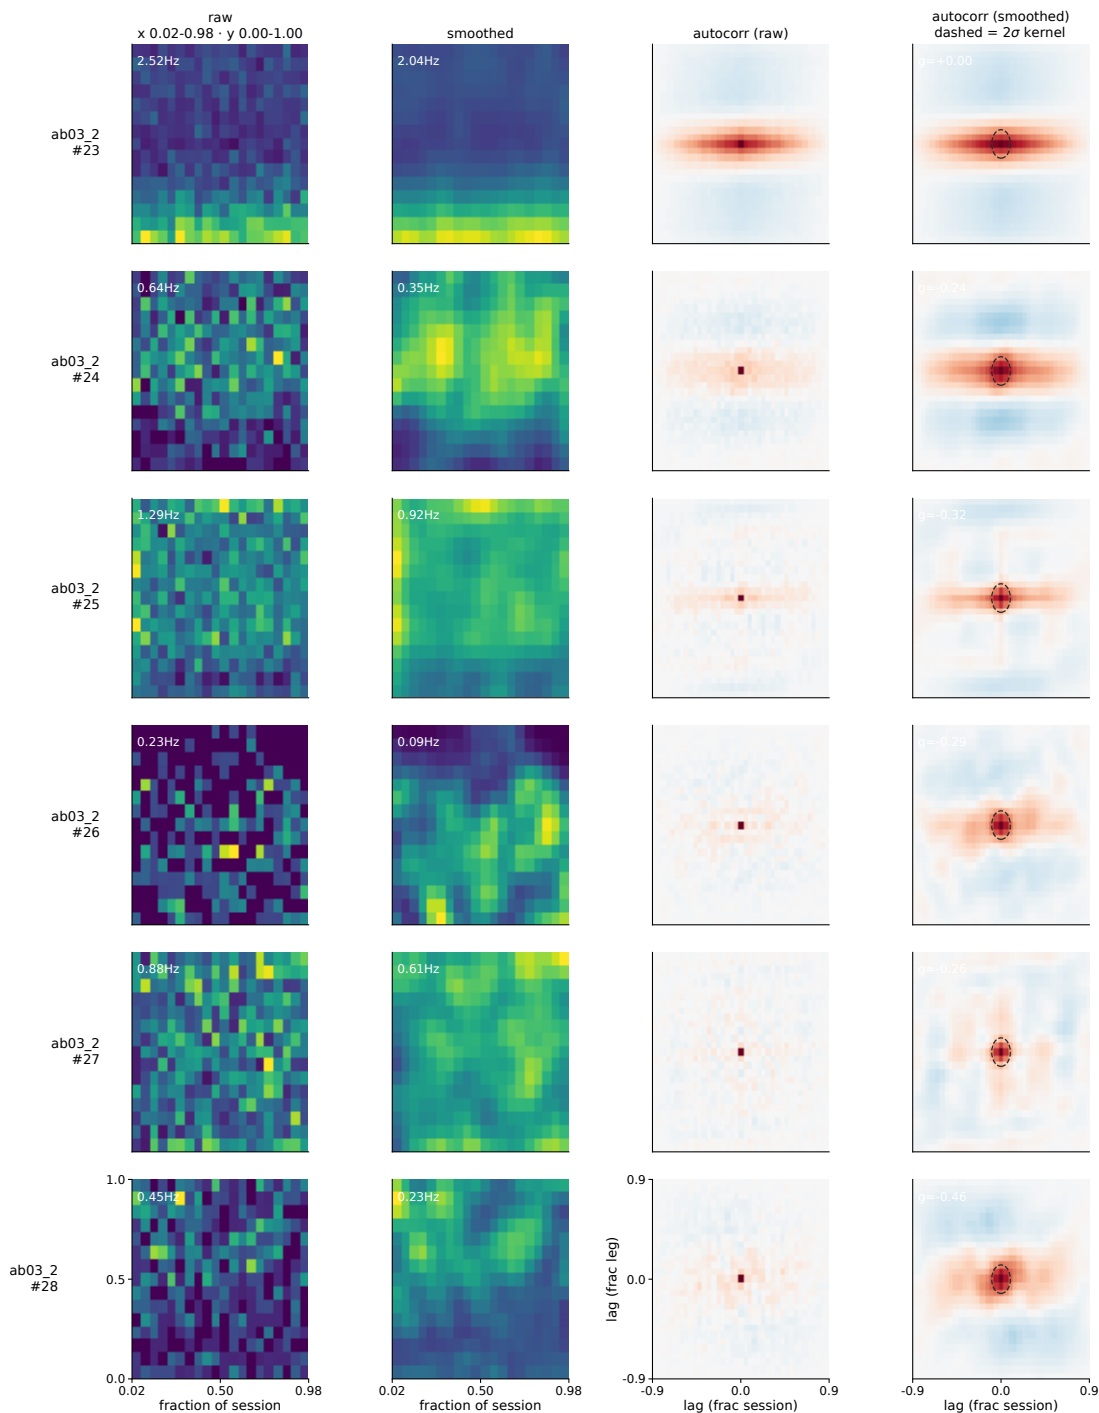


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 156-161 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

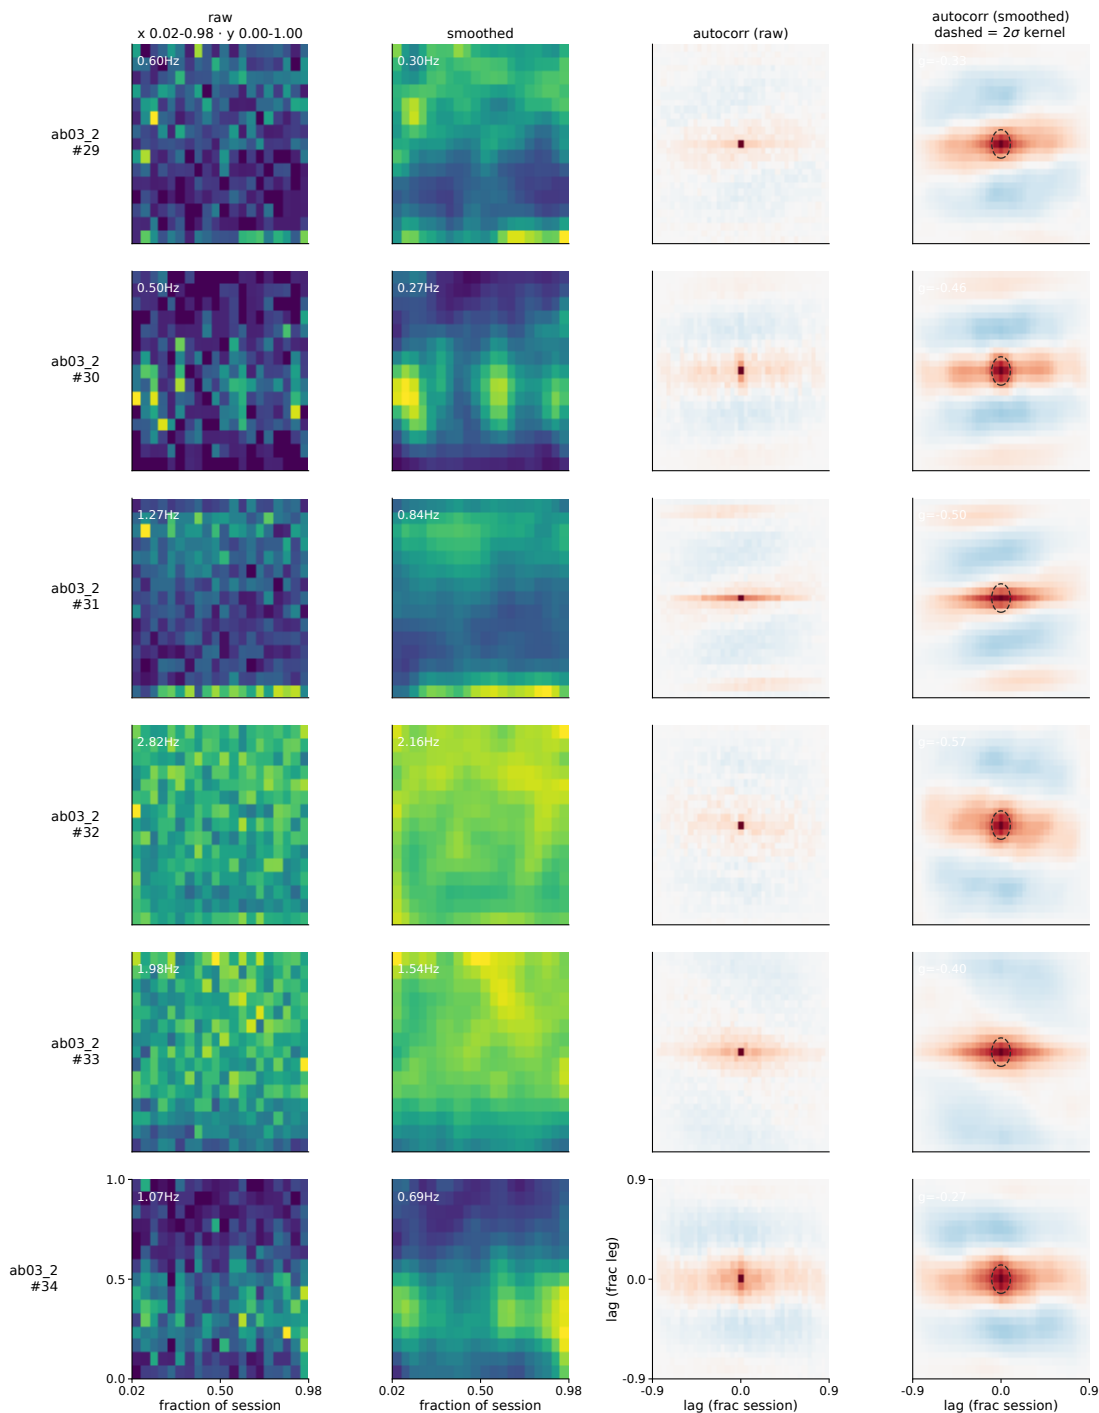


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 162-167 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

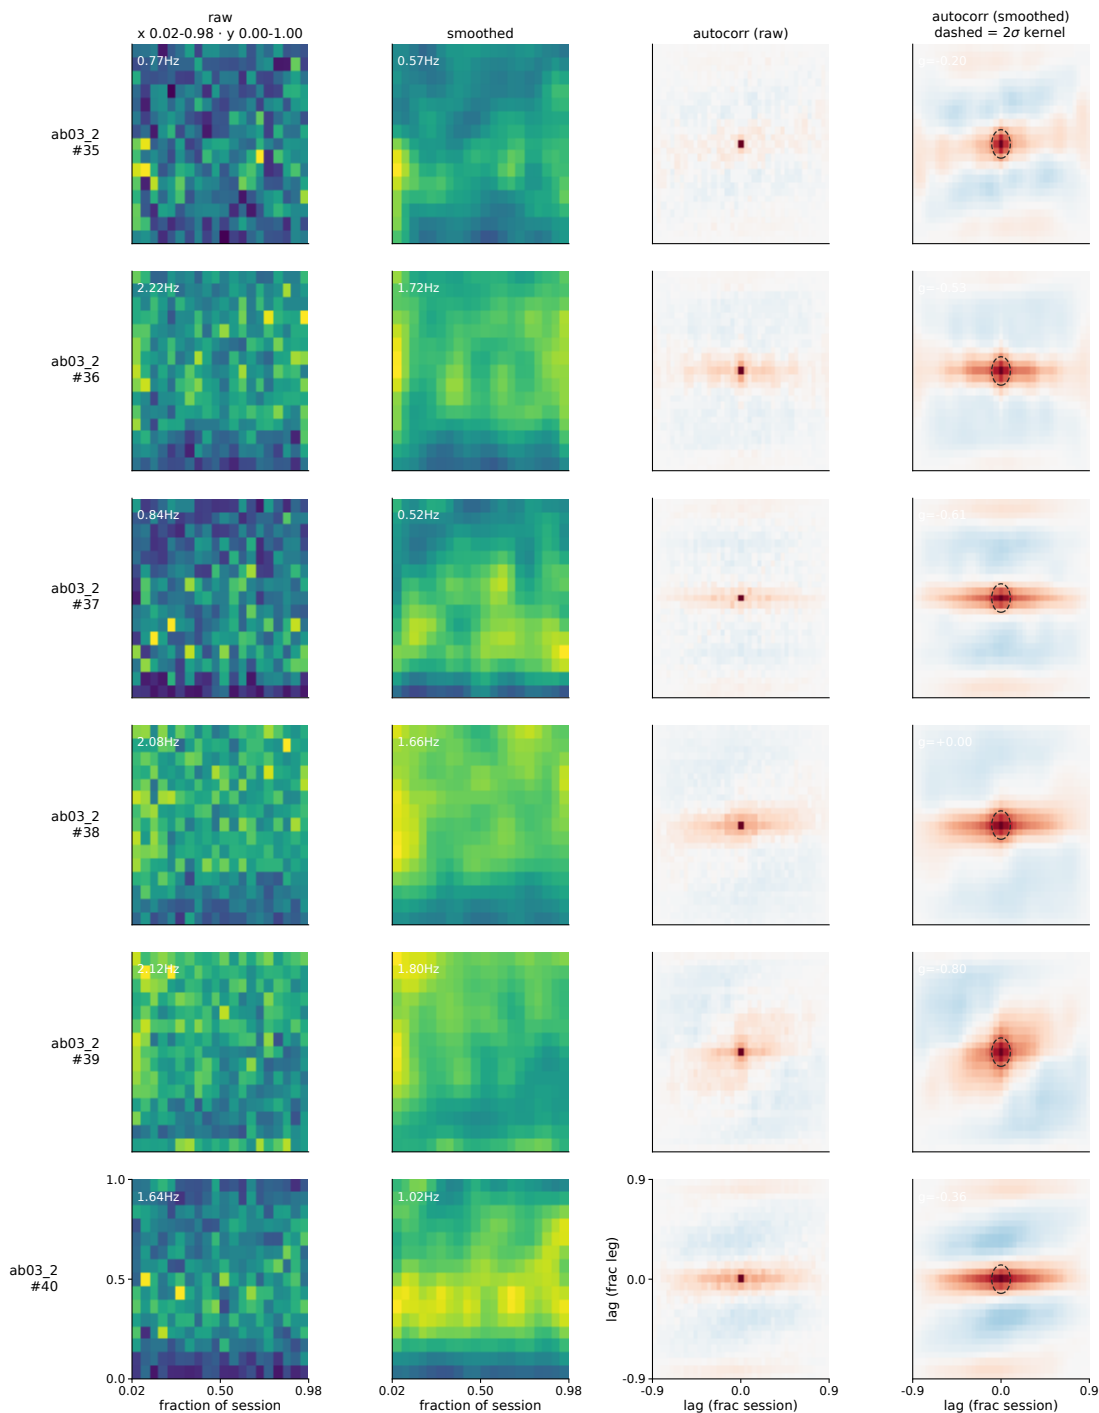


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 168-173 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

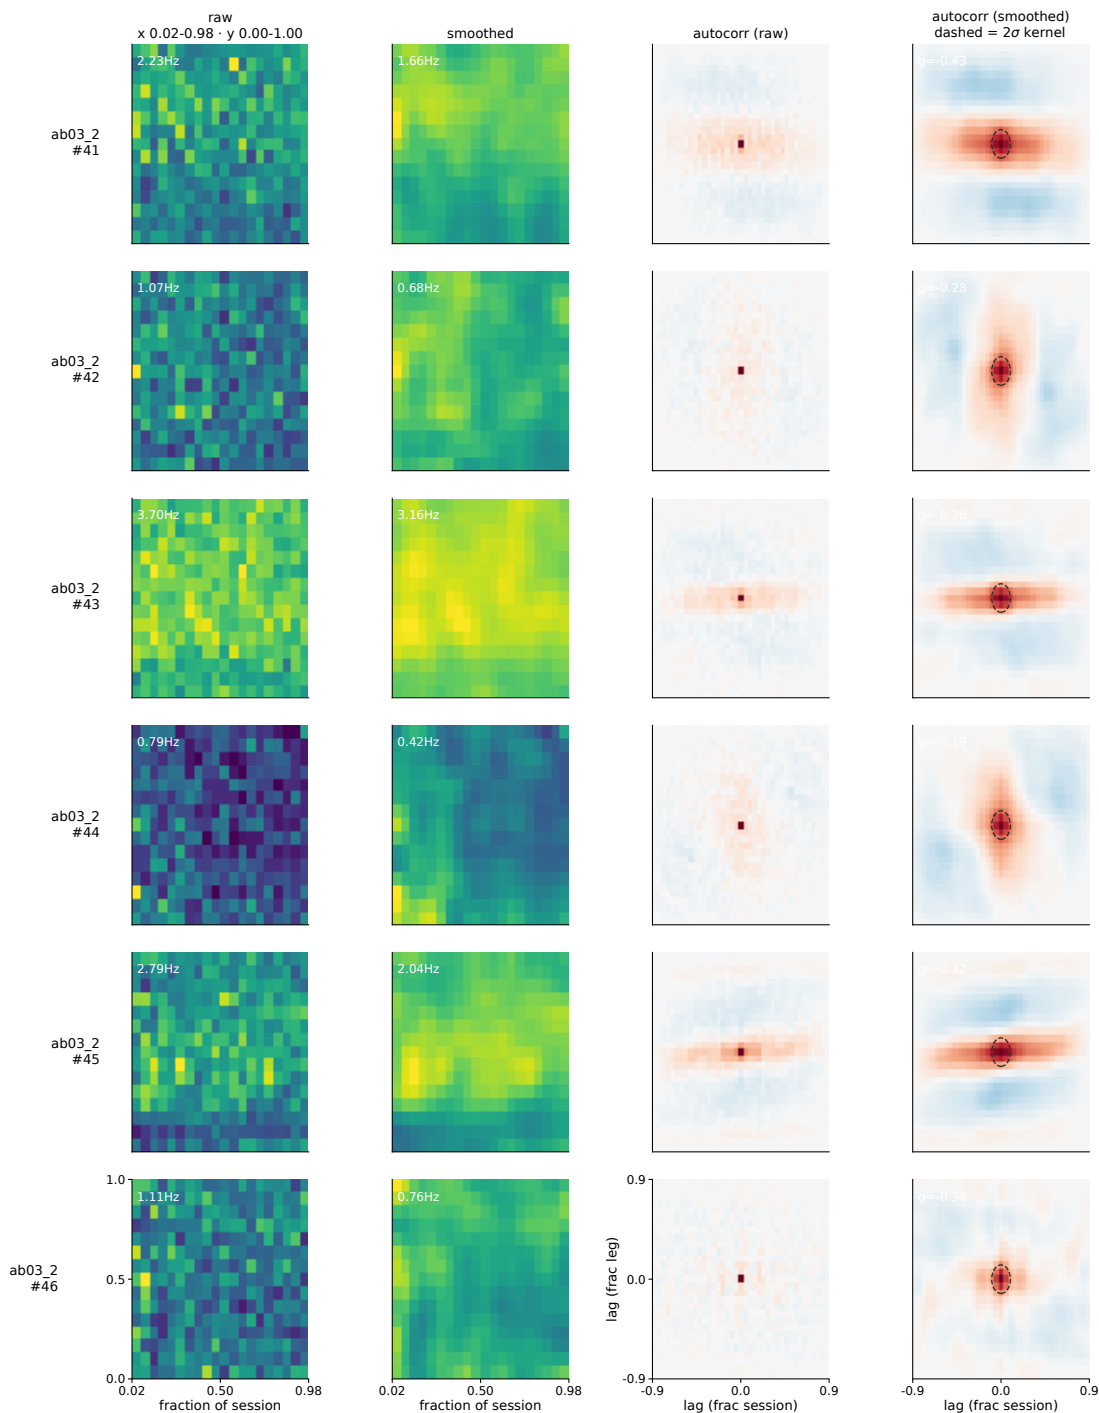


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 174-179 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

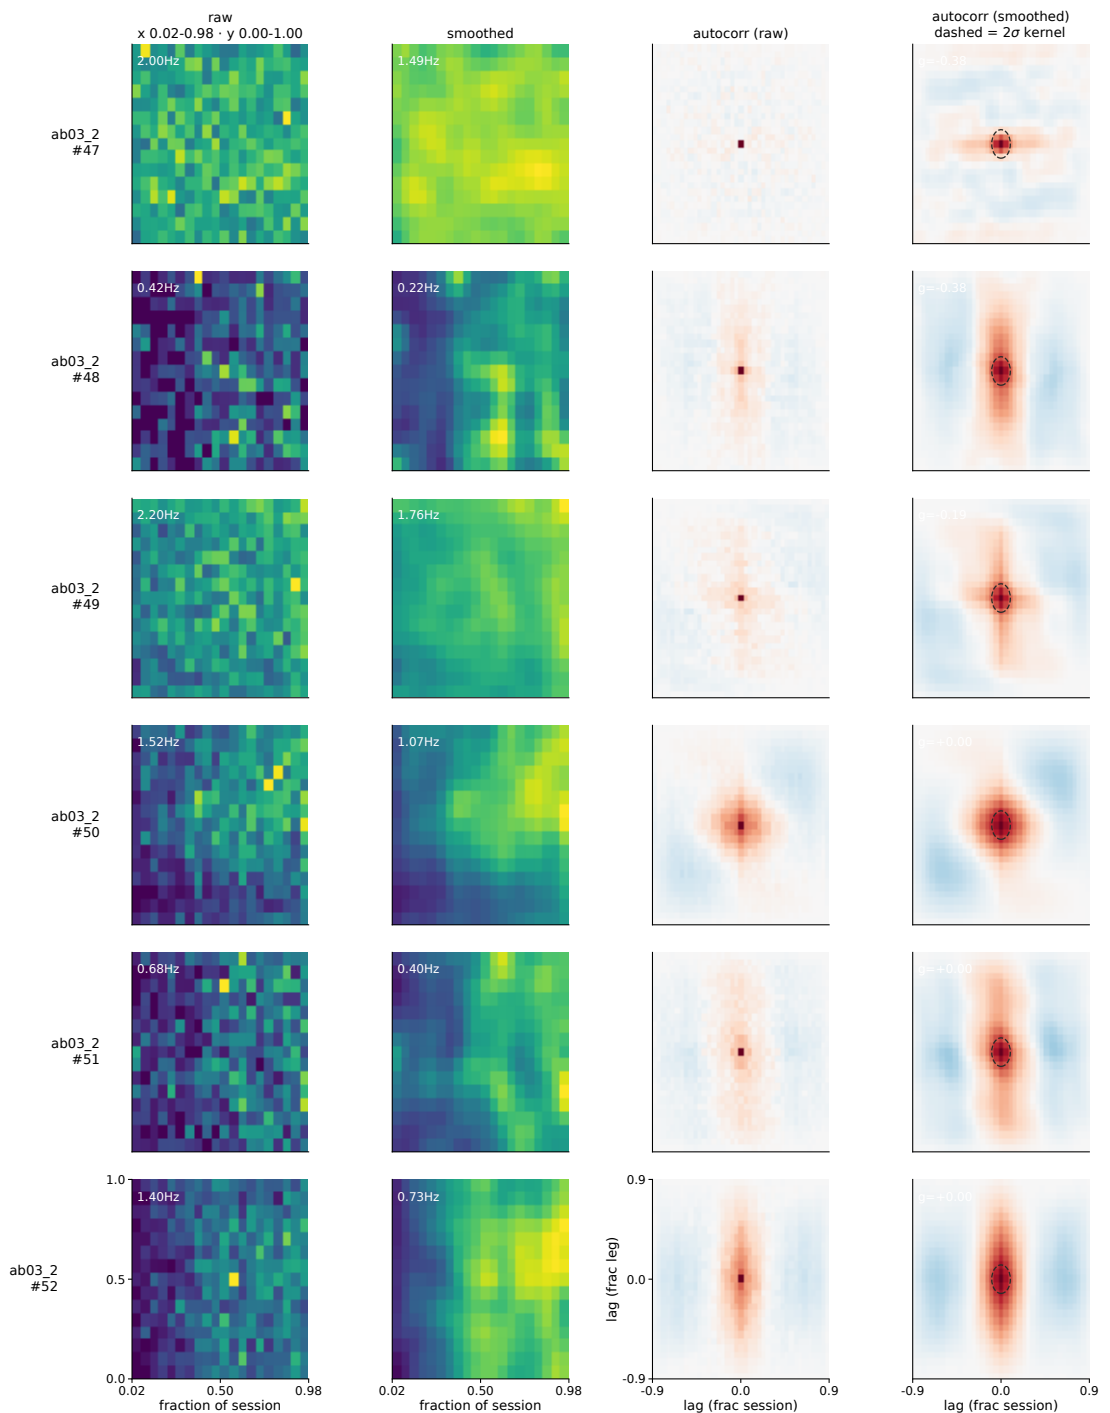


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 180-185 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

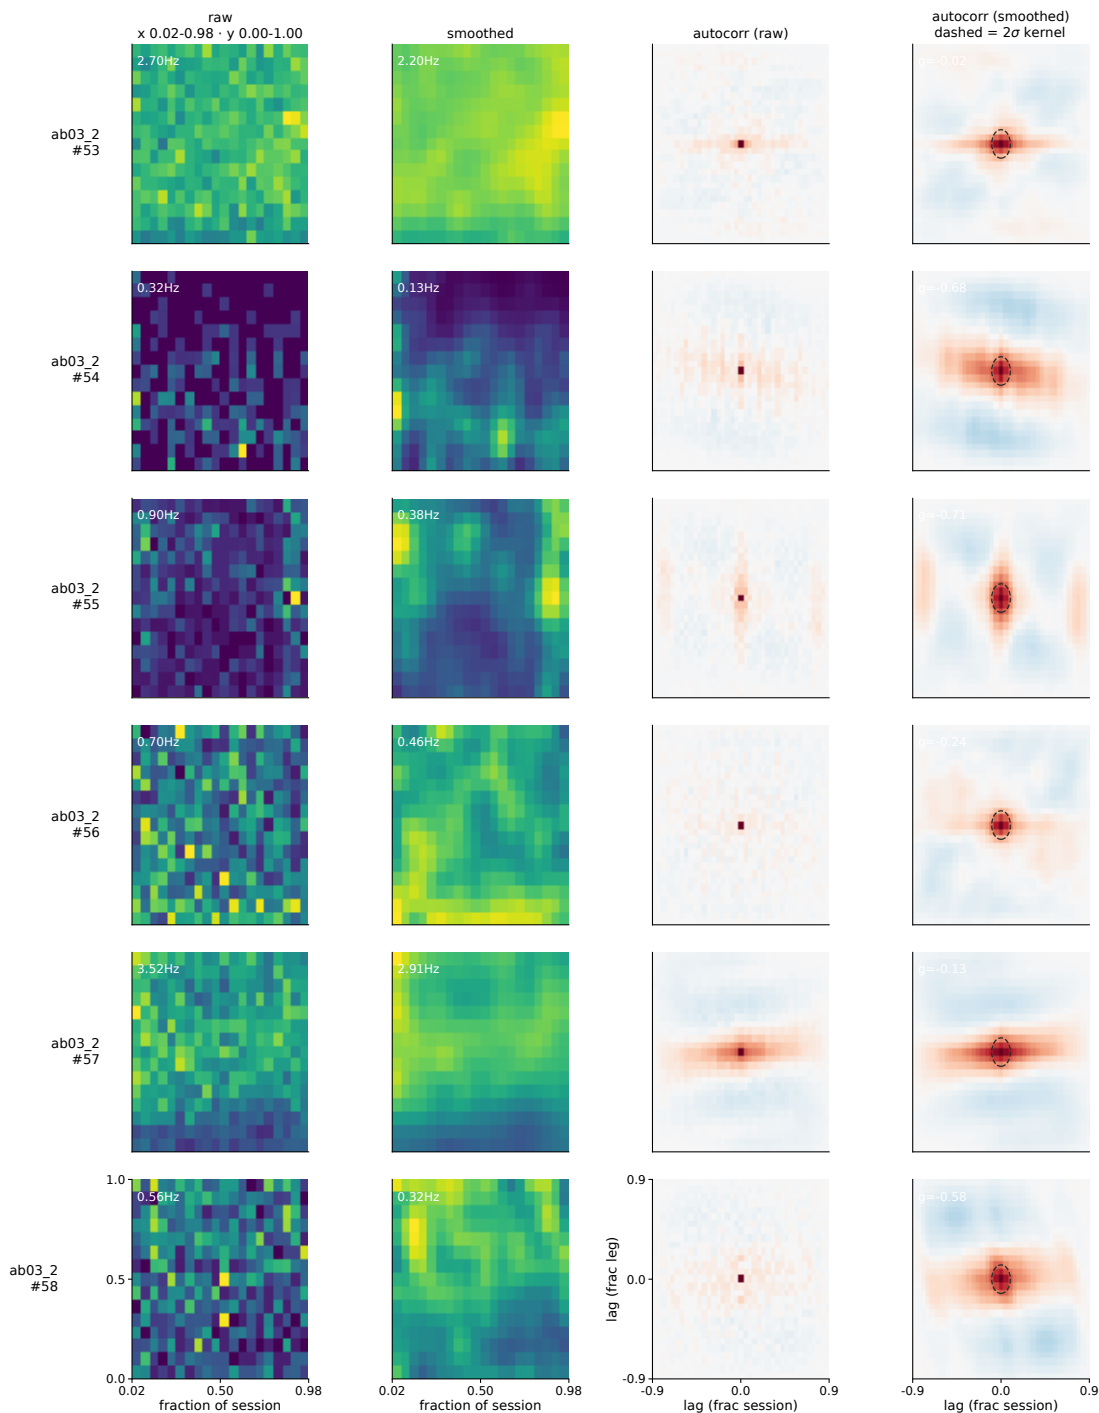


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 186-191 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

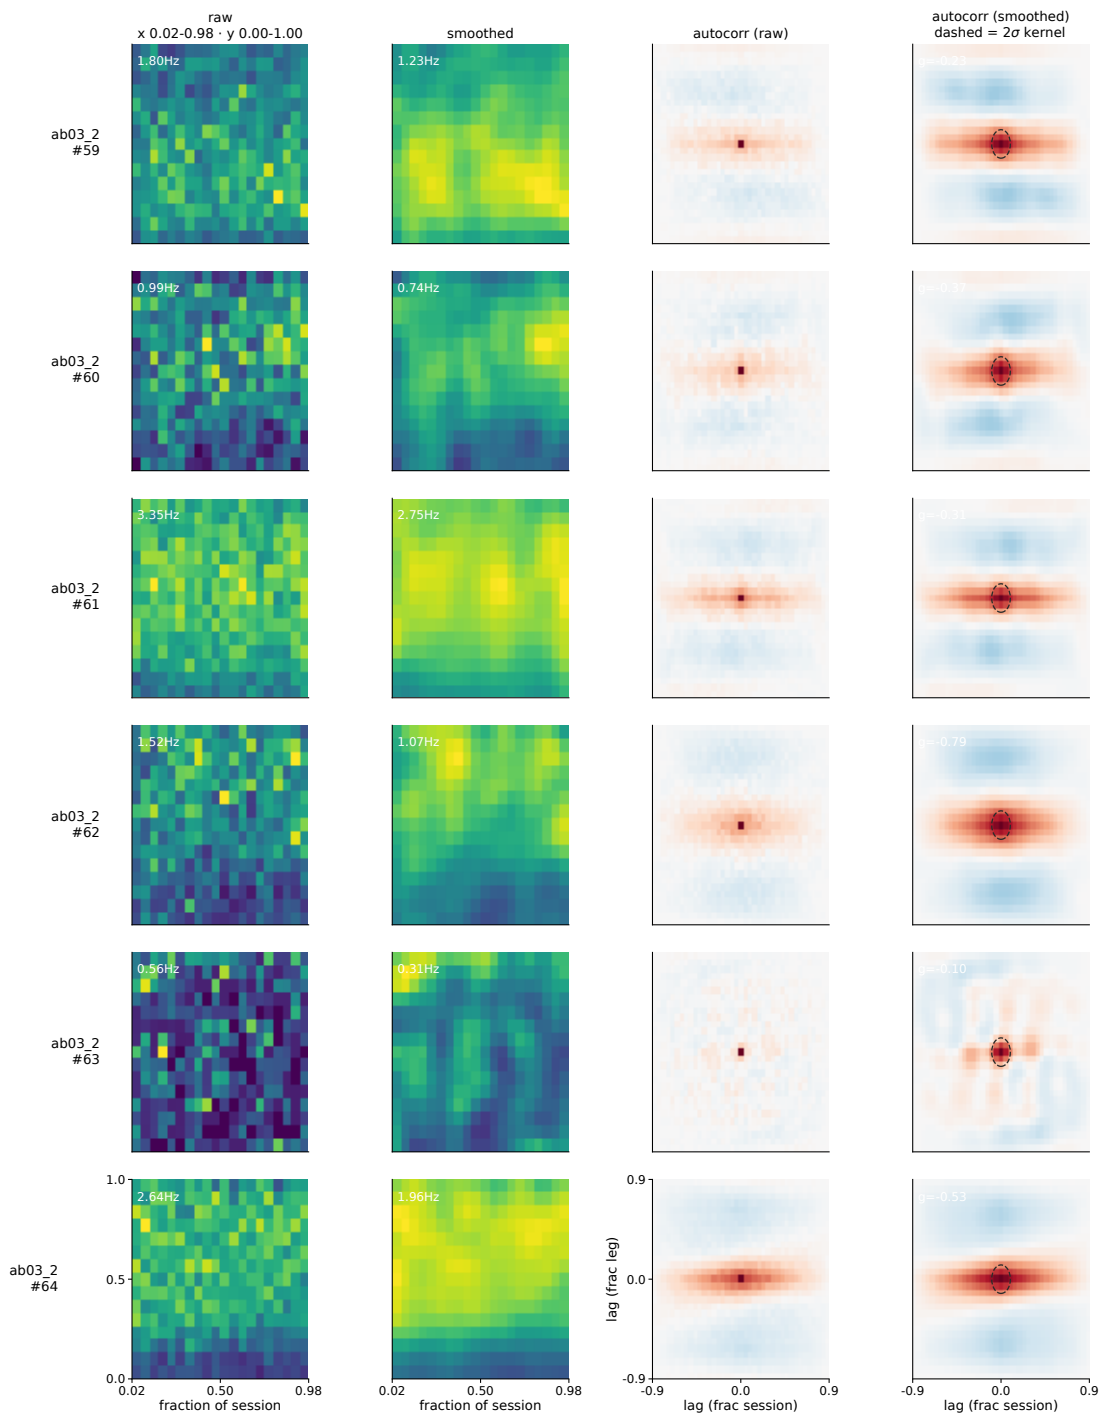


normalised | maps: x = fraction of session, y = fraction of goal transition | autocorr: lag on both axes | neurons 192-197 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

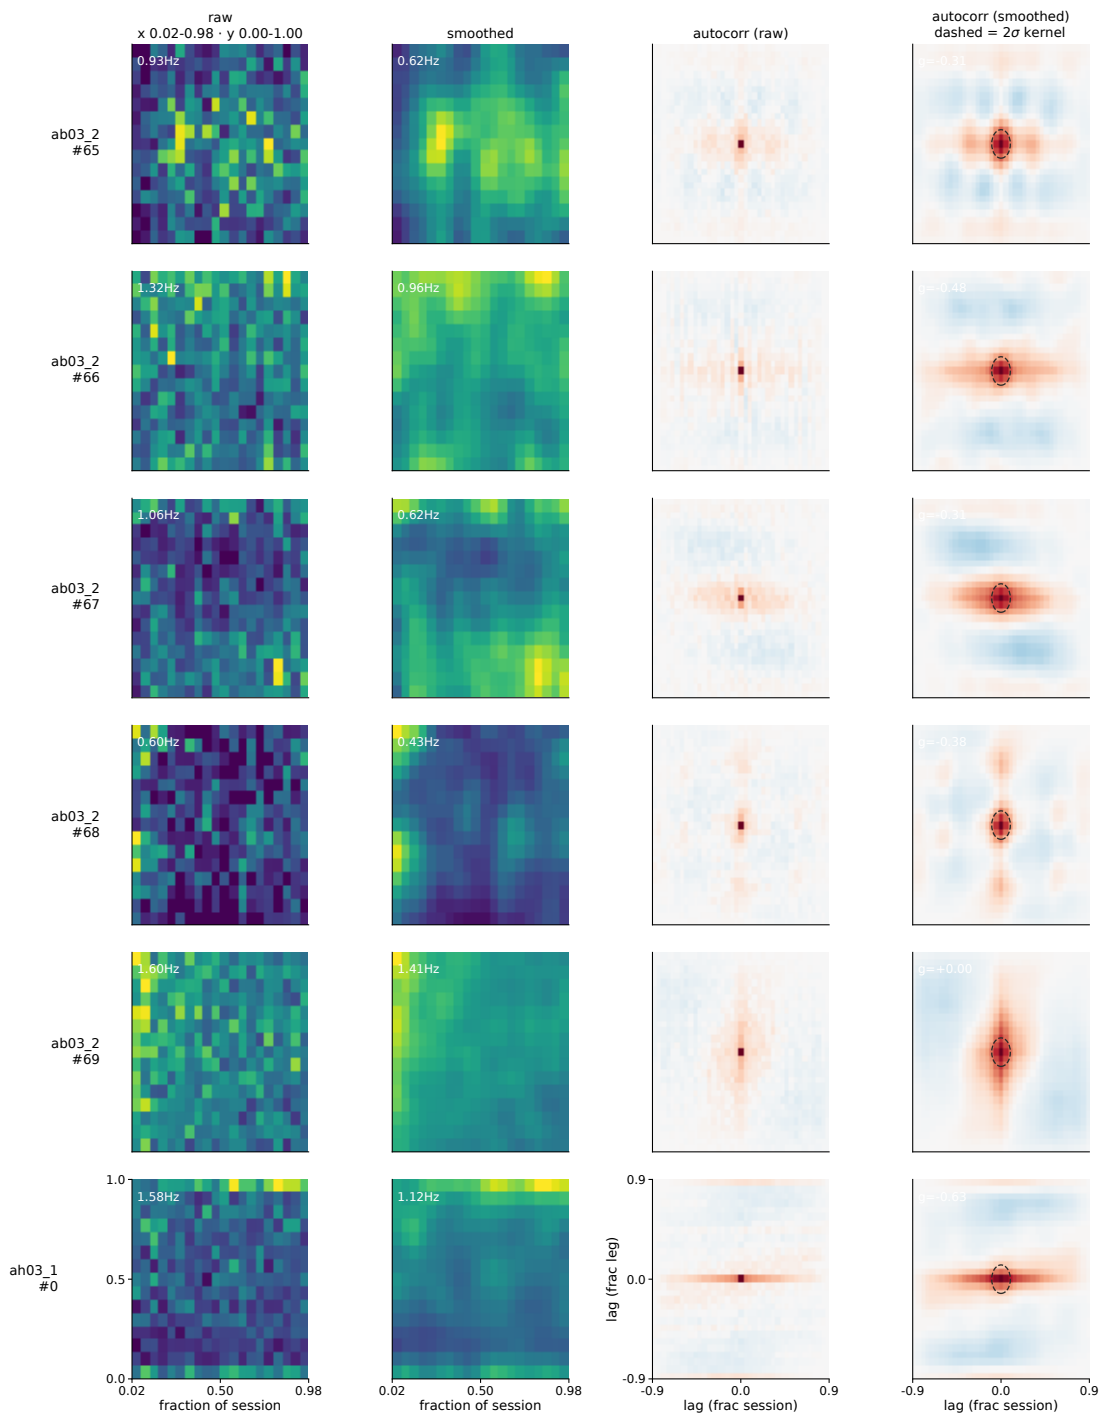


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 198-203 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

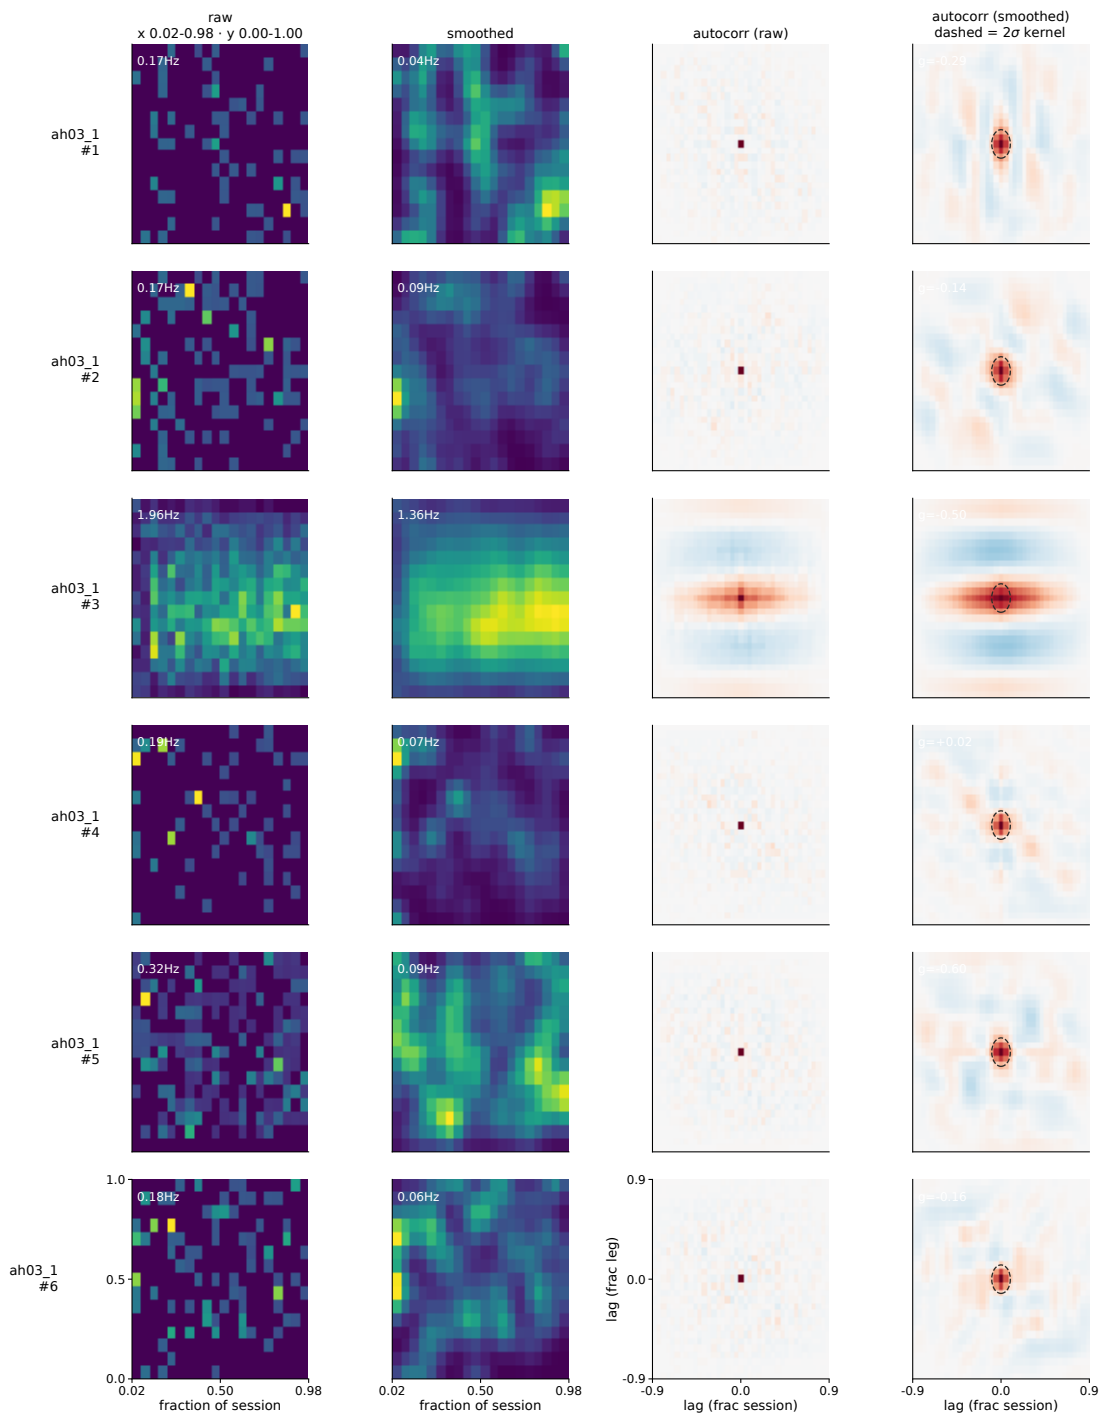


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 204-209 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

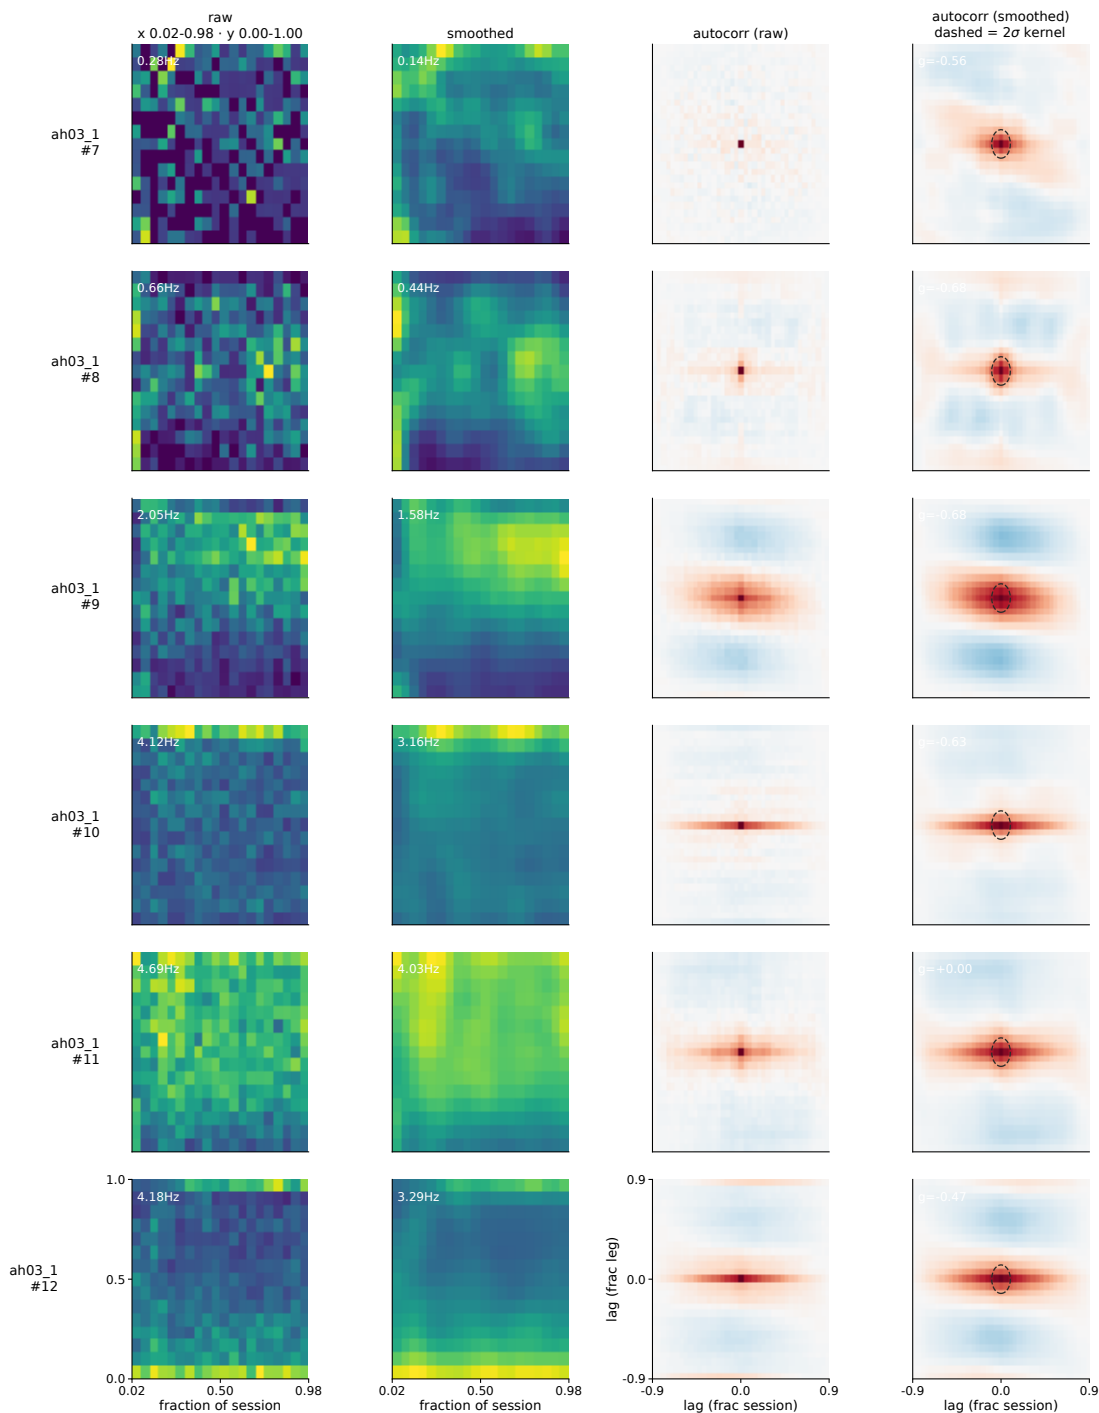


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 210-215 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

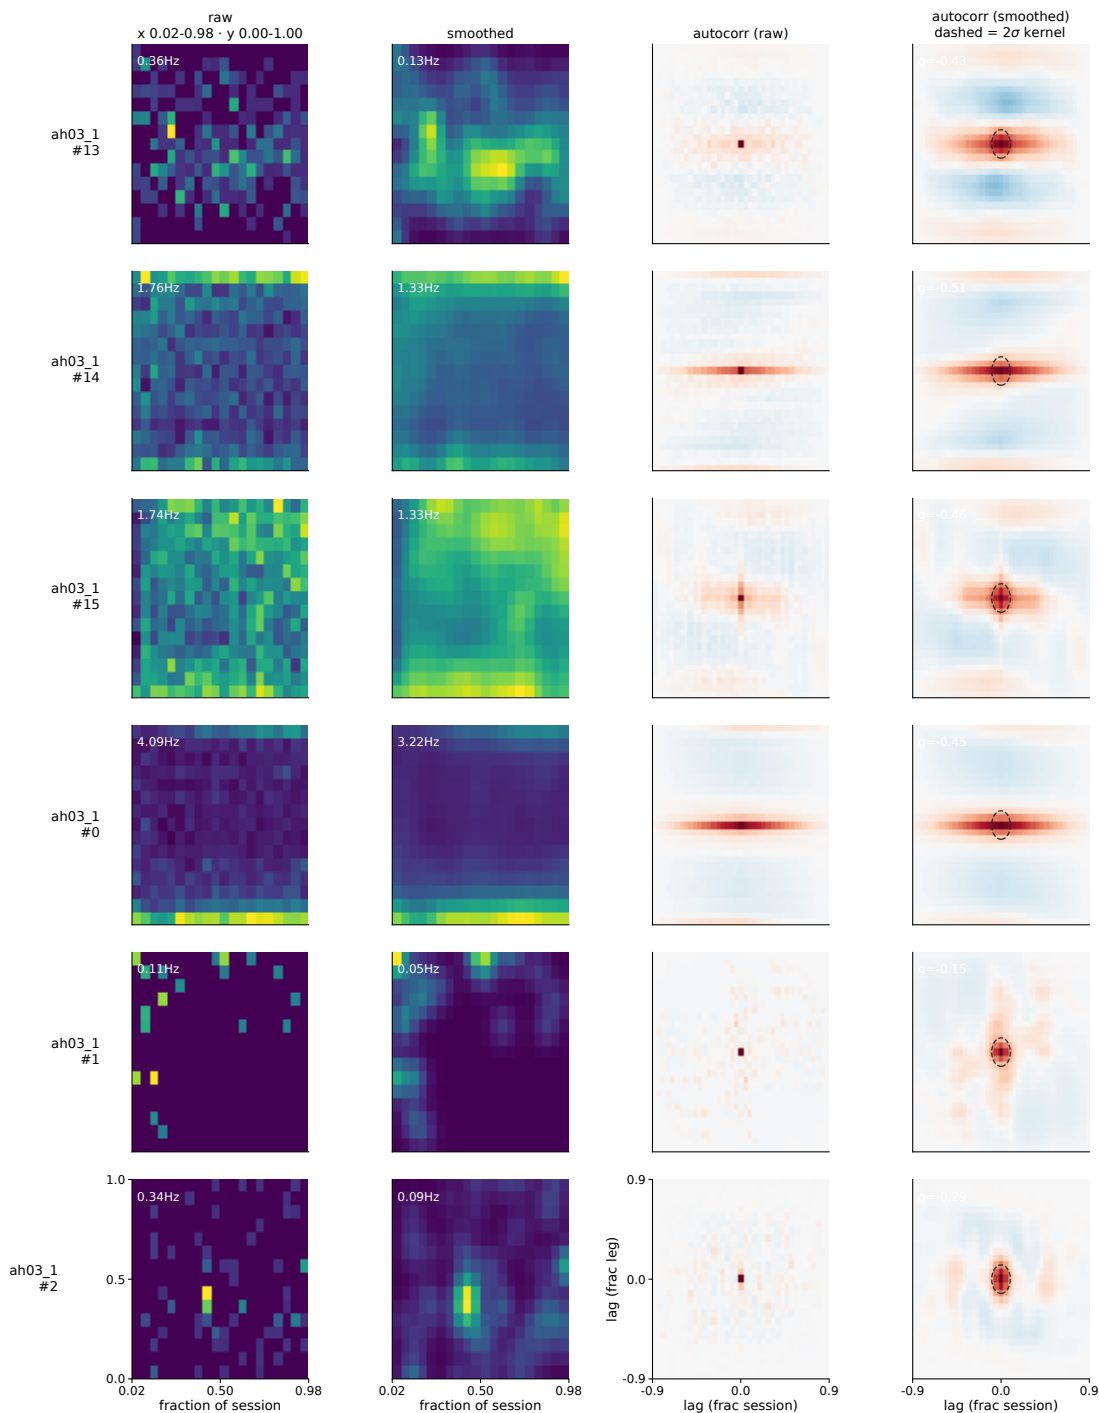


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 216-221 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

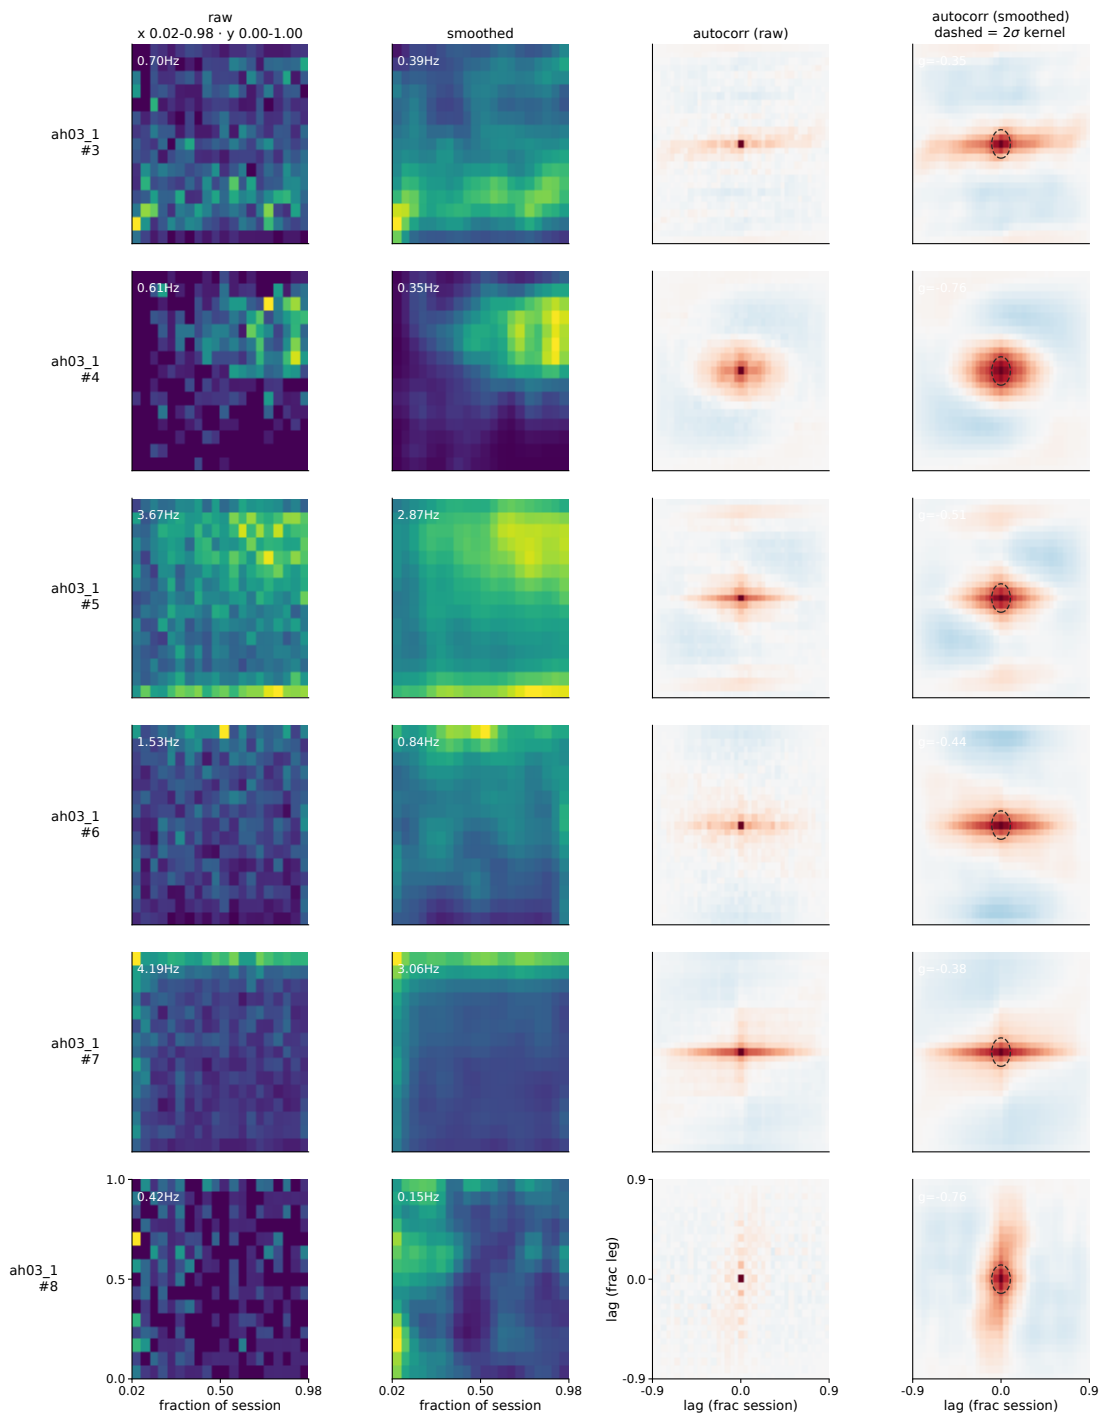


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 222-227 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

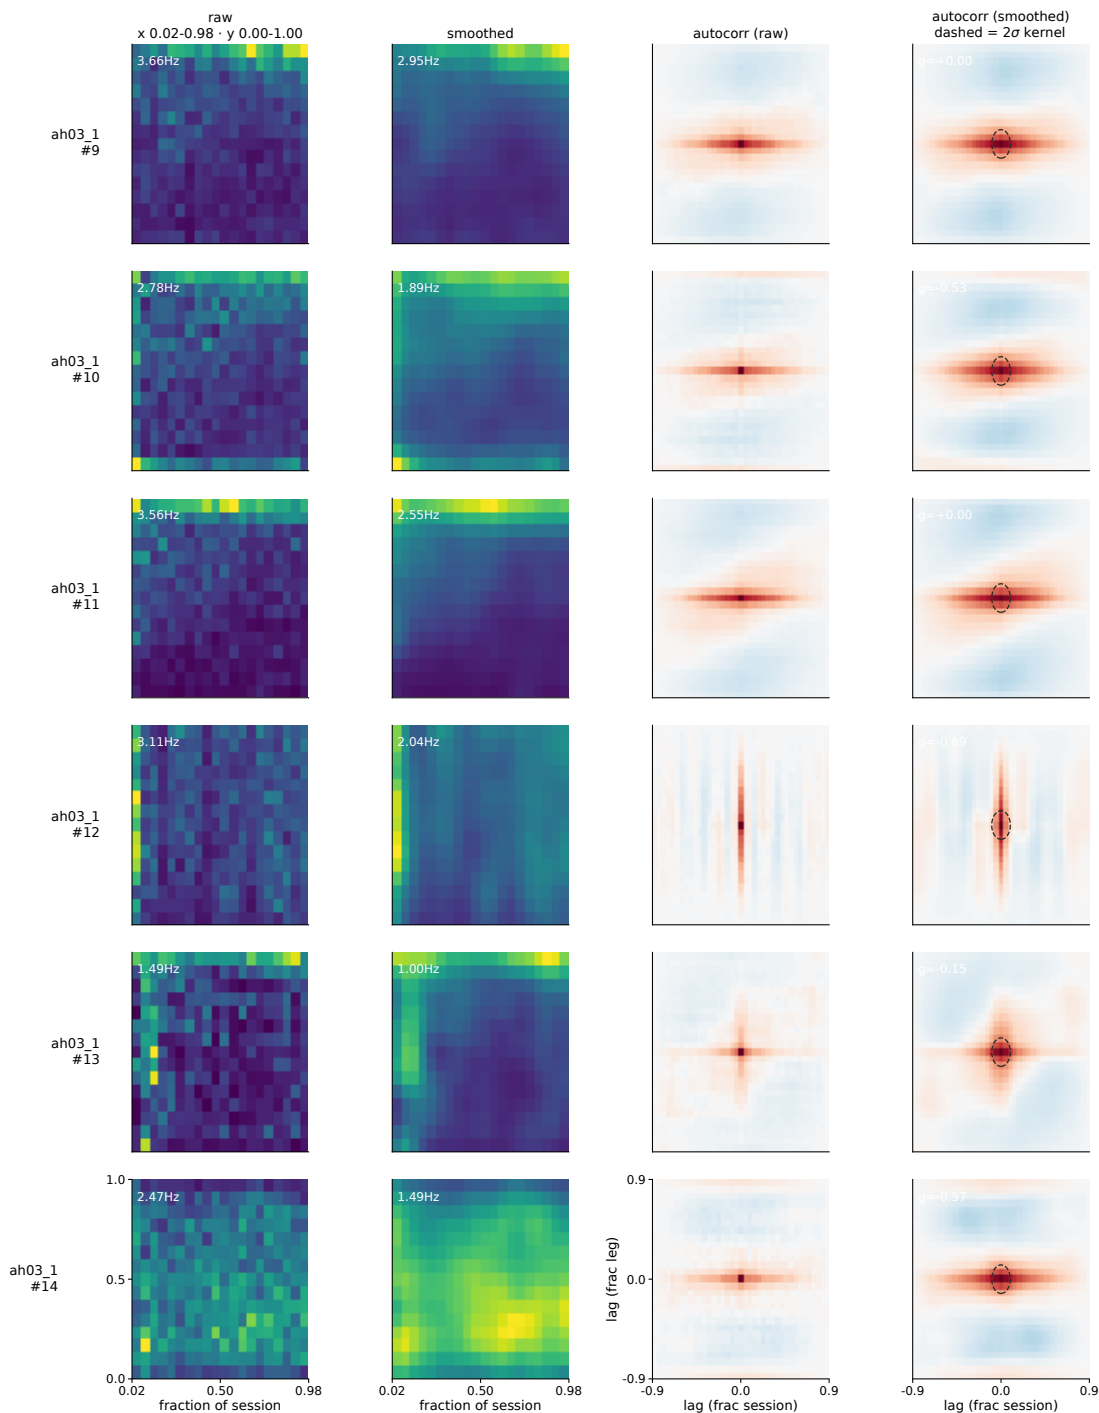


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 228-233 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

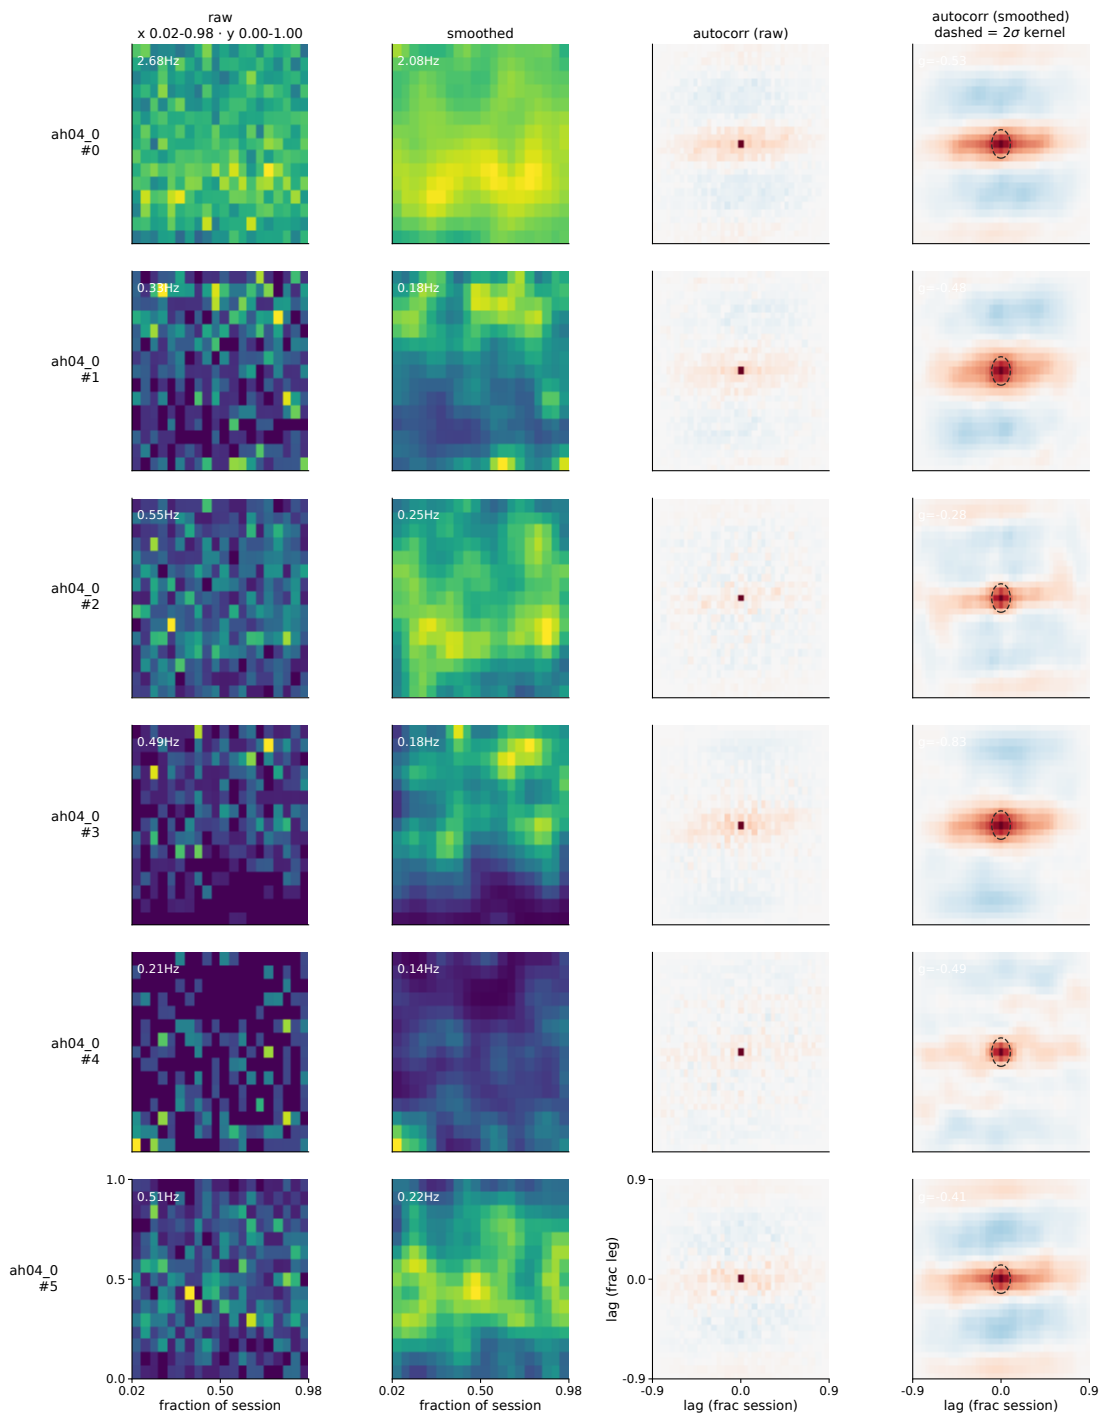


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 234-239 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

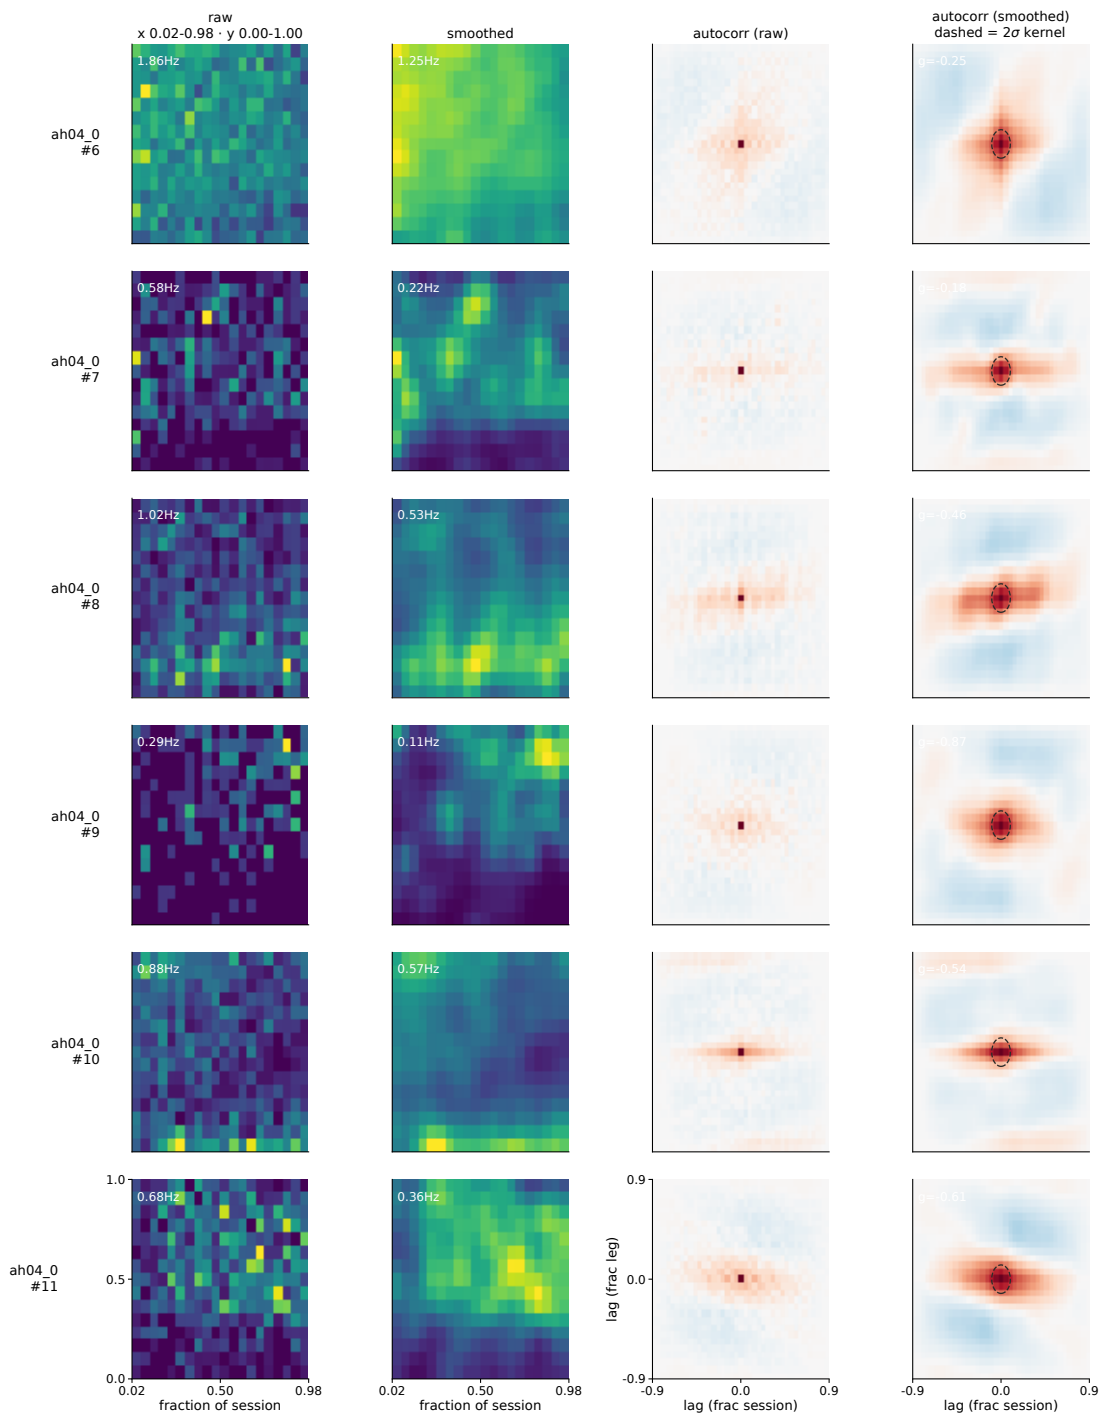


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 240-245 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

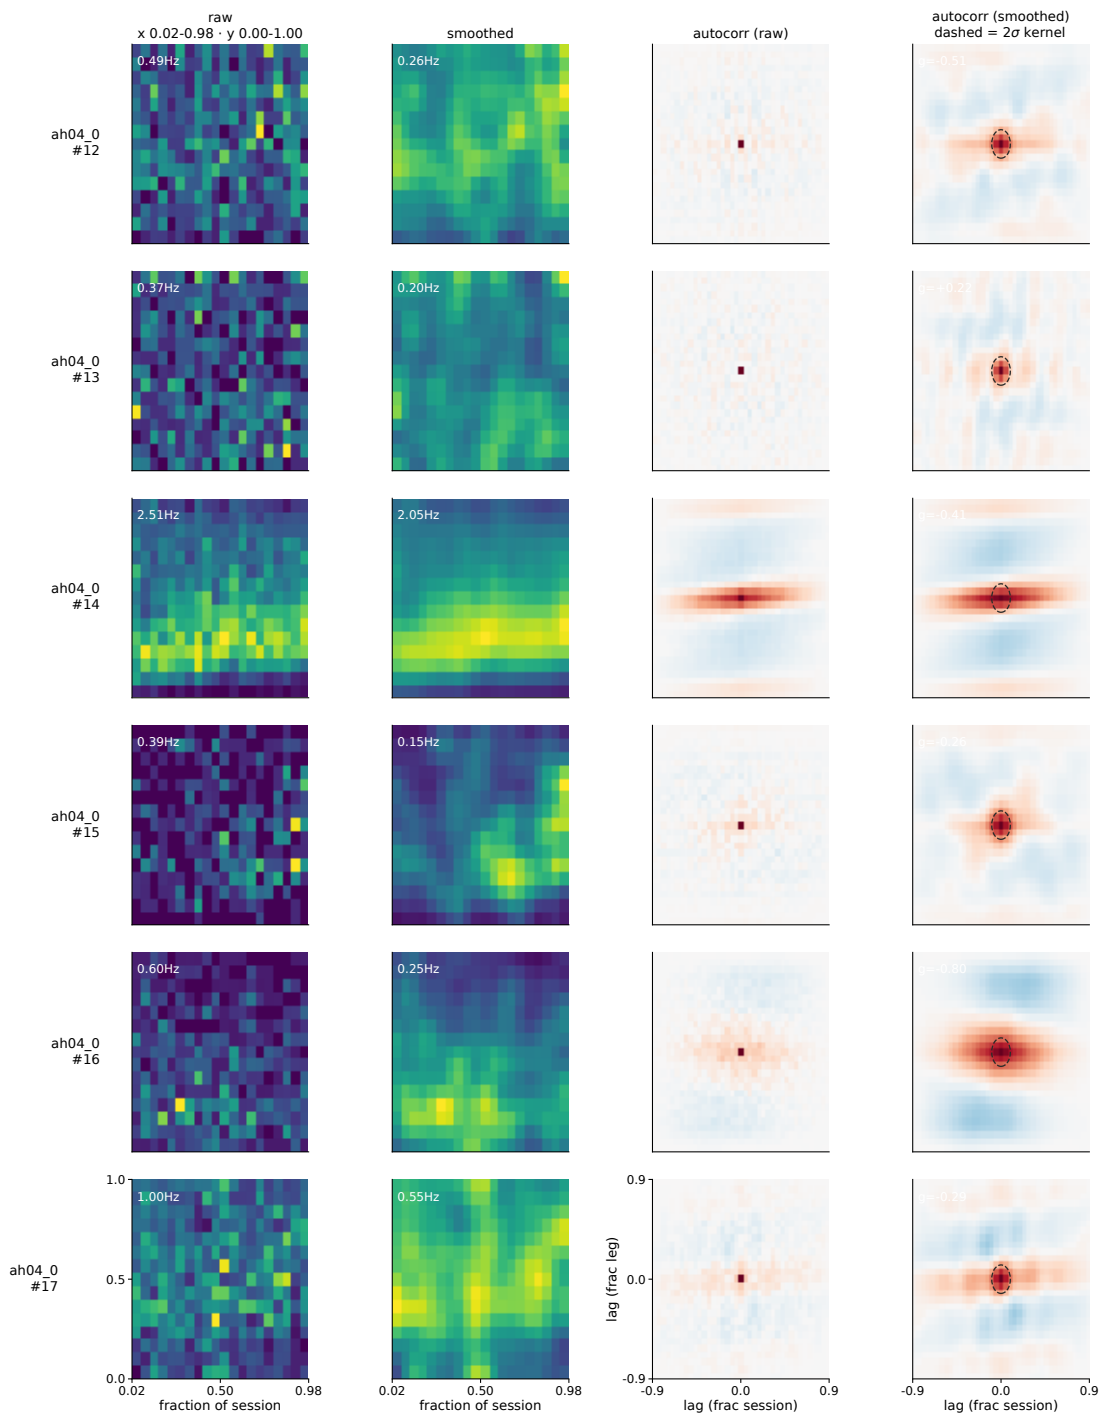


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 246-251 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

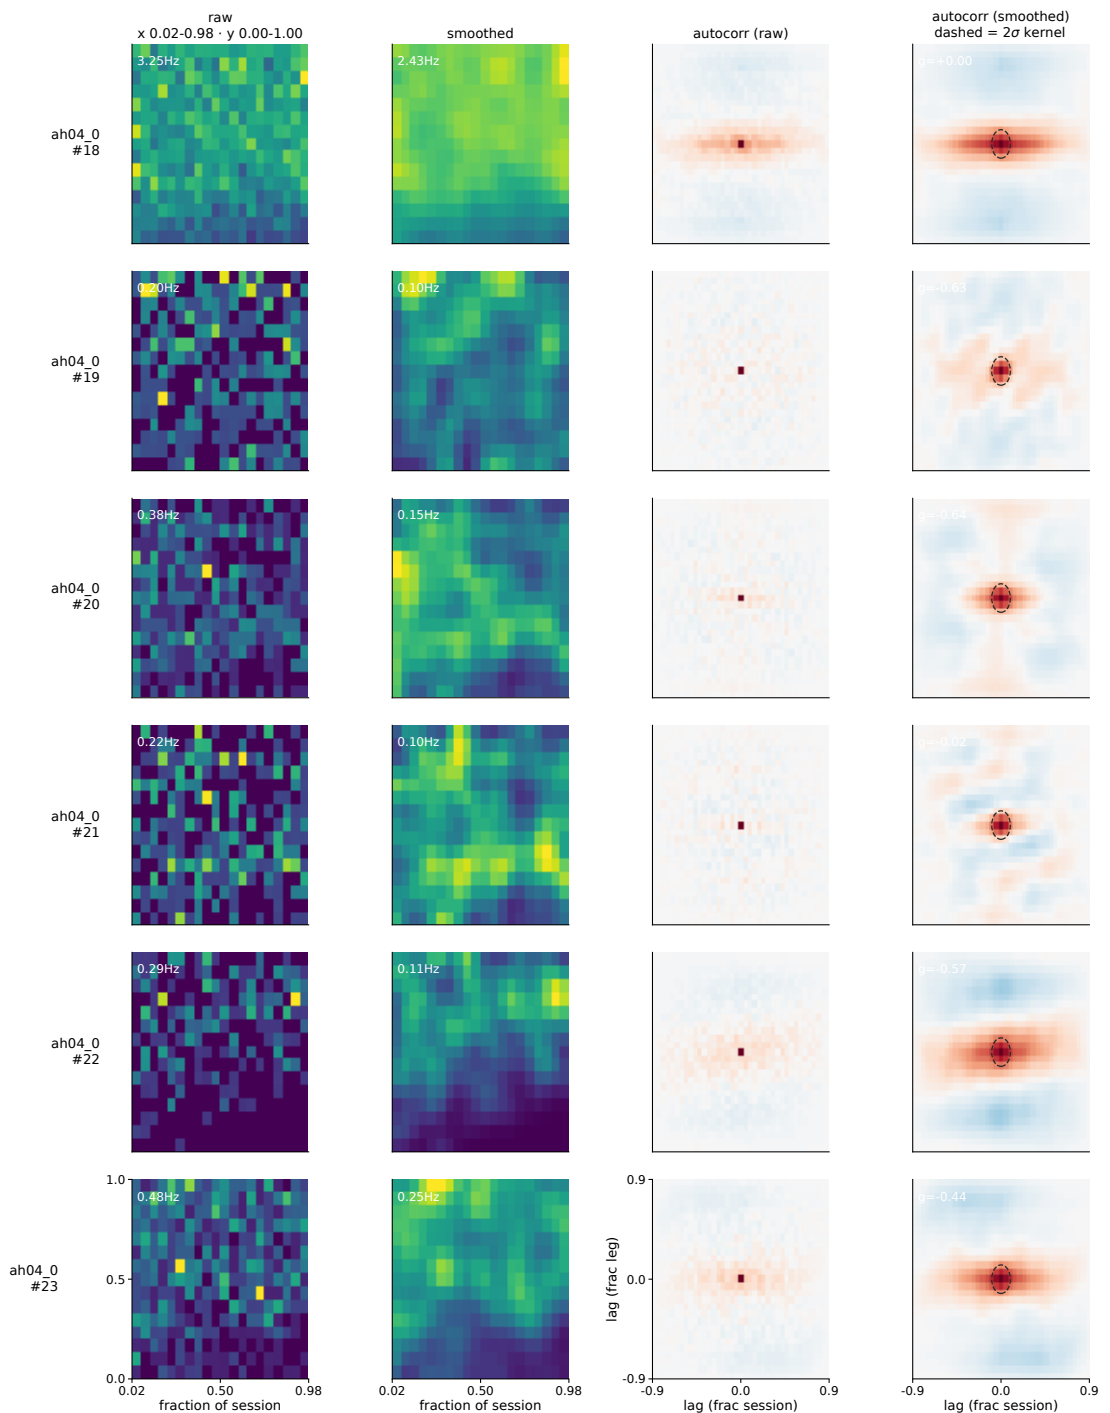


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 252-257 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

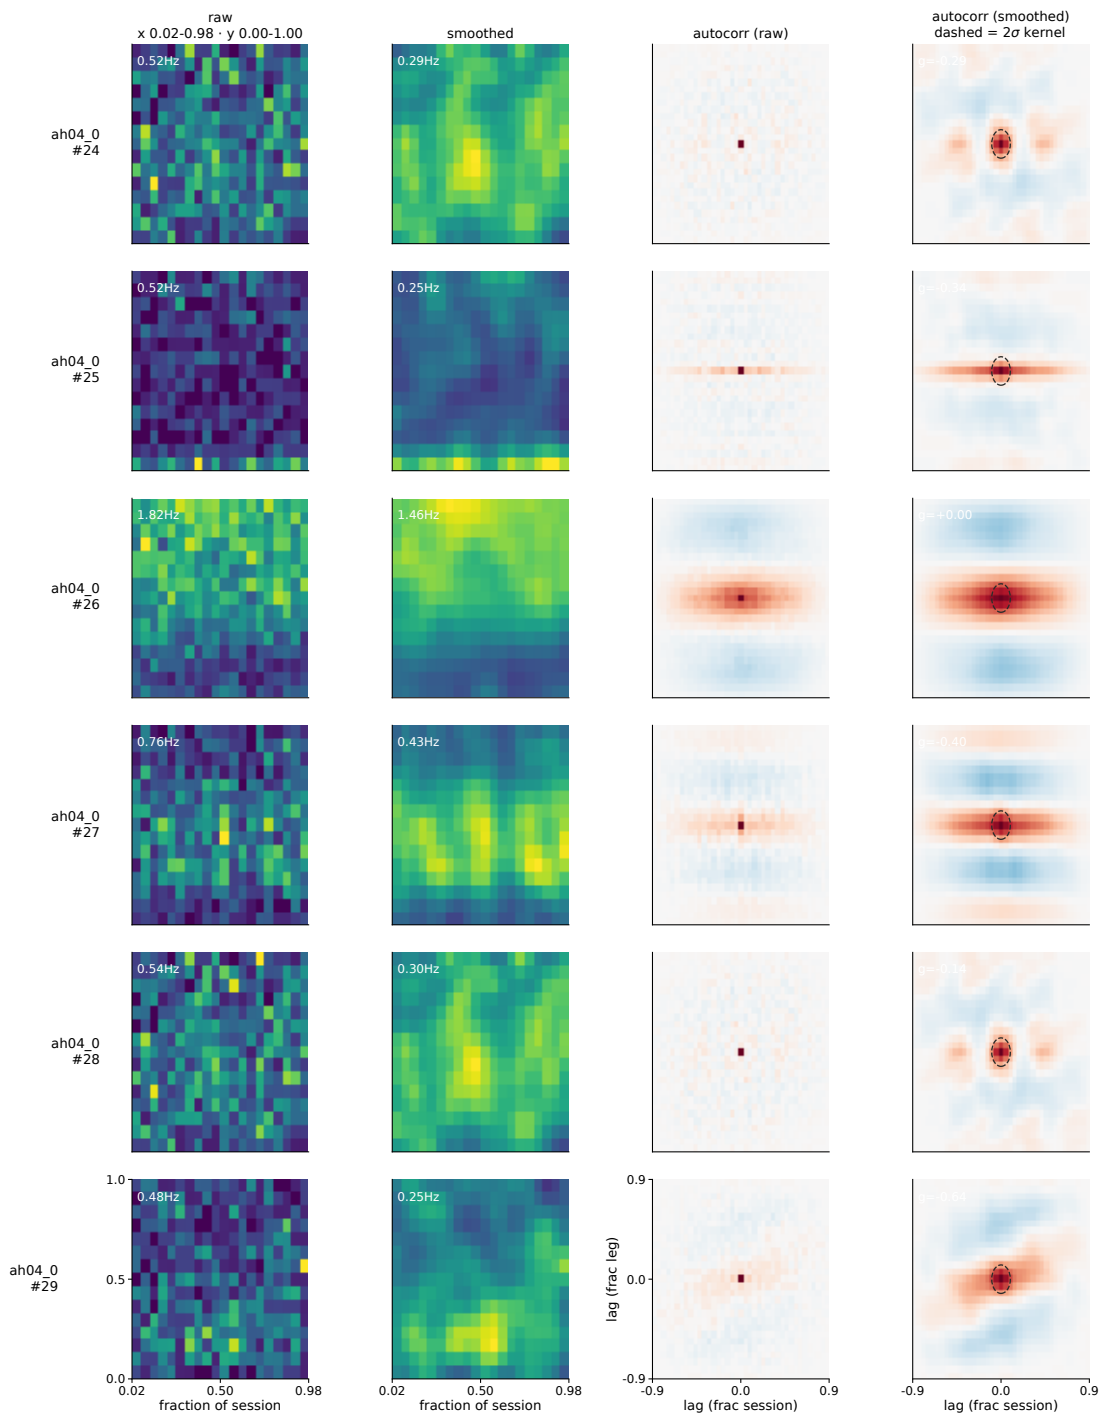


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 258-263 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

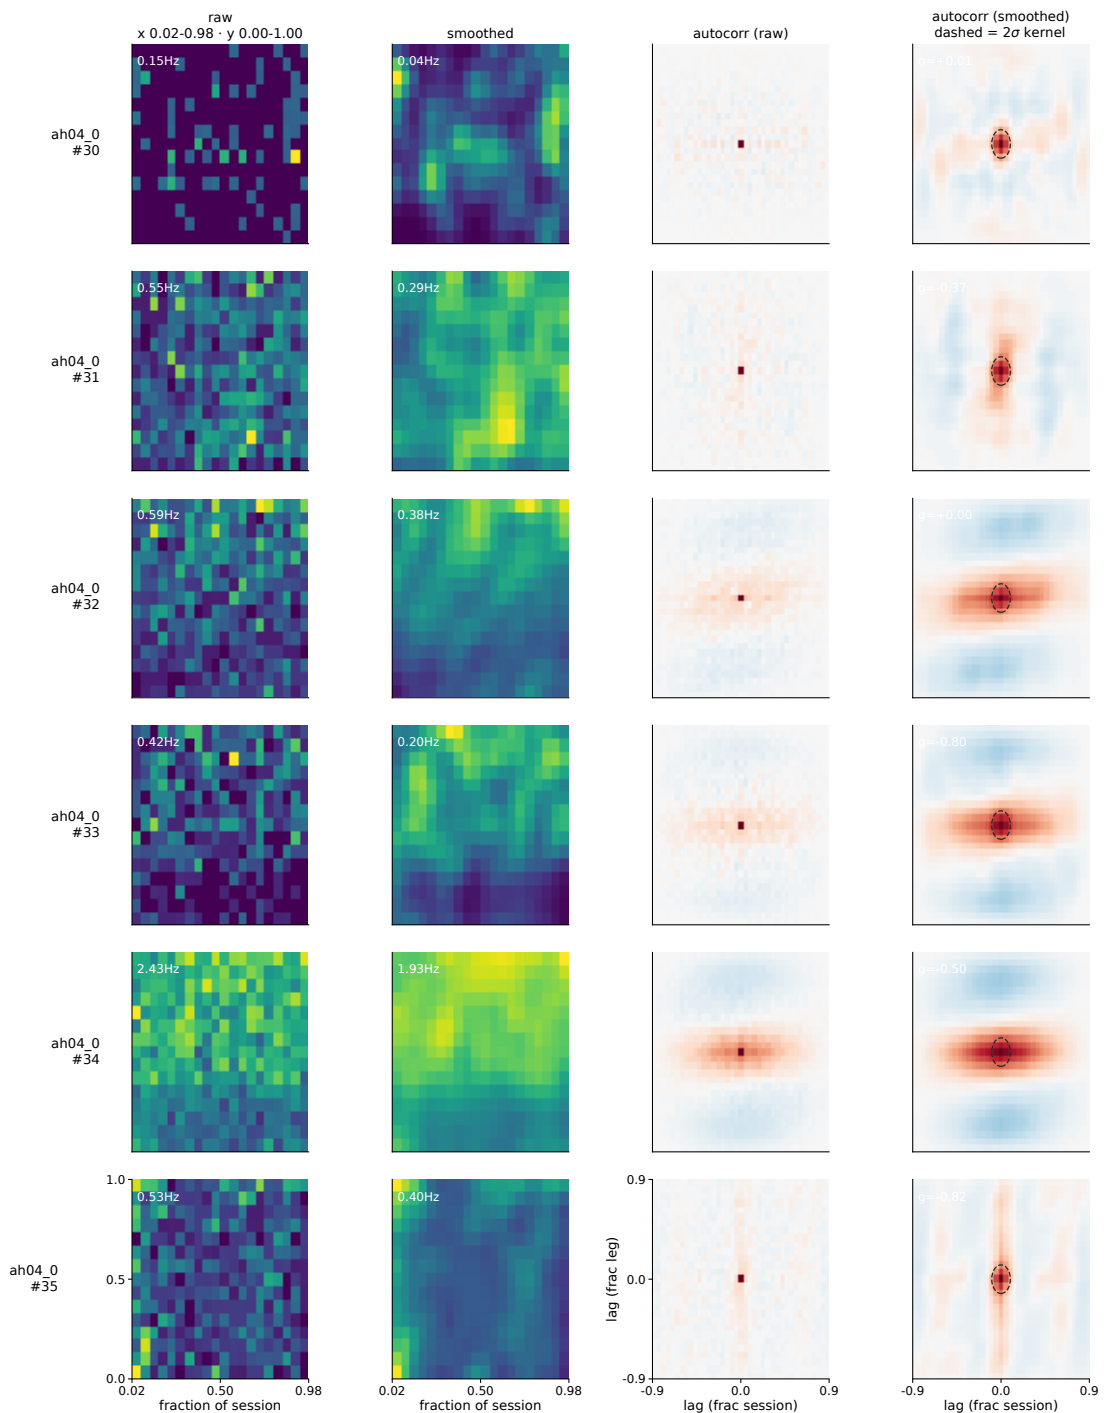


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 264-269 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

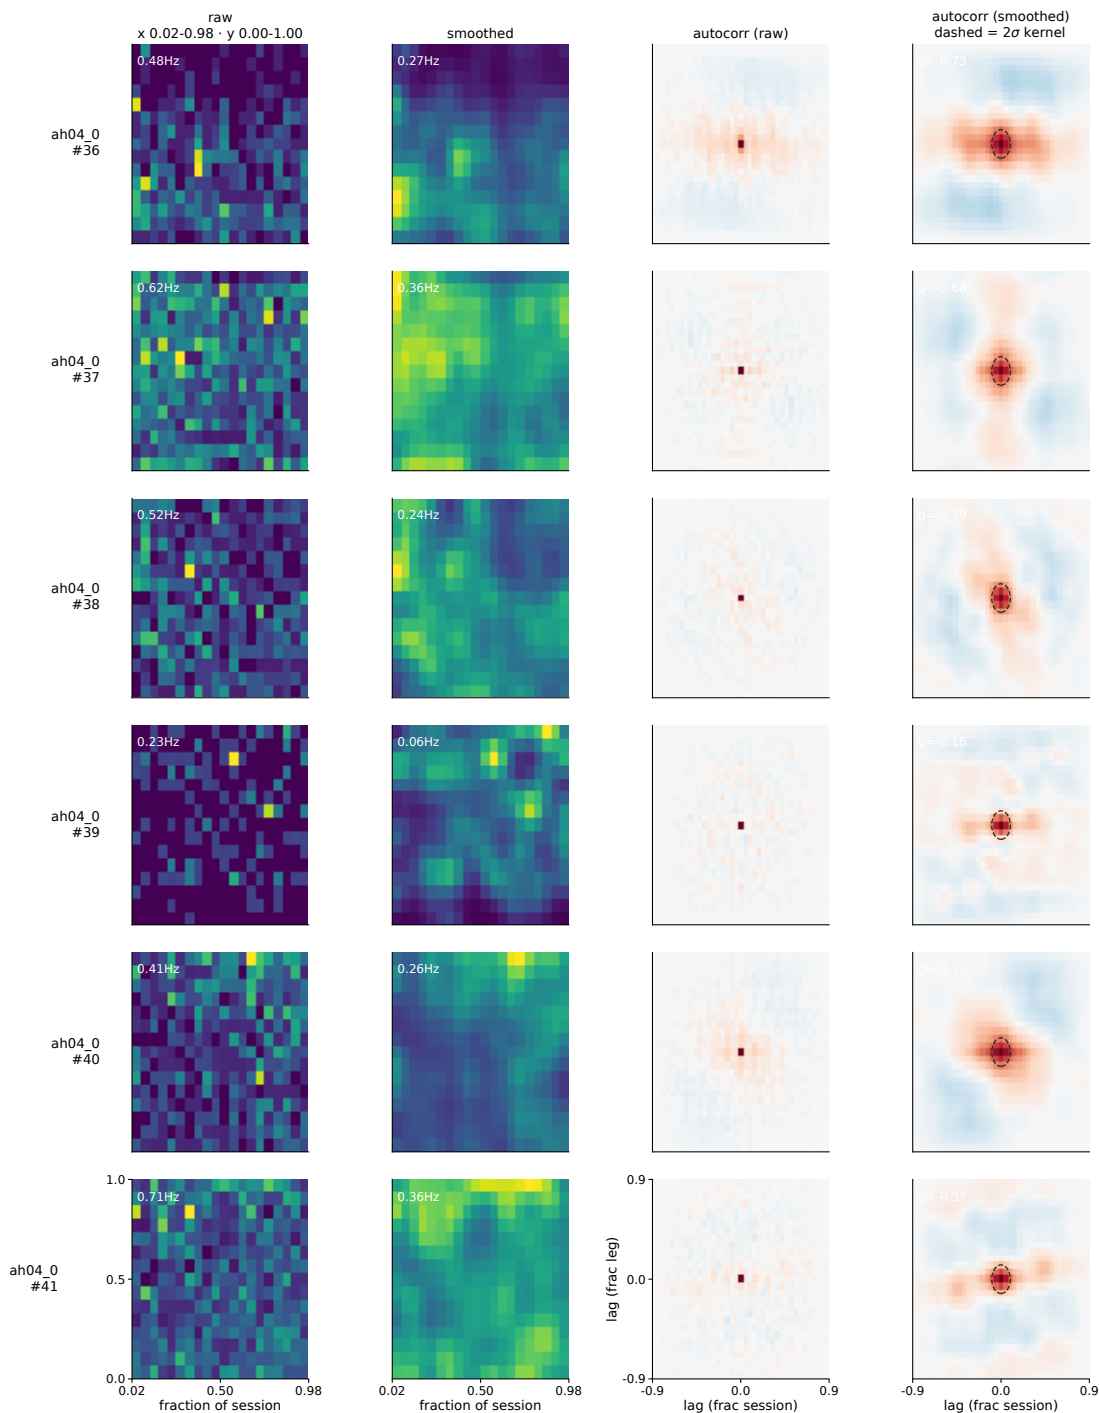


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 270-275 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

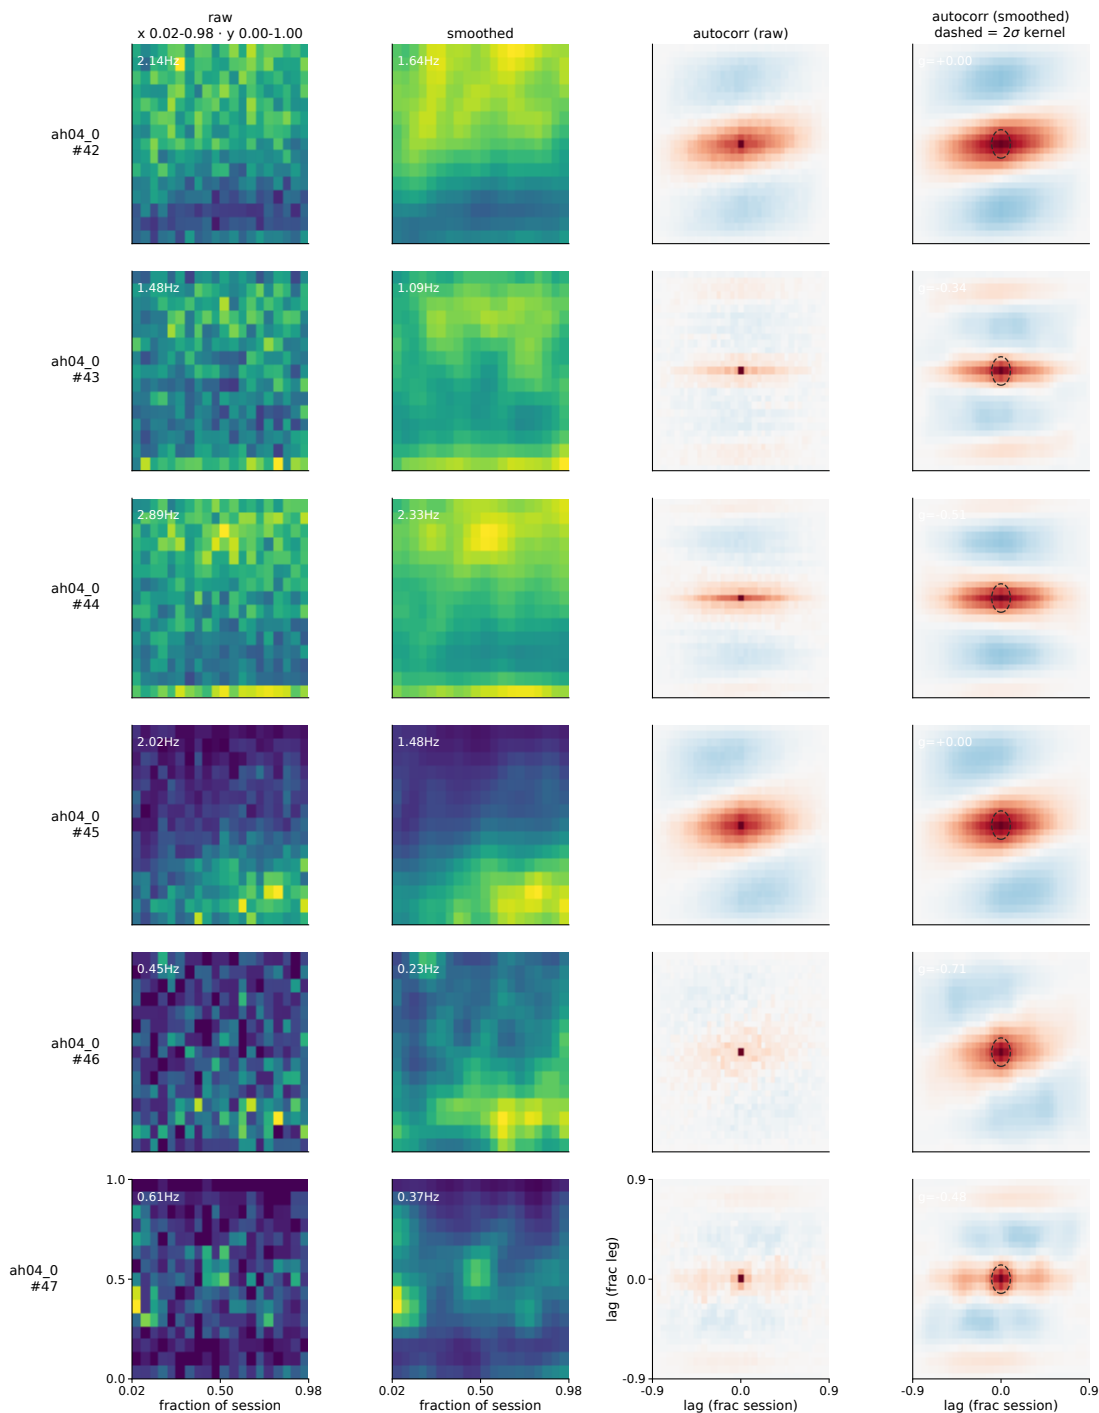


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 276-281 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

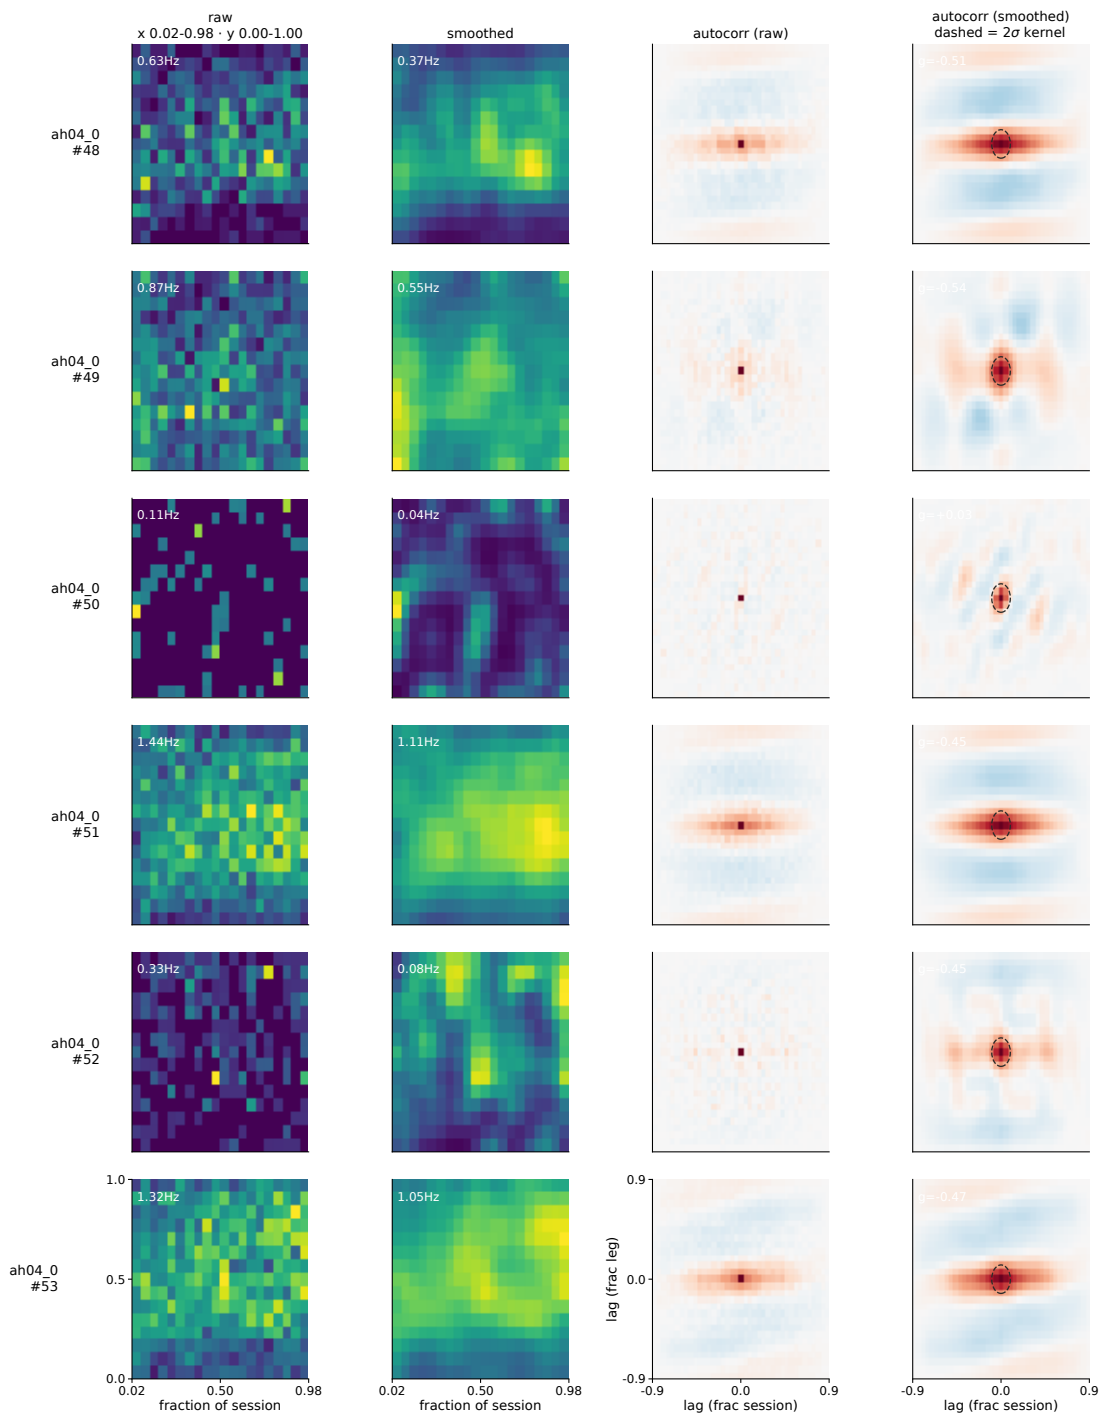


normalised | maps: x = fraction of session, y = fraction of goal transition | autocorr: lag on both axes | neurons 282-287 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

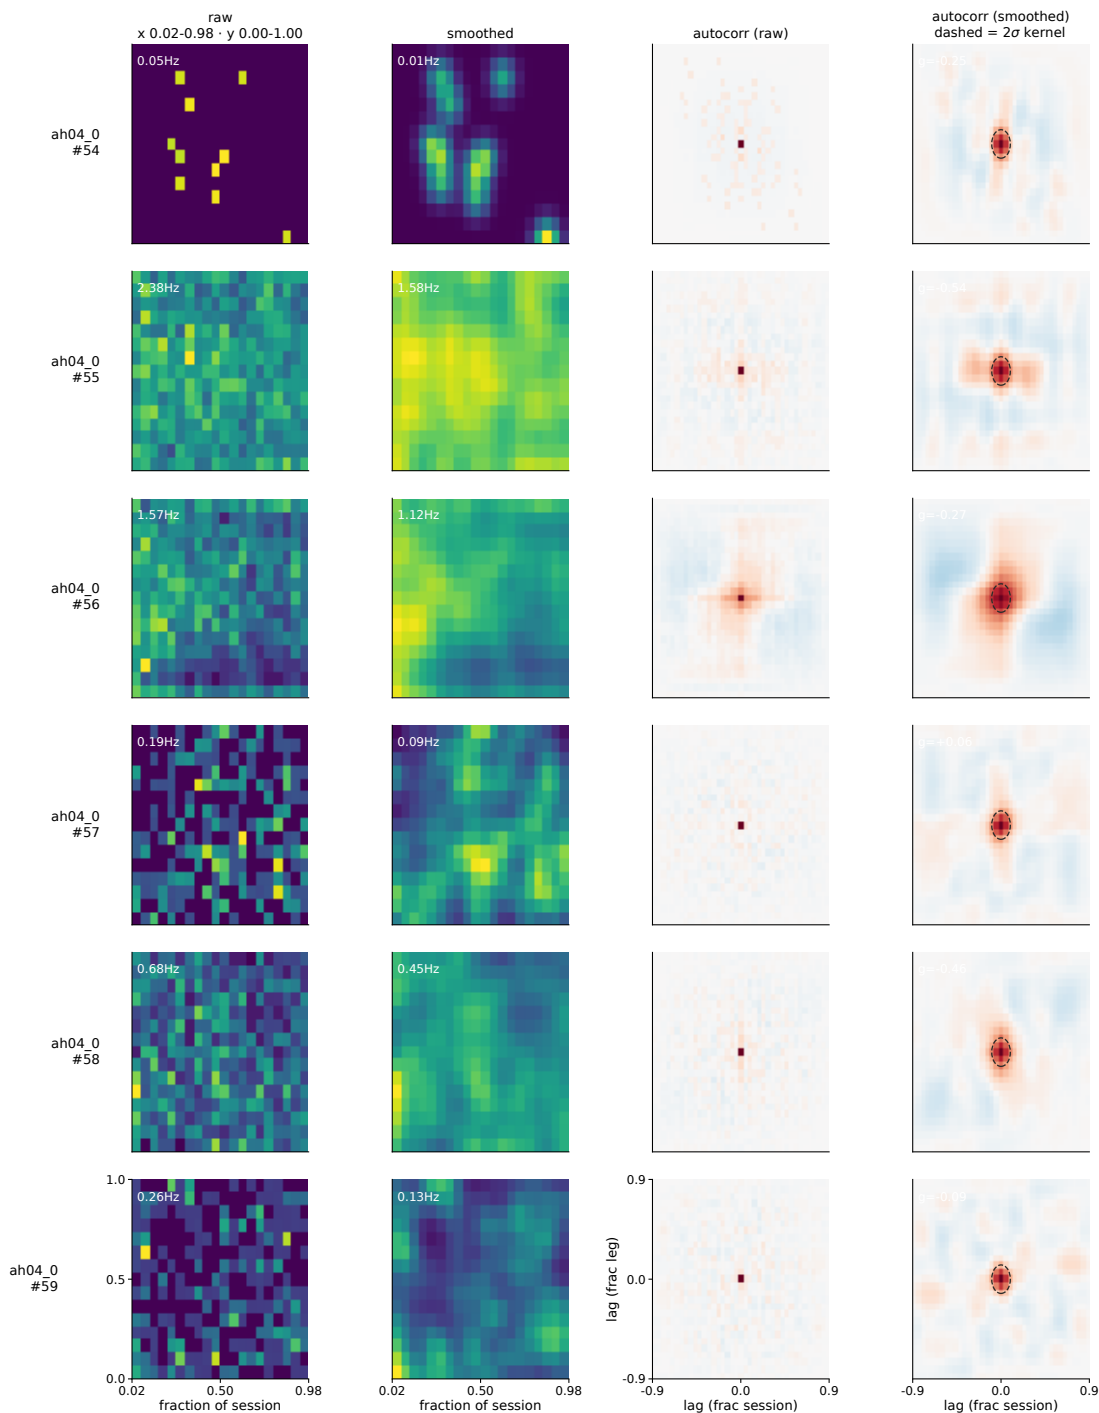


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 288-293 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

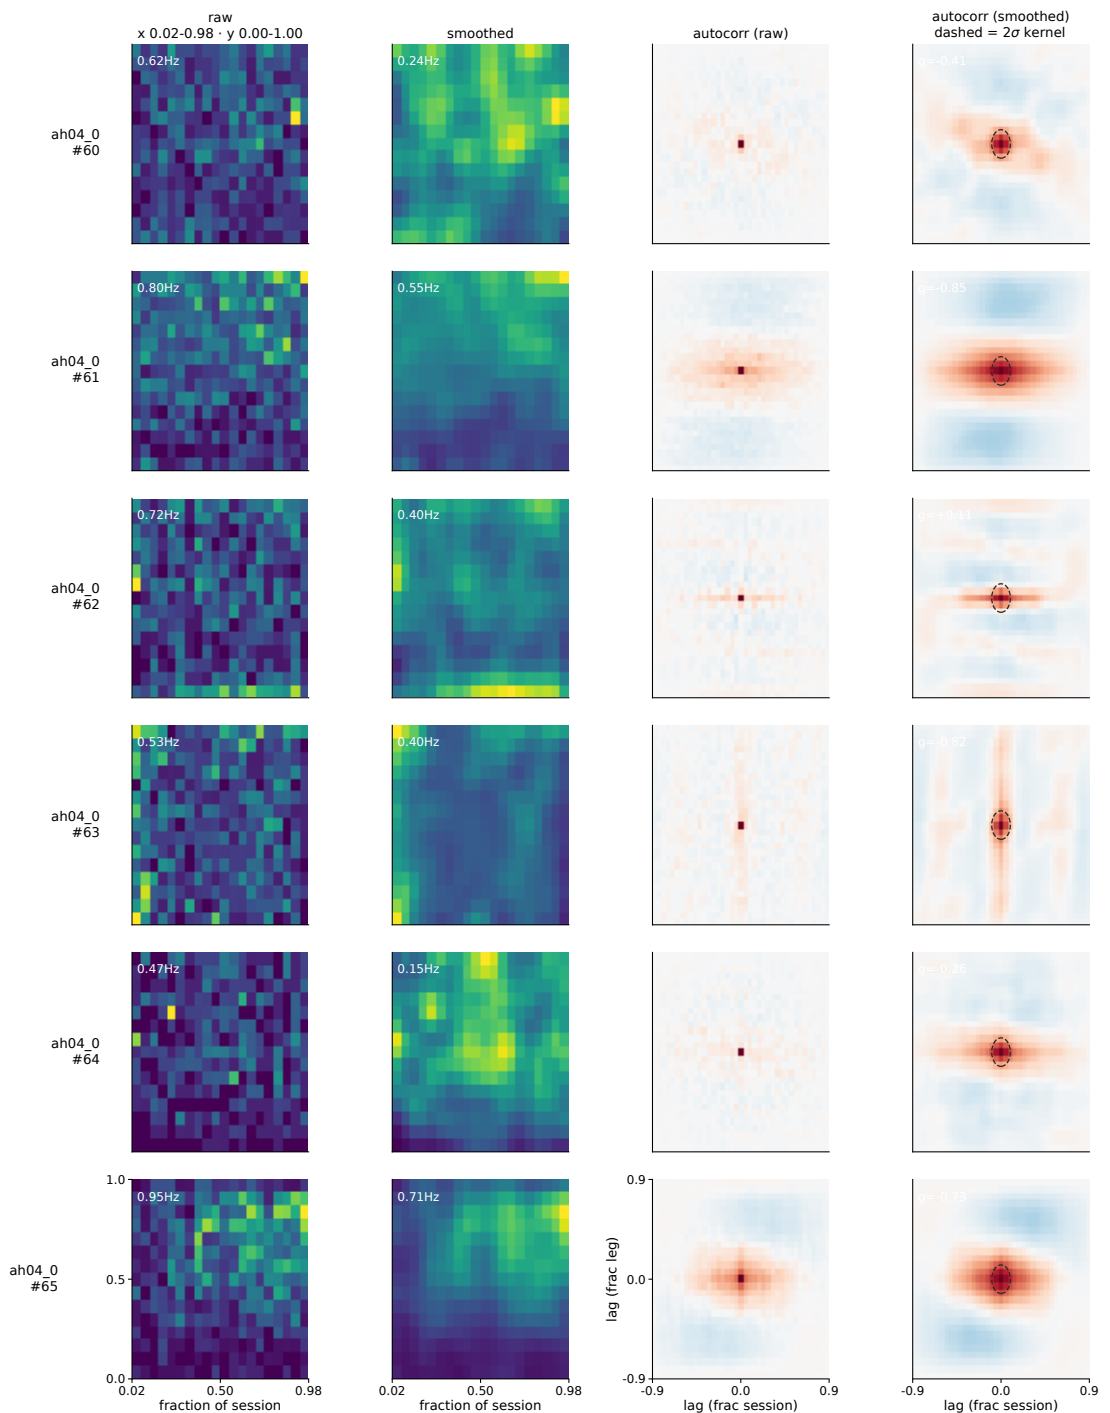


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 294-299 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

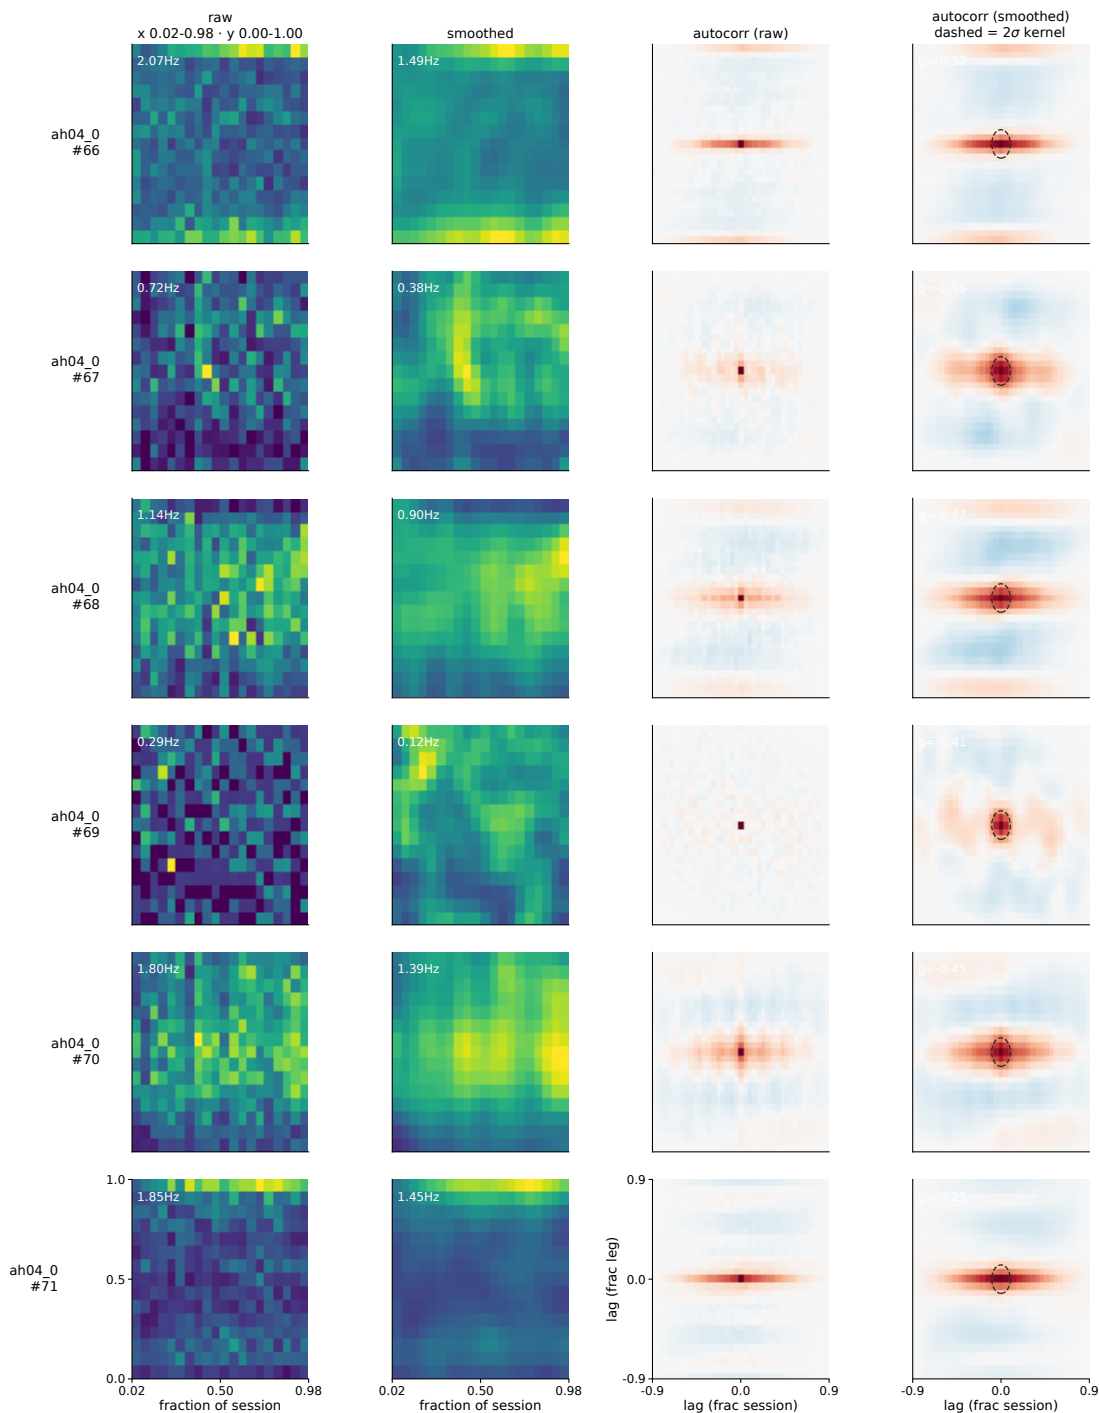


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 300-305 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

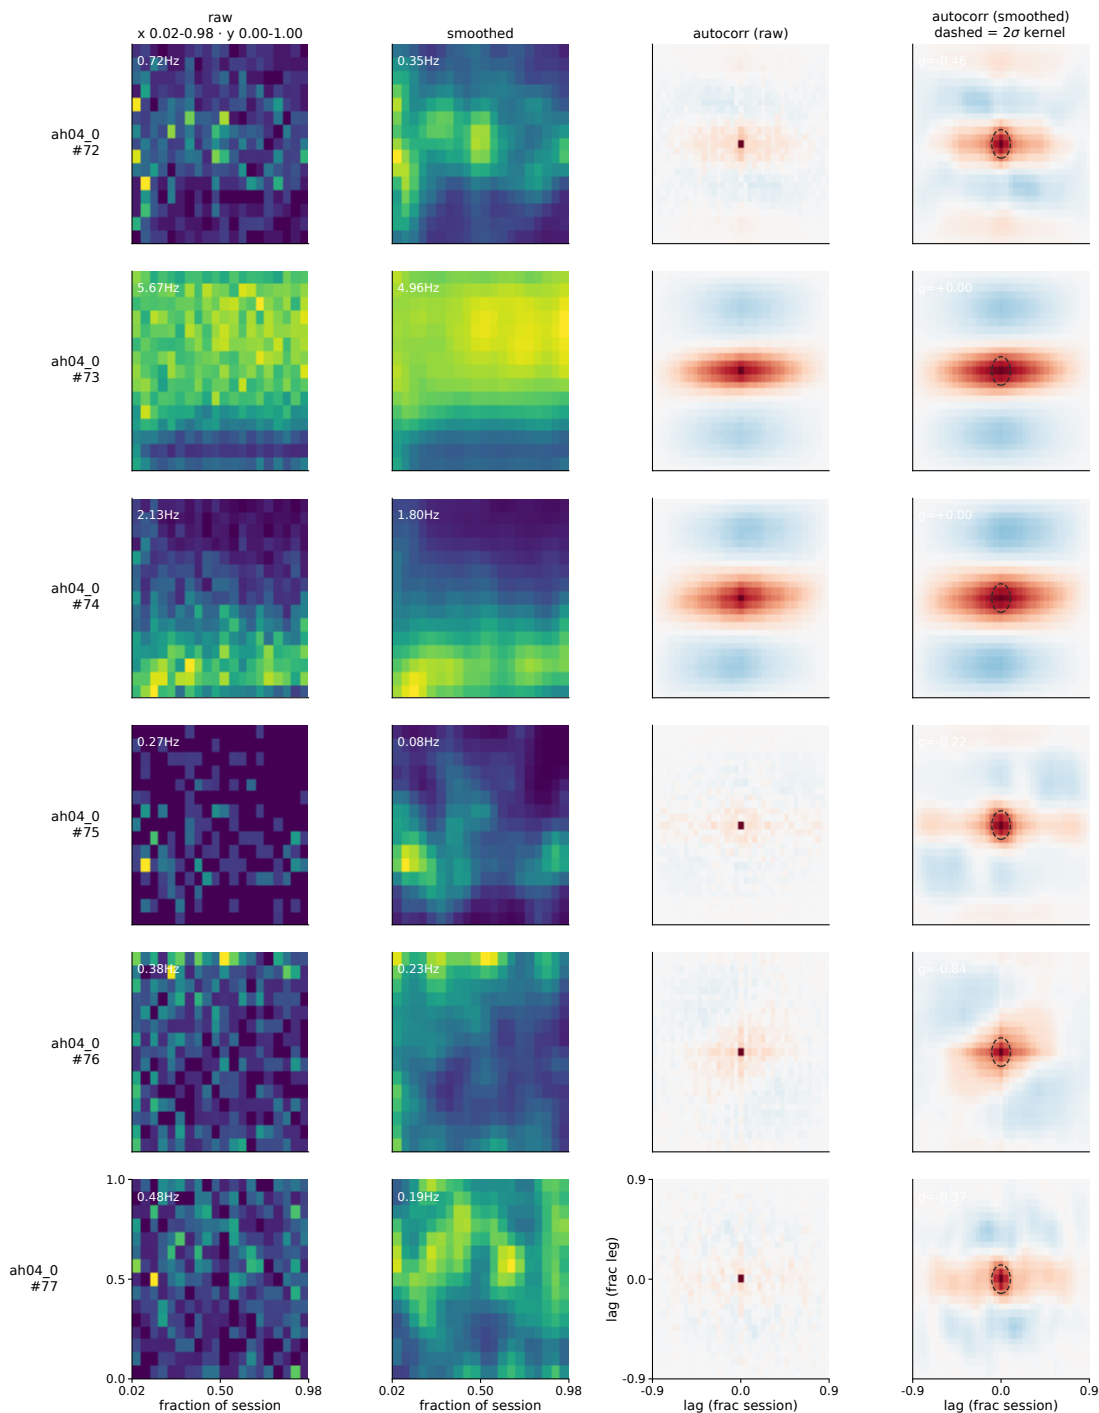


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 306-311 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

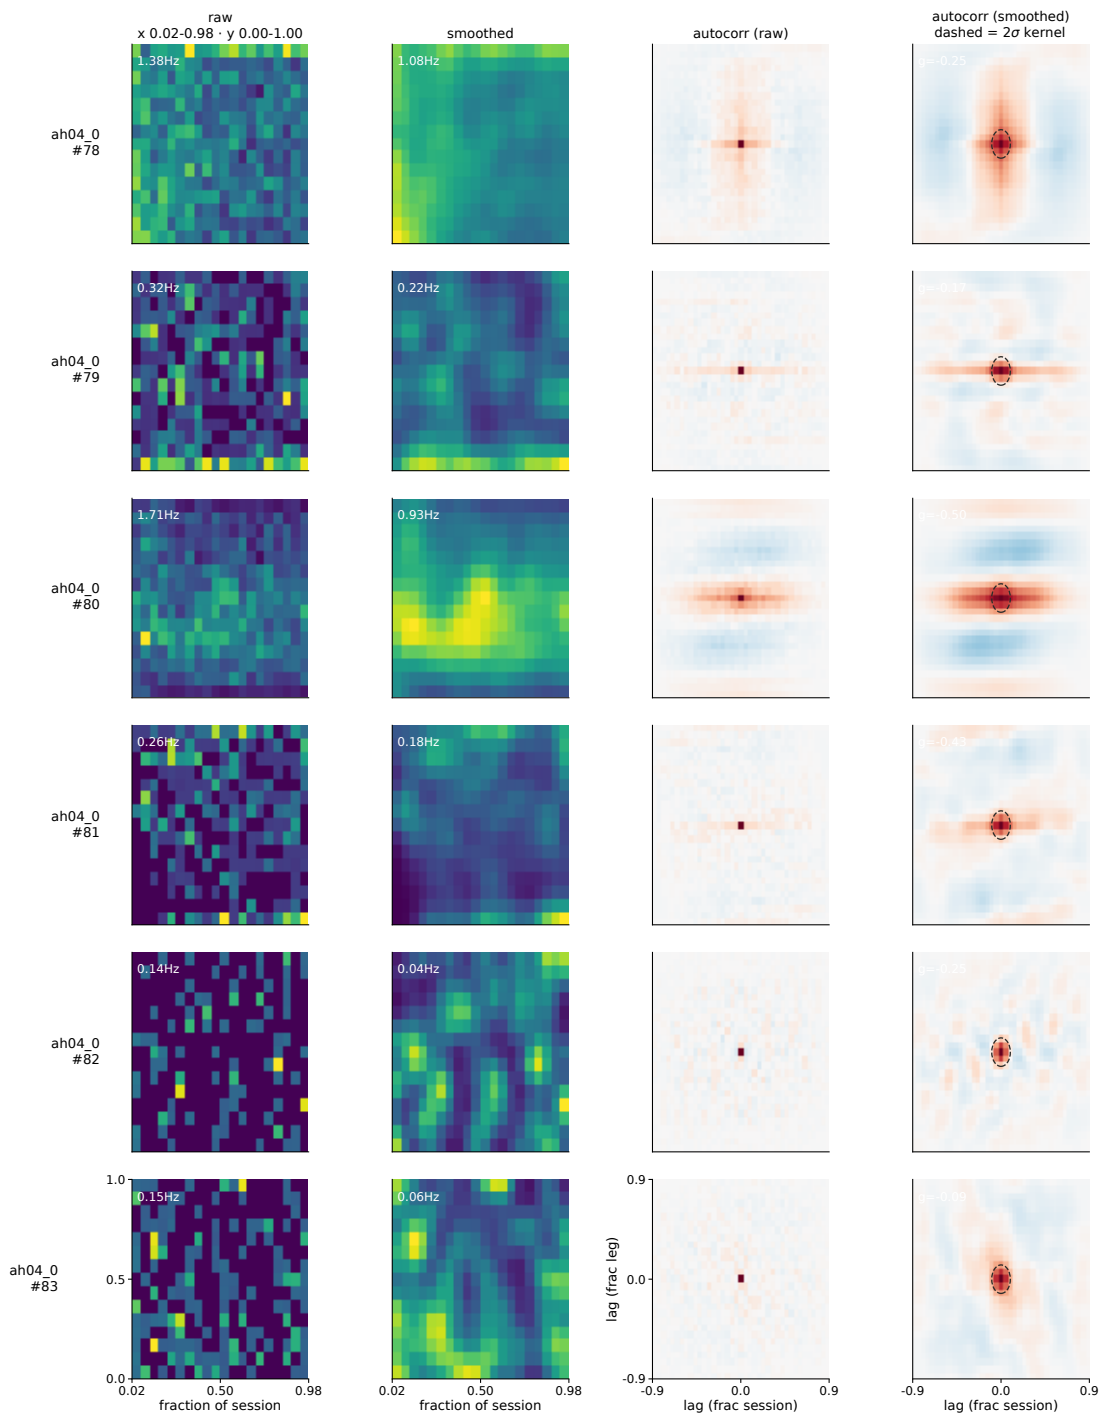


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 312-317 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

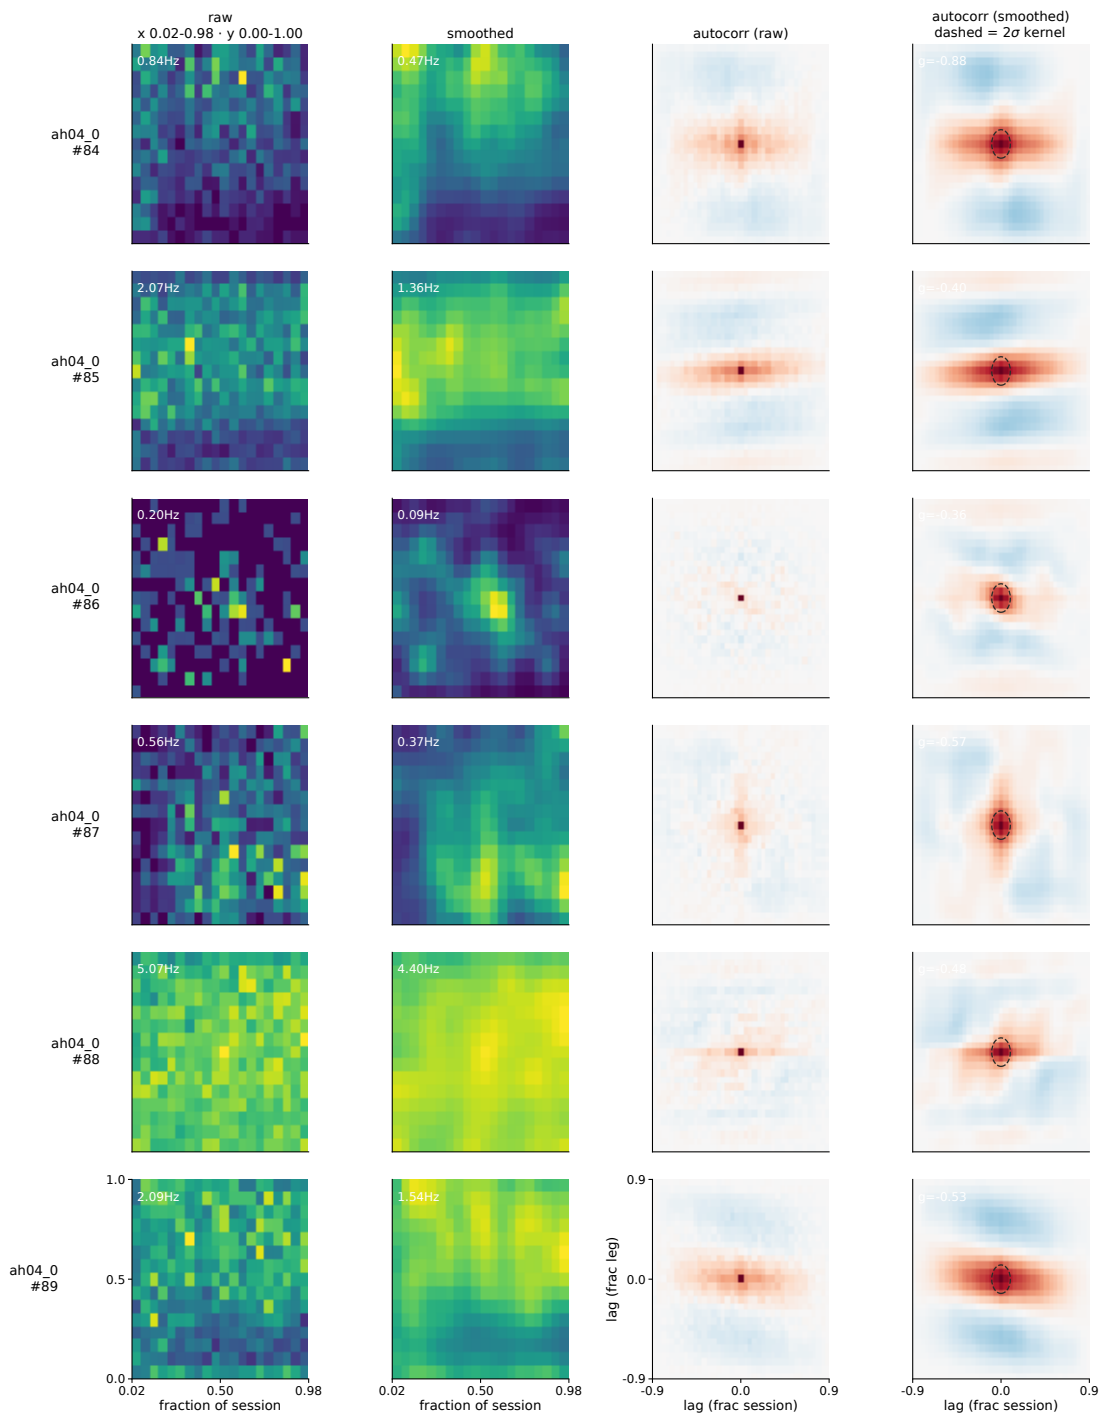


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 318-323 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

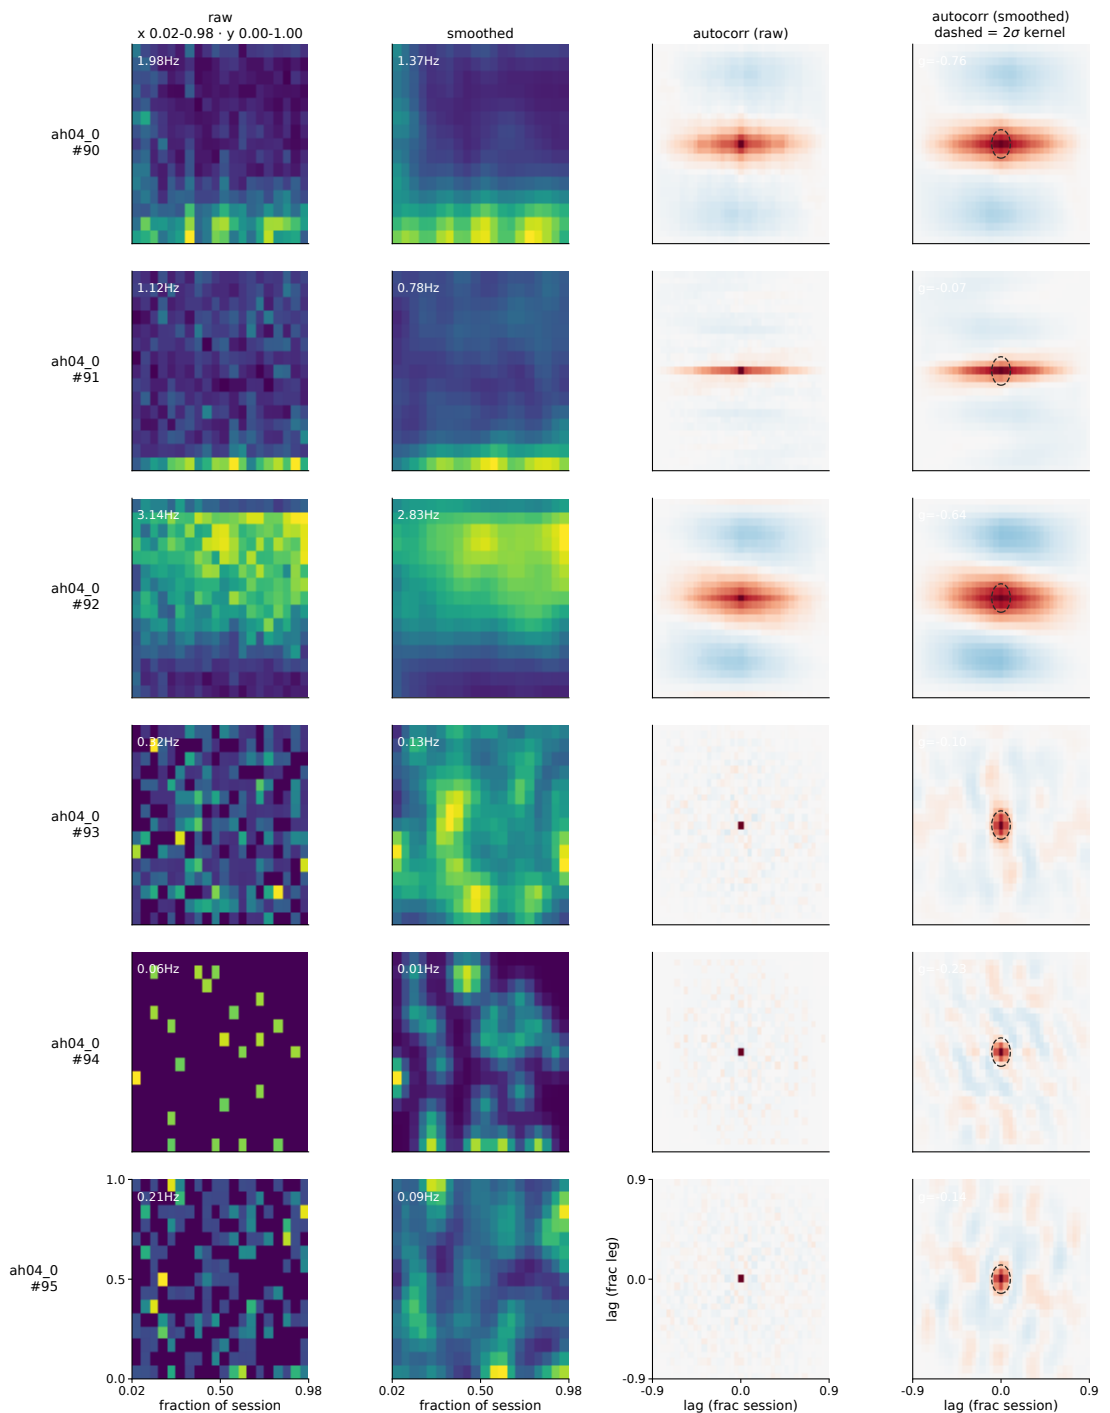


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 324-329 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

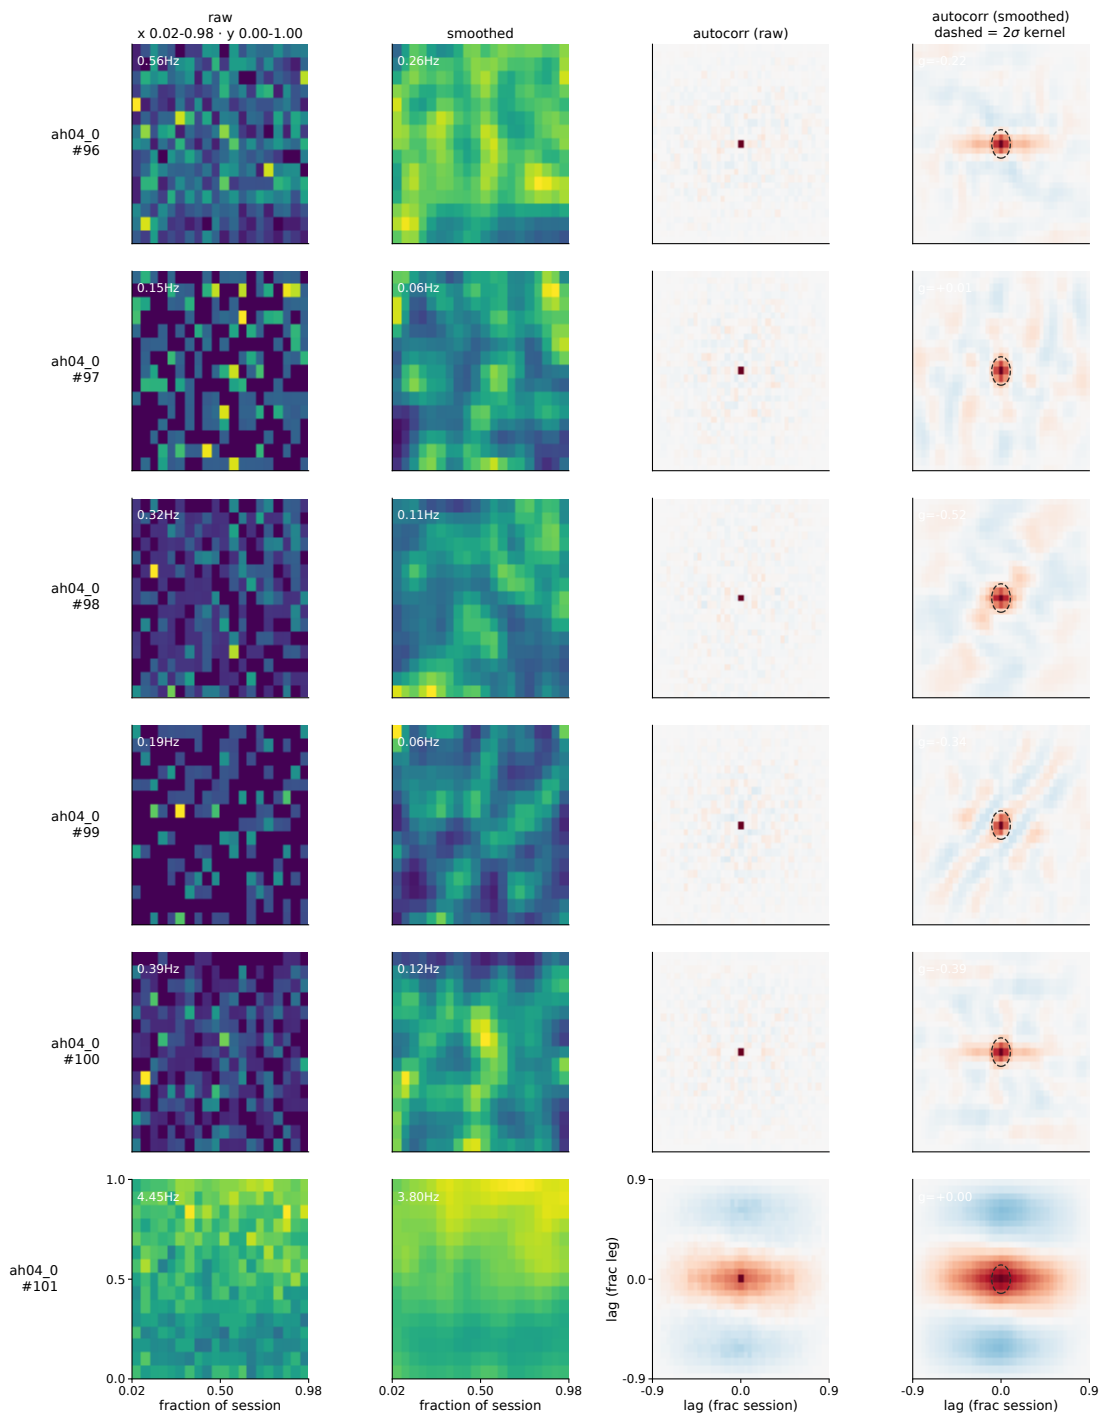


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 330-335 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

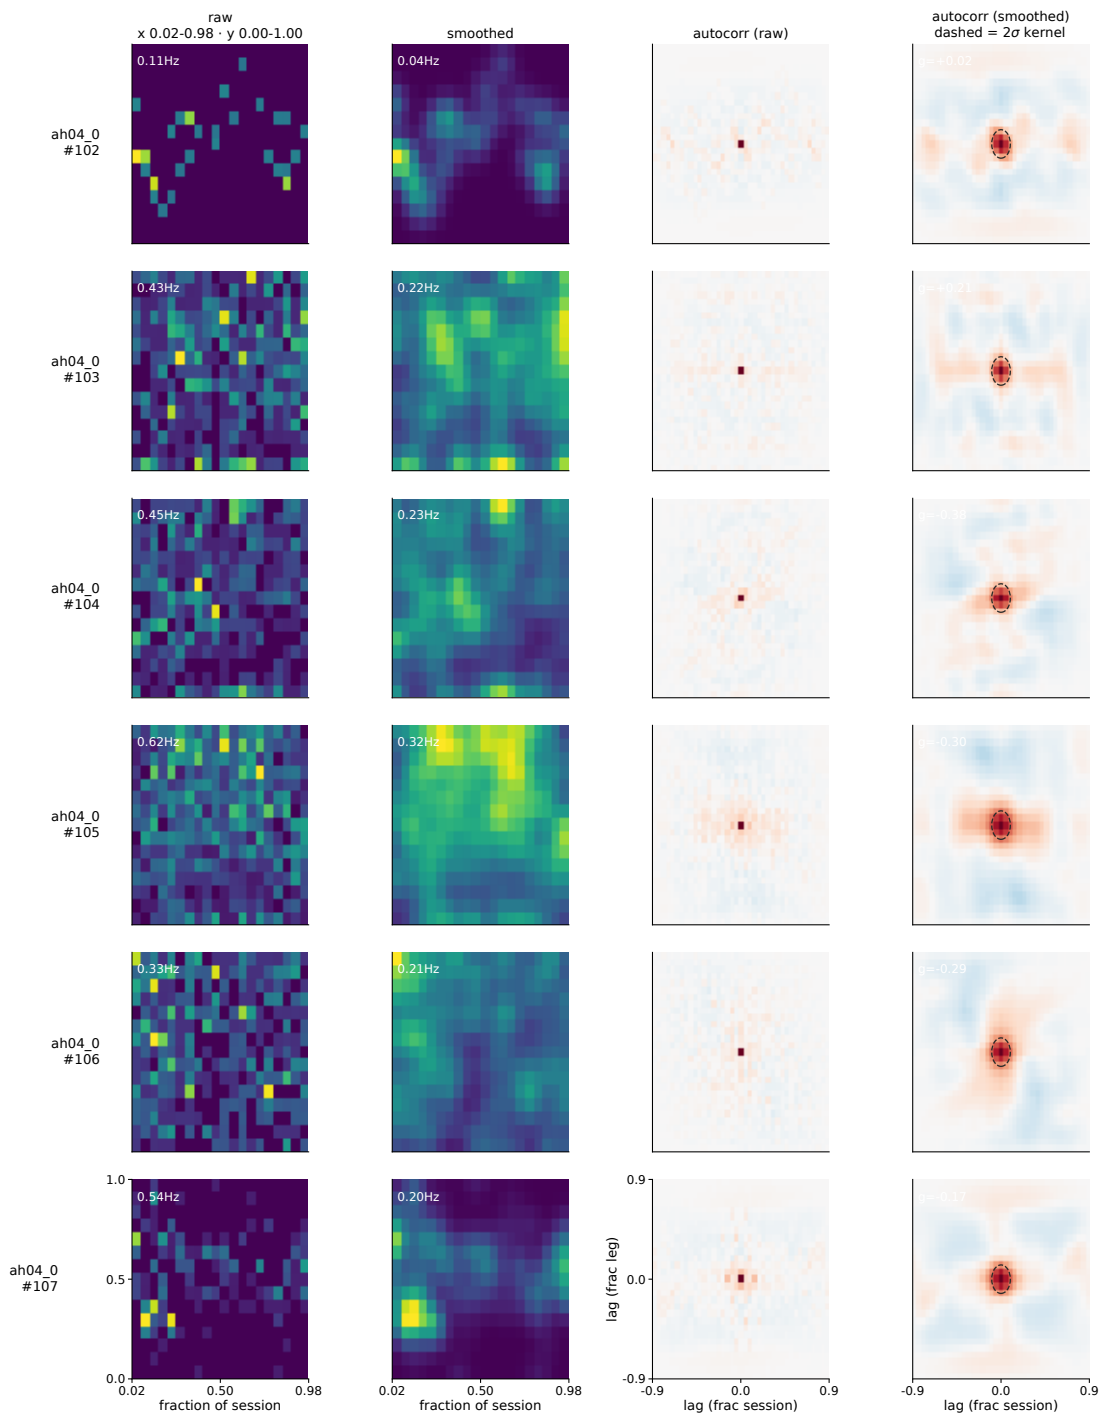


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 336-341 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

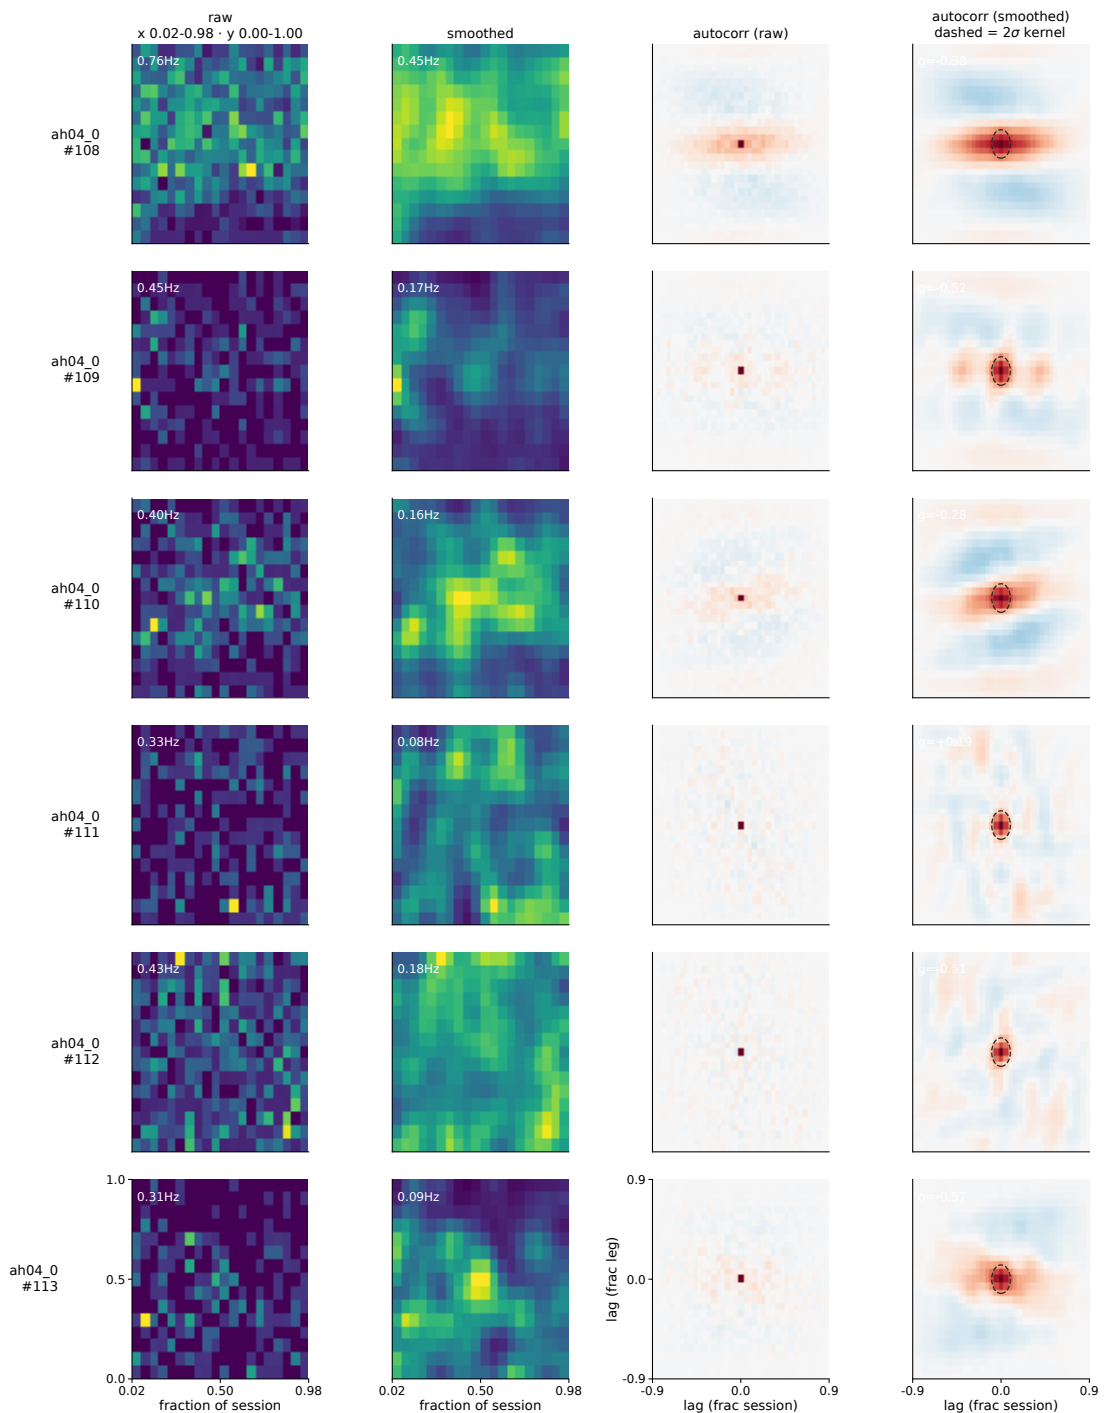


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 342-347 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

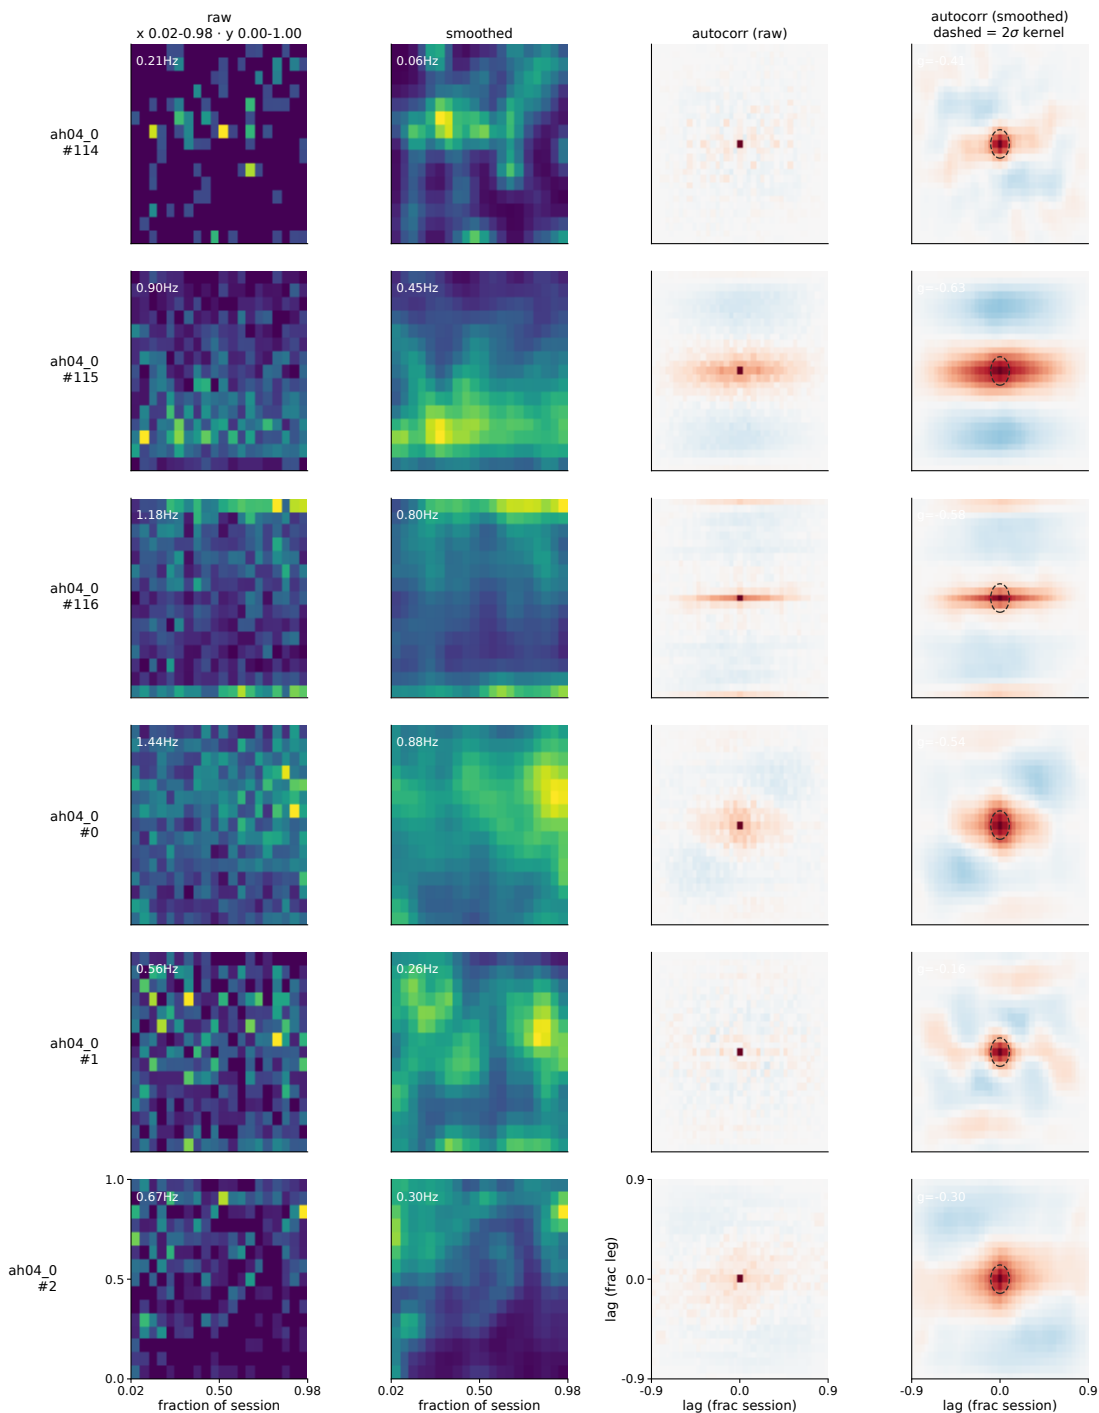


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 348-353 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

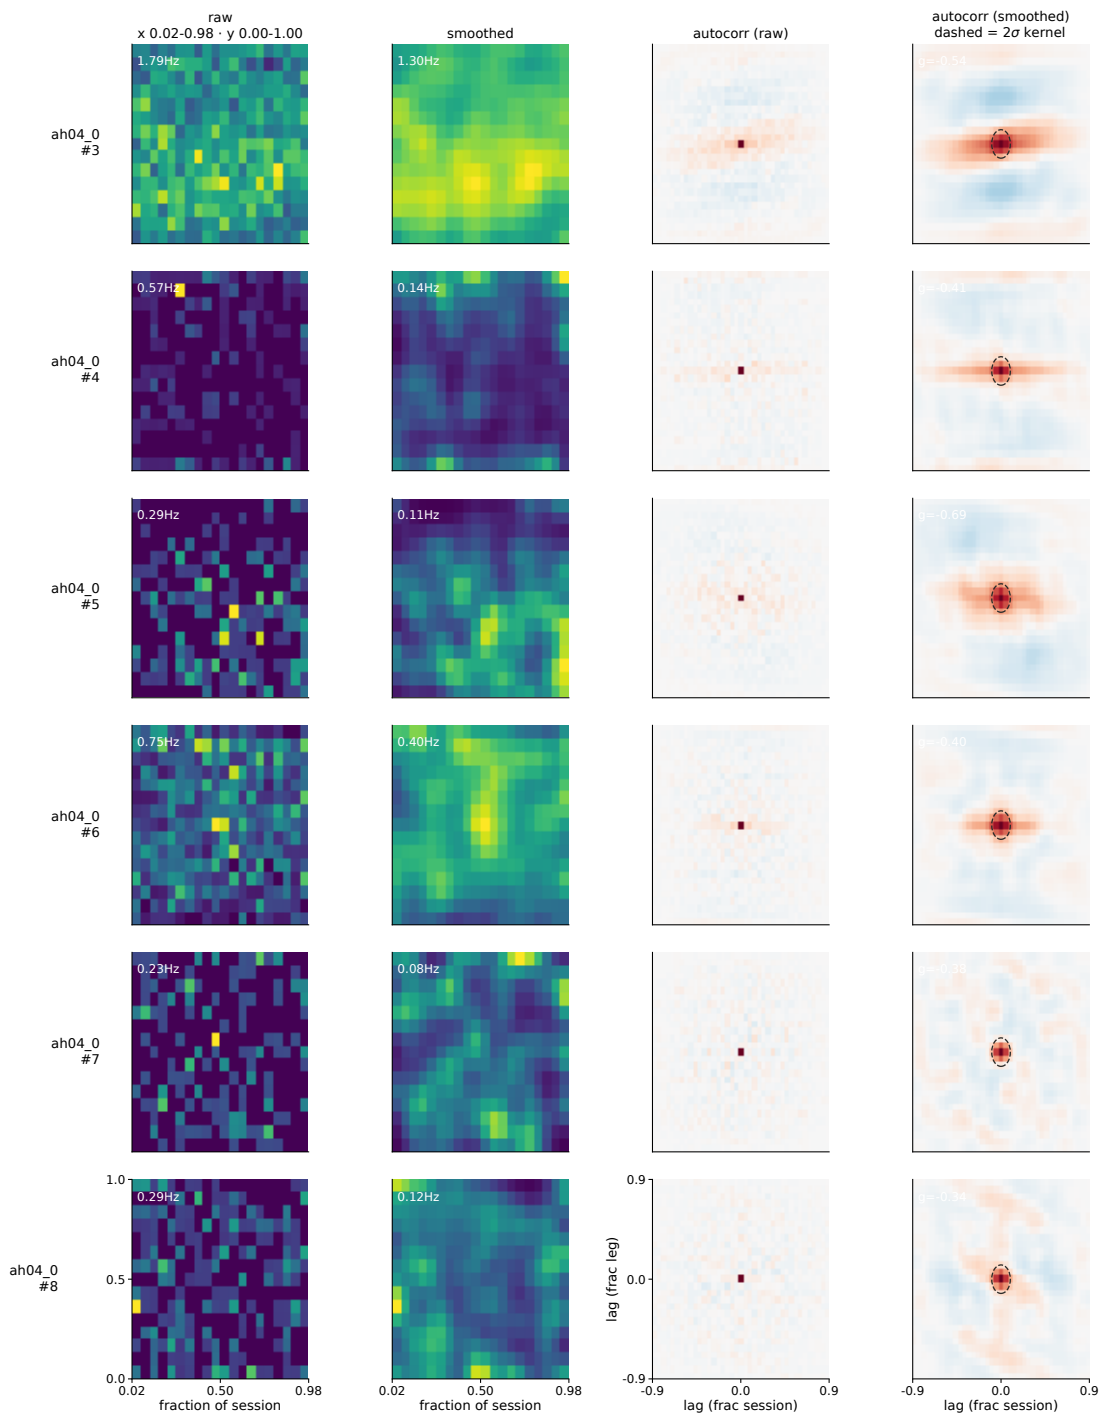


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 354-359 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

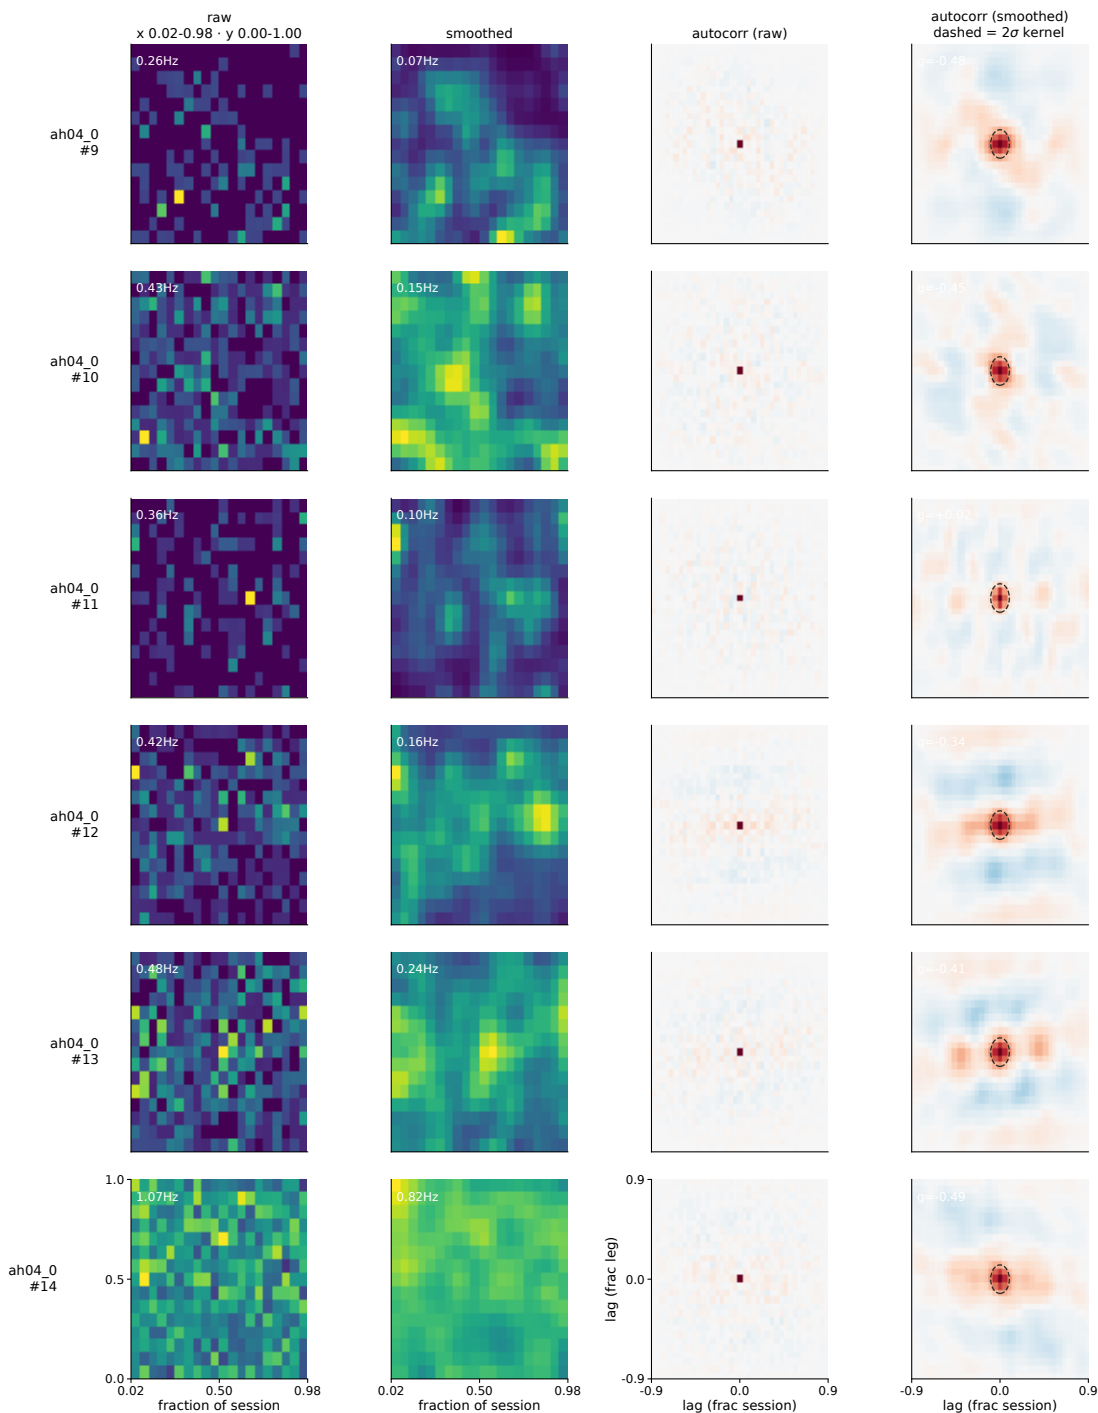


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 360-365 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

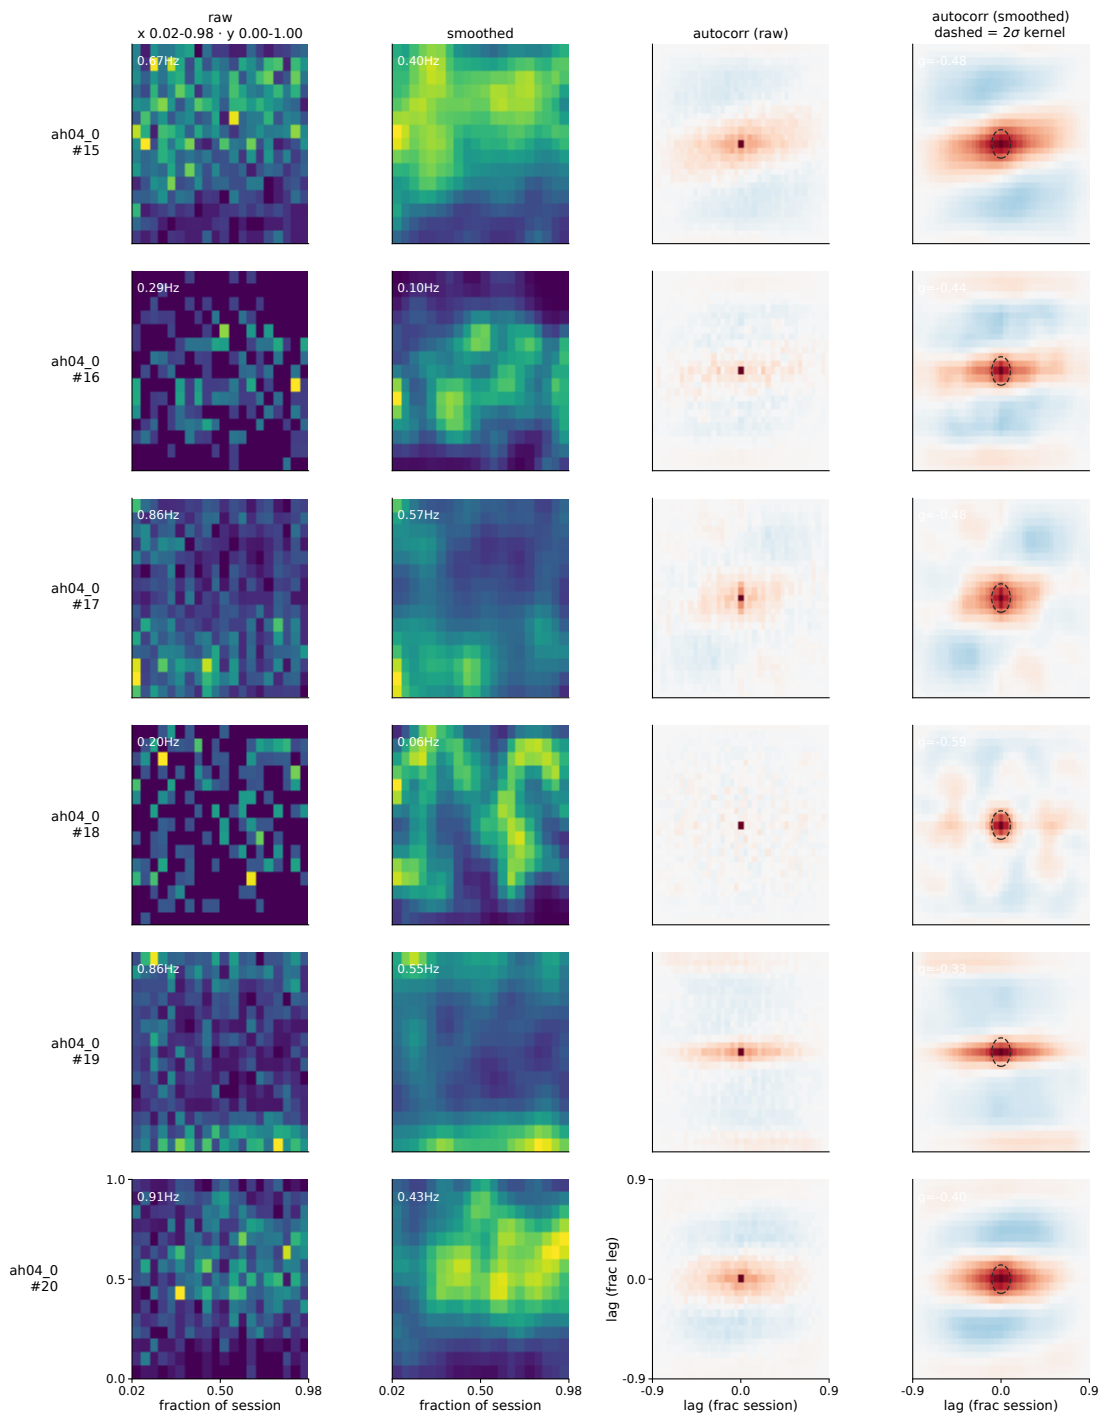


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 366-371 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

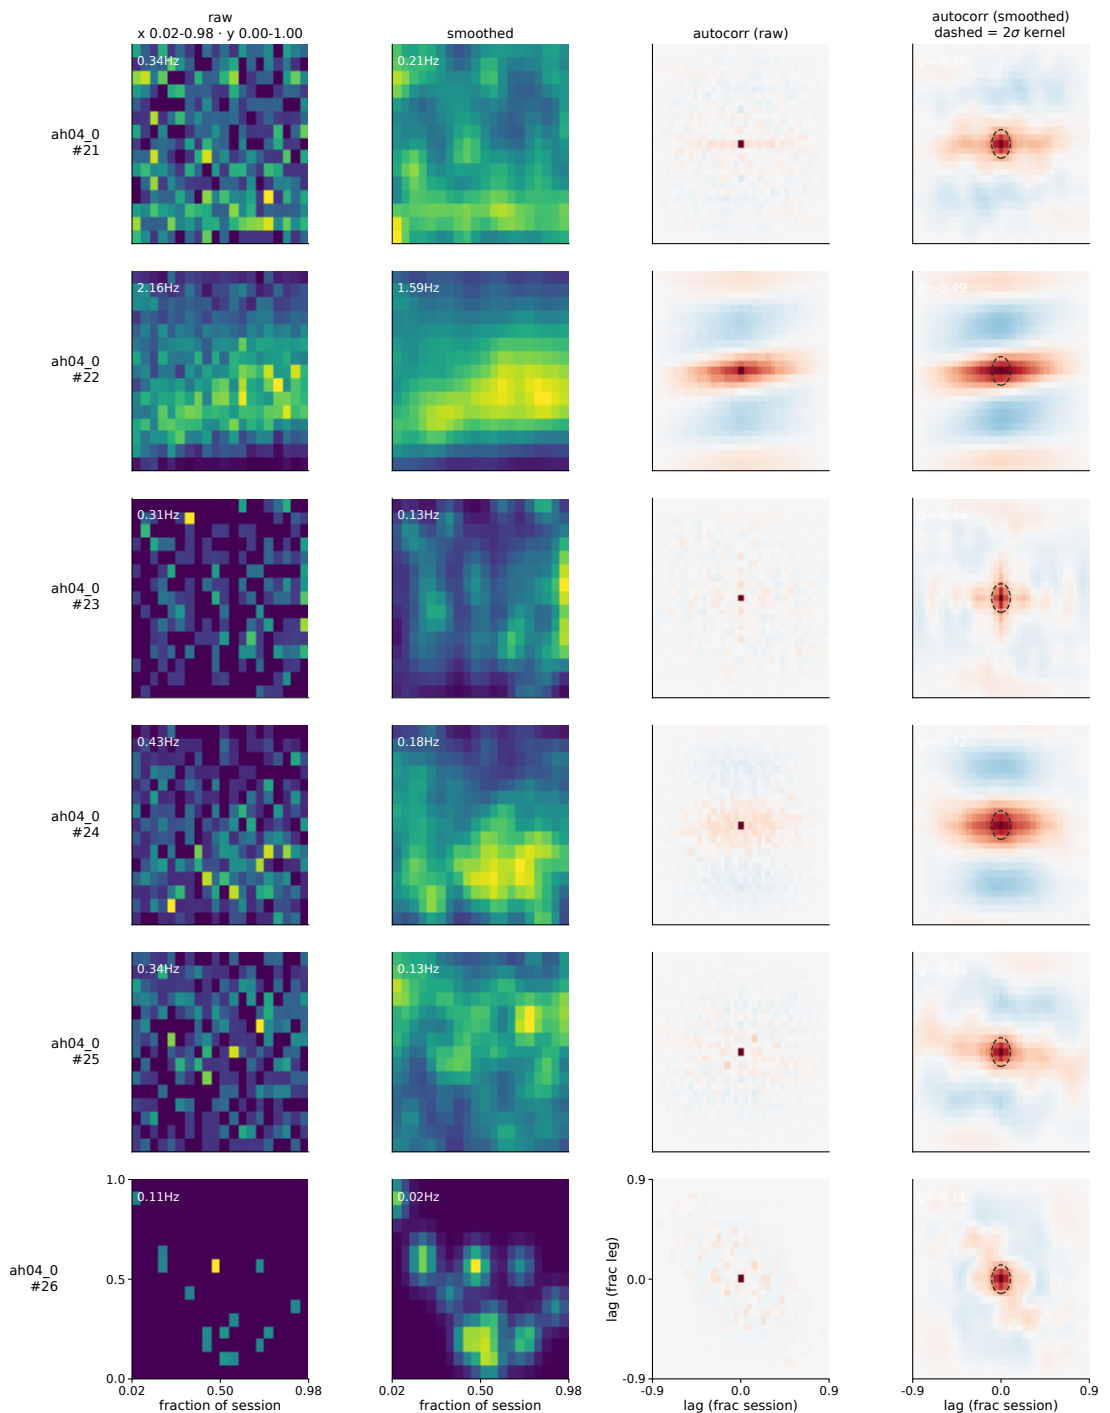


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 372-377 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

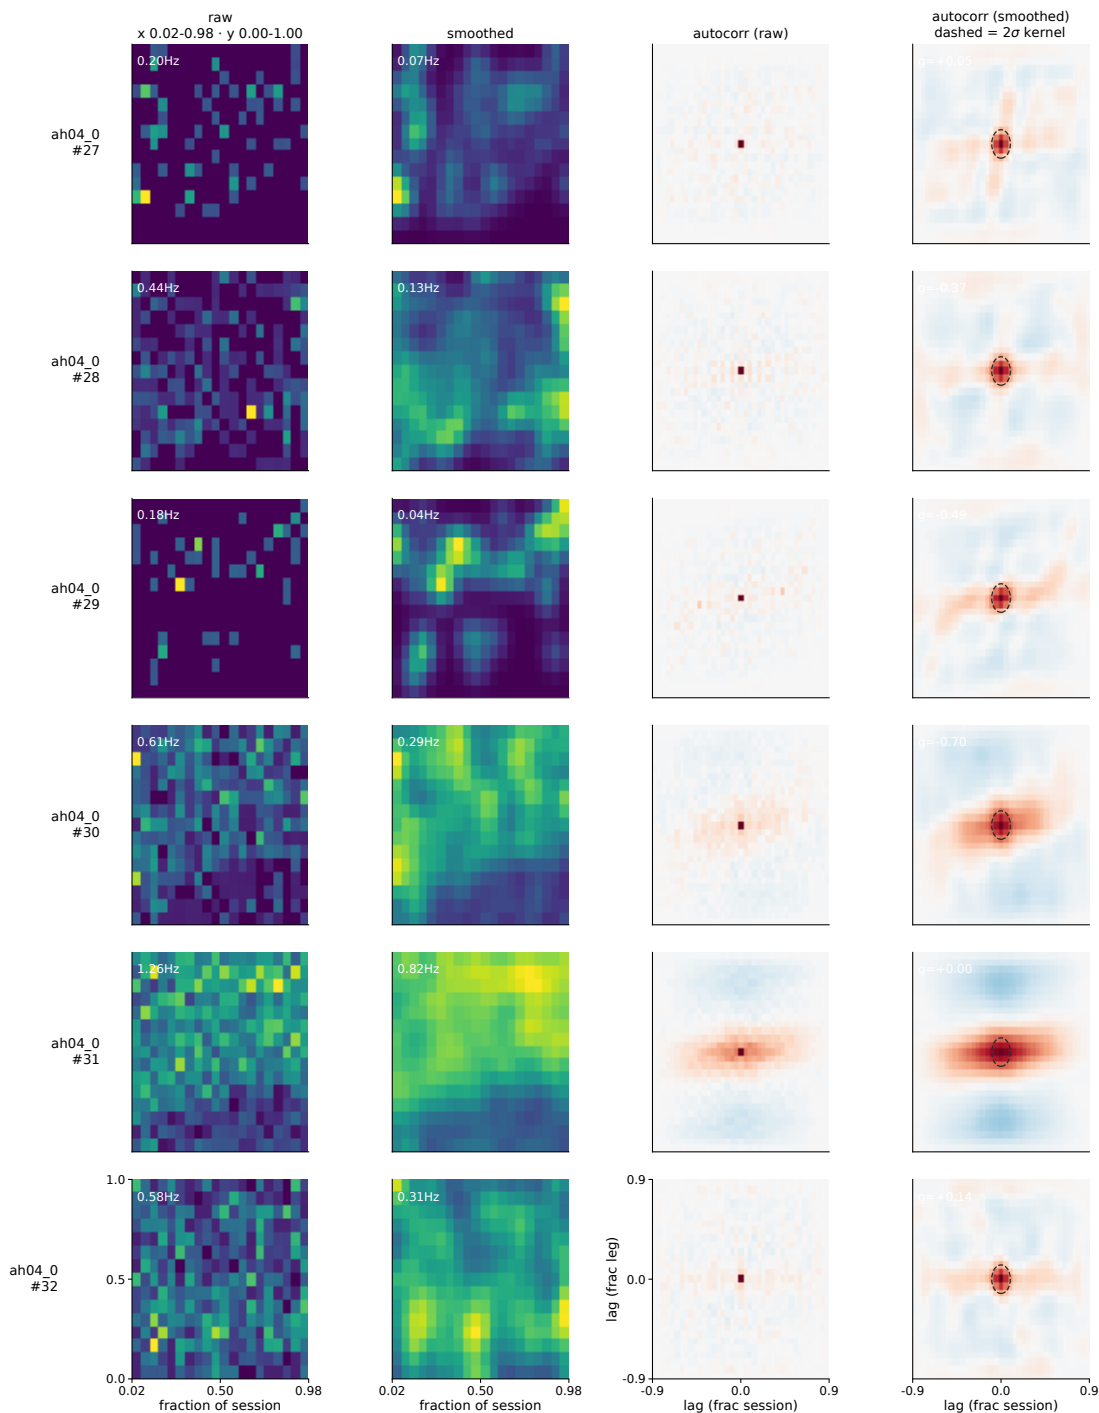


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 378-383 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

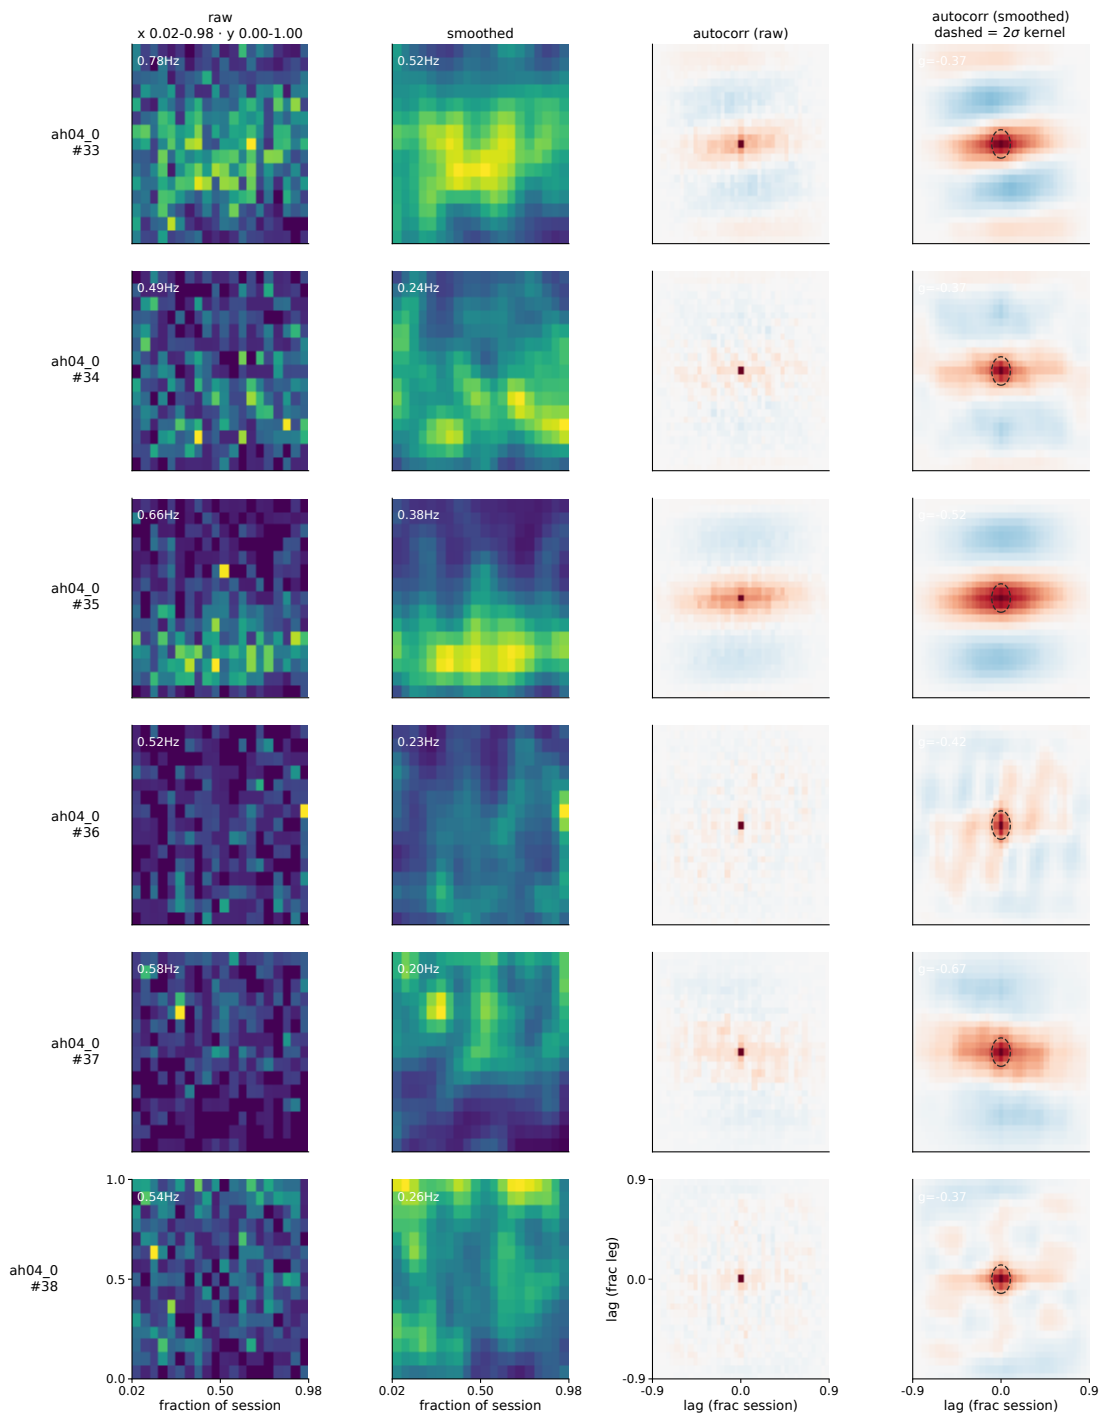


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 384-389 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

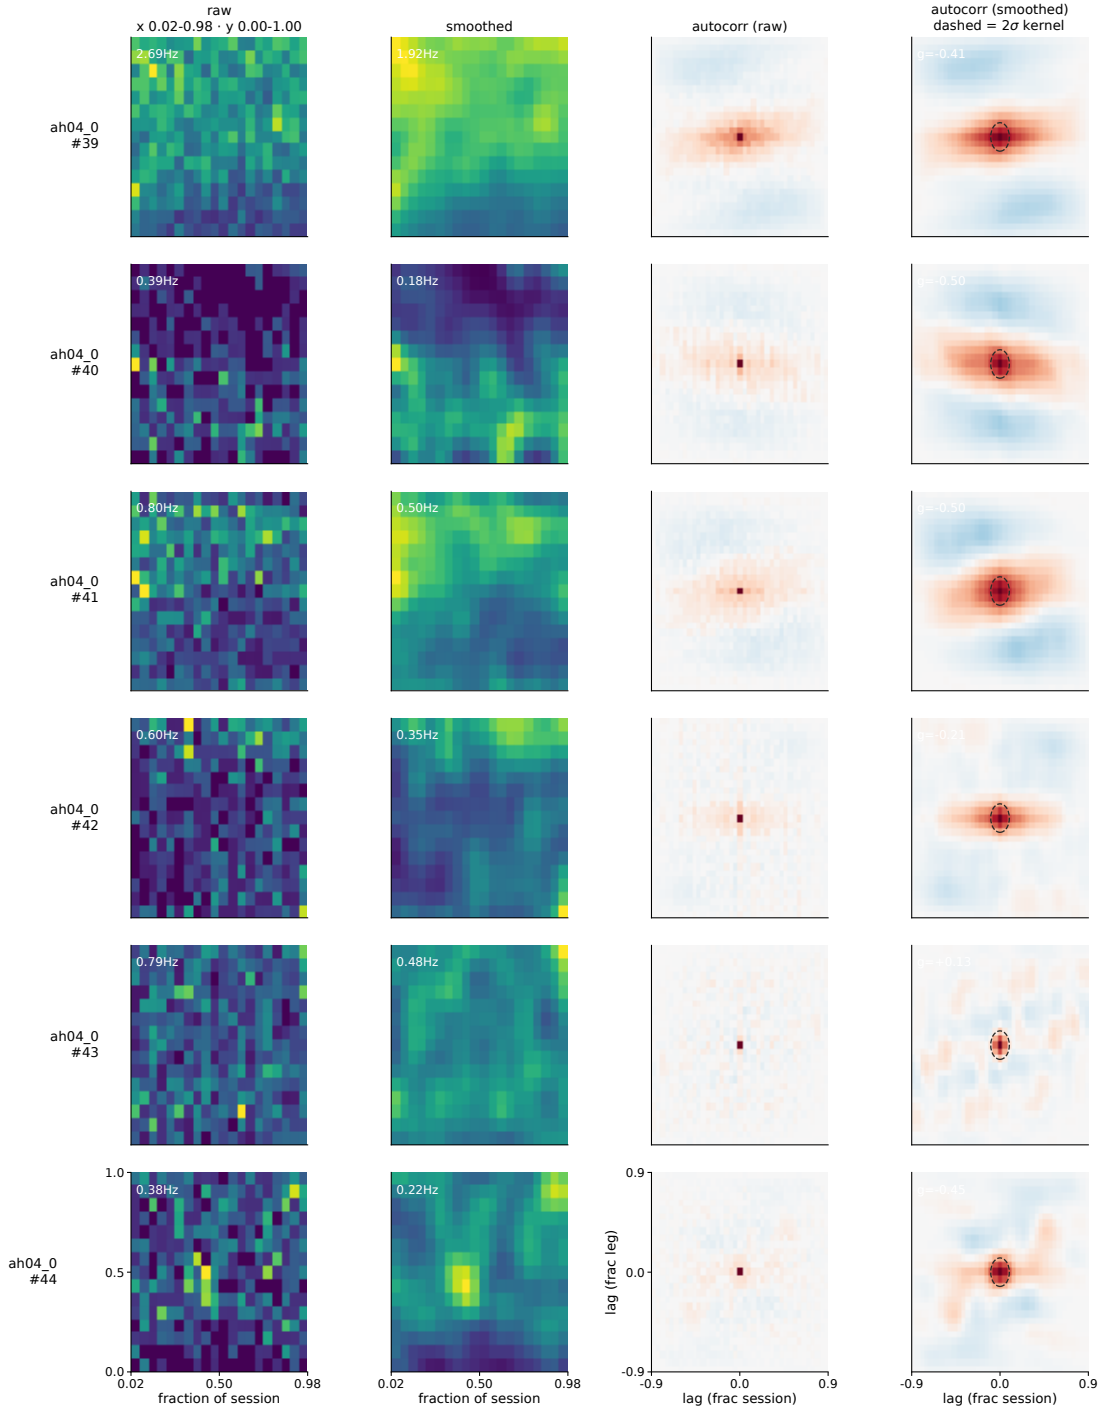


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 390-395 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

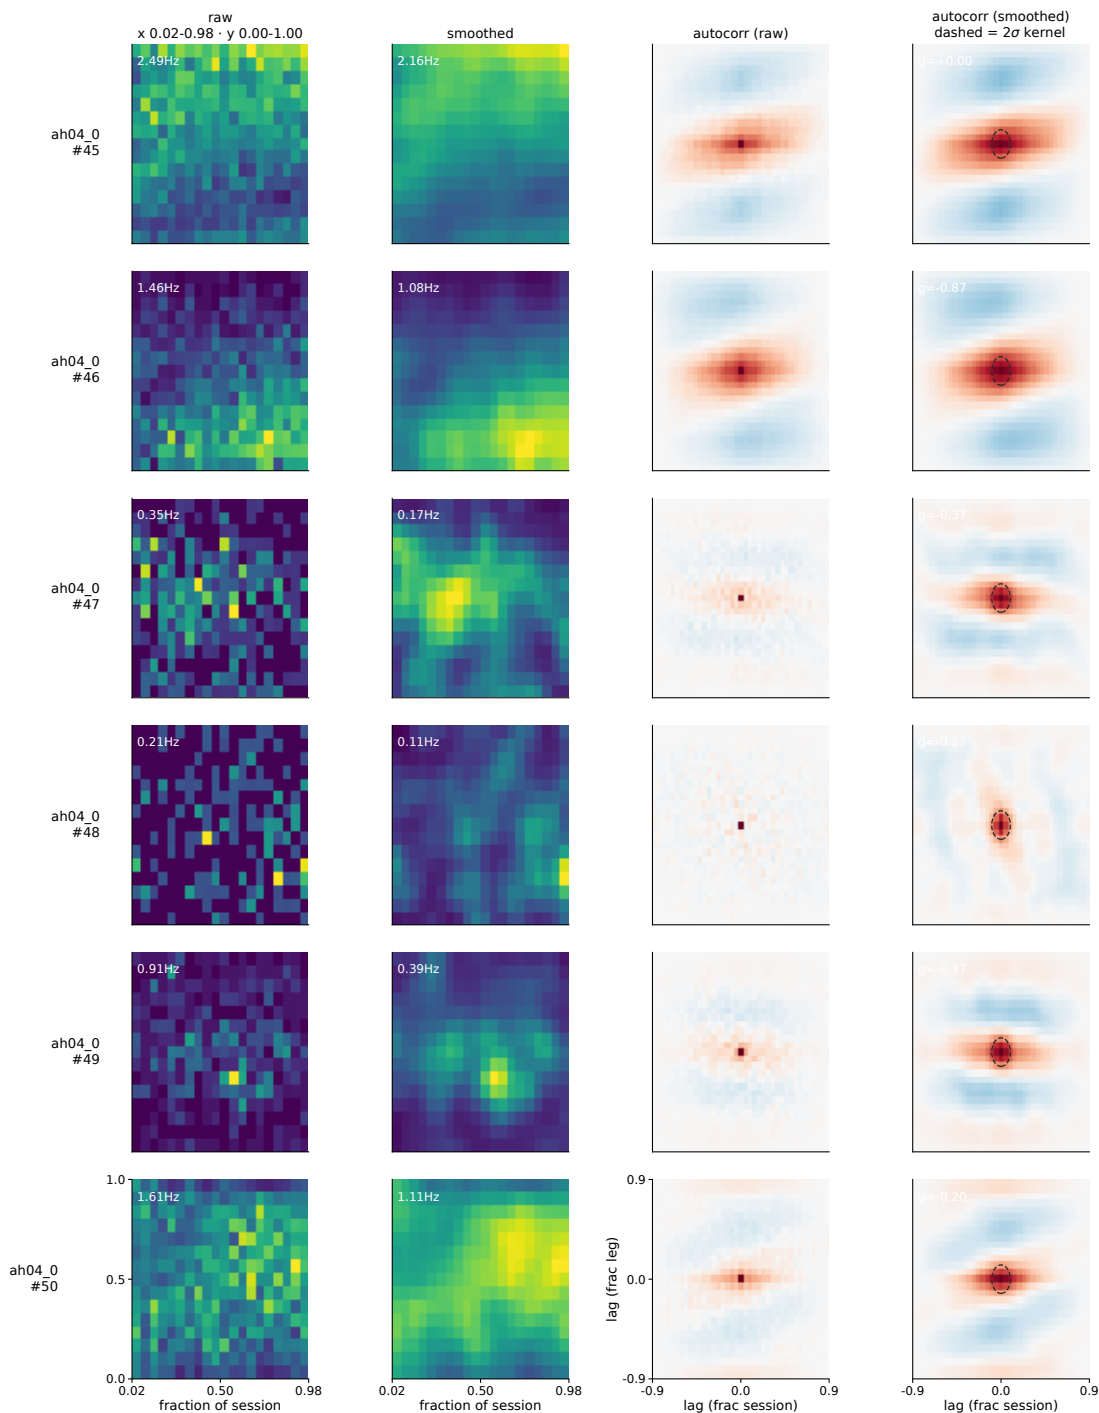


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 396-401 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

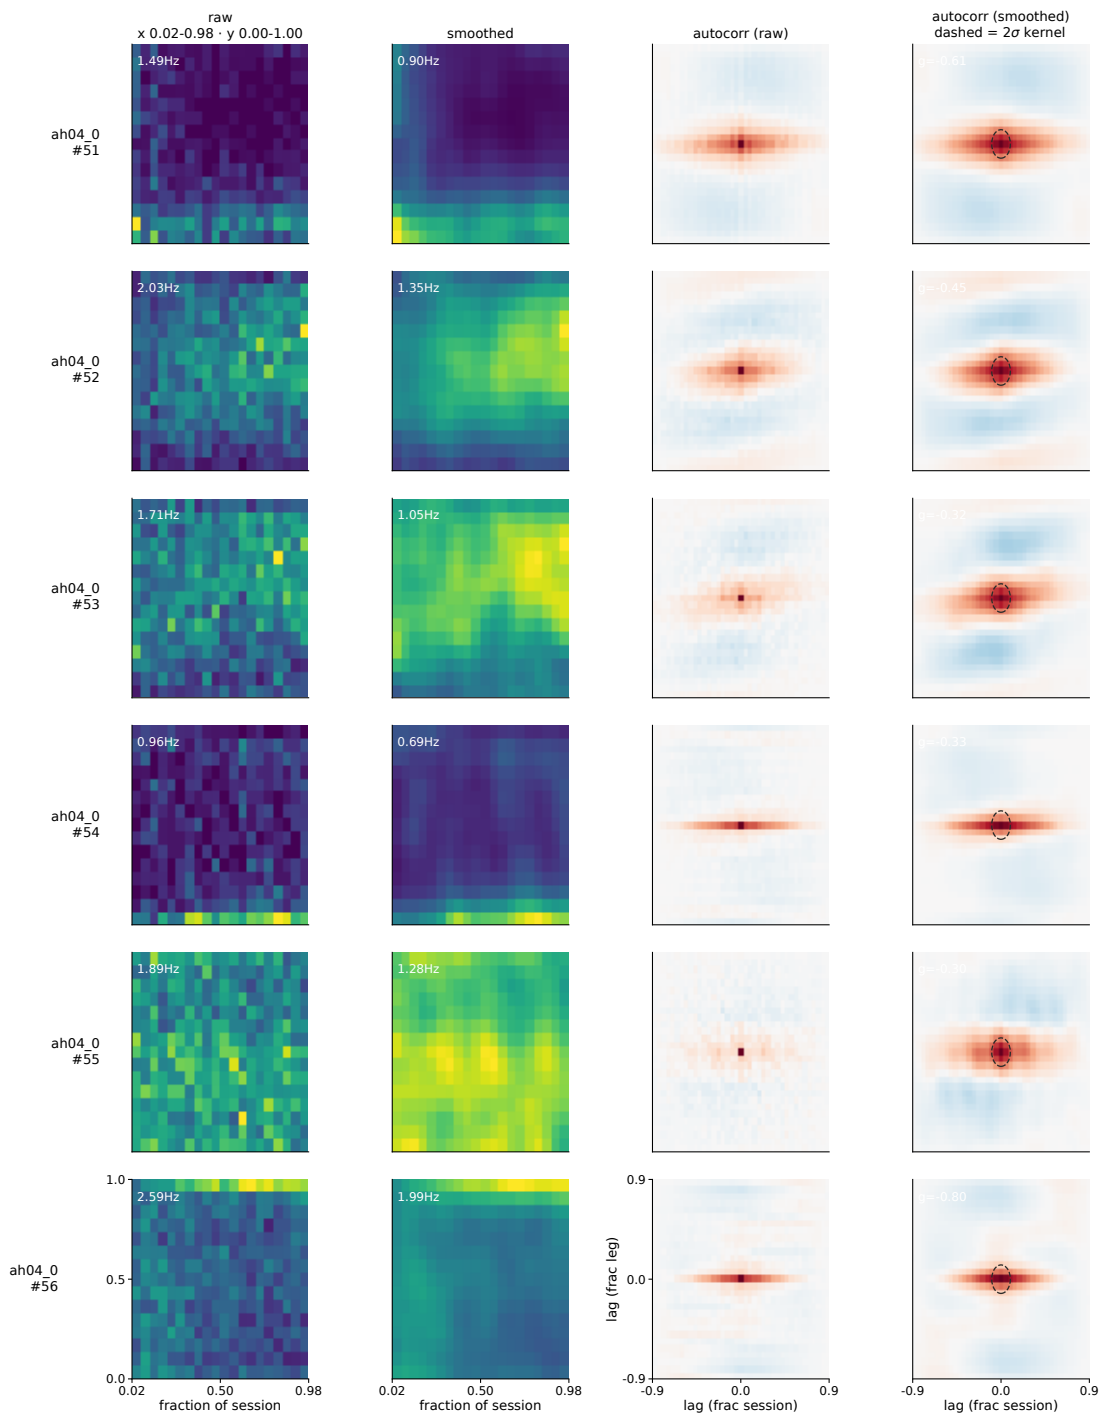


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 402-407 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

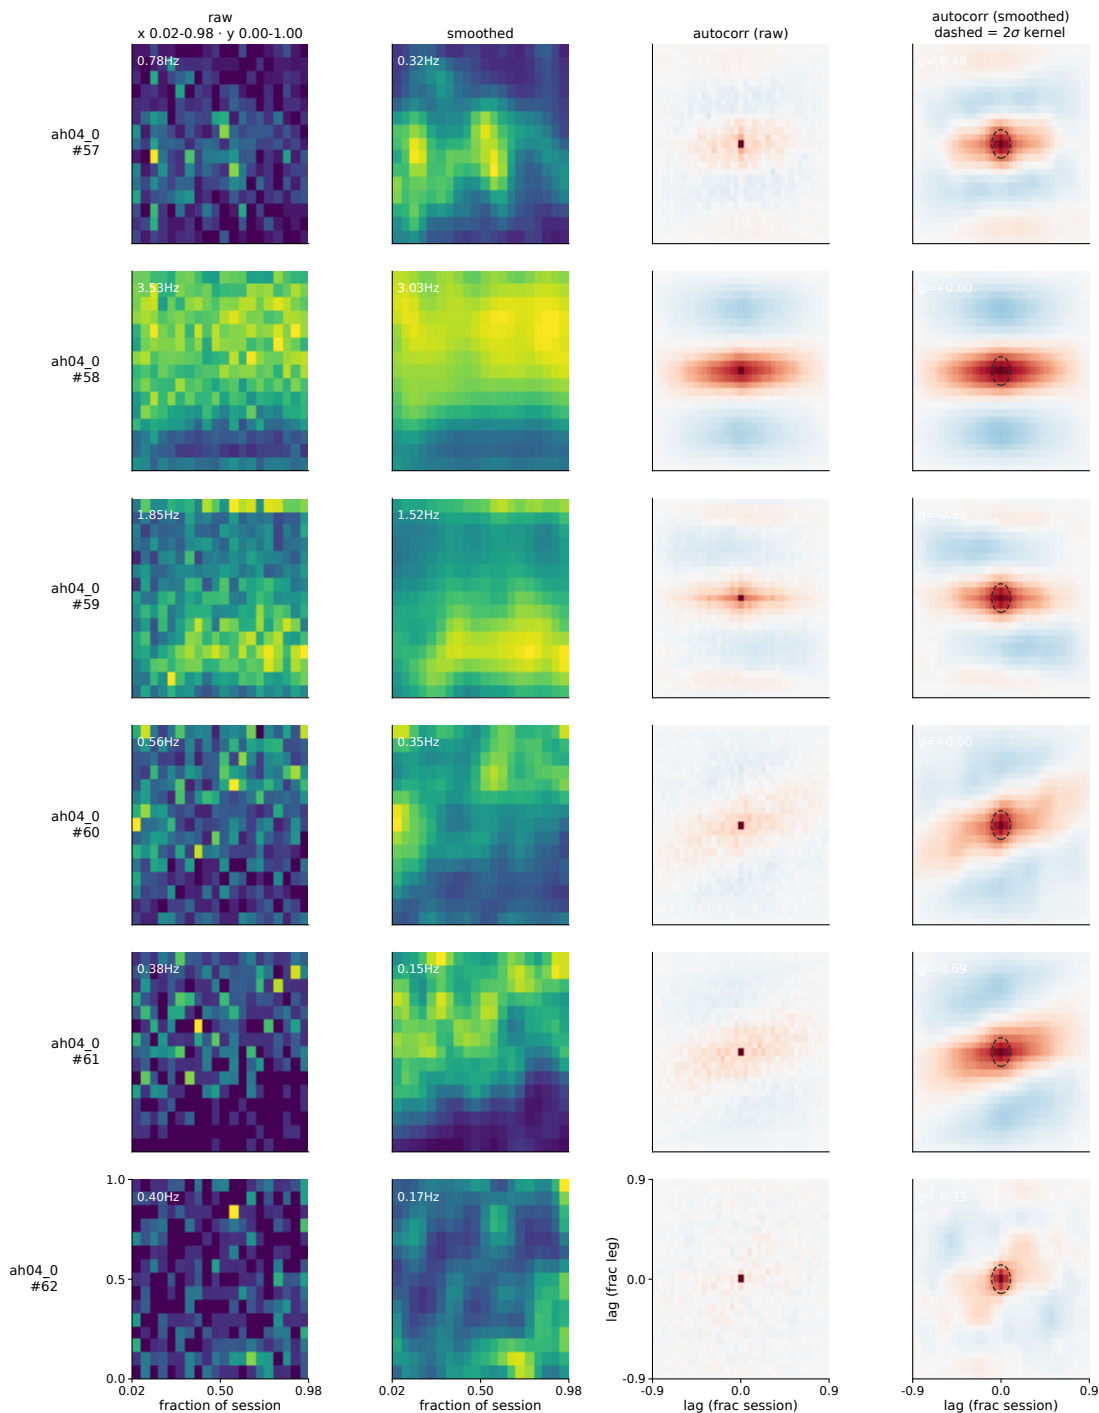


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 408-413 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

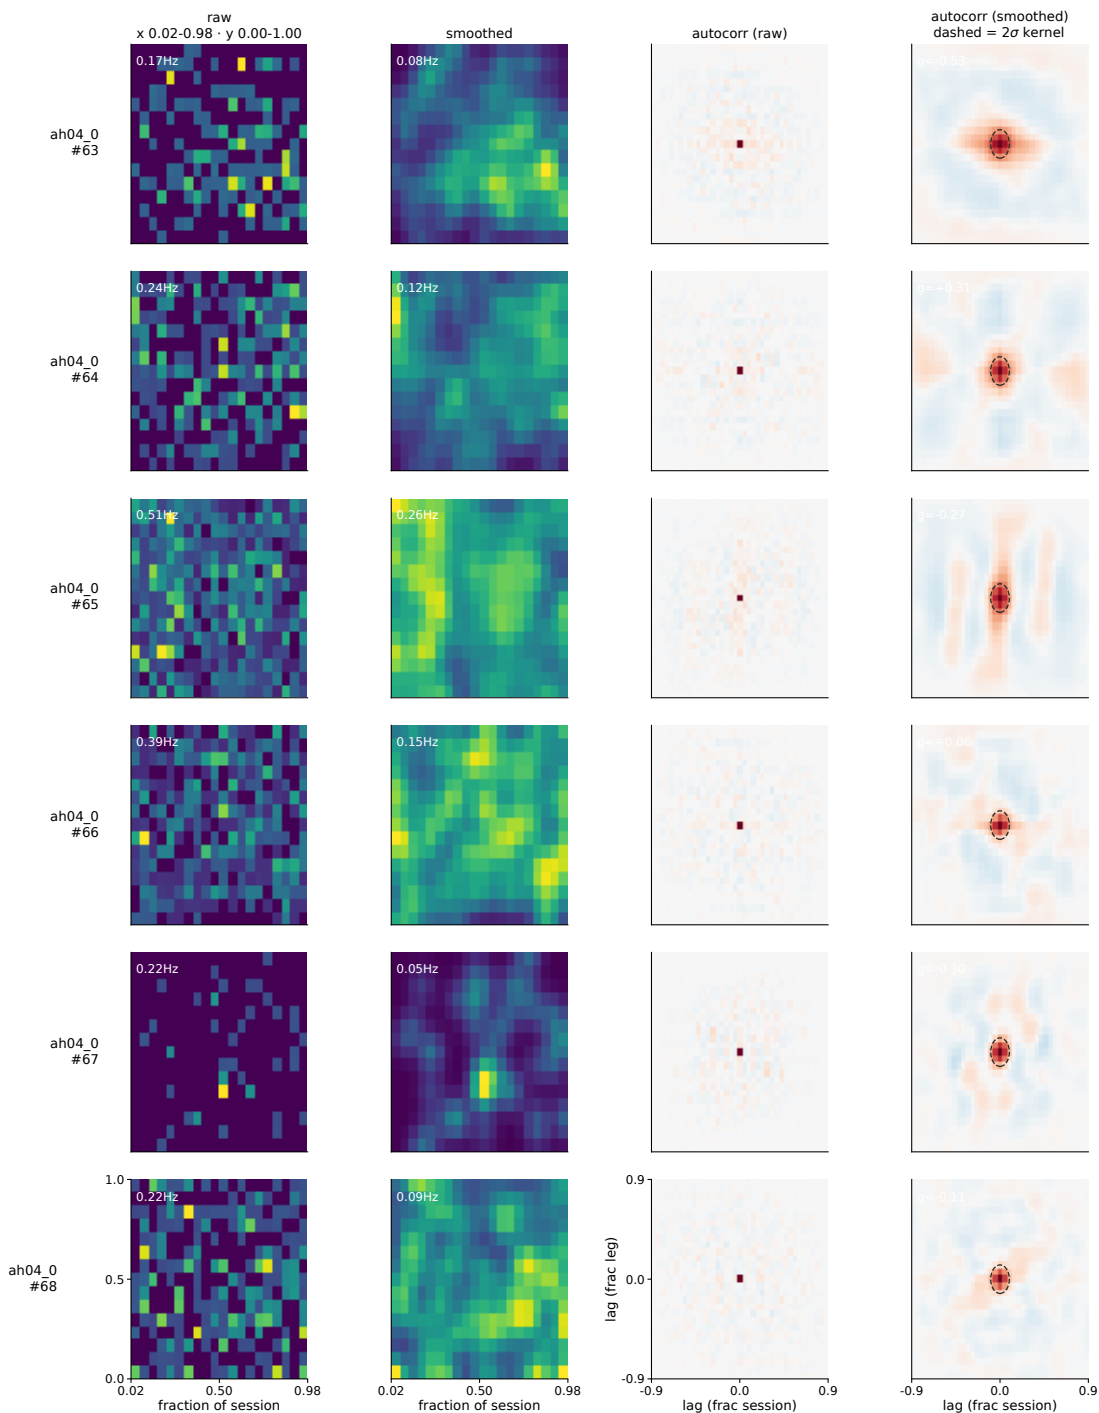


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 414-419 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

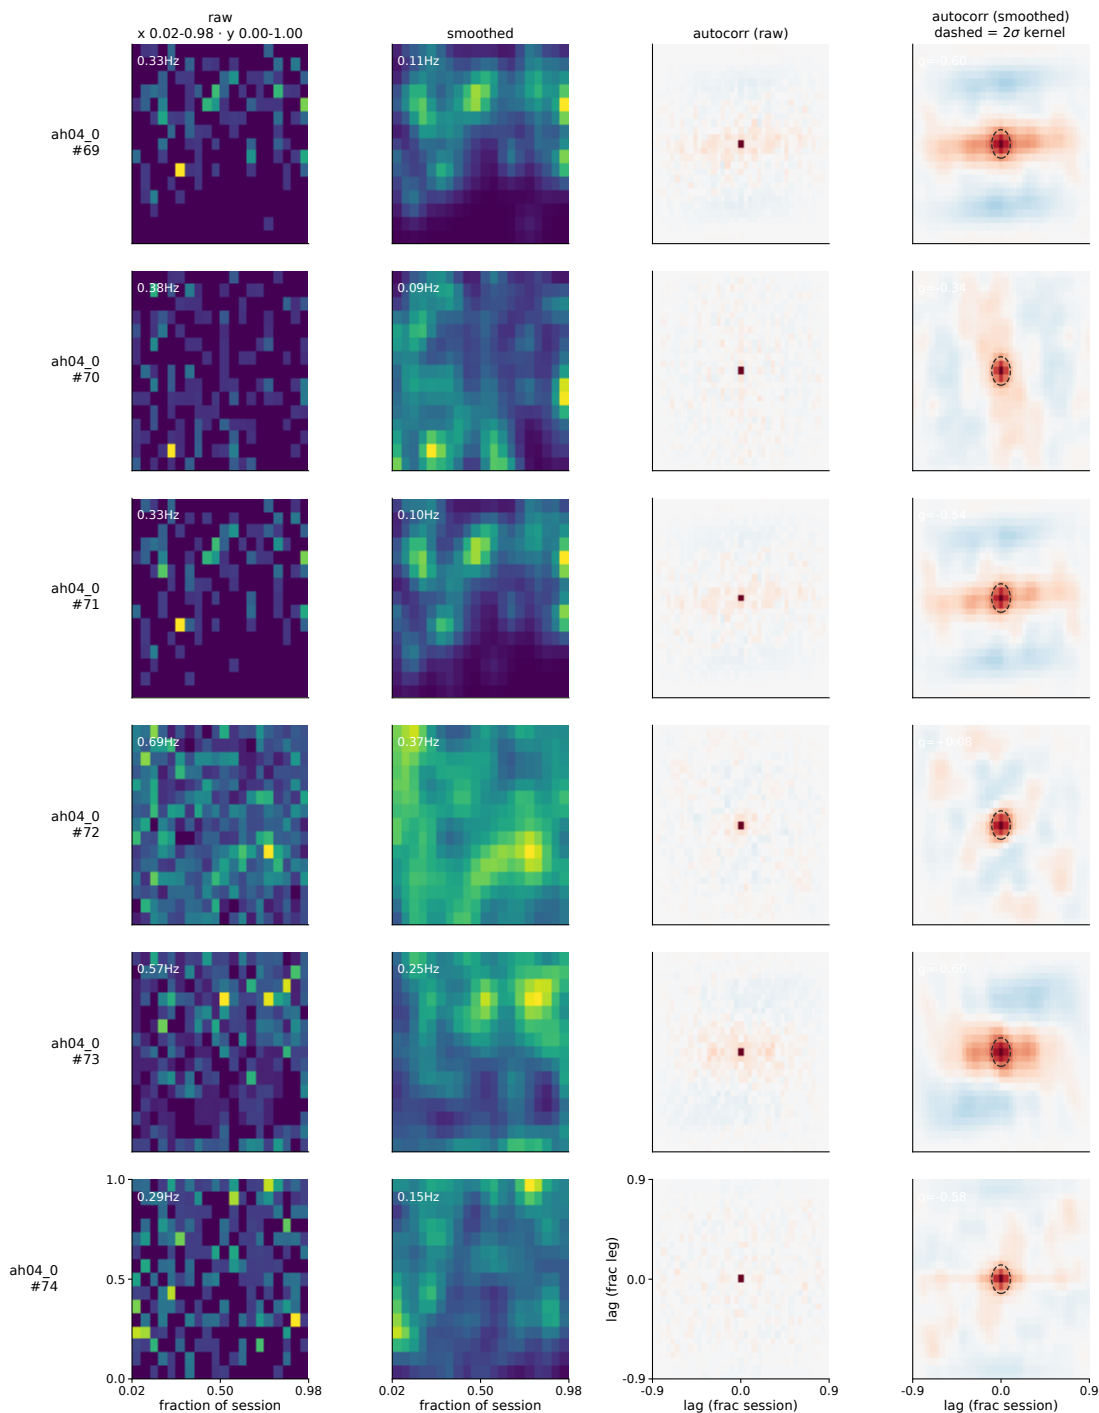


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 420-425 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

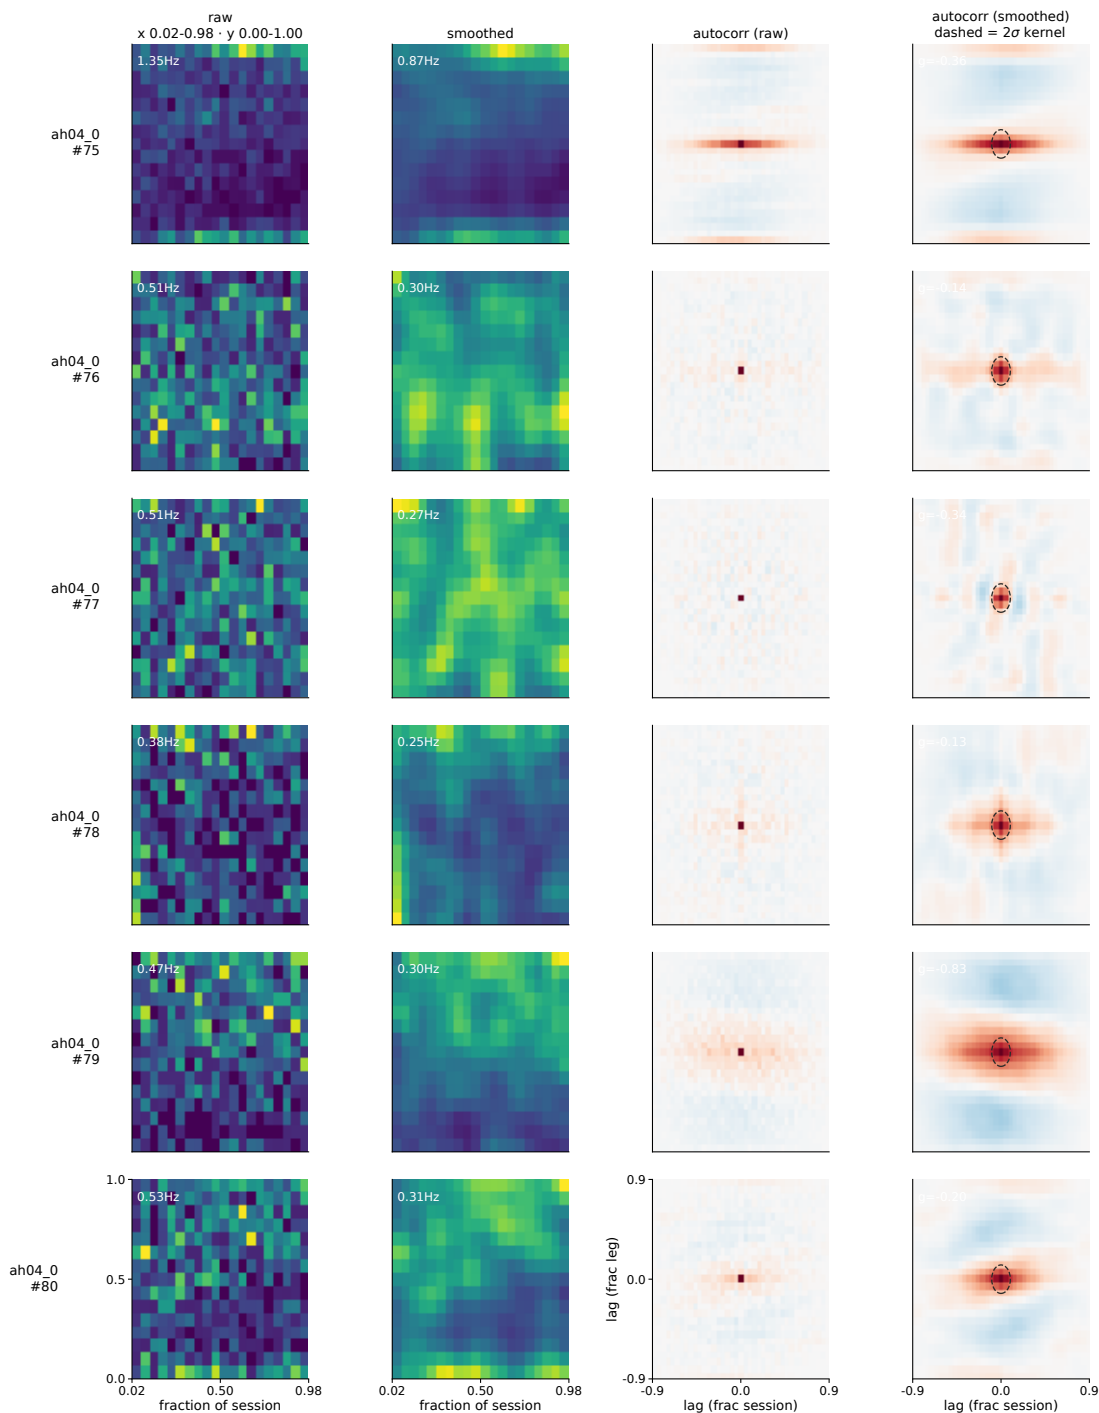


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 426-431 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

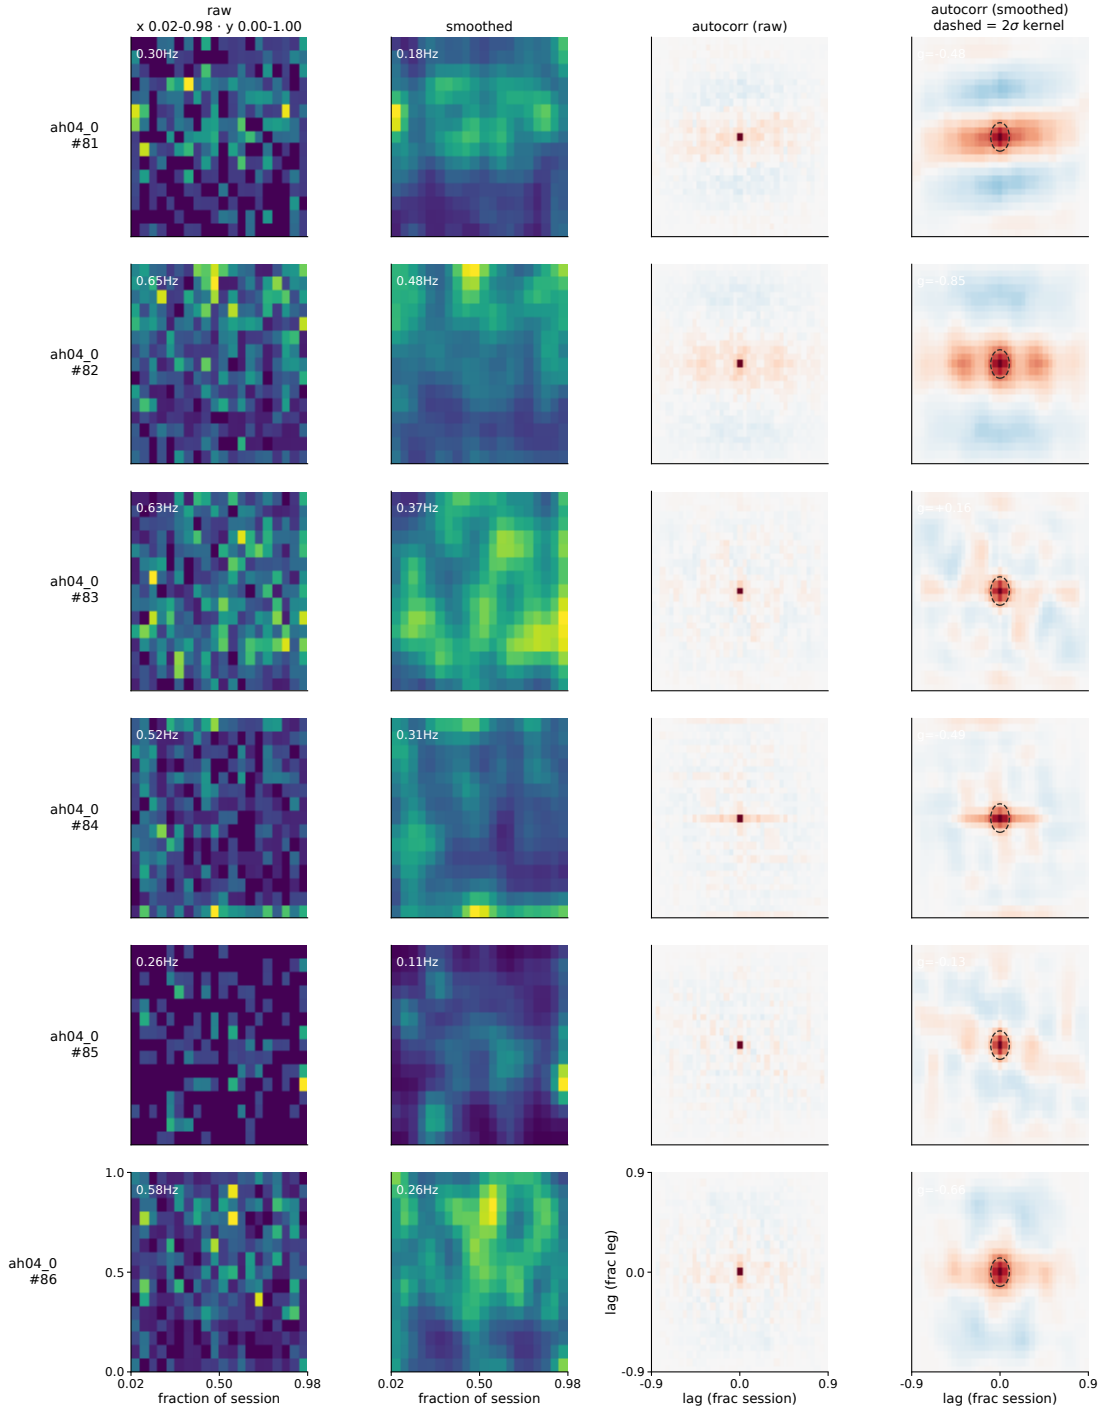


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 432-437 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

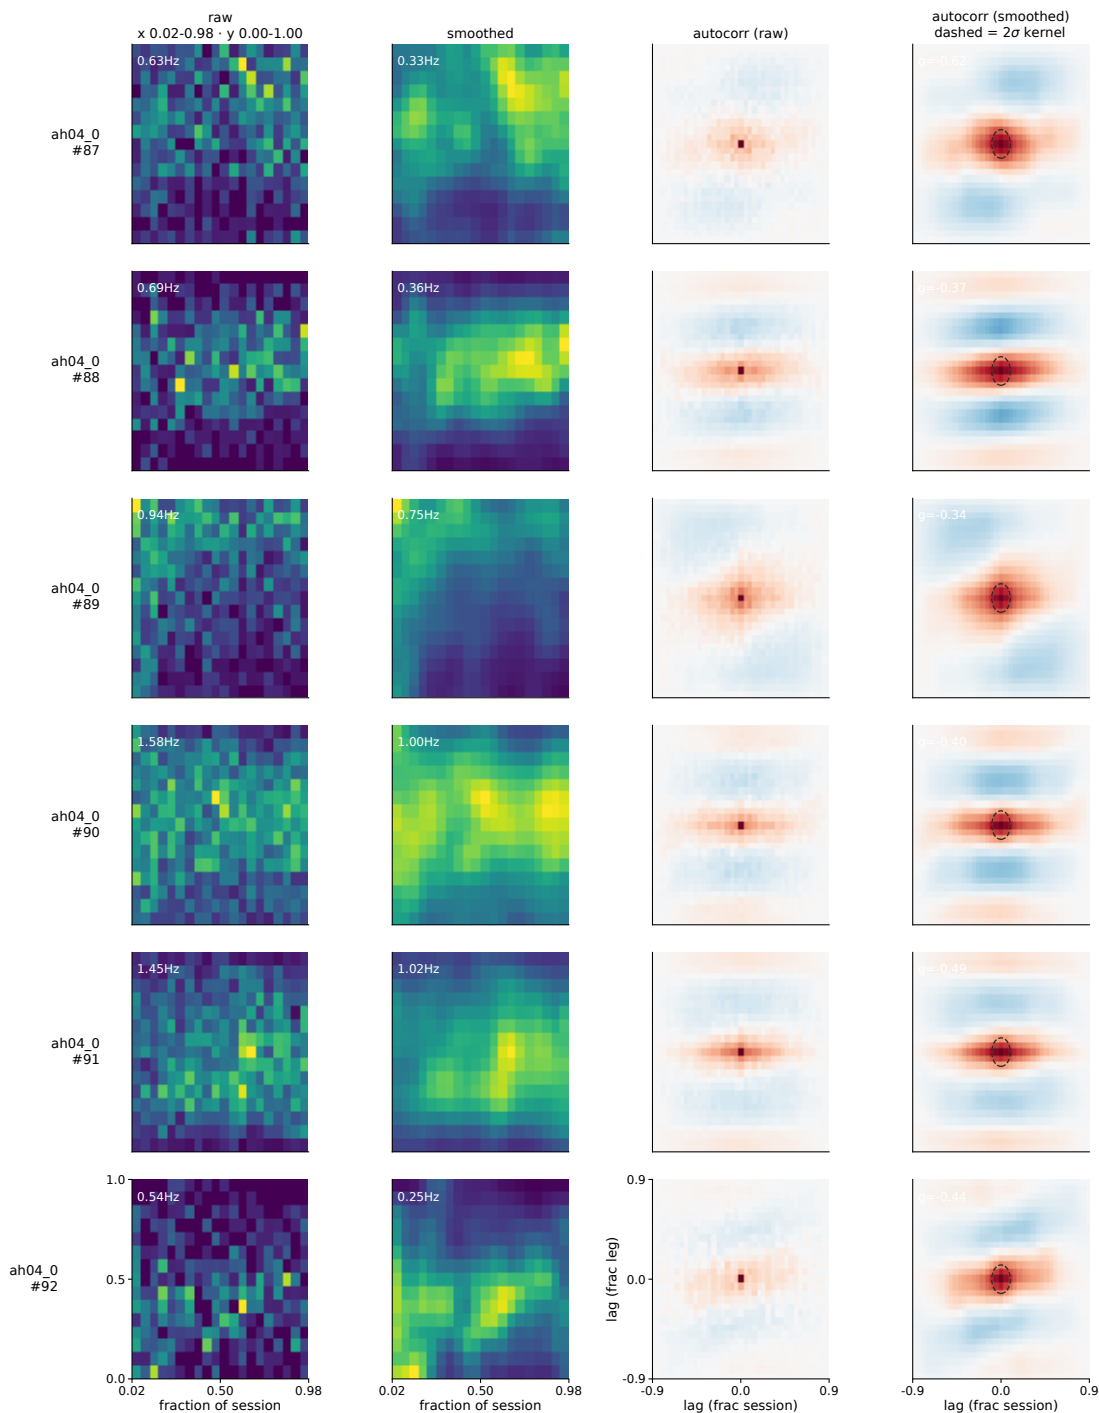


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 438-443 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

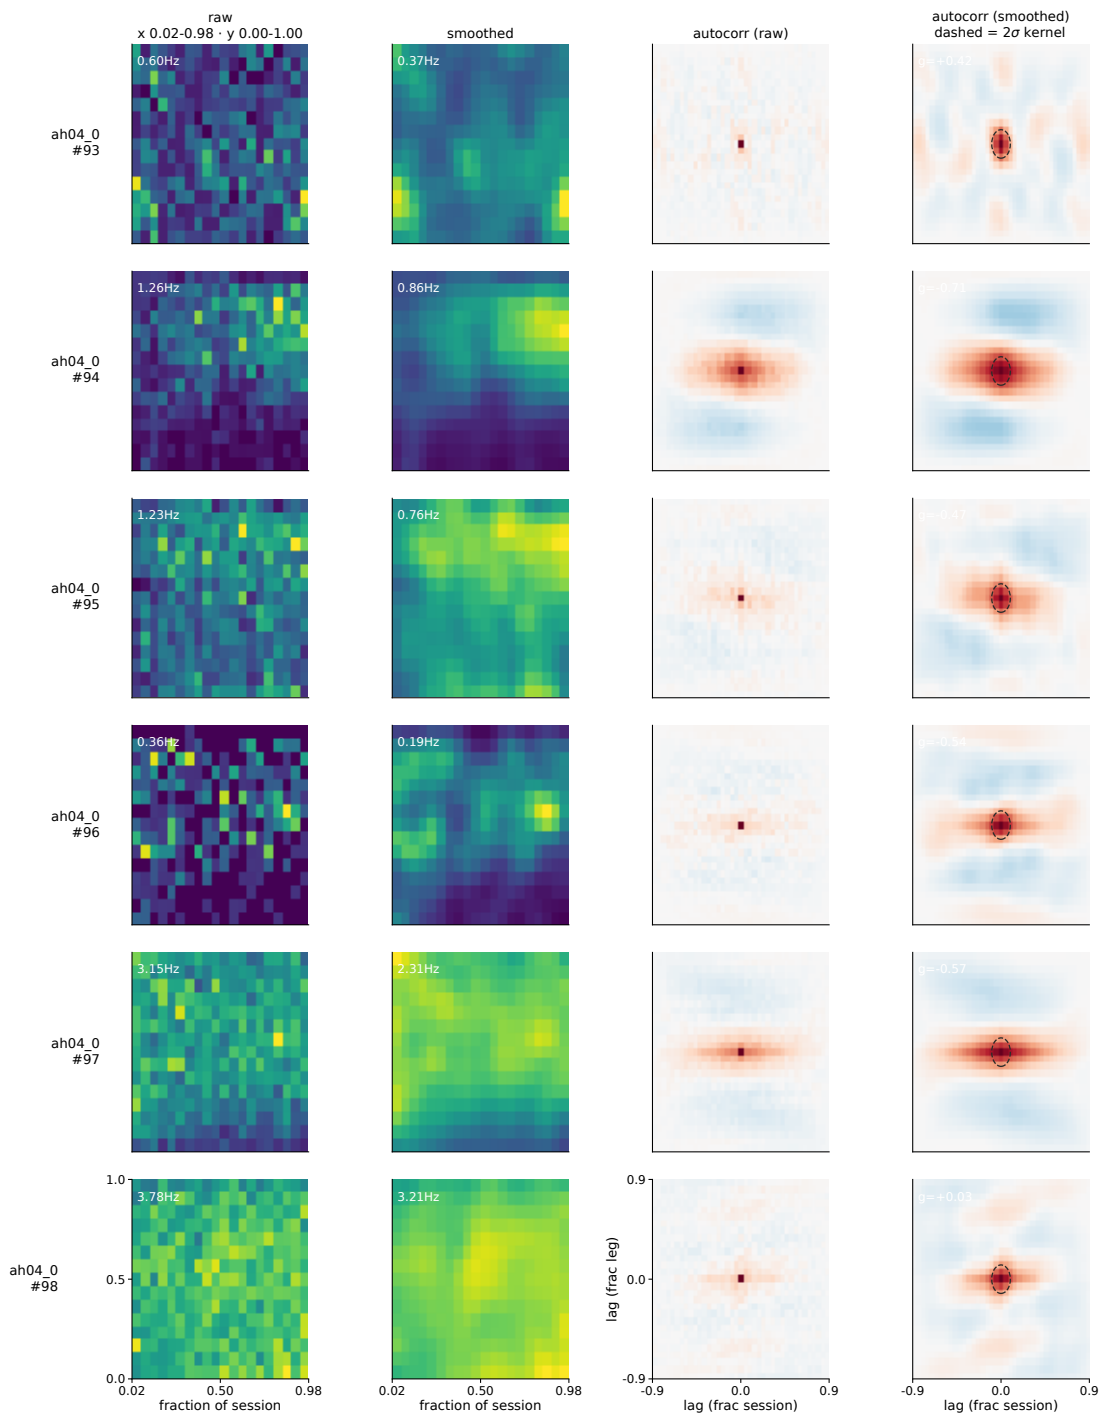


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 444-449 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

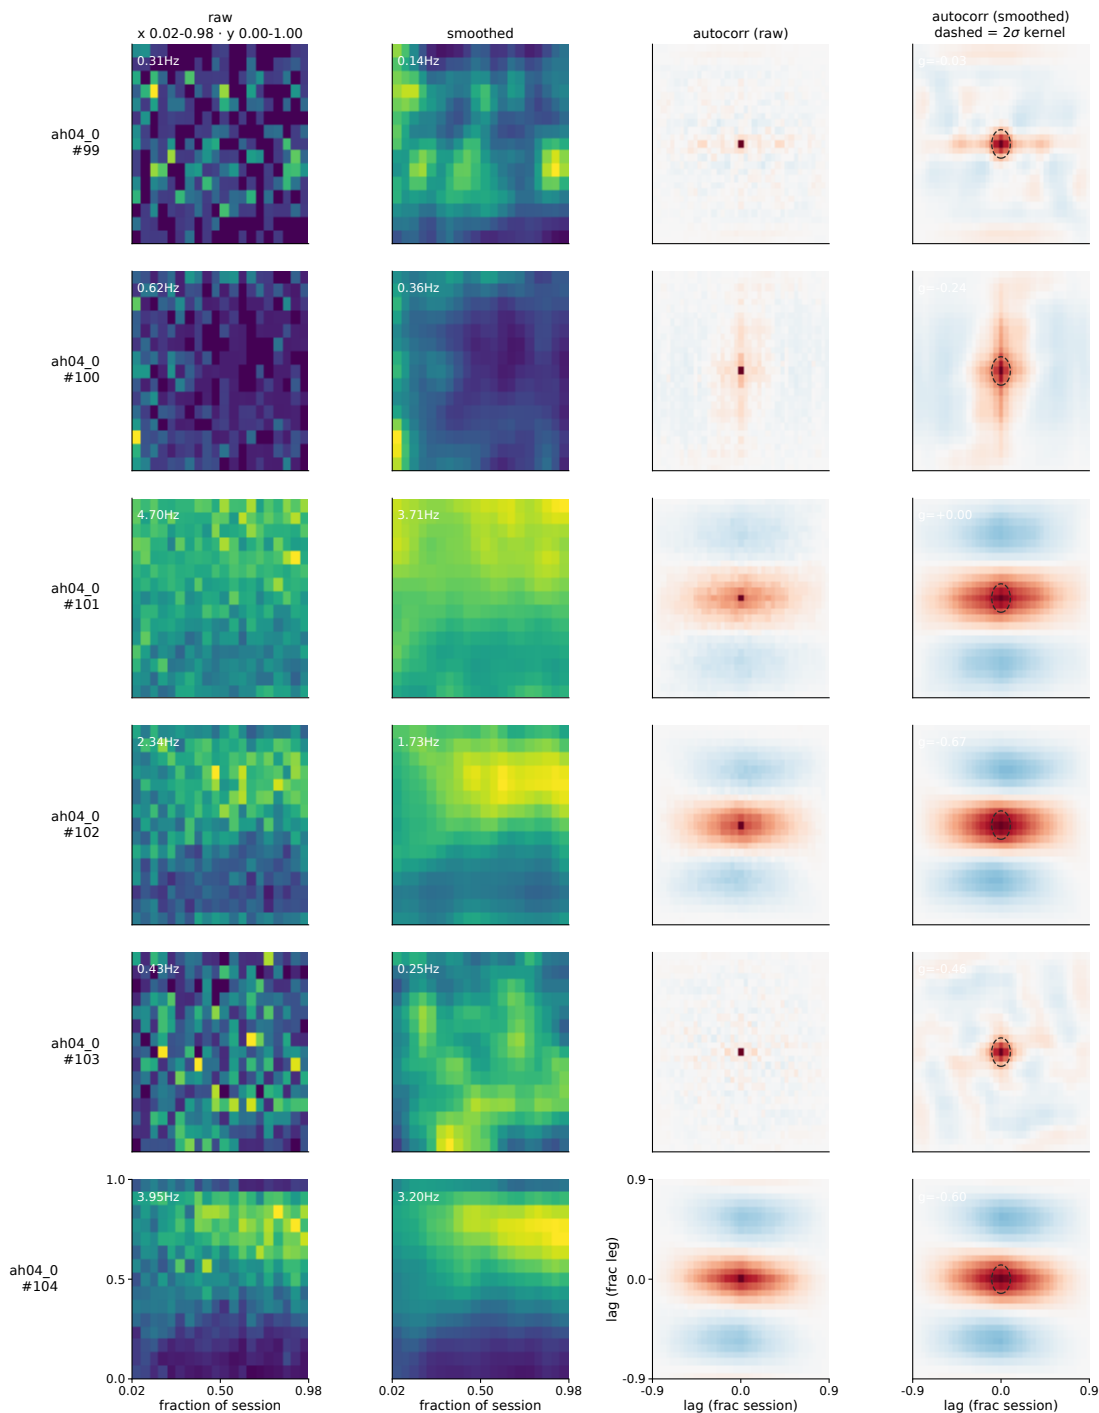


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 450-455 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

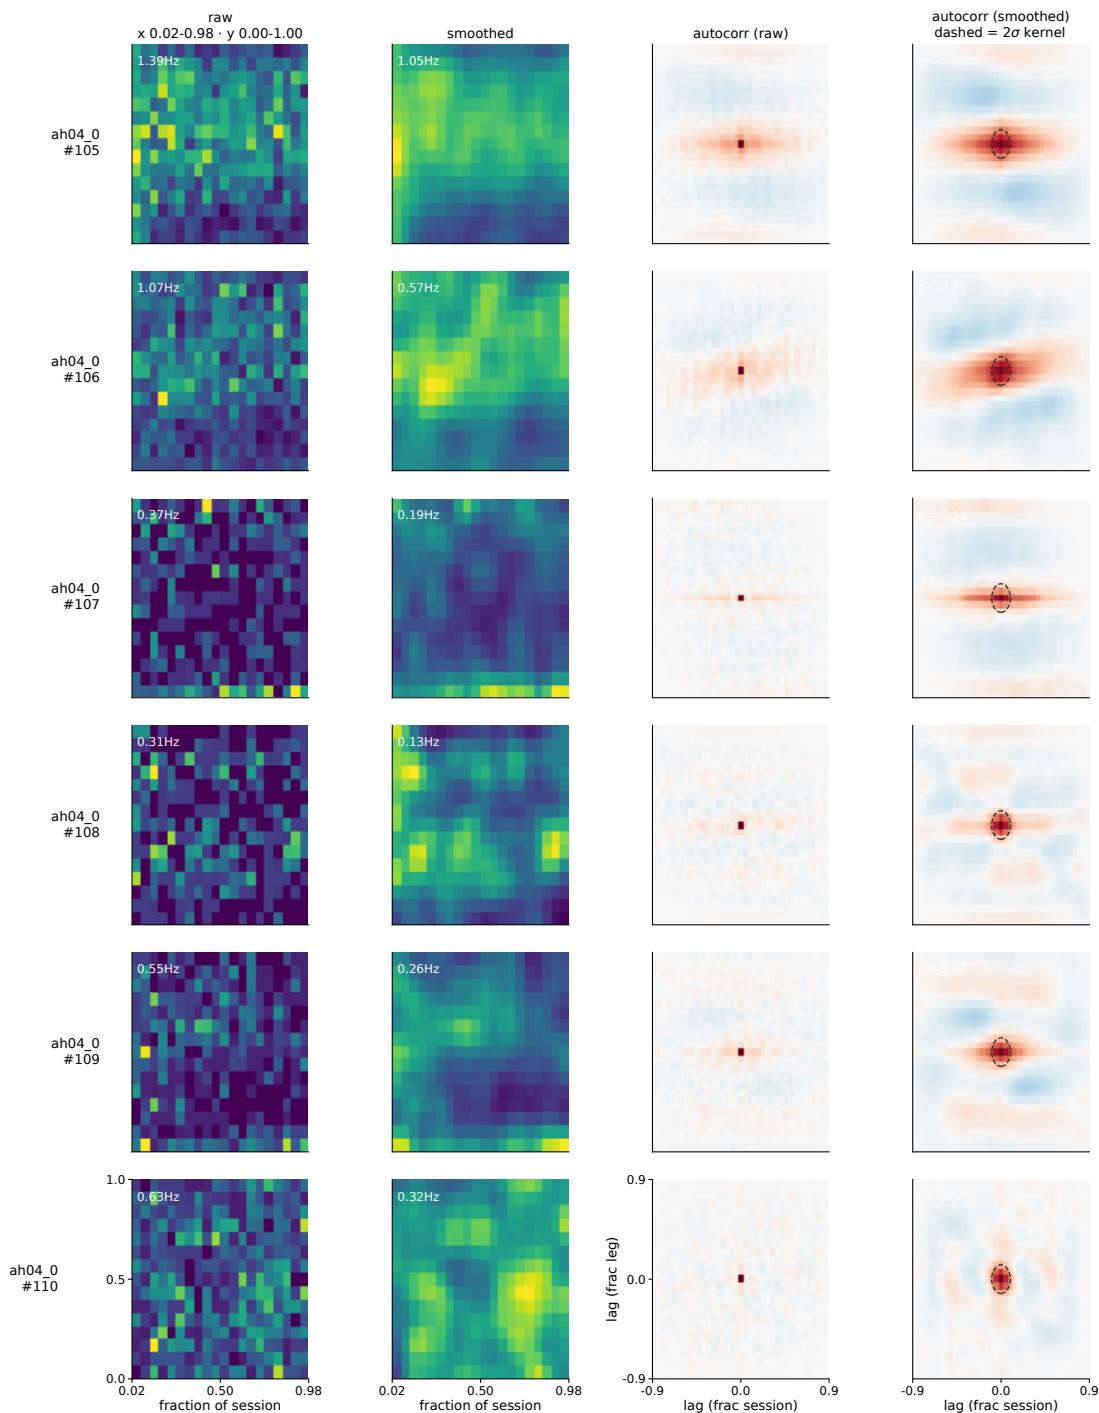


normalised | maps: x = fraction of session, y = fraction of goal-transition | autocorr: lag on both axes | neurons 462-467 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

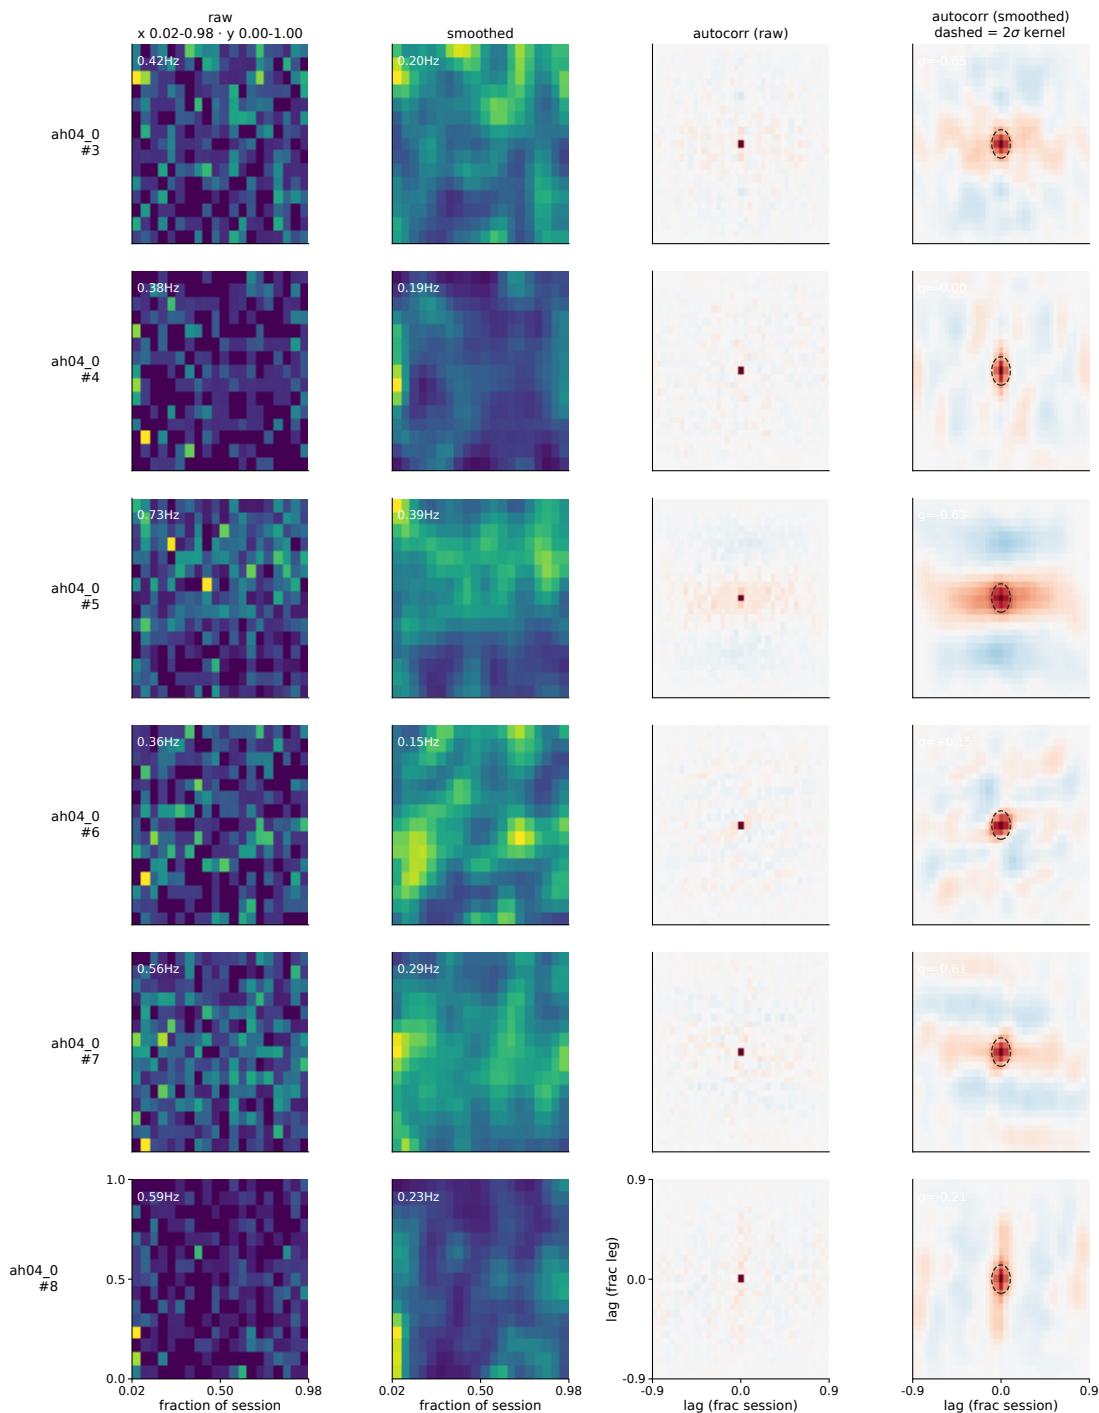


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 468-473 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

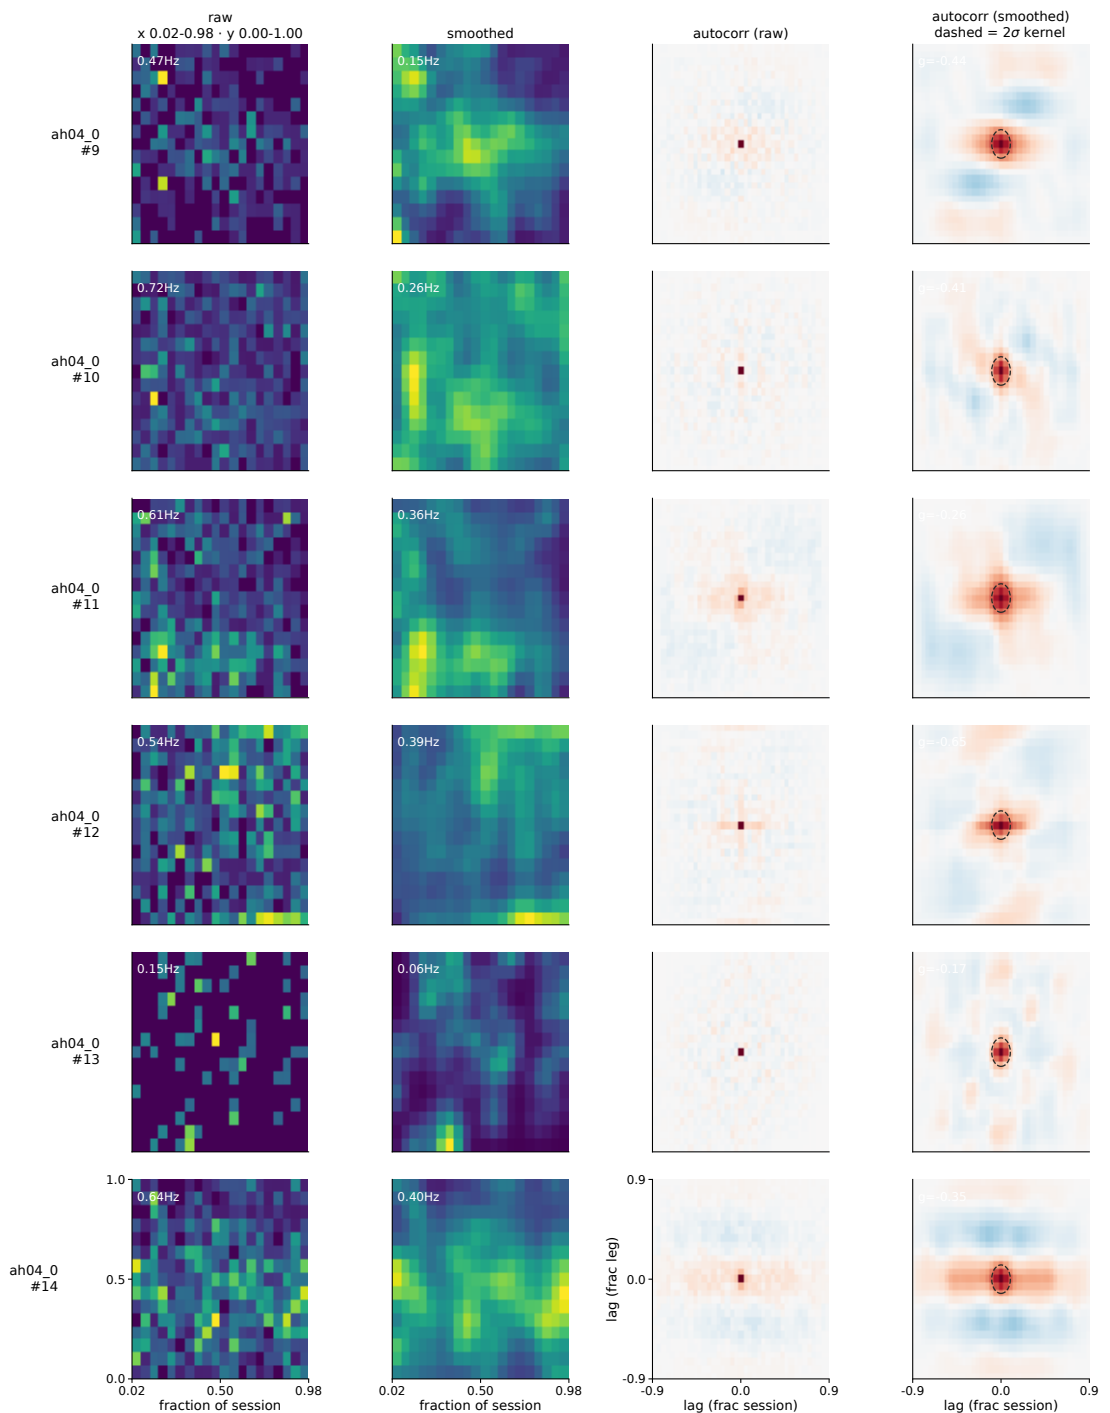


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 474-479 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

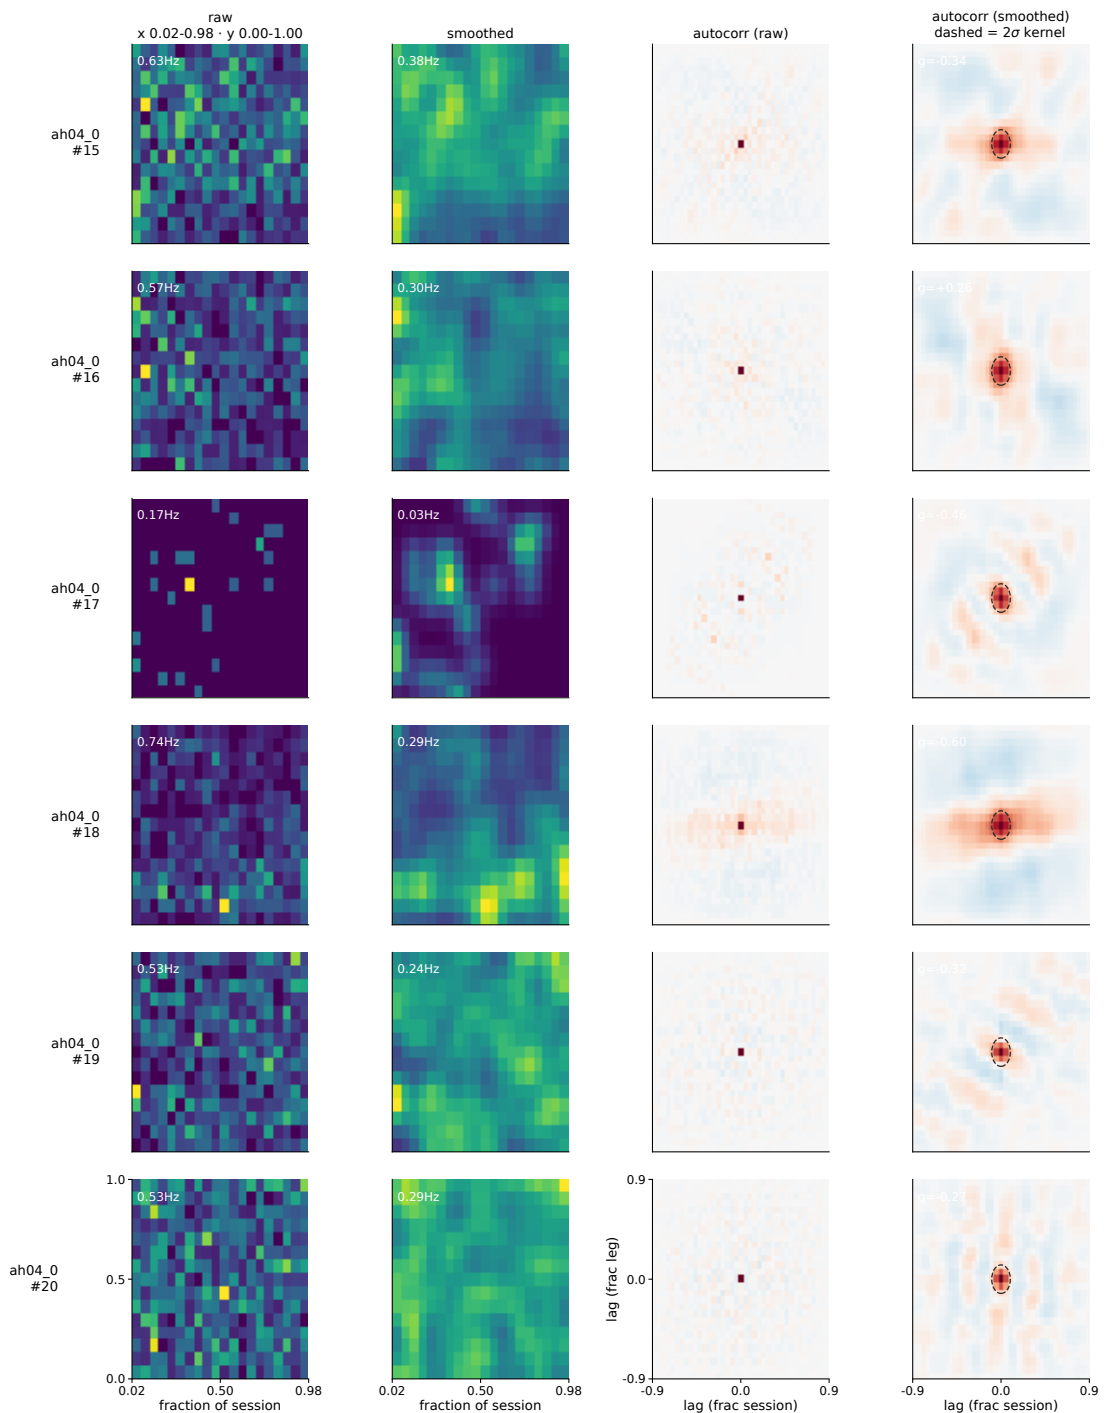


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 480-485 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

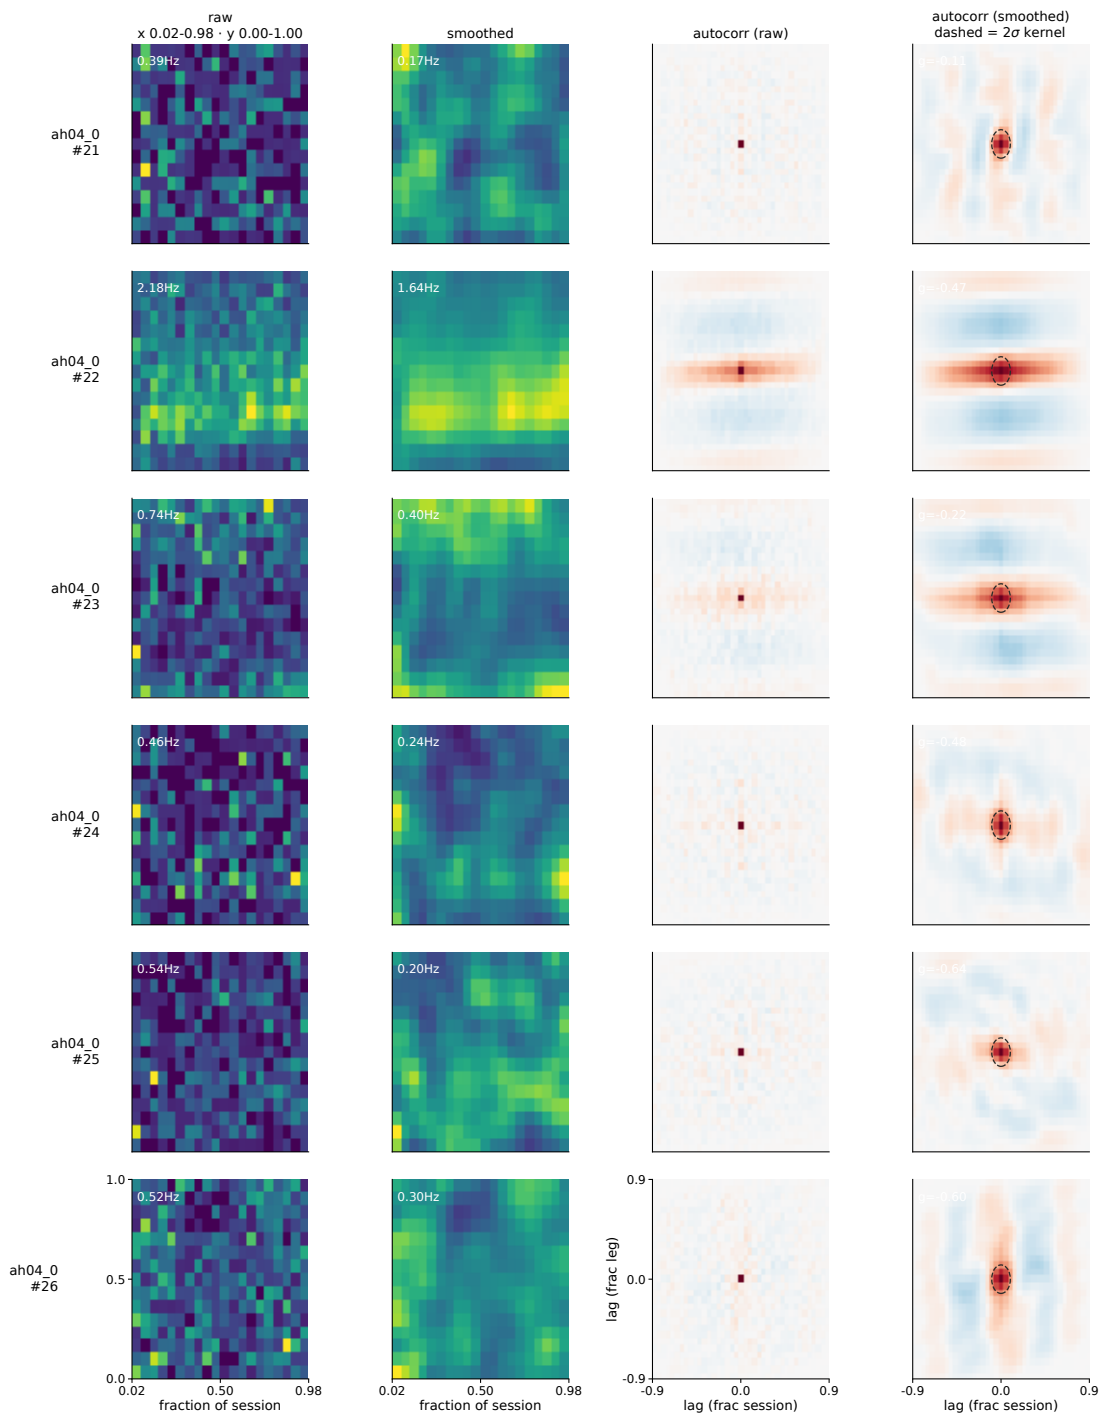


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 486-491 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

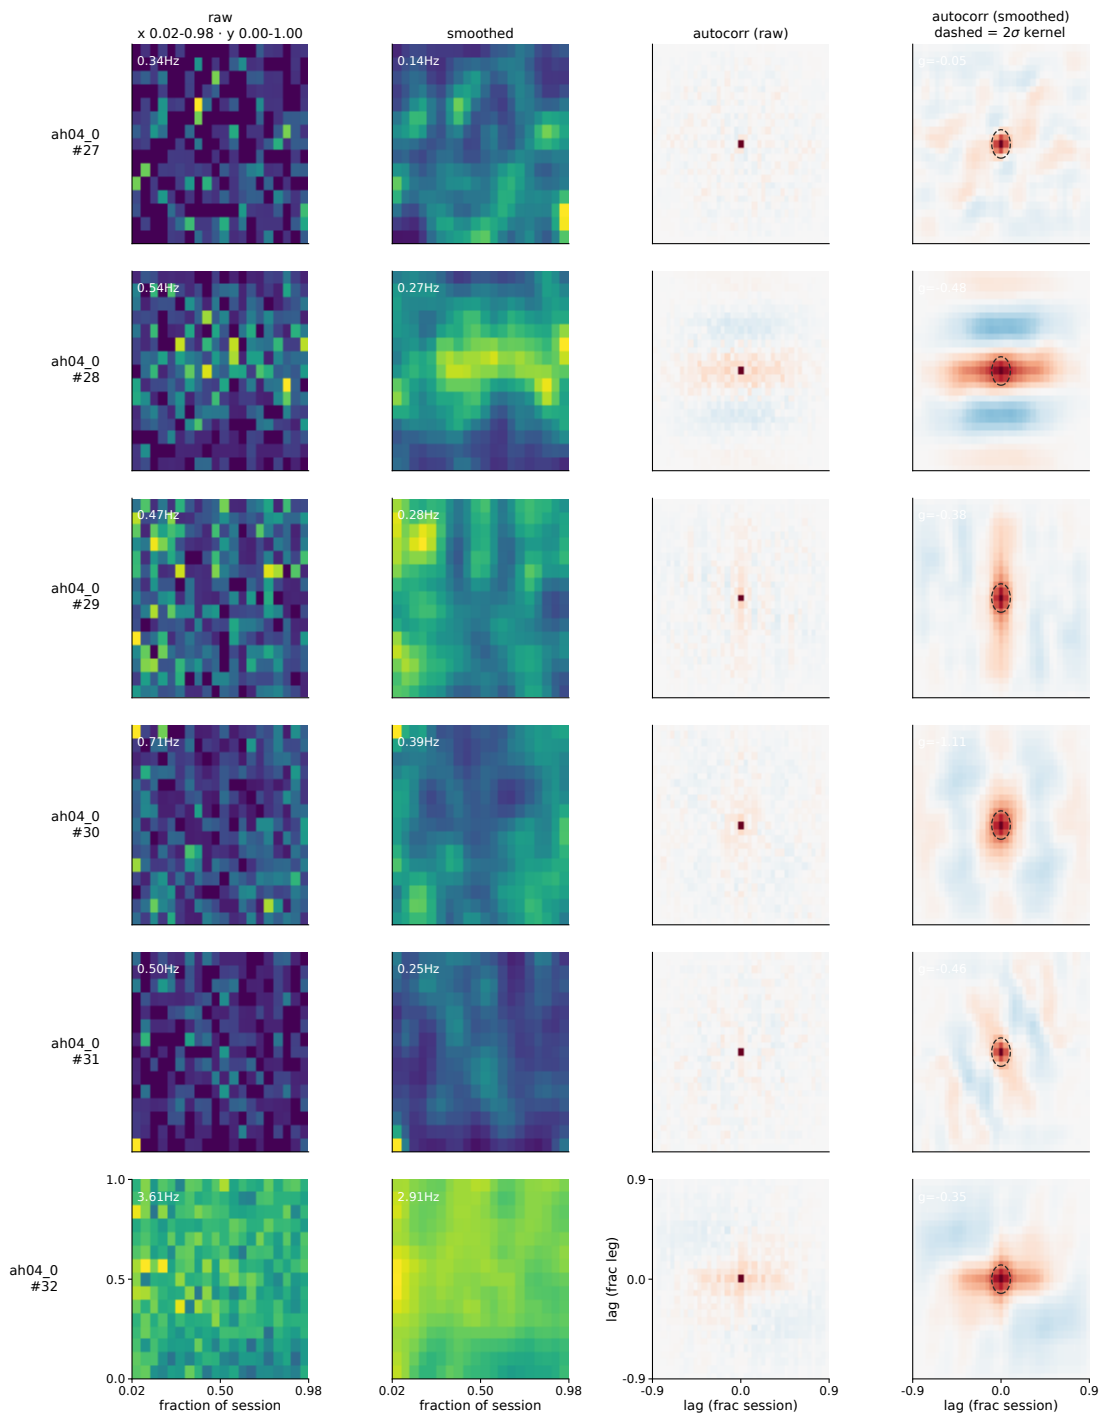


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 492-497 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

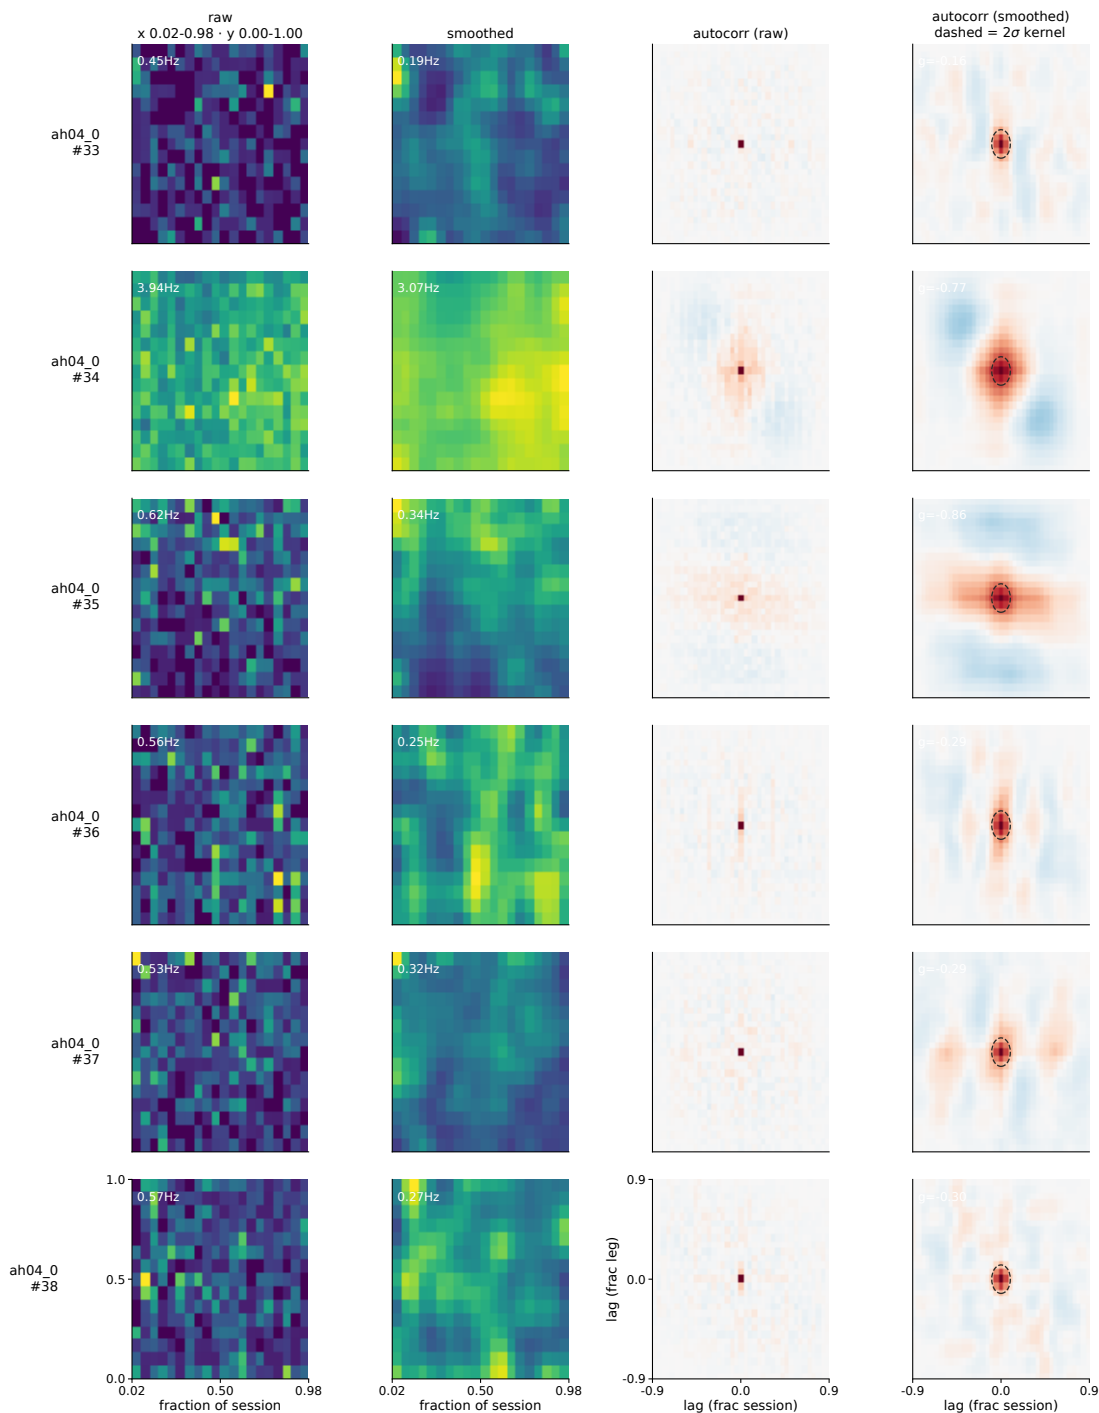


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 498-503 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

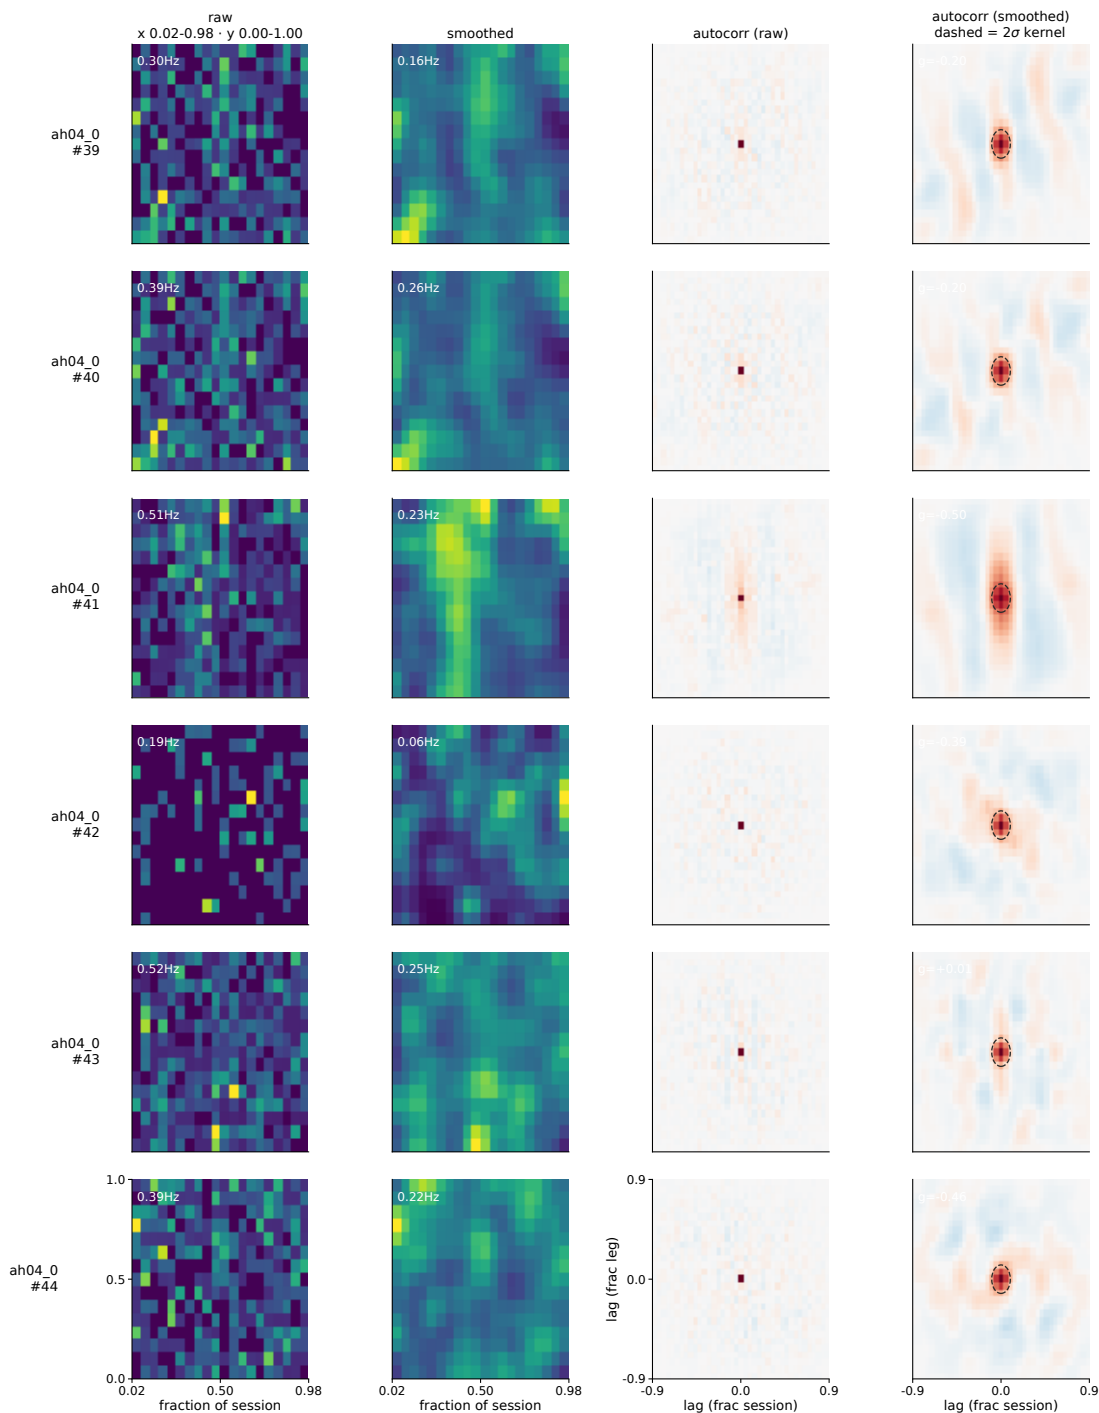


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 504-509 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

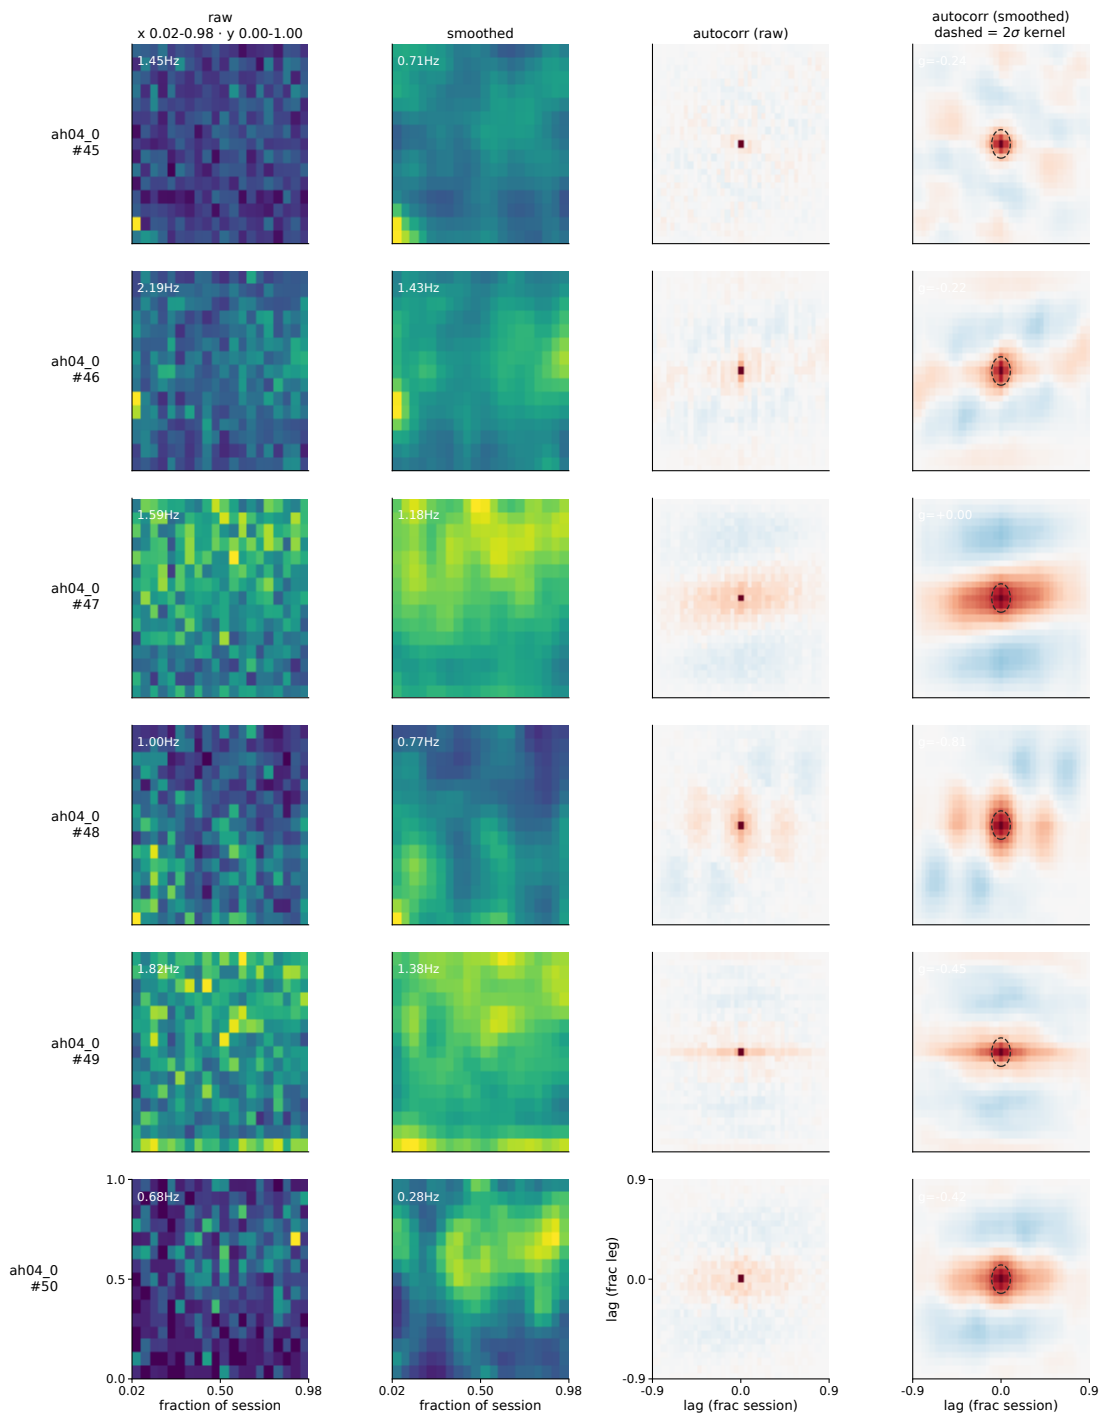


normalised | maps: x = fraction of session, y = fraction of goal transition | autocorr: lag on both axes | neurons 510-515 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

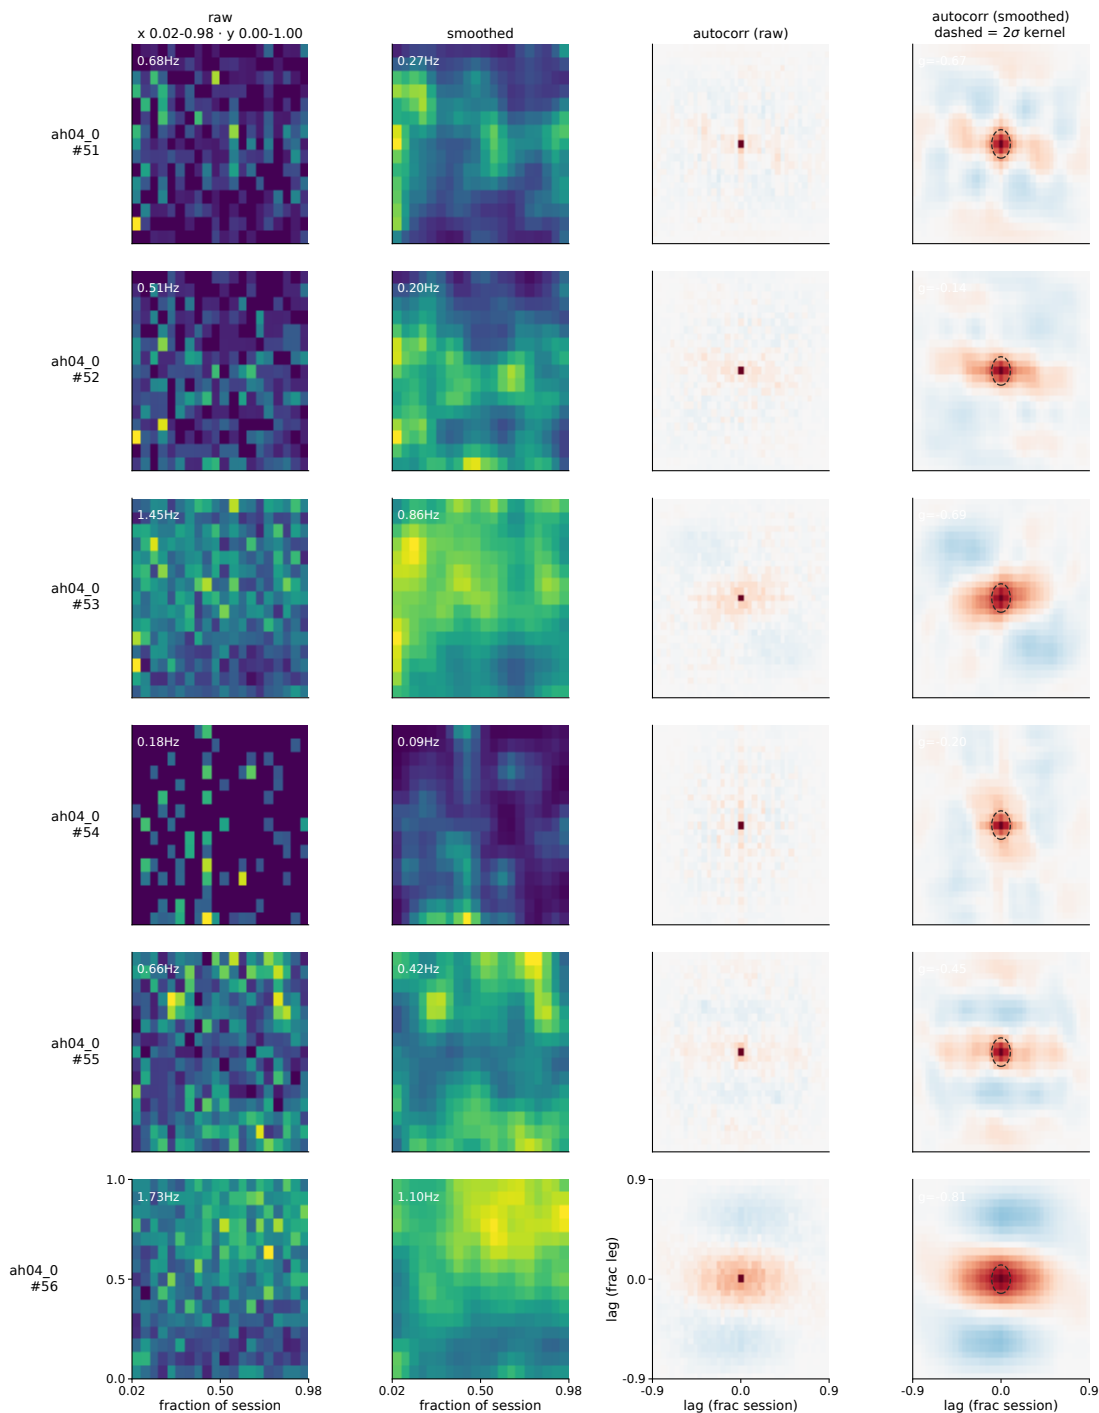


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 516-521 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

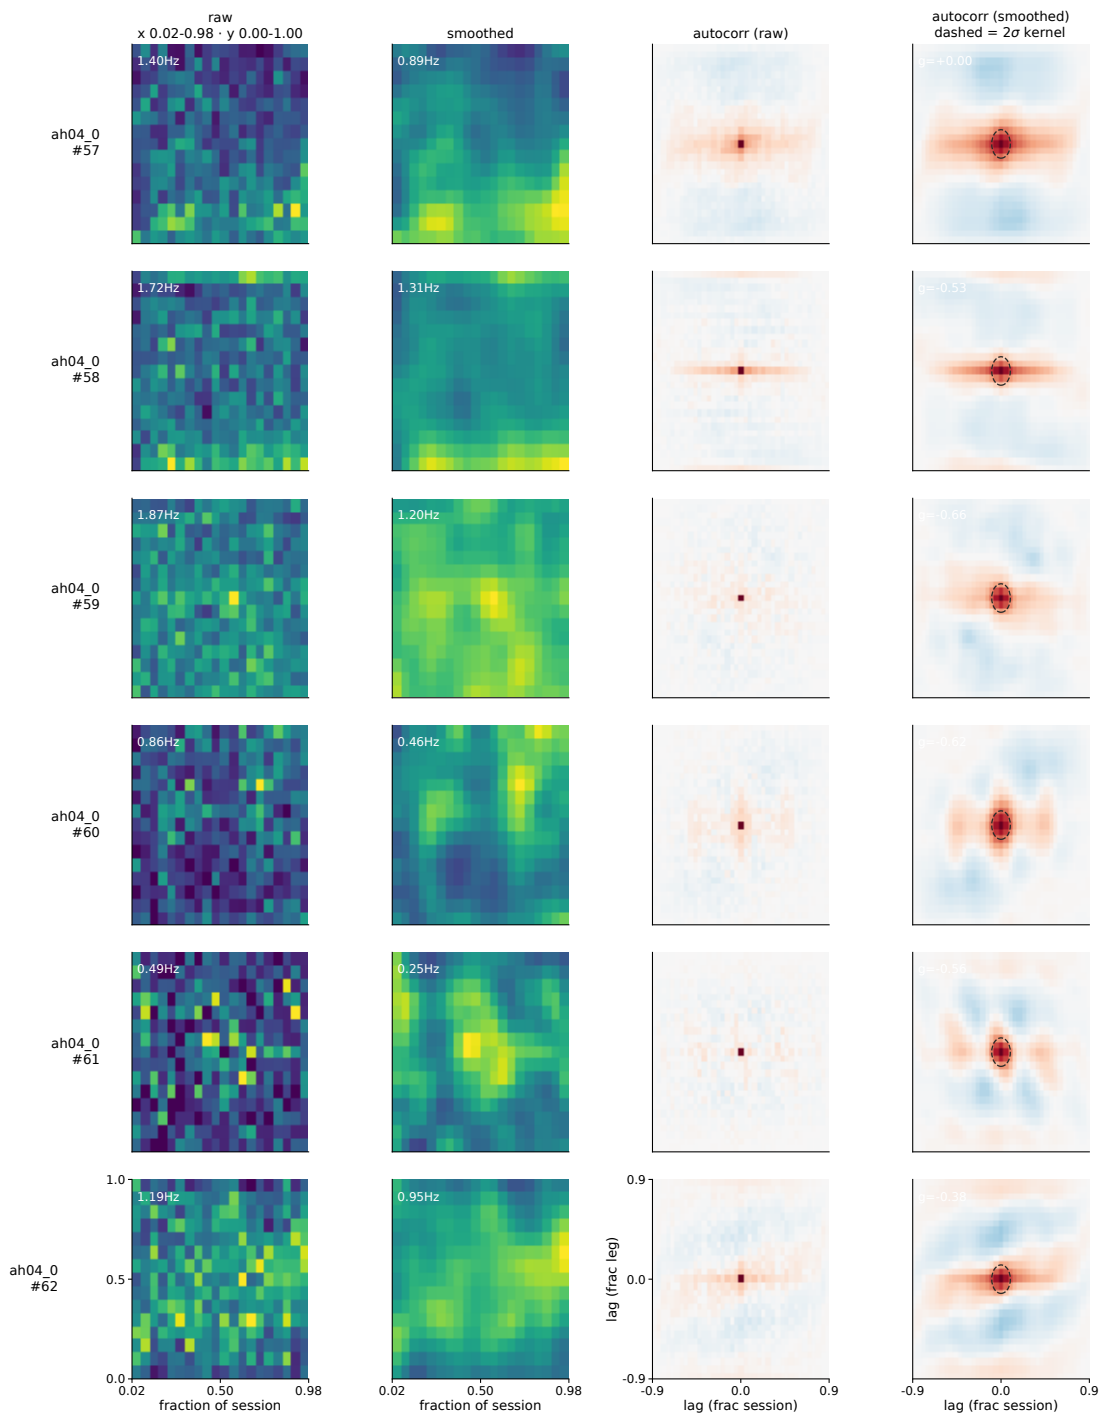


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 522-527 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

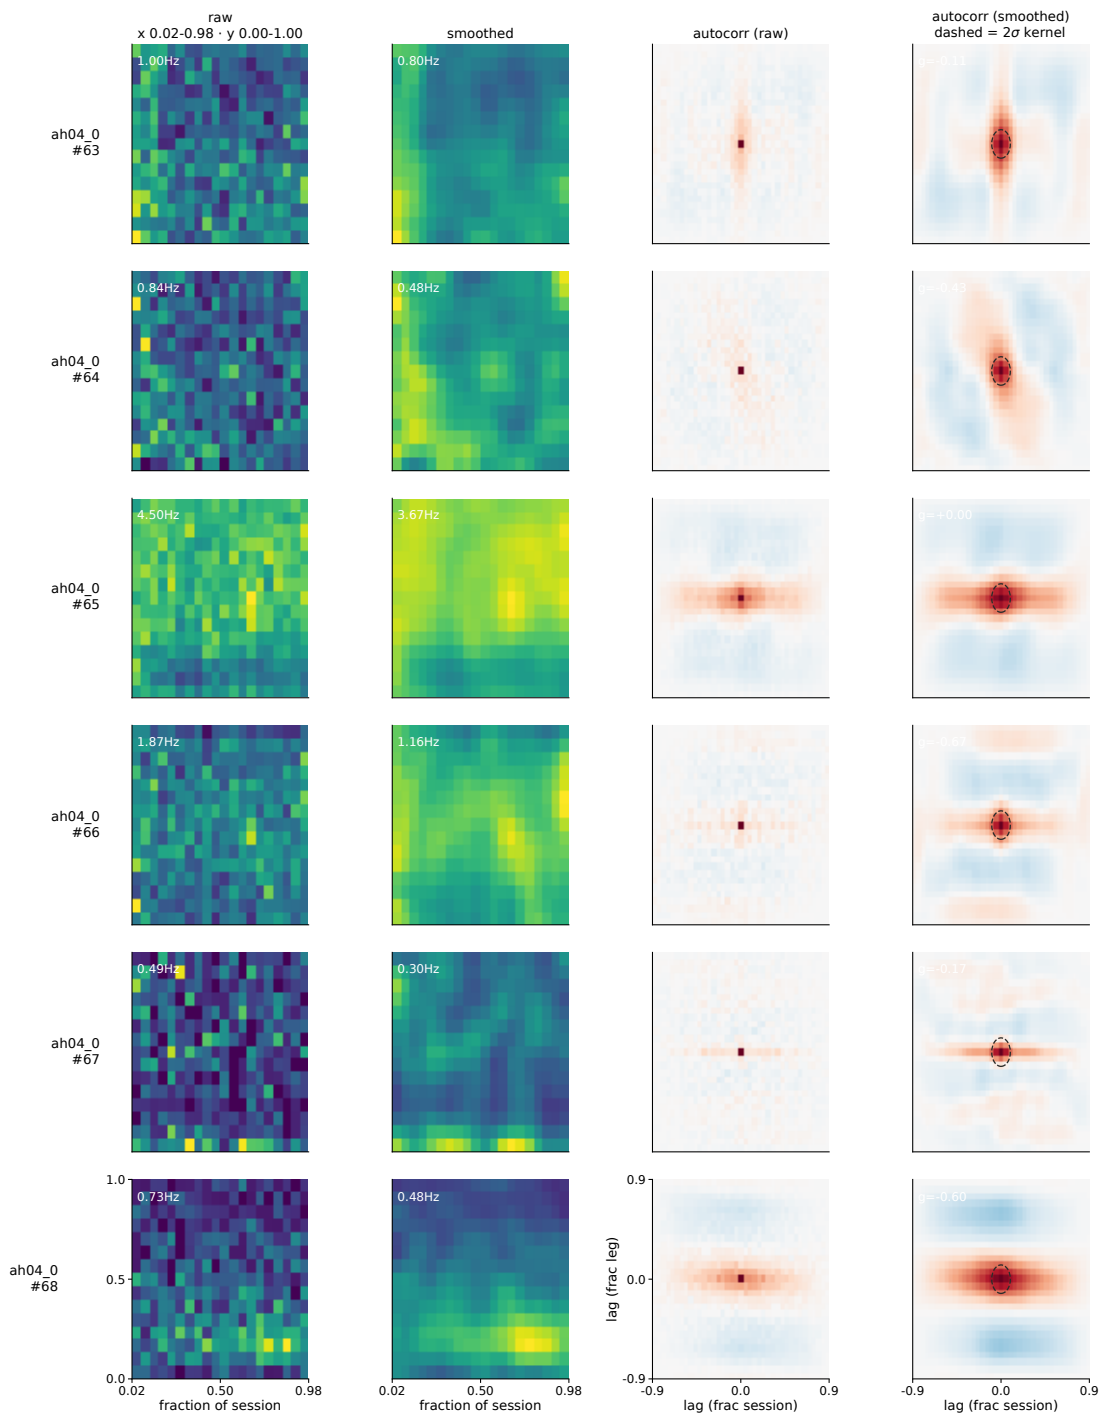


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 528-533 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

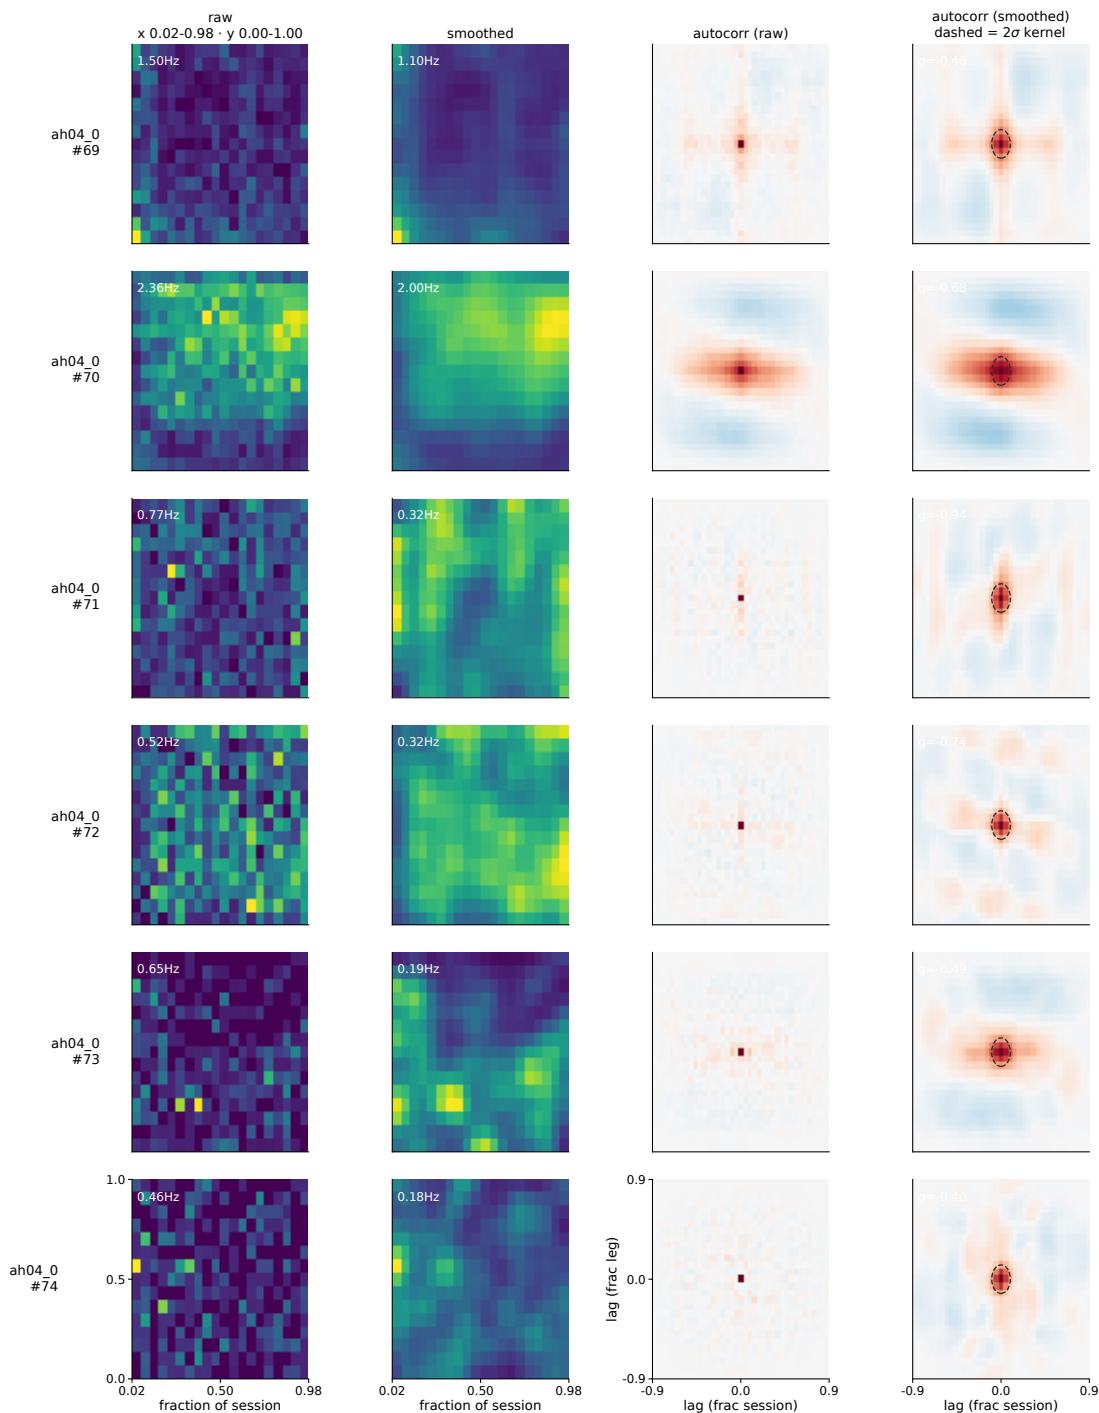


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 534-539 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

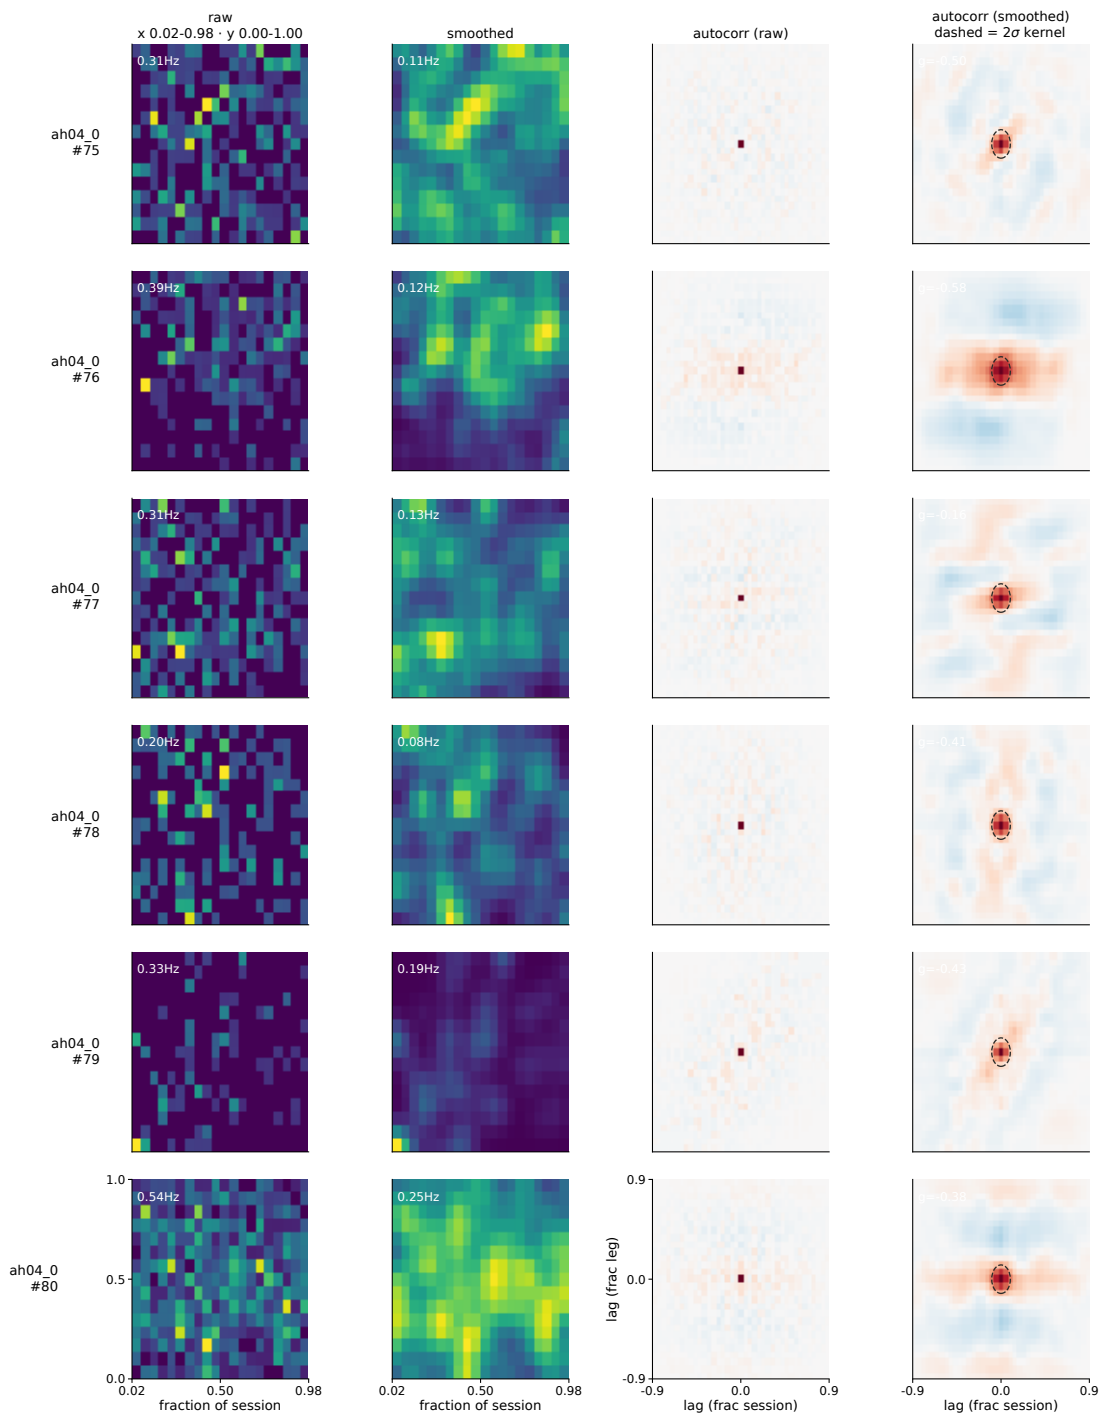


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 540-545 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

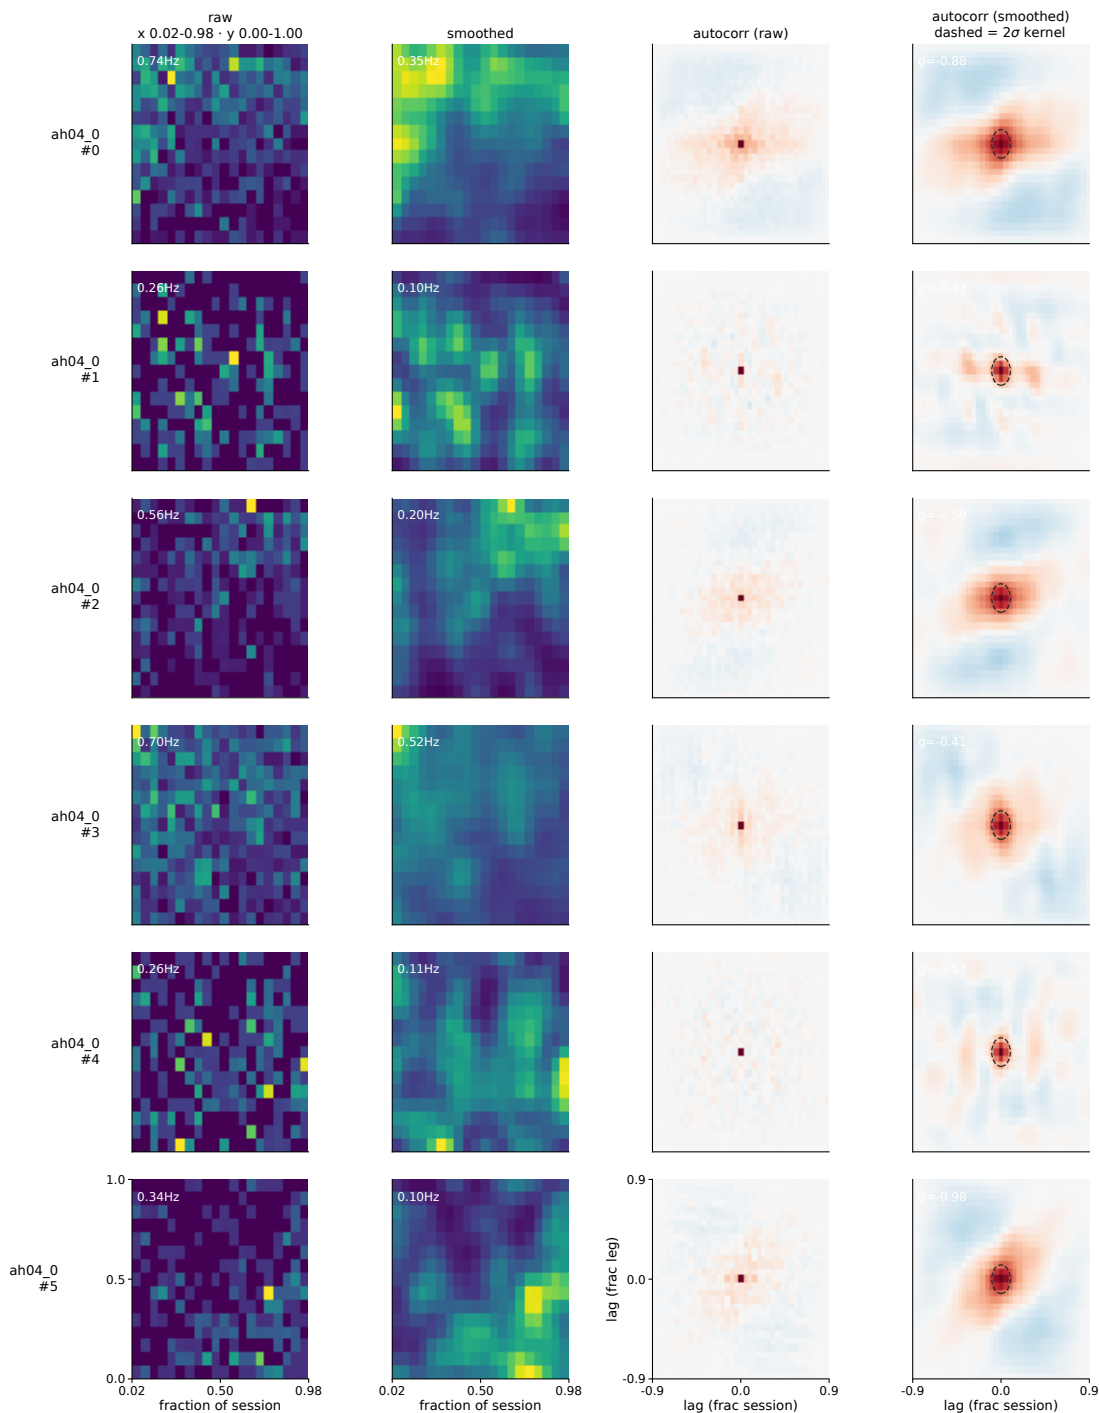


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 546-551 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

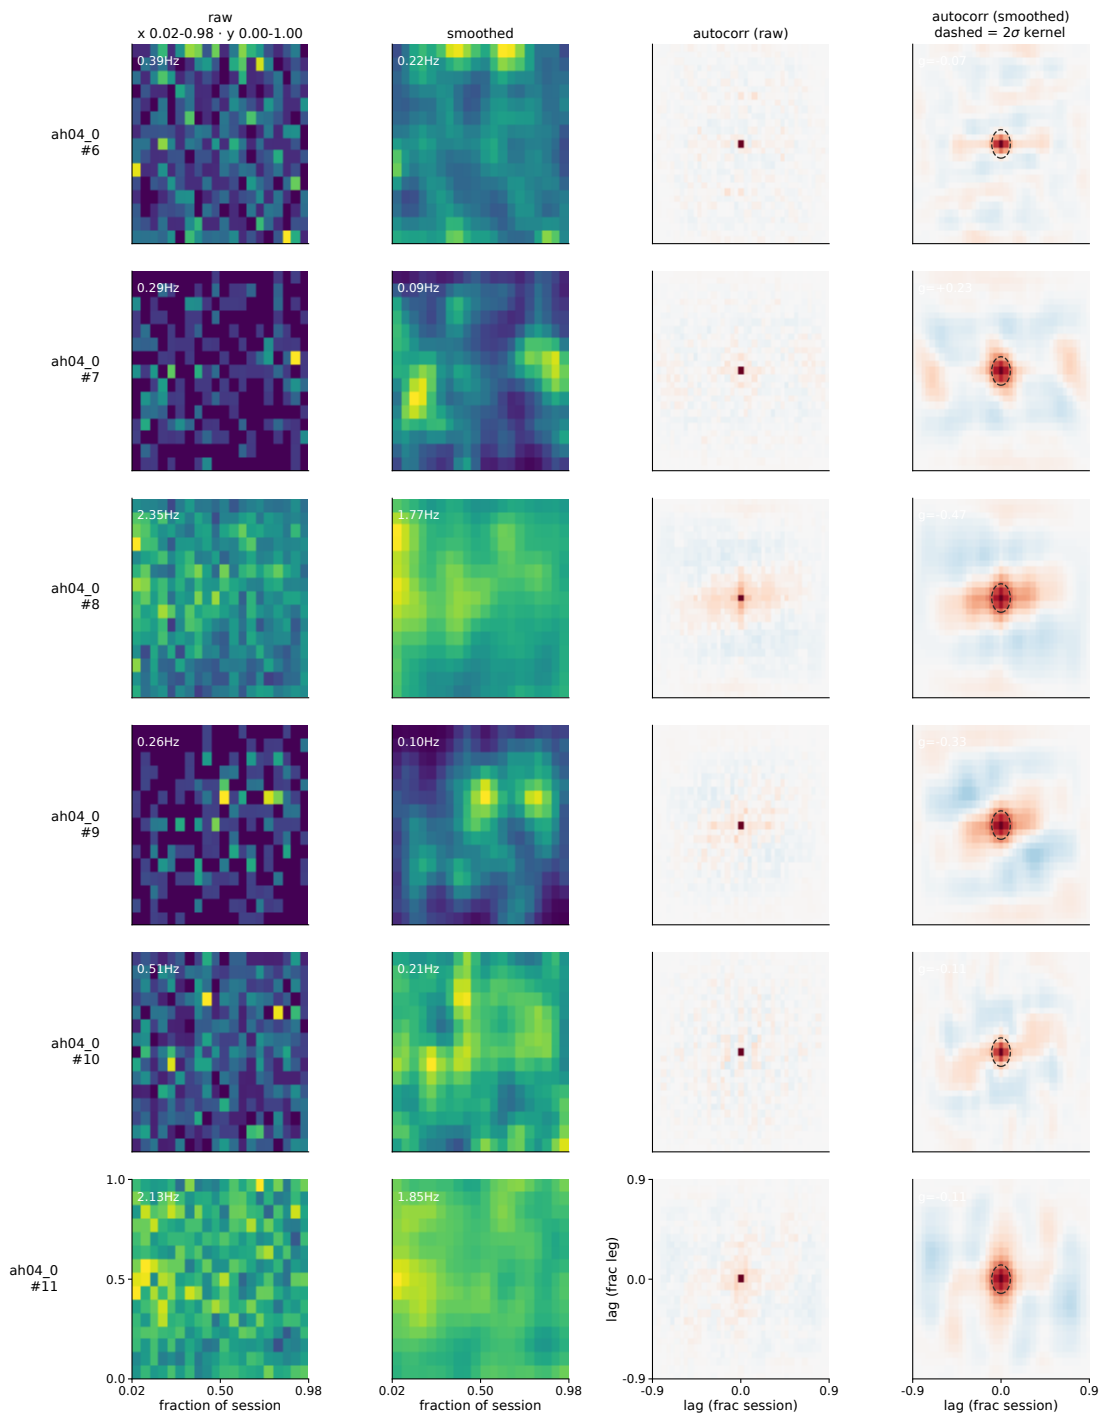


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 552-557 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

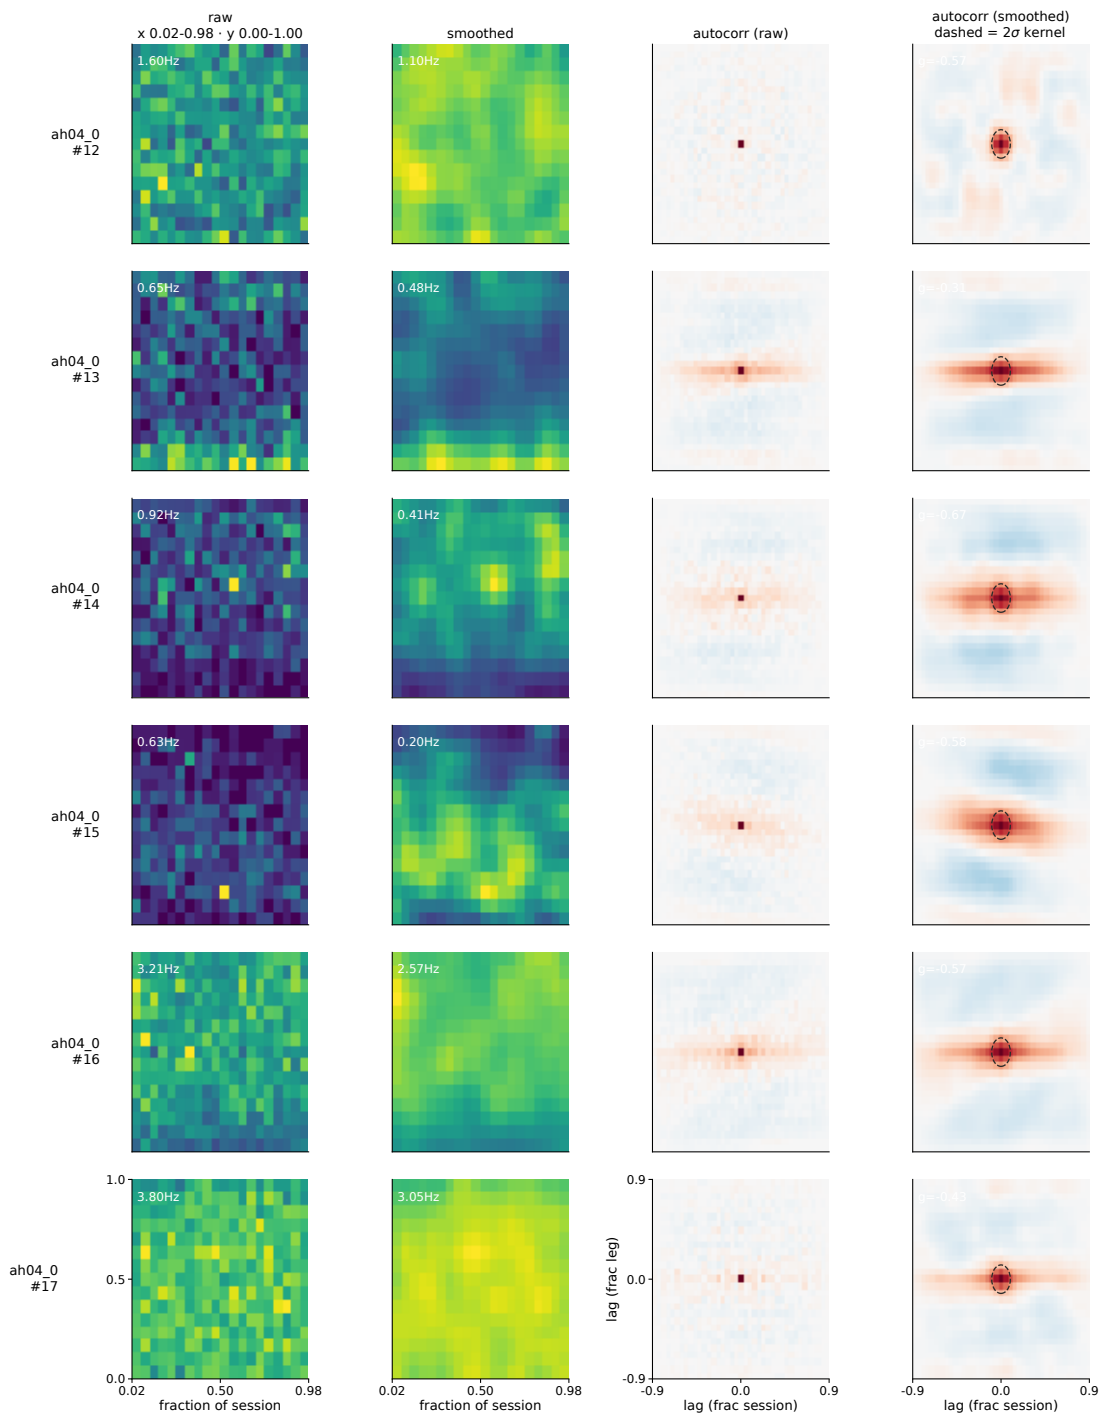


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 558-563 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

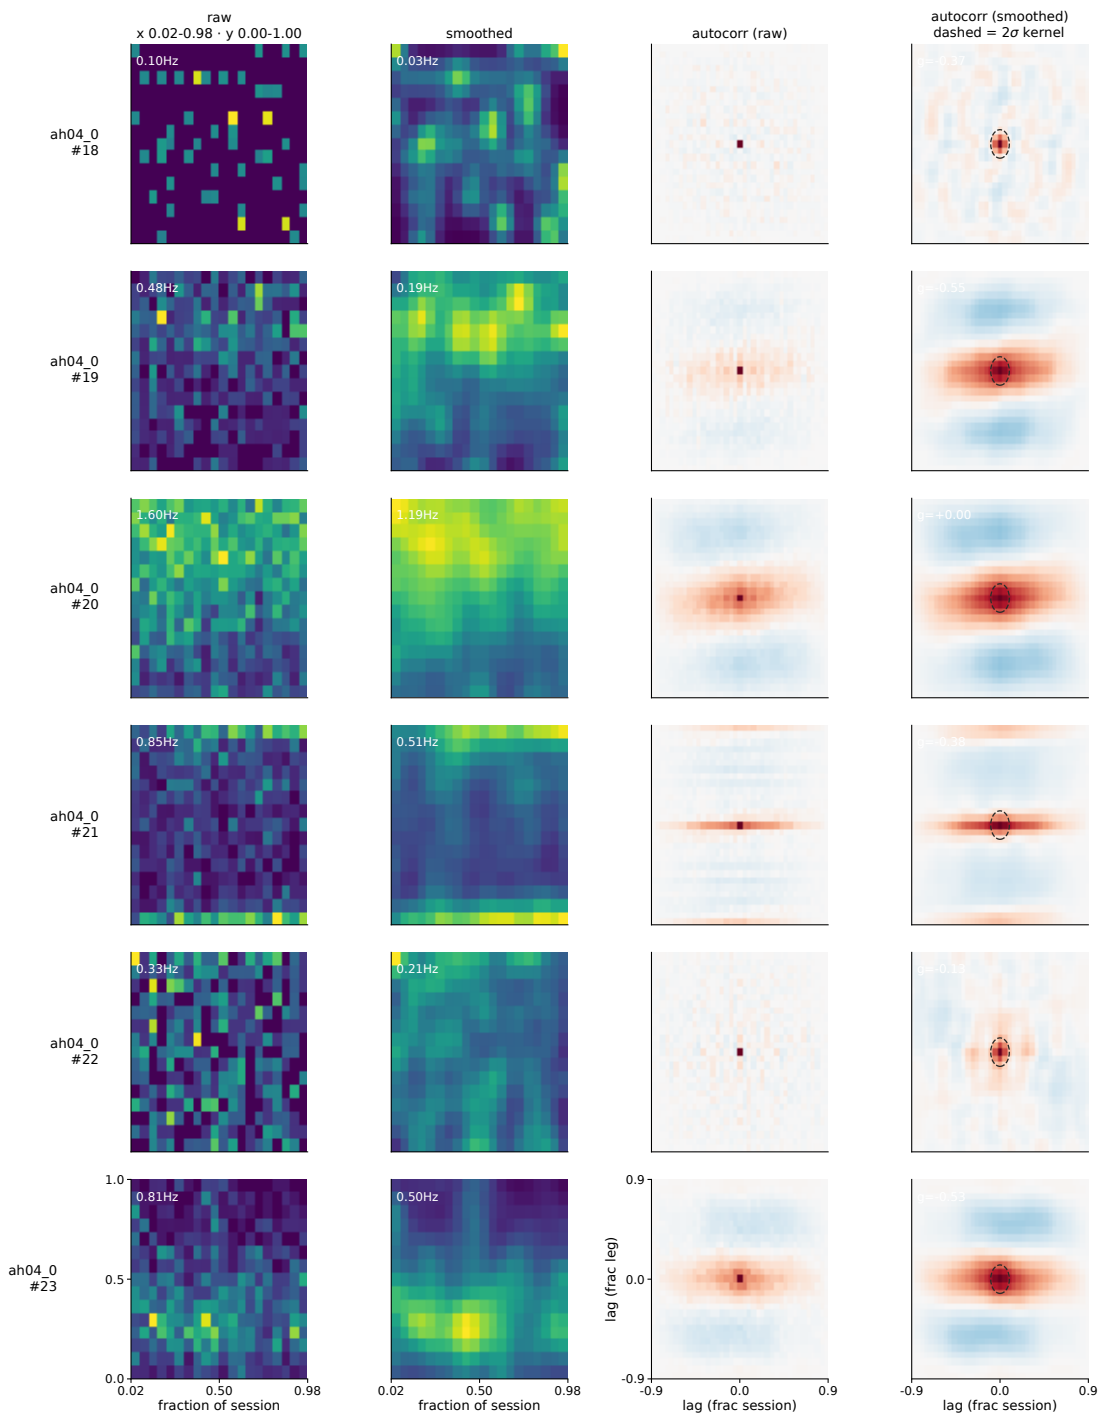


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 564-569 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

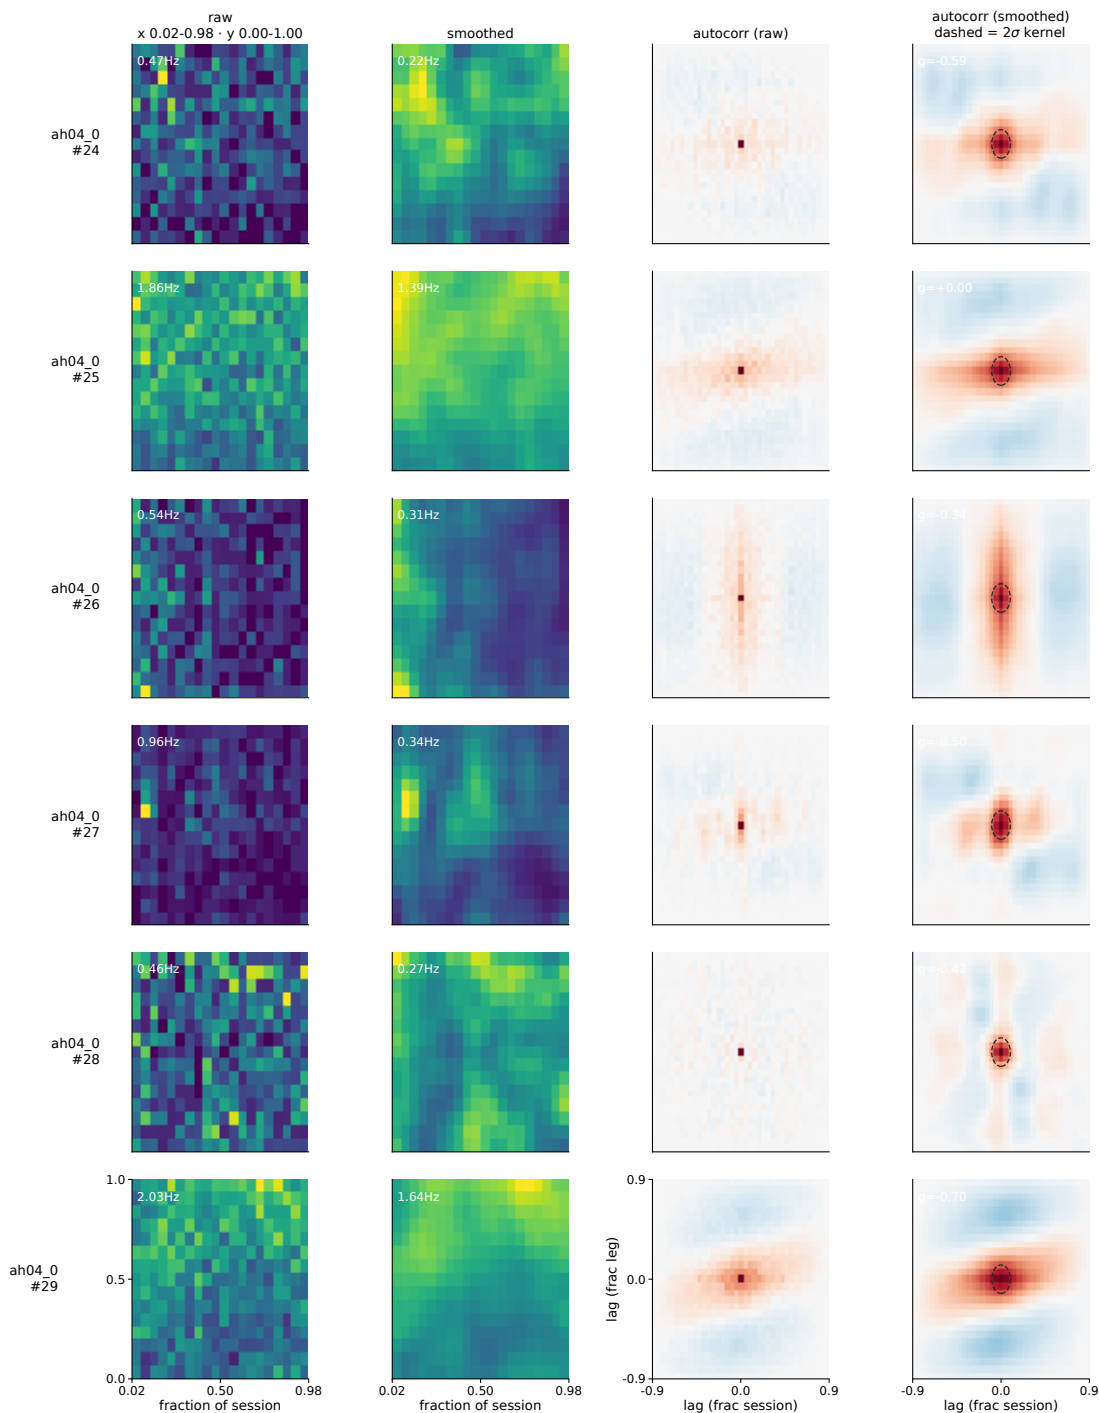


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 570-575 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

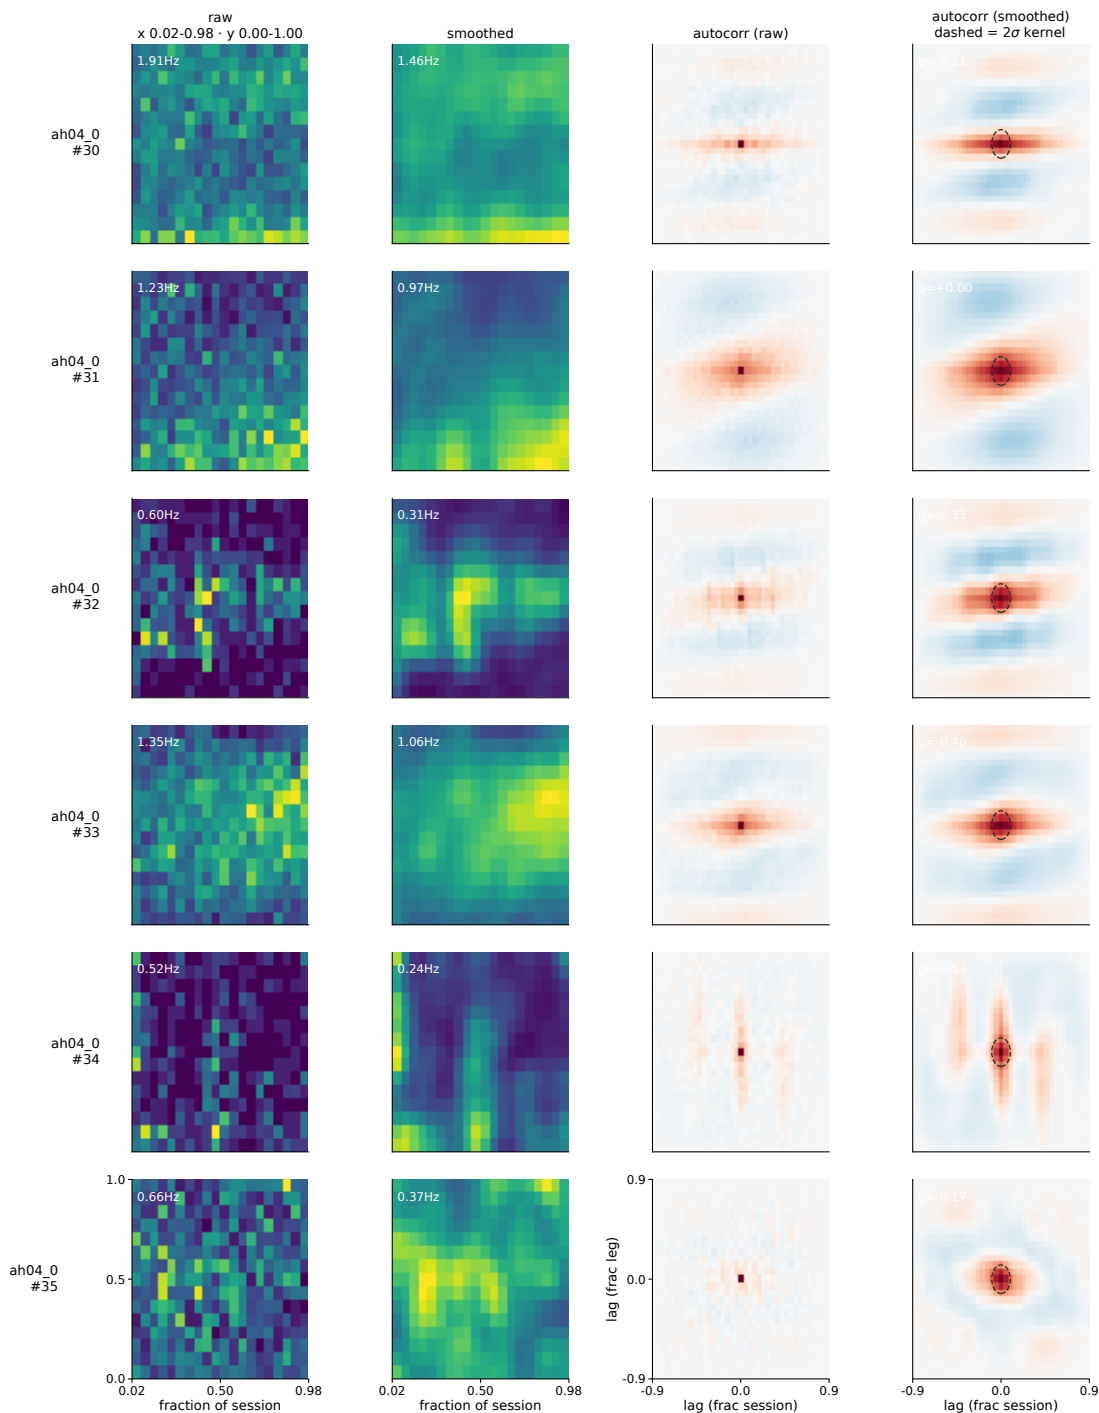


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 576-581 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

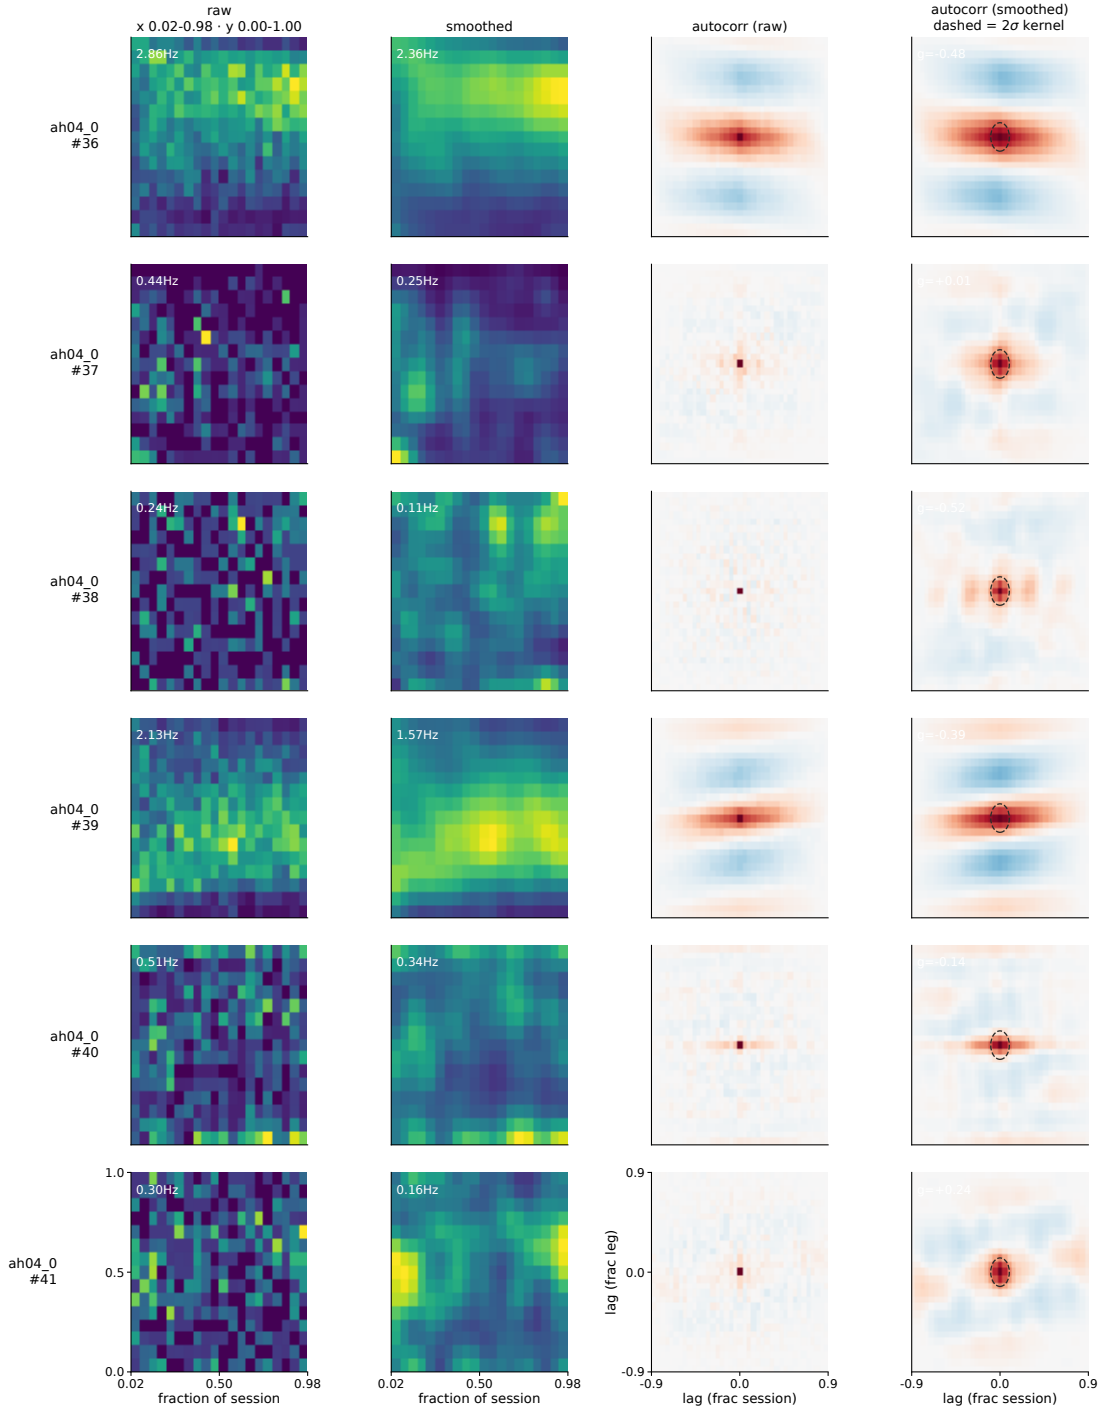


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 582-587 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

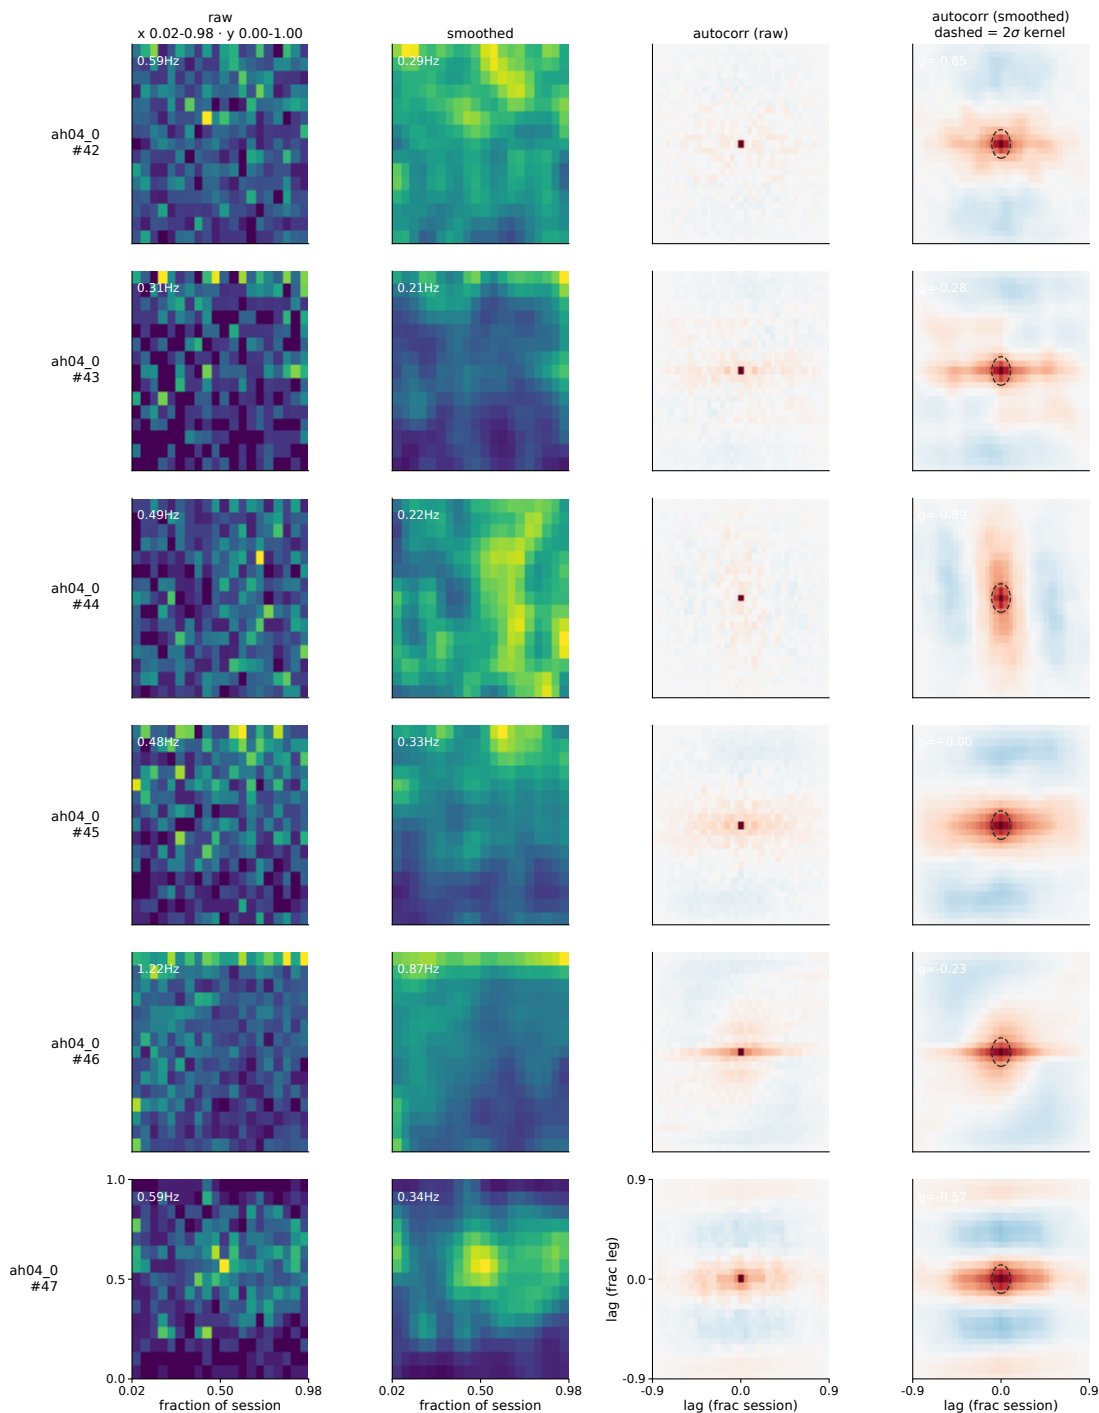


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 588-593 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

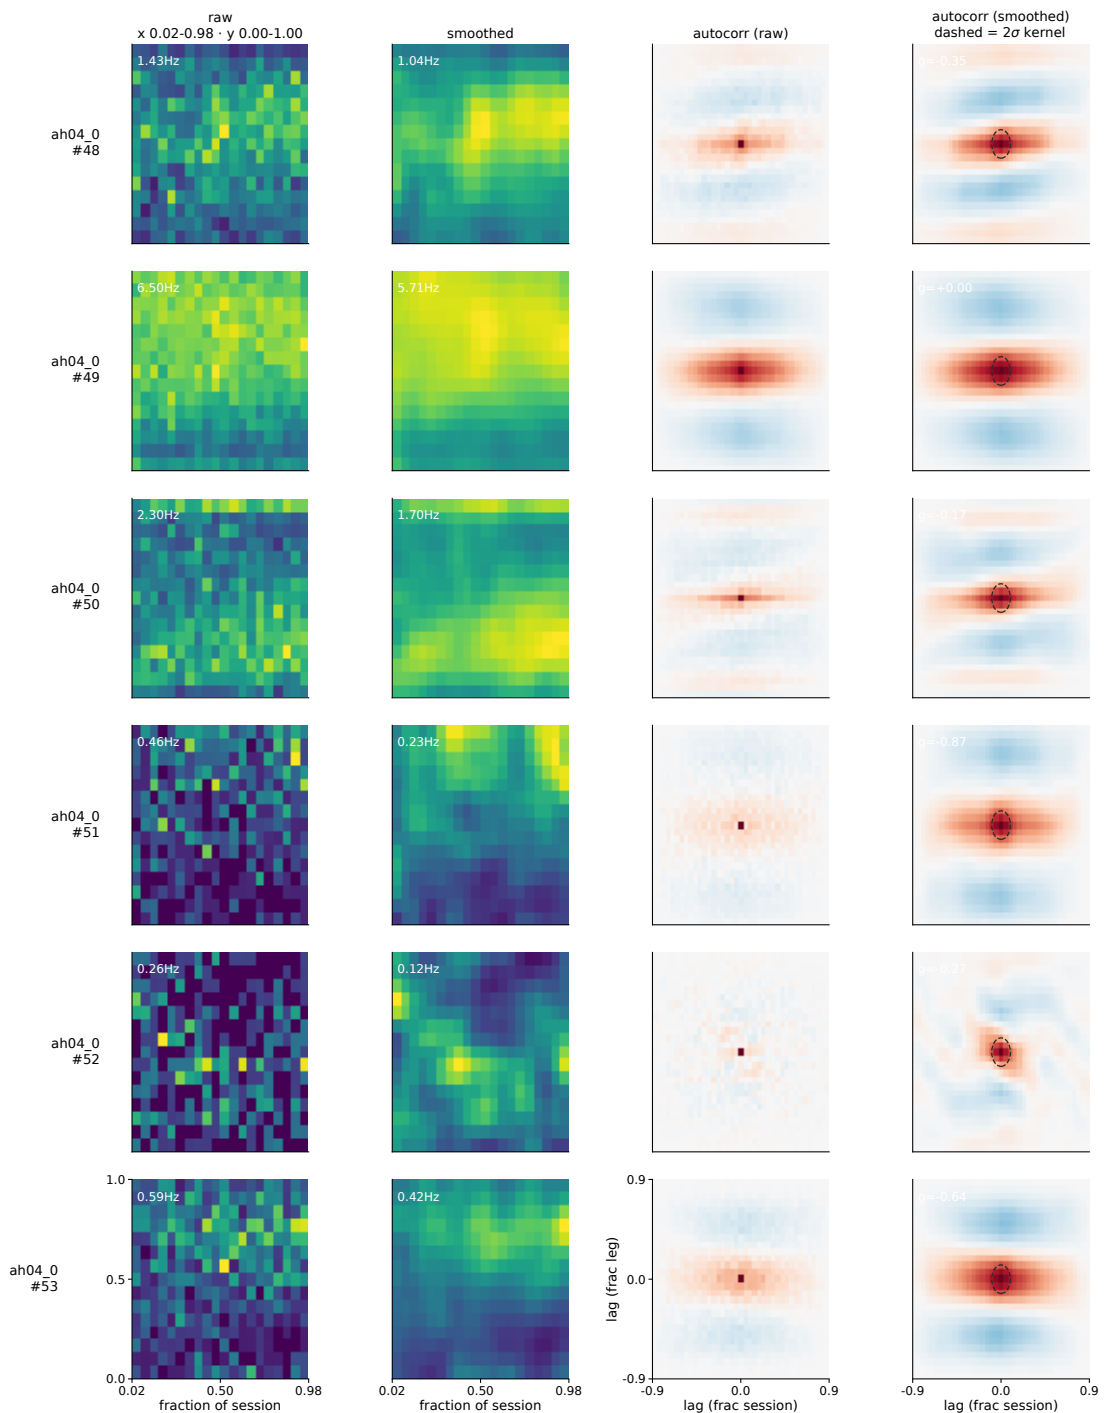


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 594-599 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

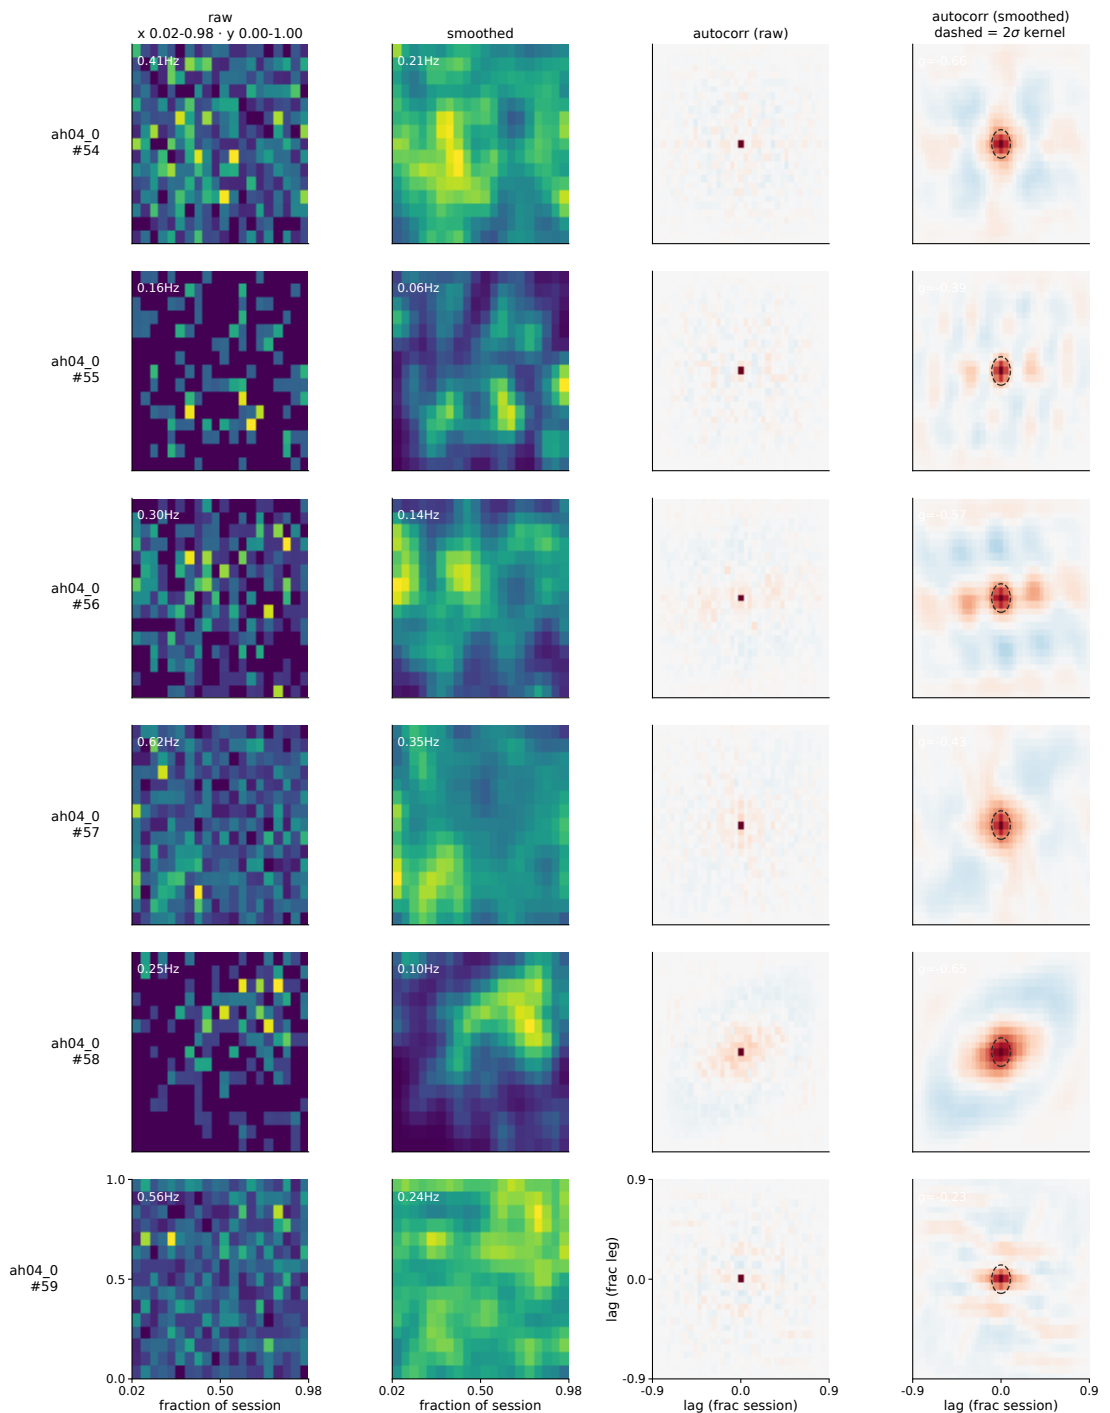


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 600-605 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

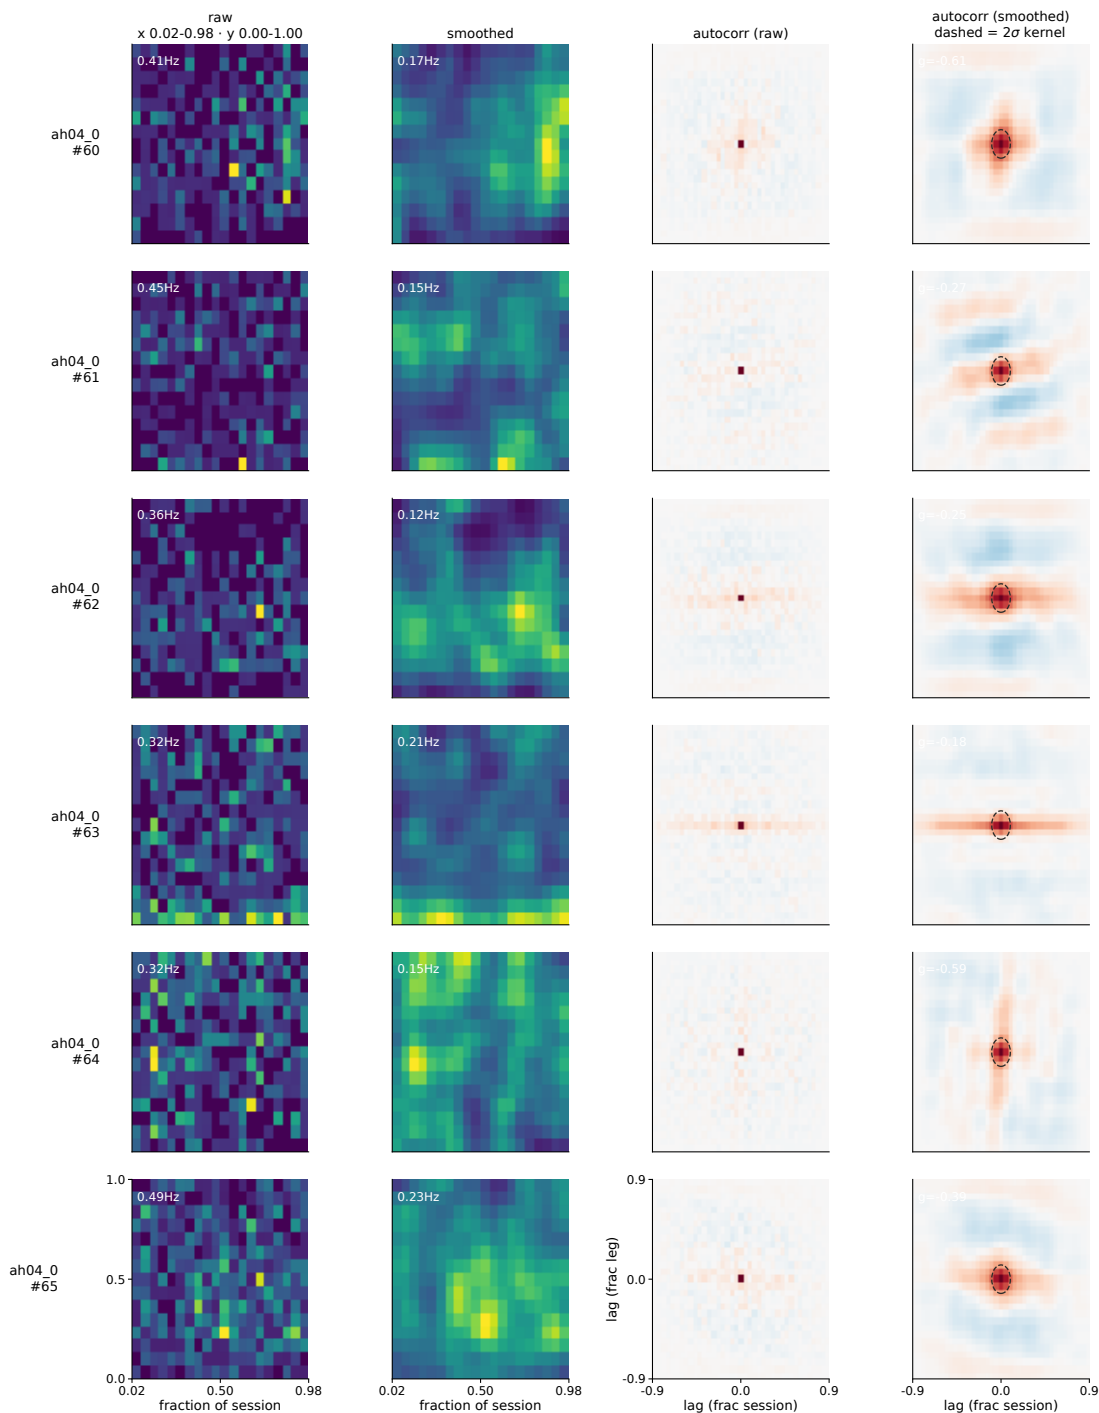


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 606-611 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

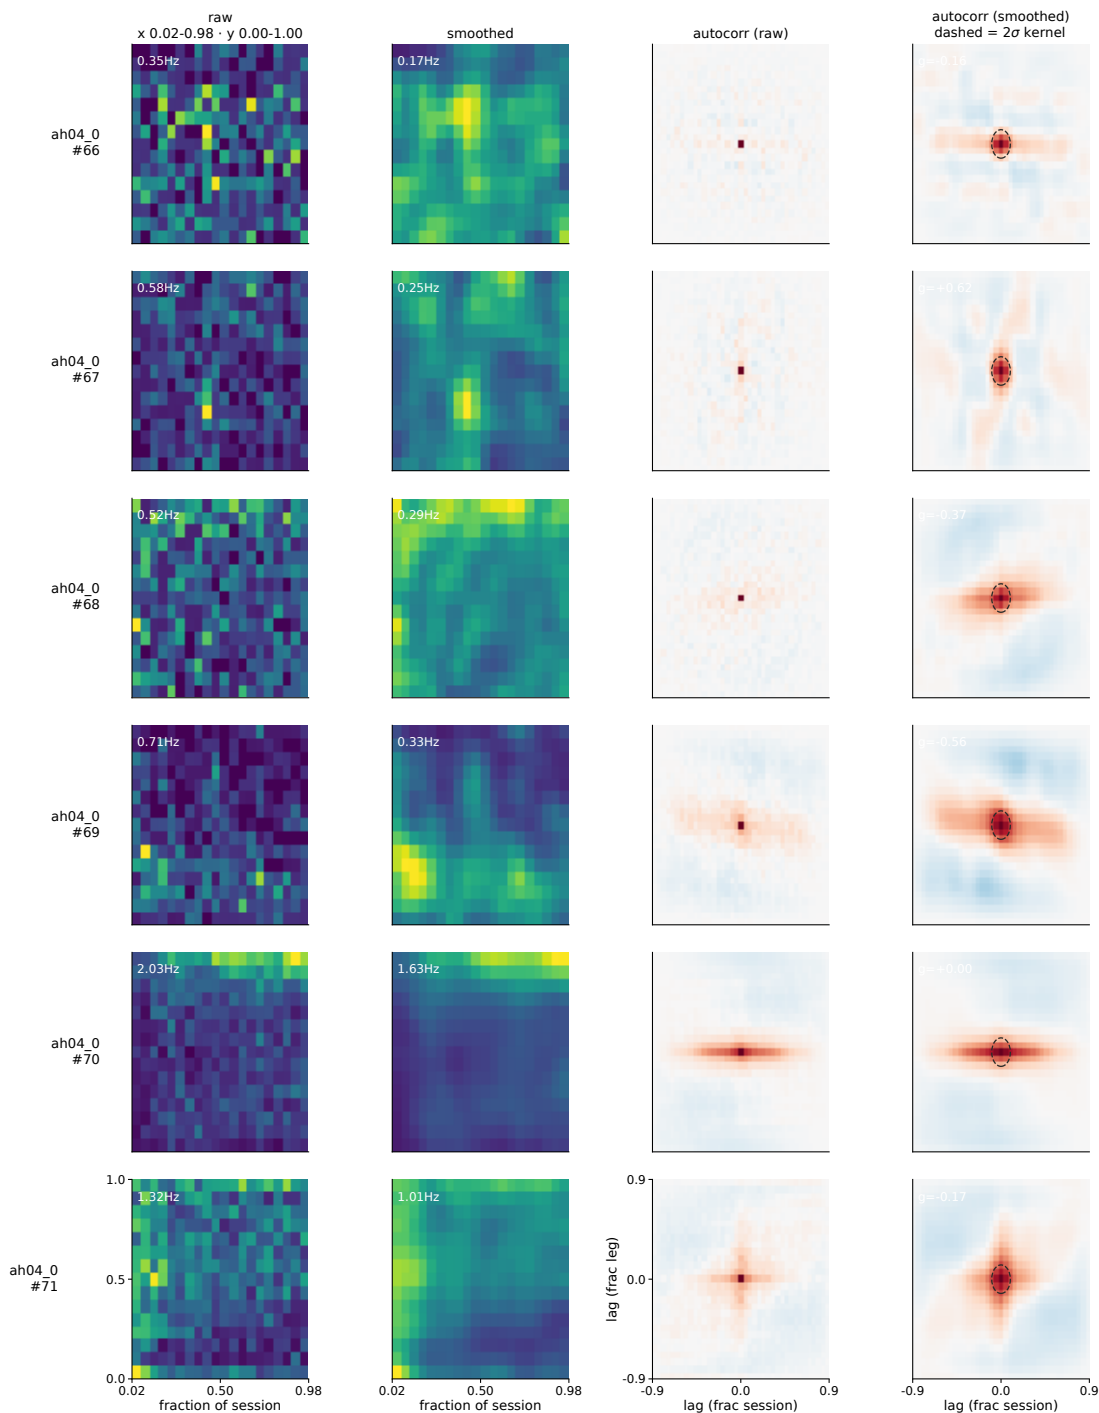


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 612-617 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

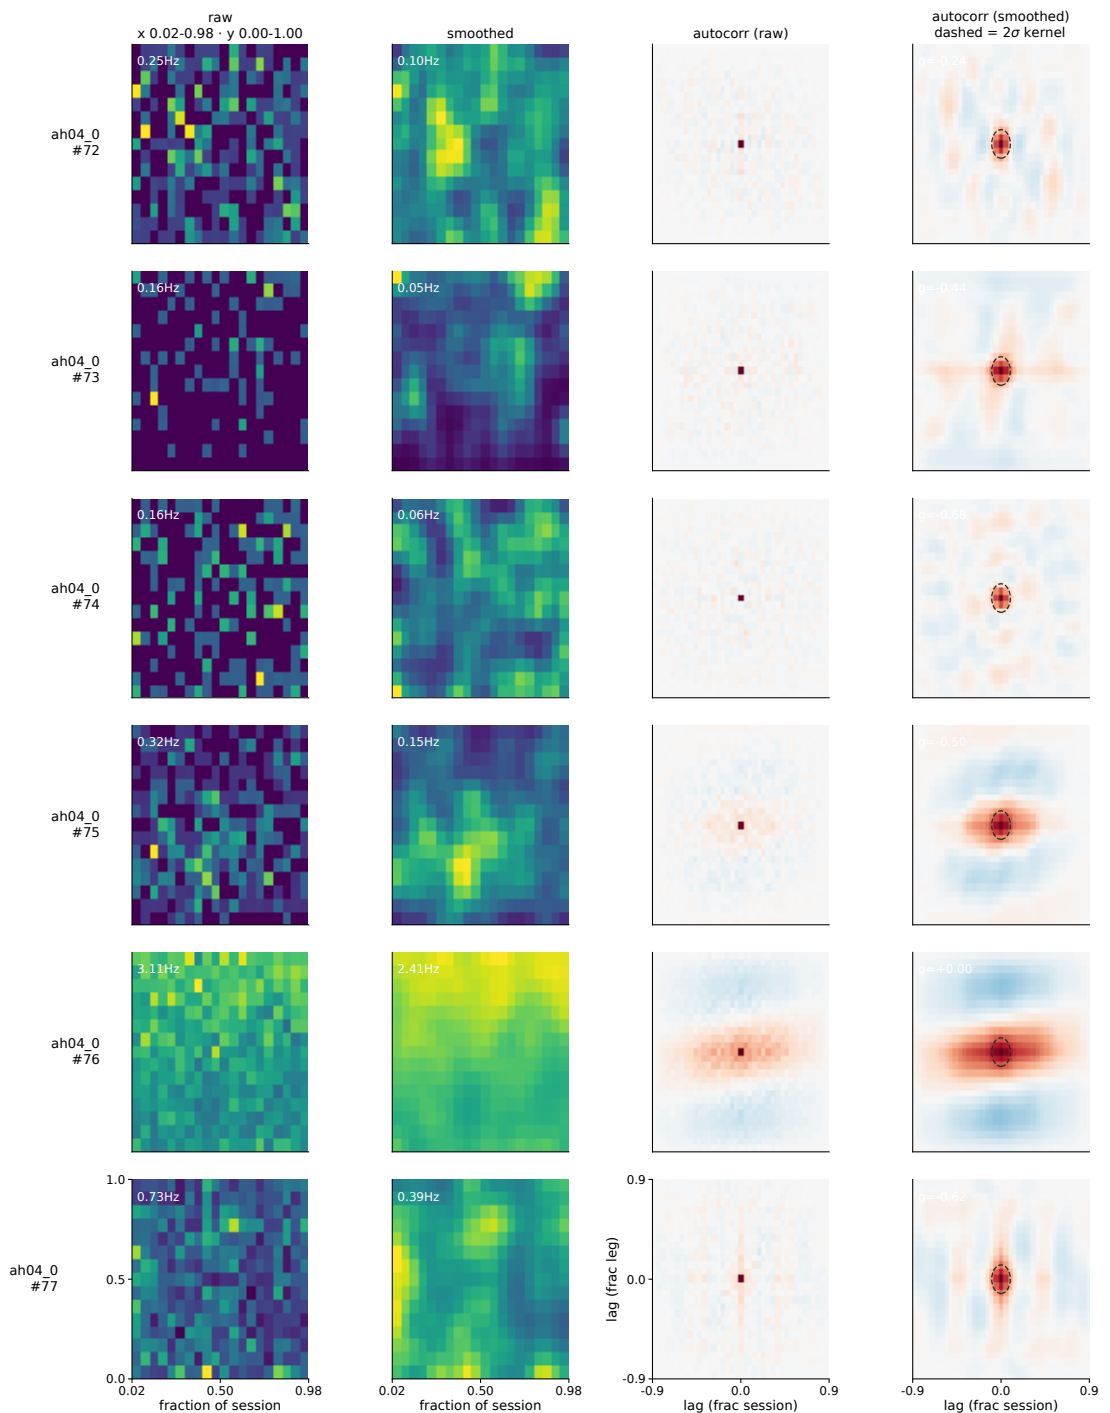


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 618-623 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

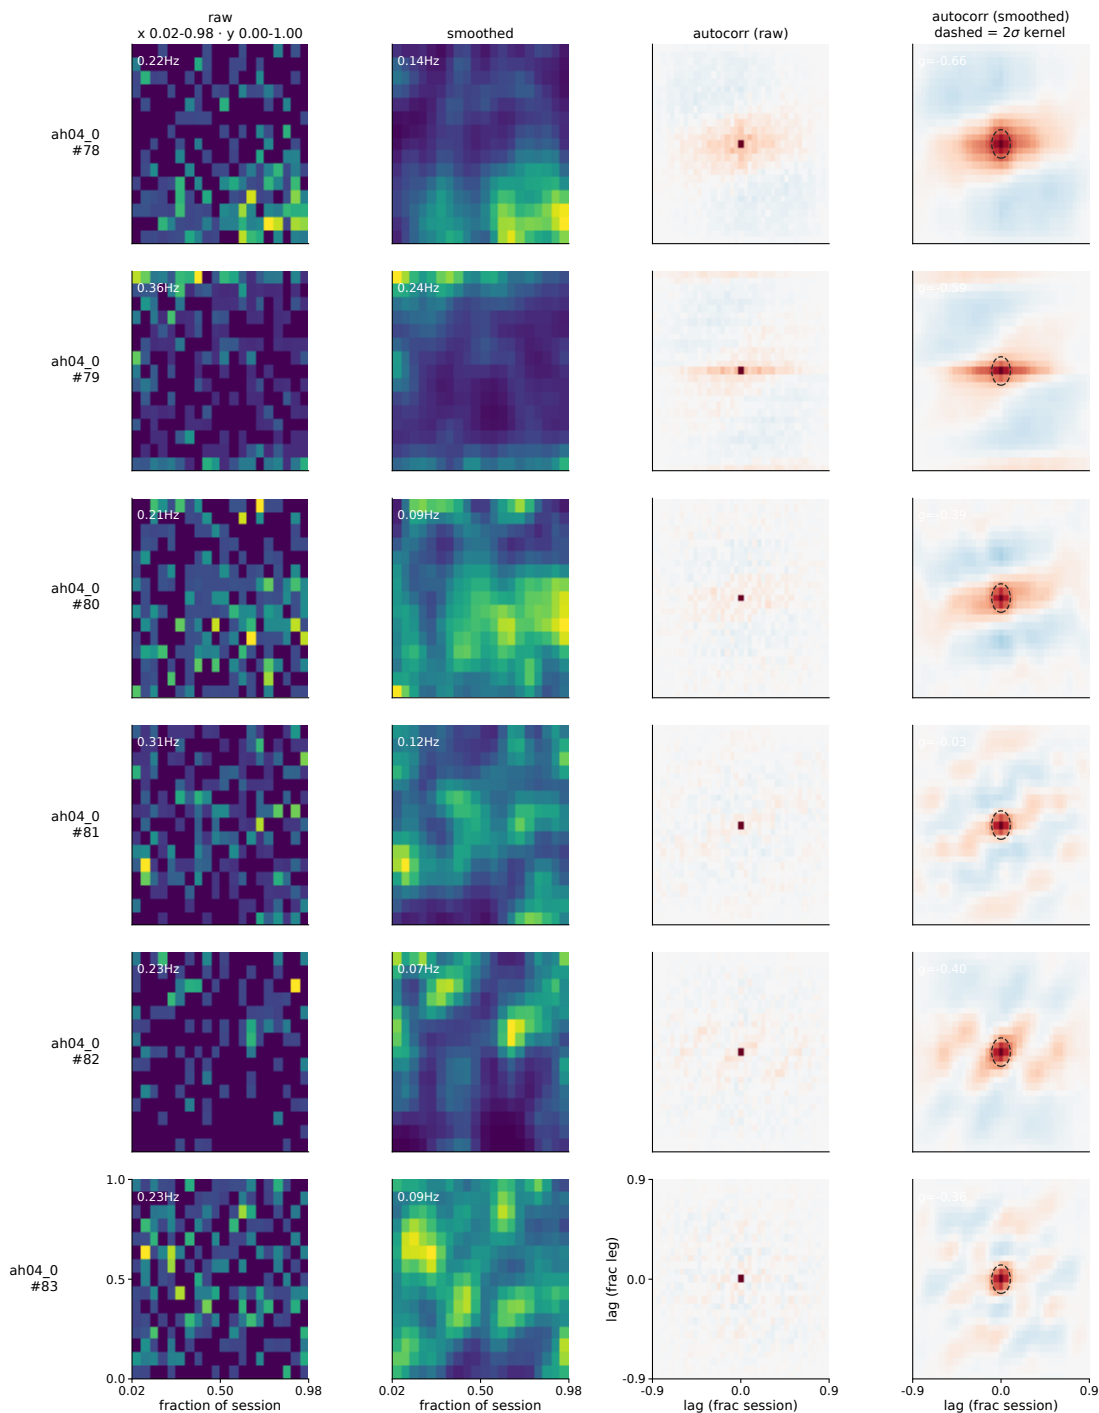


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 624-629 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

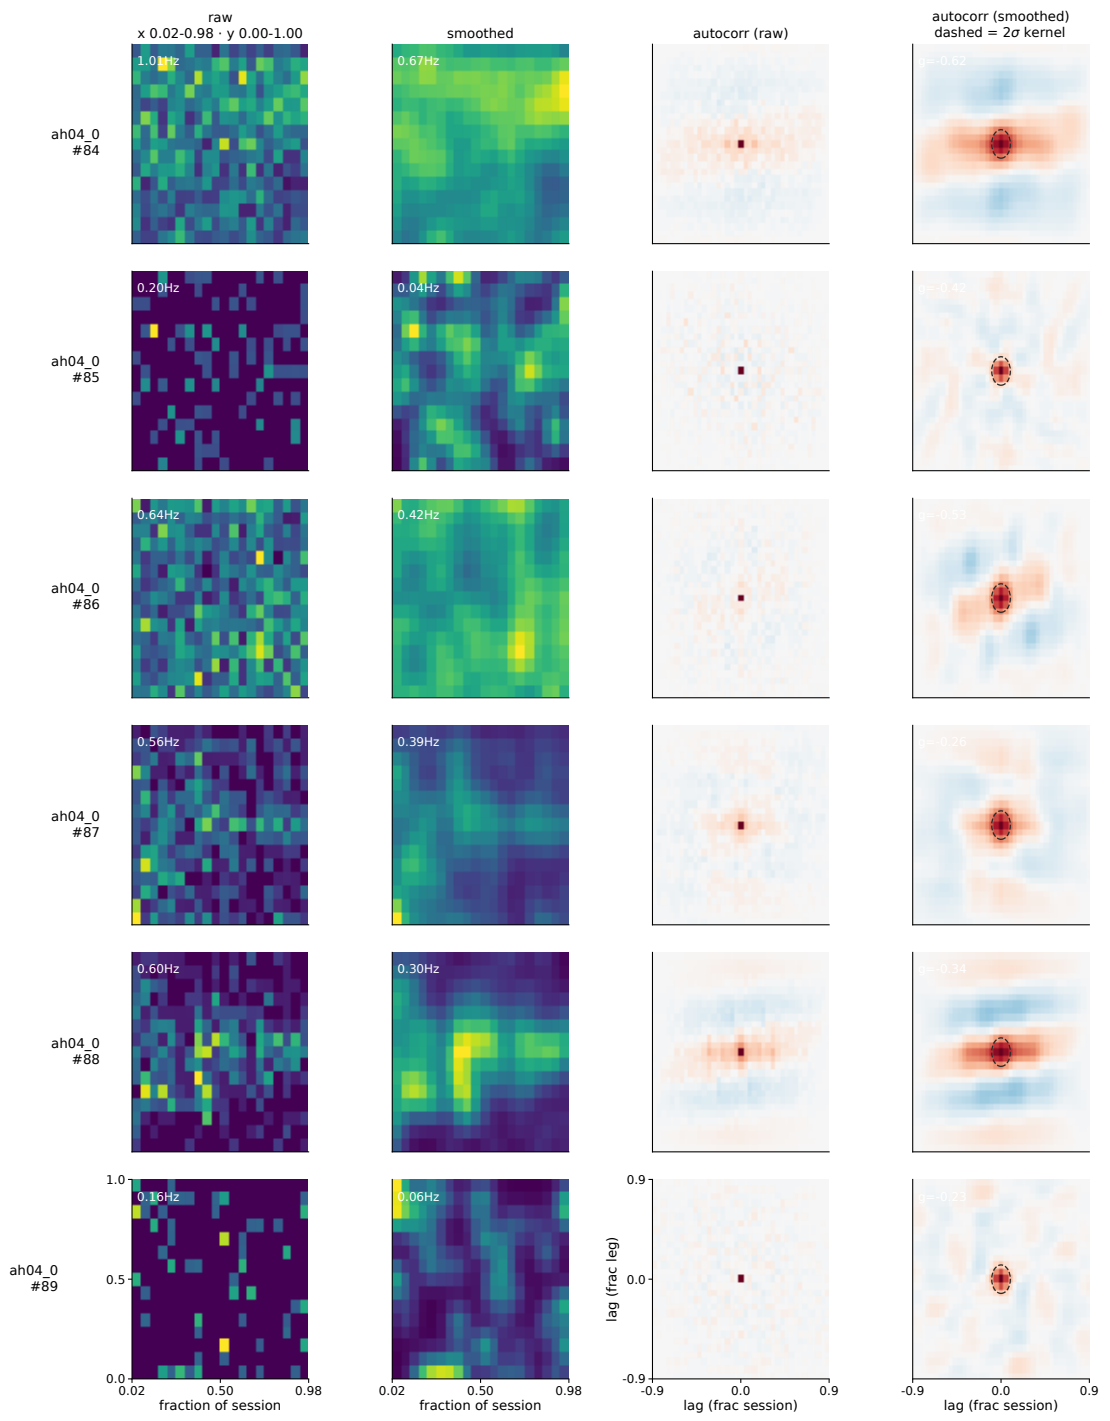


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 630-635 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

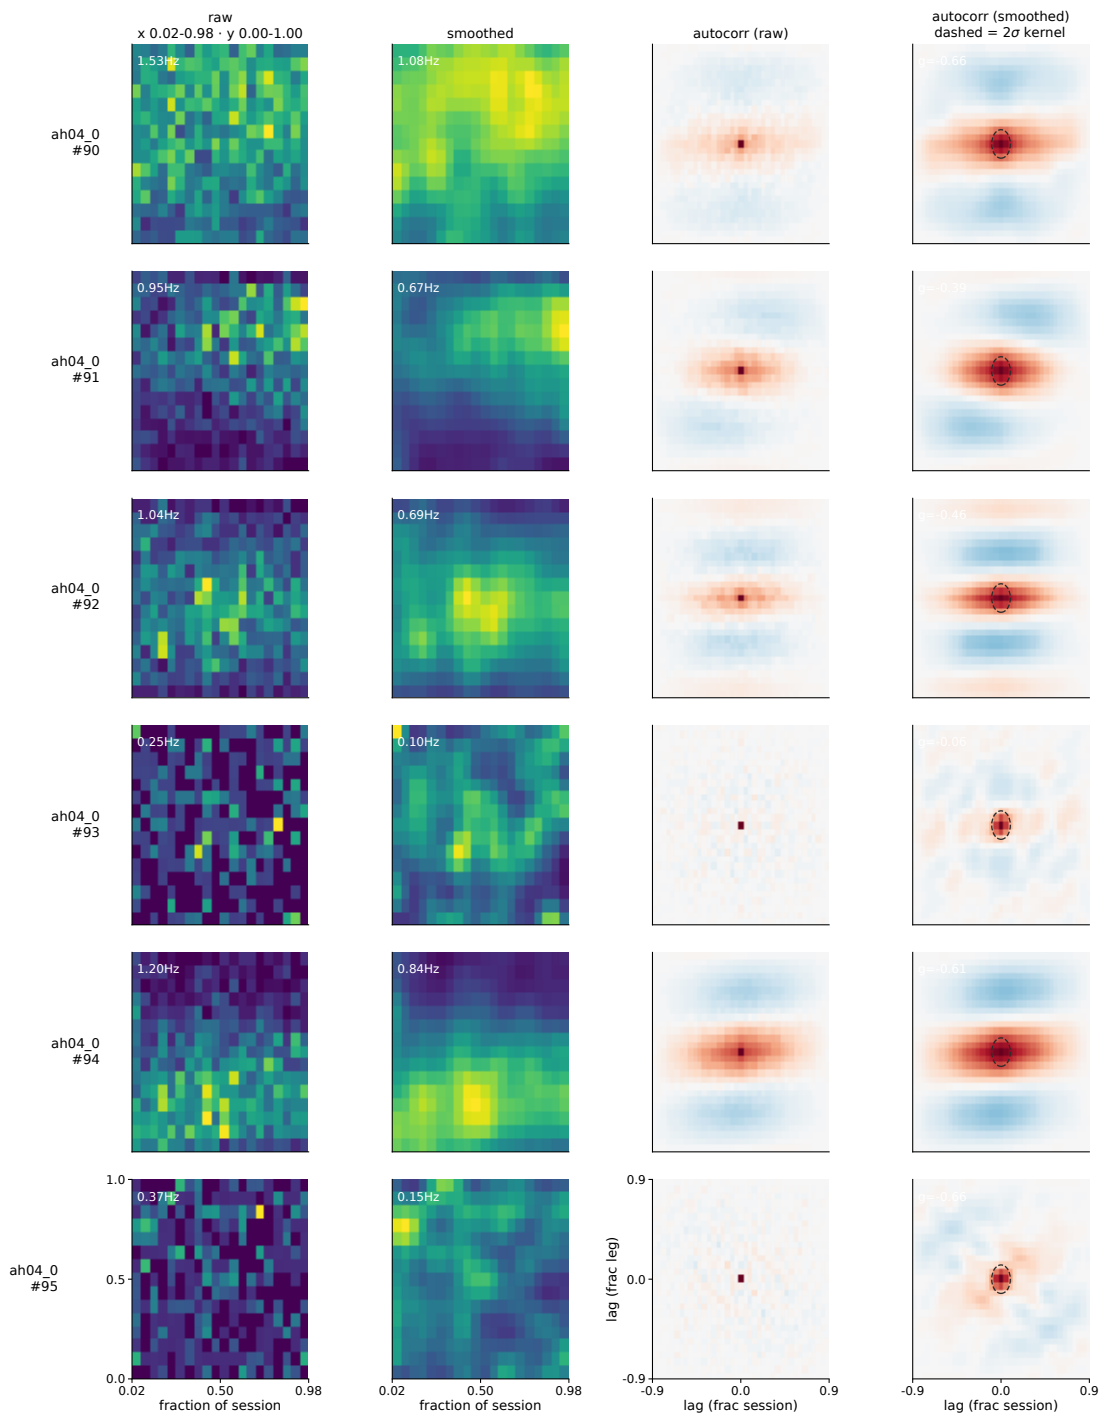


normalised | maps: x = fraction of session, y = fraction of goal transition | autocorr: lag on both axes | neurons 636-641 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

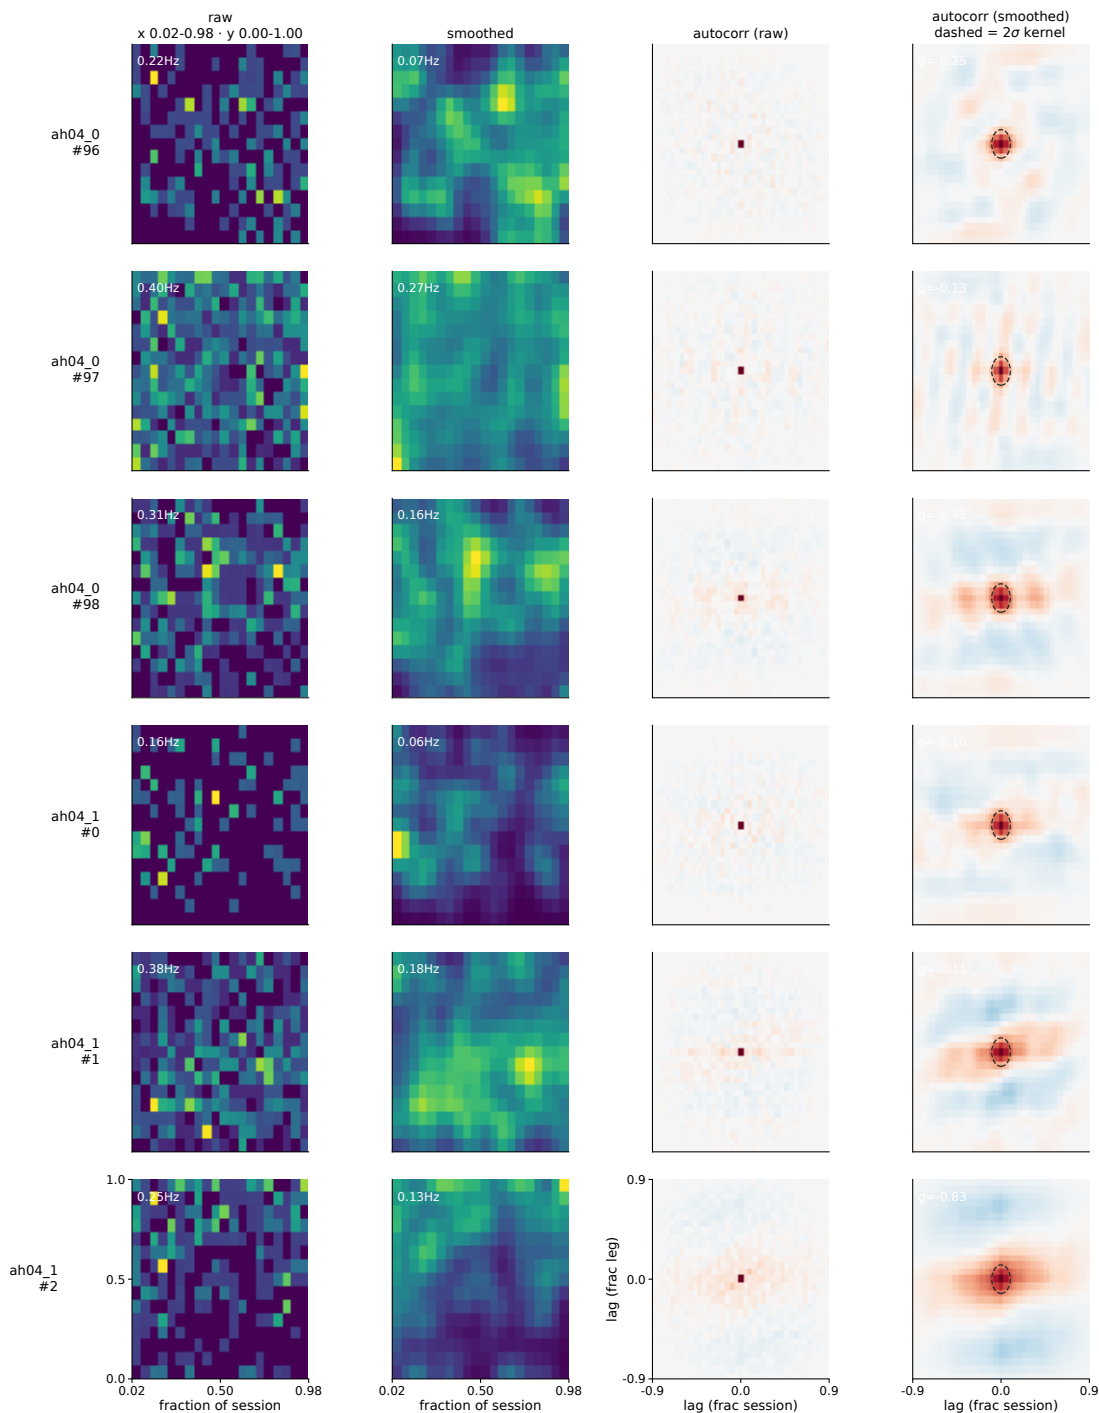


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 642-647 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

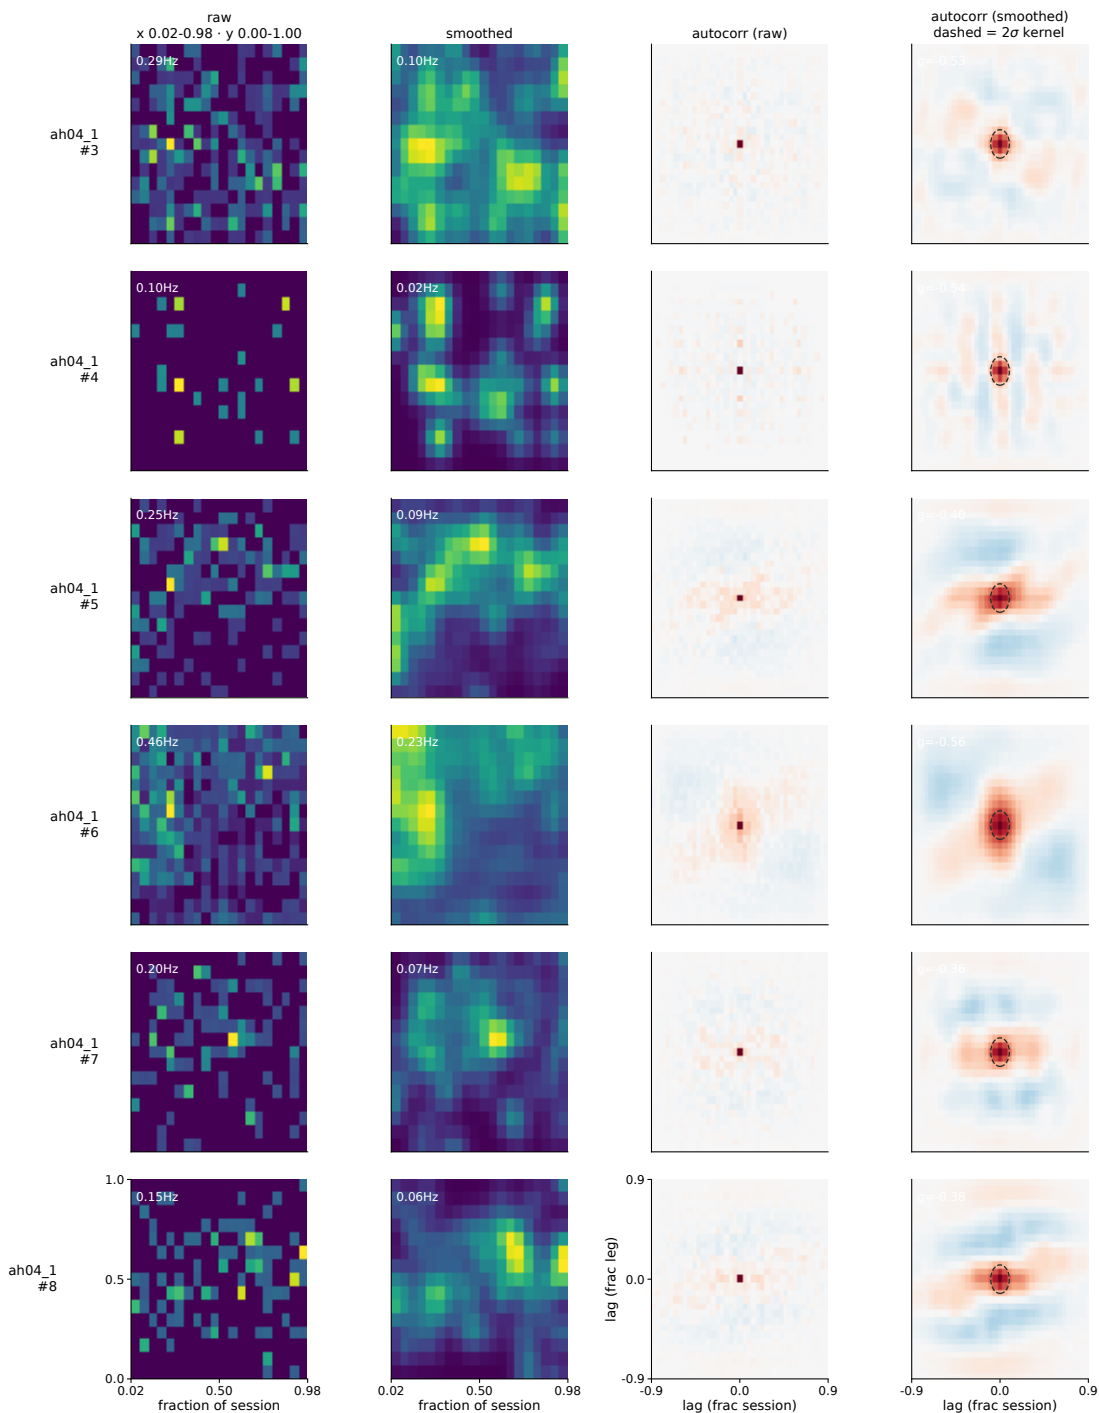


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 648-653 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

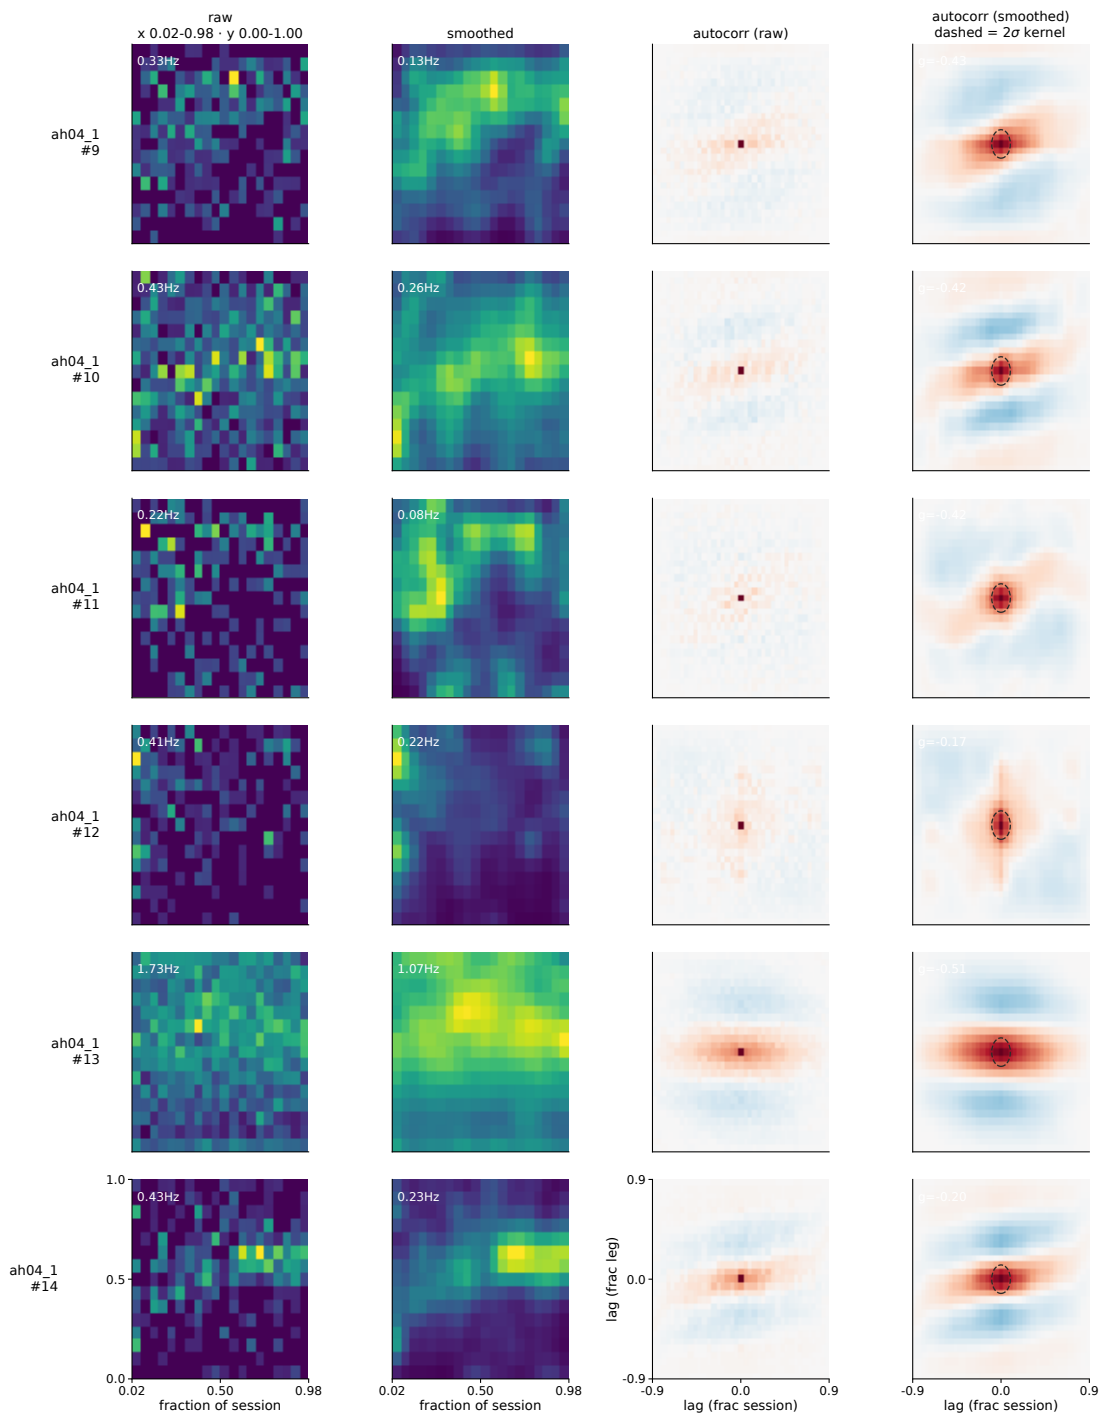


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 654-659 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

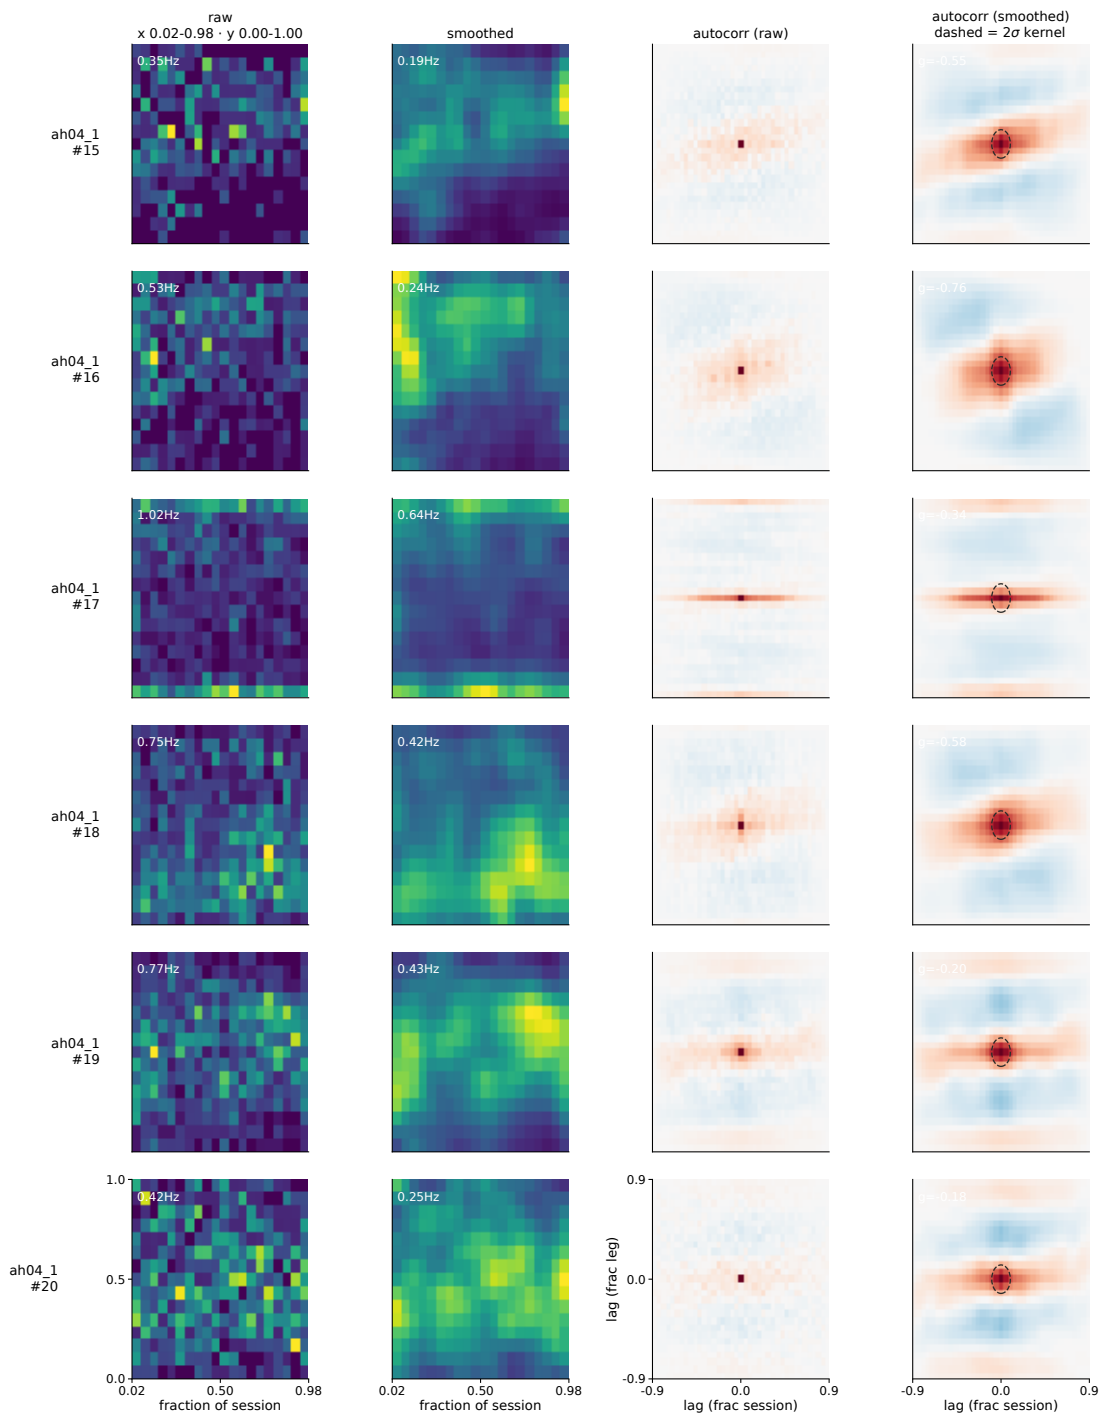


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 660-665 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

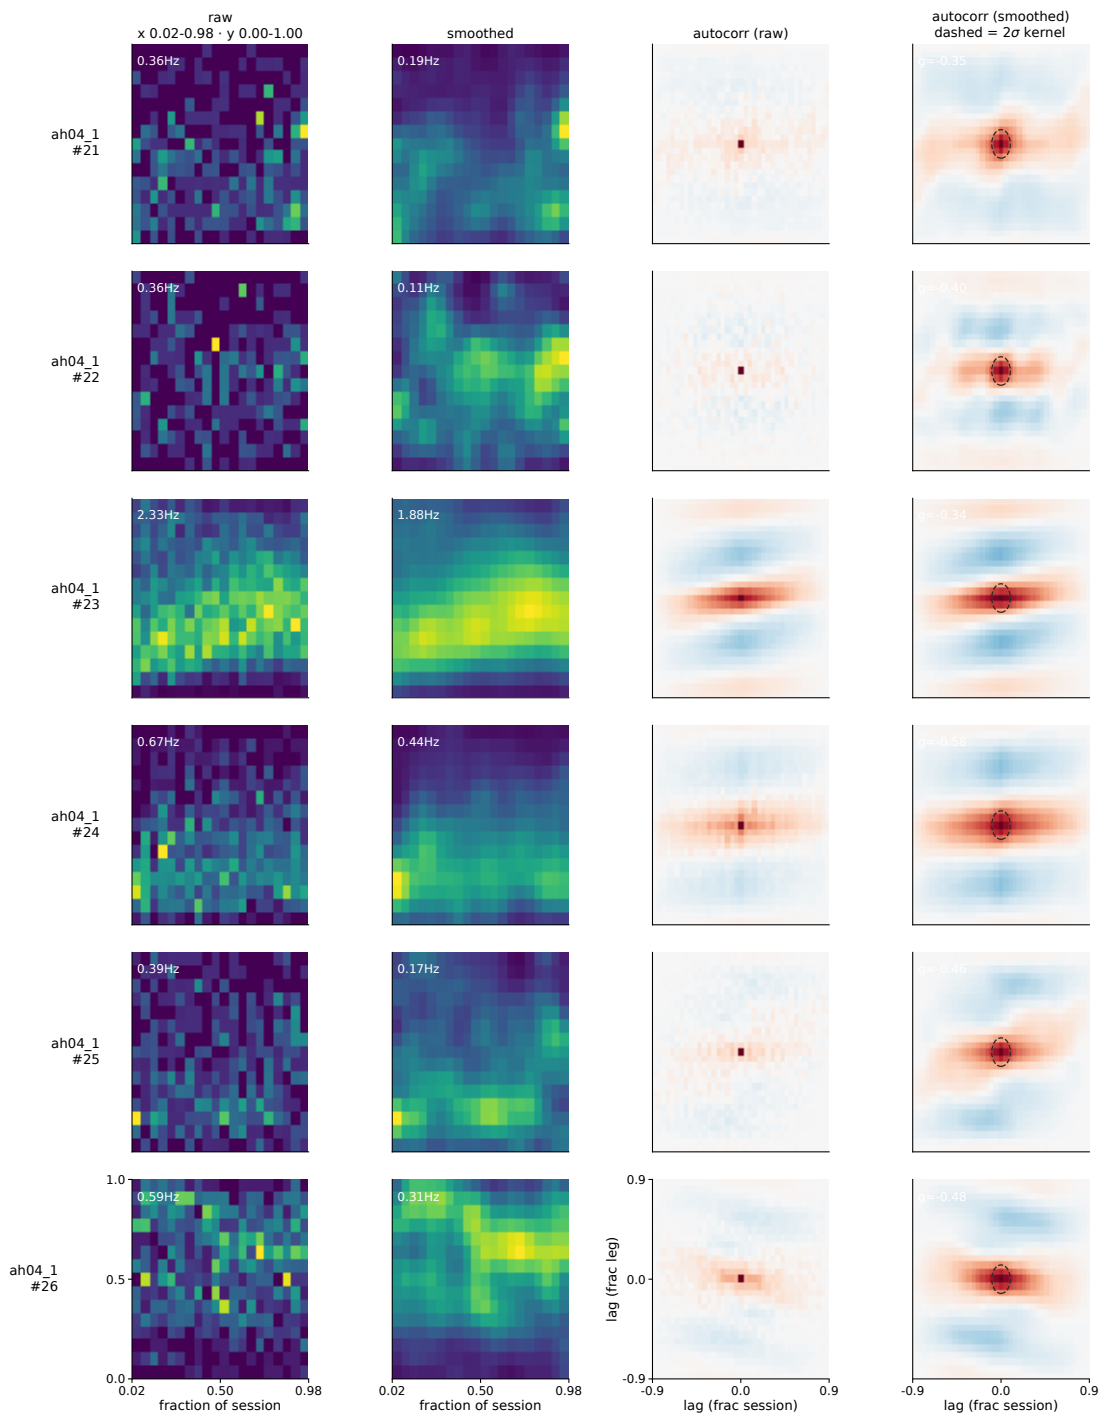


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 666-671 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

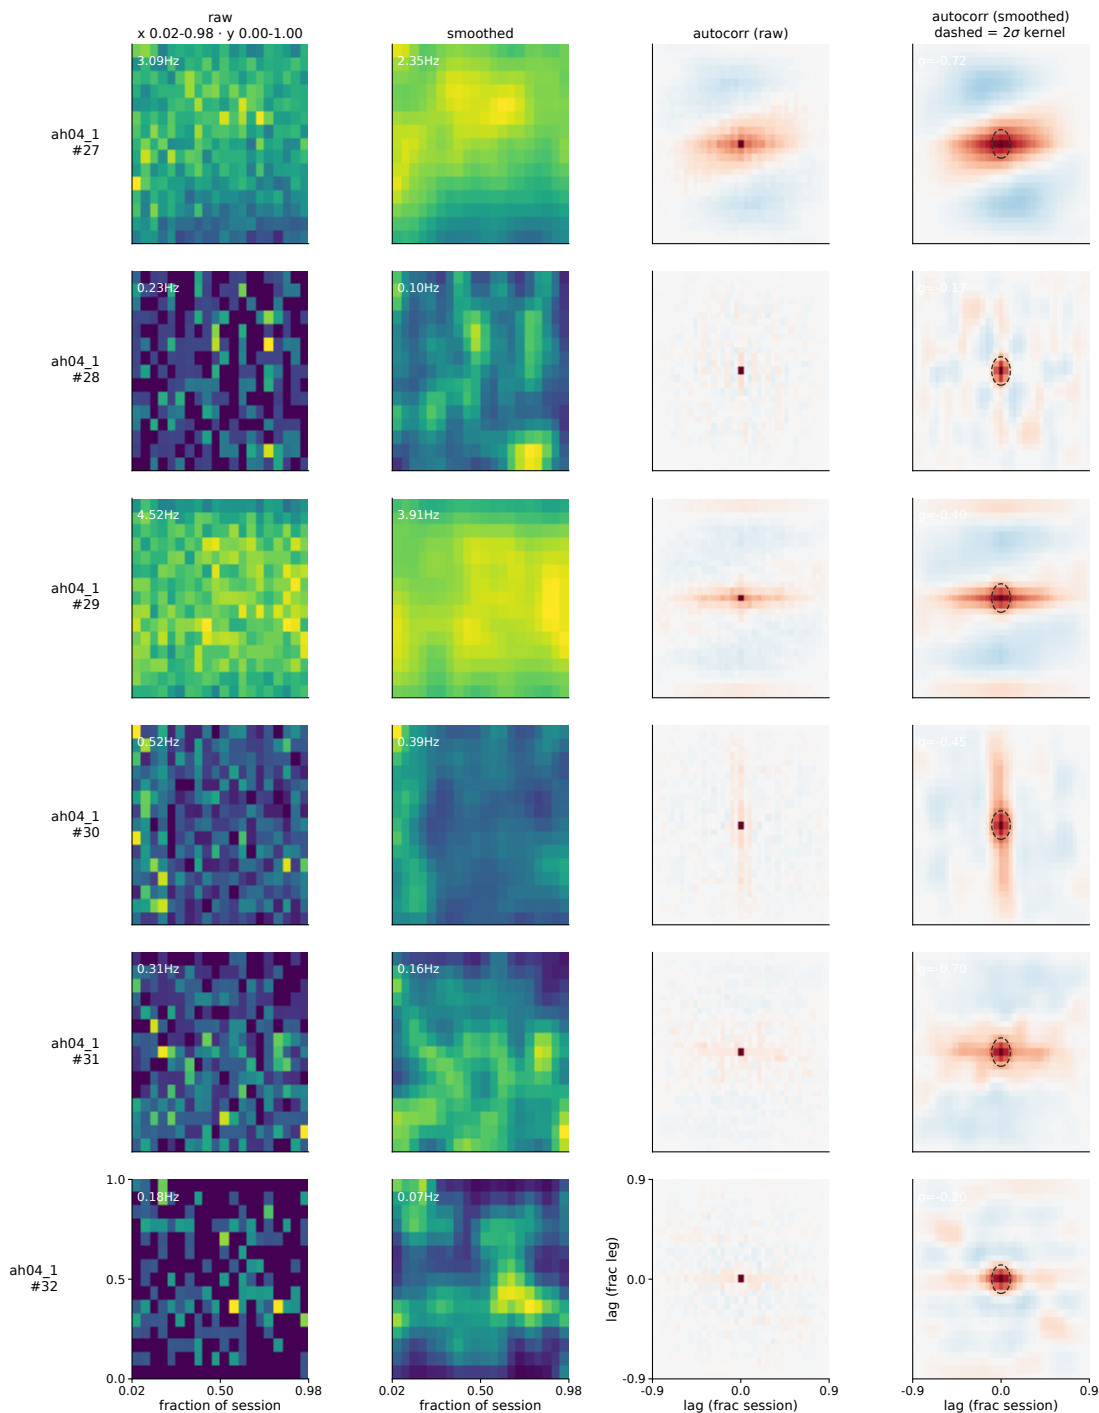


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 672-677 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

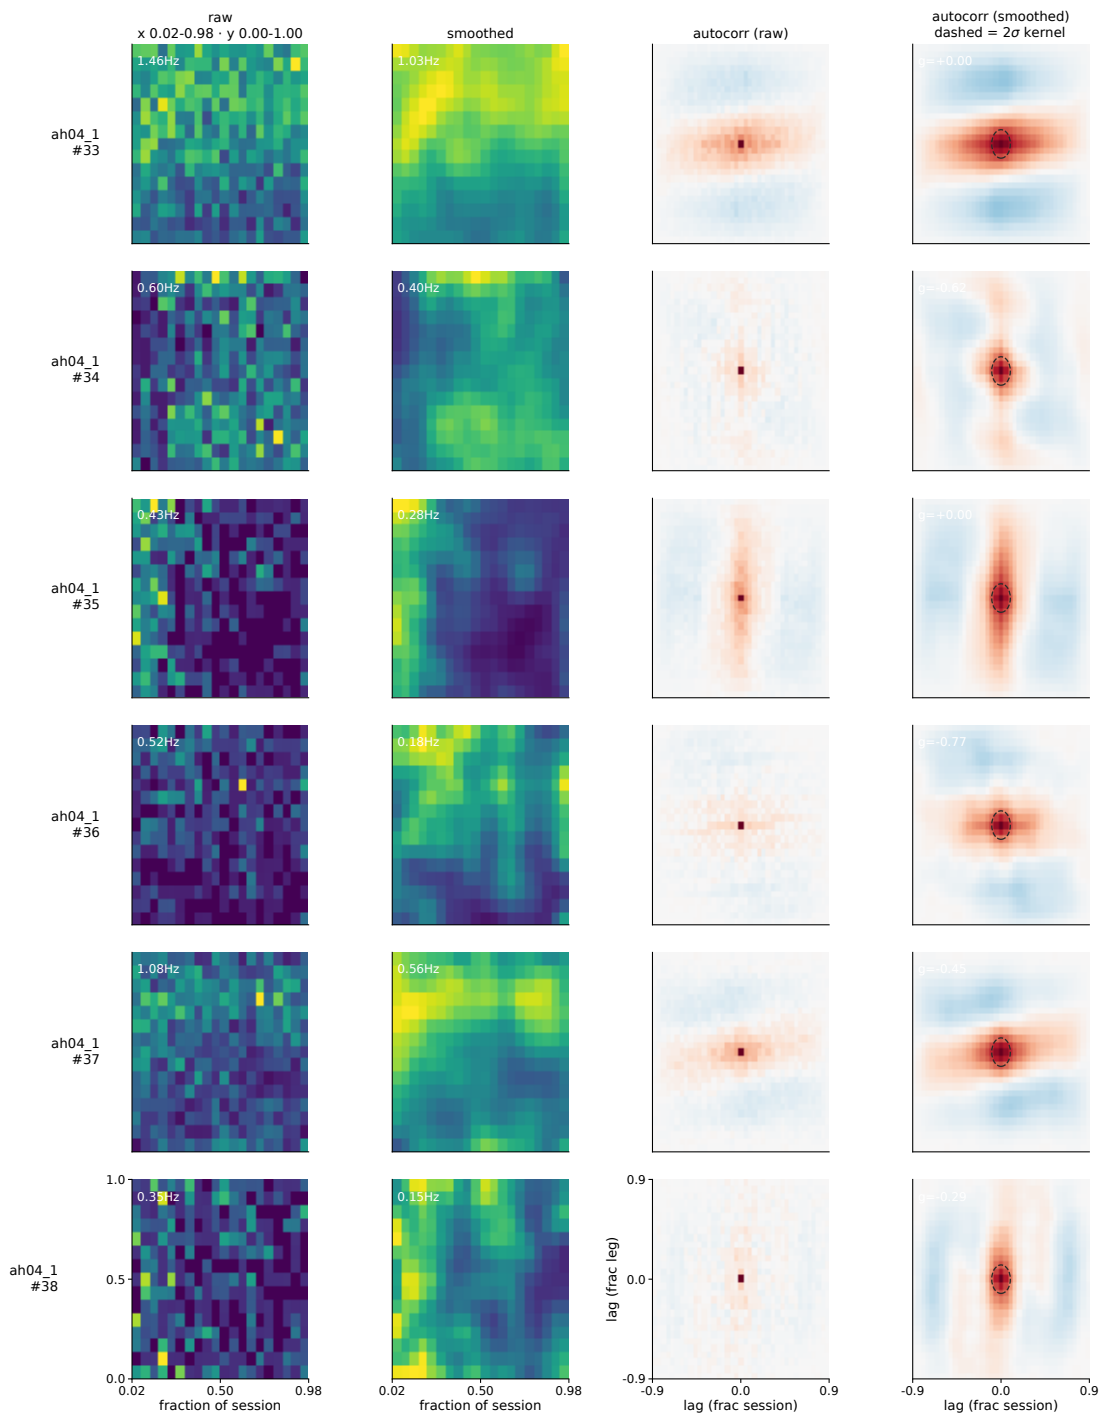


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 678-683 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

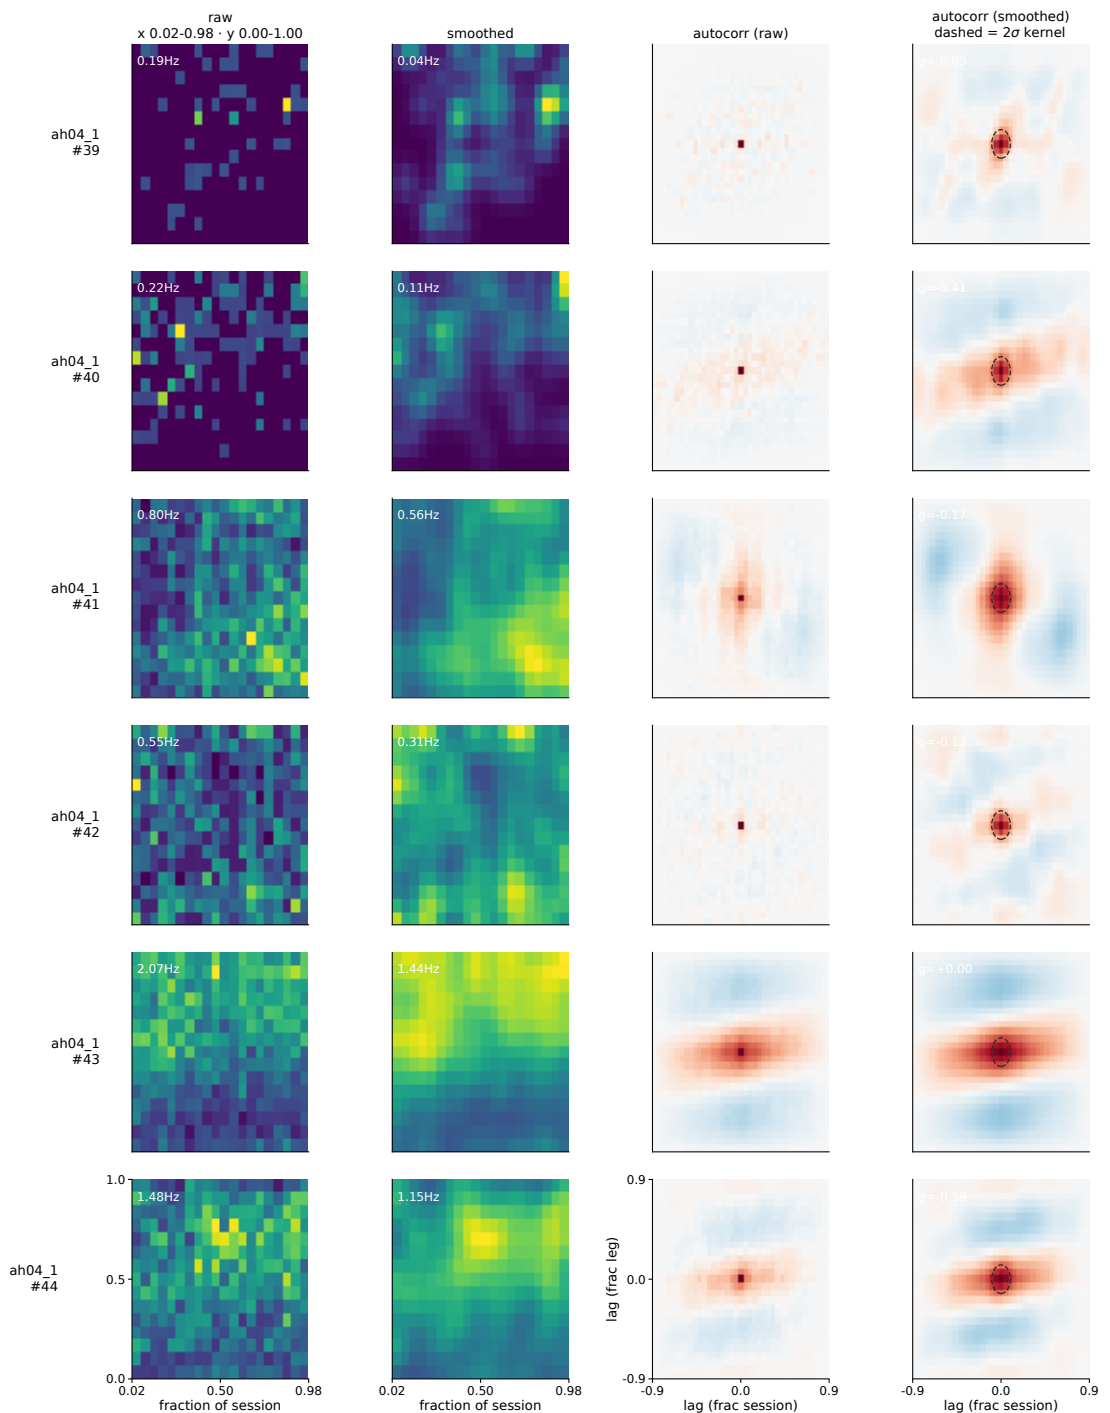


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 684-689 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

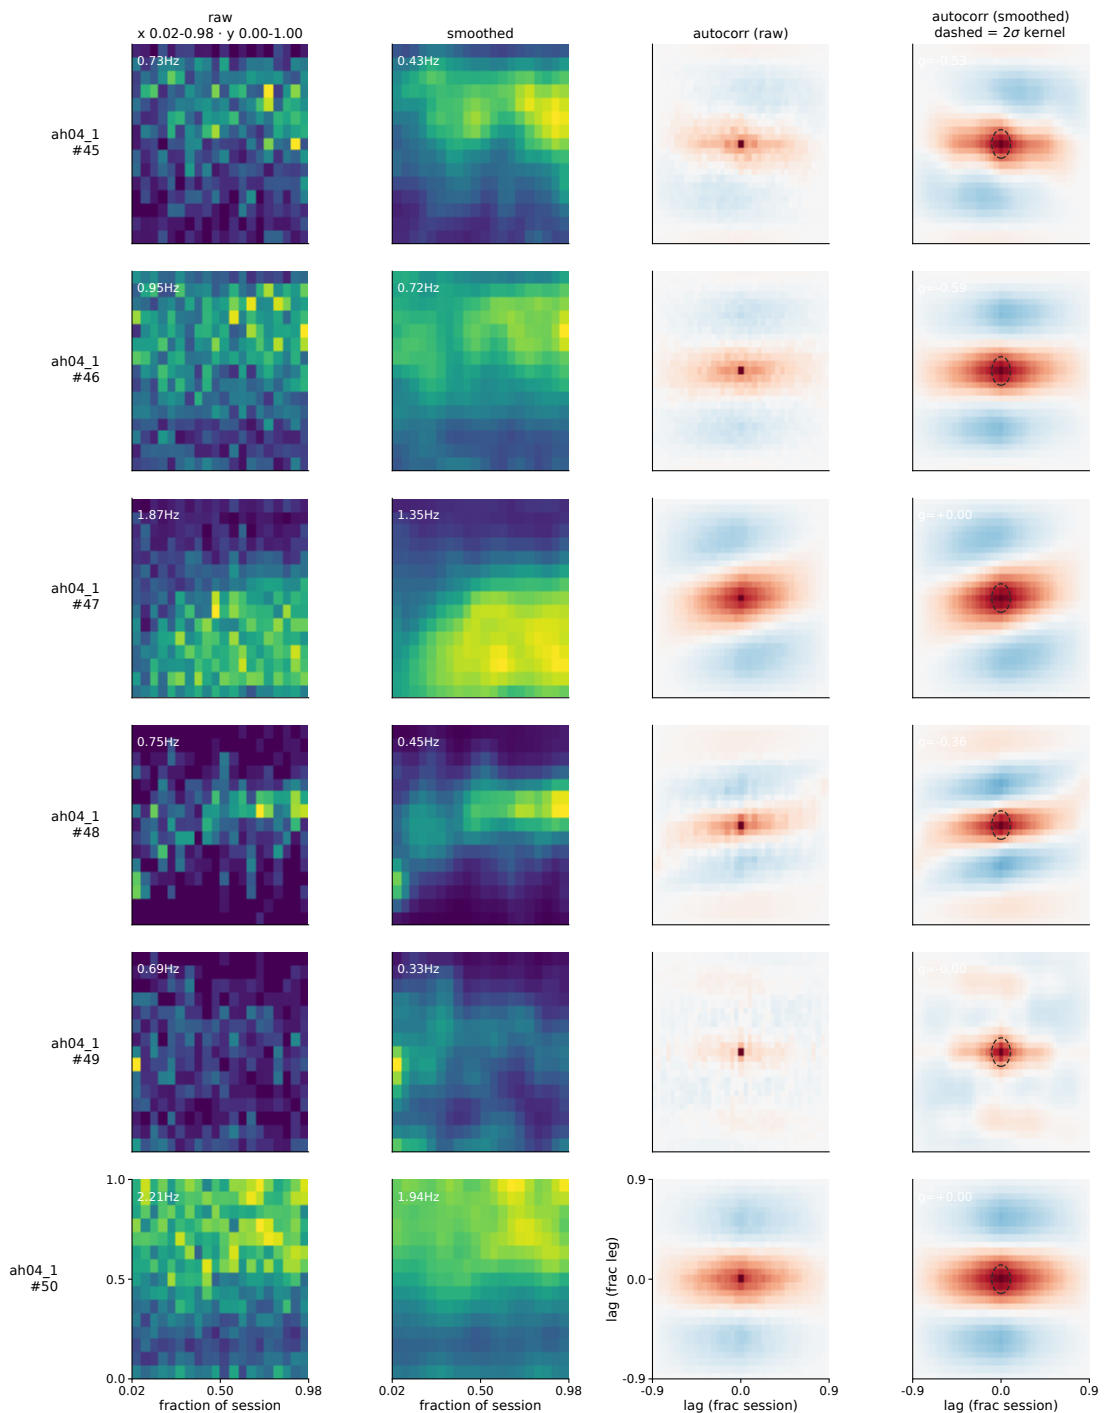


normalised | maps: x = fraction of session, y = fraction of goal transition | autocorr: lag on both axes | neurons 690-695 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

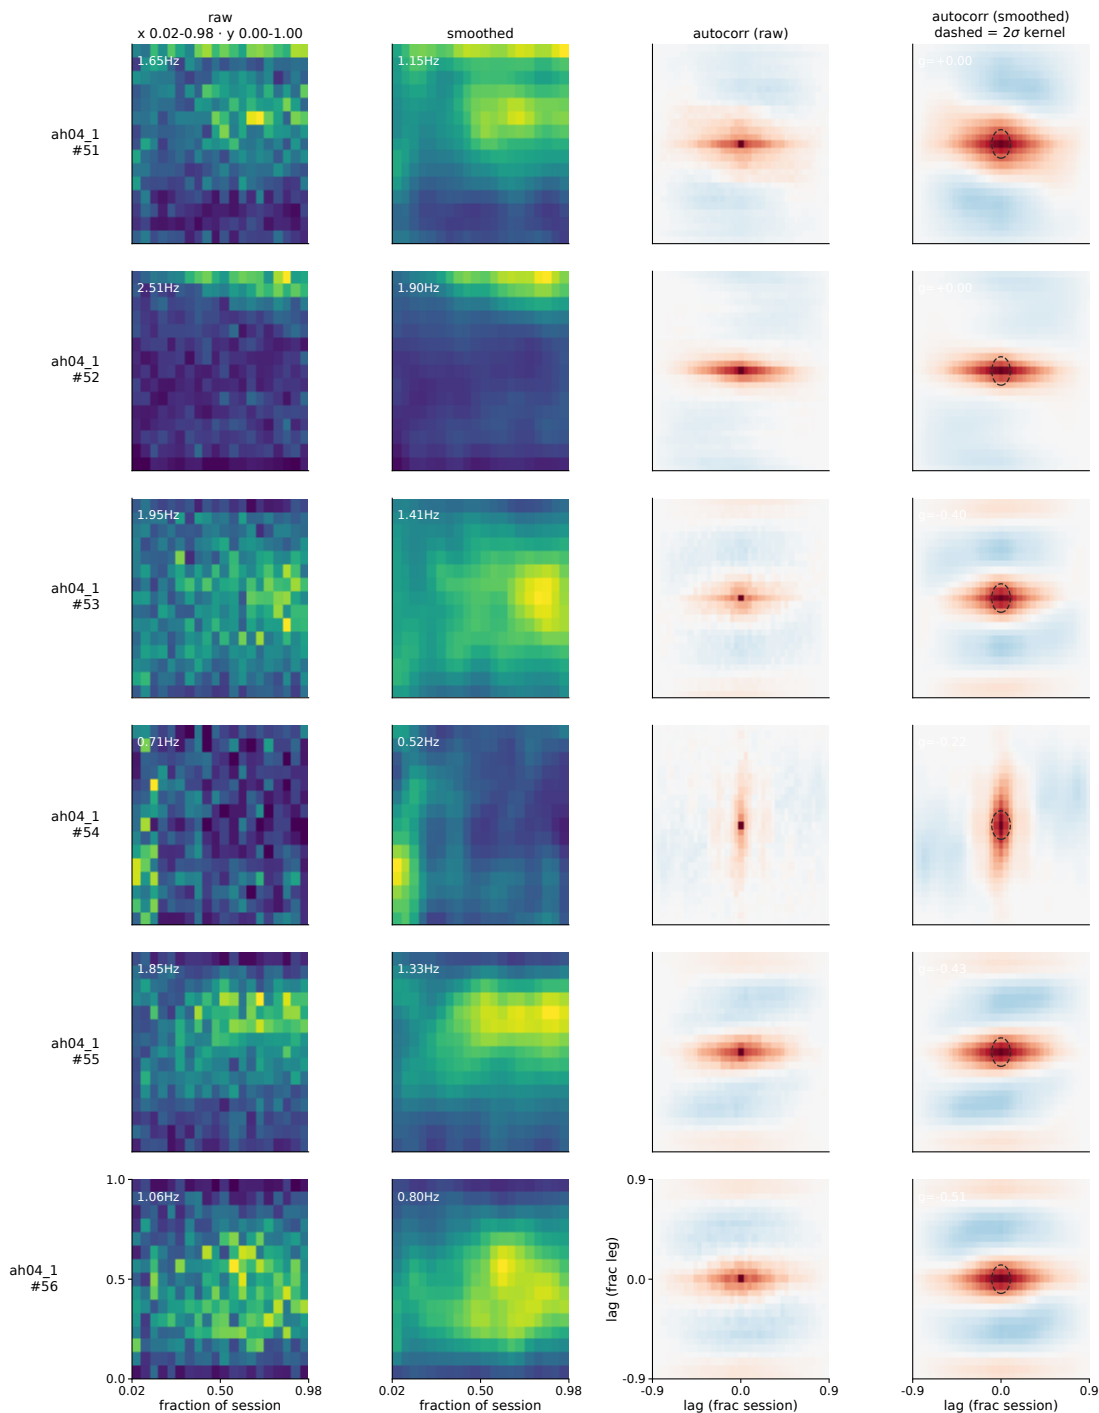


normalised | maps: x = fraction of session, y = fraction of goal transition | autocorr: lag on both axes | neurons 696-701 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

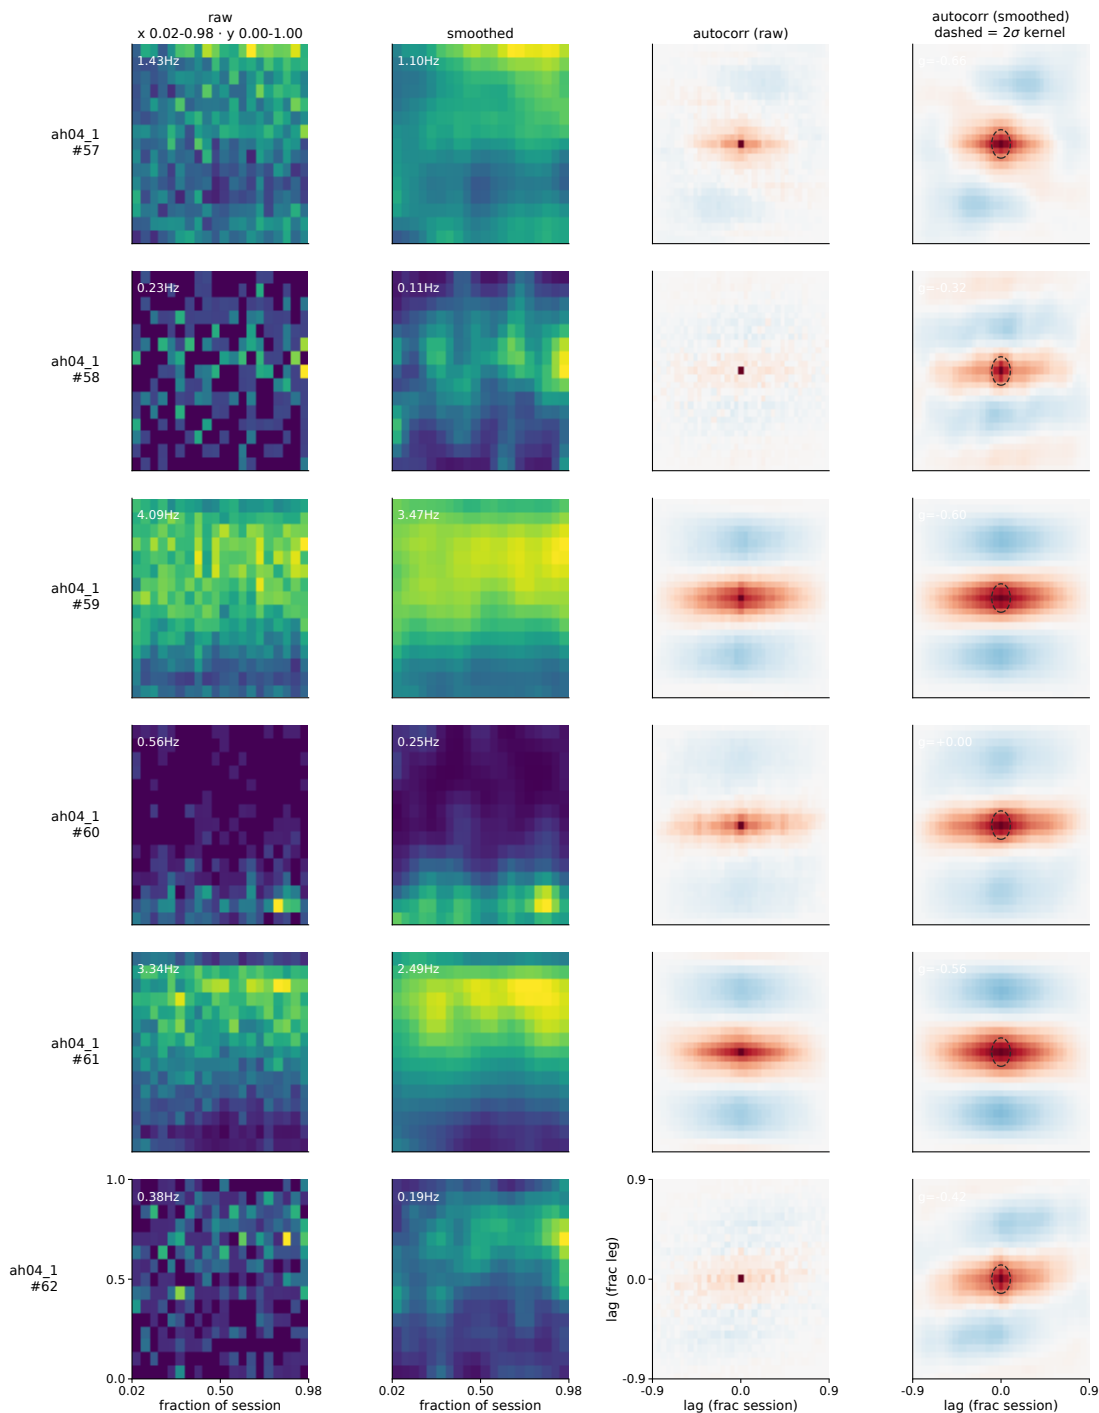


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 702-707 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

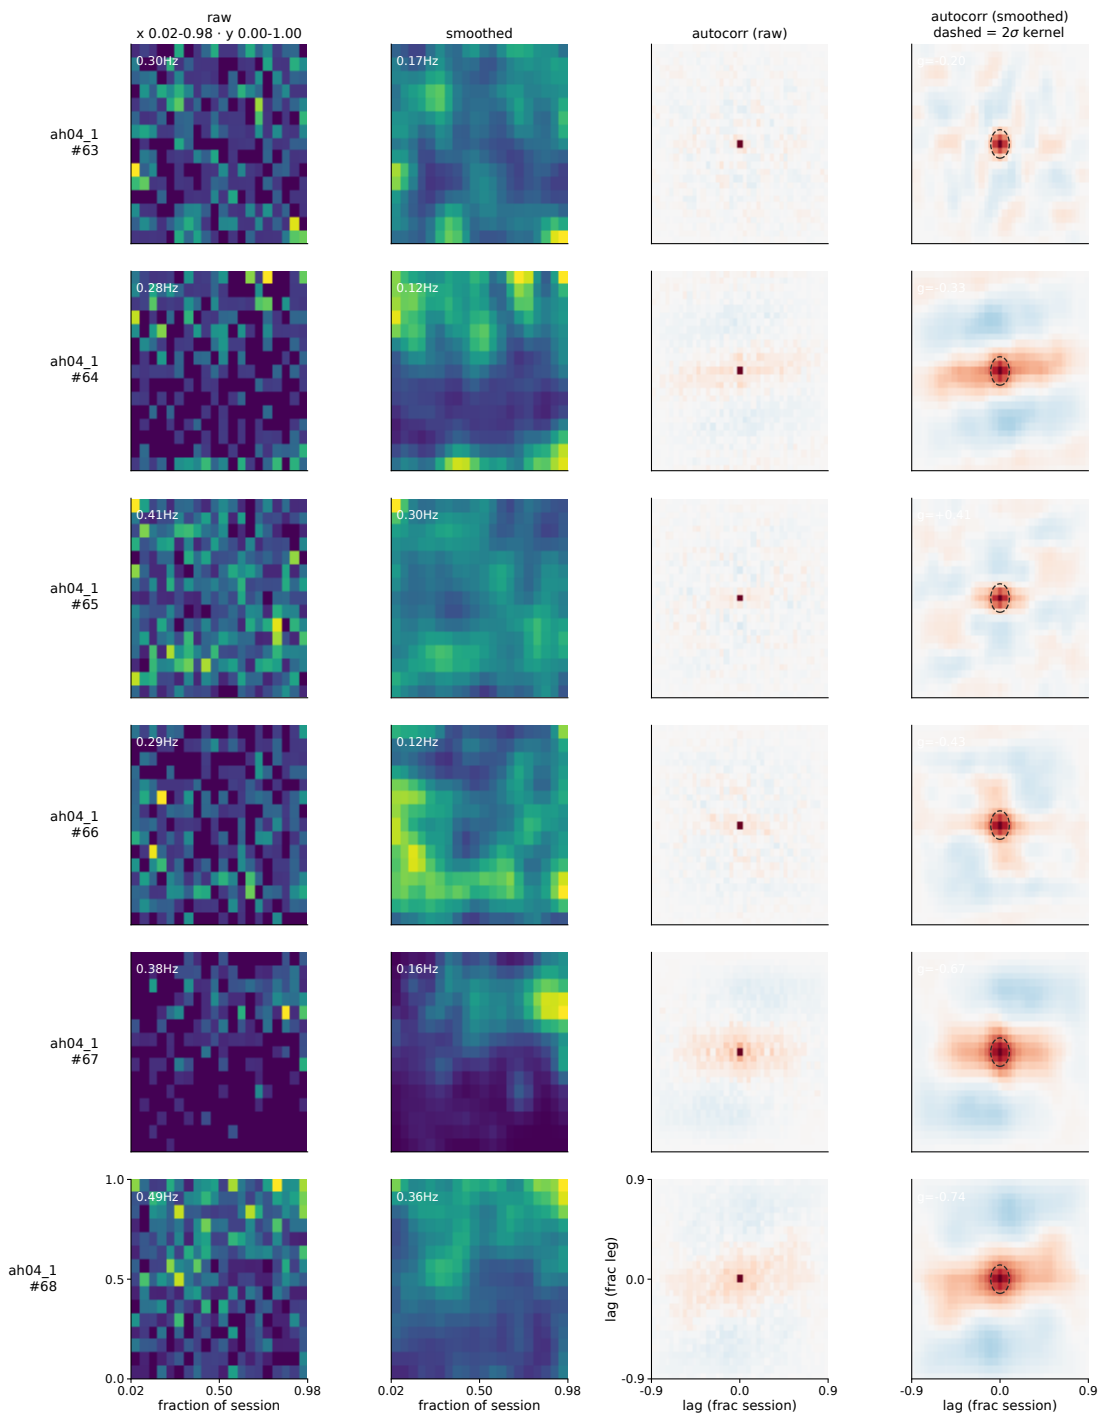


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 708-713 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

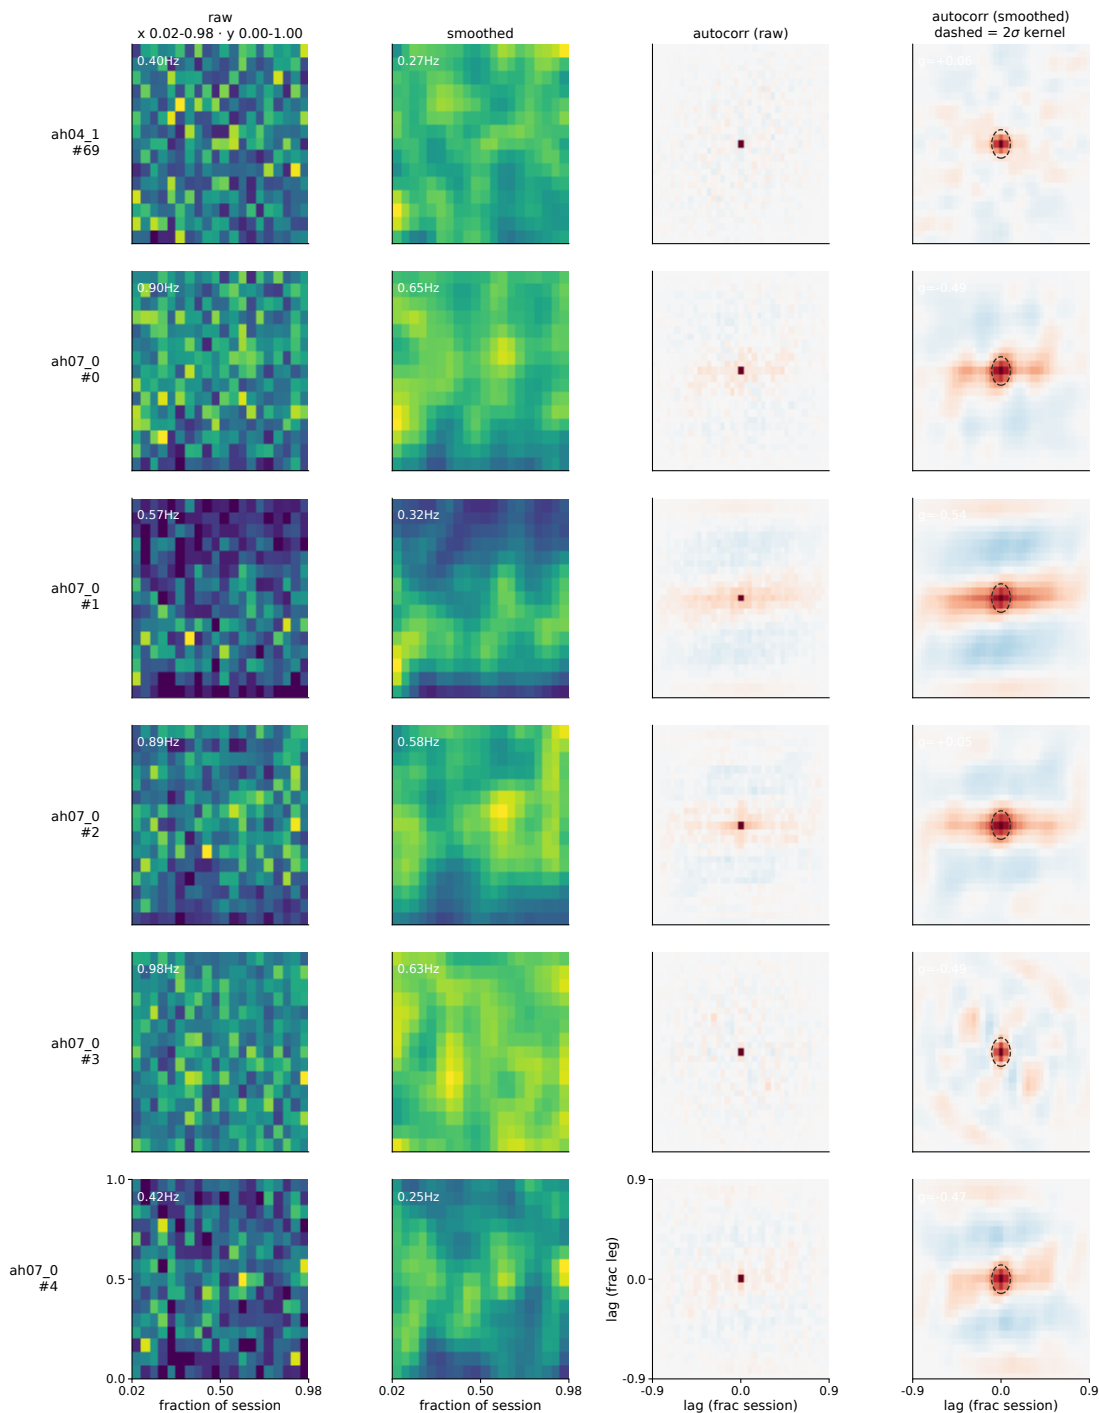


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 714-719 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

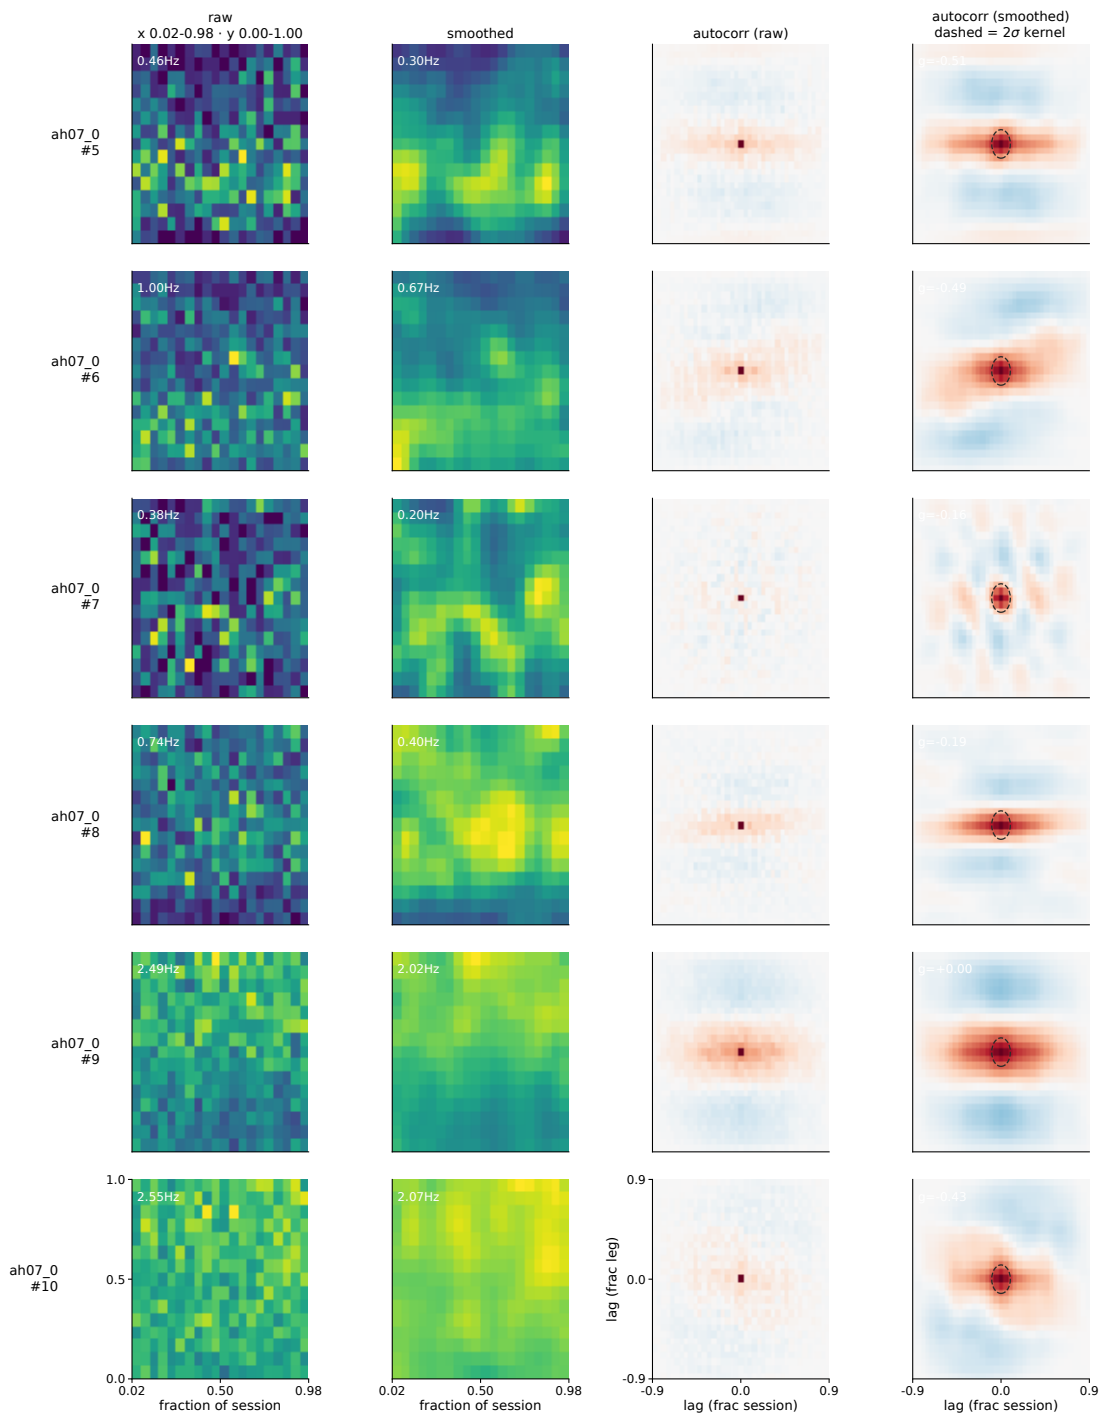


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 720-725 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

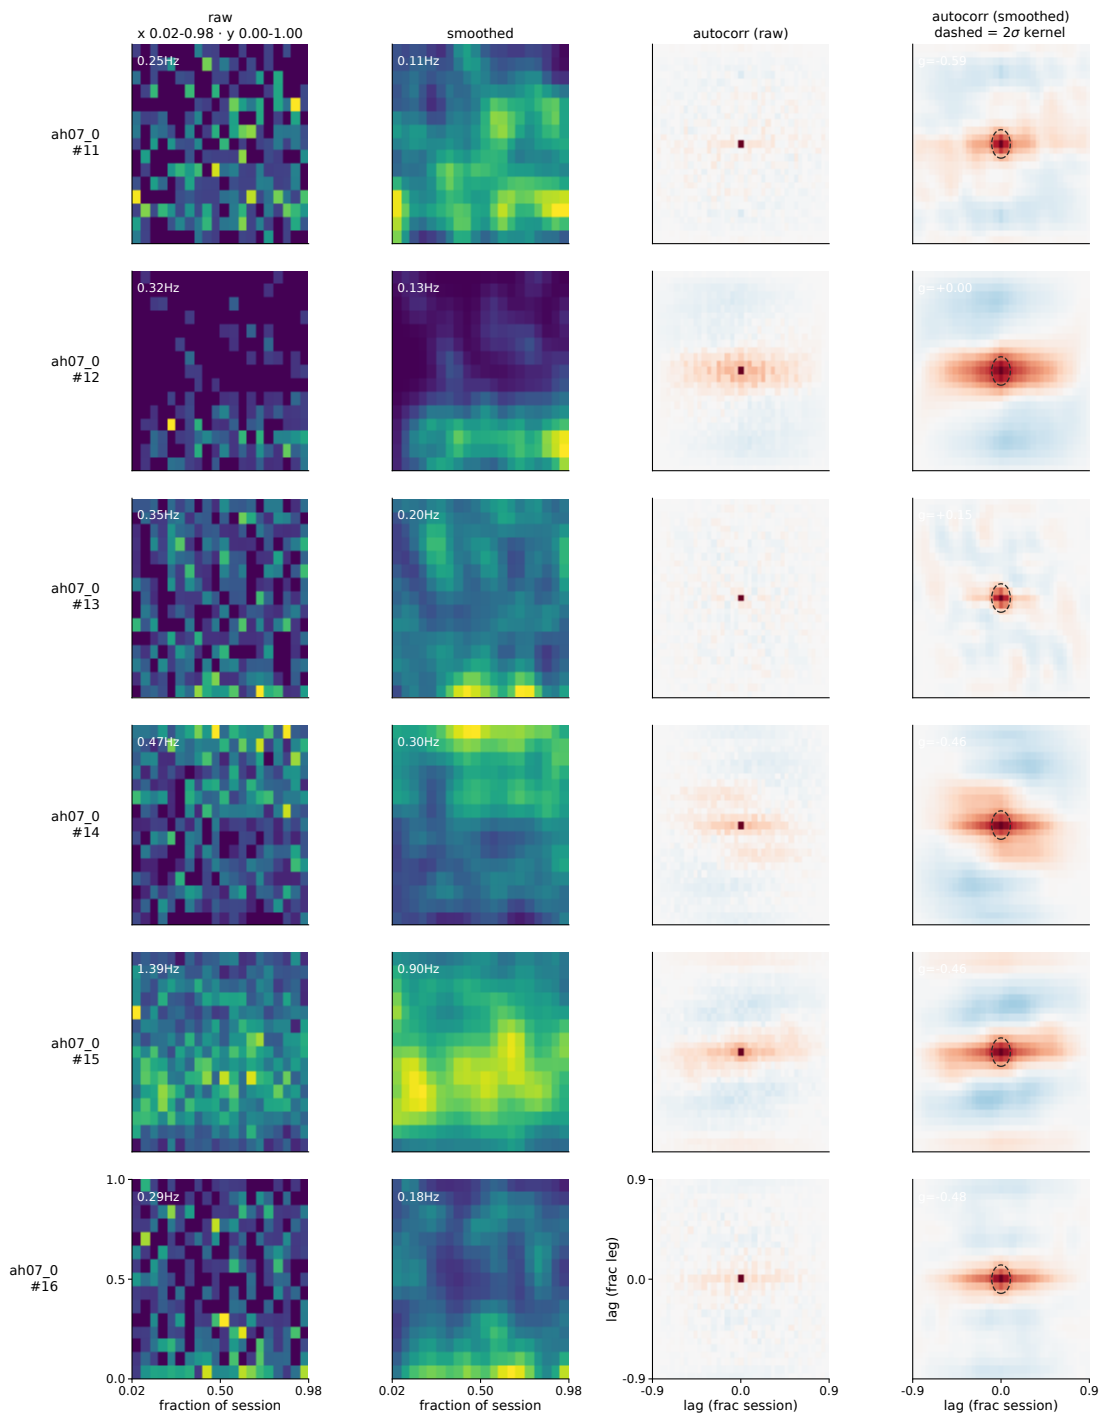


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 726-731 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

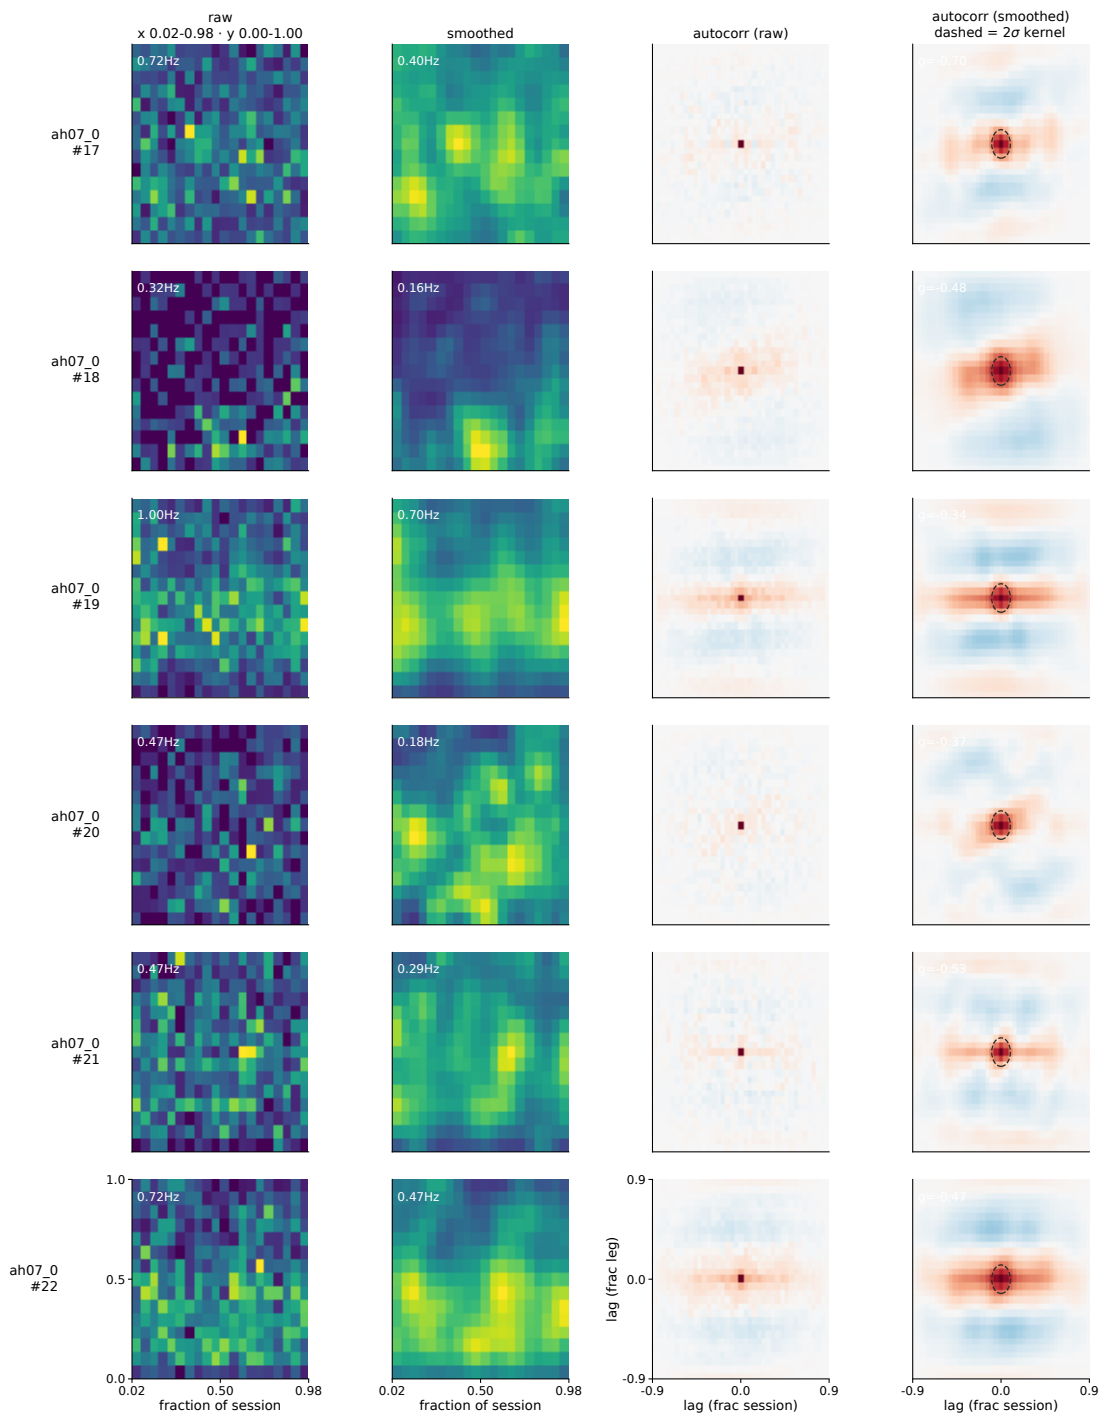


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 732-737 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

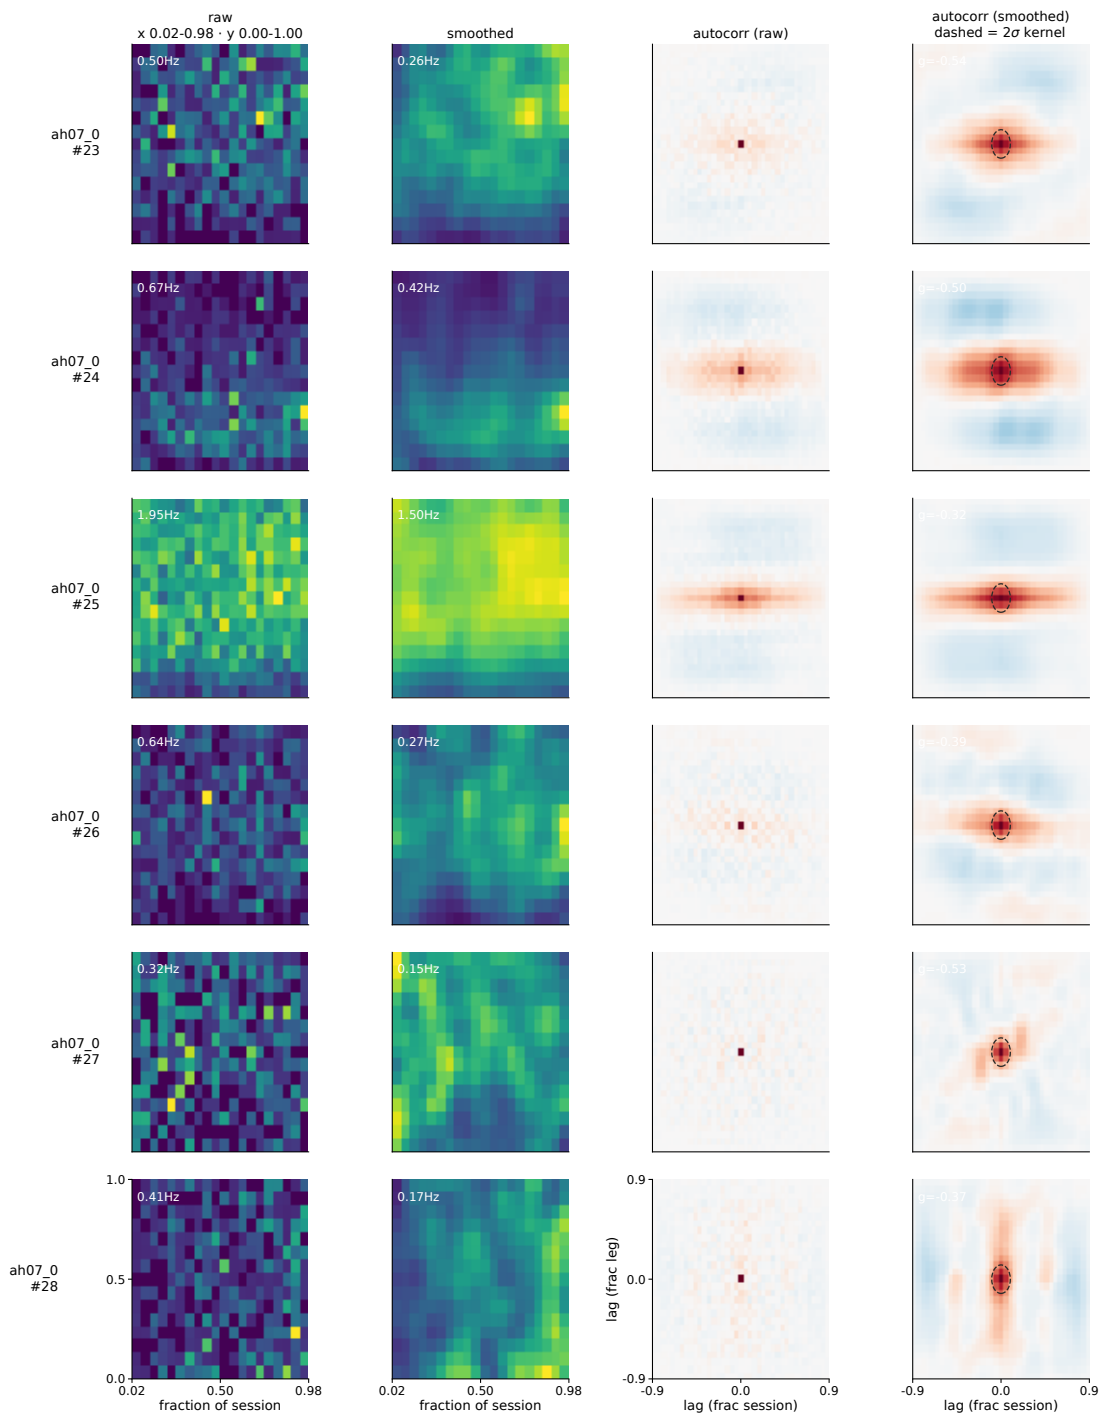


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 738-743 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

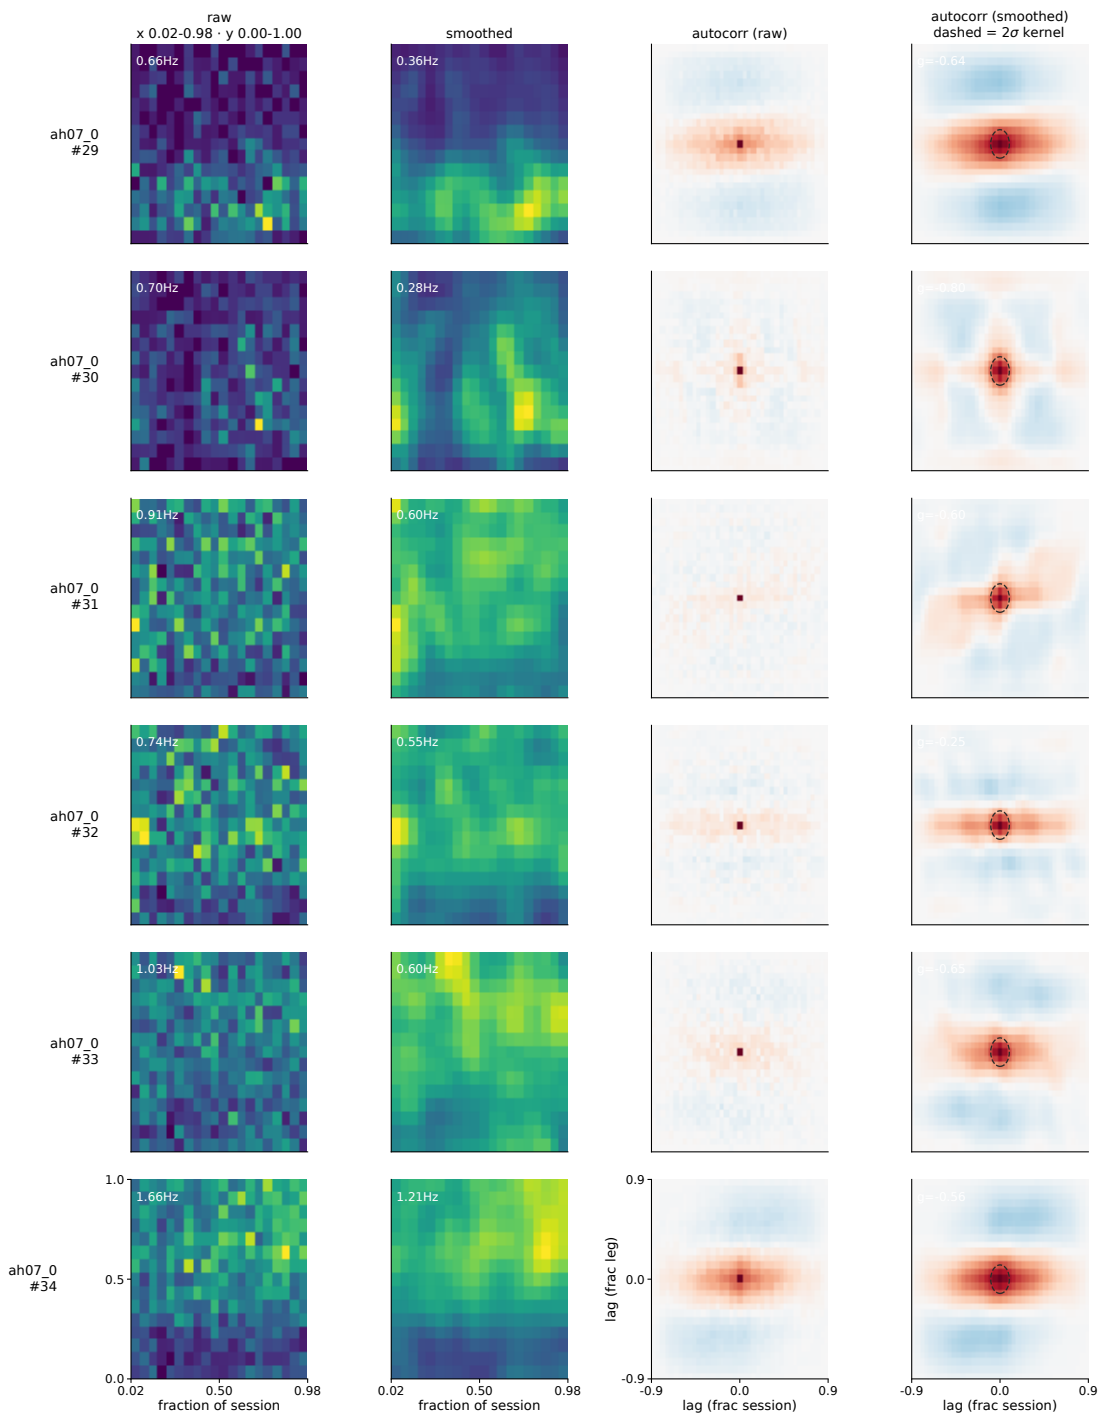


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 744-749 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

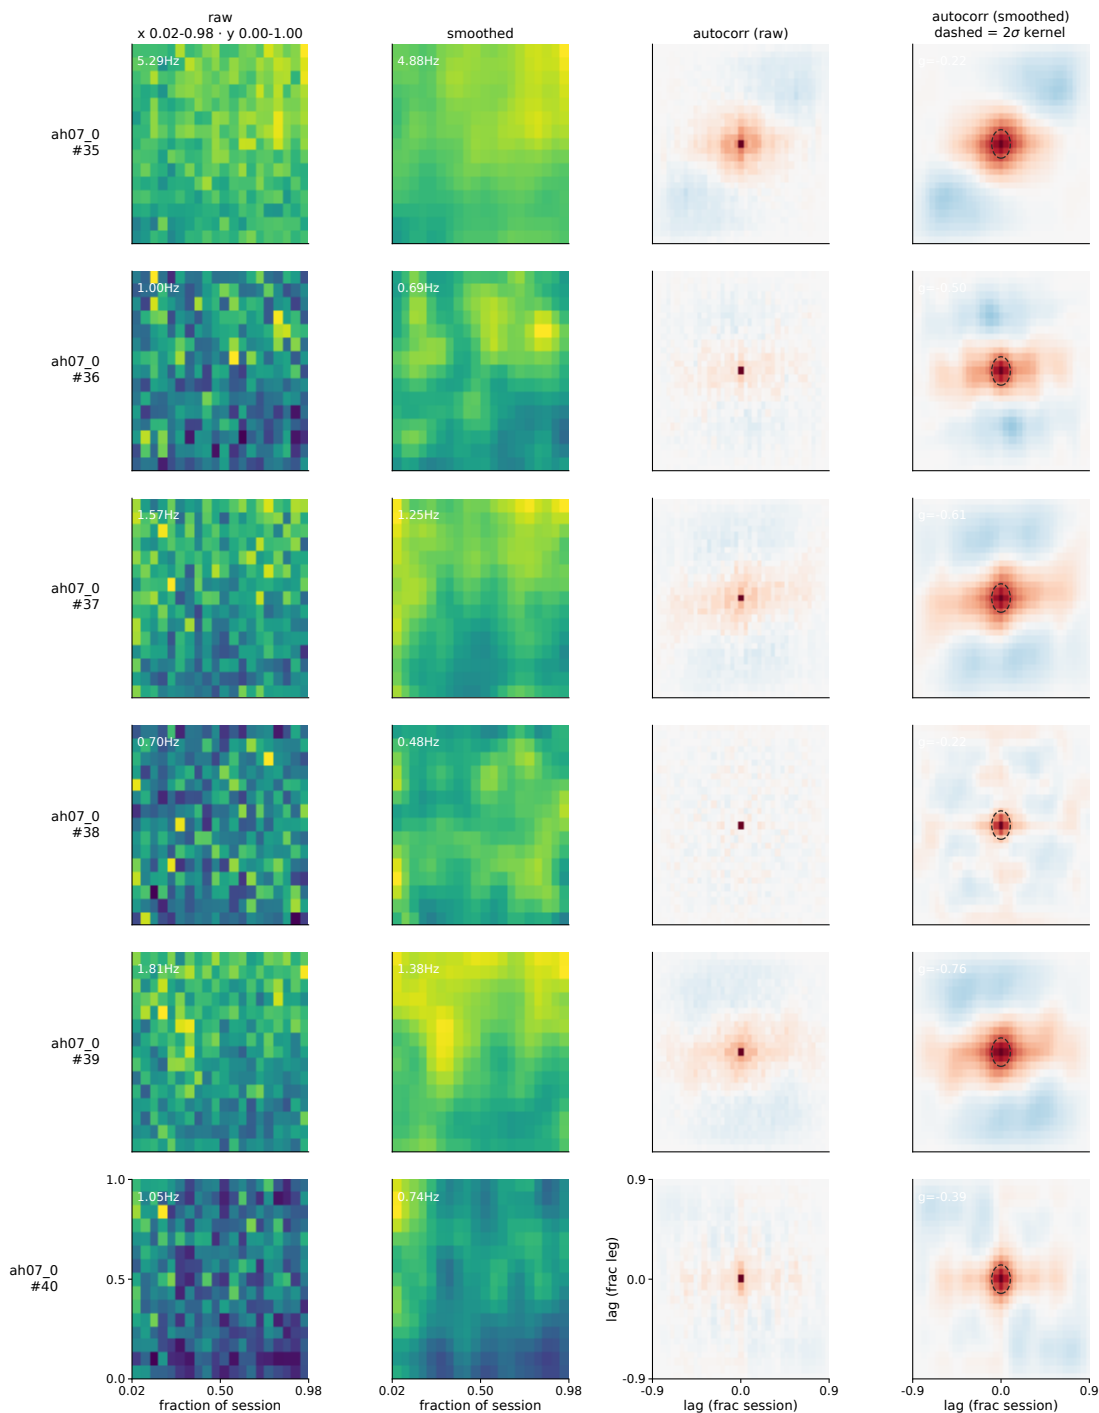


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 750-755 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

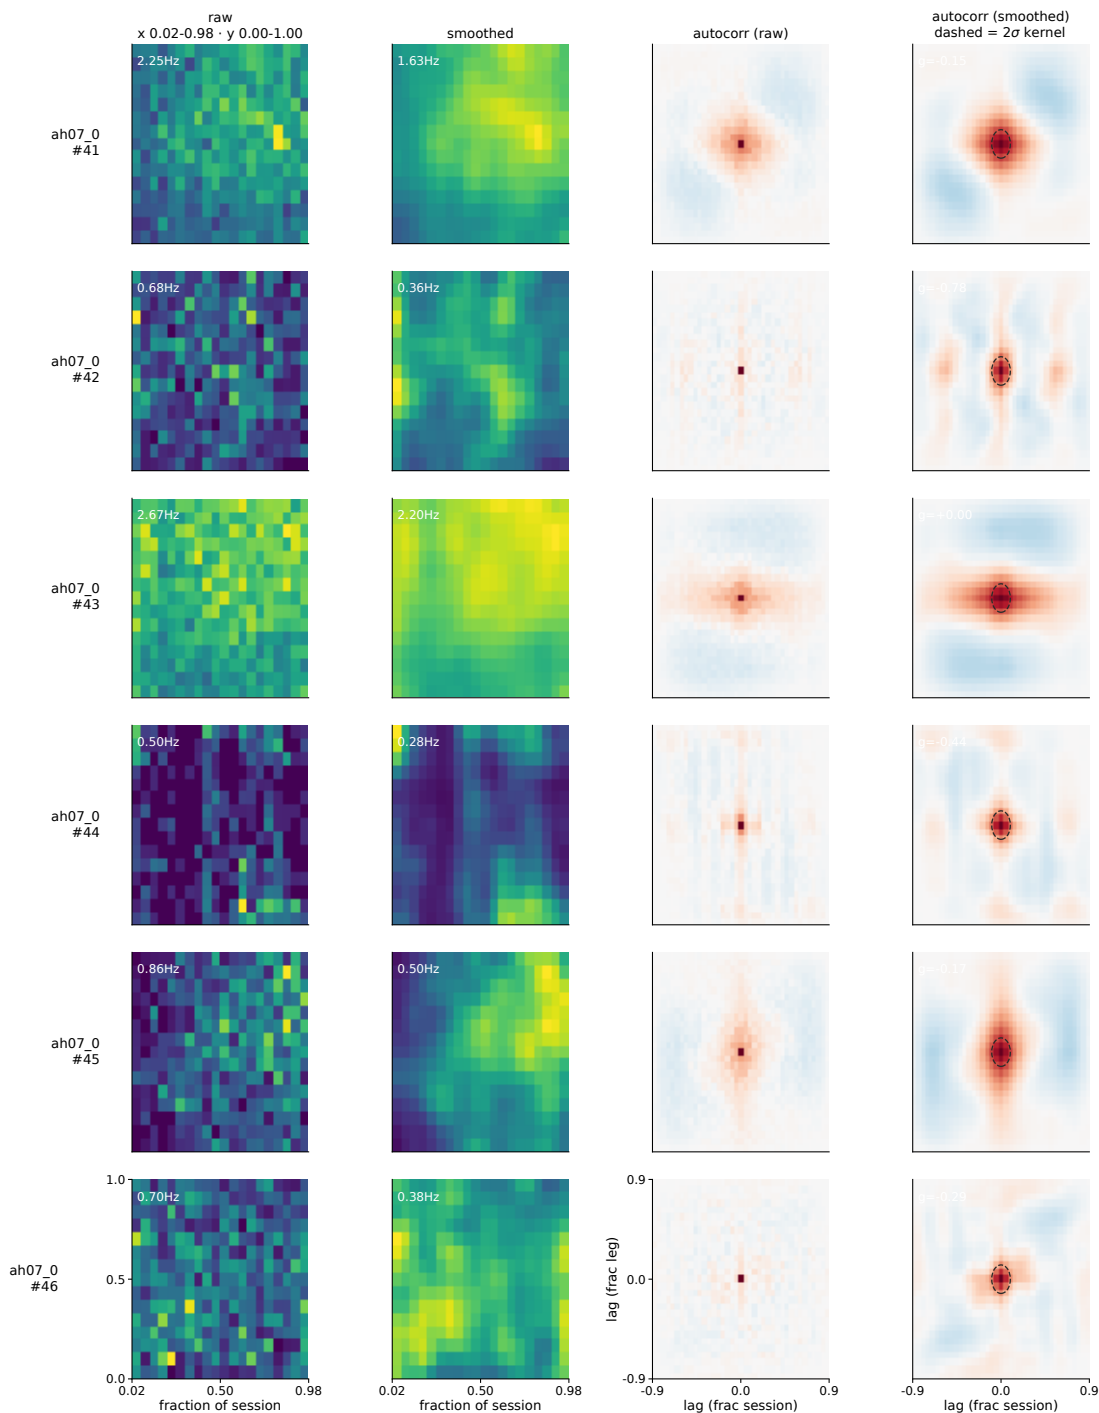


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 756-761 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

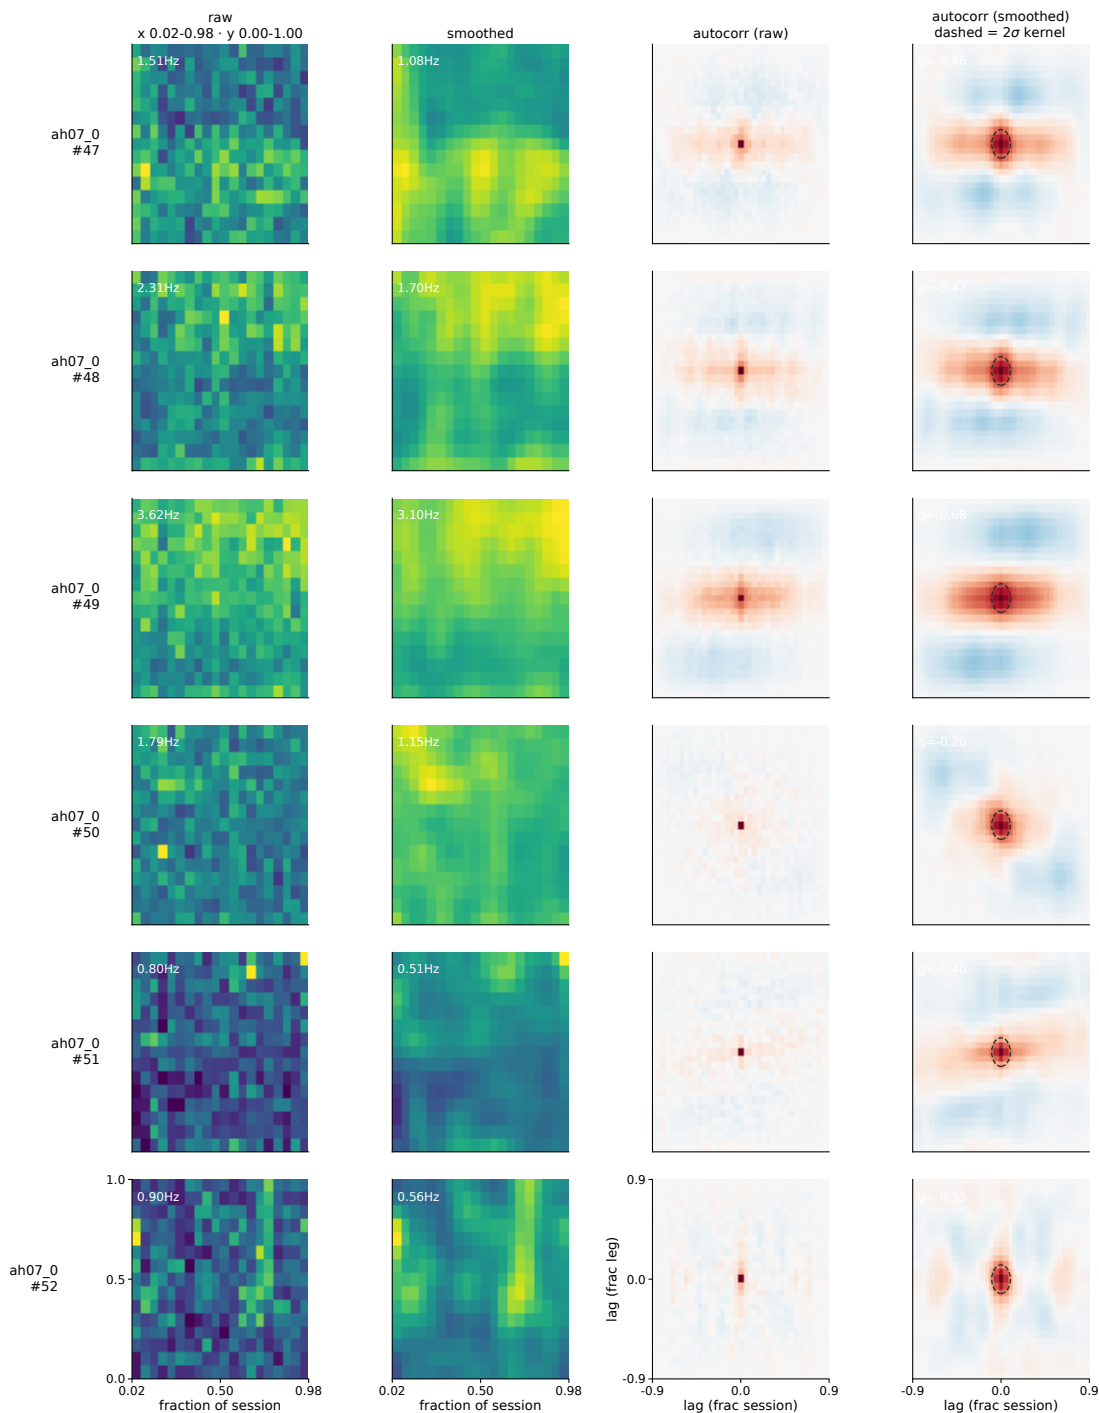


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 762-767 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

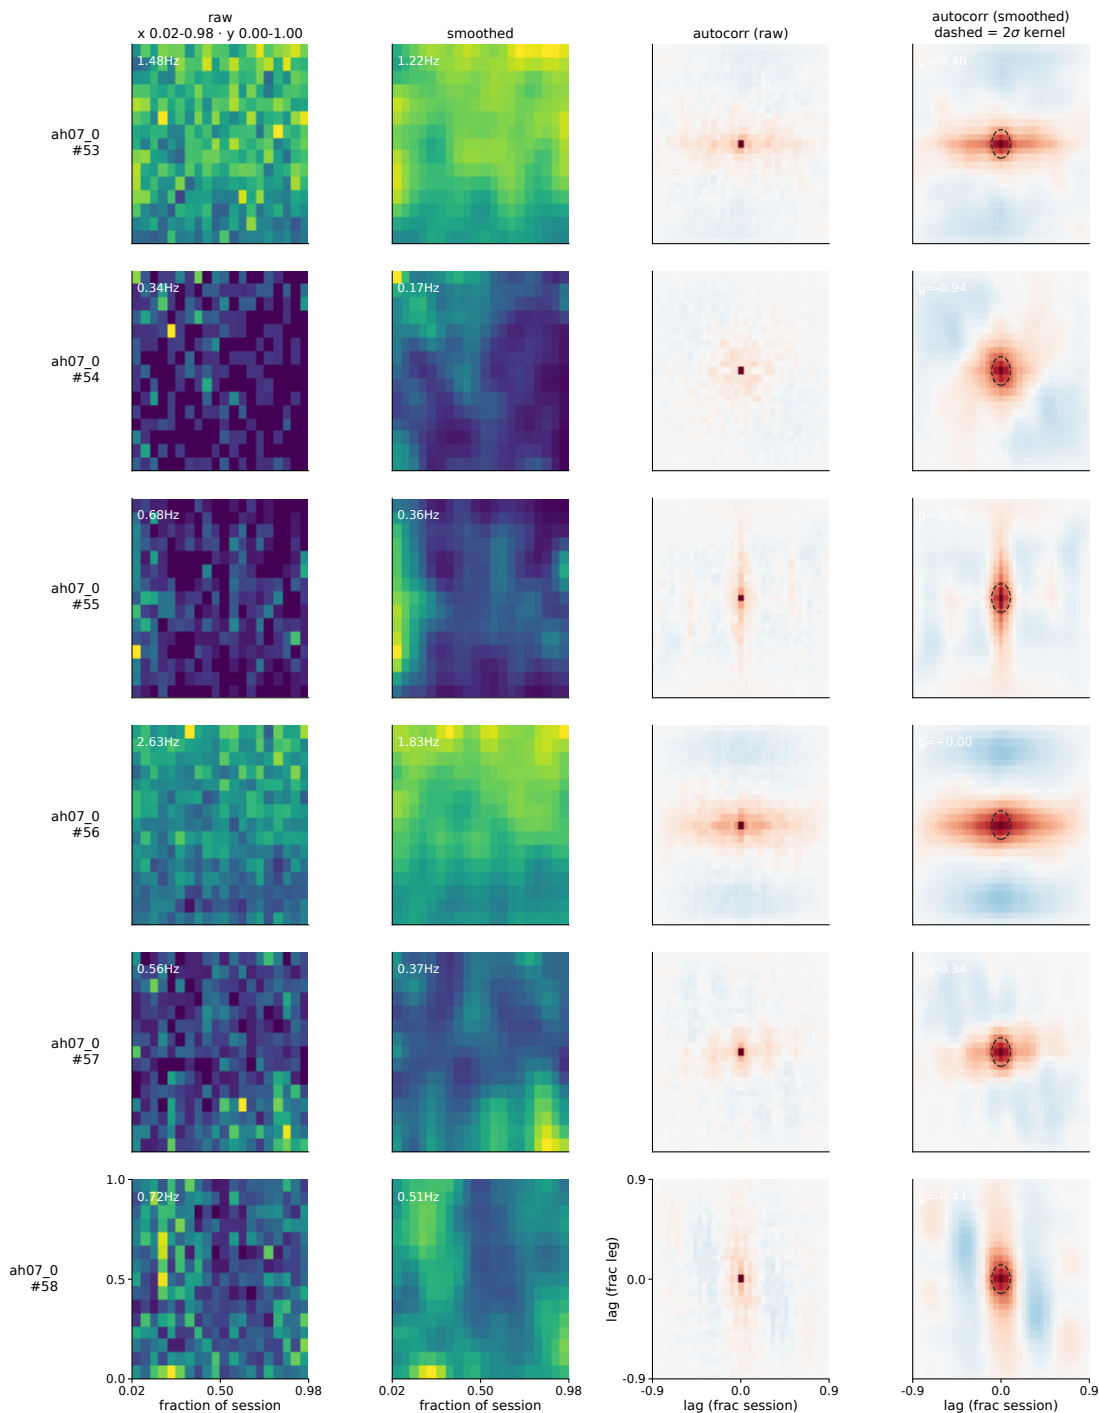


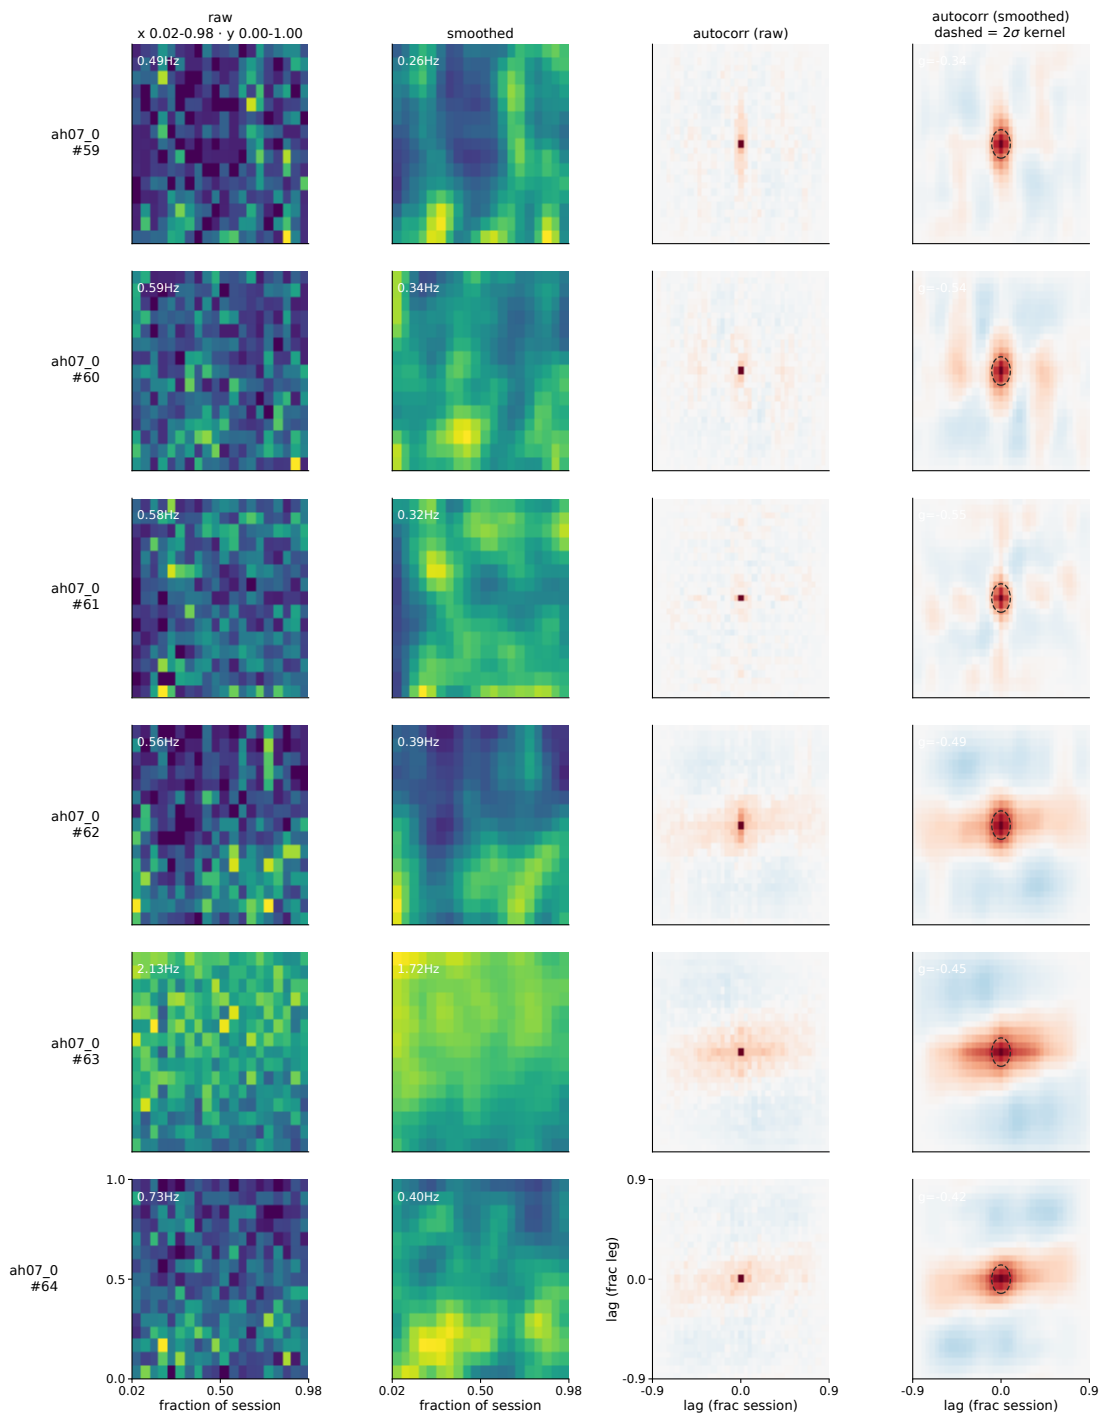


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 774-779 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

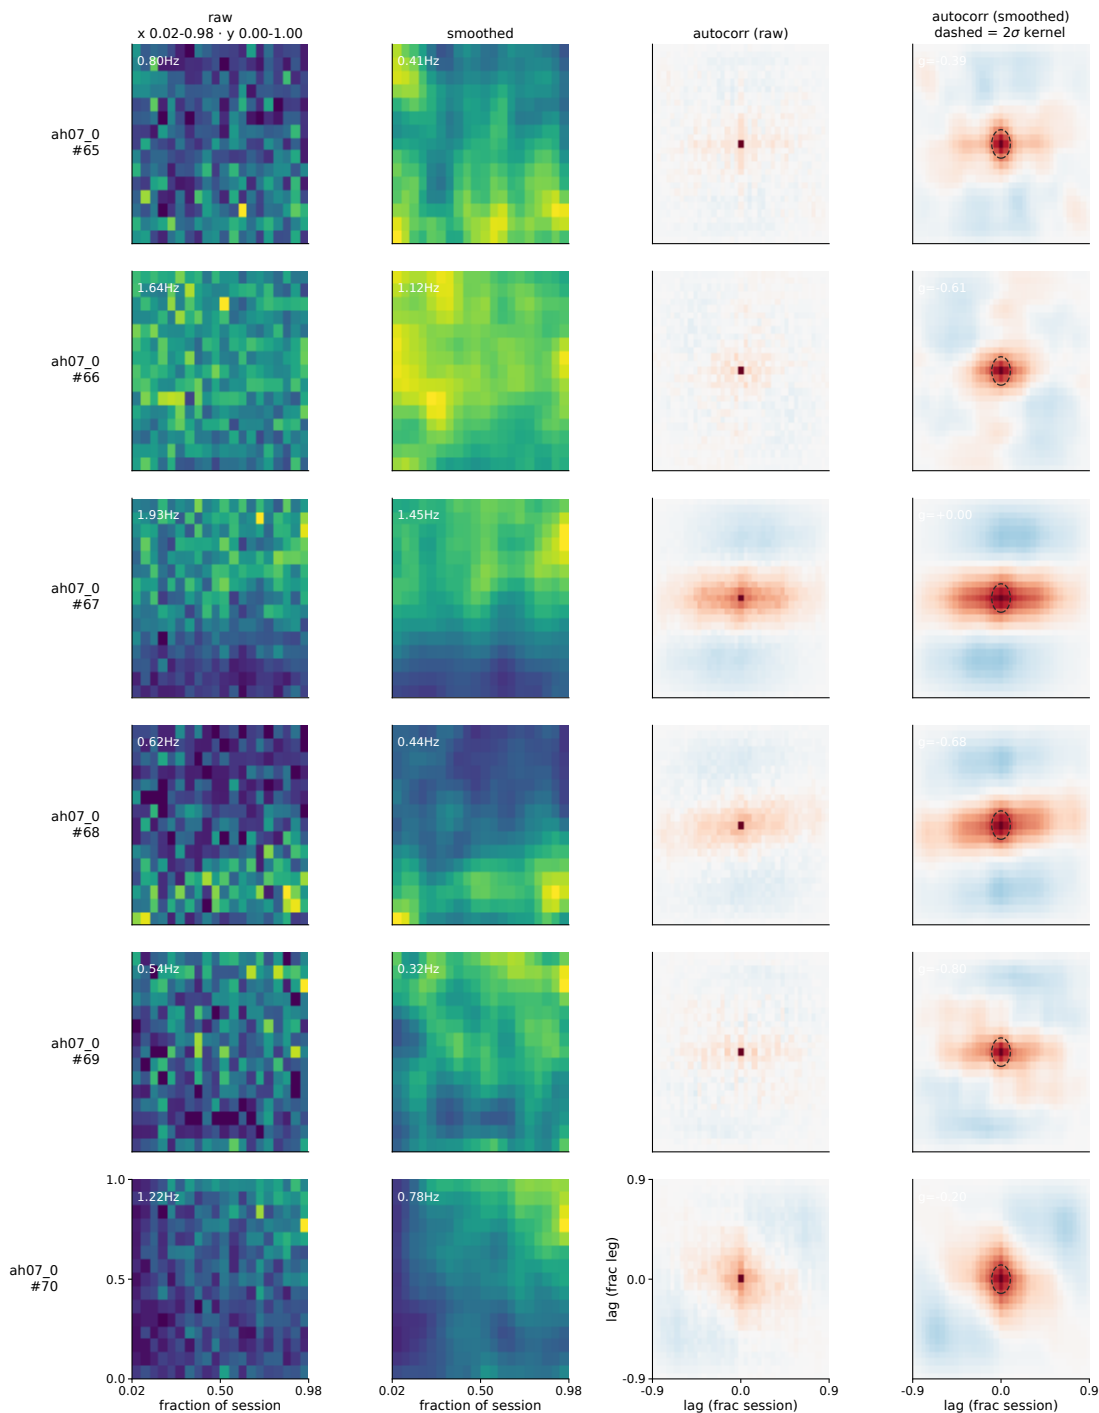


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 780-785 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

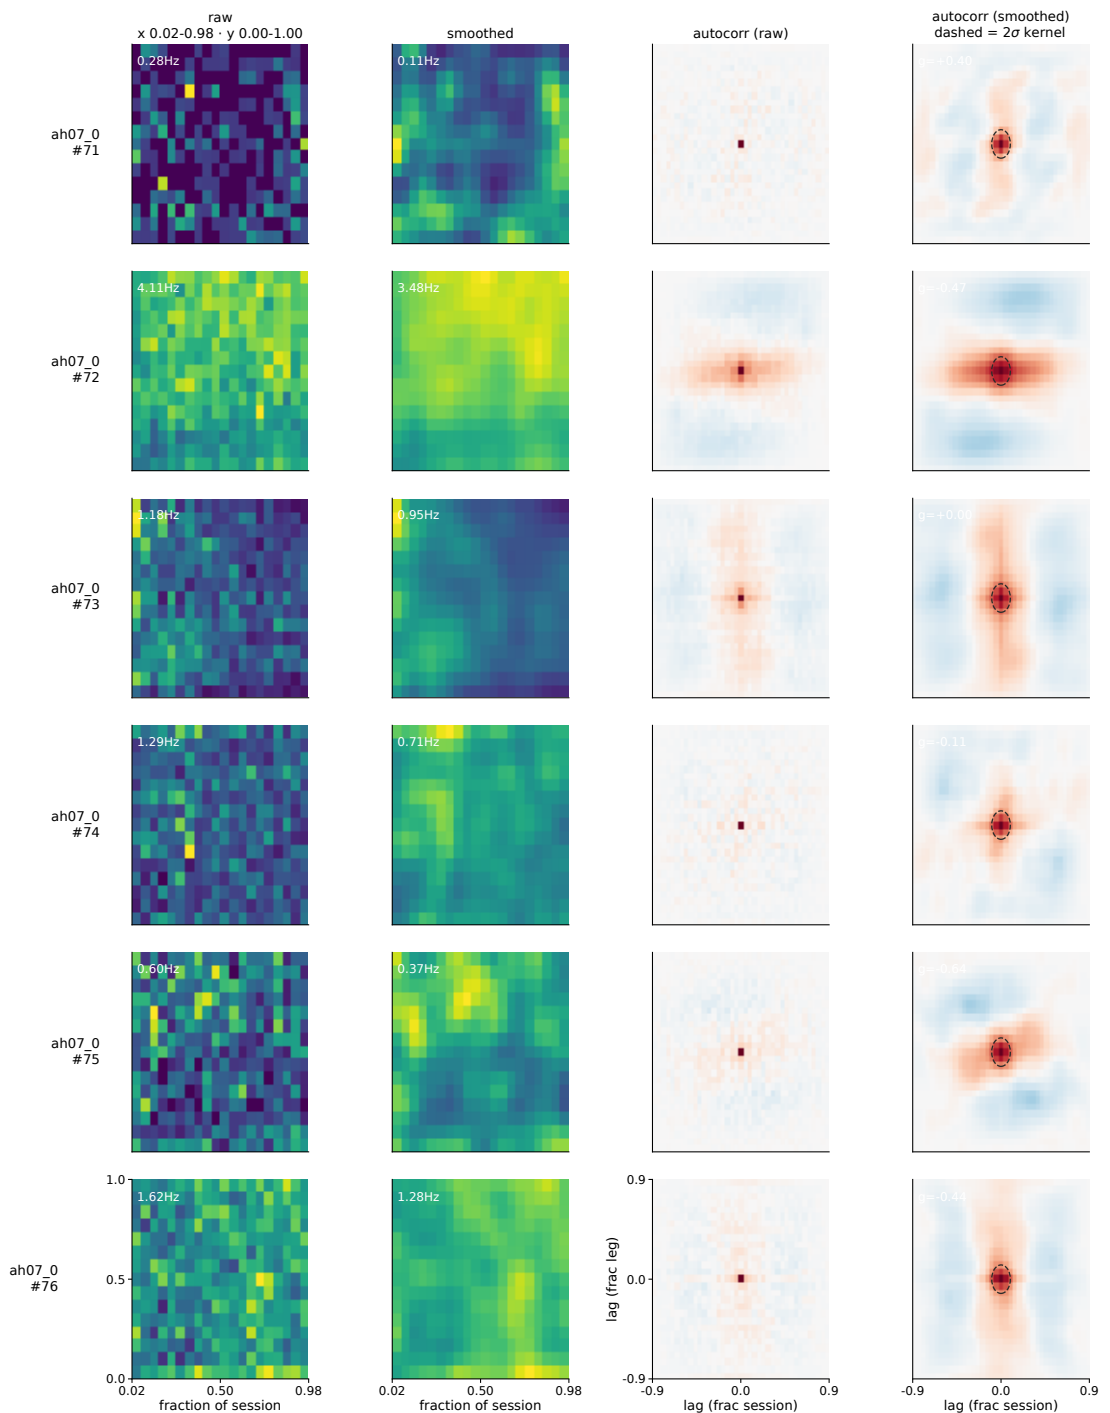


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 786-791 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

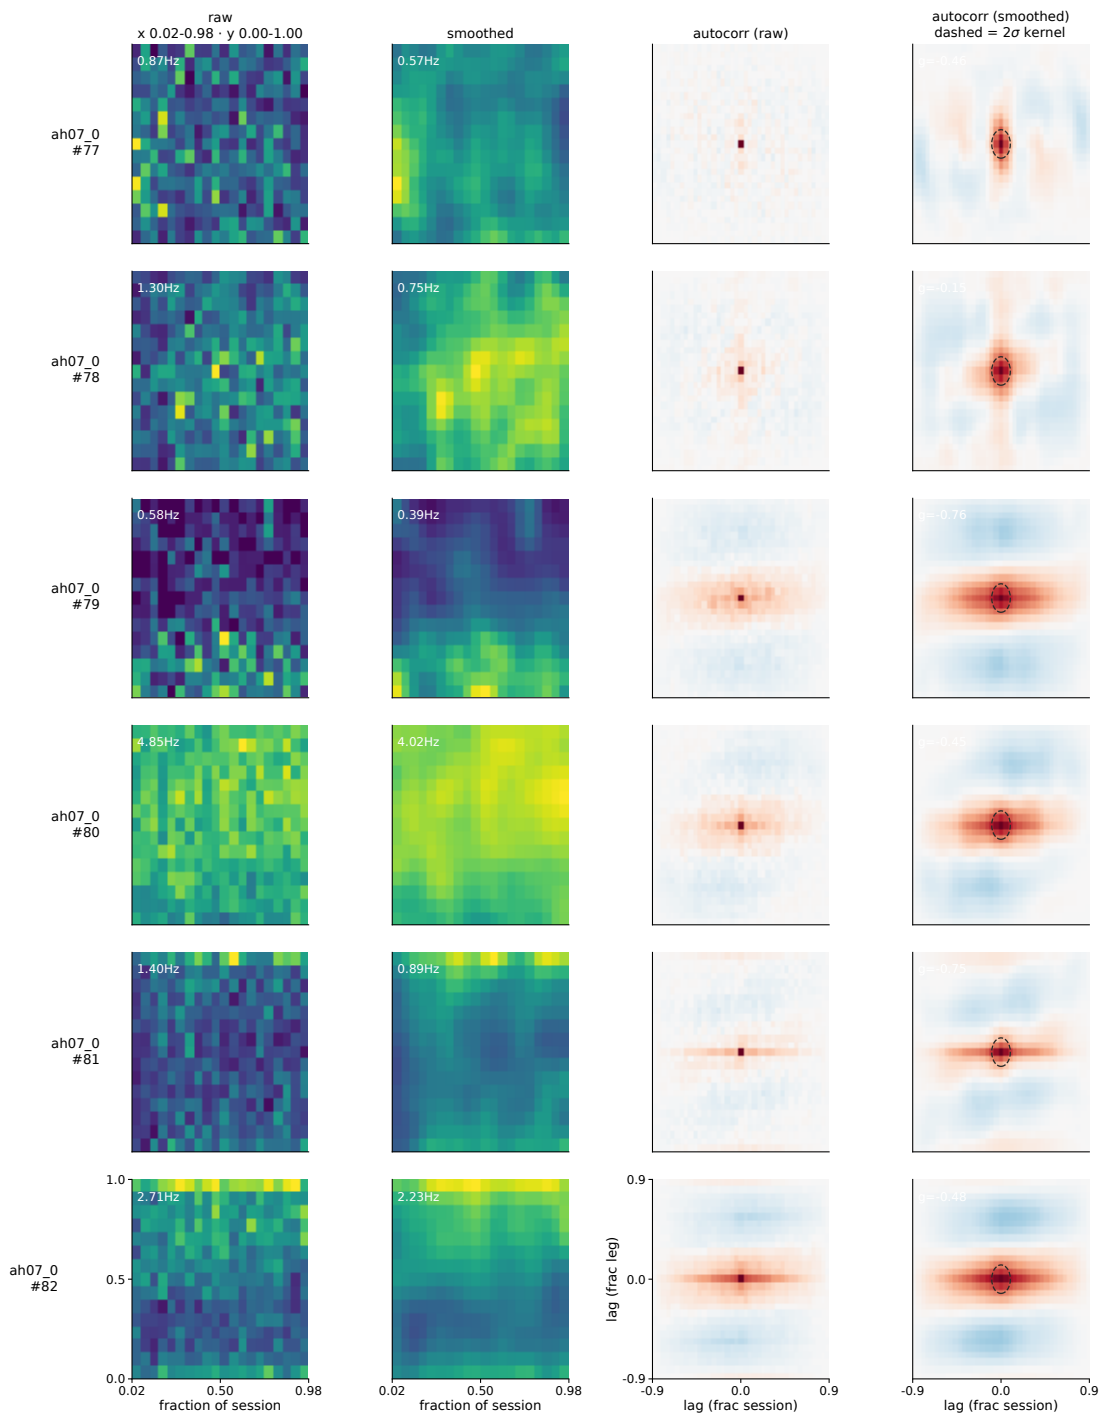


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 792-797 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

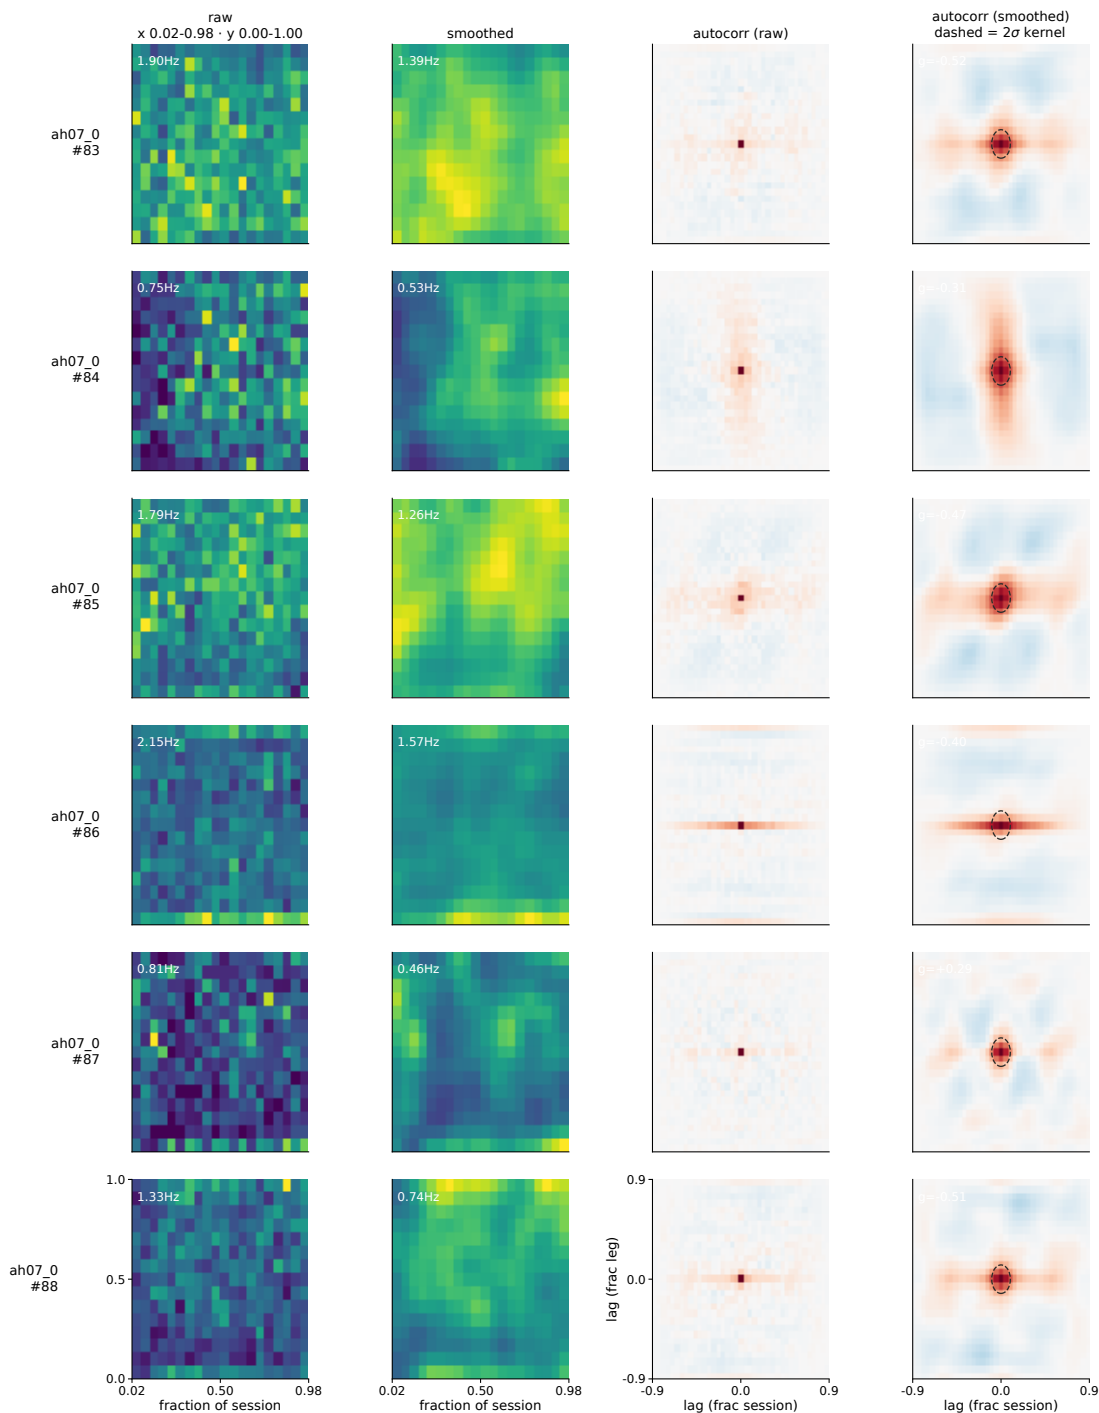


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 798-803 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

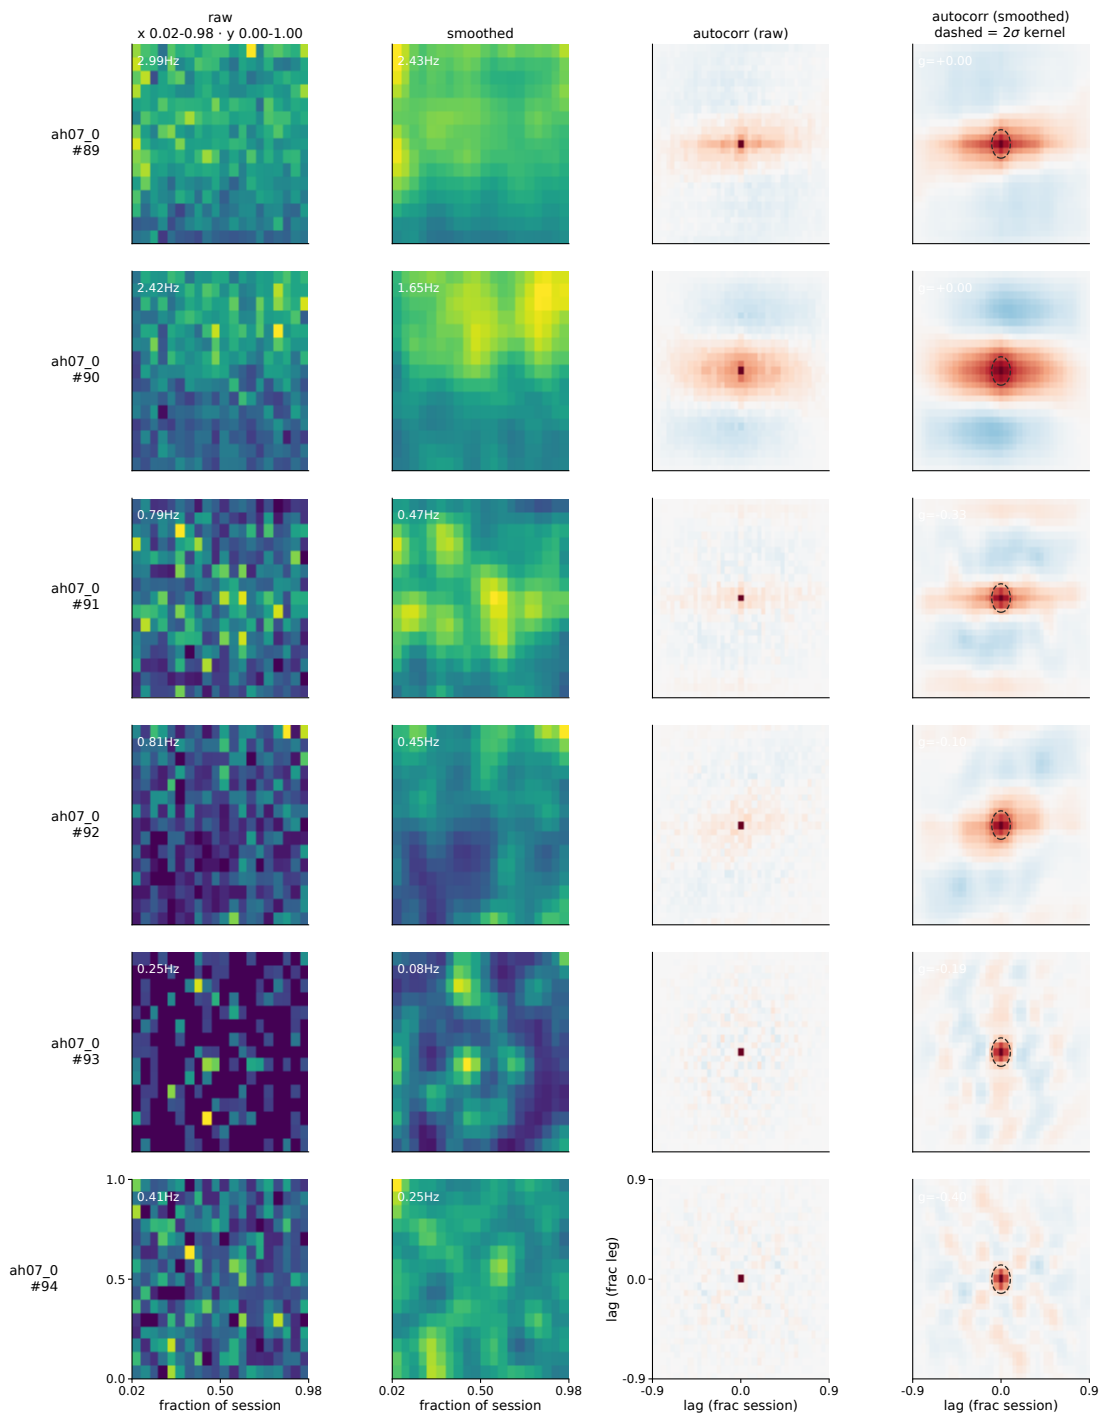


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 804-809 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

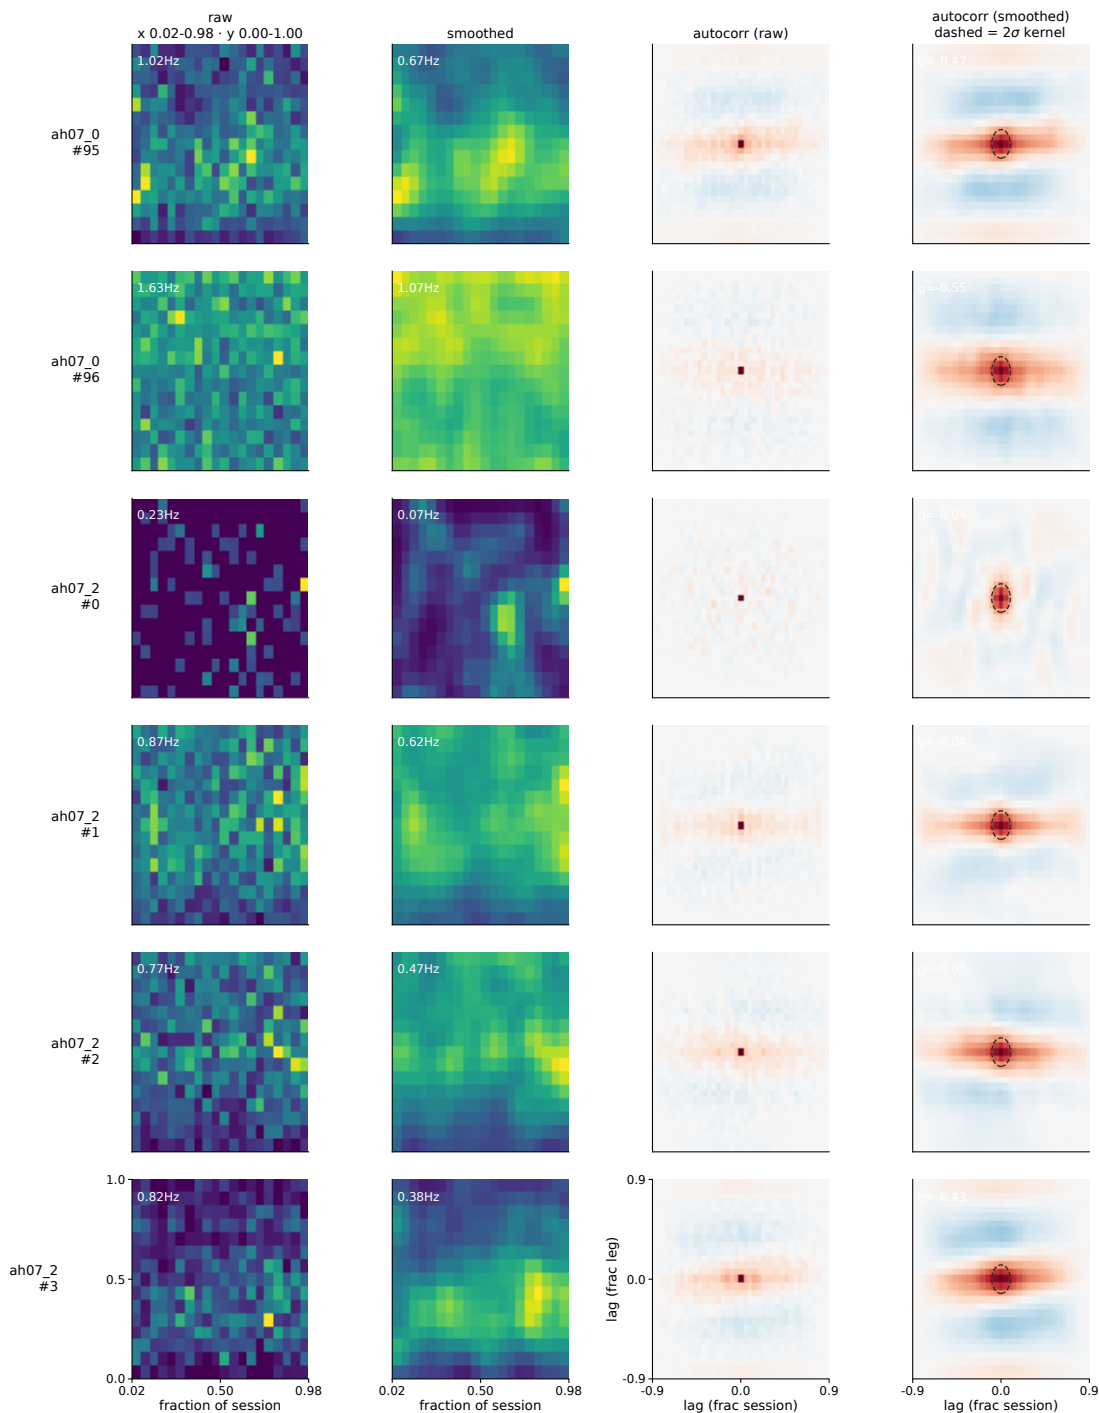


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 810-815 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

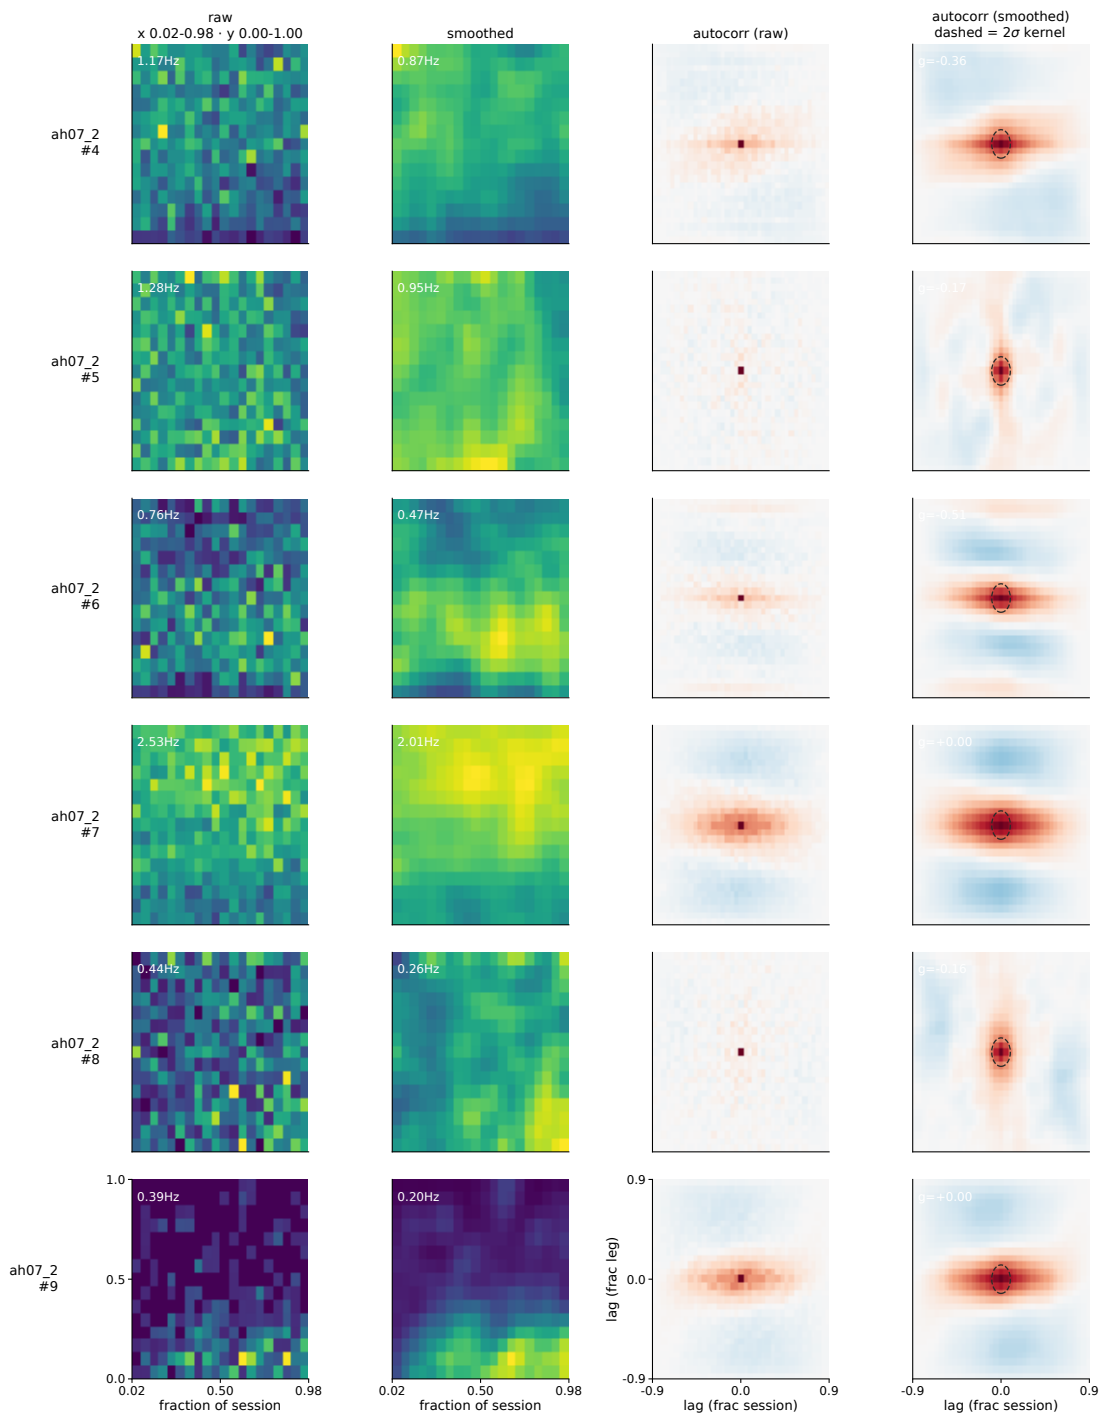


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 816-821 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

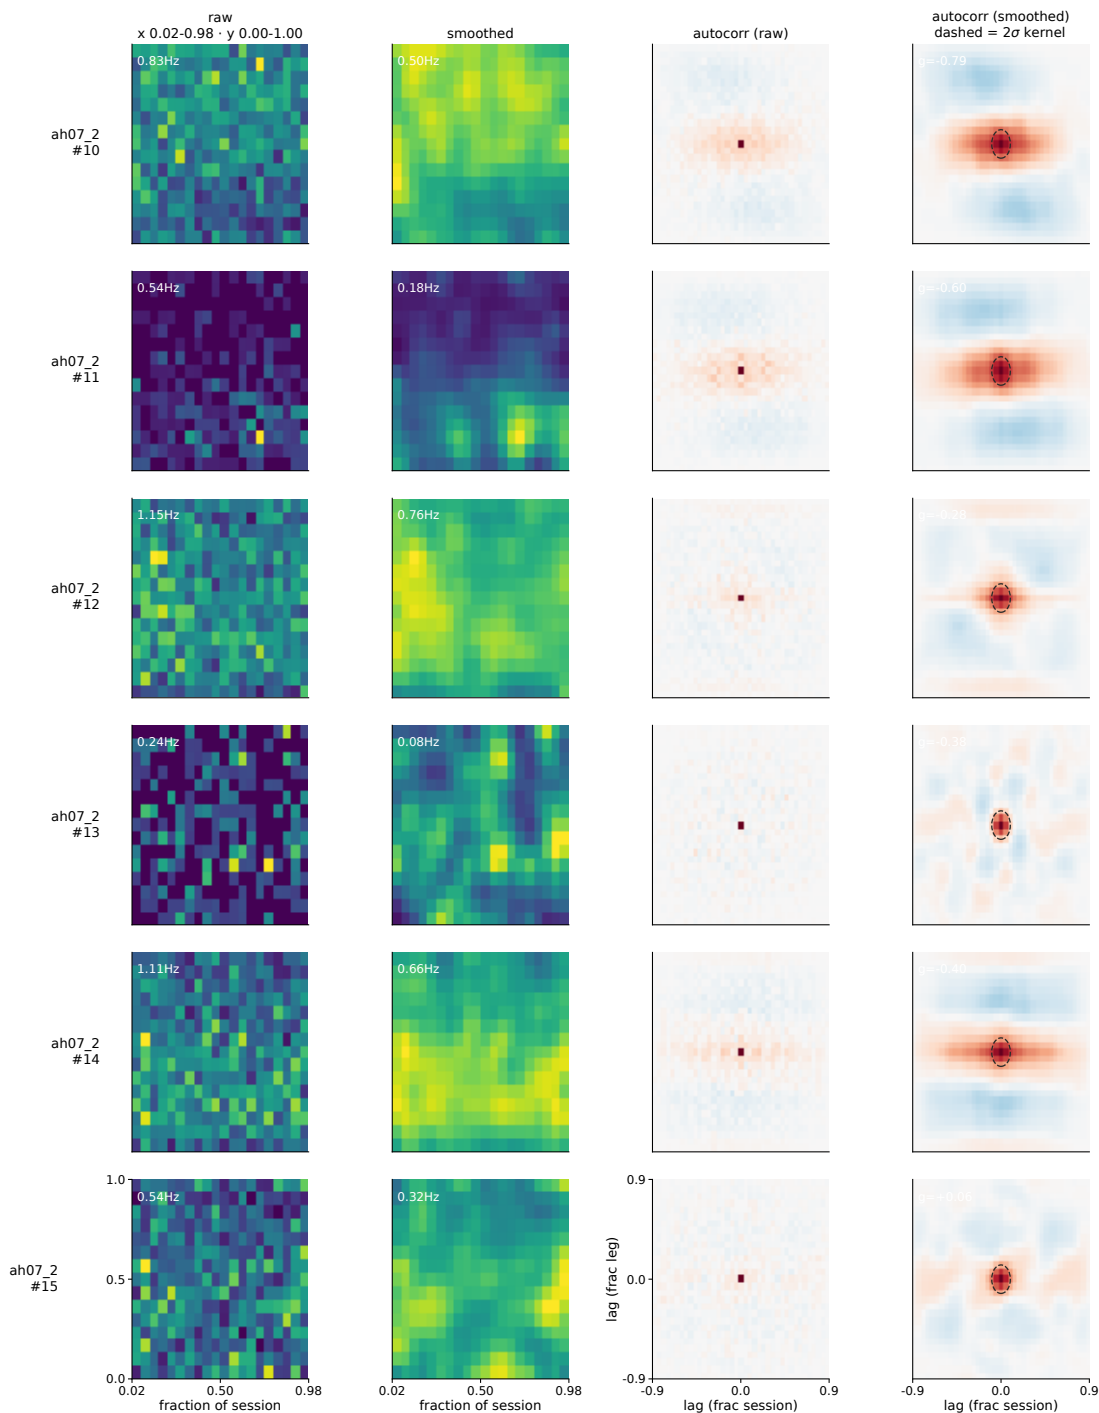


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 822-827 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

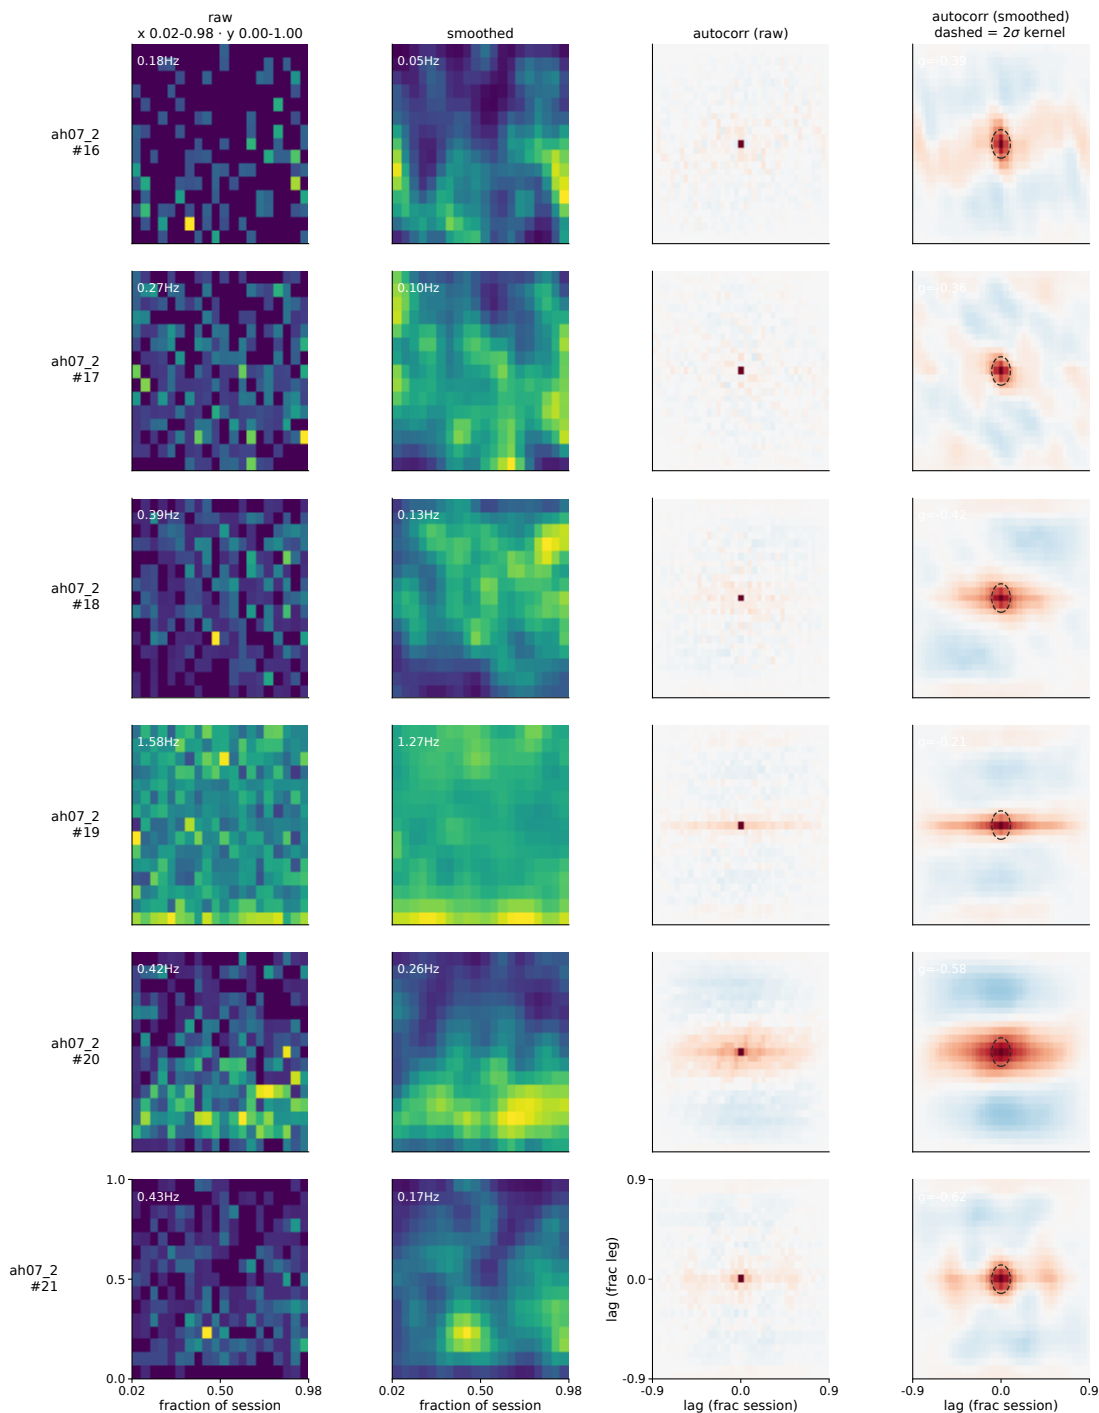


normalised | maps: x = fraction of session, y = fraction of session transition | autocorr: lag on both axes | neurons 828-833 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

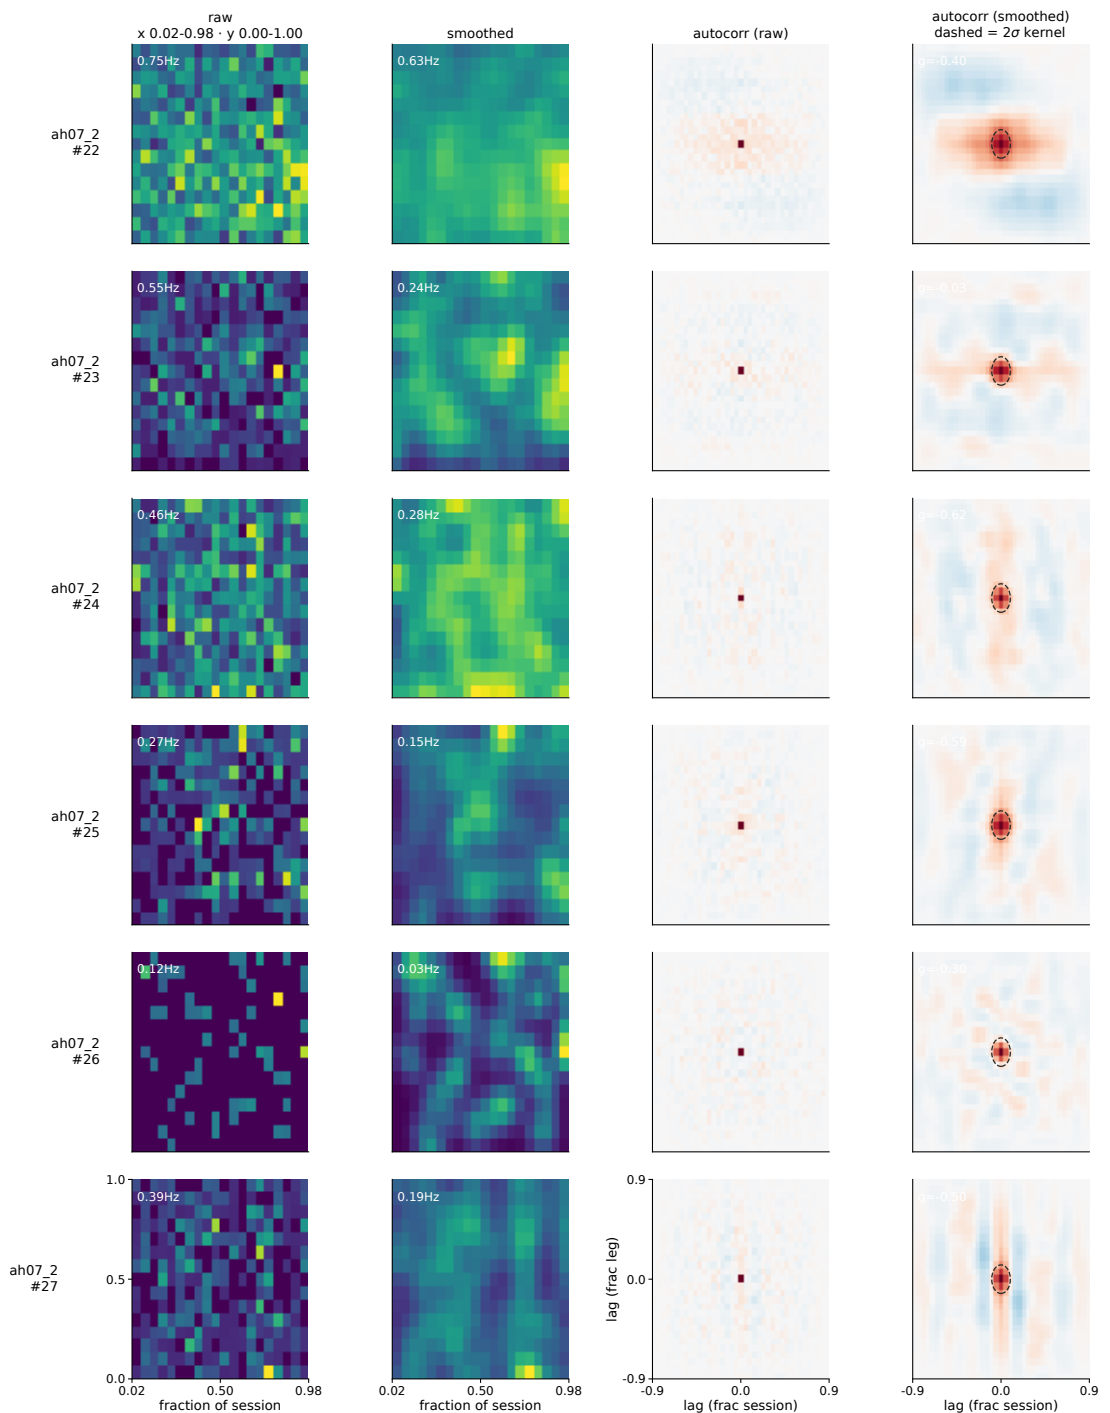


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 834-839 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

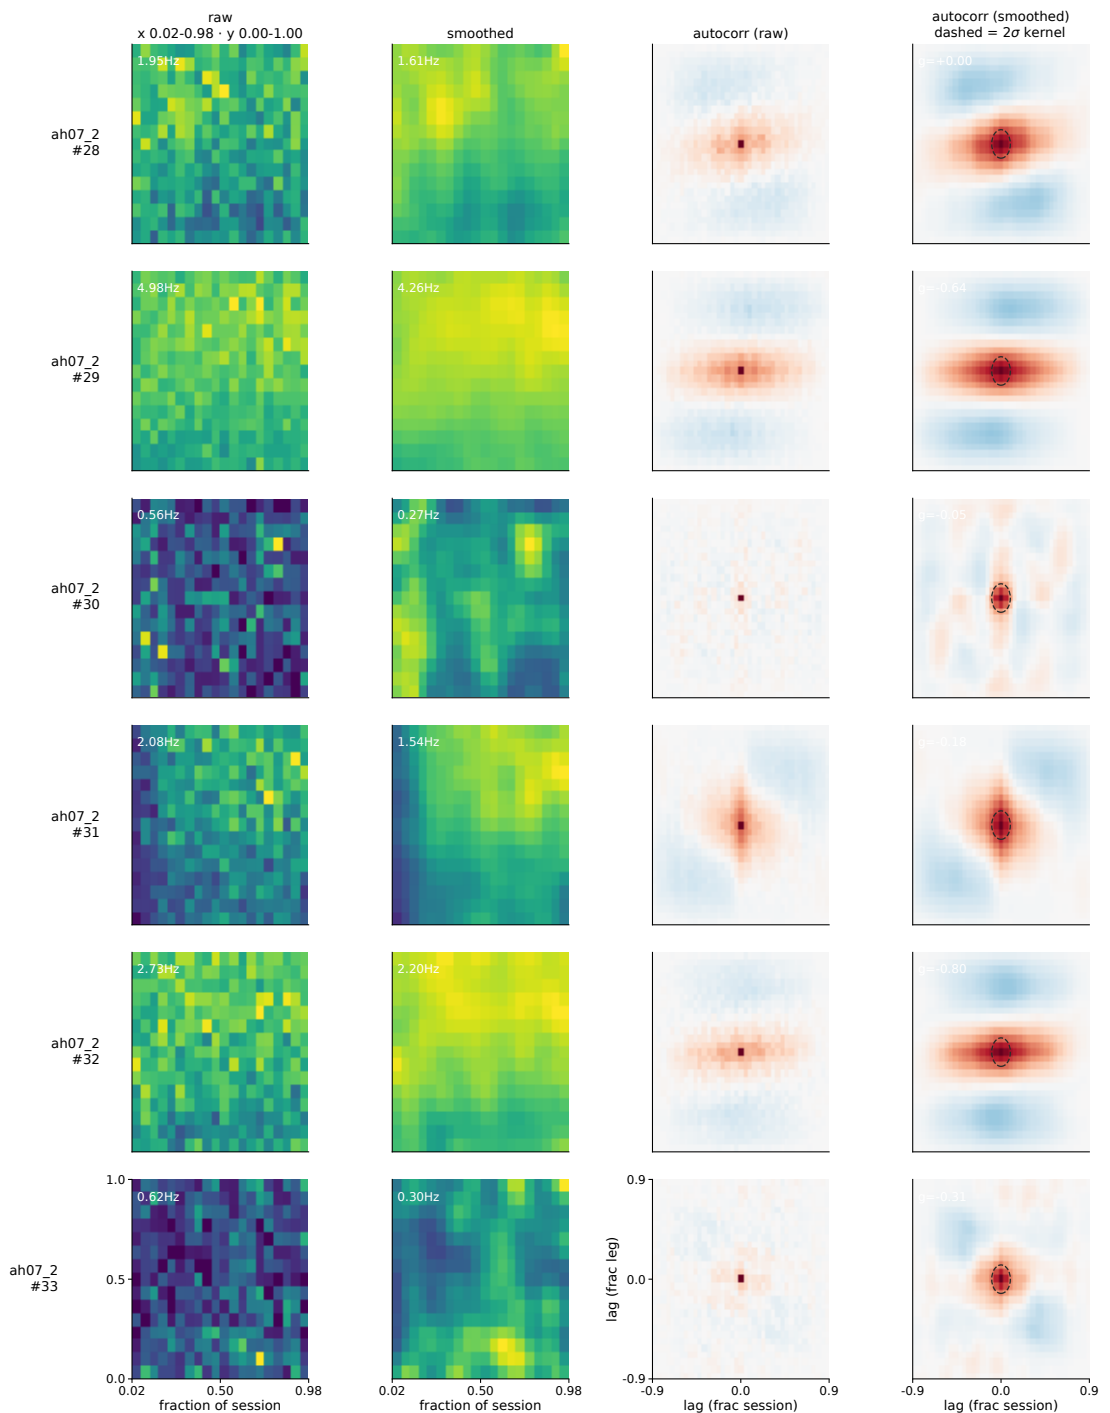


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 840-845 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

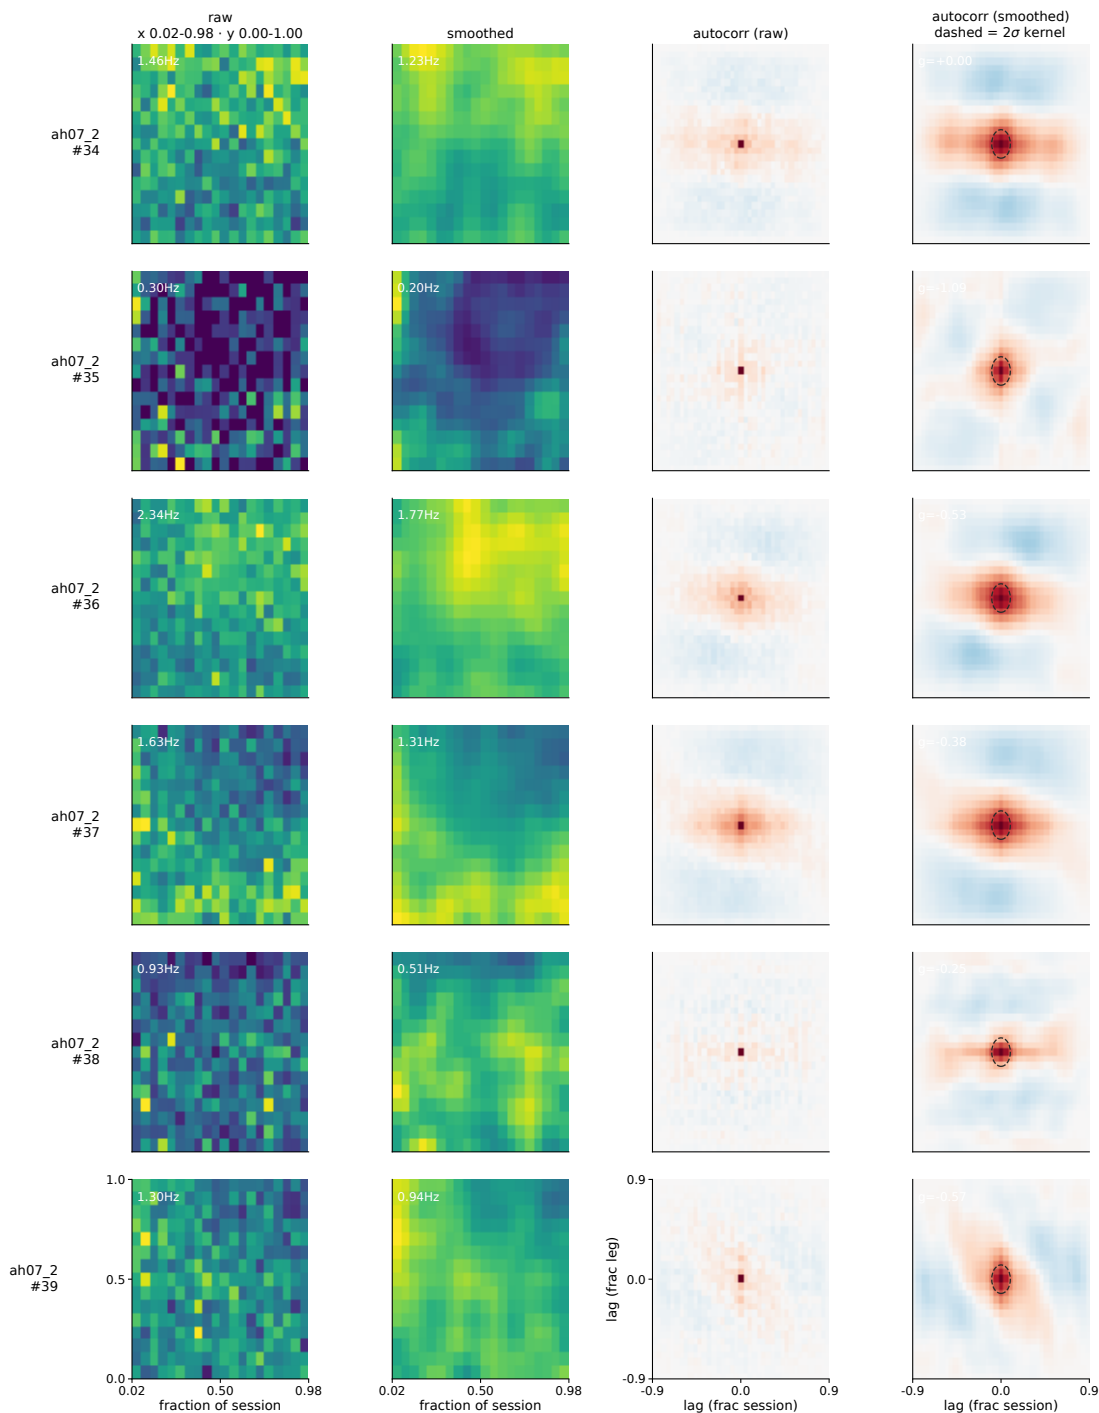


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 846-851 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

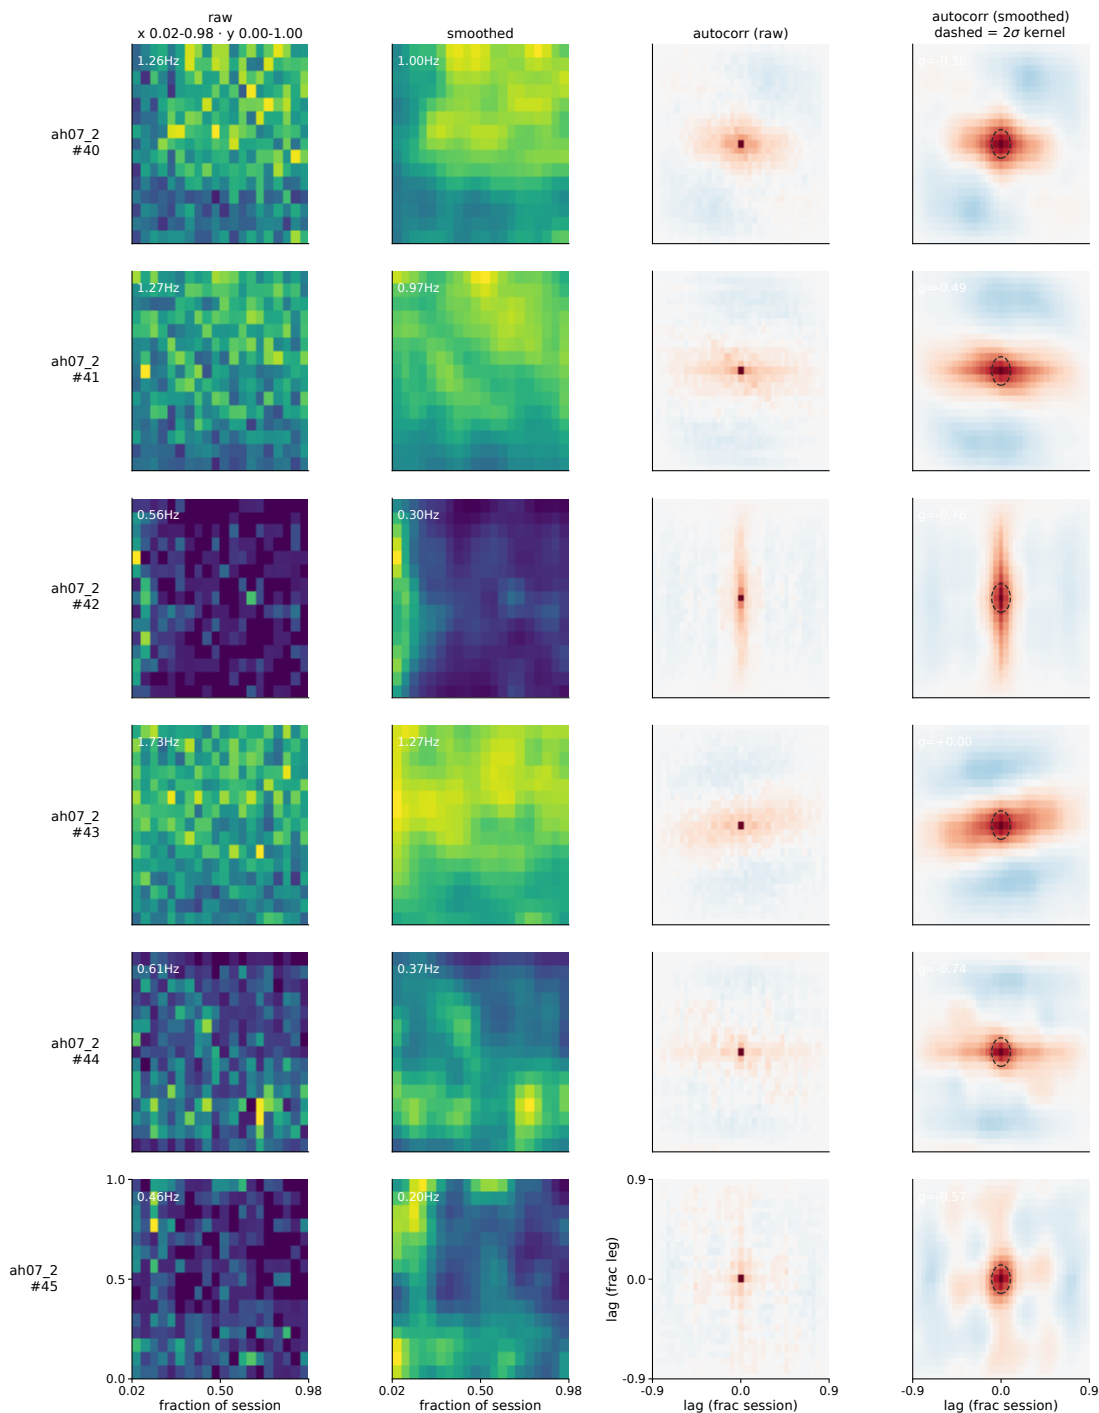


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 852-857 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

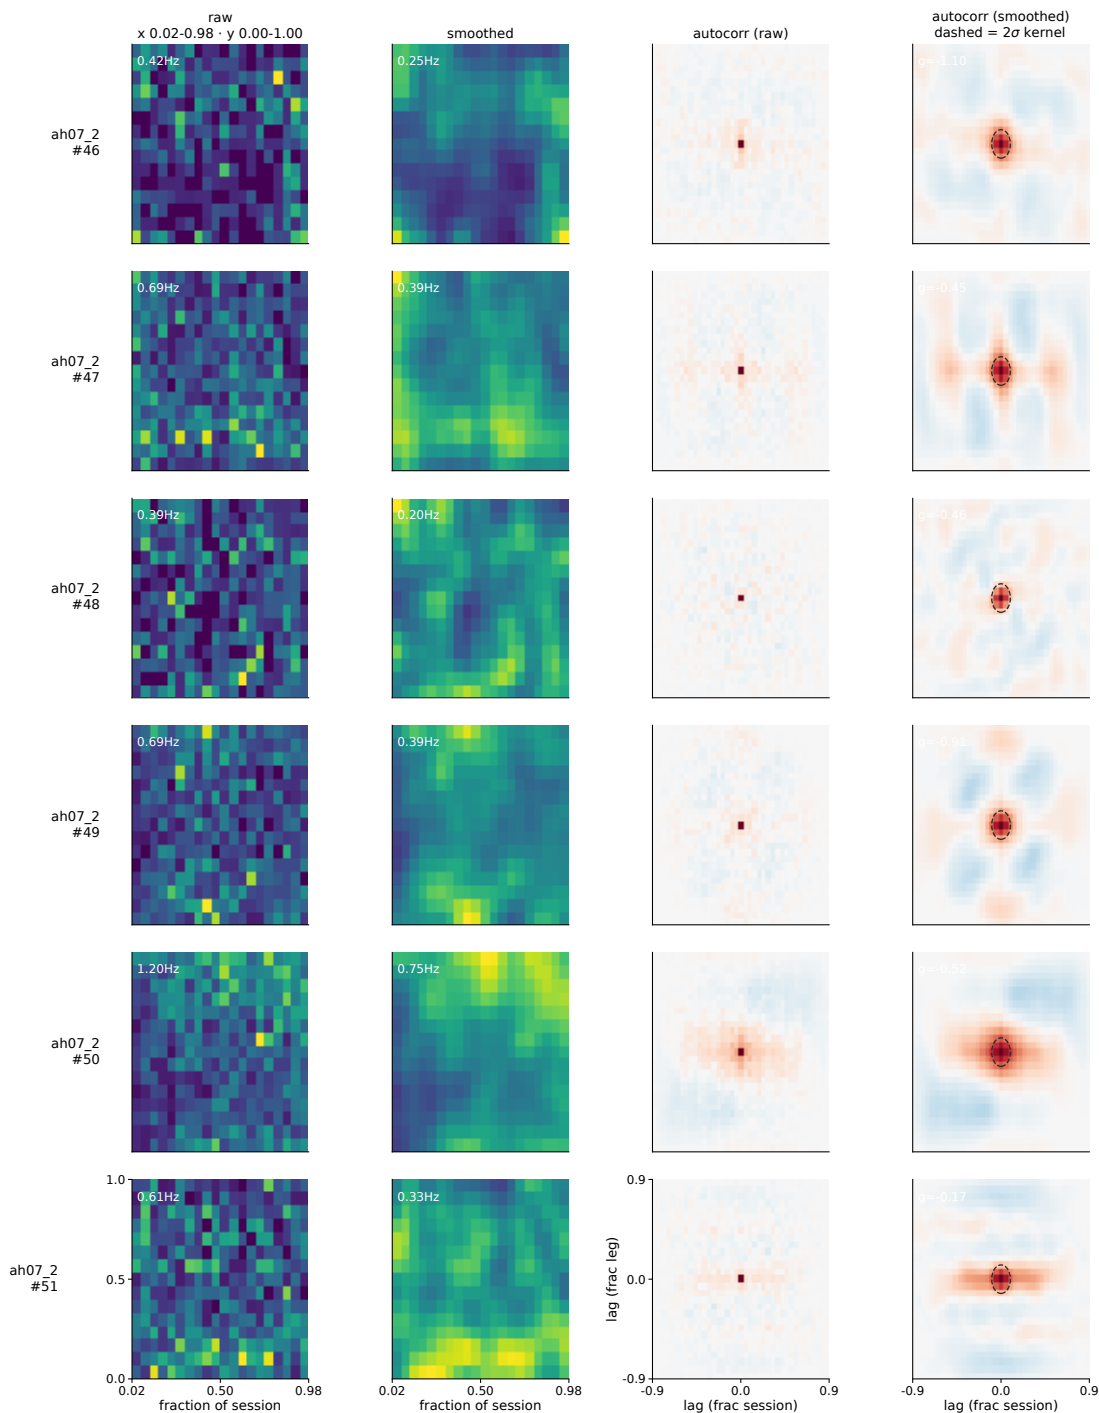


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 858-863 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

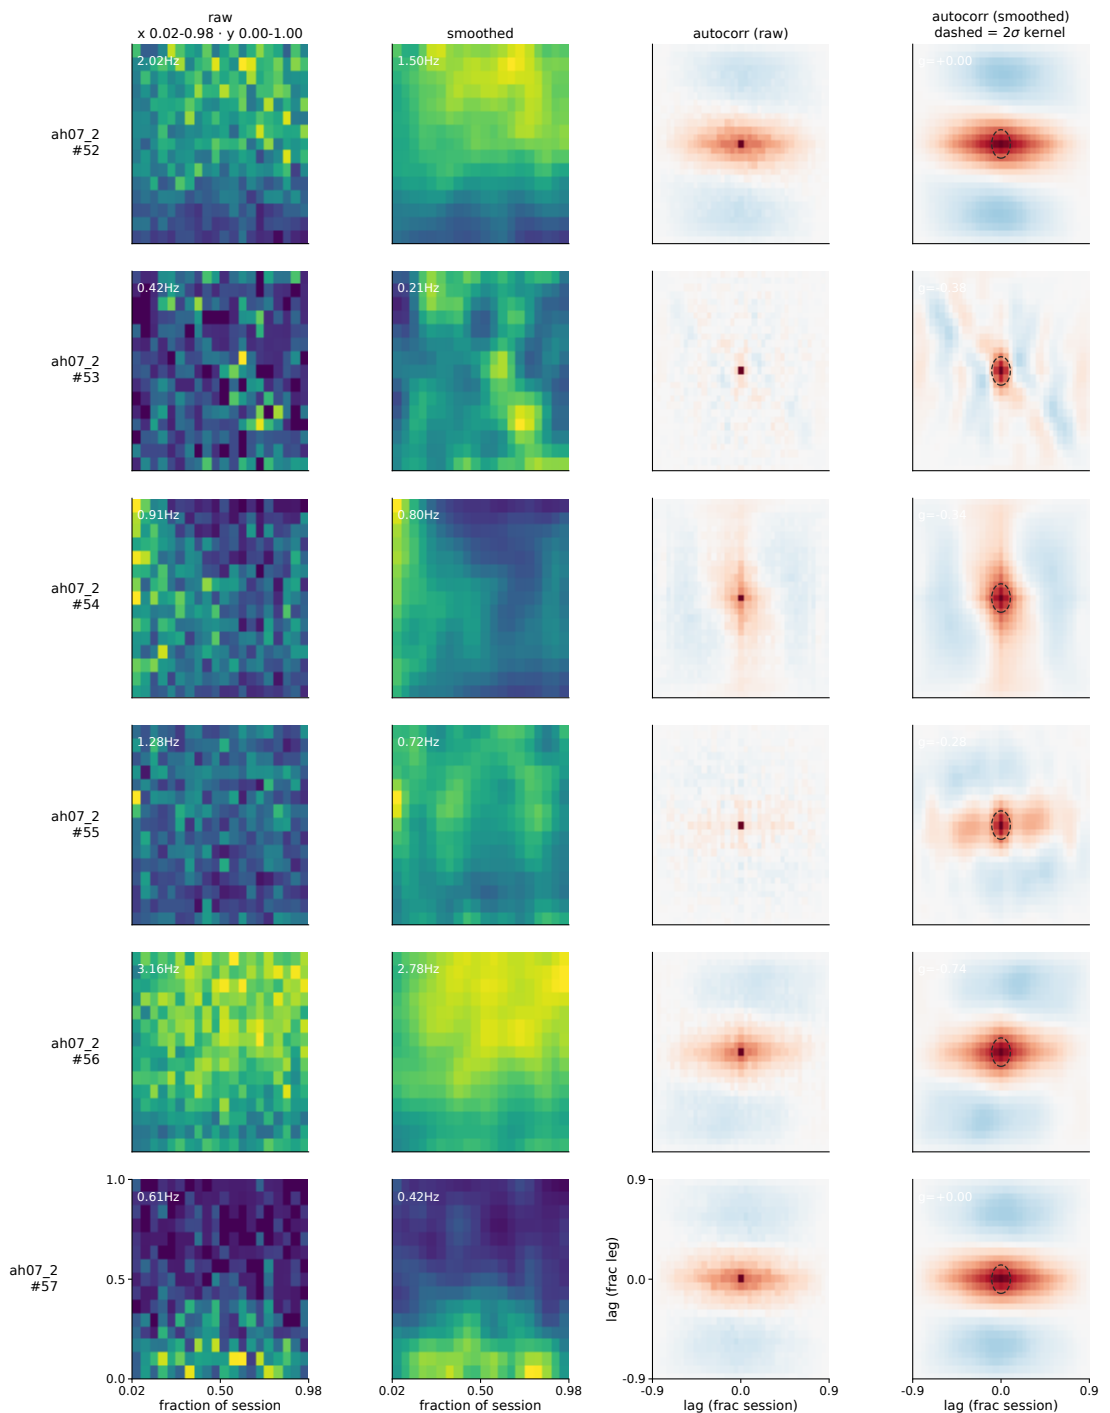


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 864-869 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

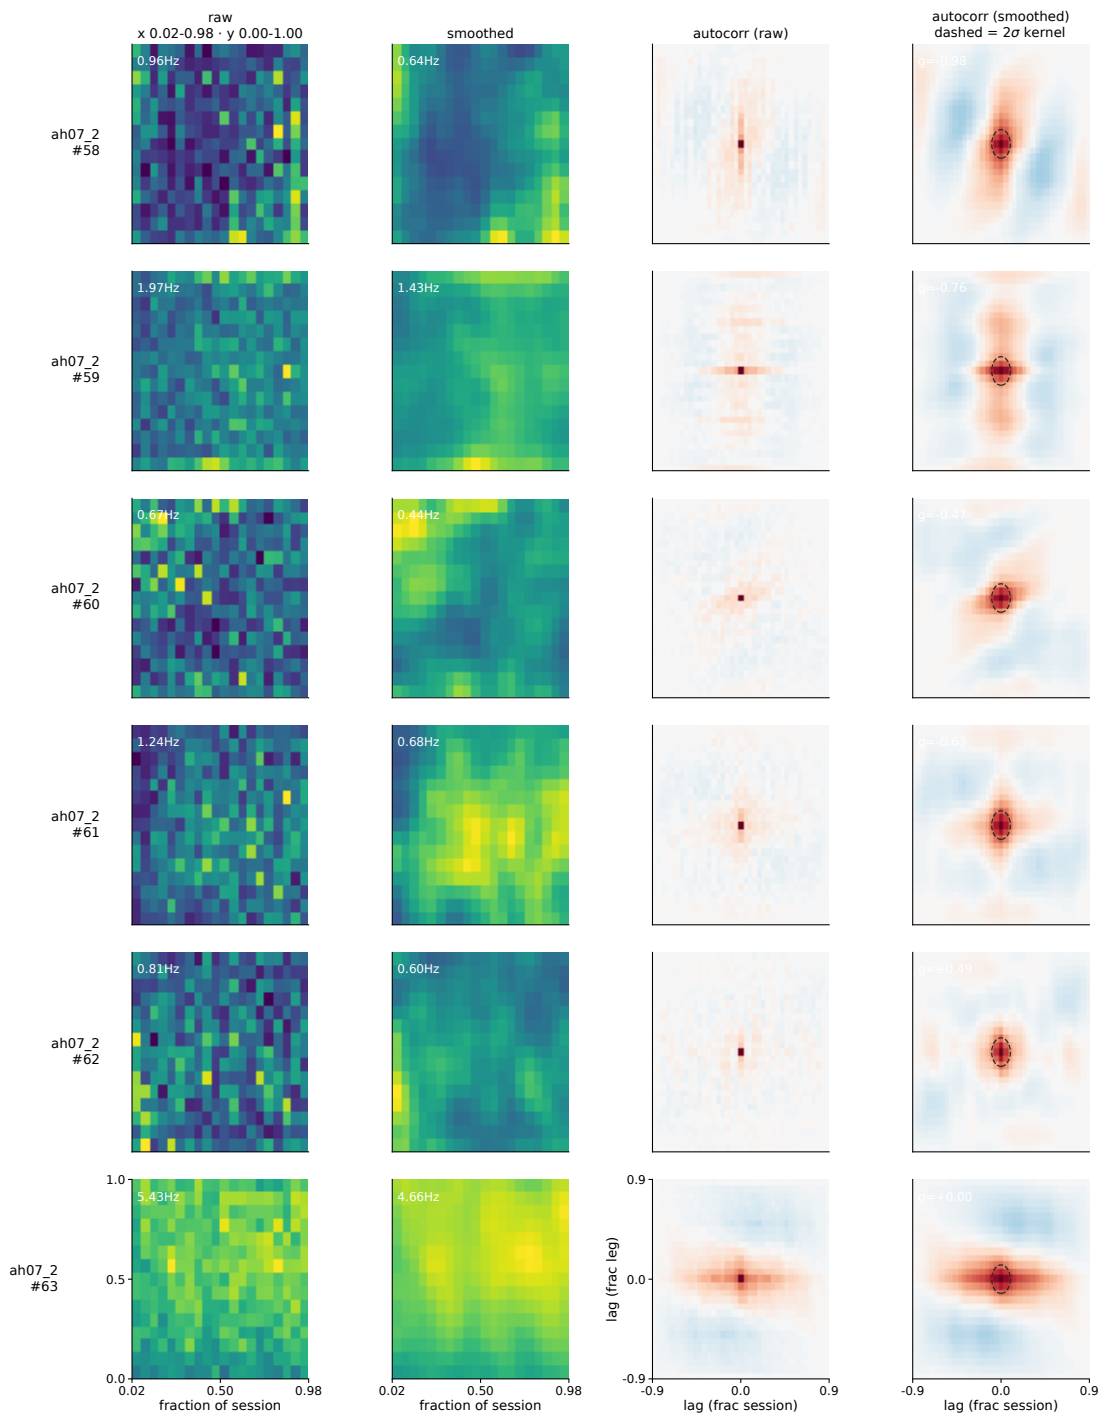


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 870-875 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

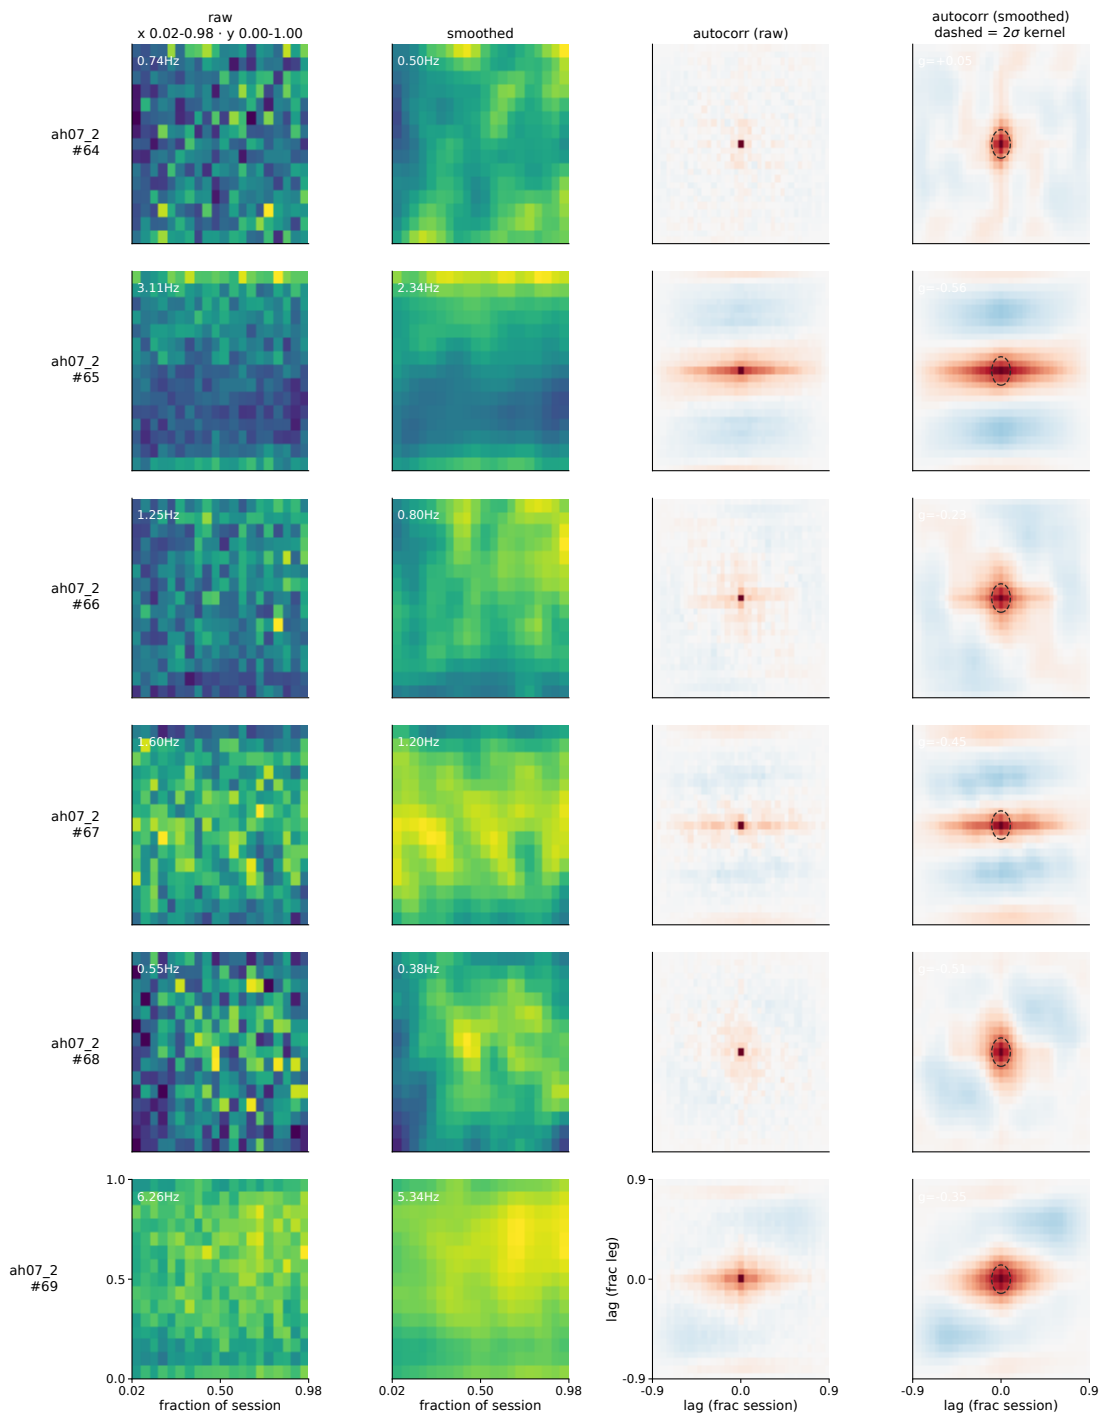


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 876-881 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

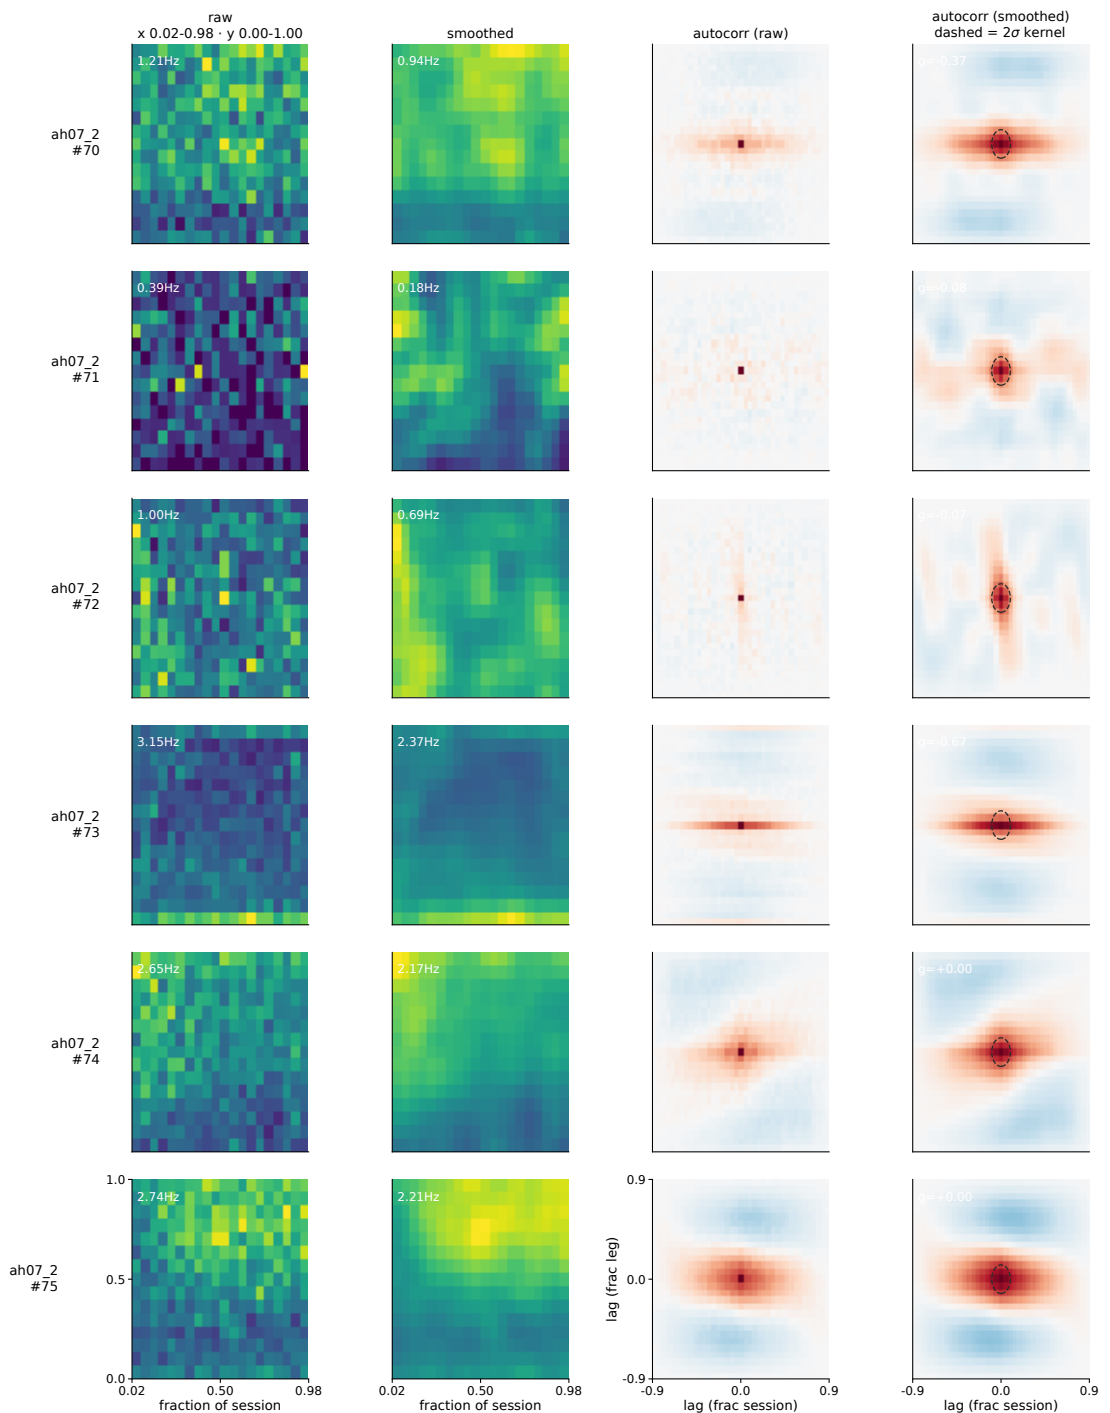


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 882-887 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

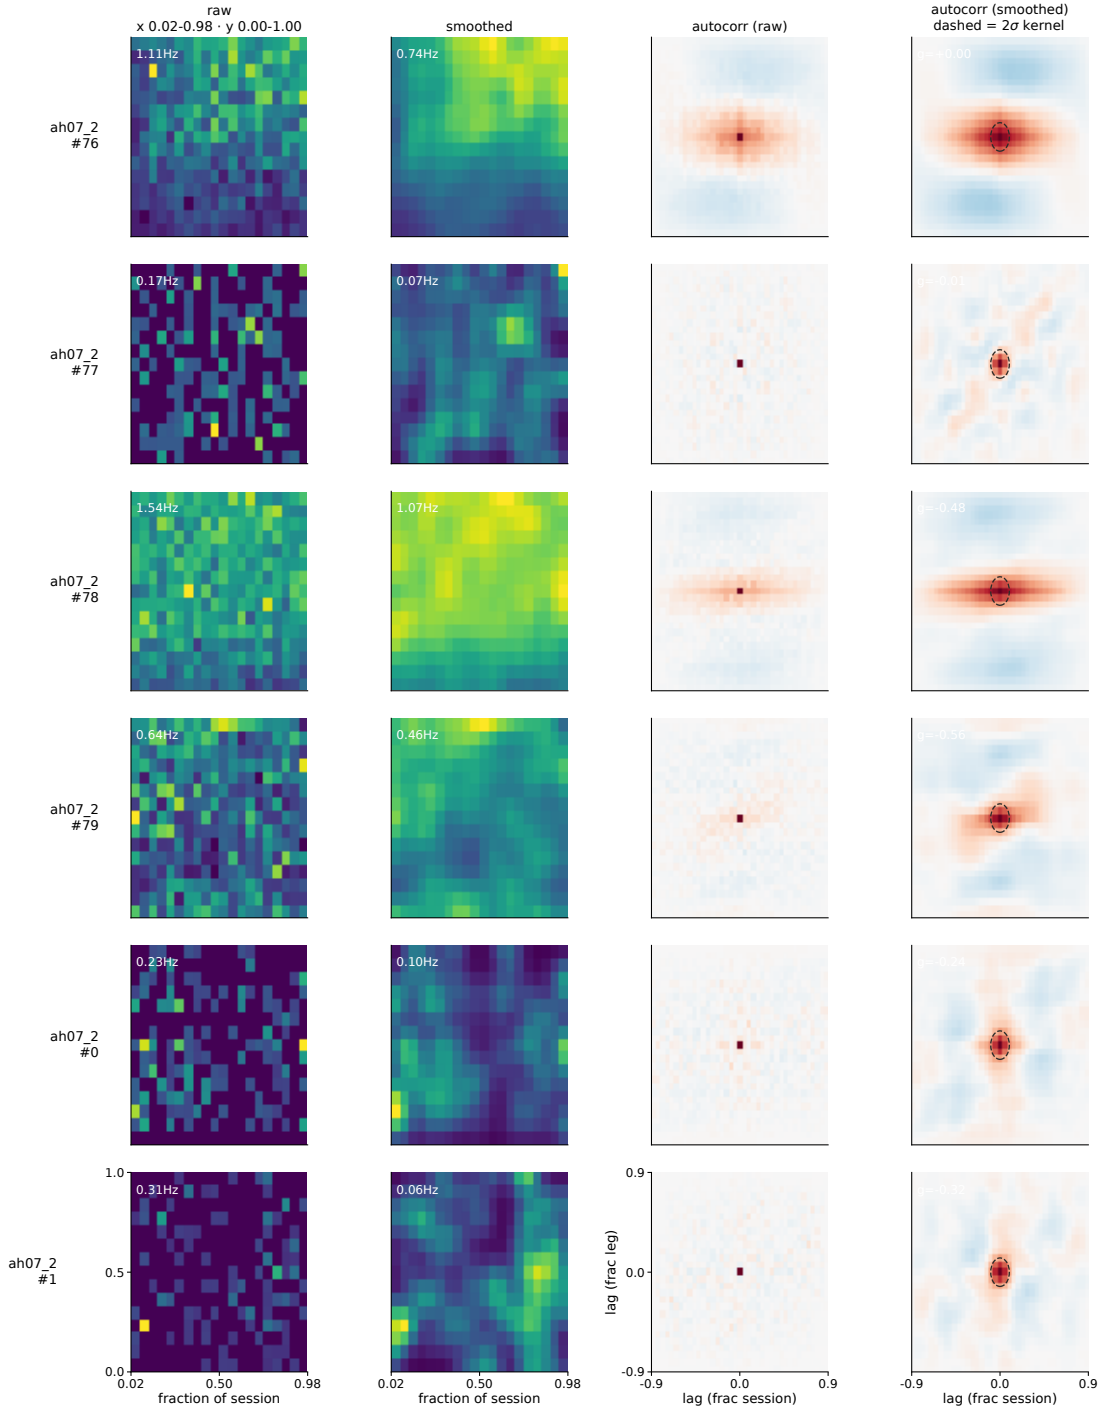


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 888-893 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

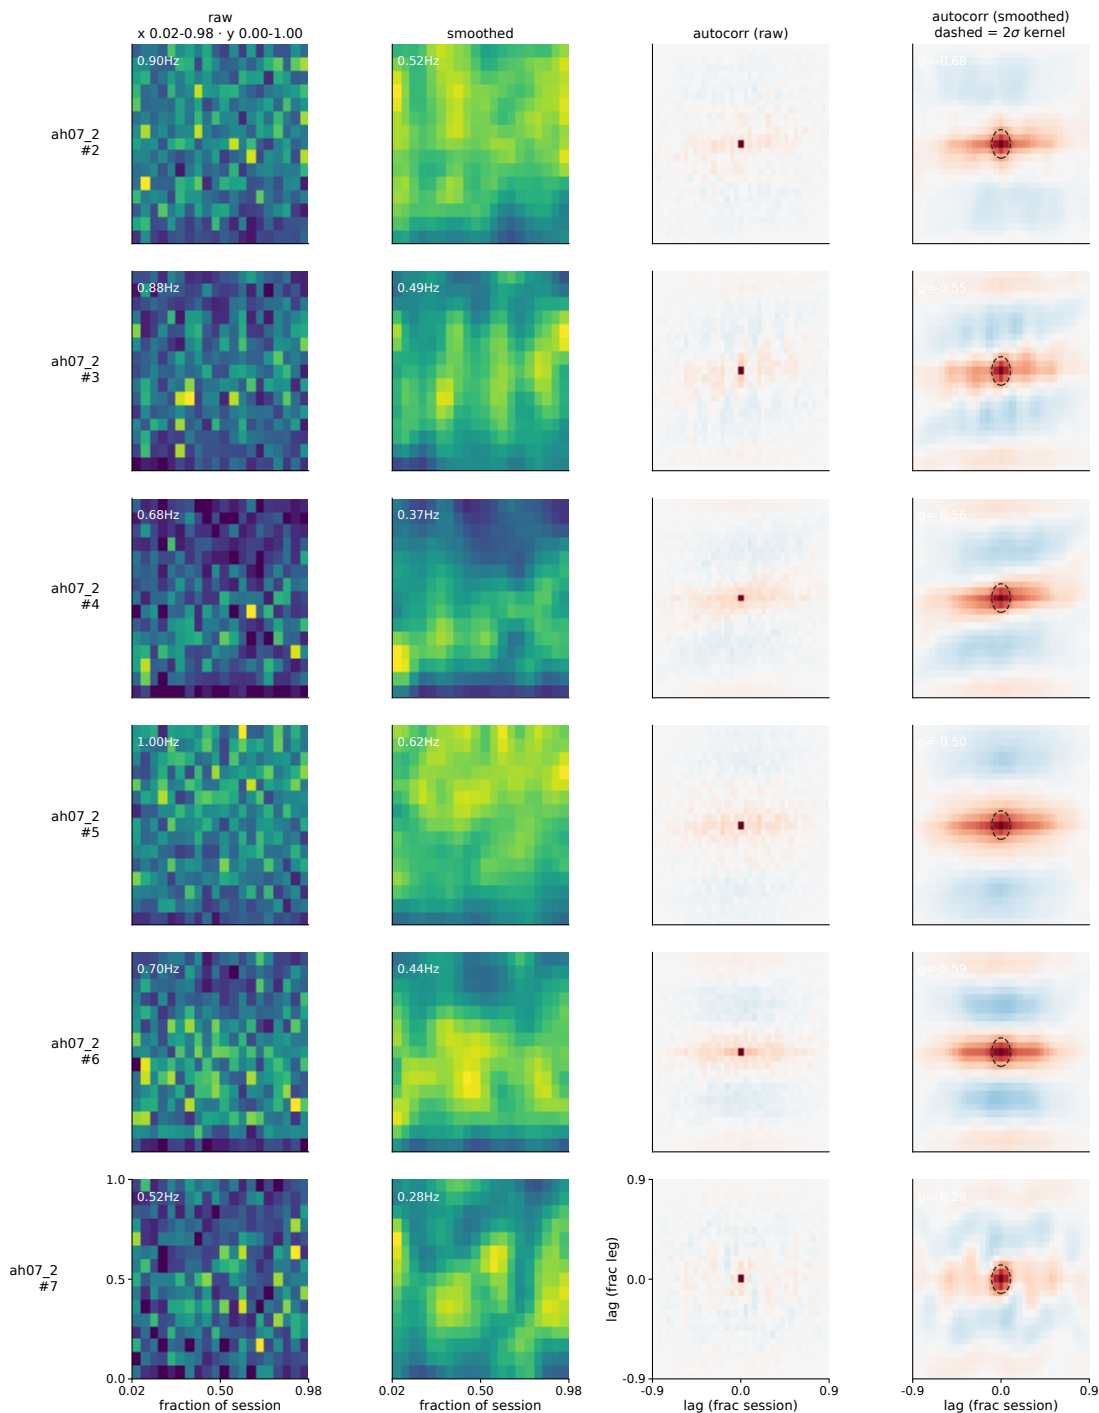


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 894-899 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

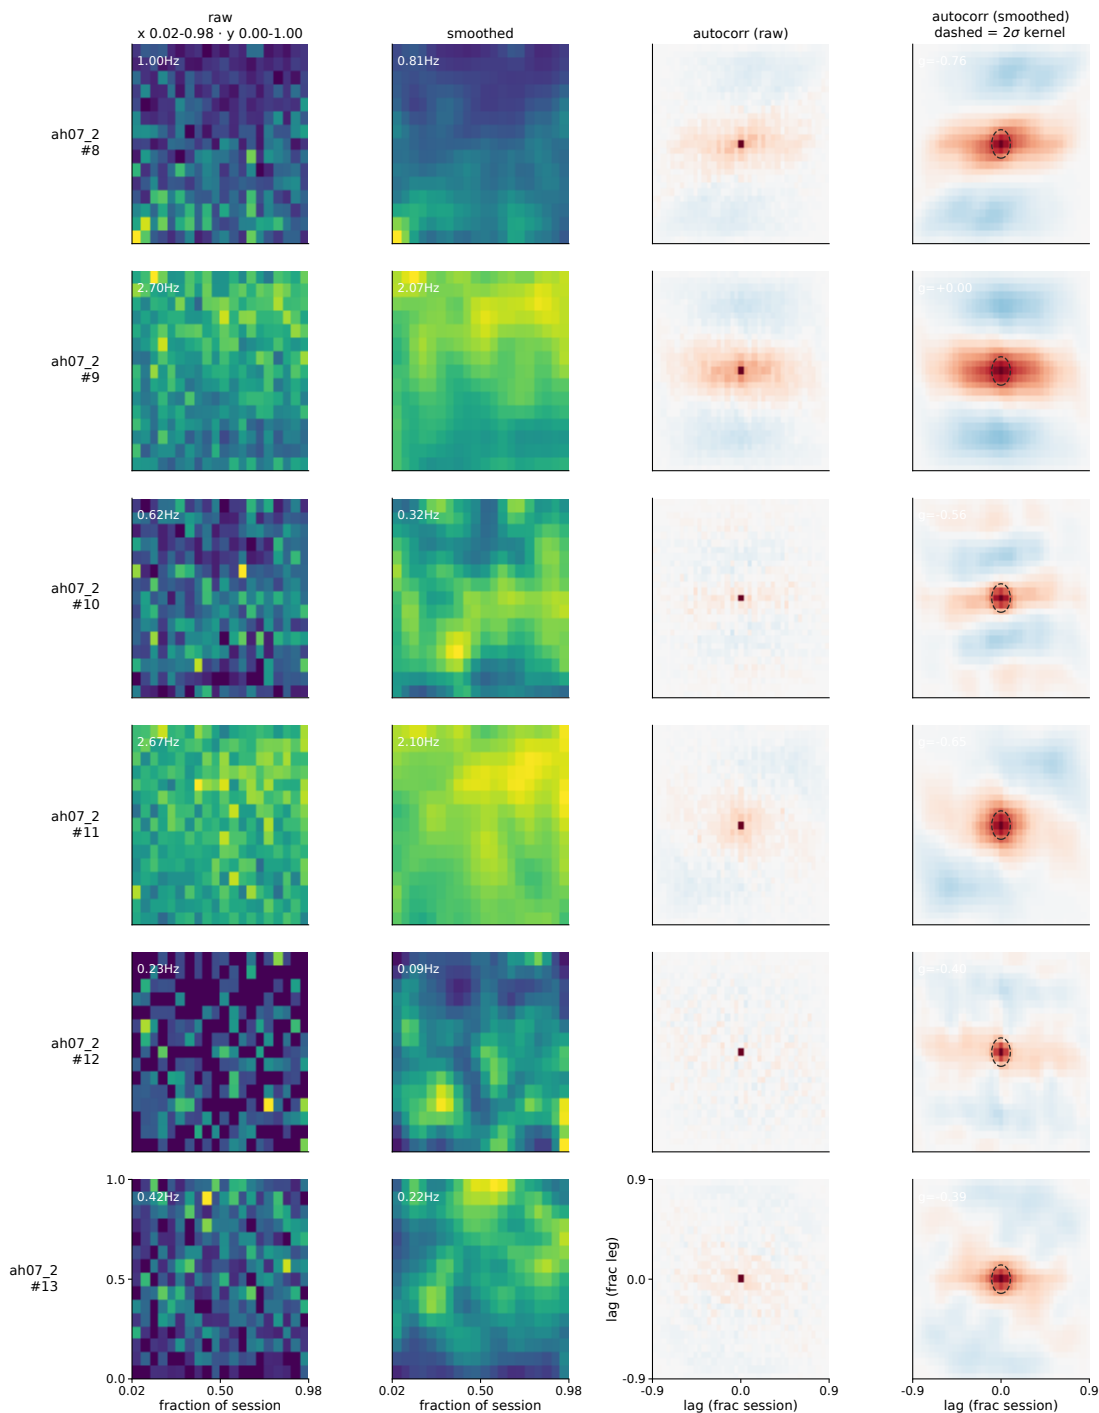


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 900-905 of 1252 raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

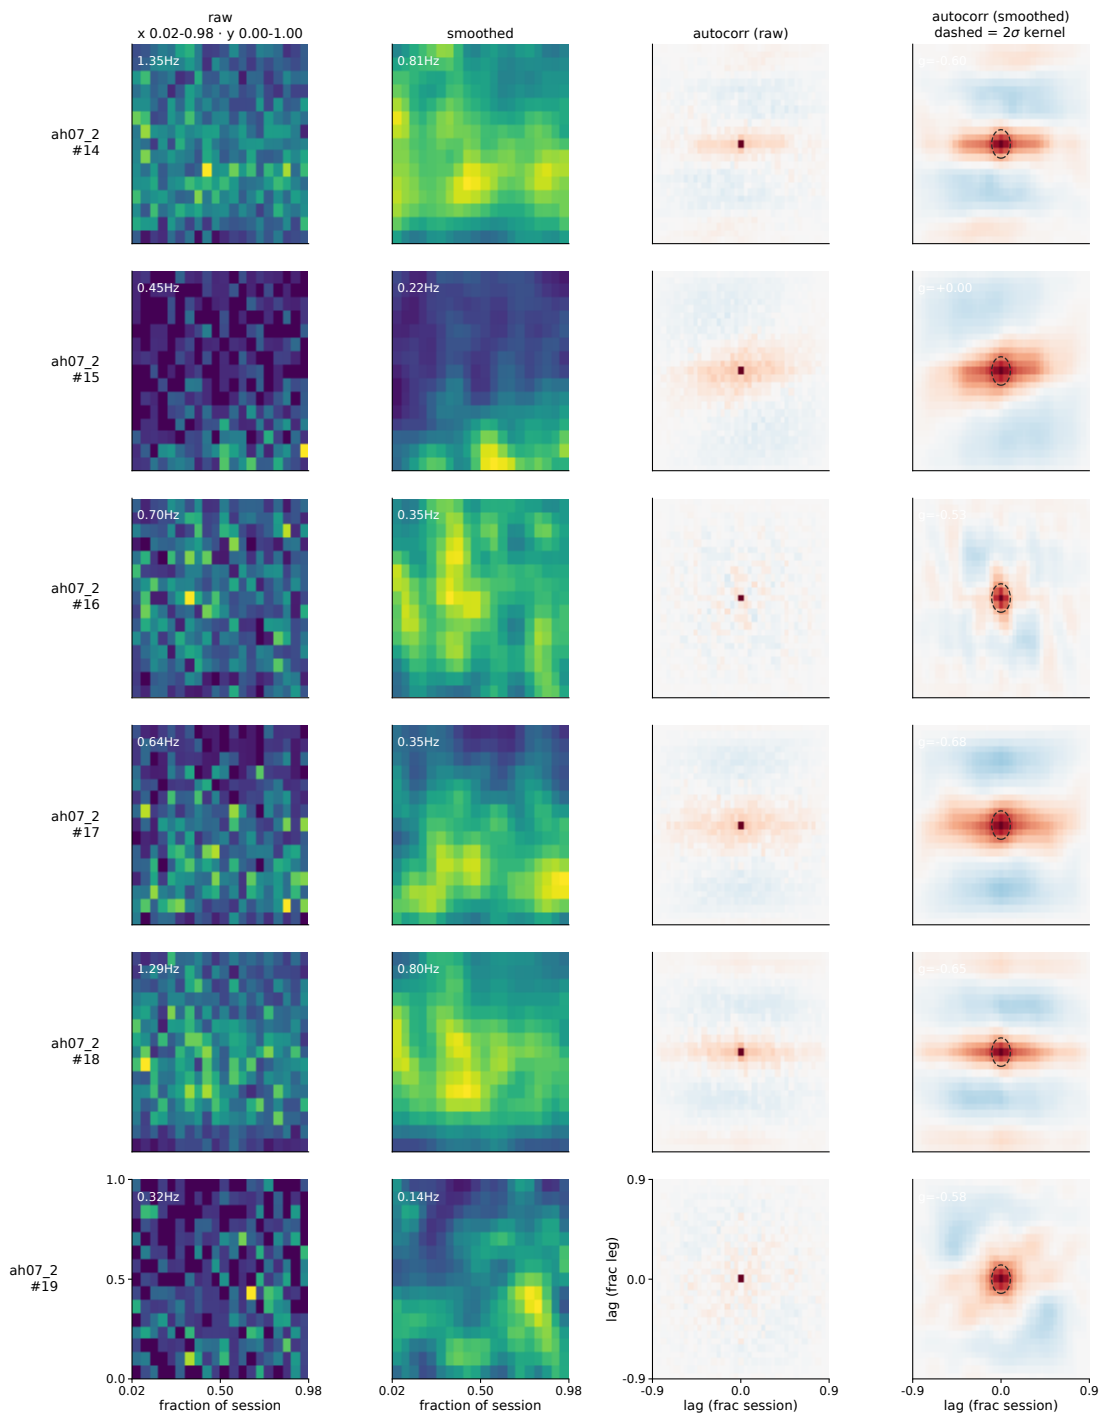


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 906-911 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

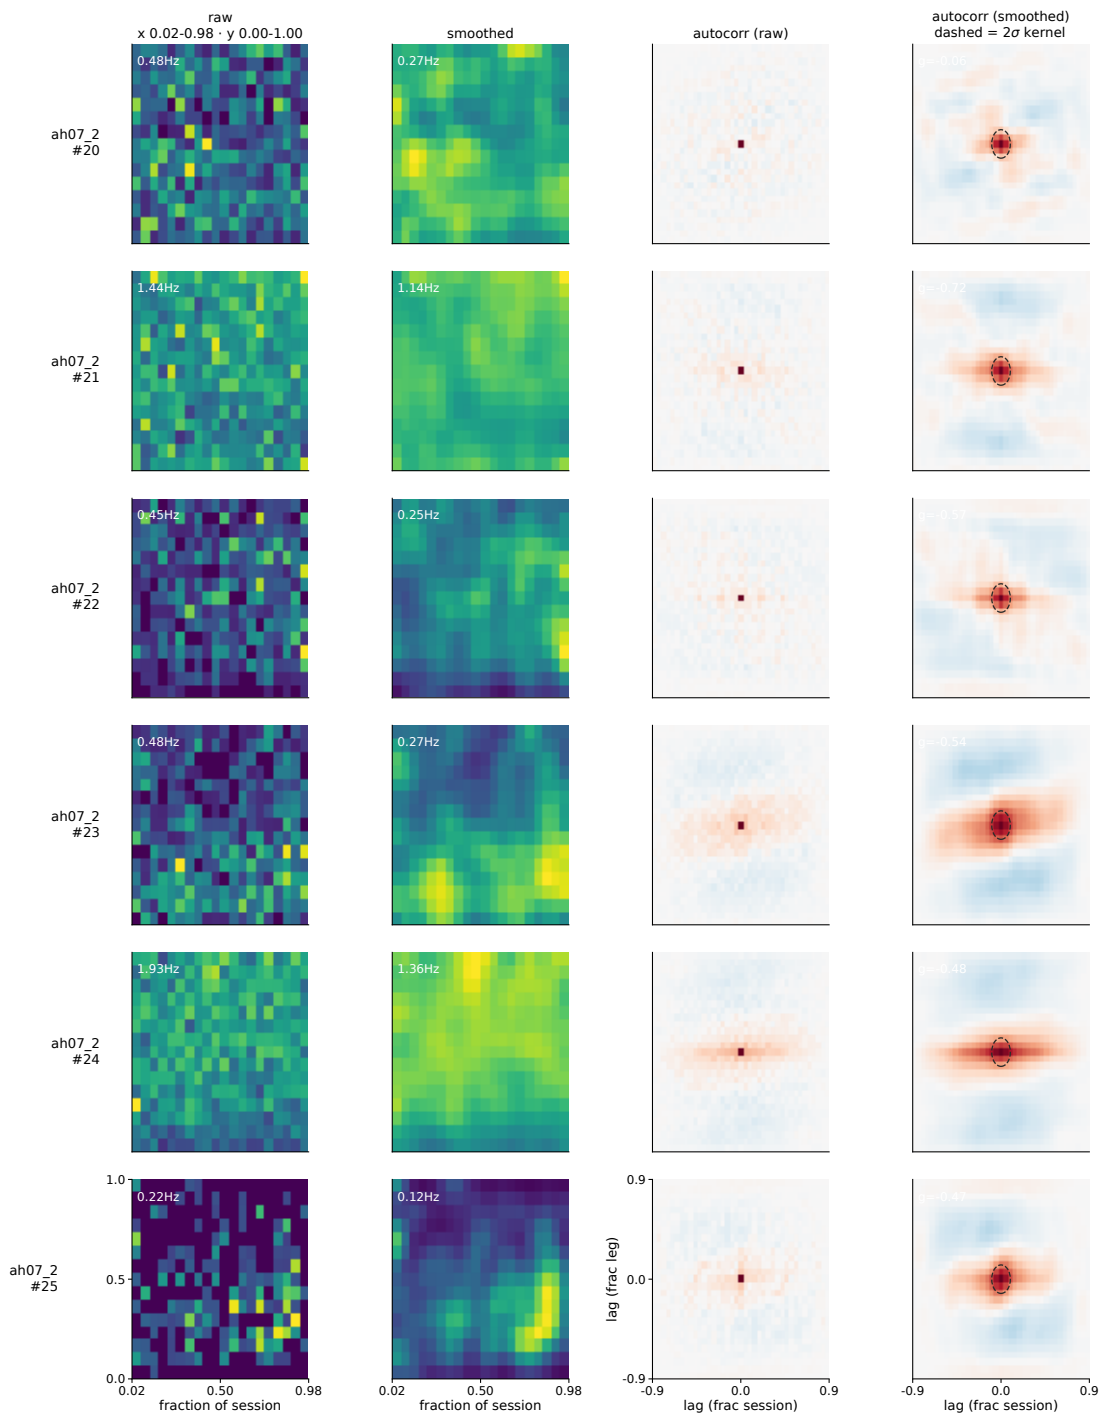


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 912-917 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

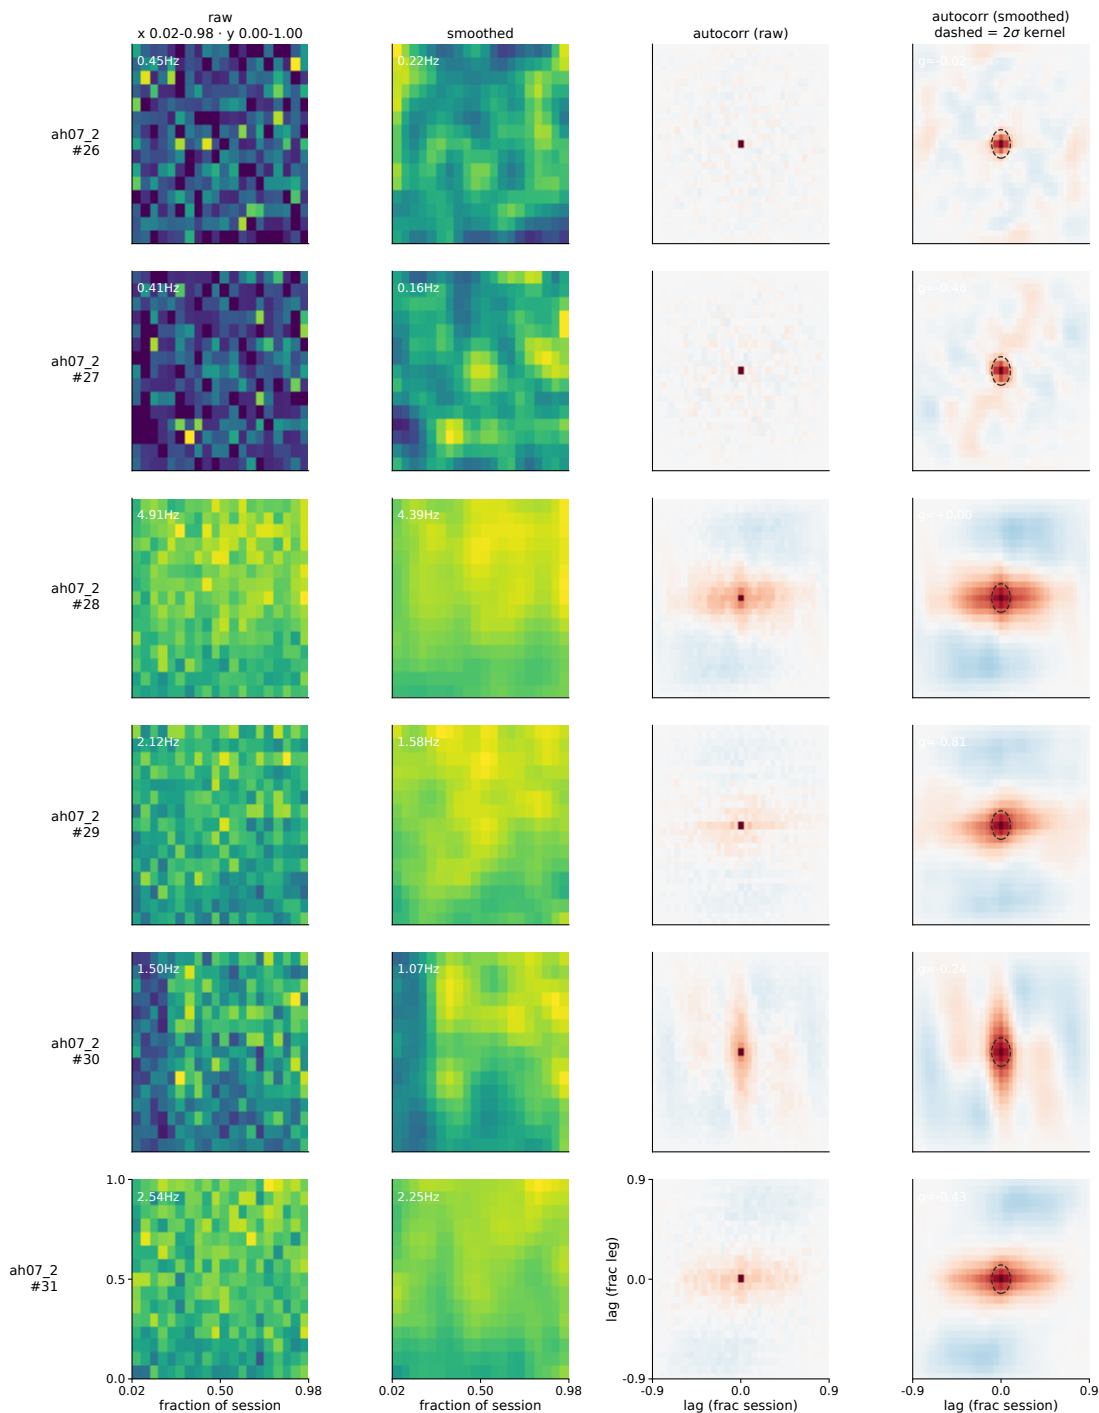


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 918-923 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

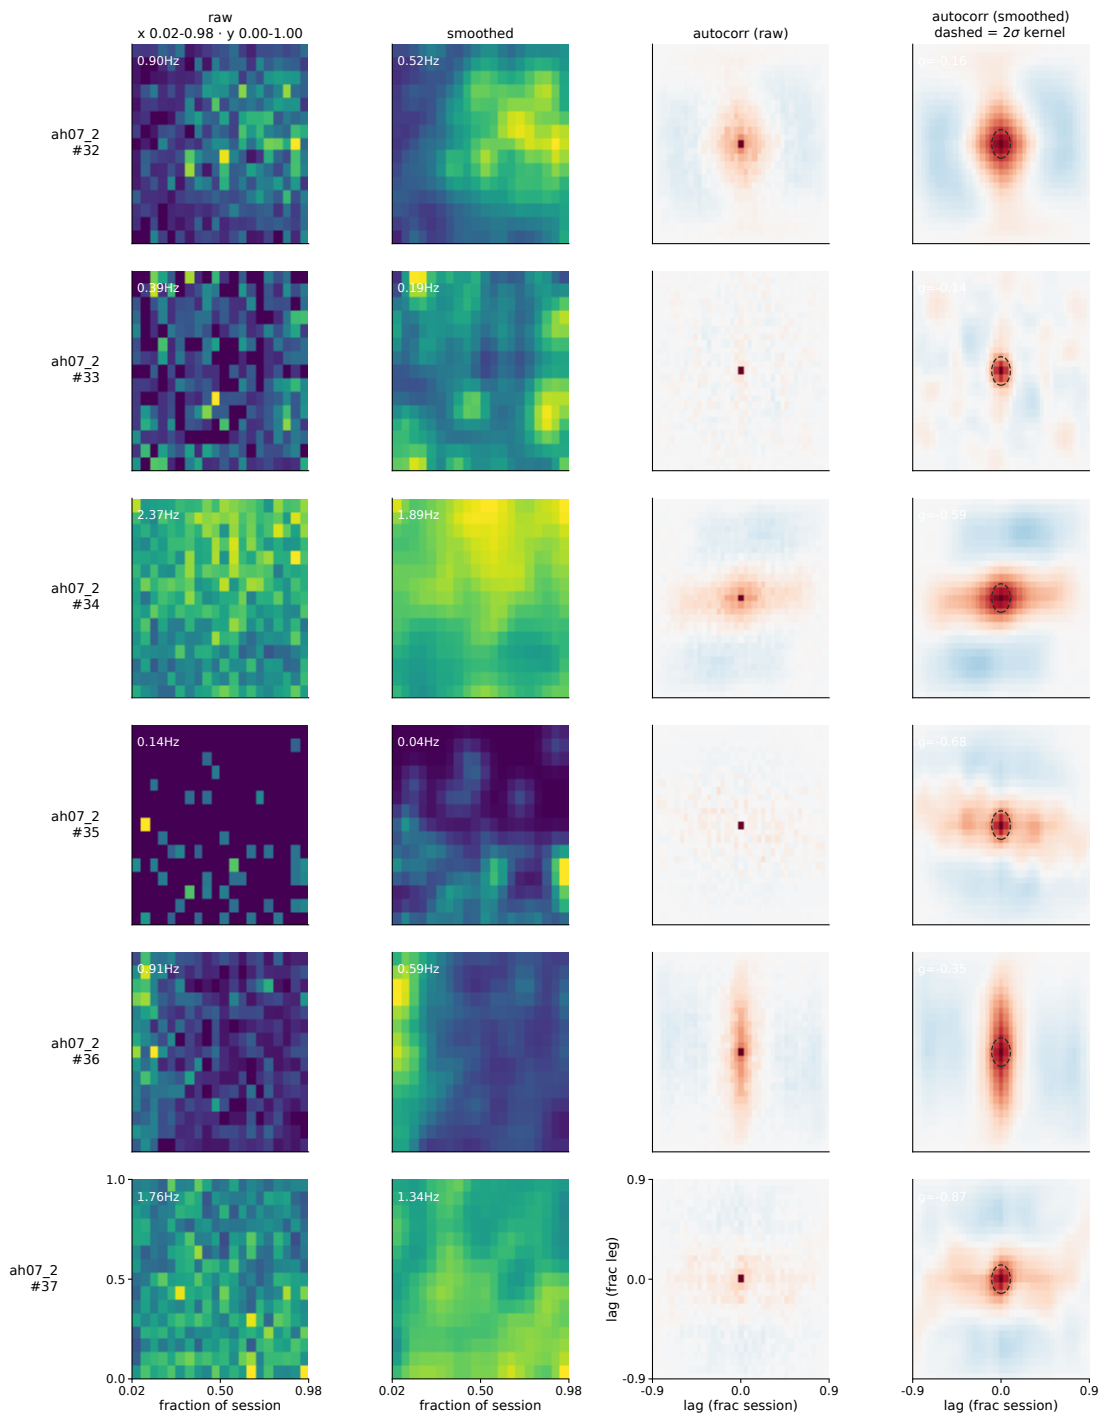


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 924-929 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

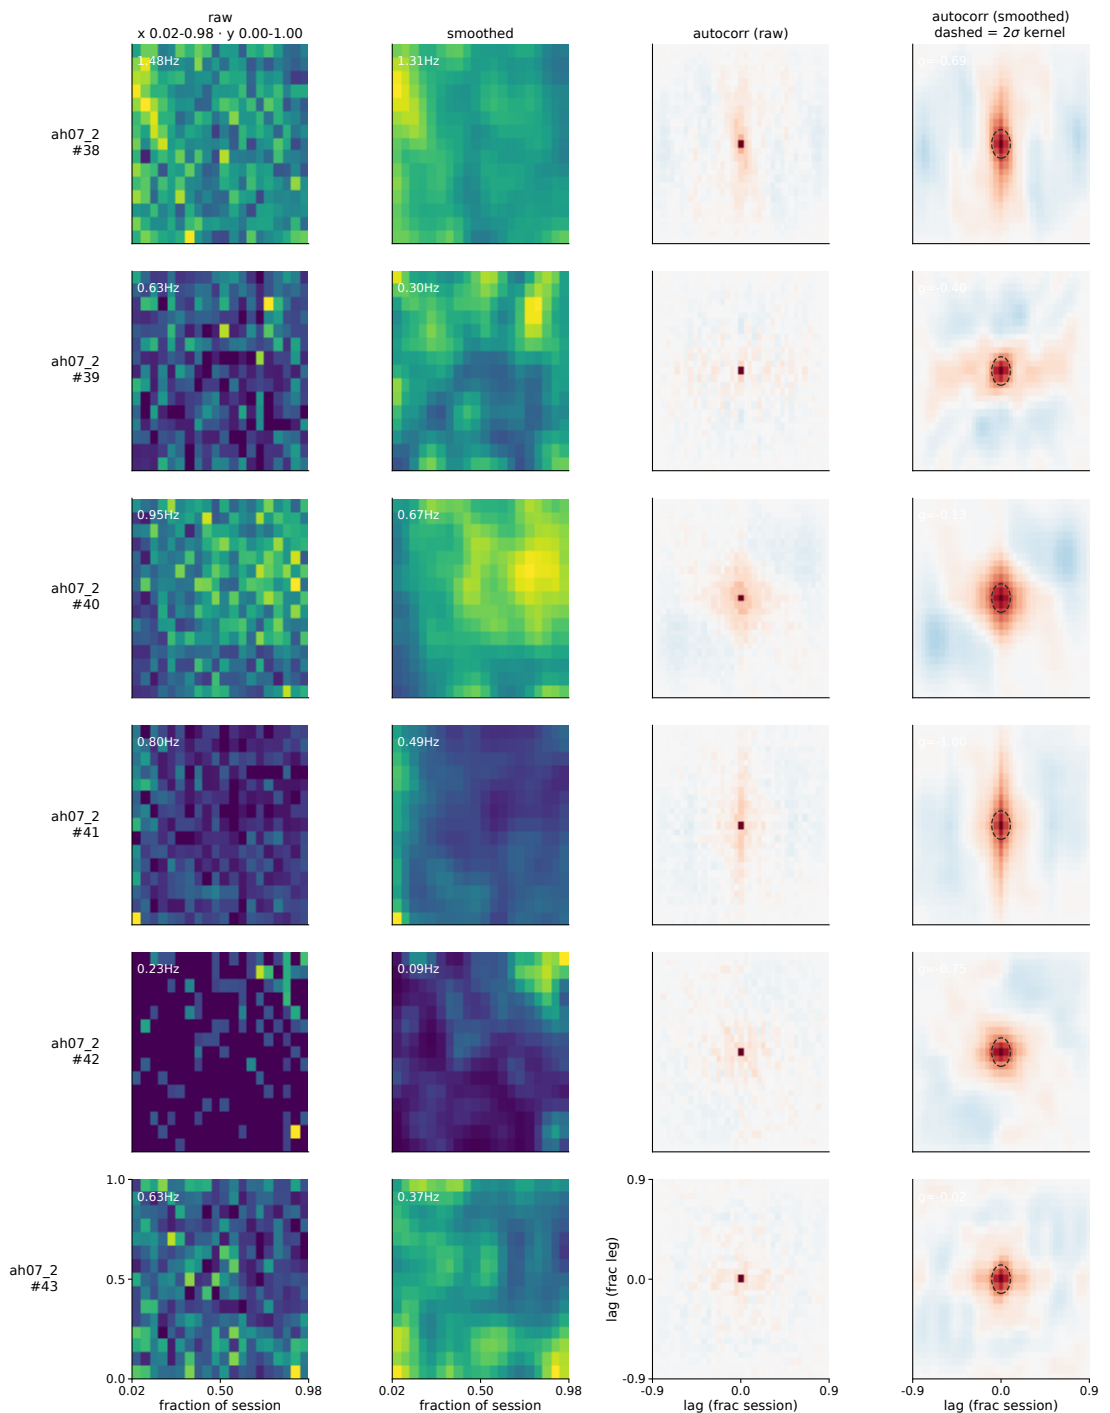


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 936-941 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

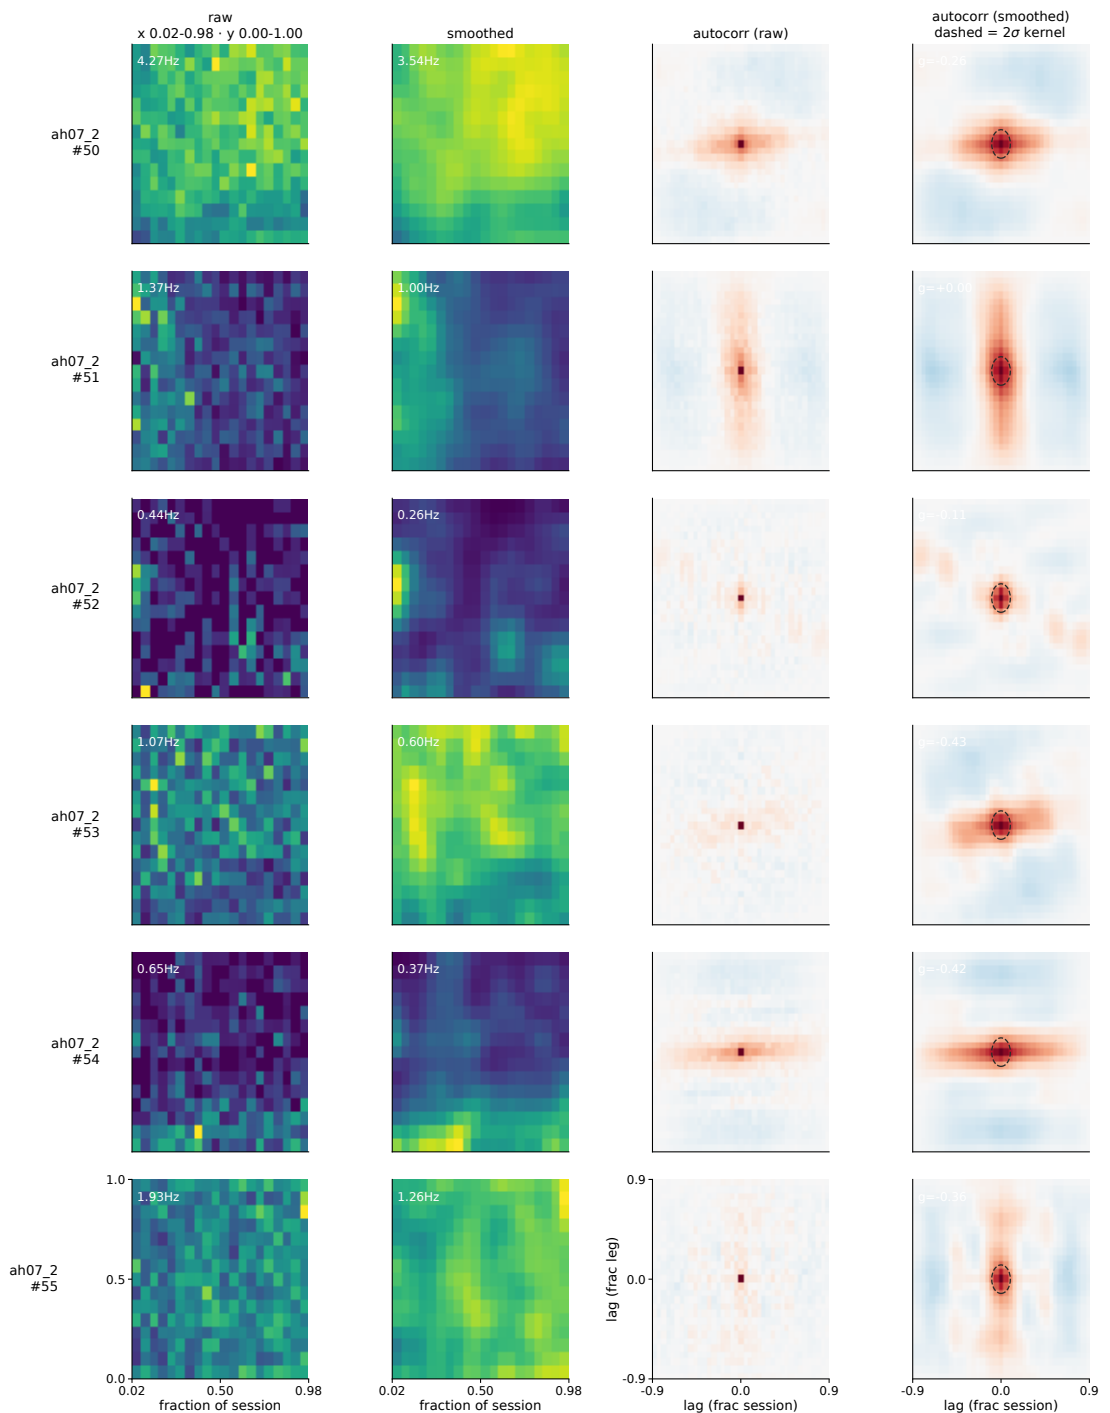


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 942-947 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

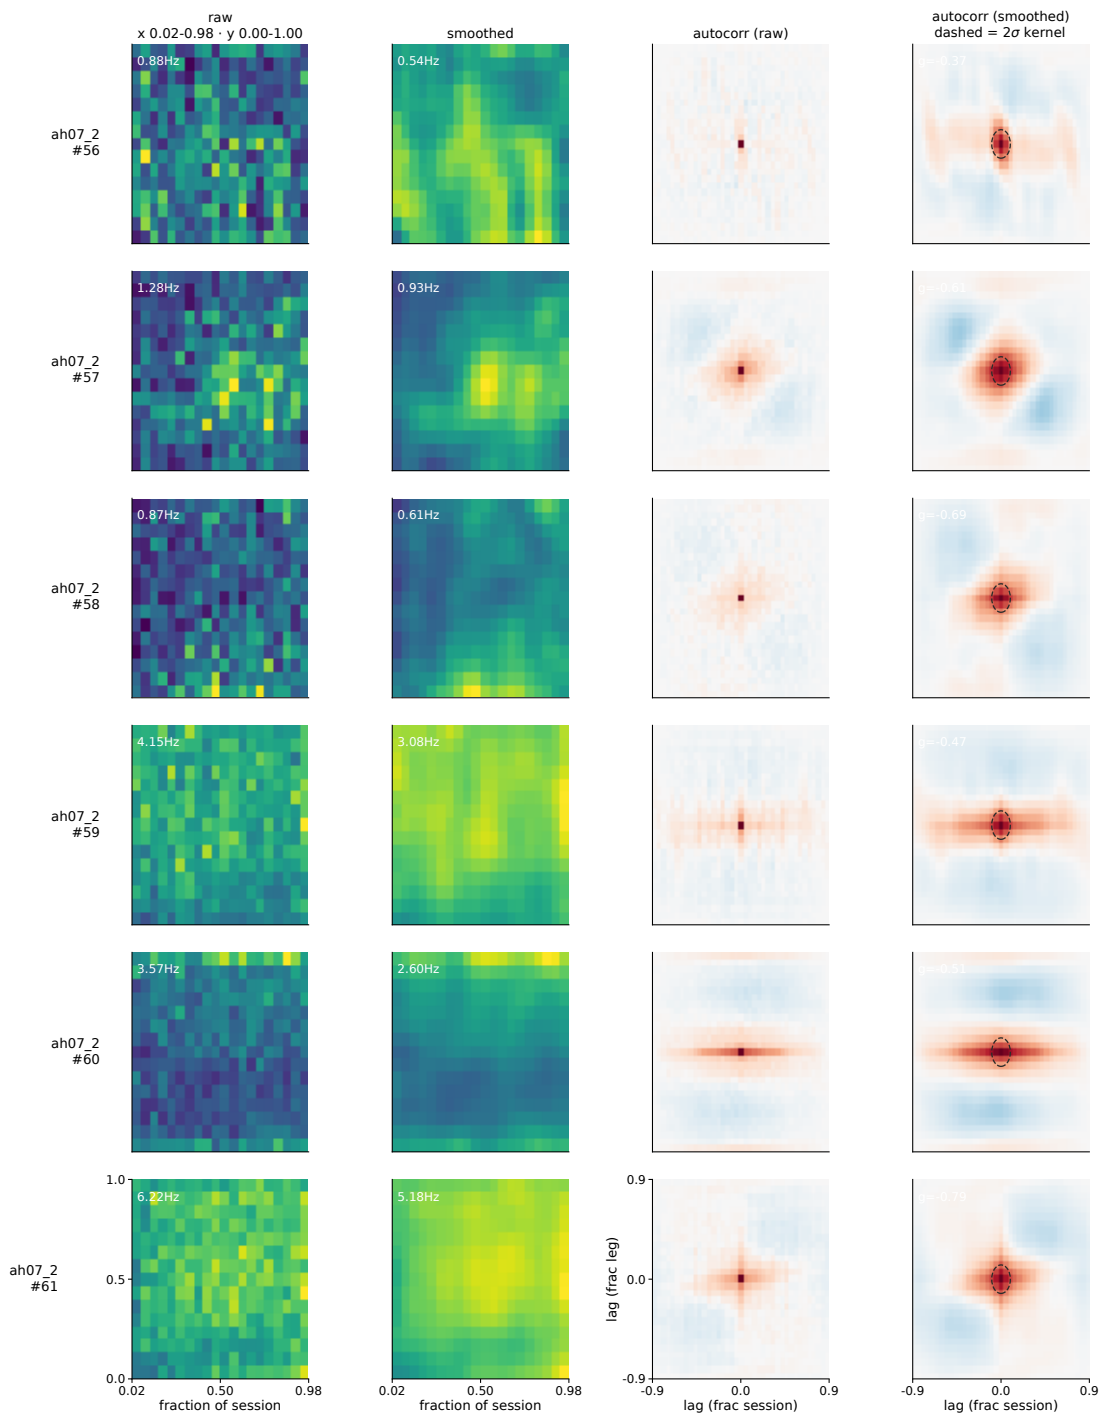


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 948-953 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

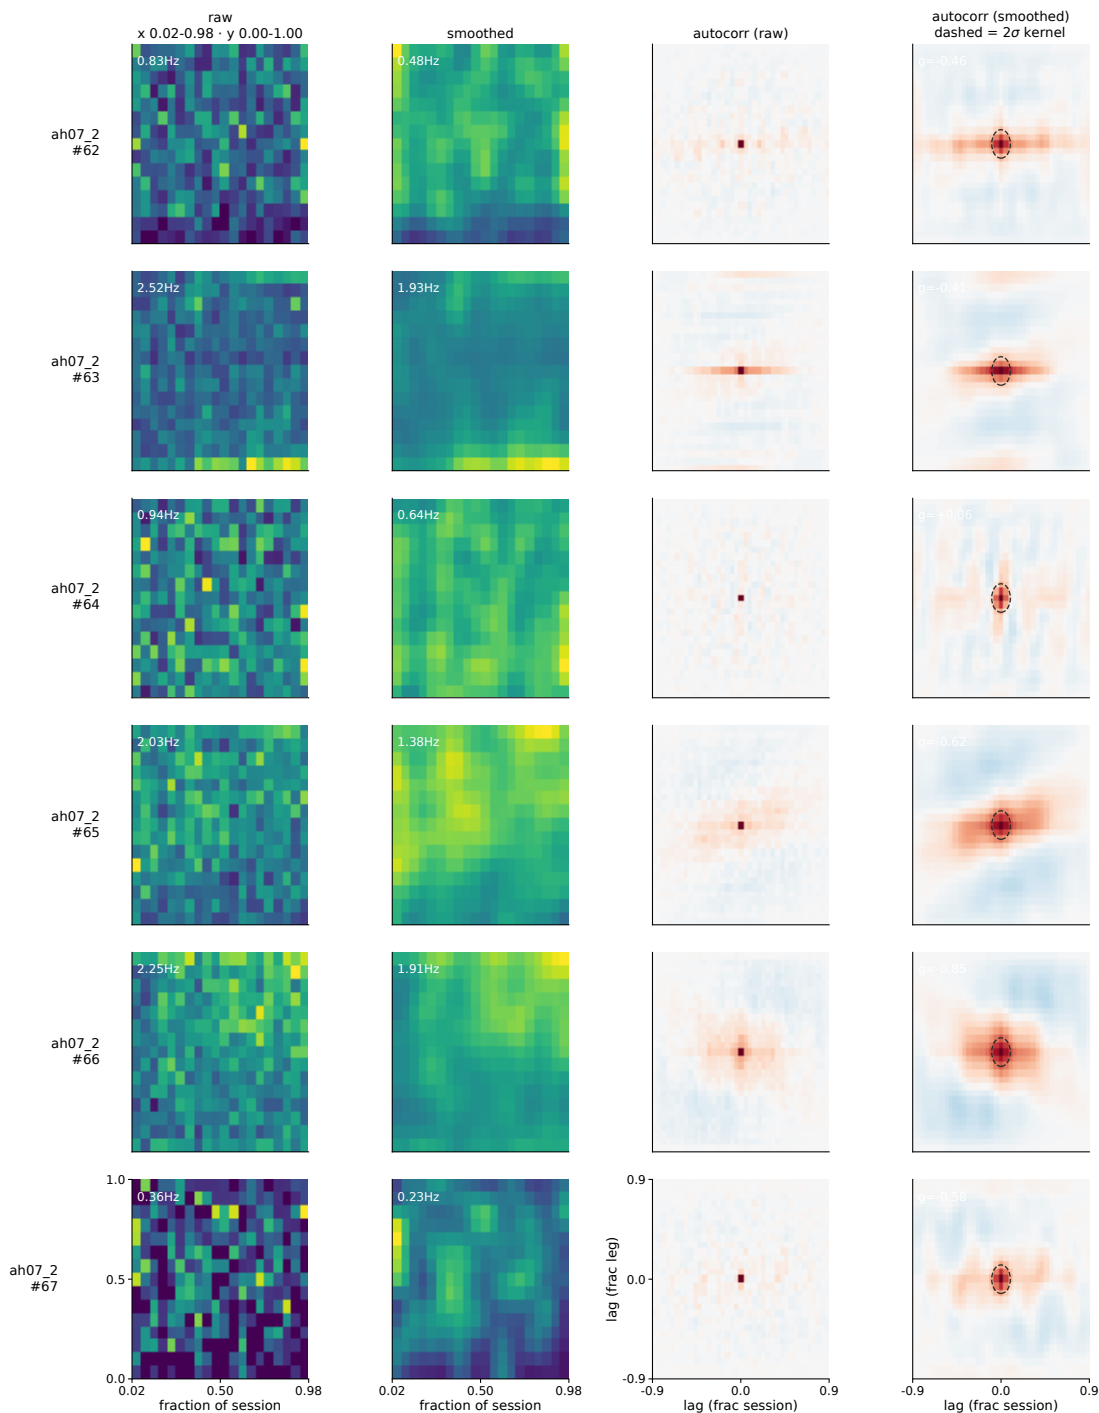


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 954-959 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

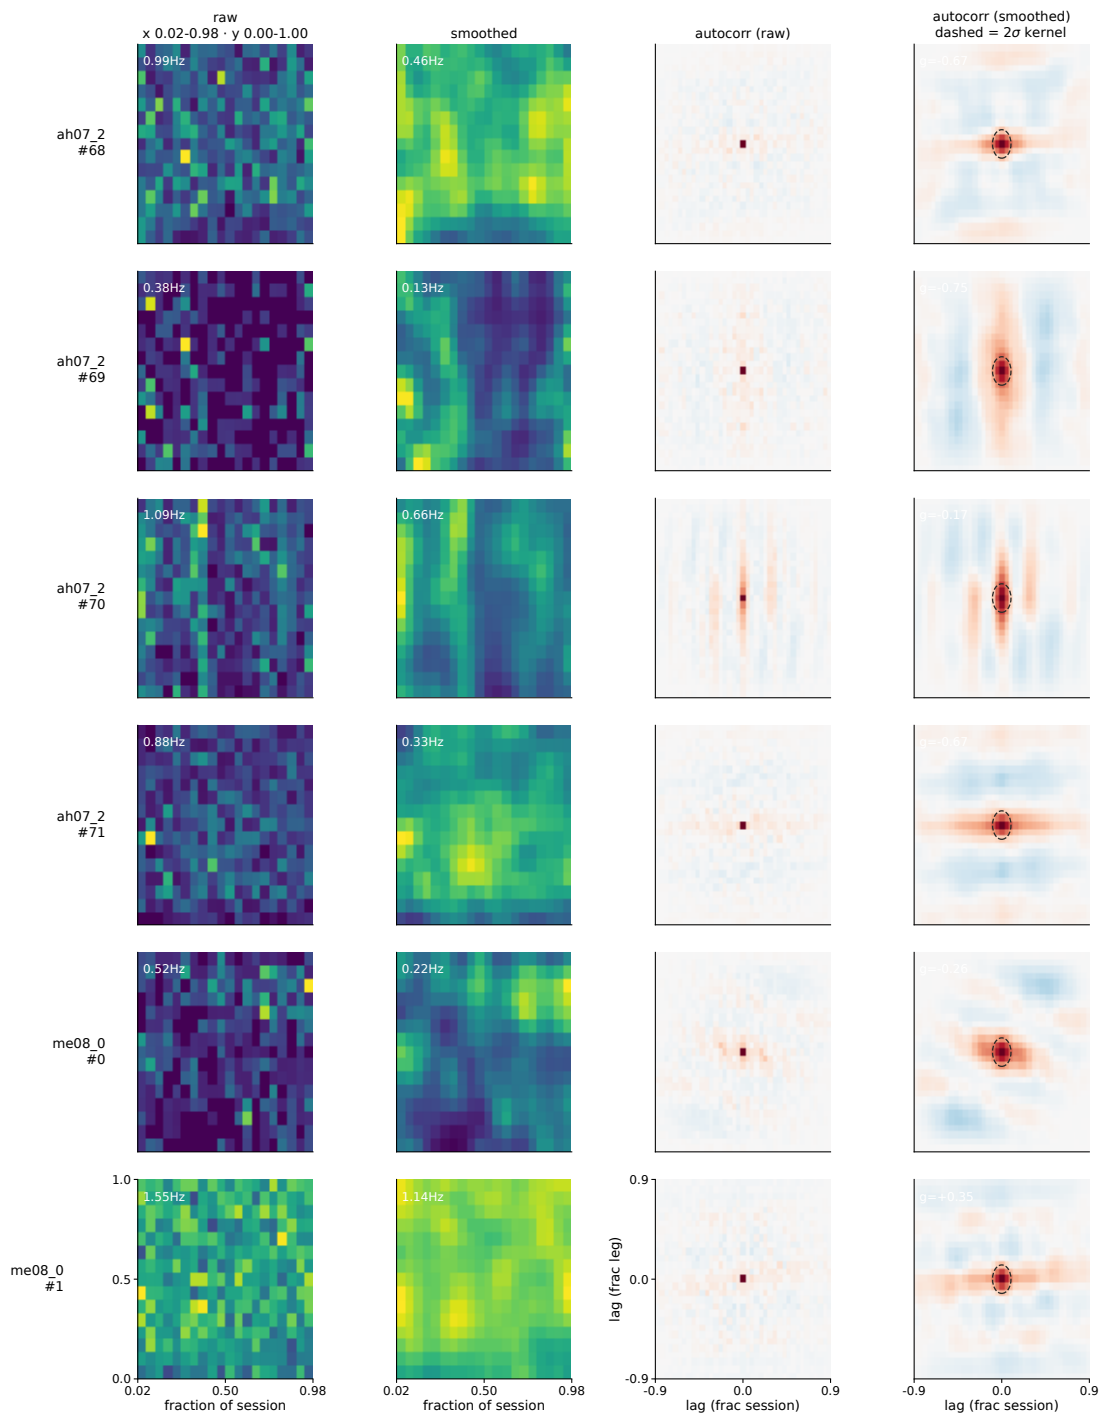


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 960-965 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

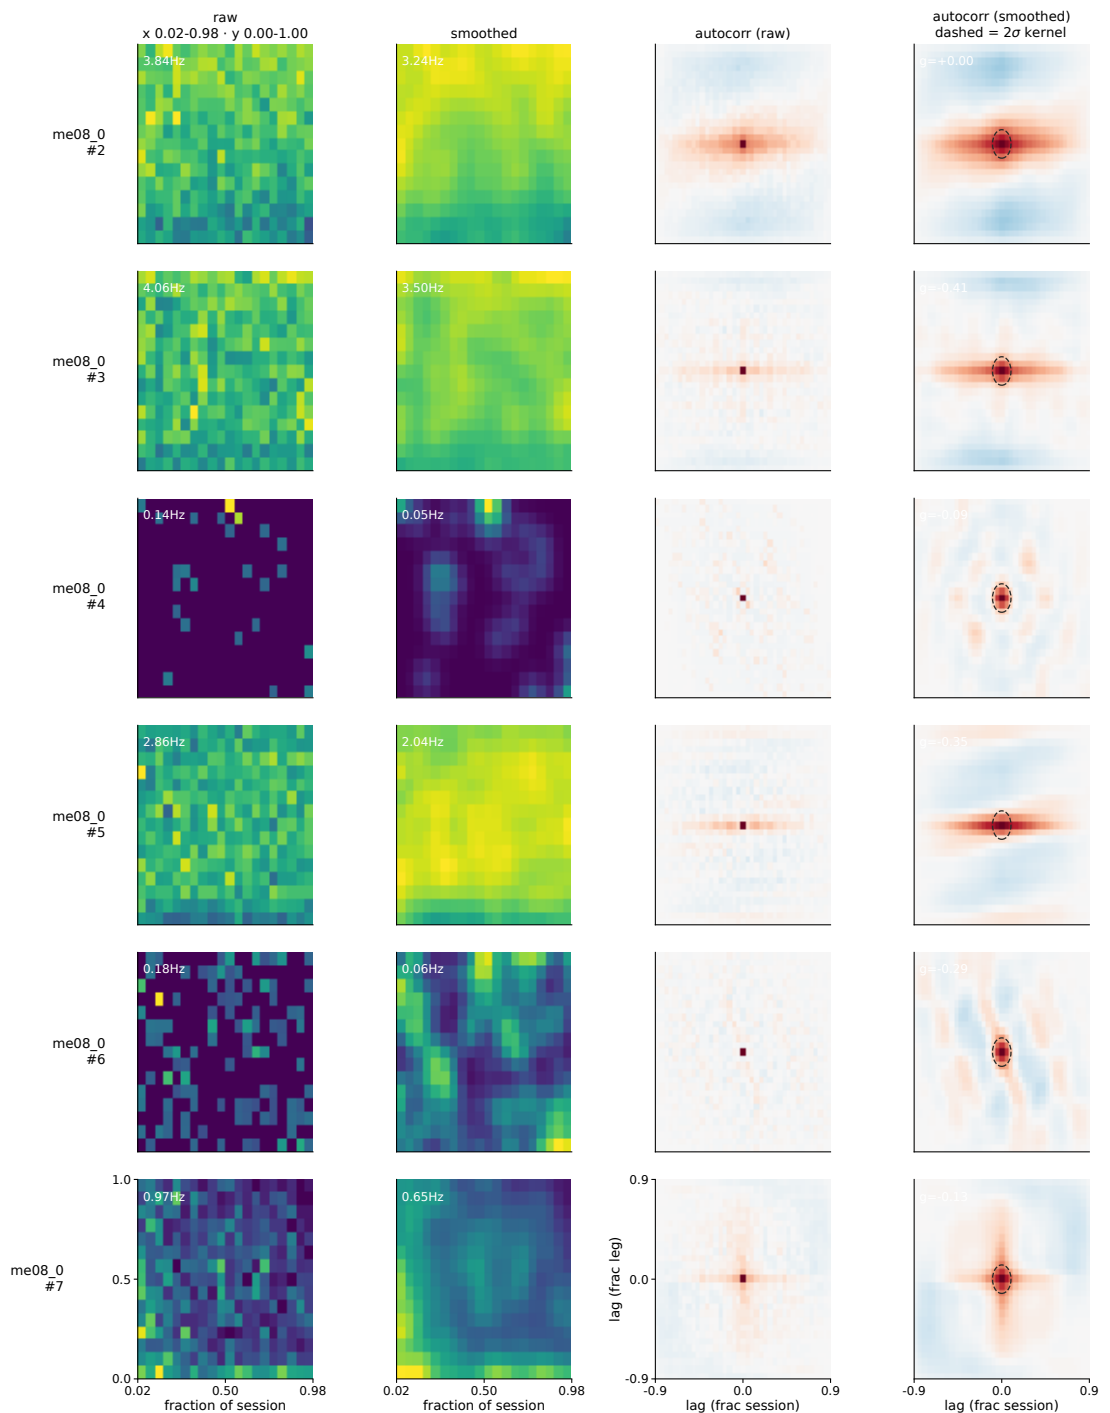


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 966-971 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

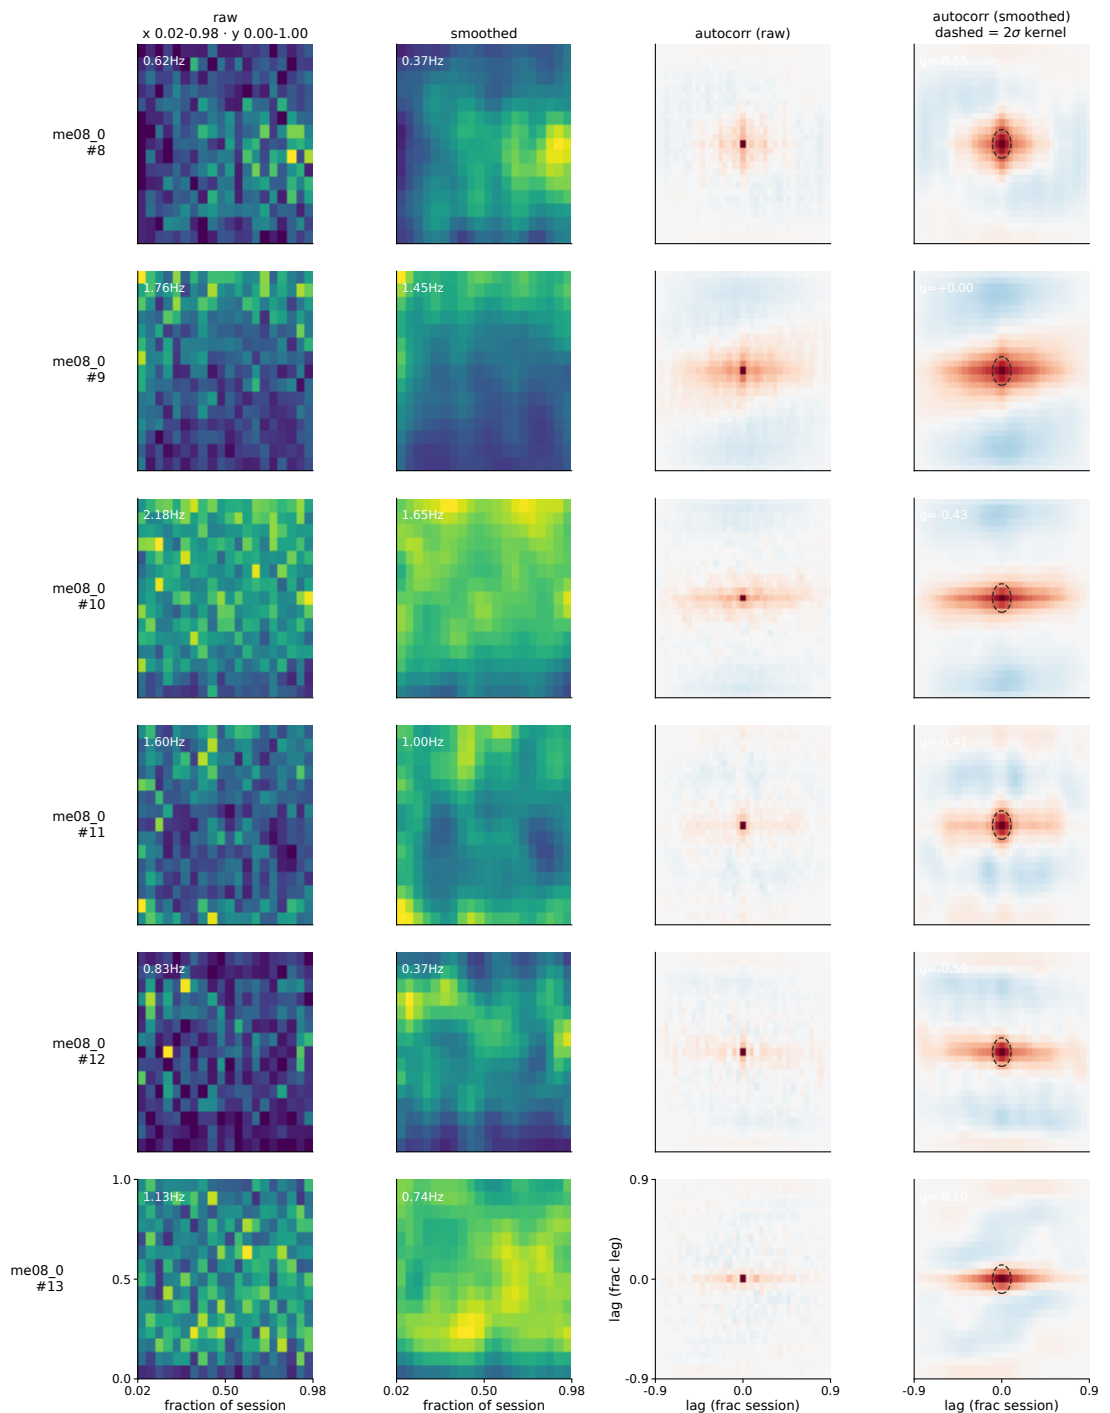


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 972-977 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

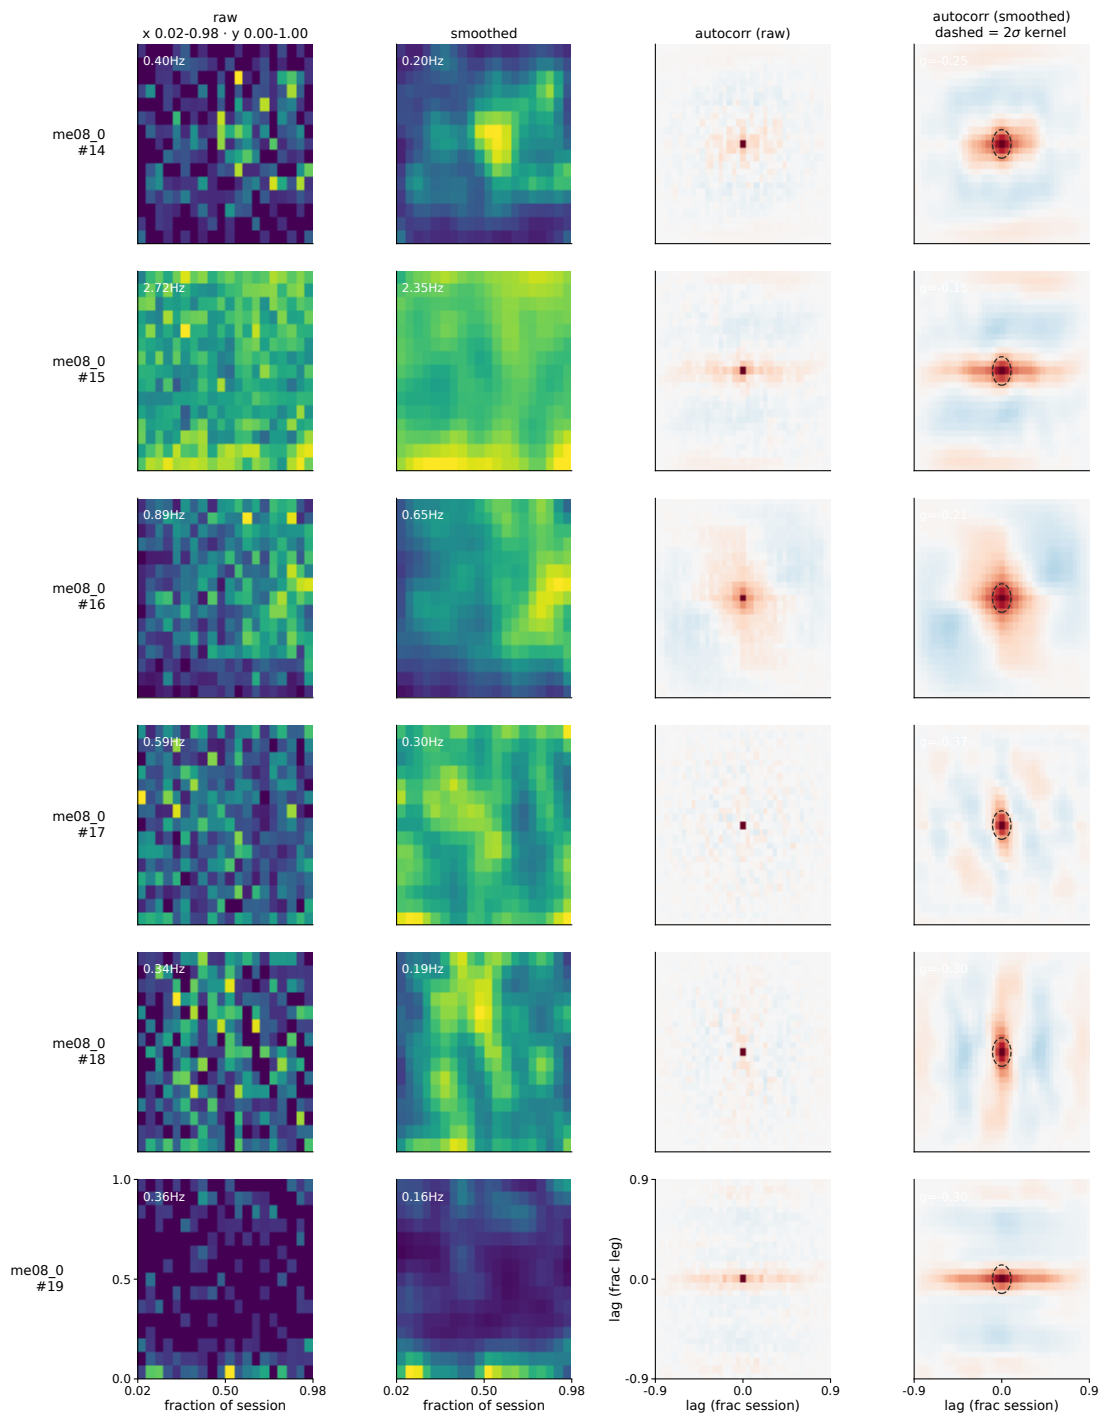


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 978-983 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

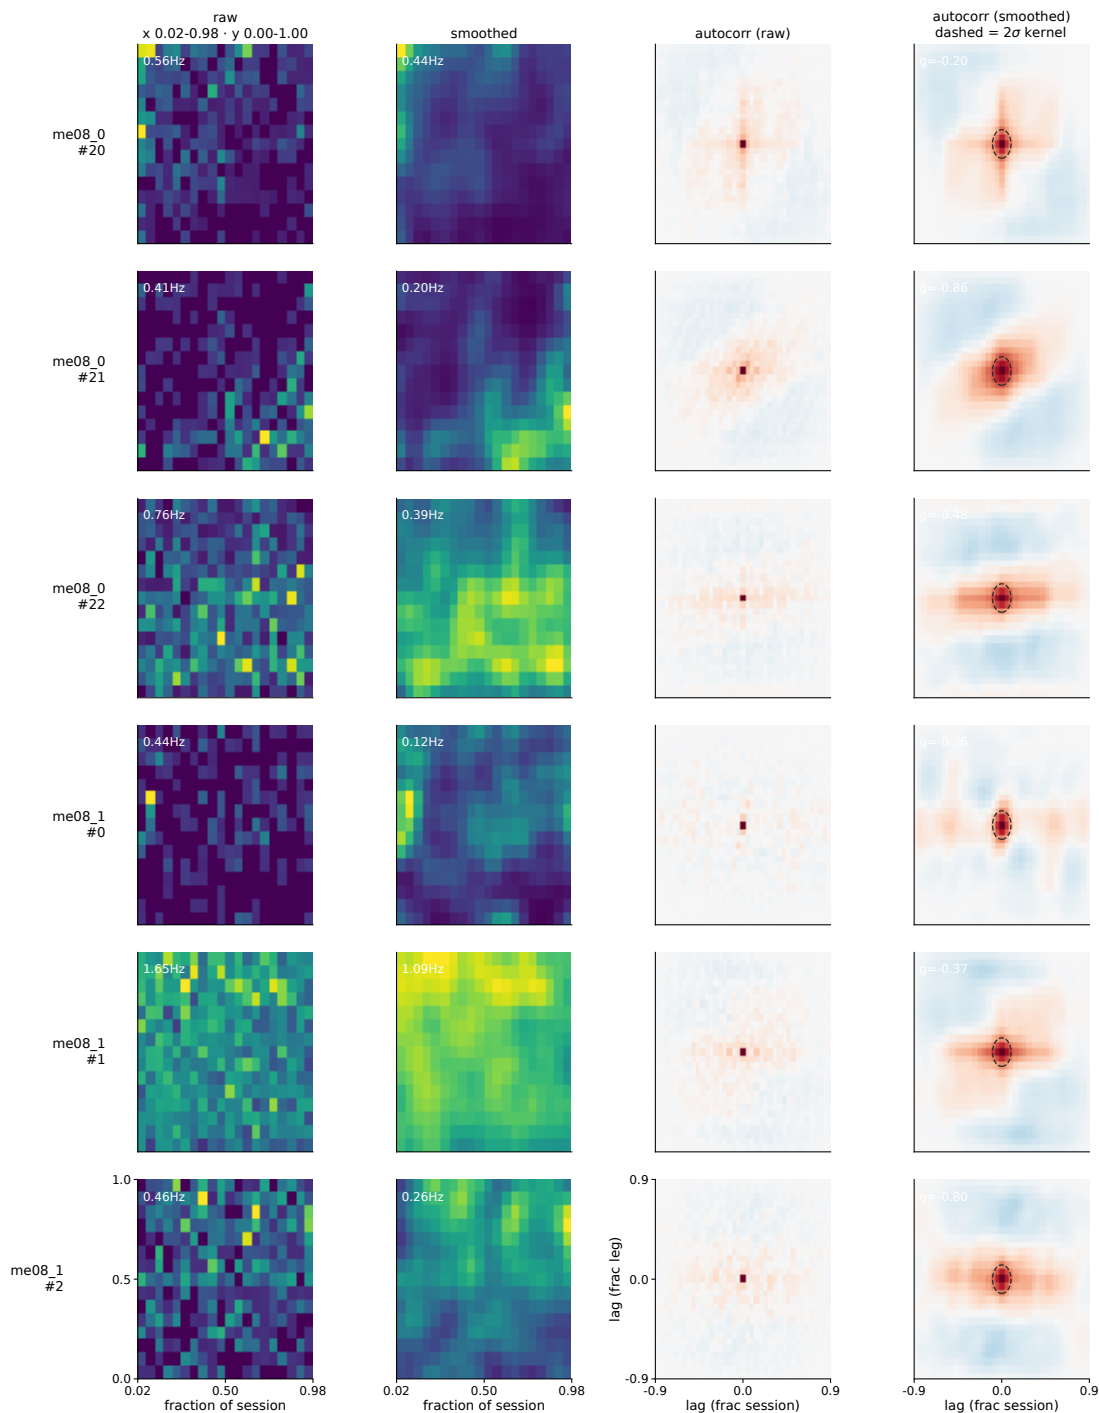



normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 984-989 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

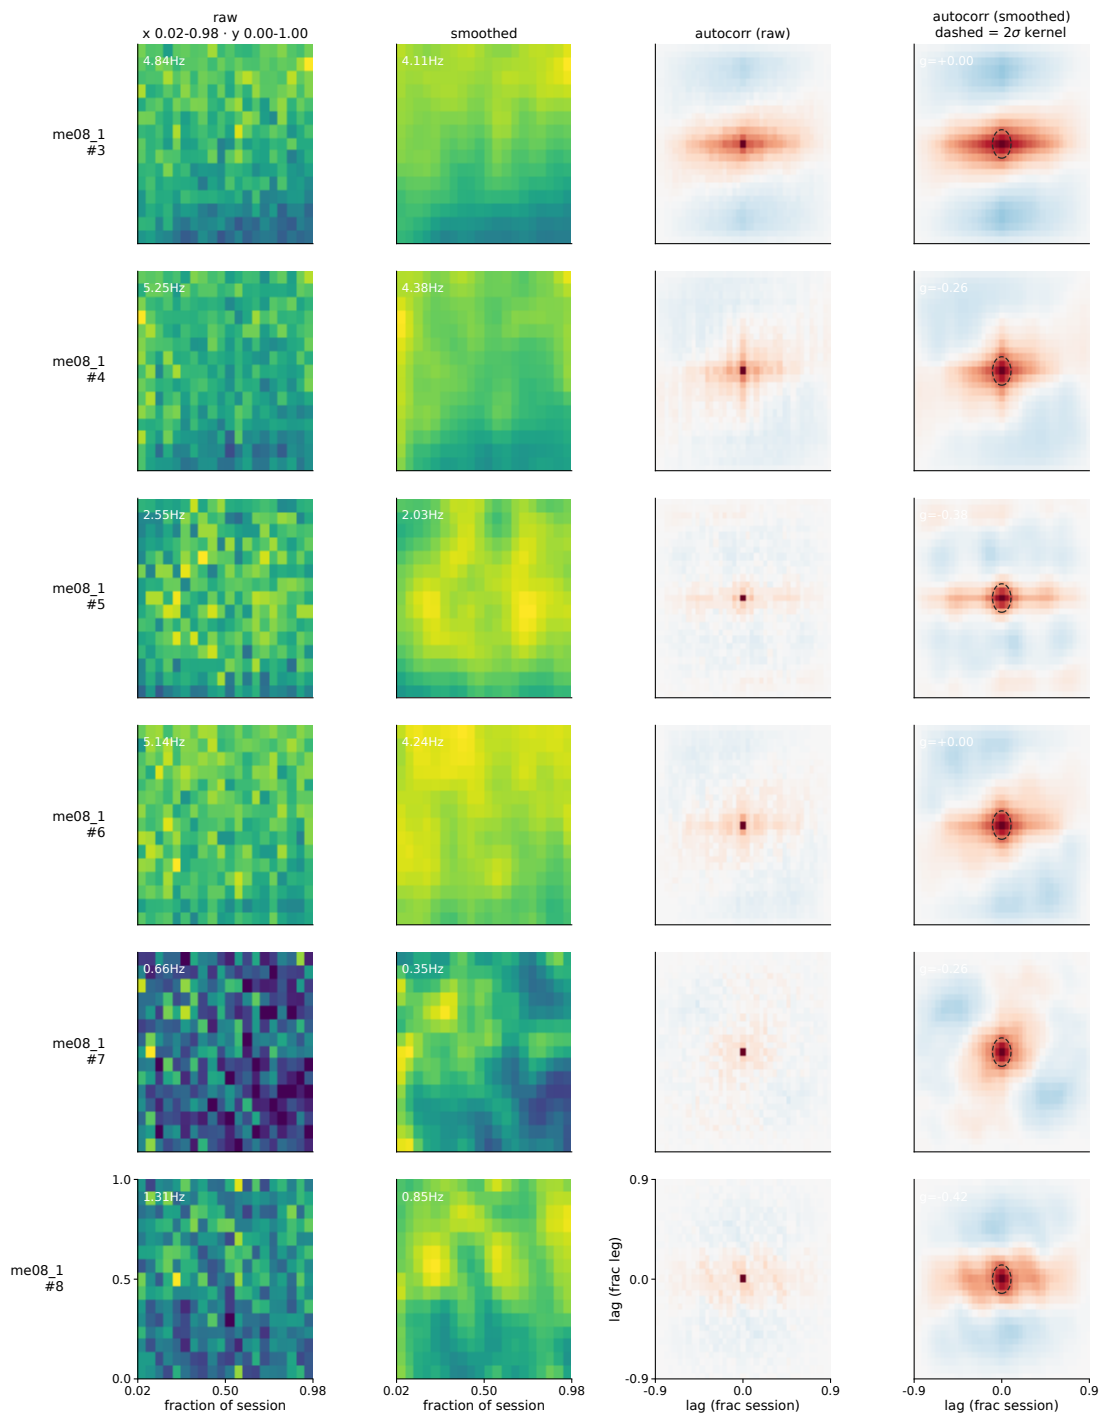



normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 990-995 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

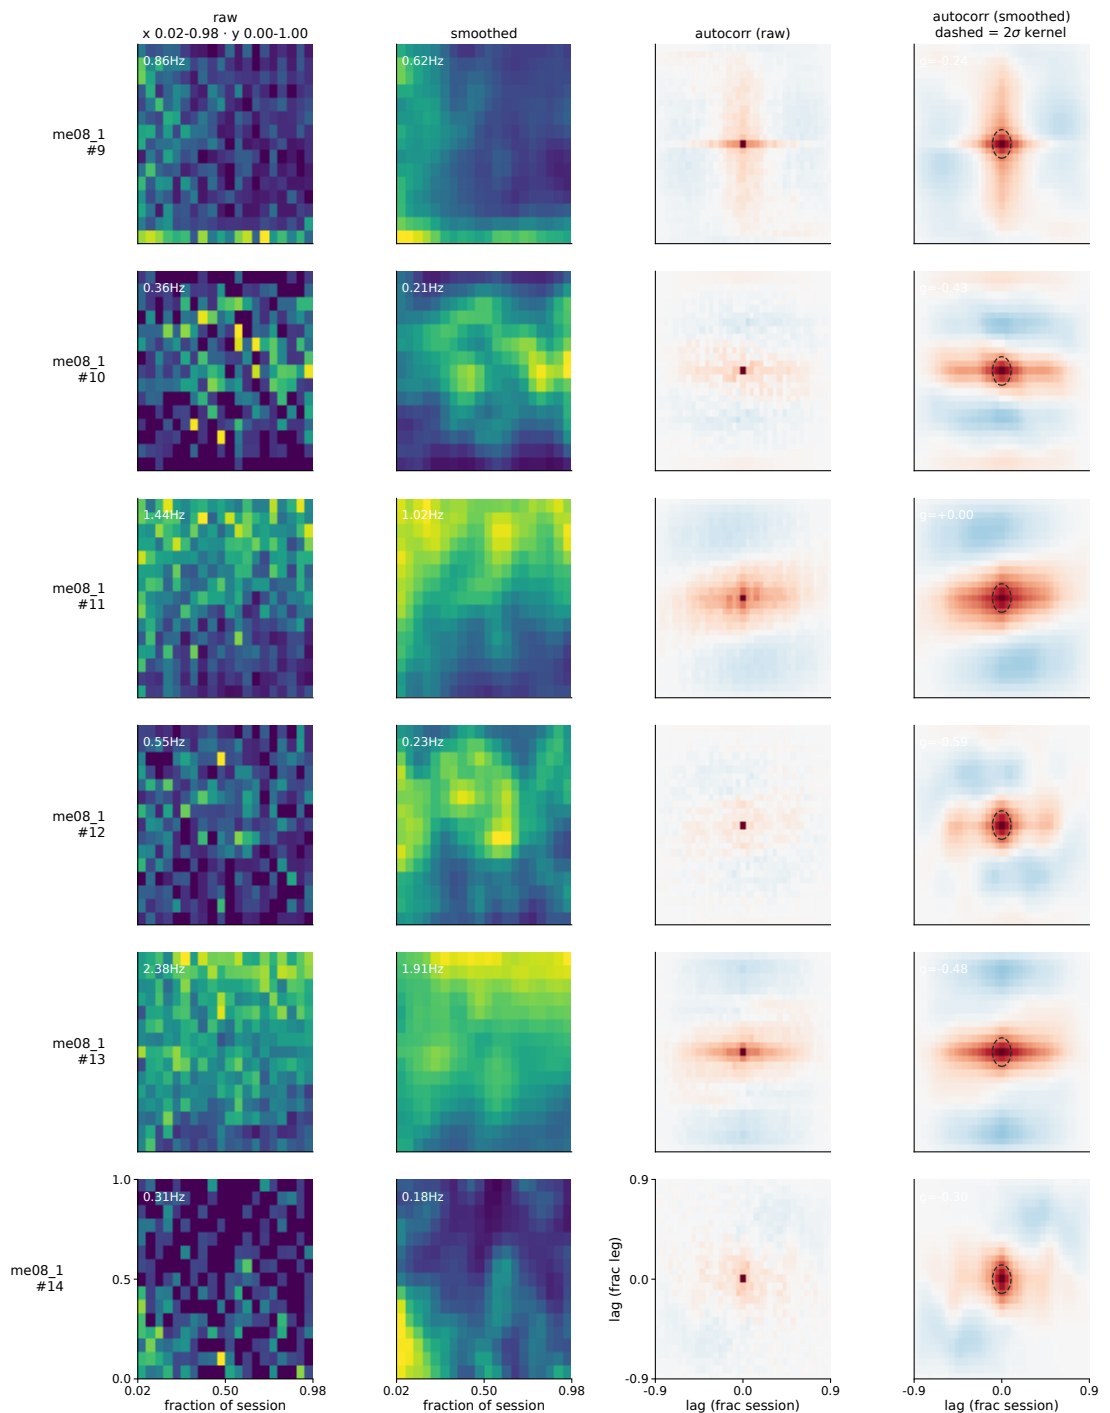

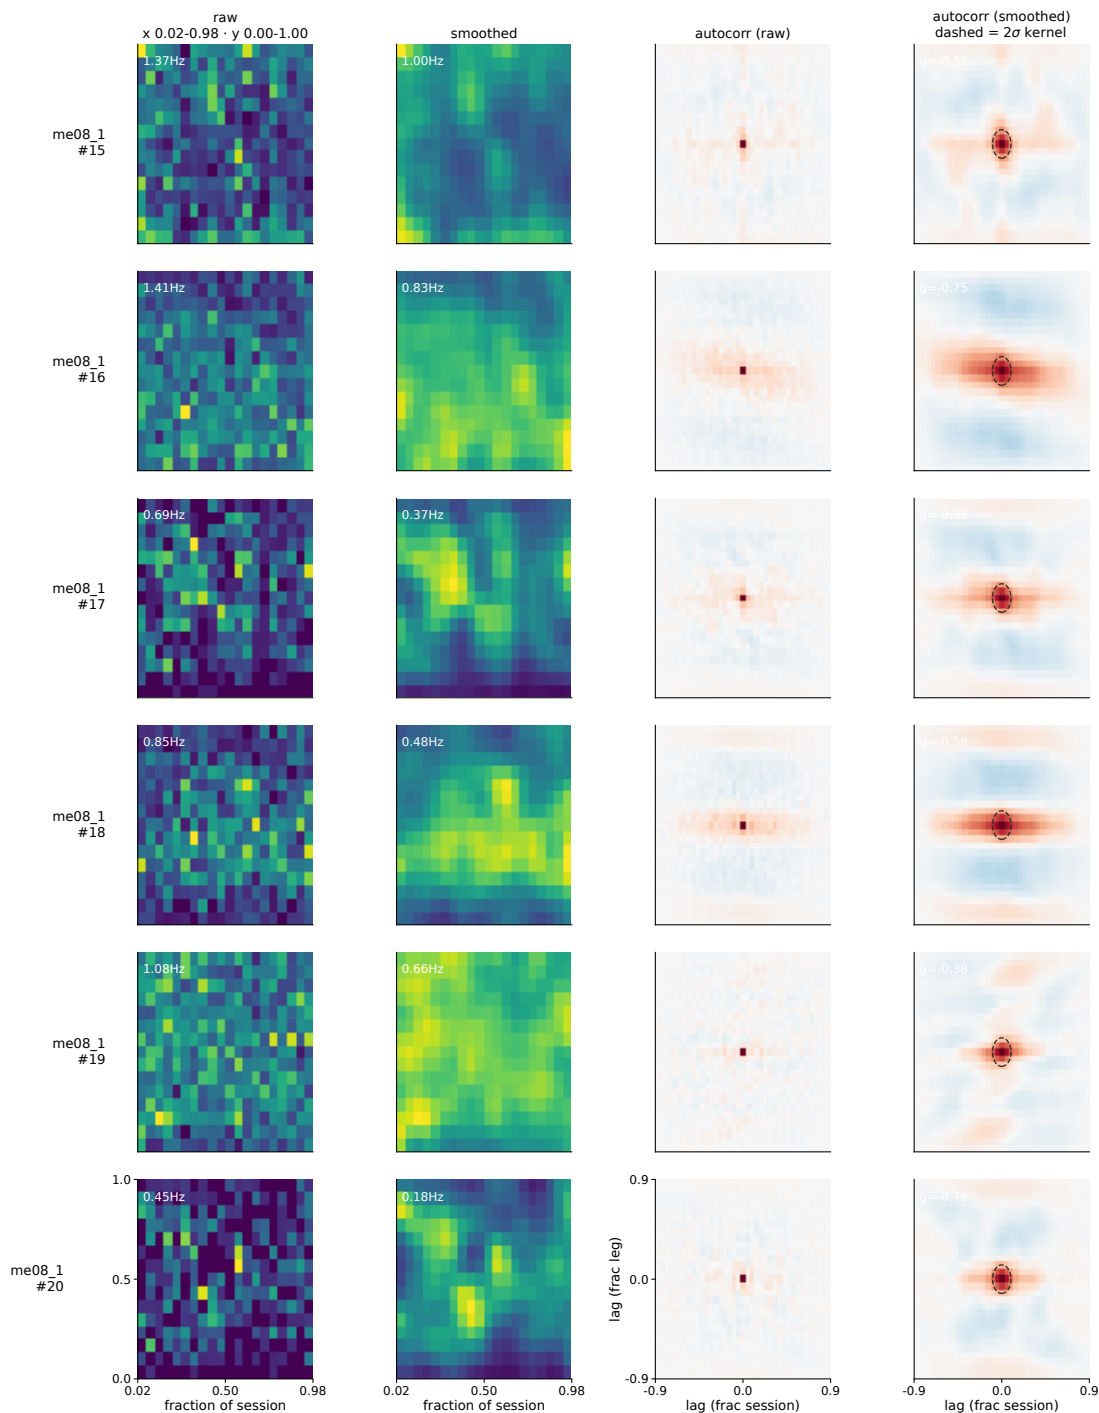


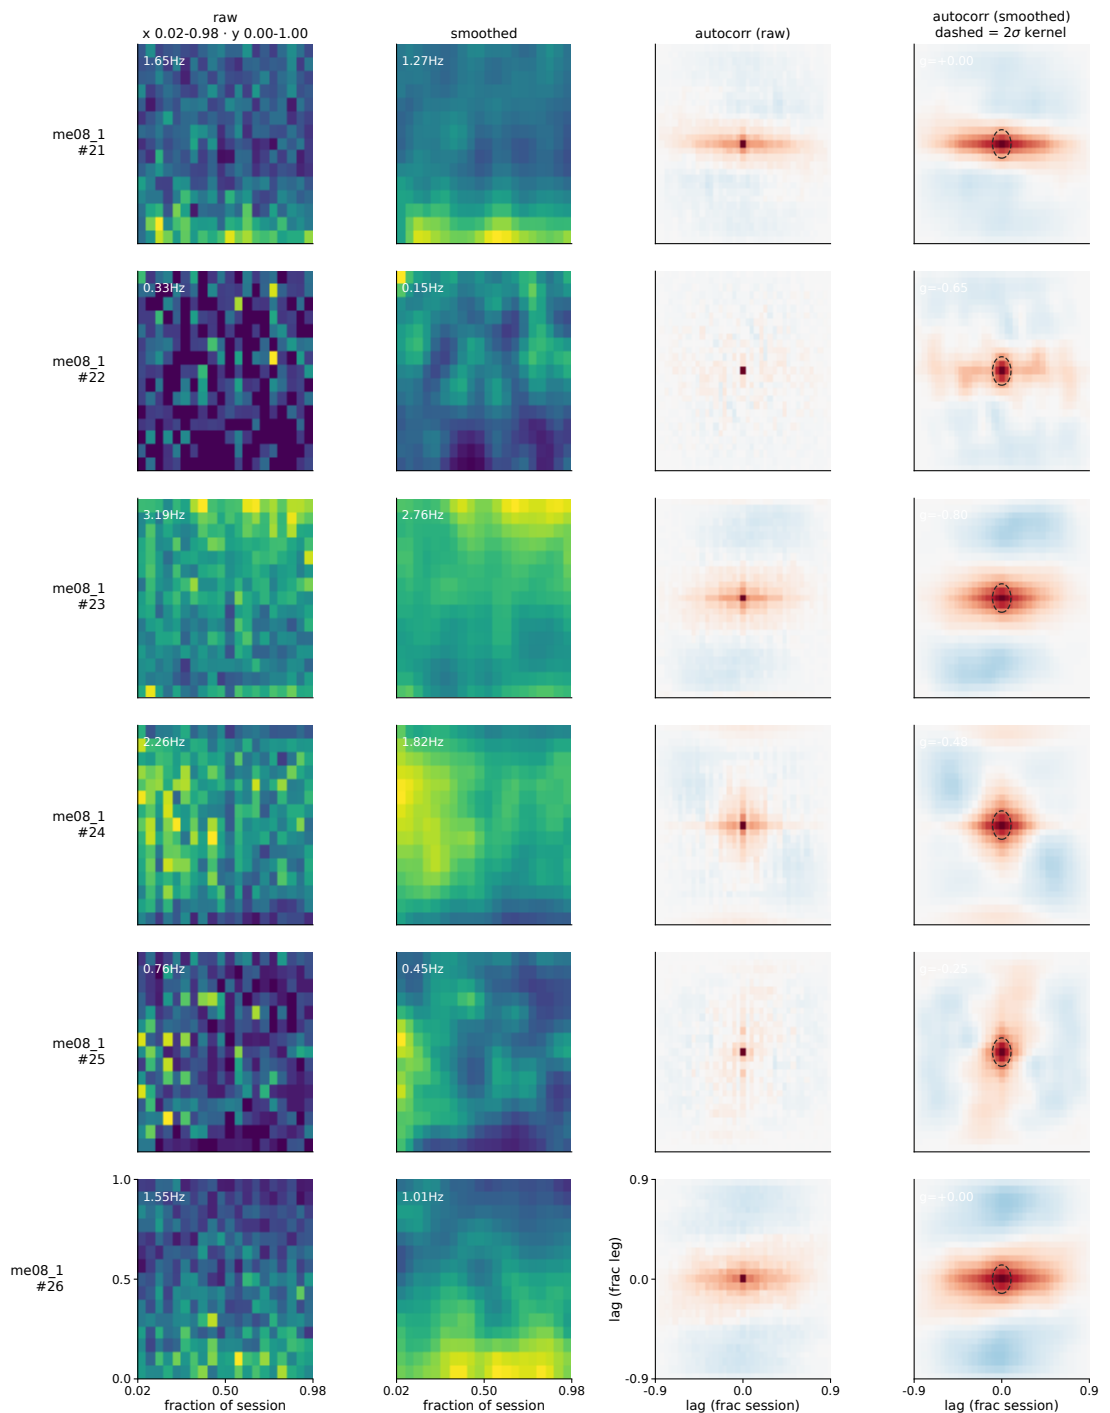


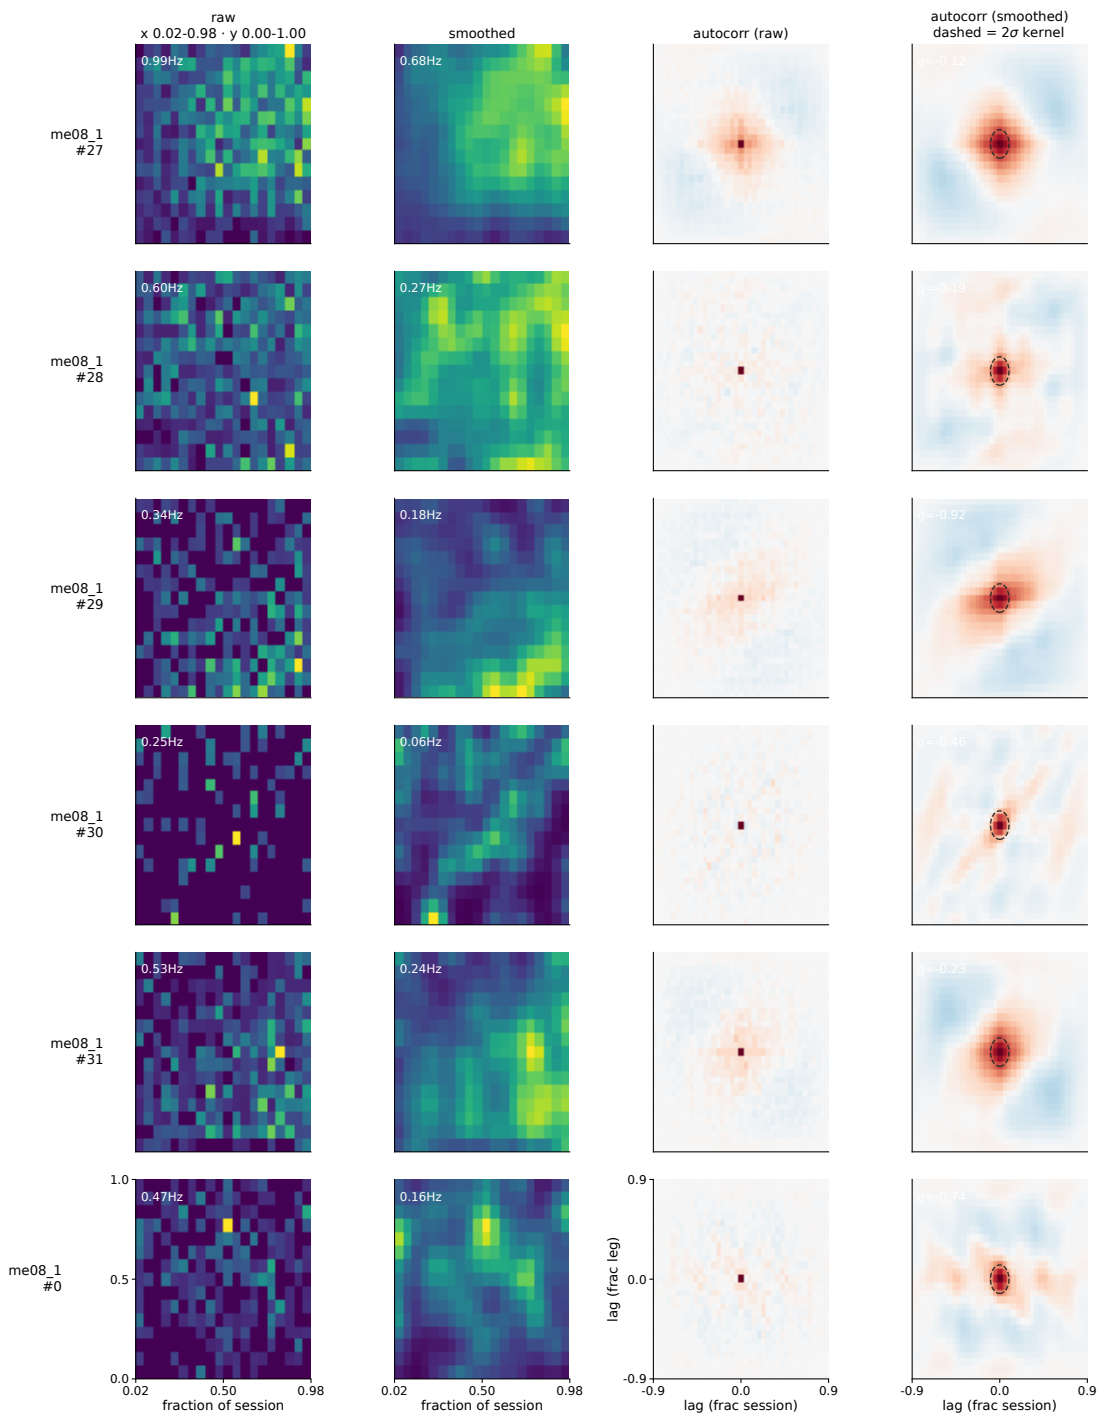

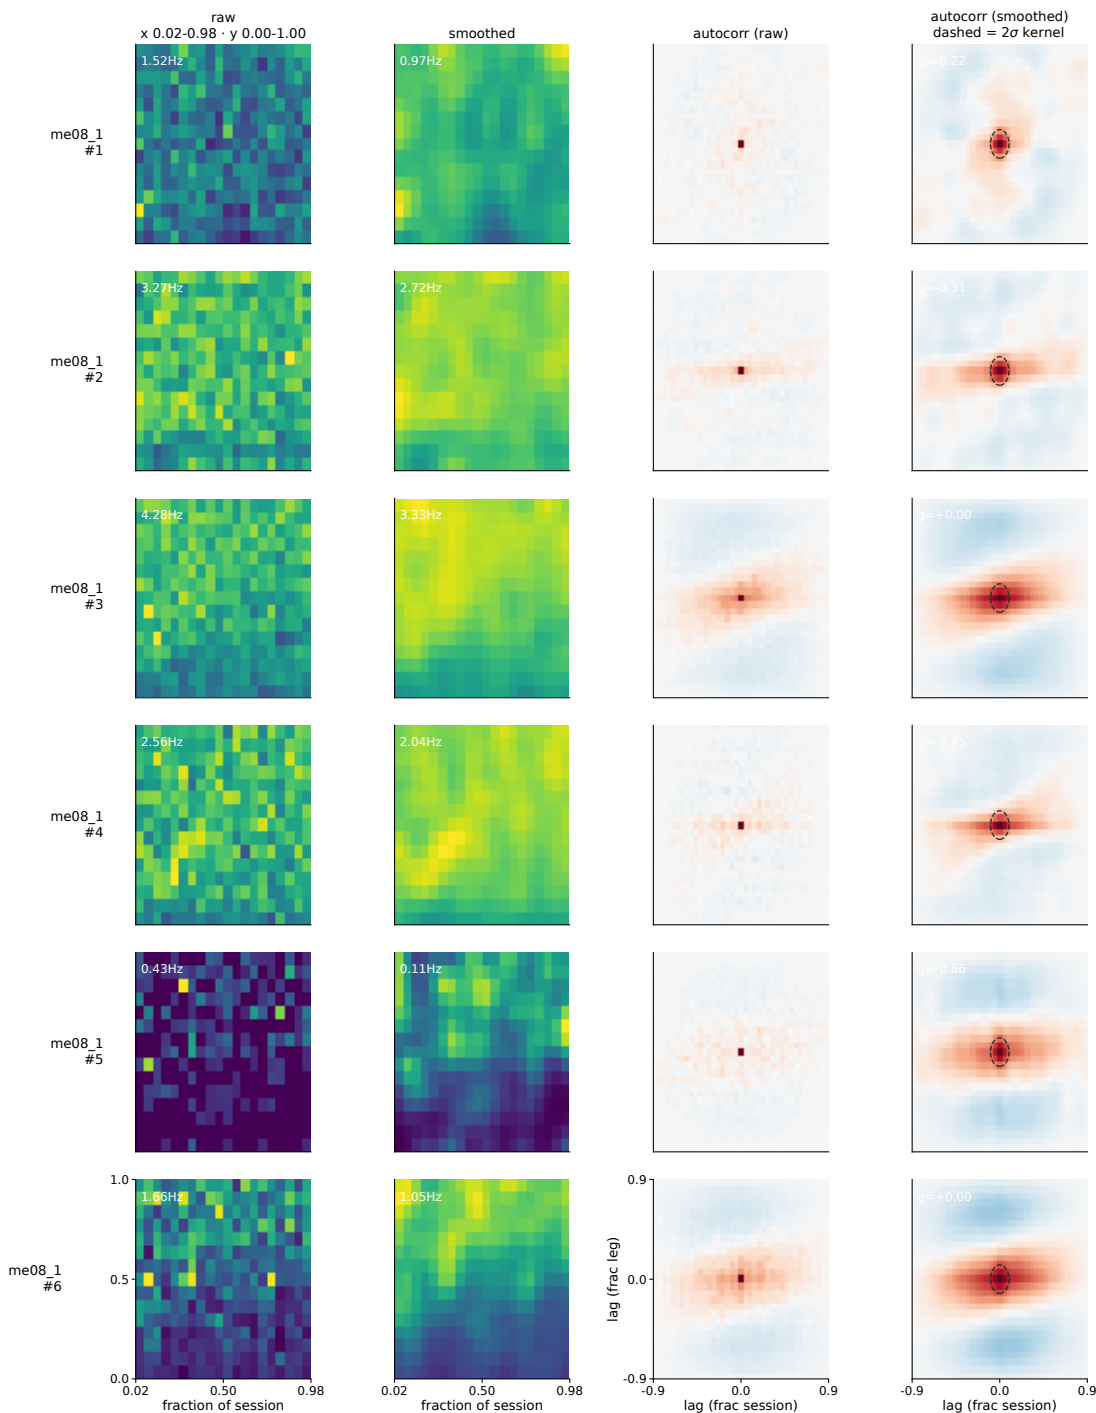



normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1020-1025 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

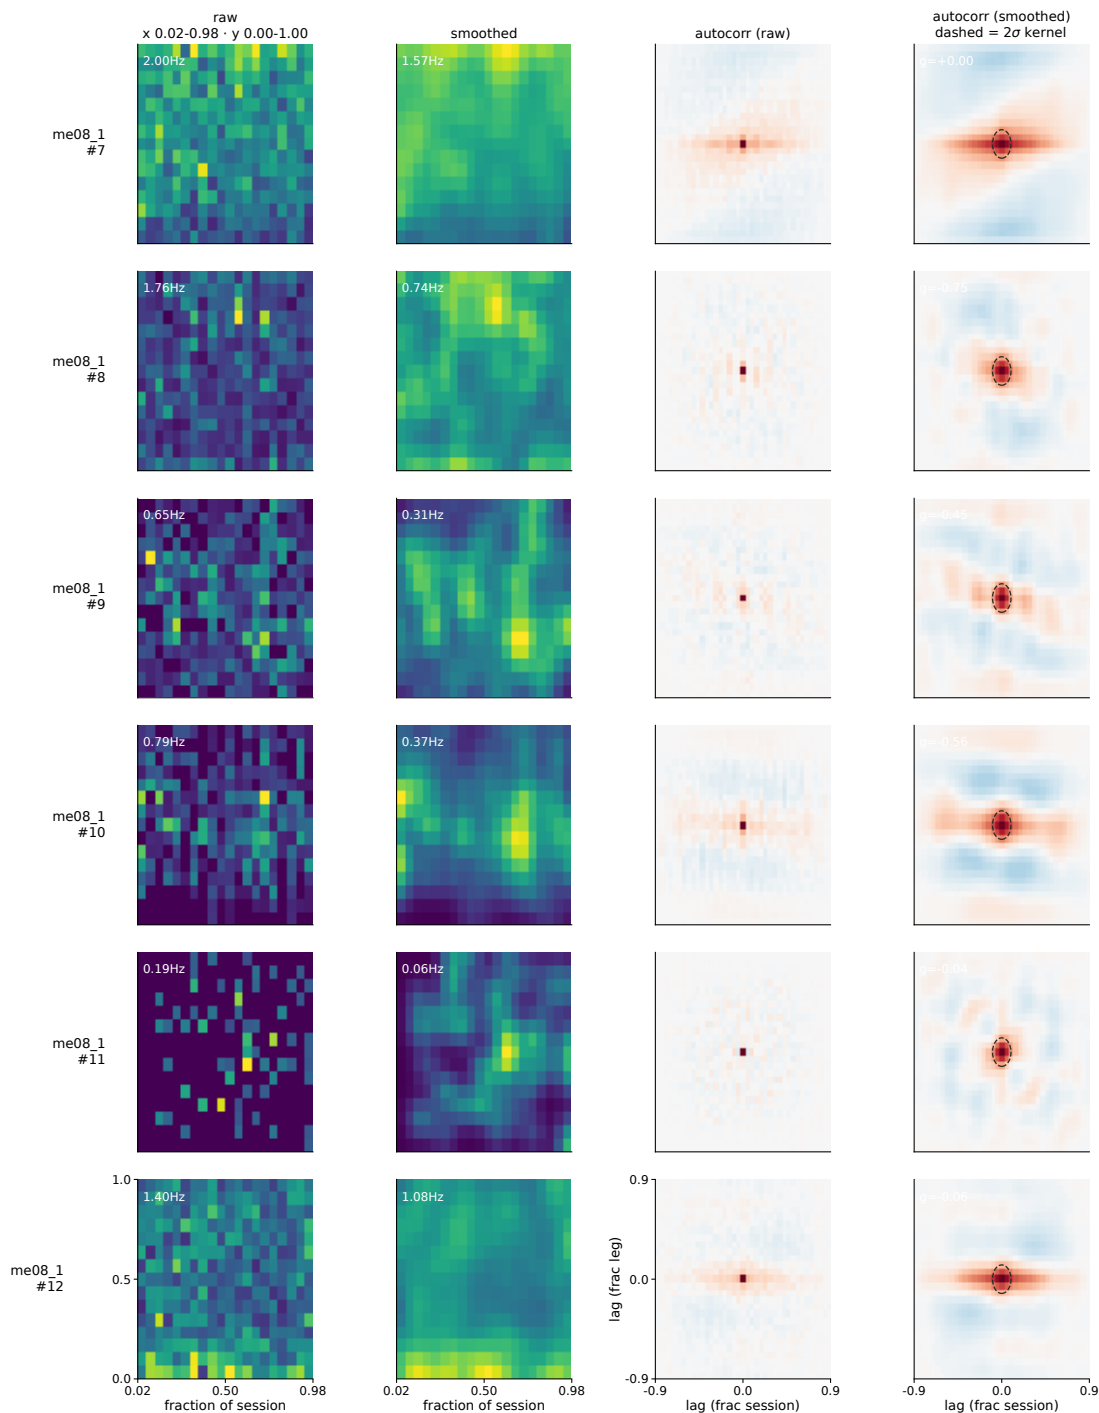


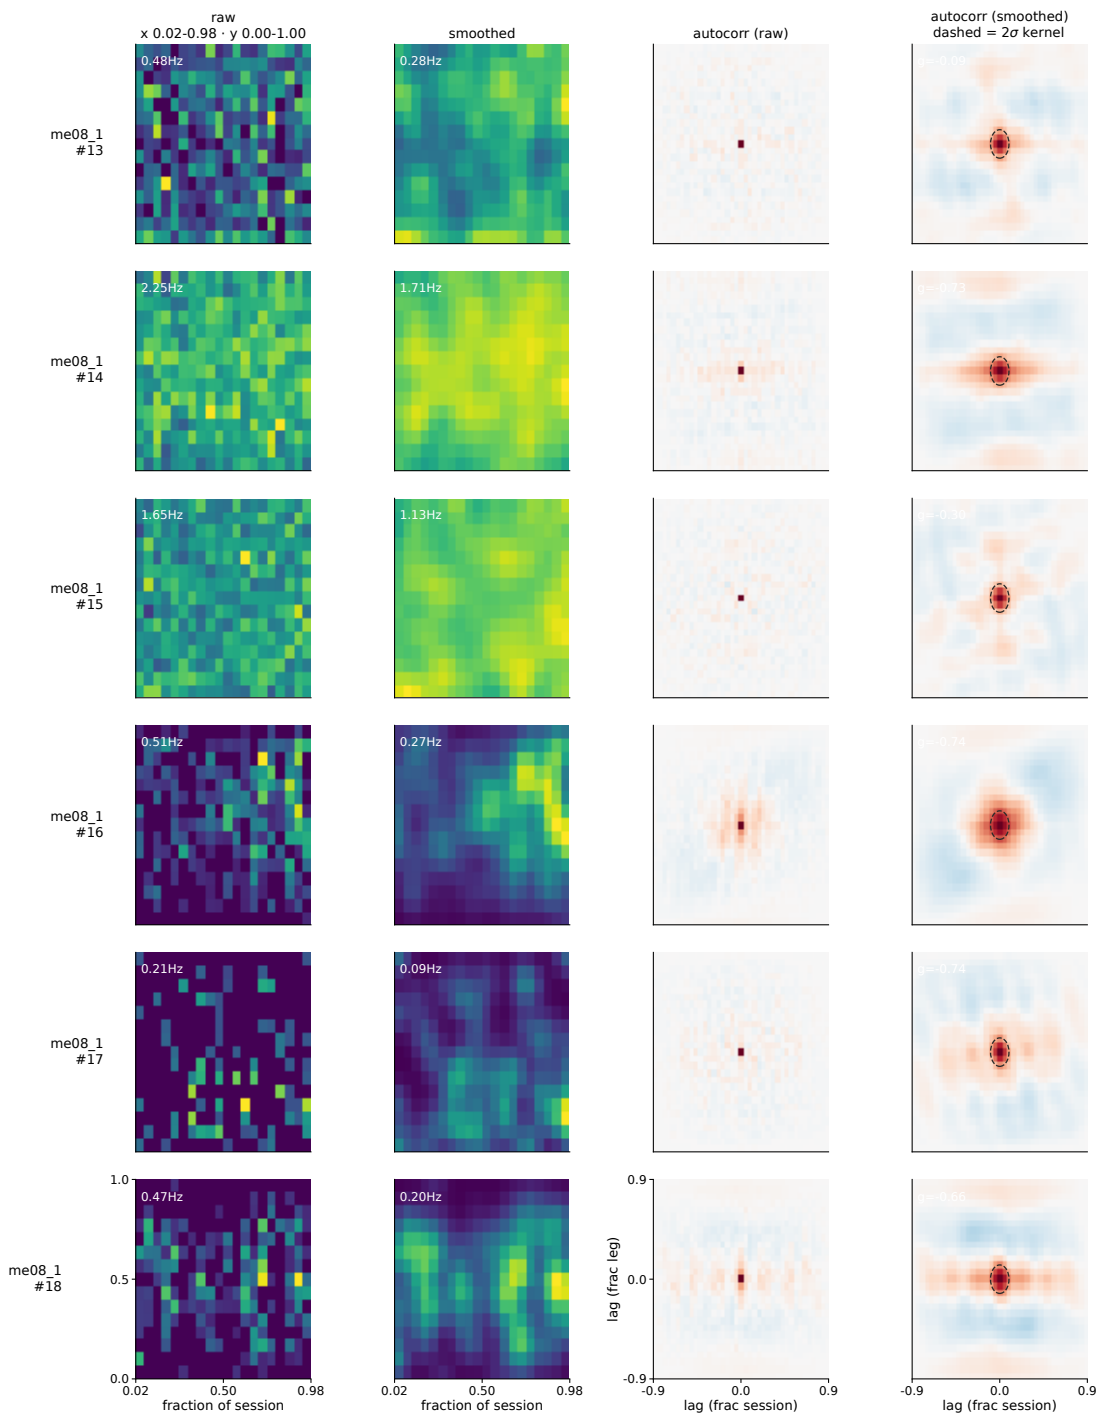


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1032-1037 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

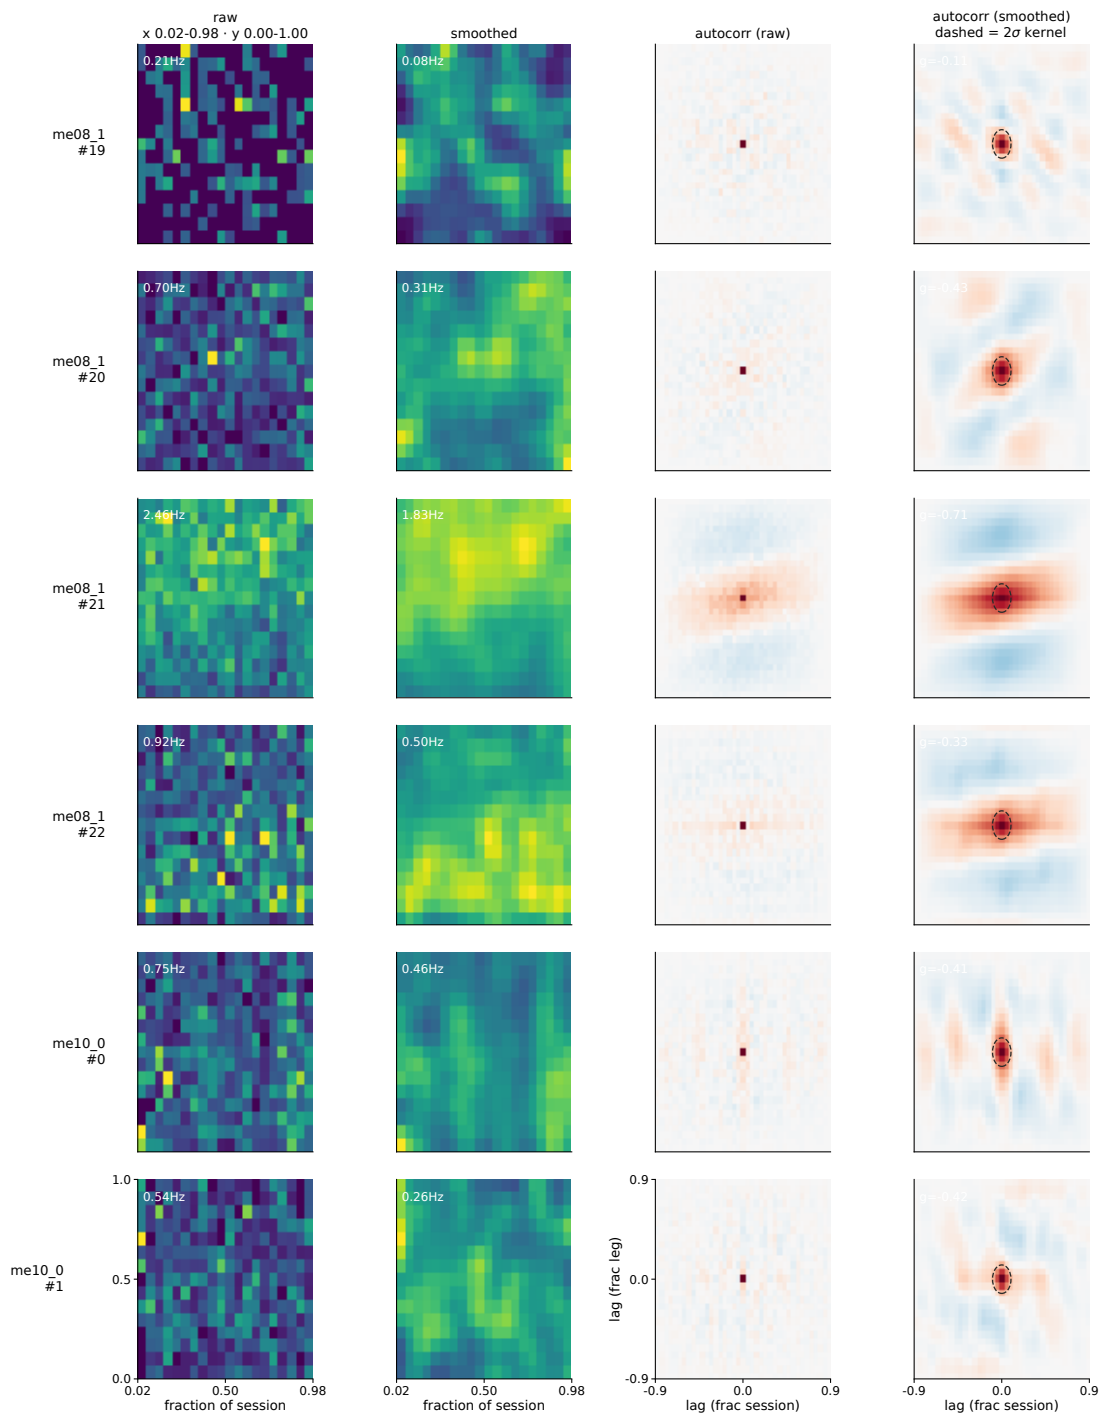


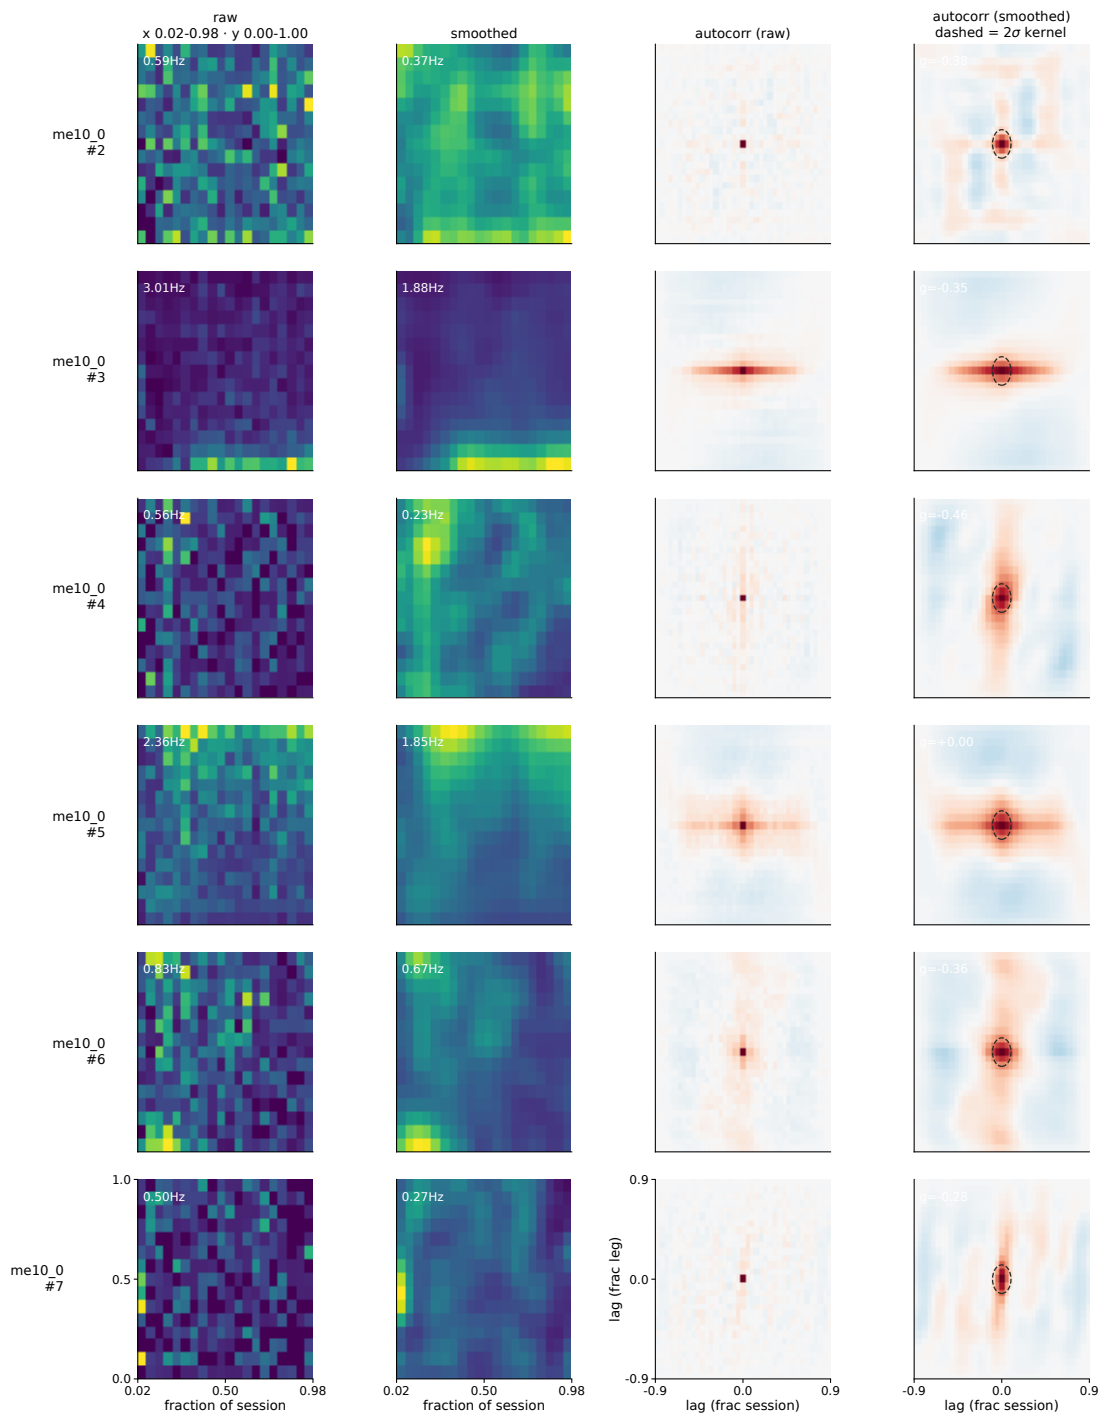

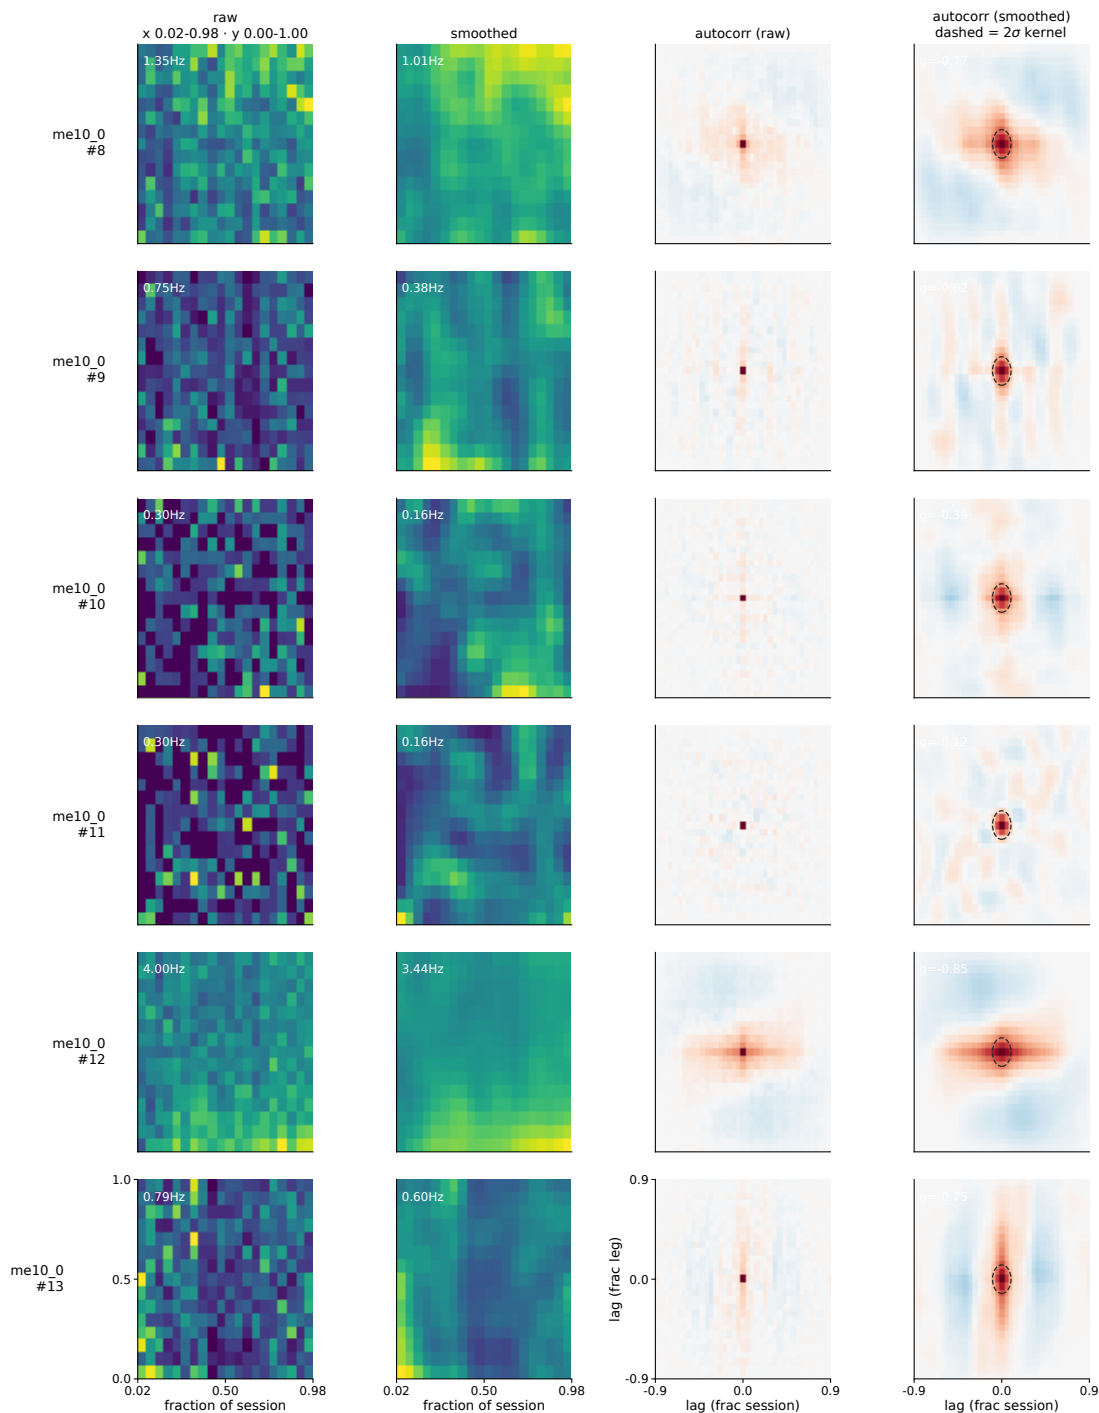


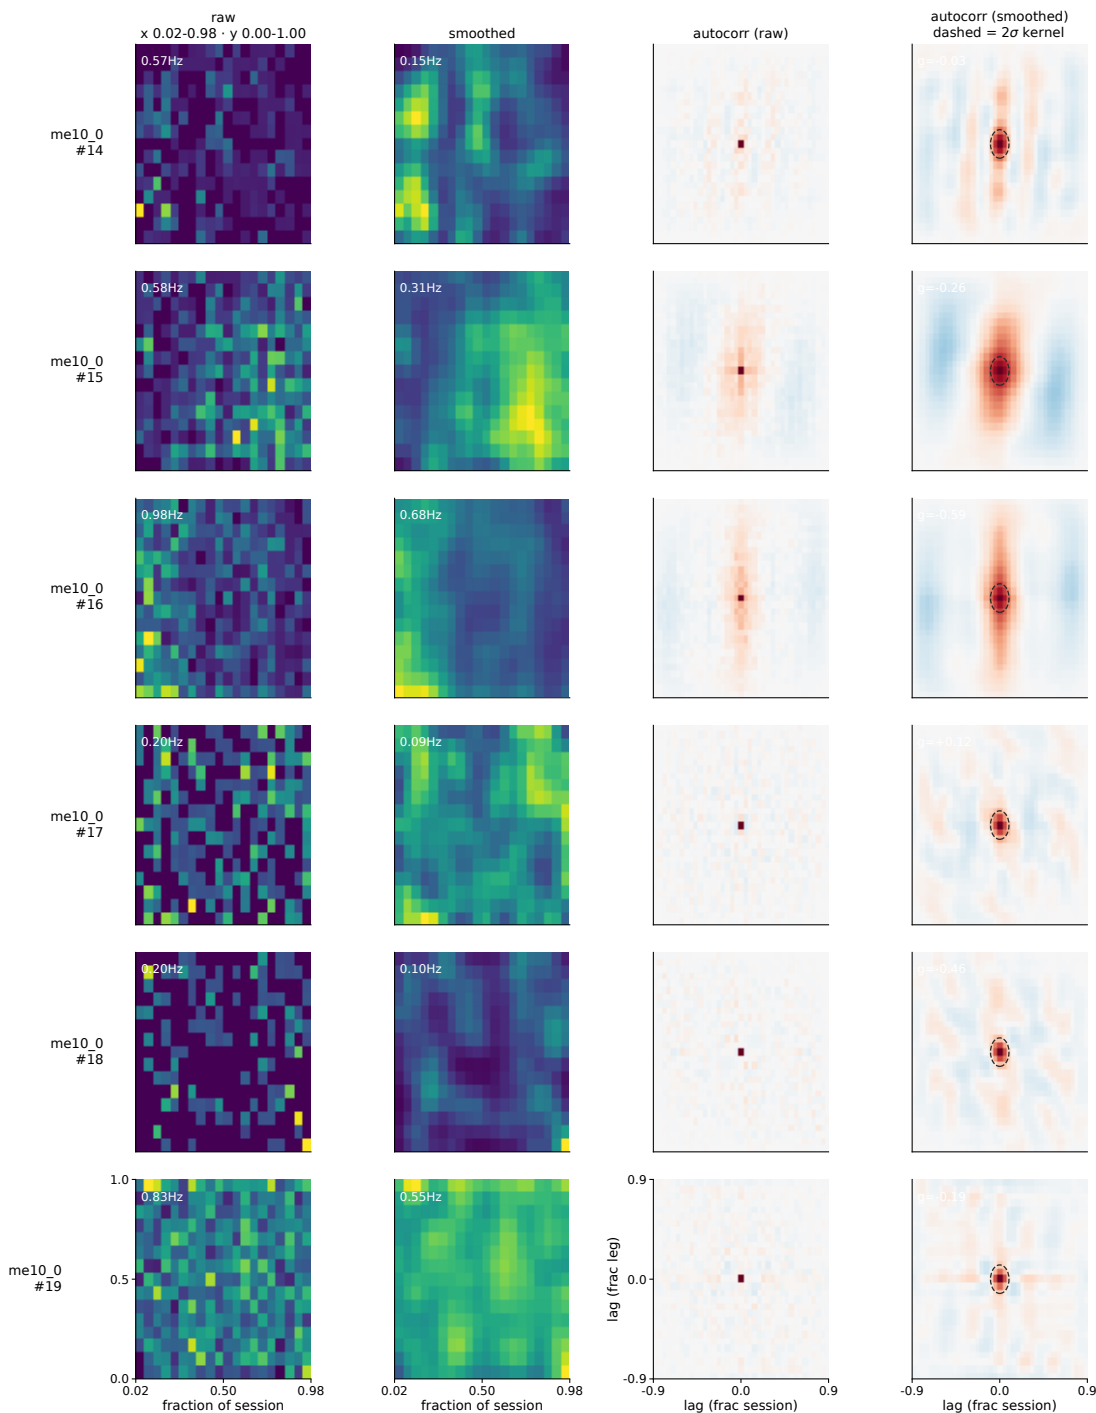


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1056-1061 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

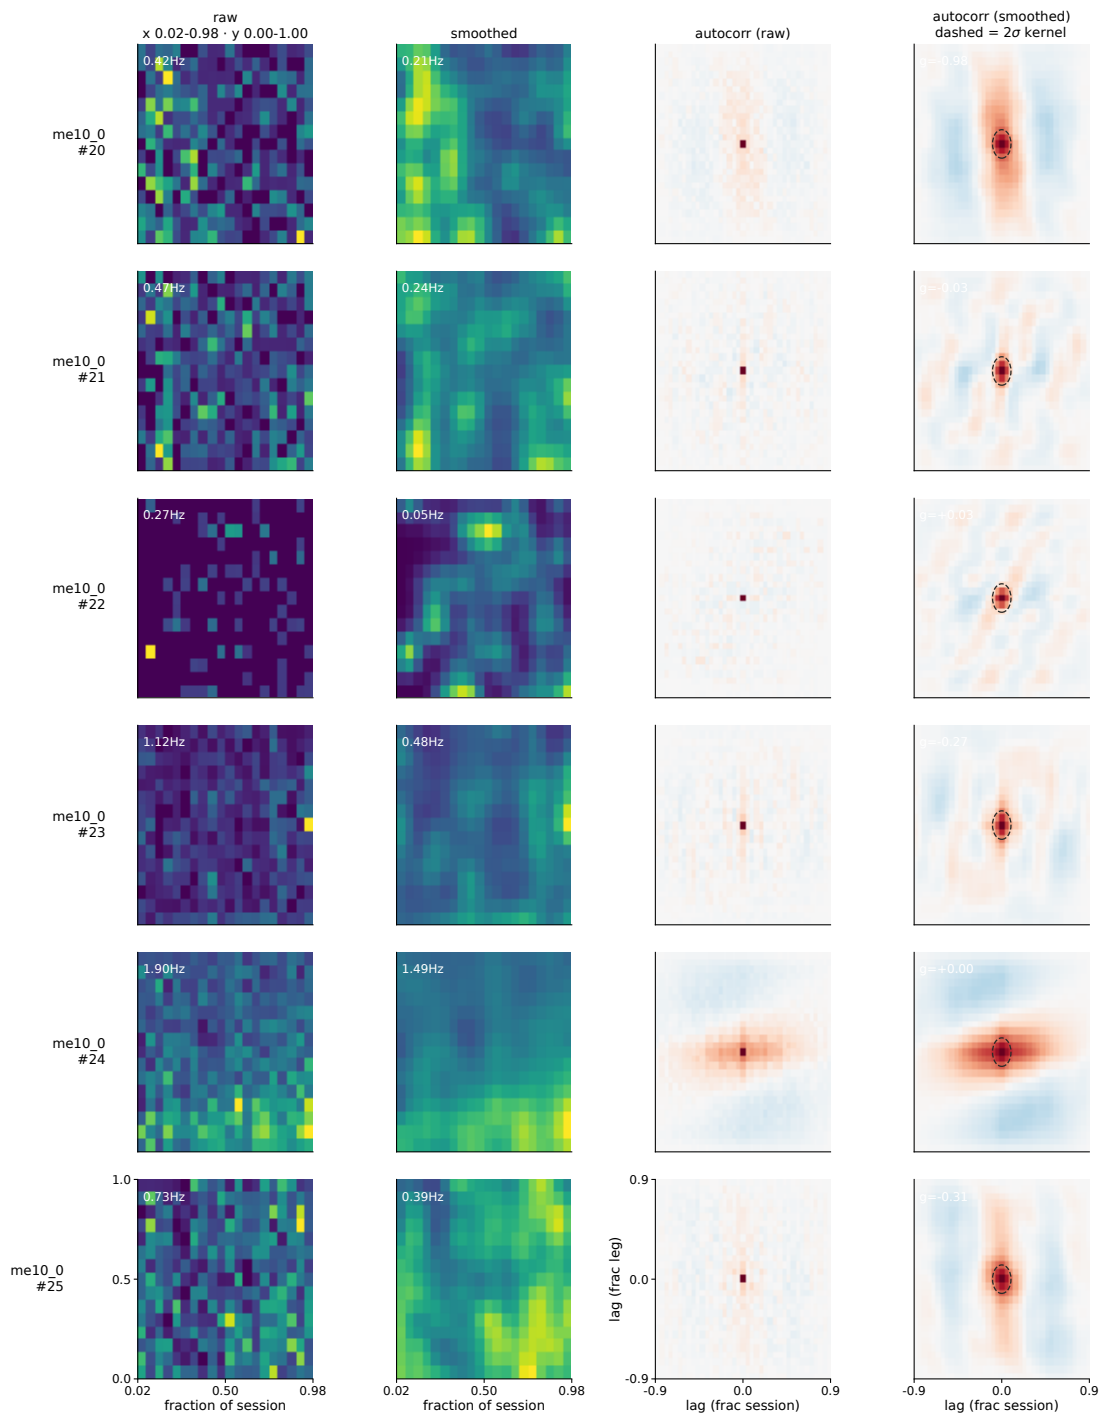


normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1062-1067 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

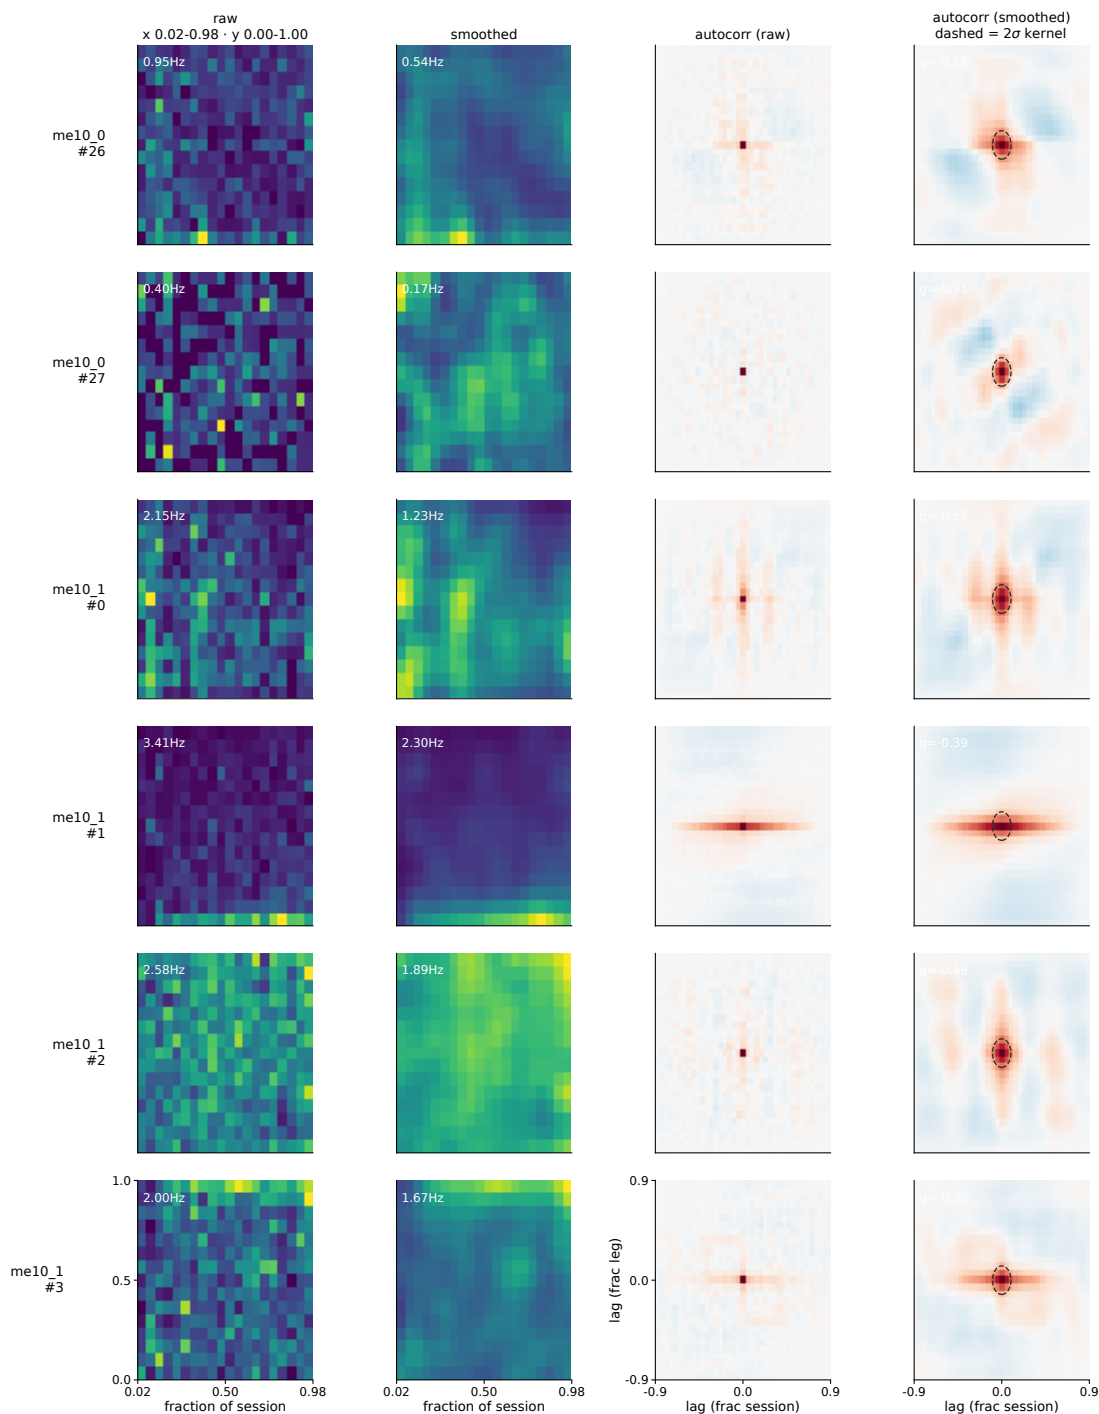



normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1068-1073 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

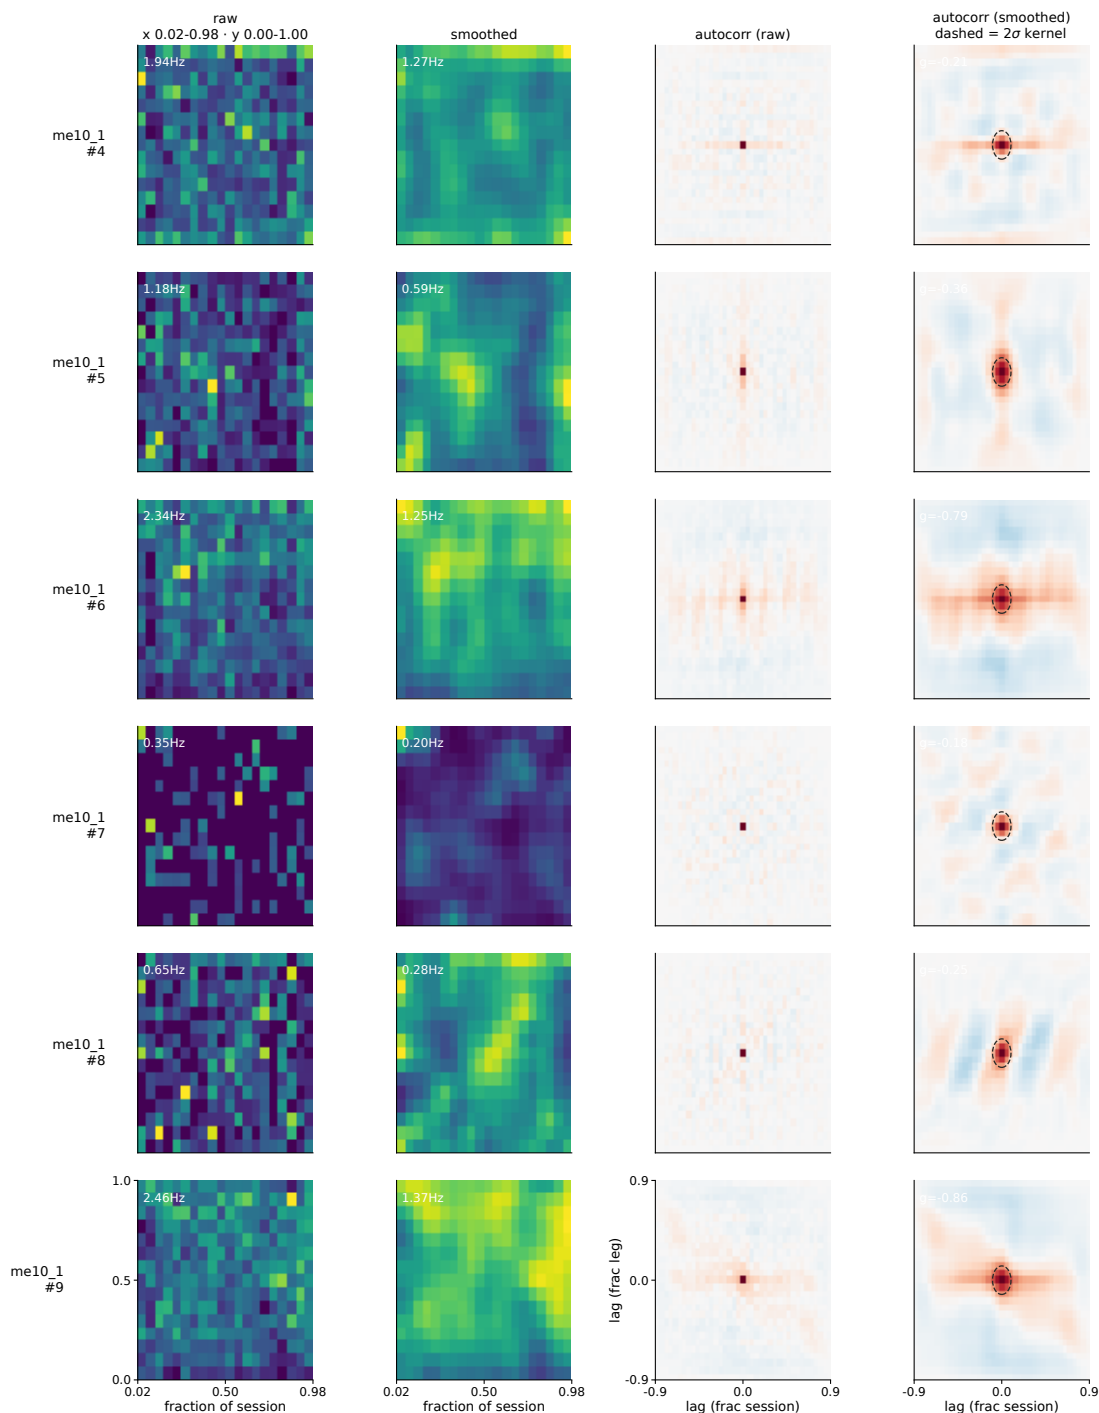



normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1074-1079 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

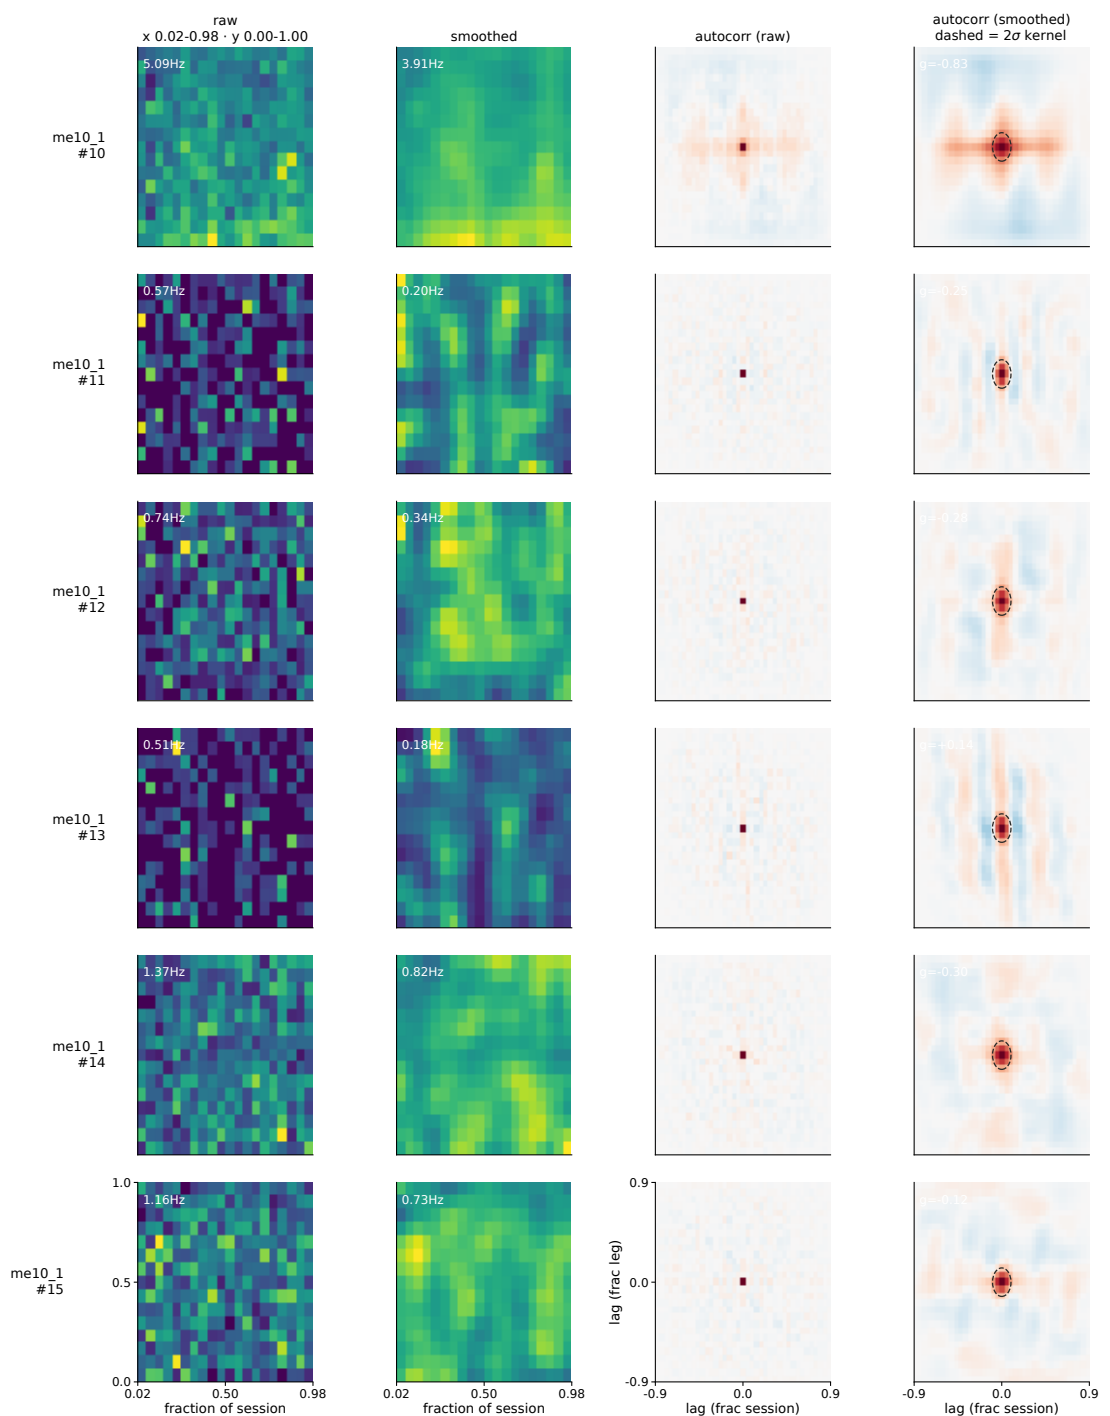

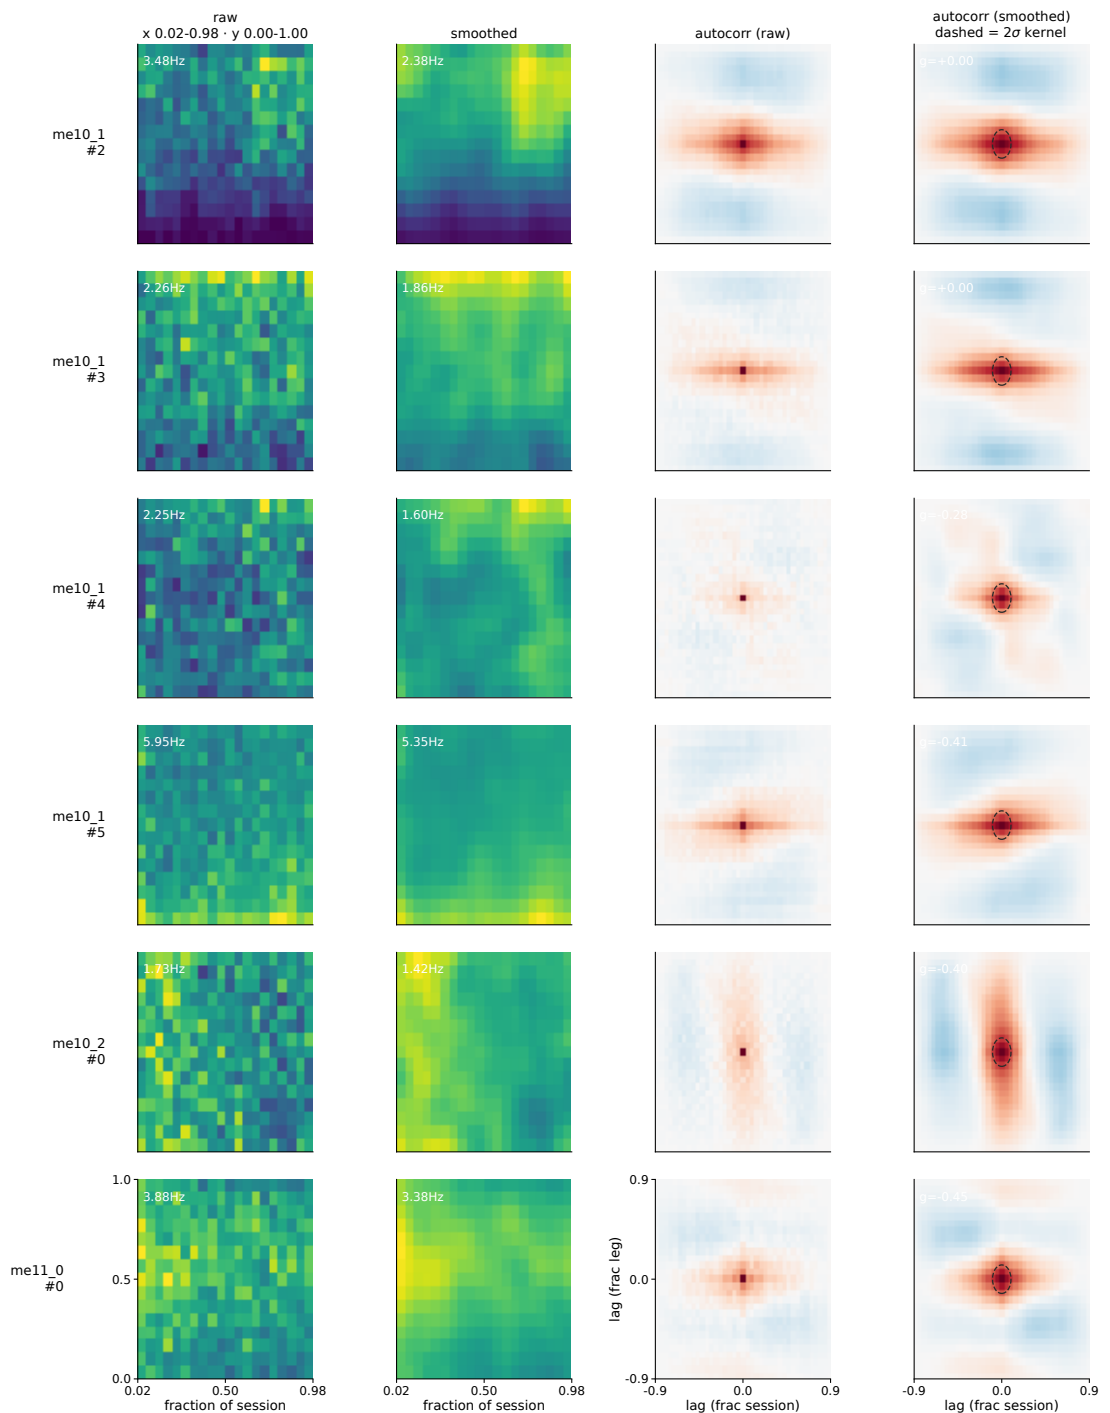


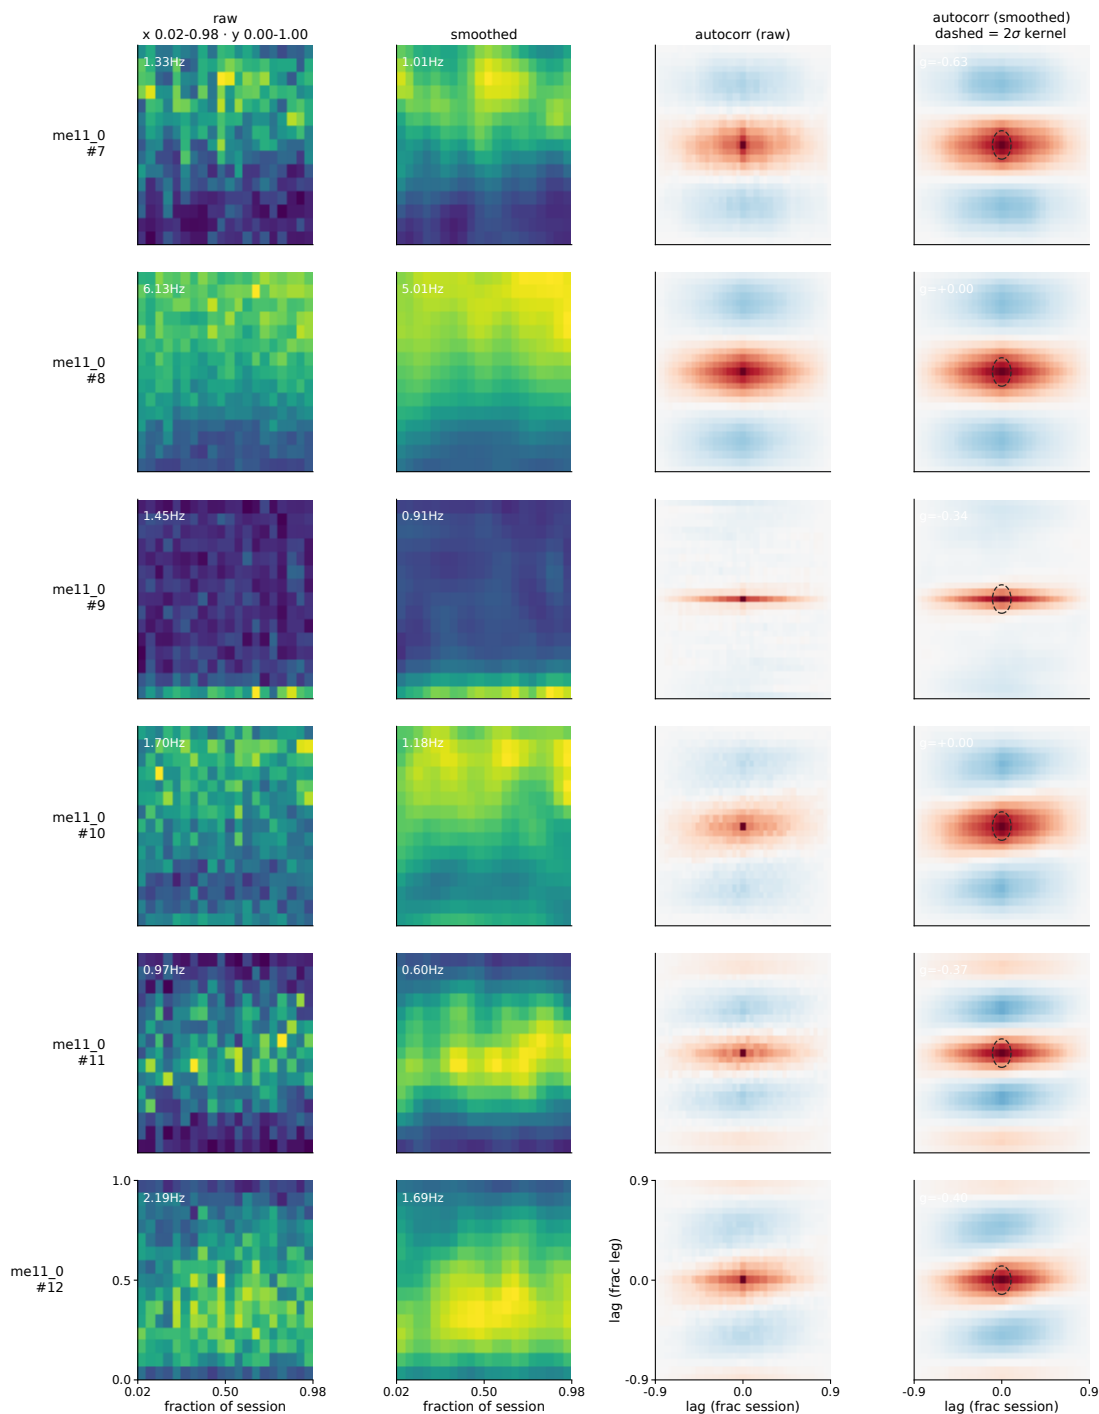


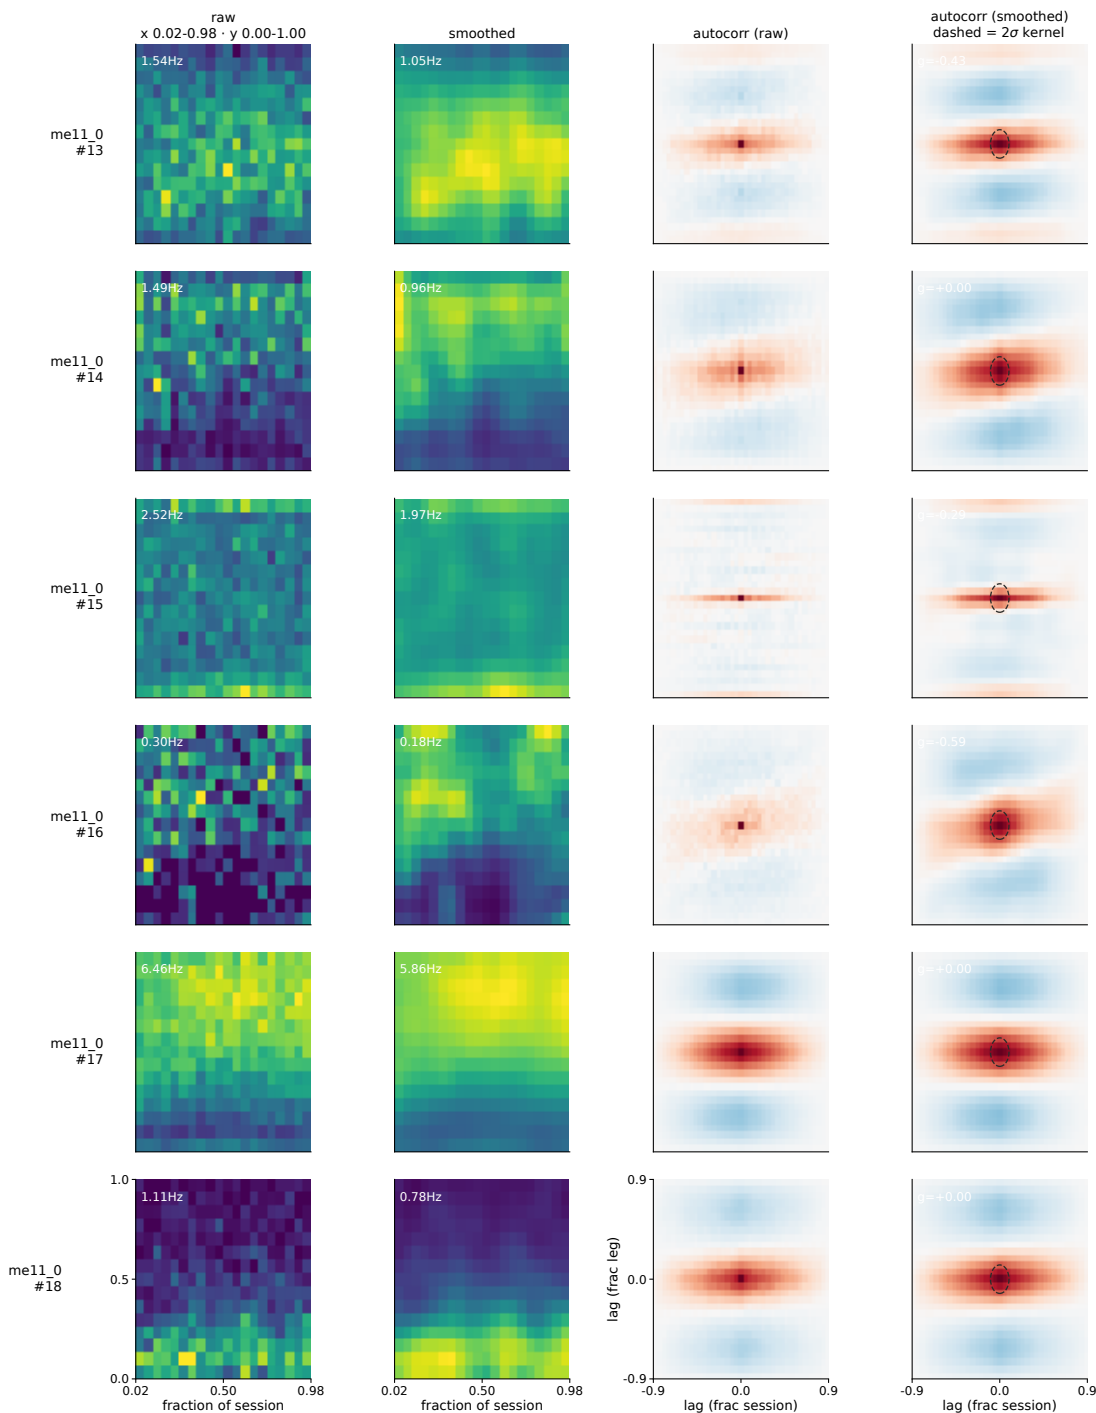


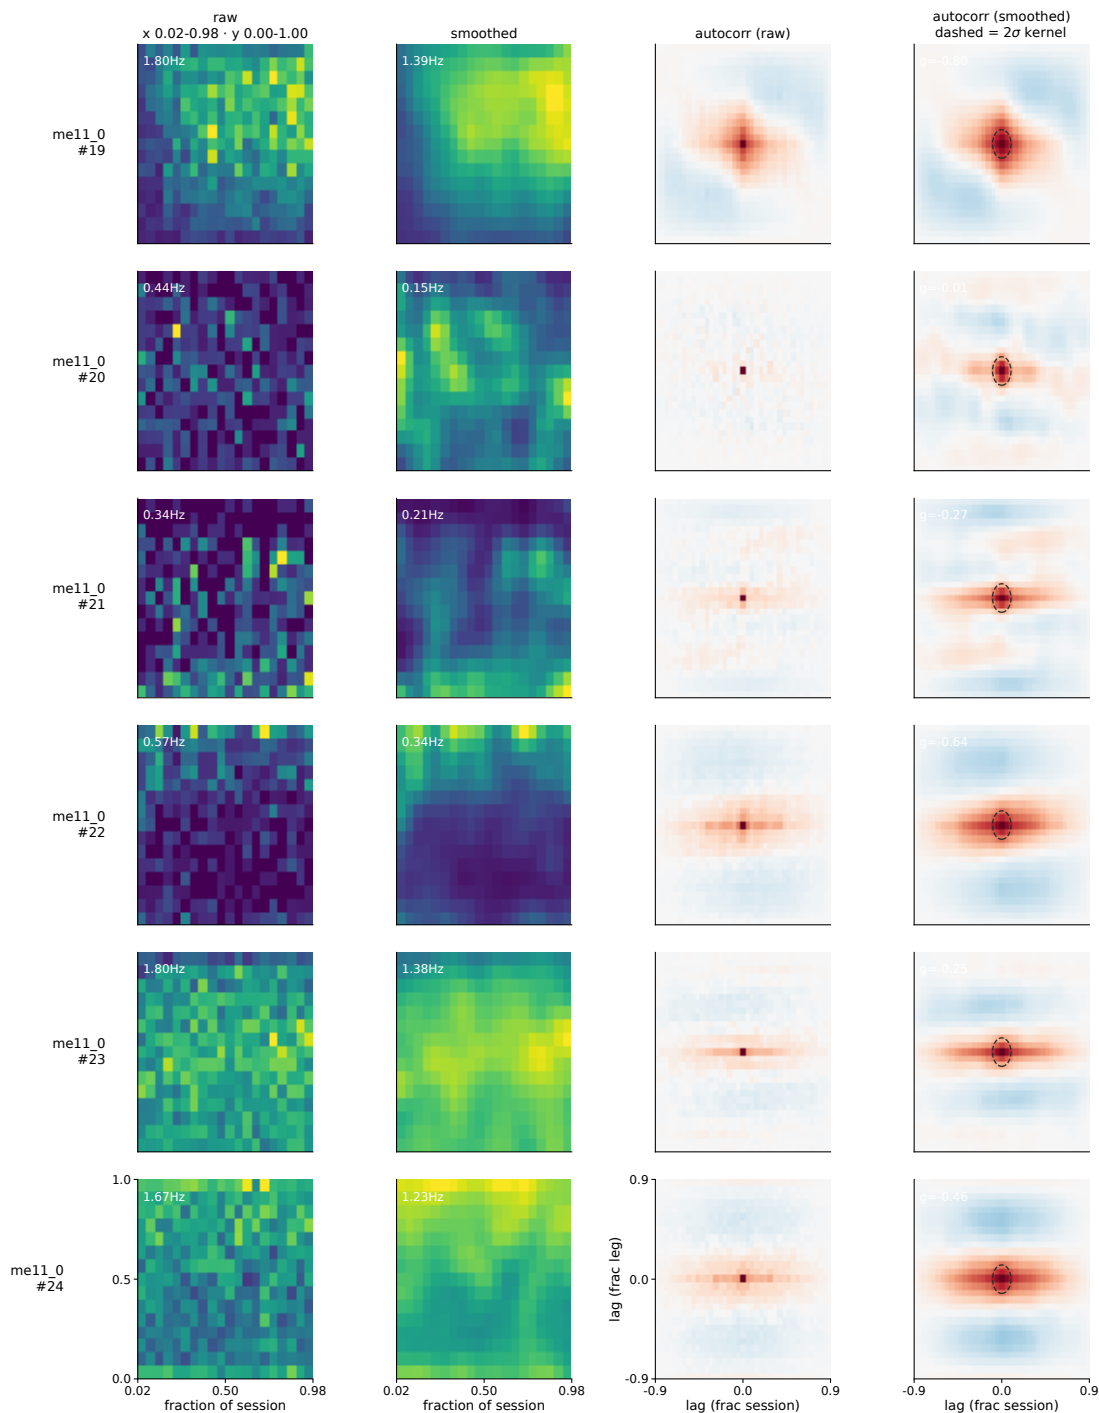



normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1116-1121 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

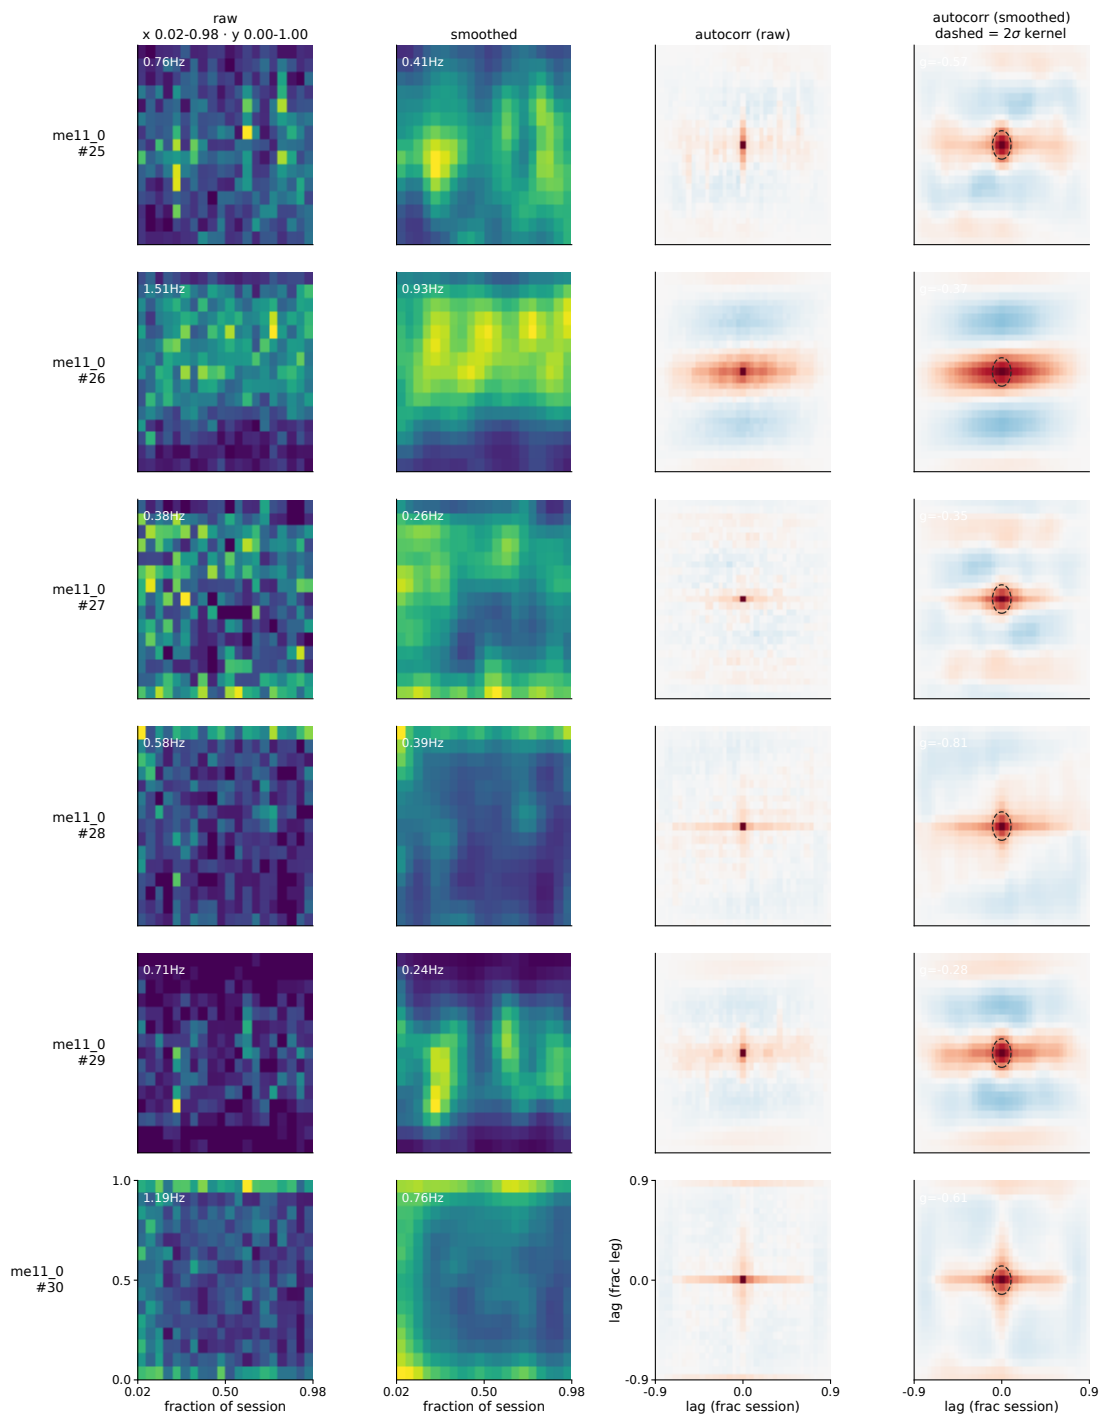


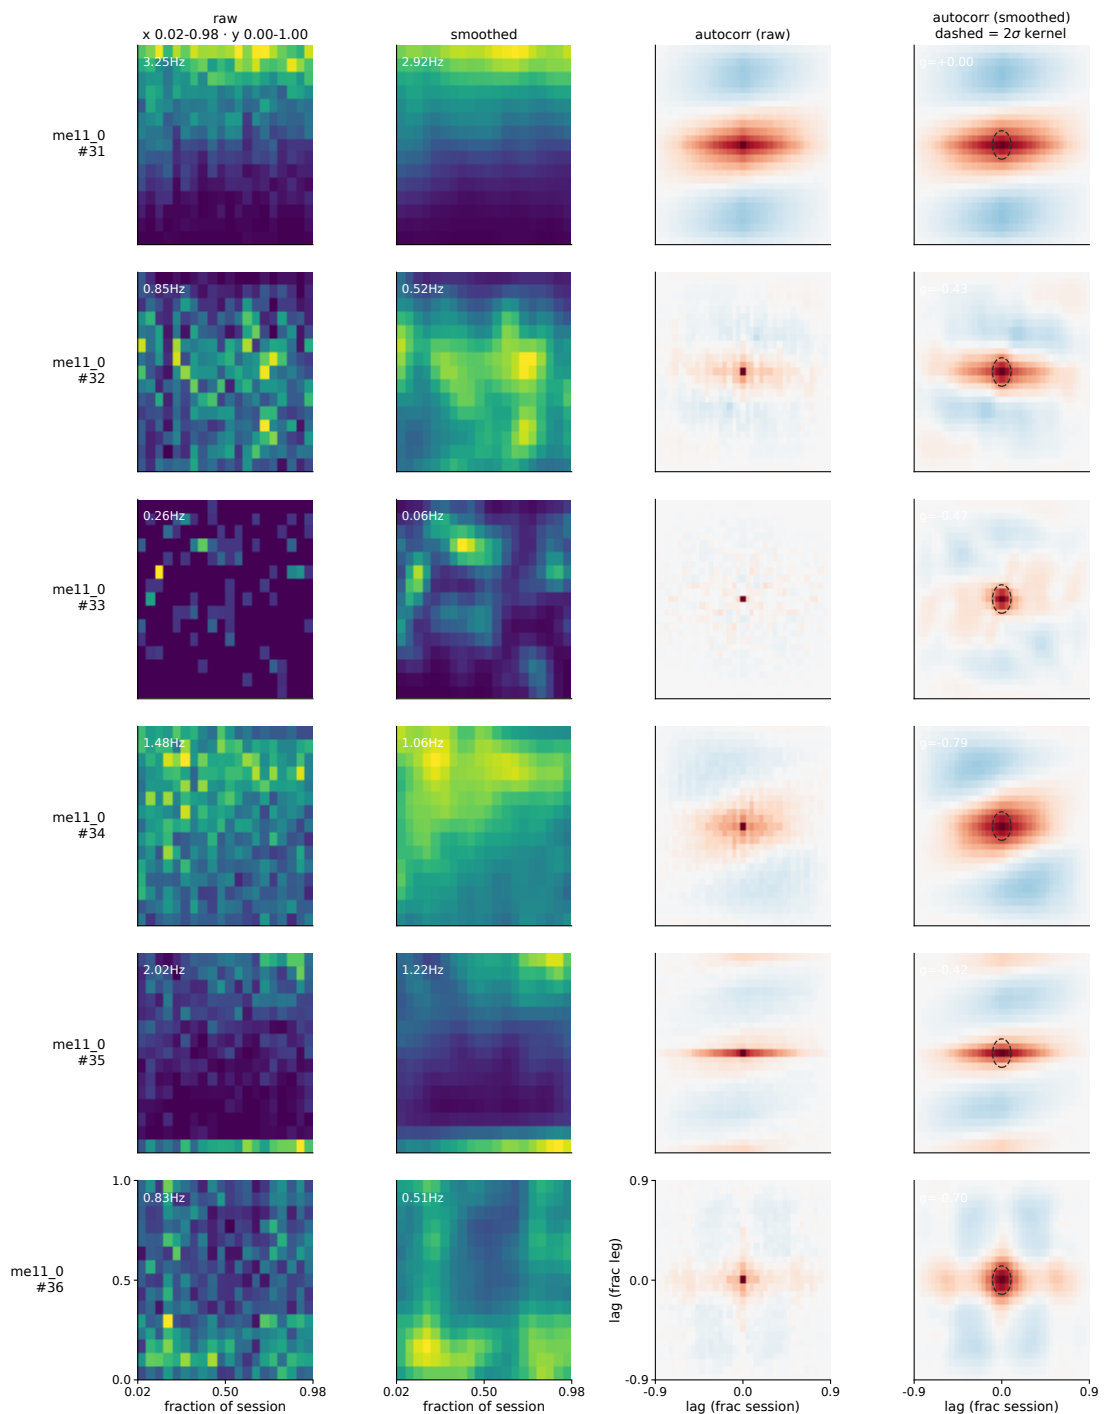

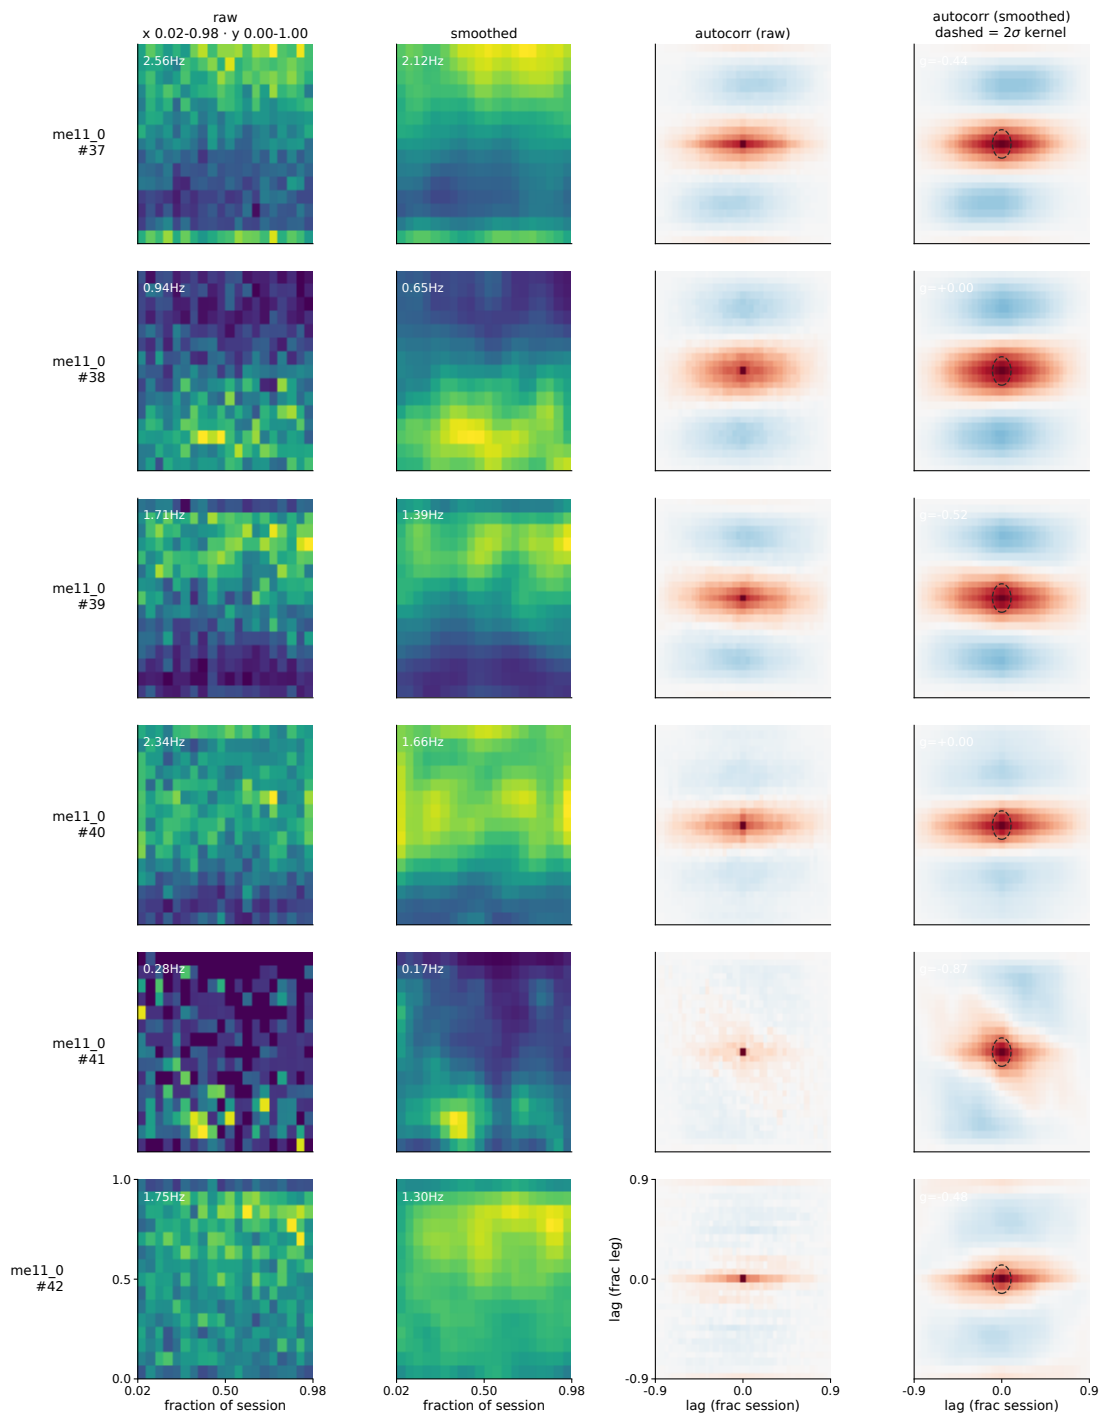


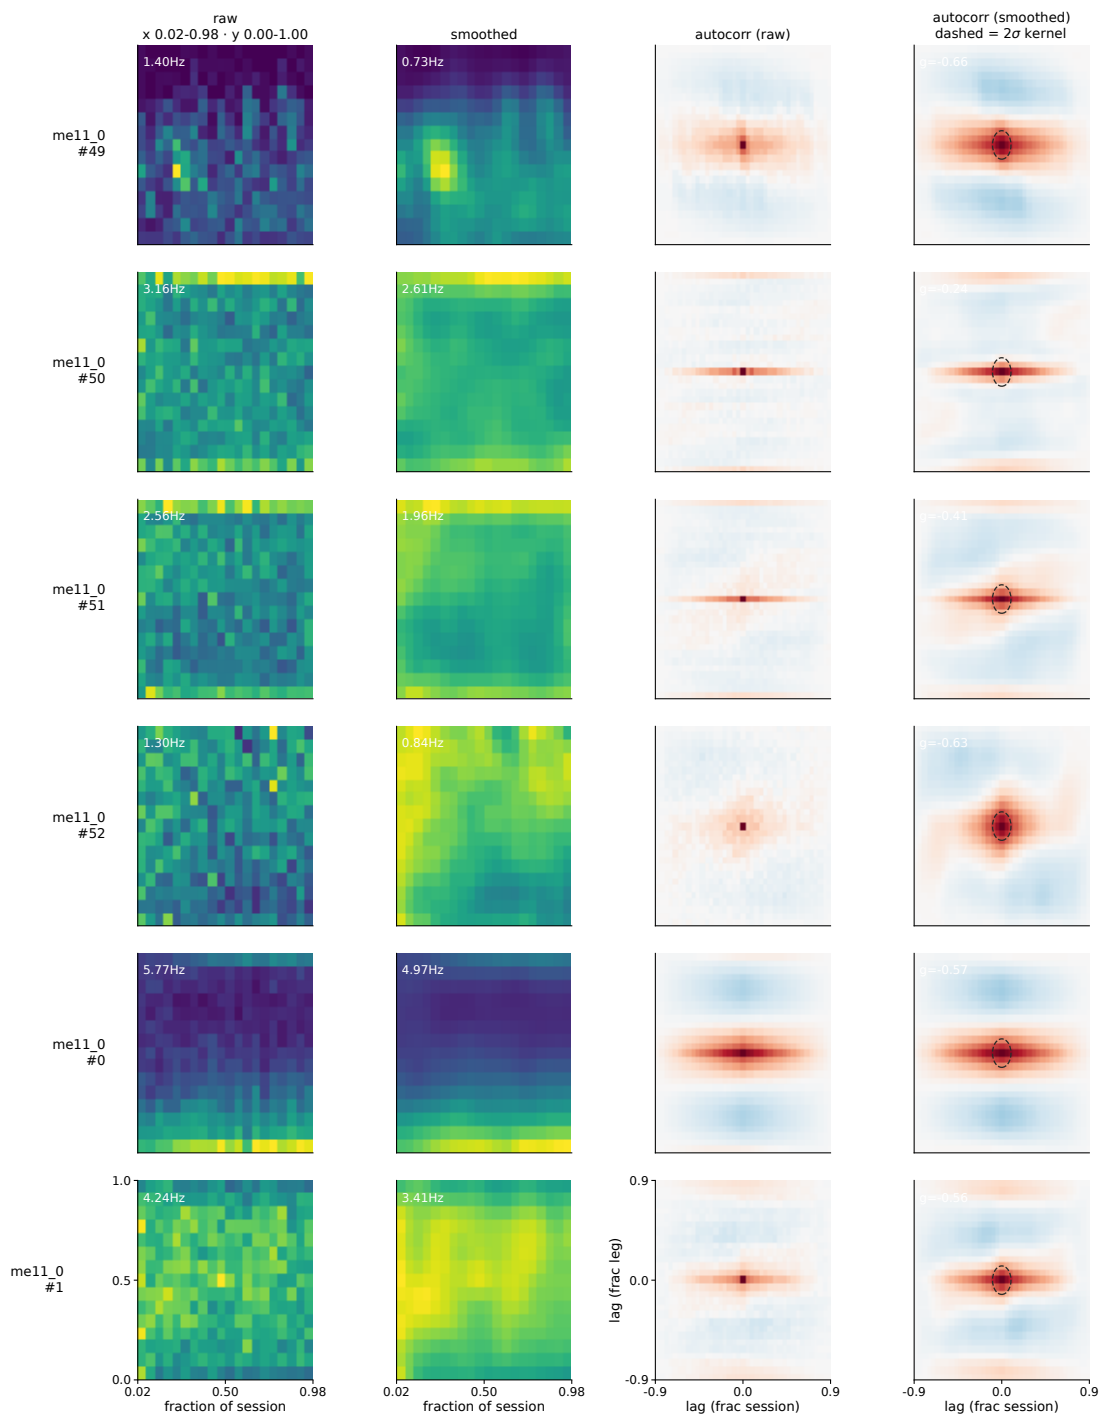

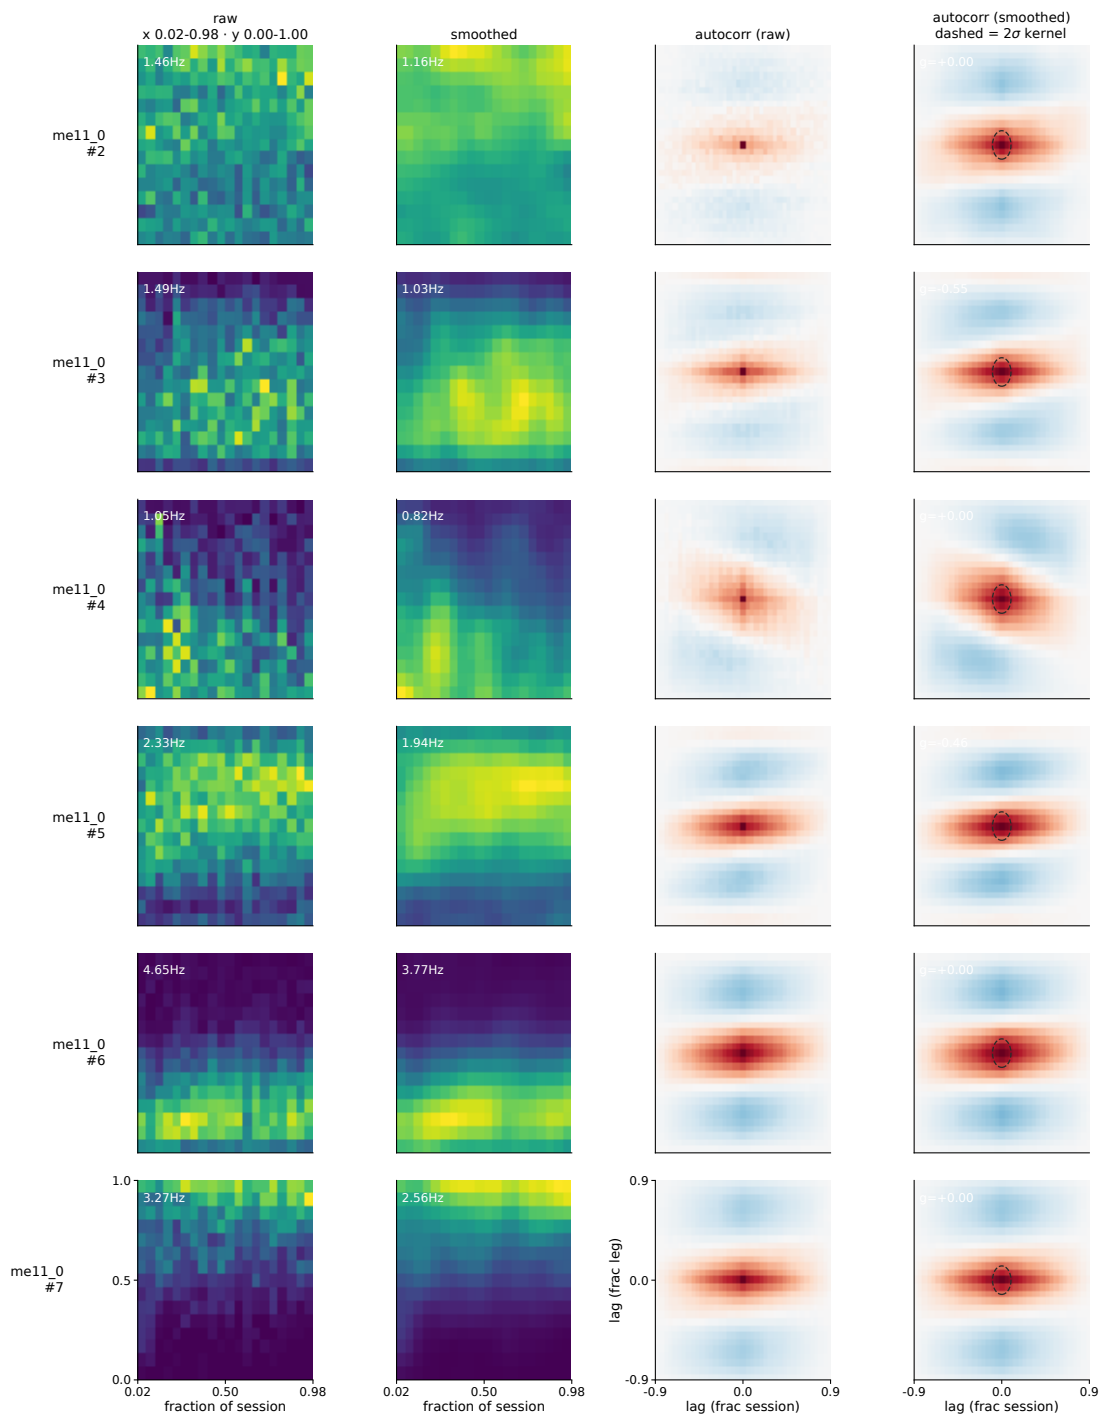


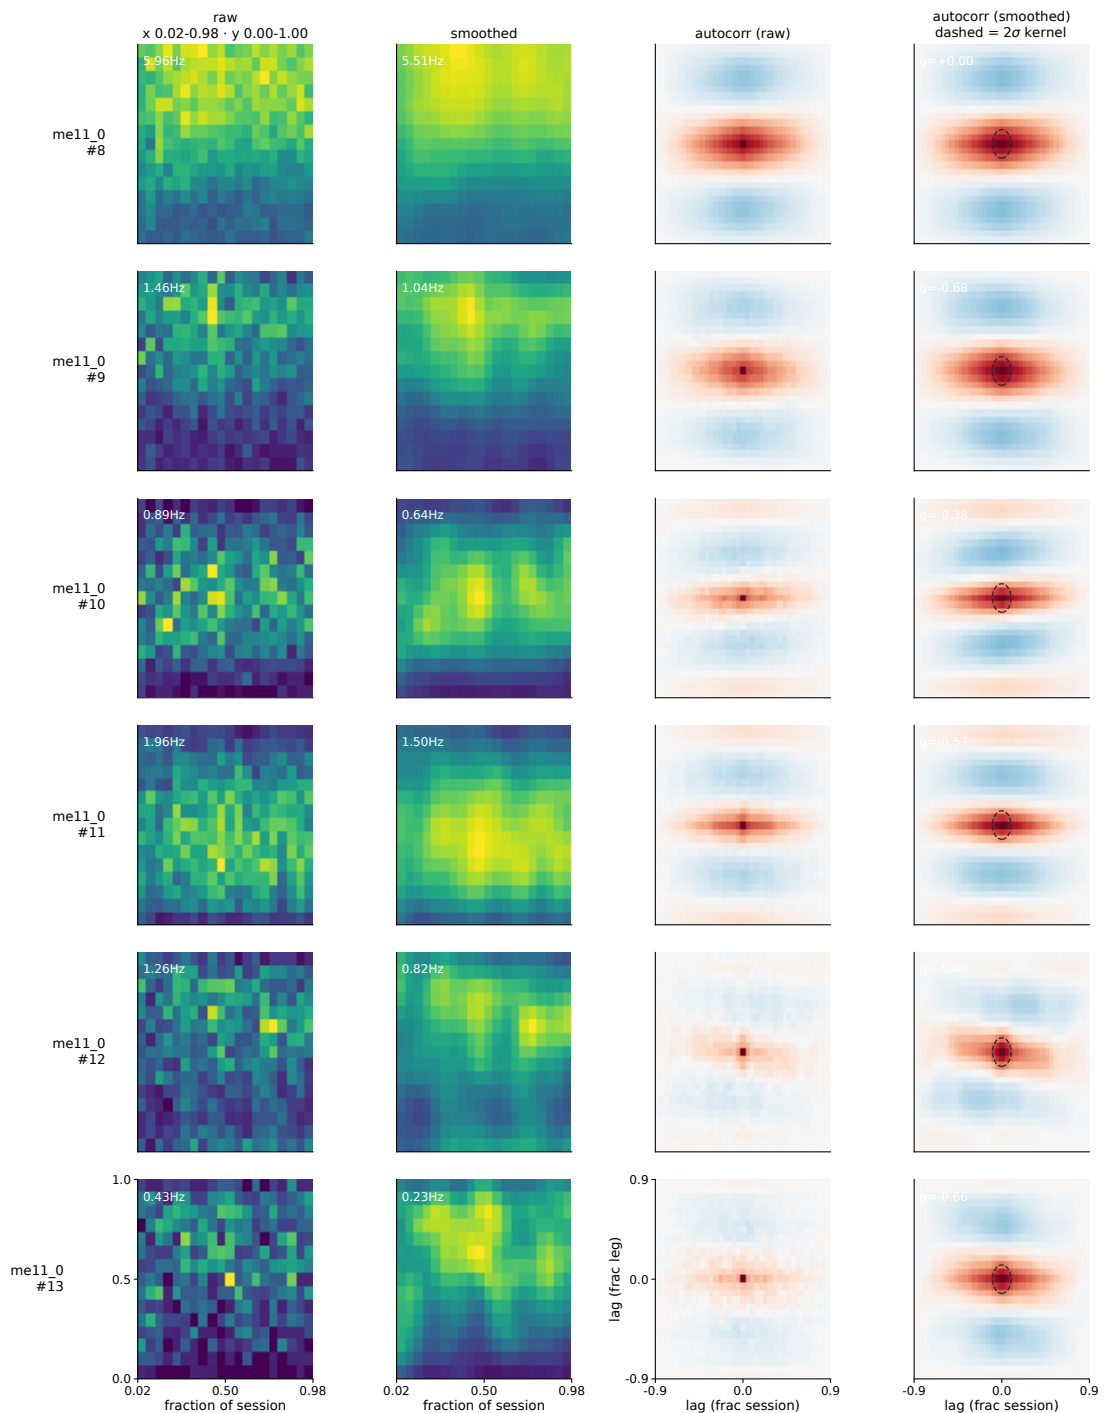



normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1158-1163 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

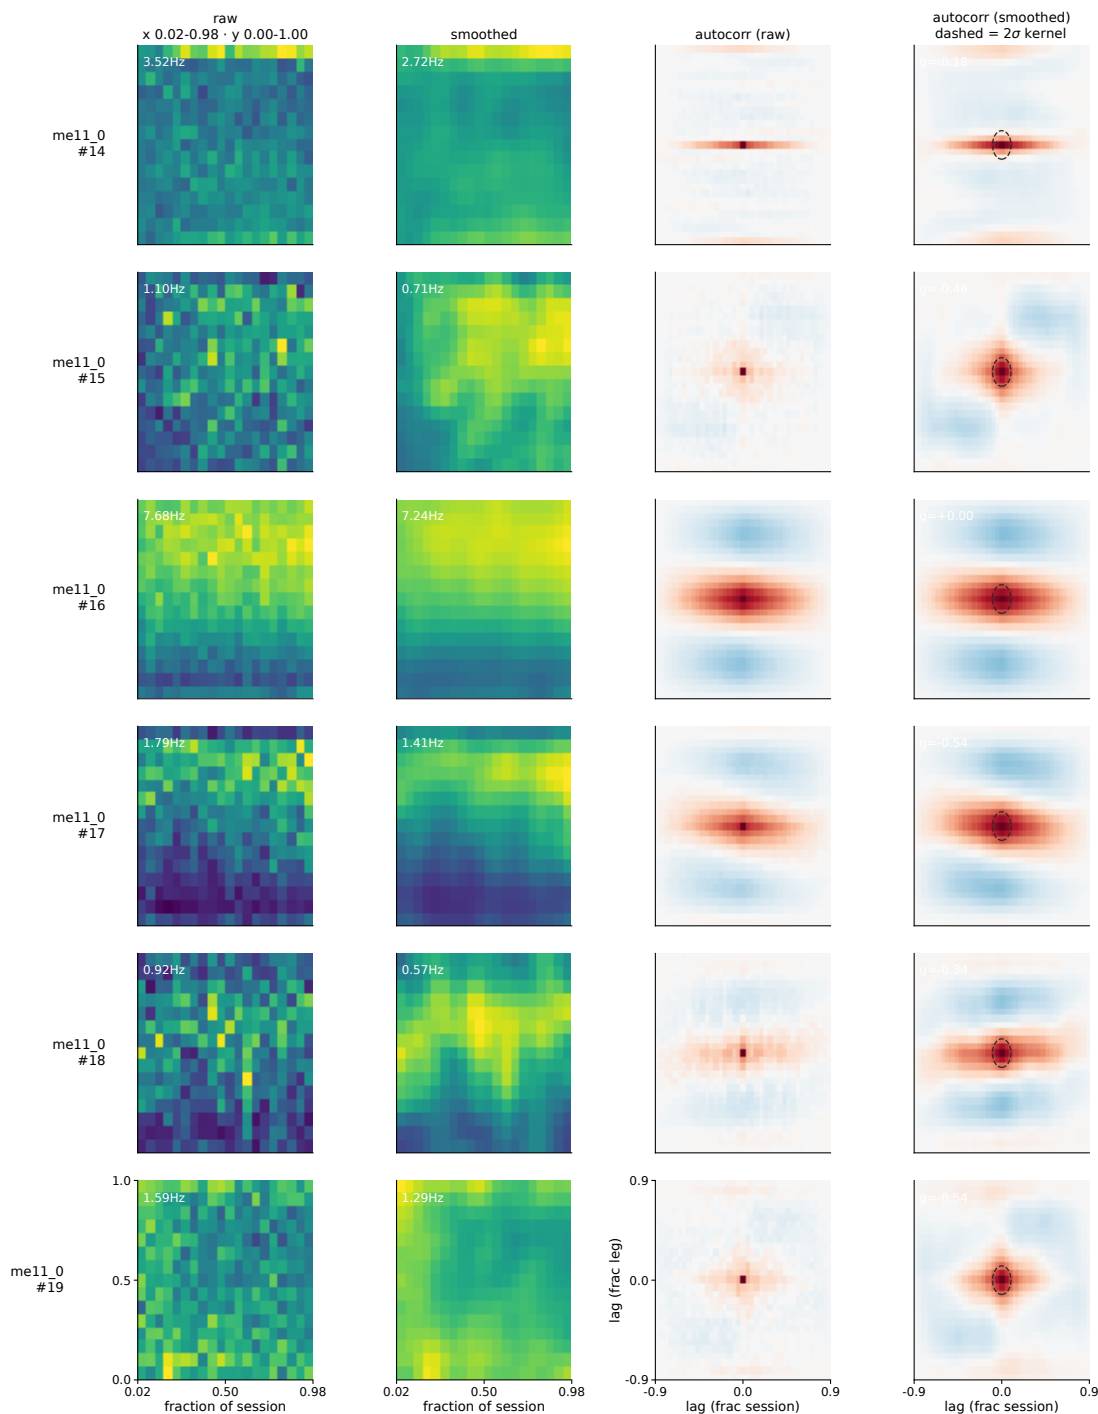



normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1164-1169 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

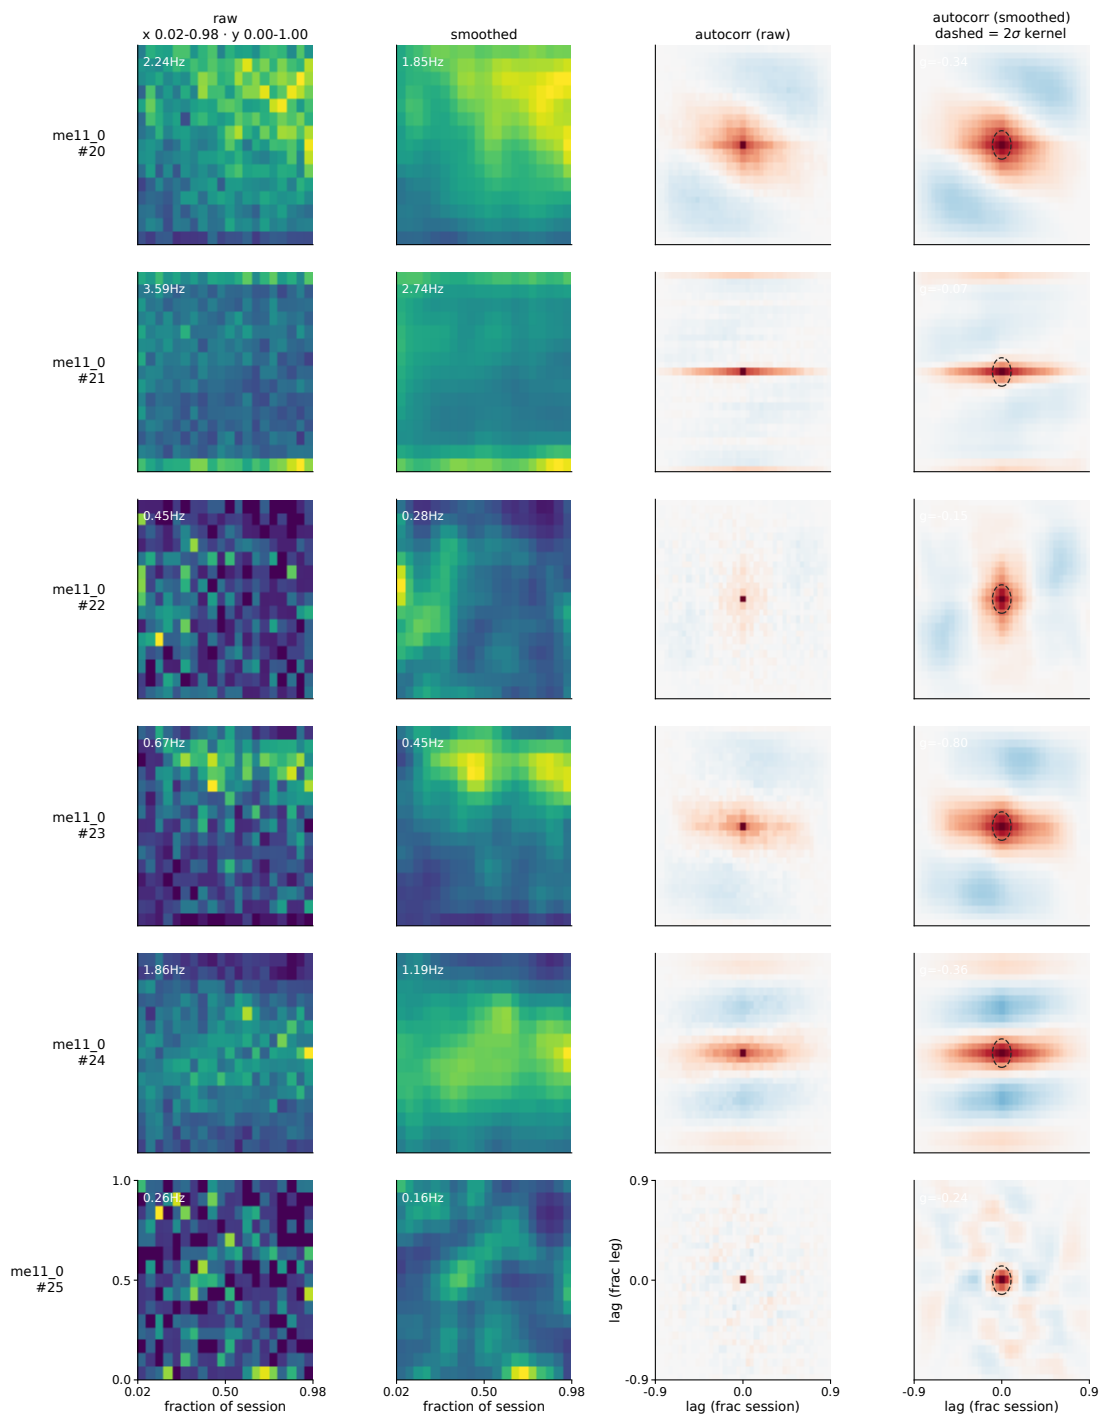


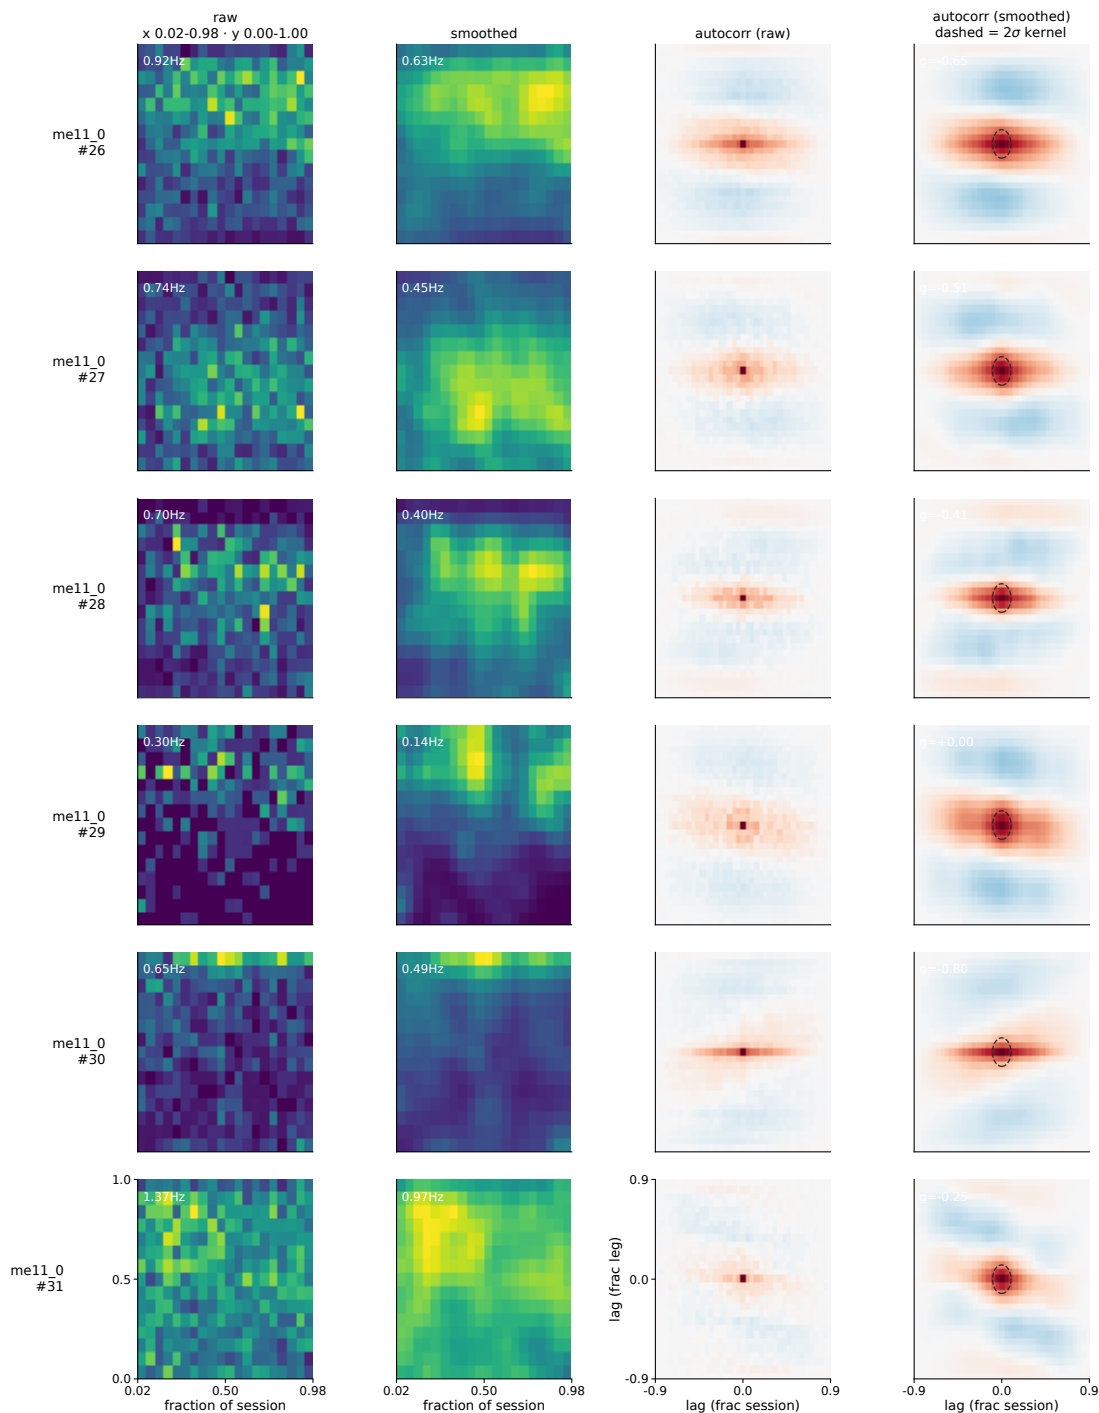


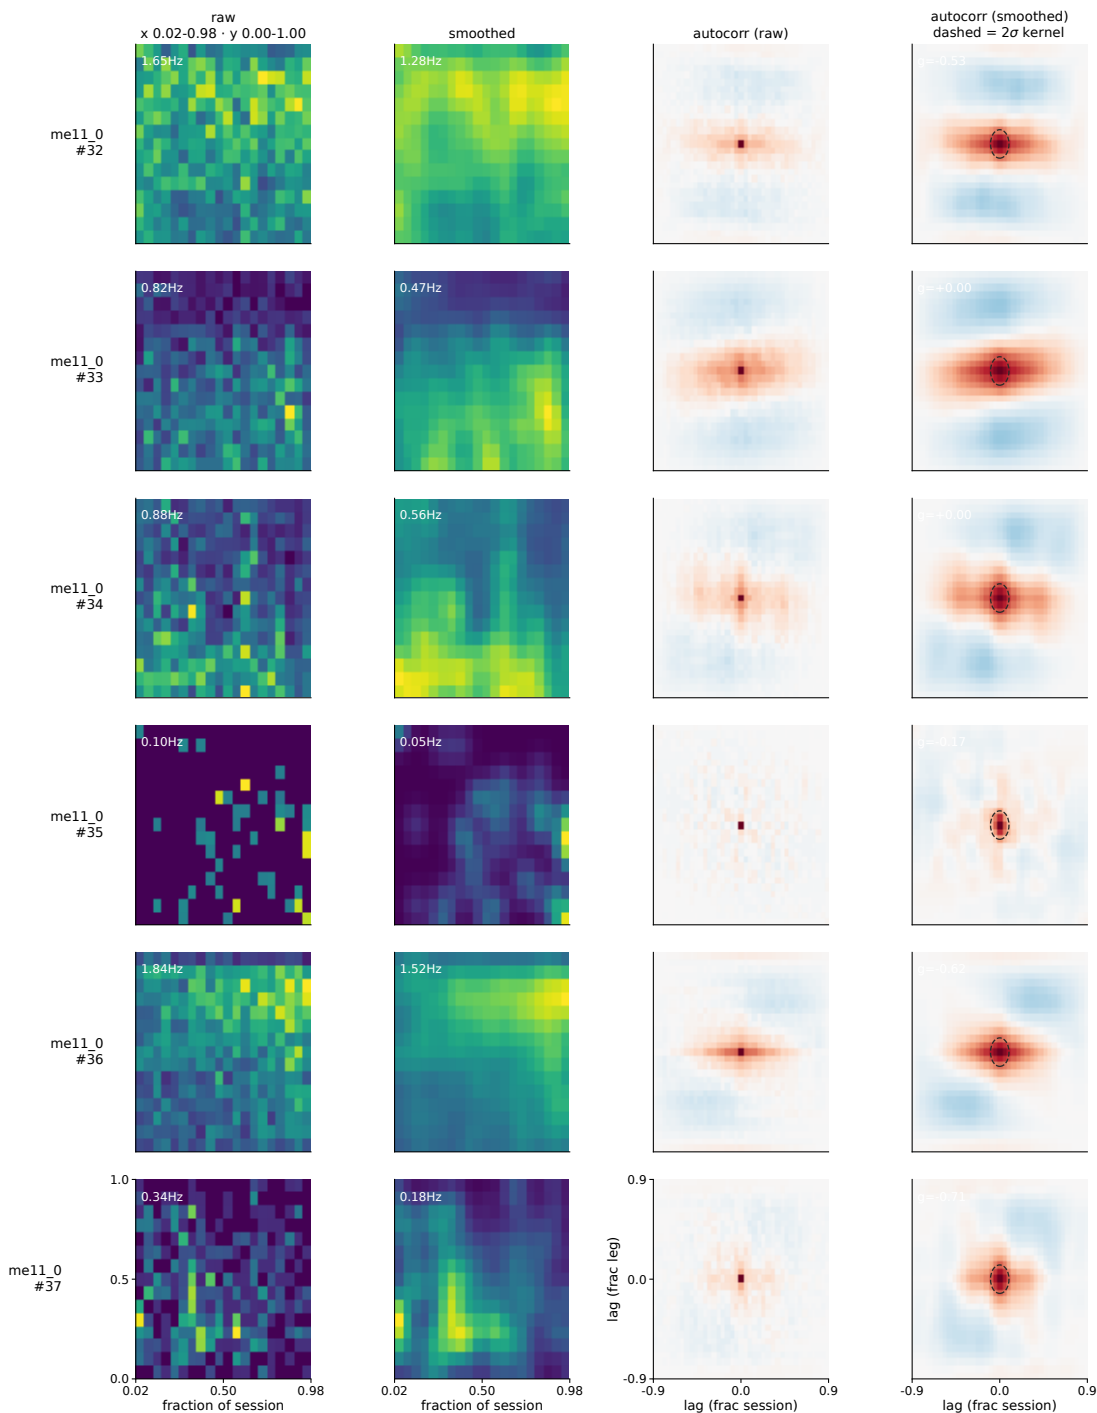


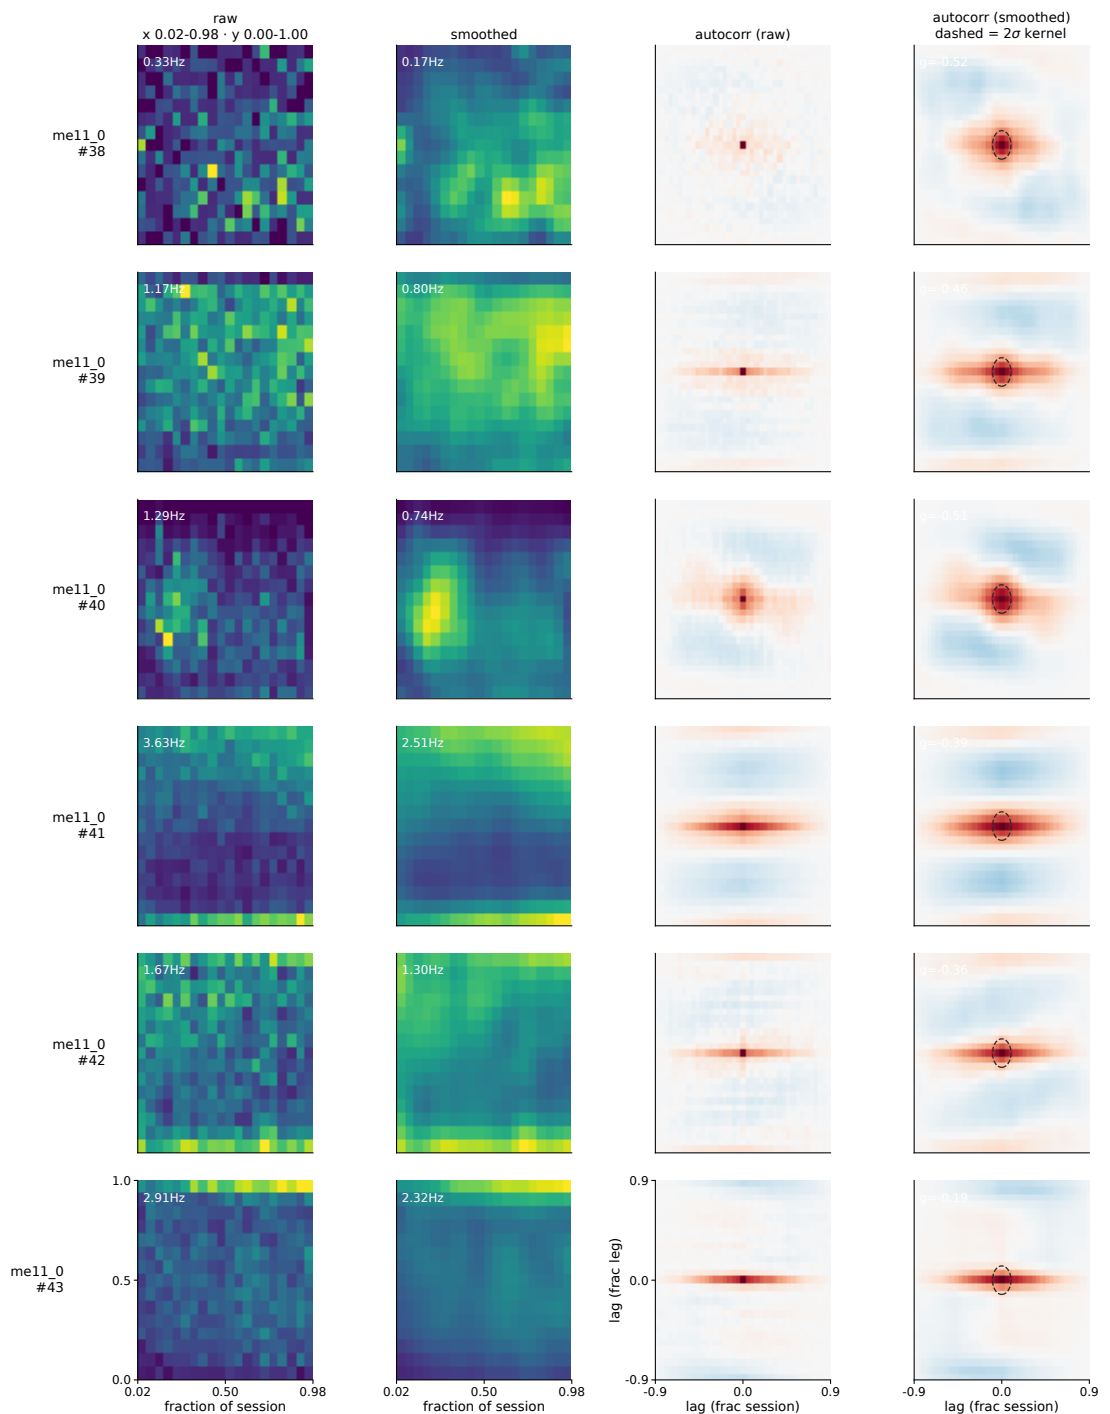


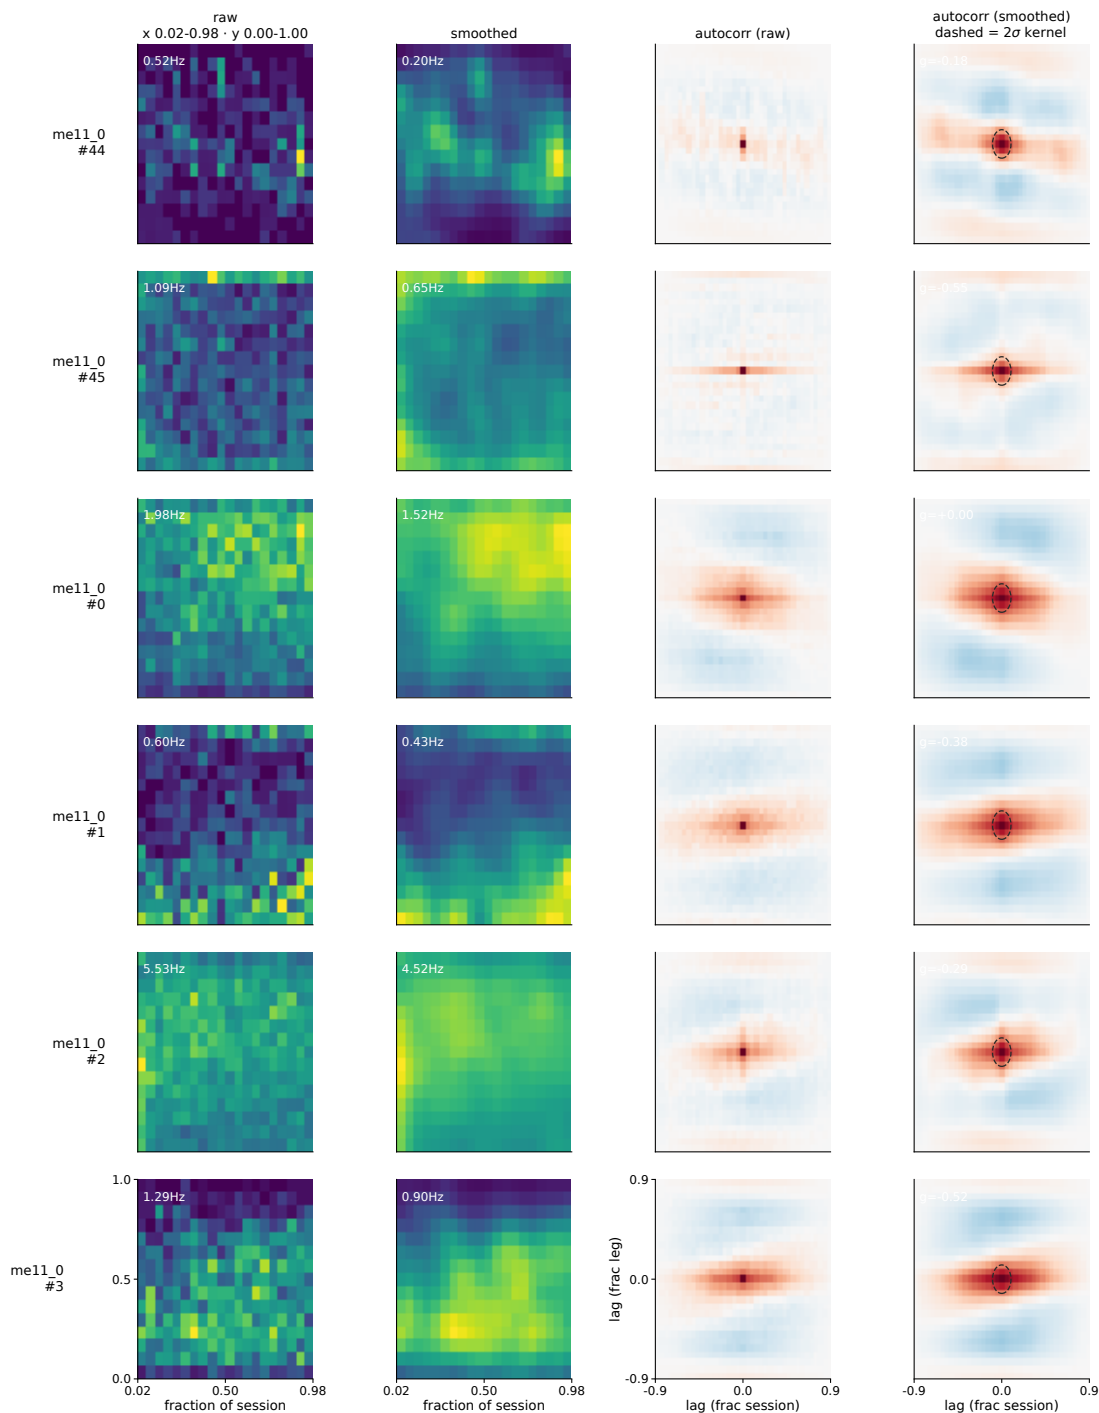


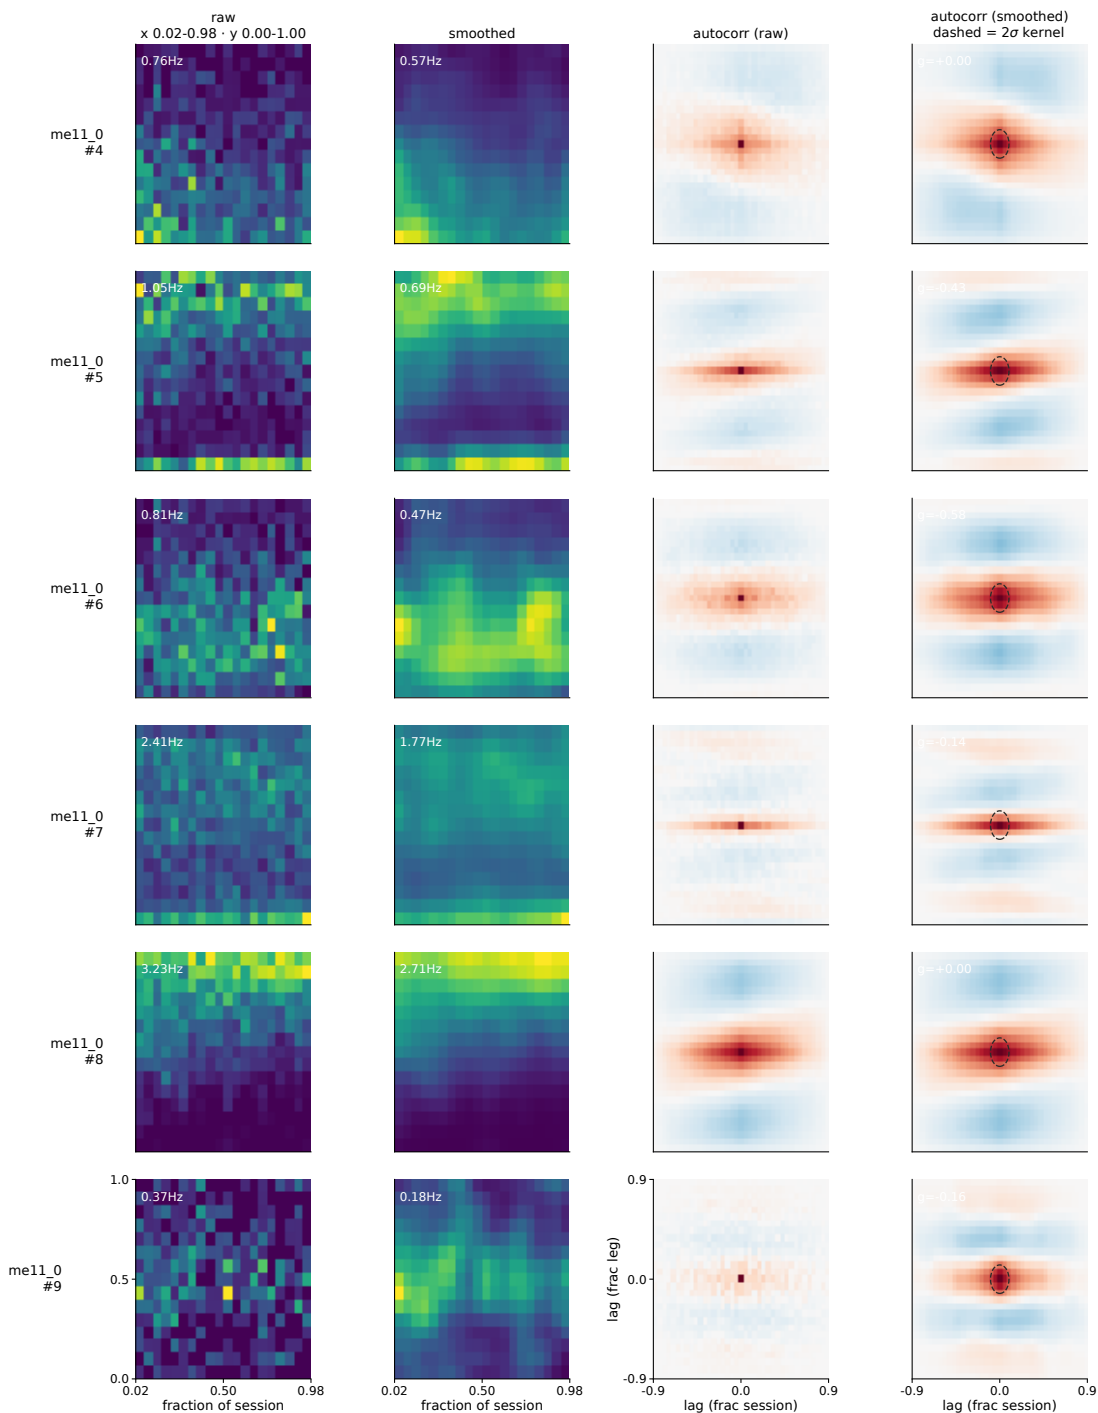


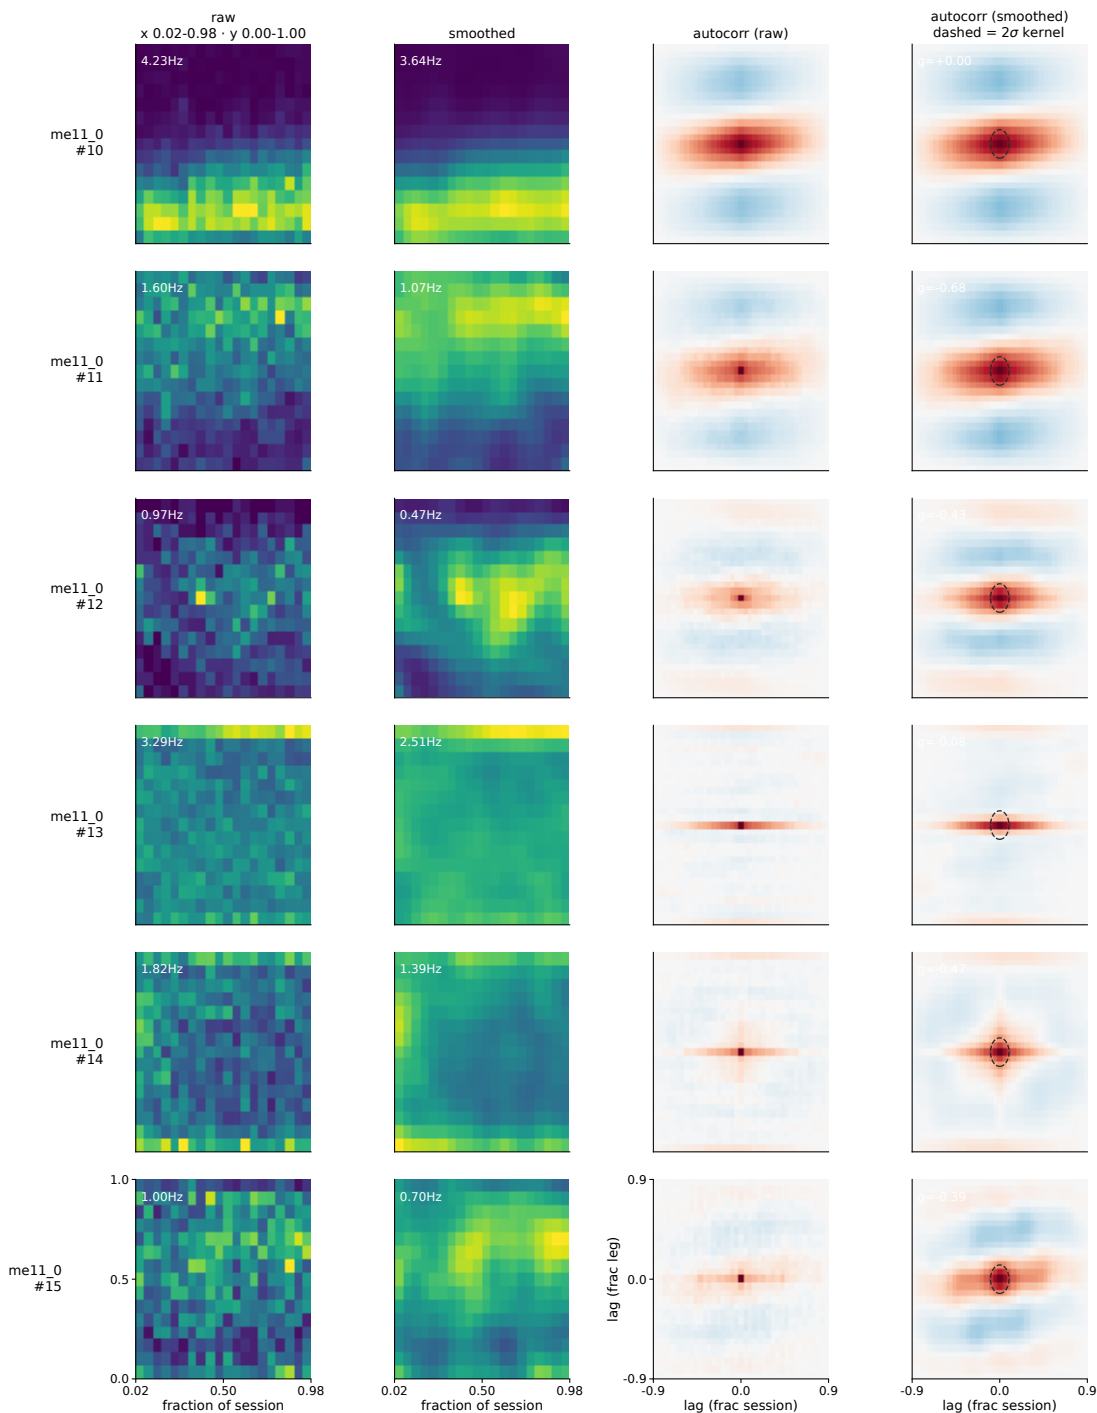


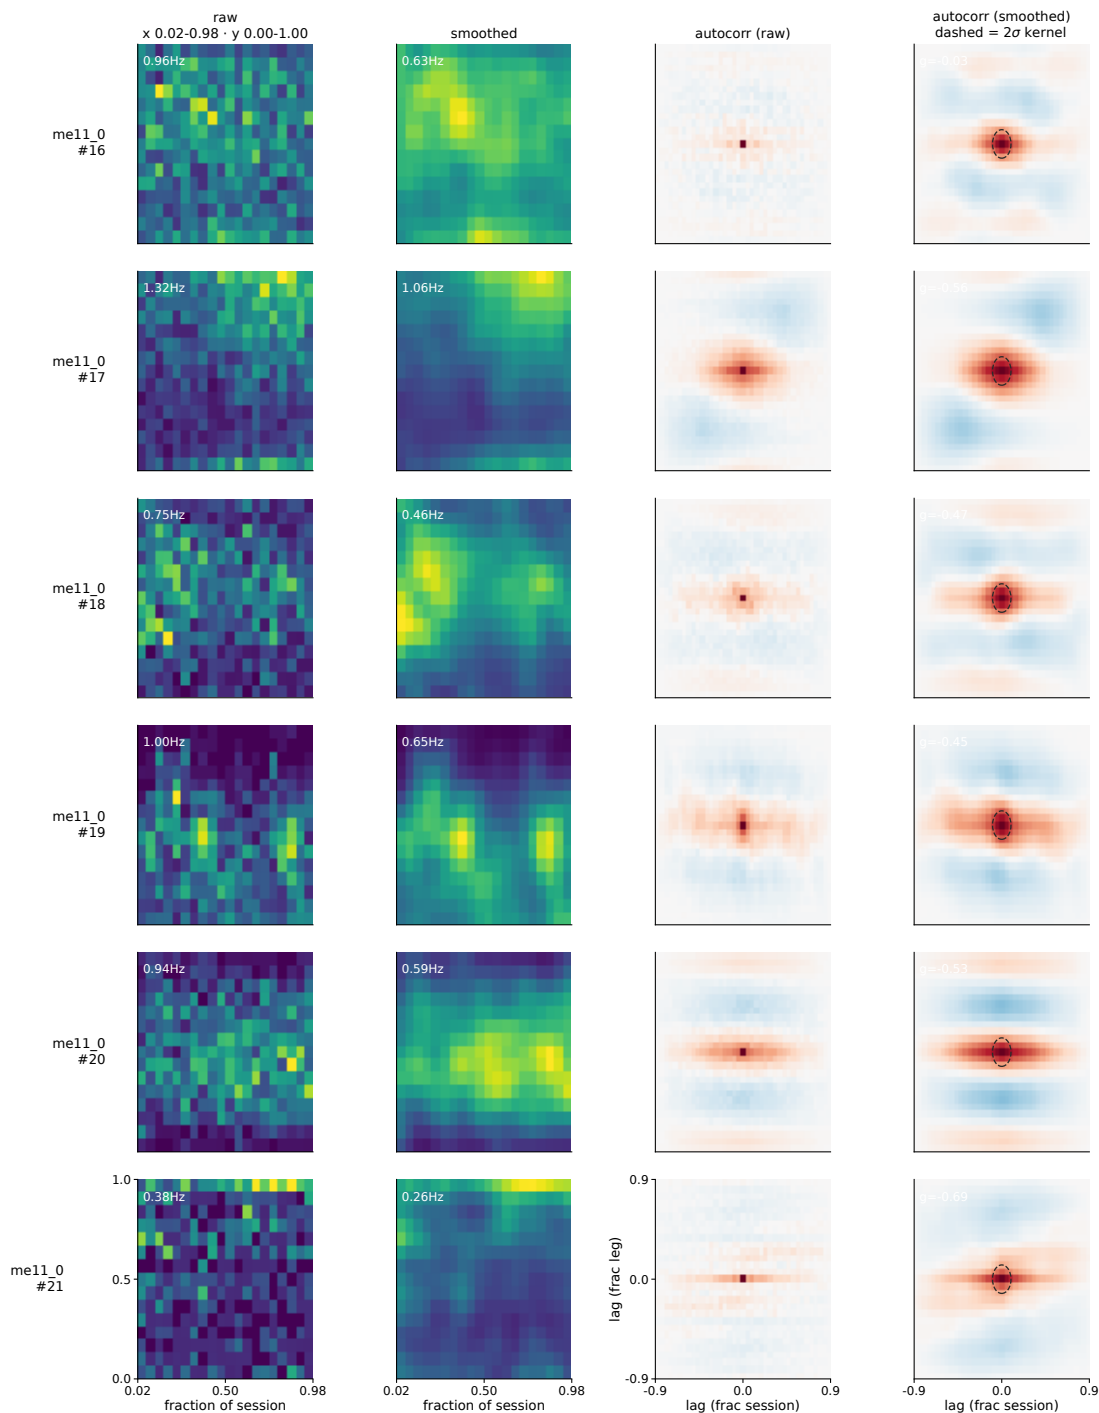

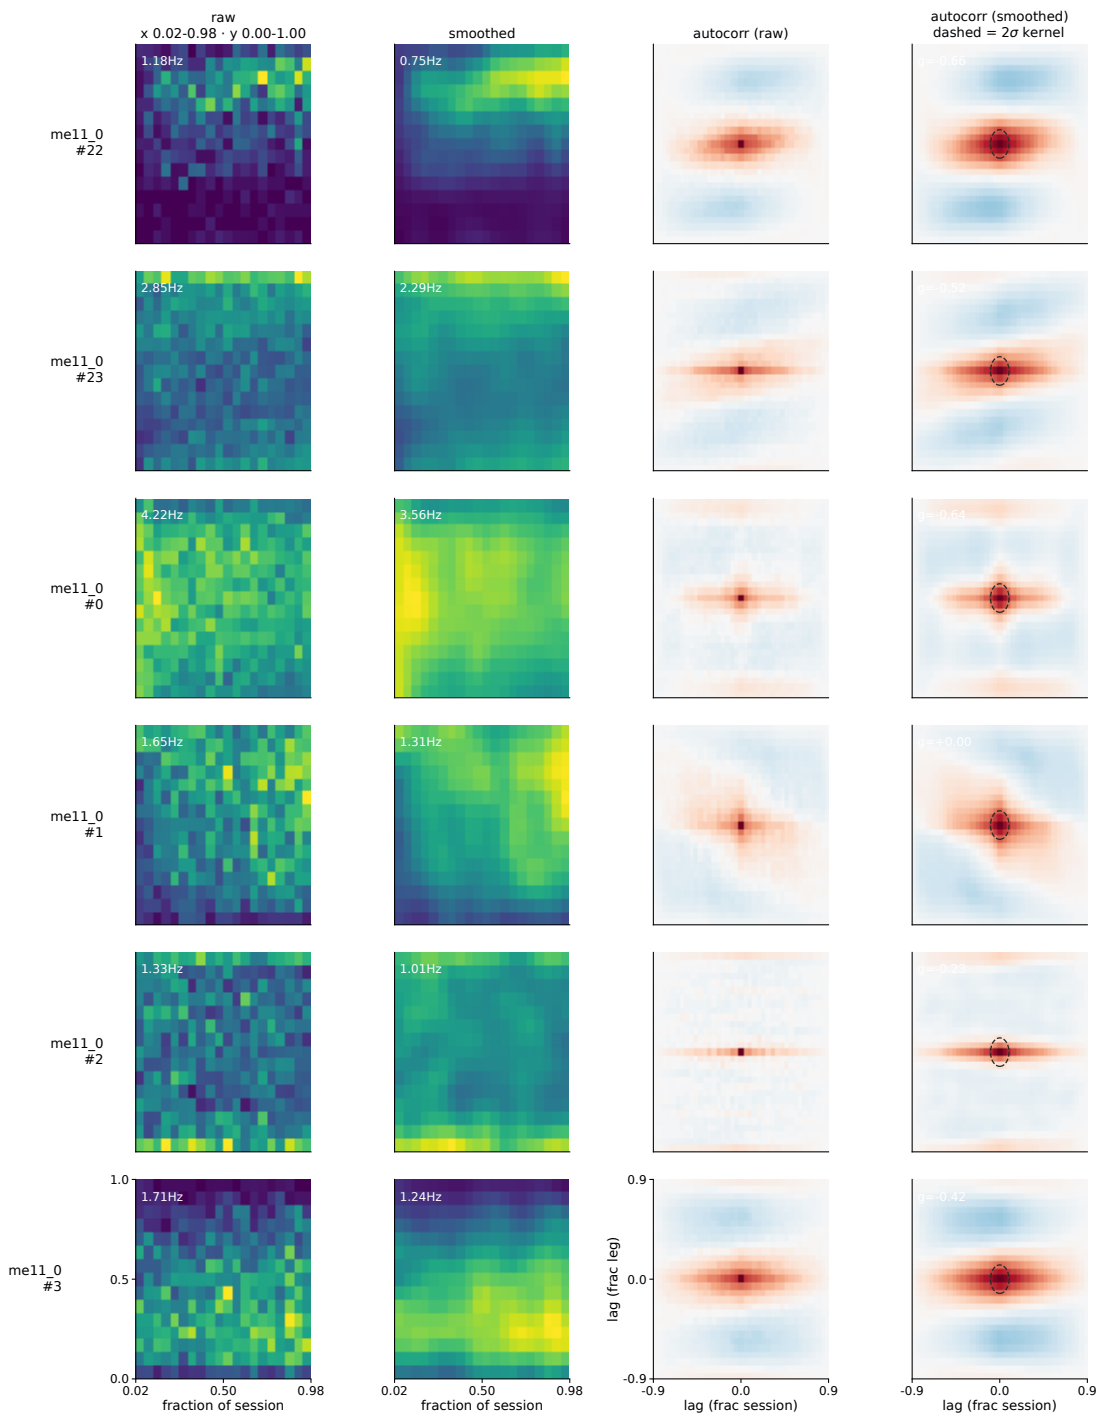


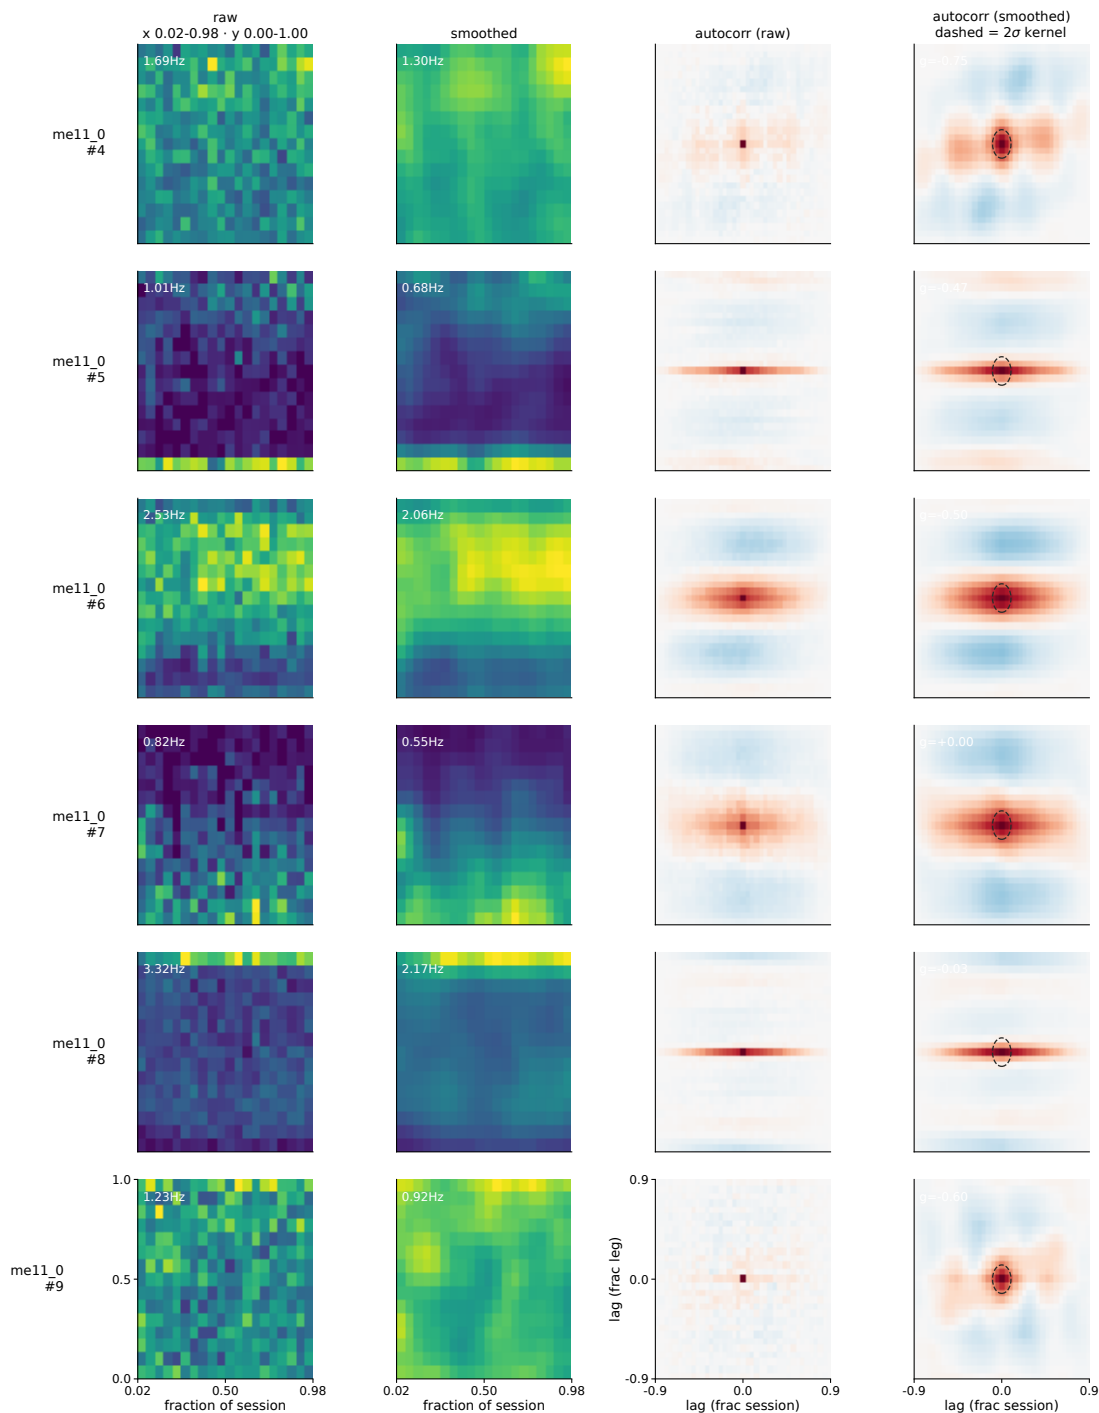

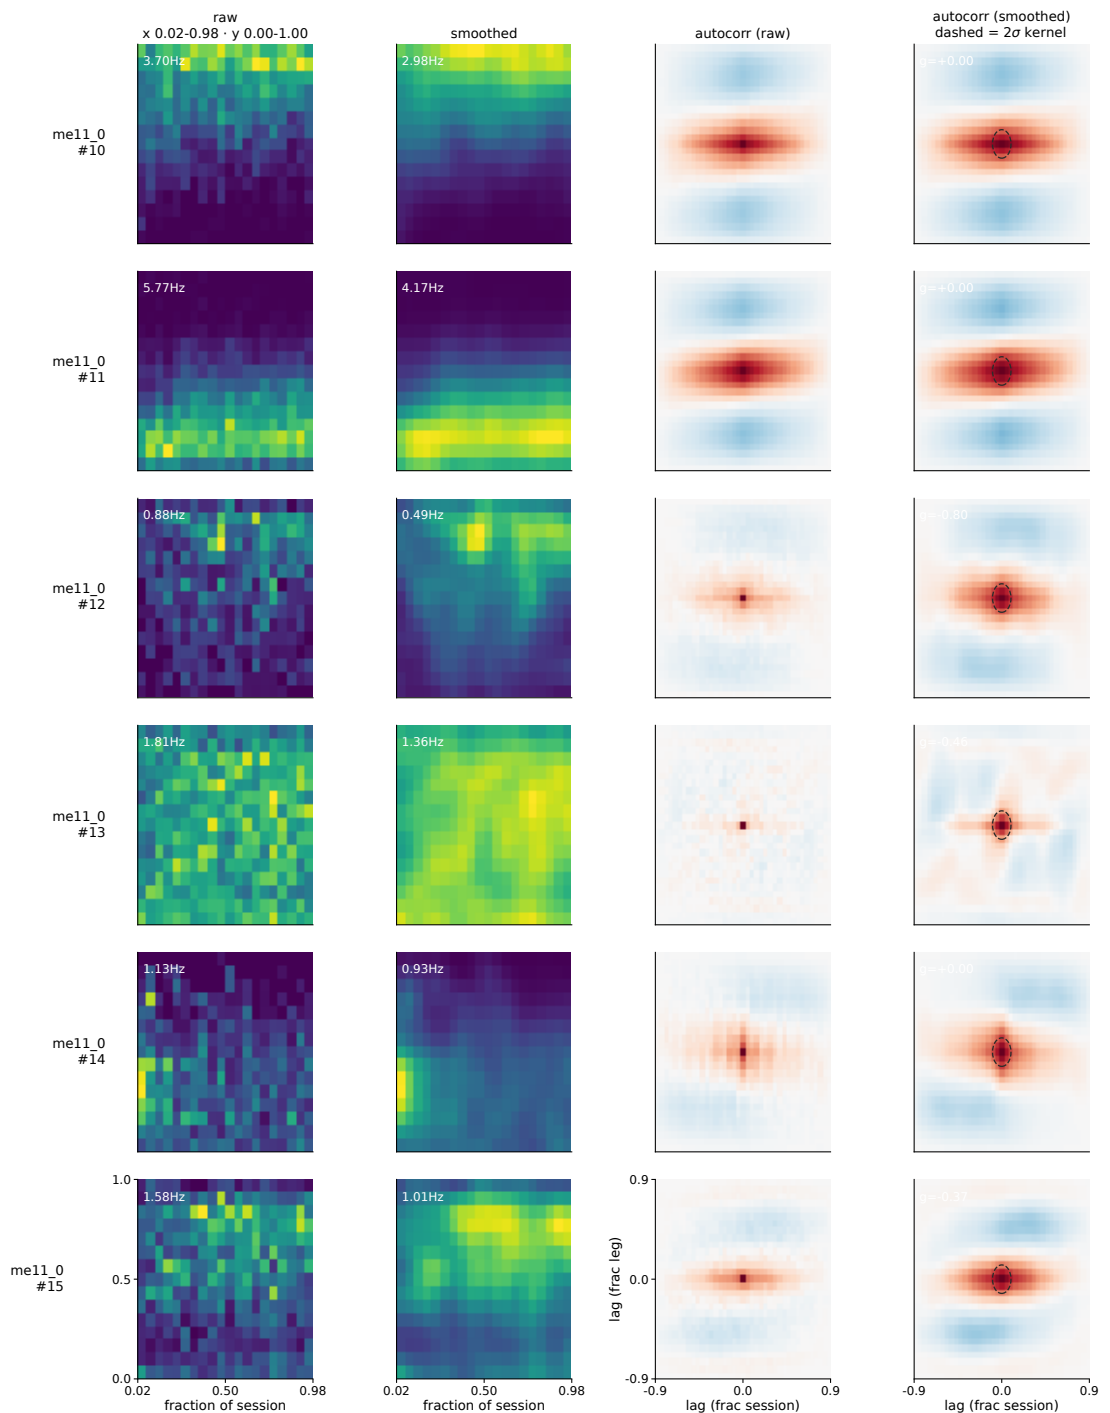

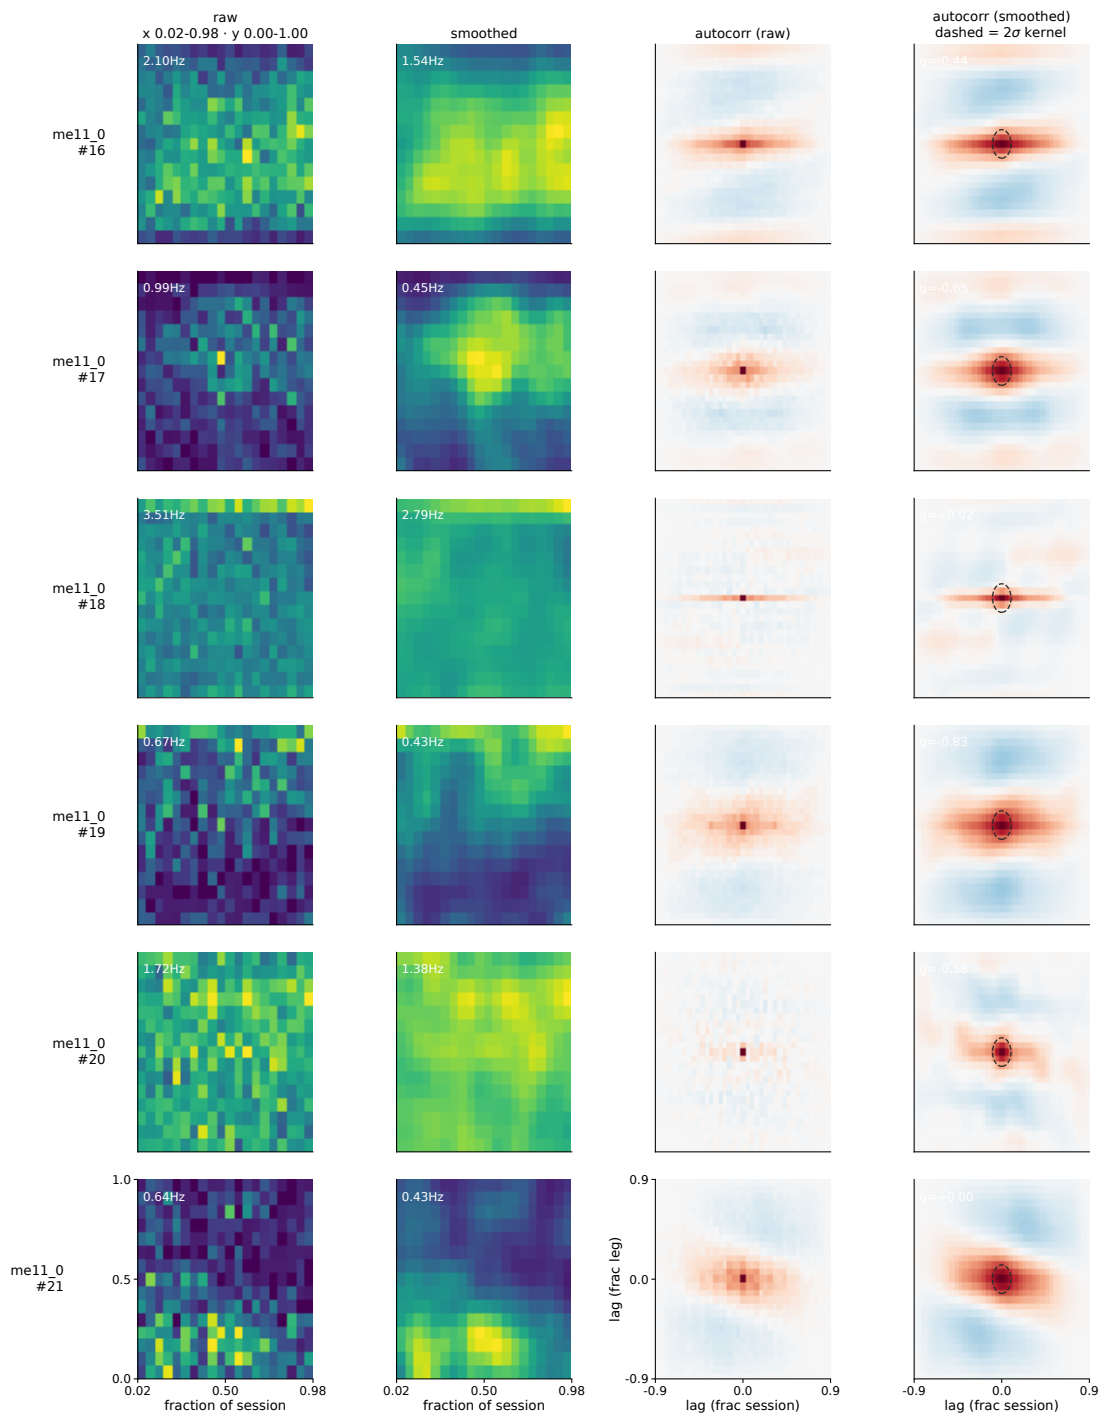

normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1236-1241 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

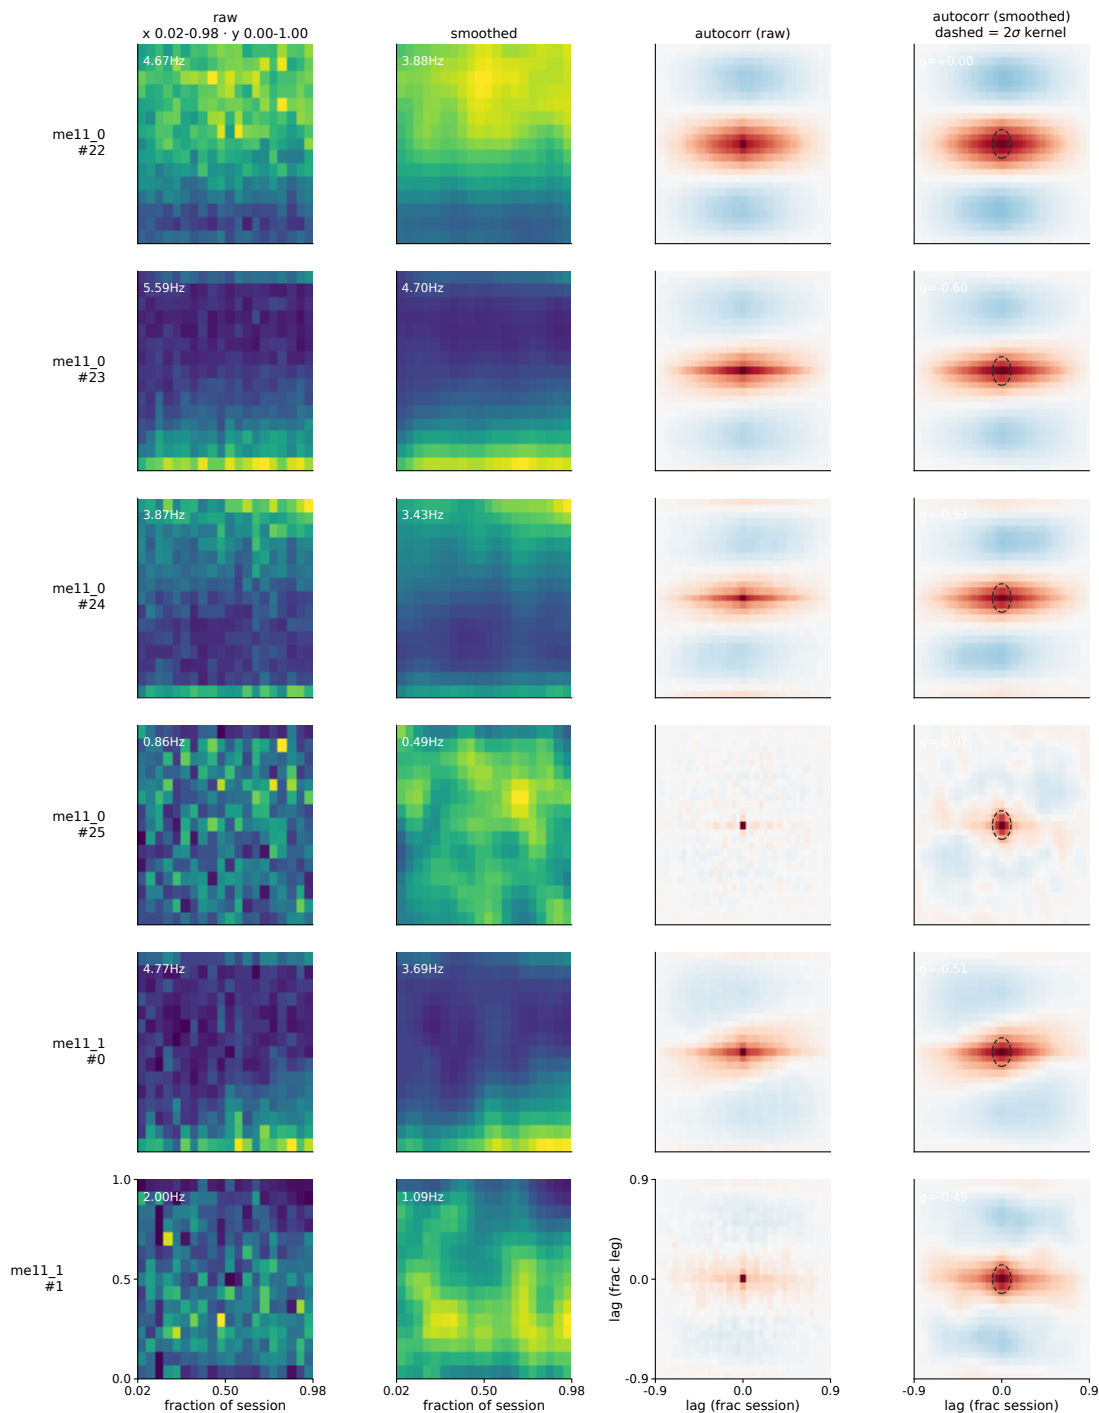

normalised | maps: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons 1242-1247 of 1252
raw beside smoothed because smoothing creates structure; dashed ellipse = kernel-dominated lags; no null computed

