




aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

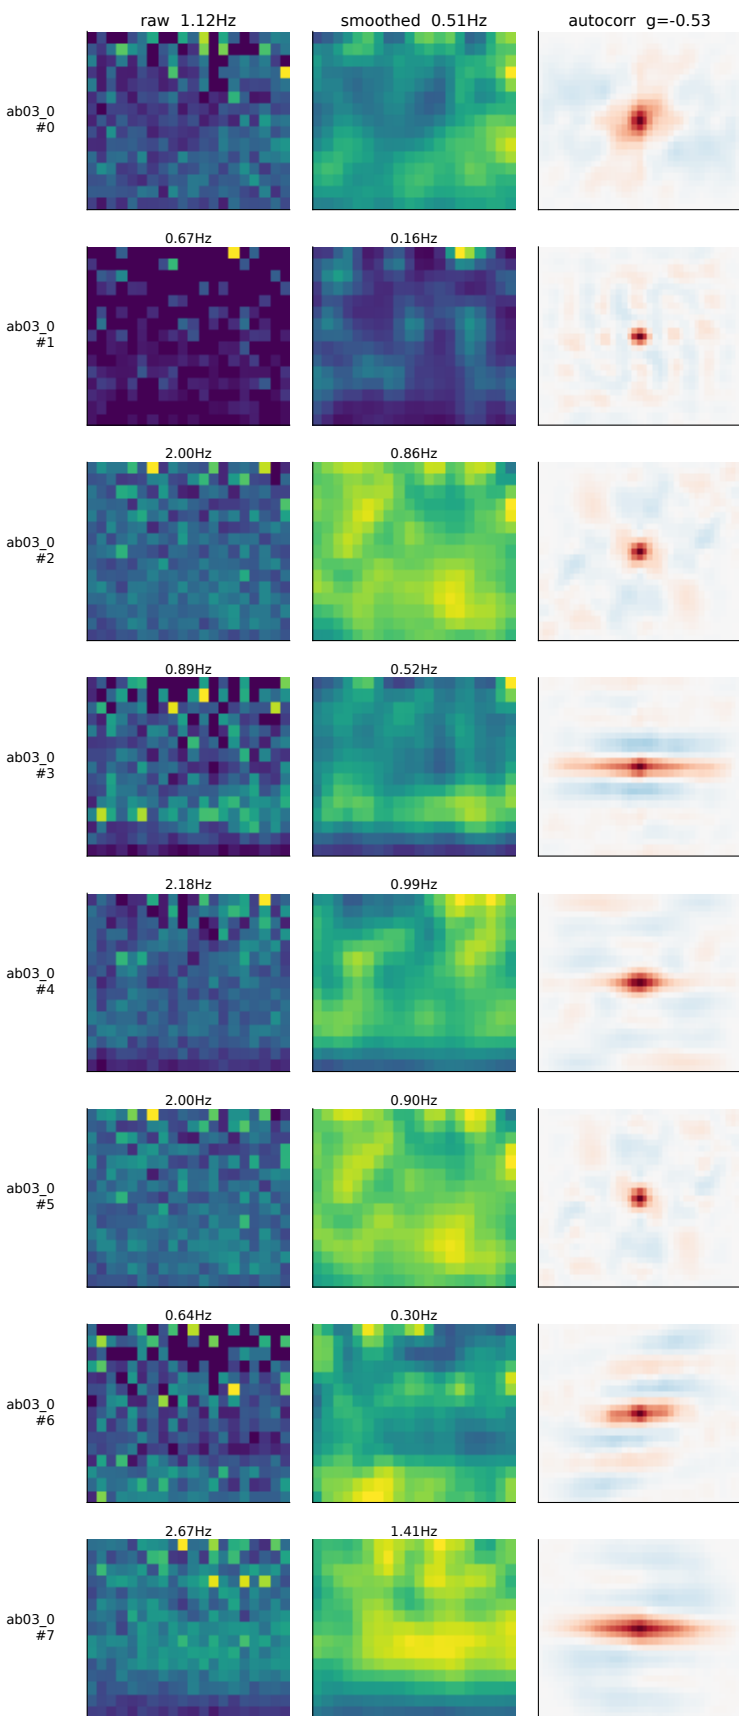


aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

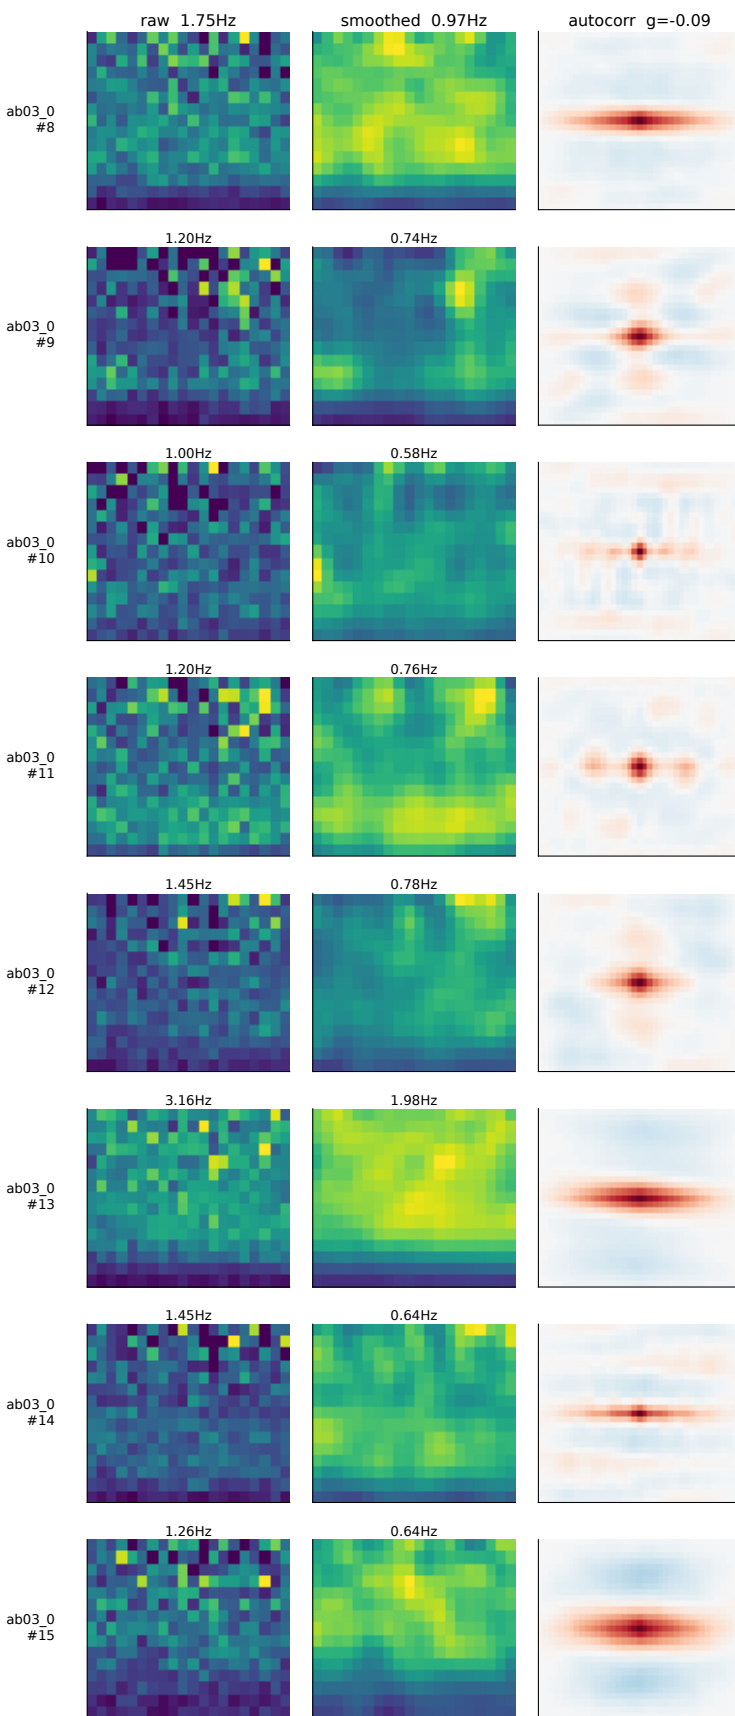


aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
own beside smoothed because smoothing can create structure; no reliability measure or null is co

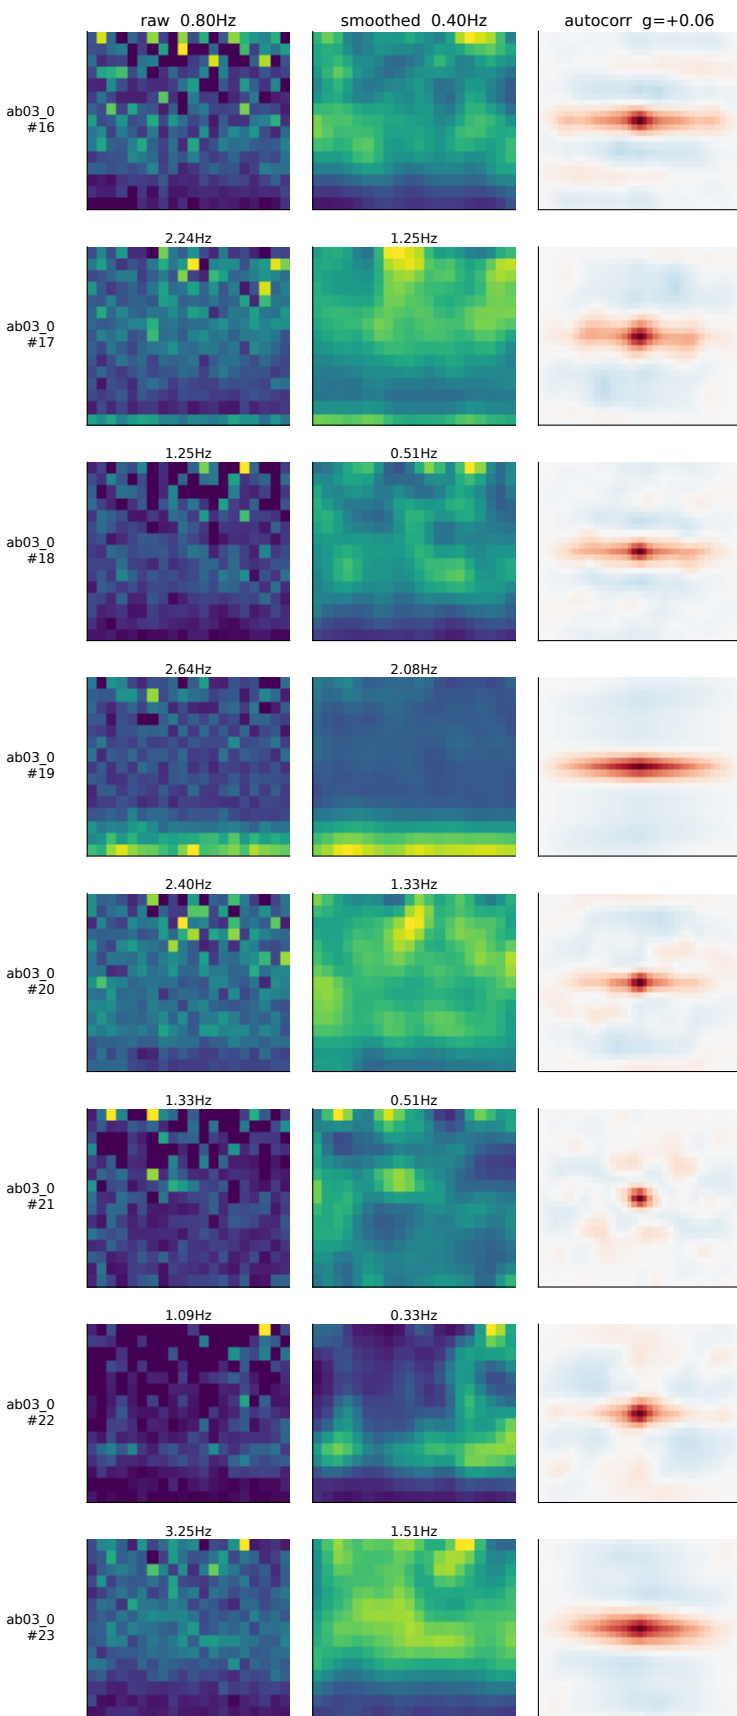


aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

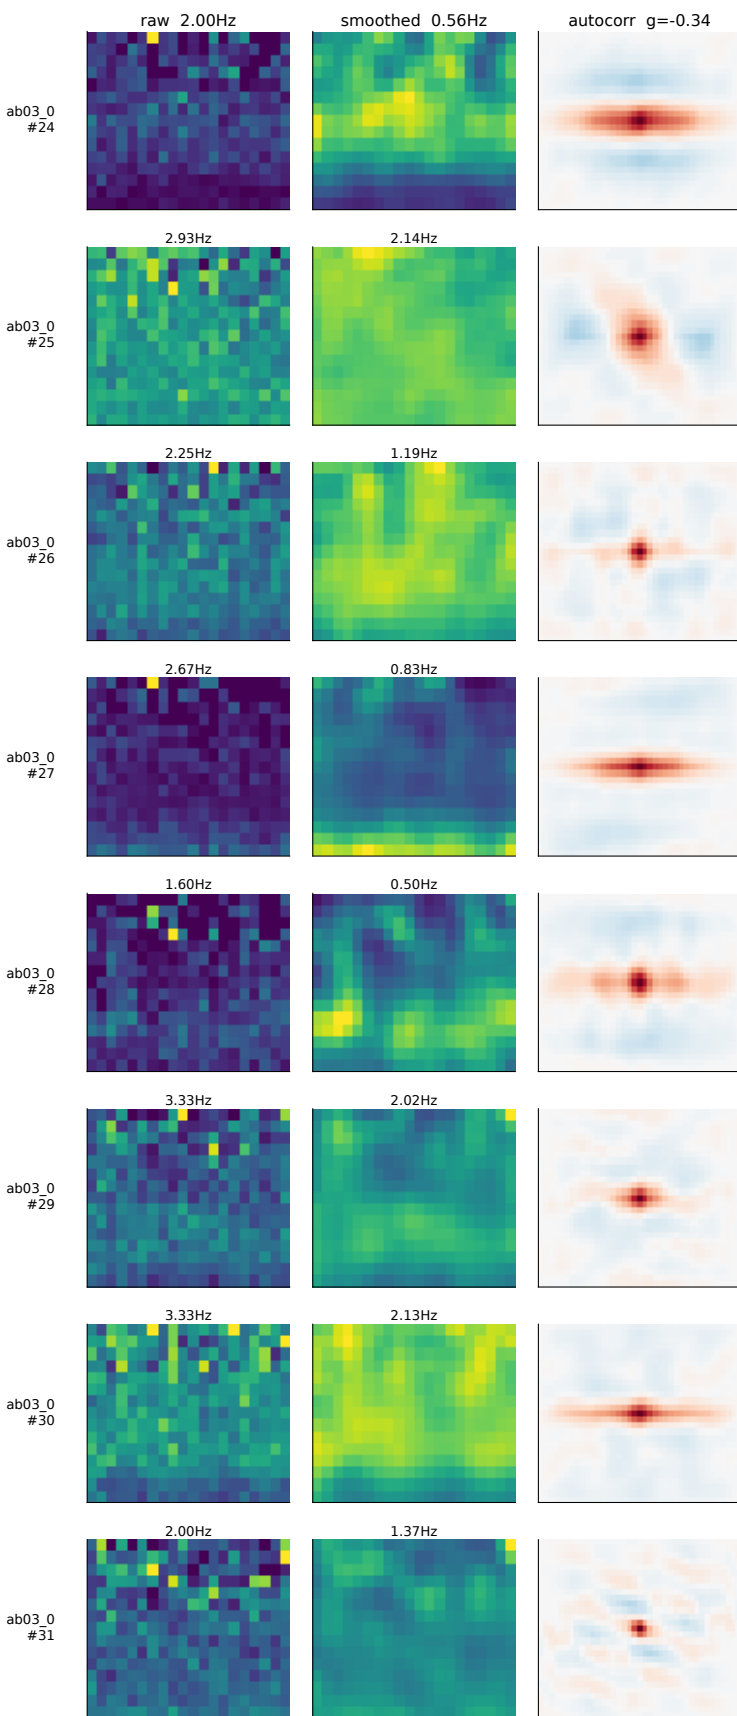


aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

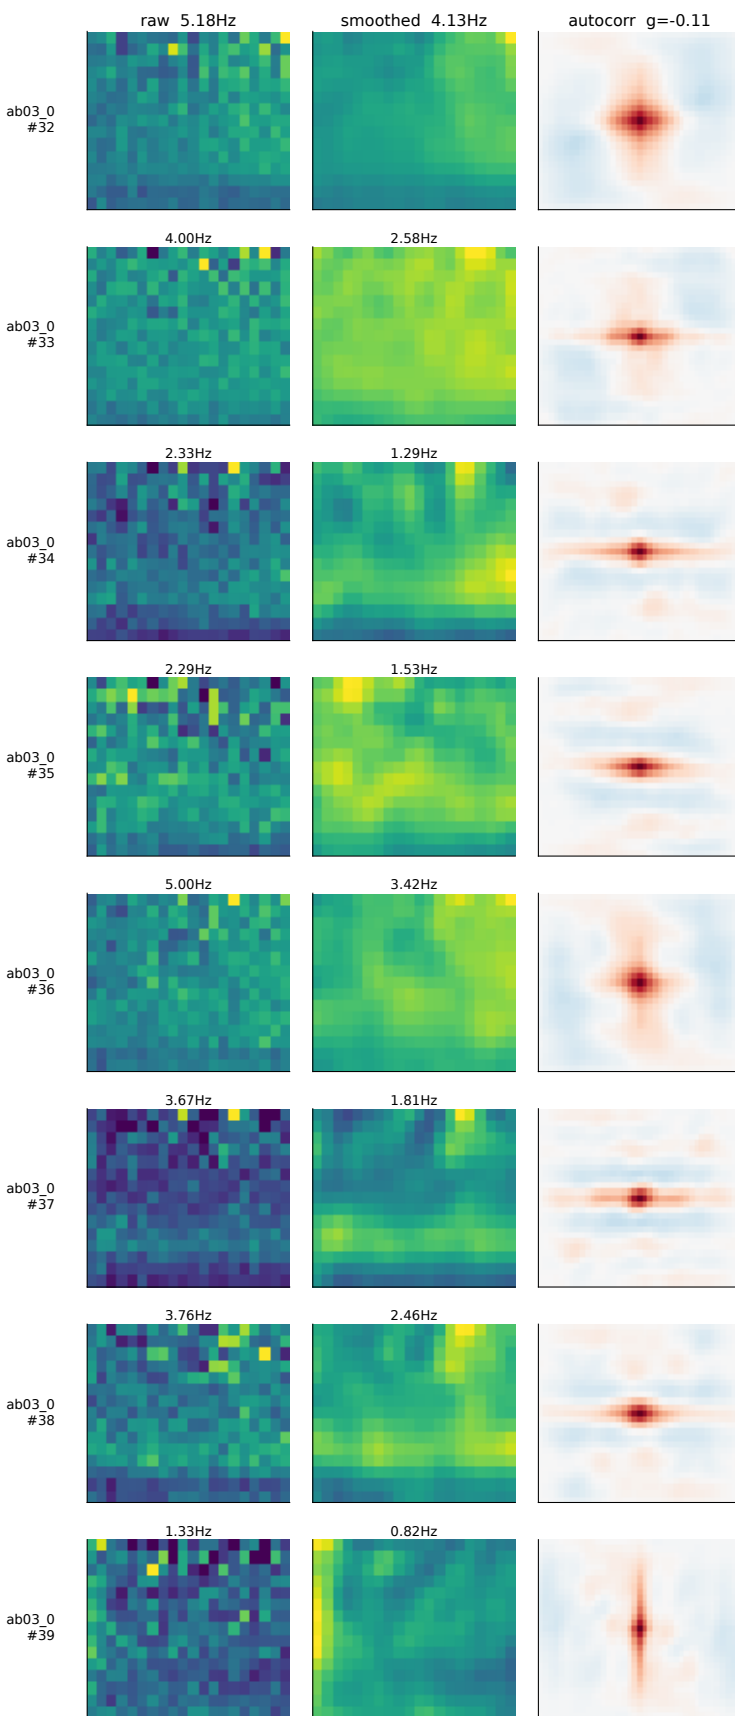


aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

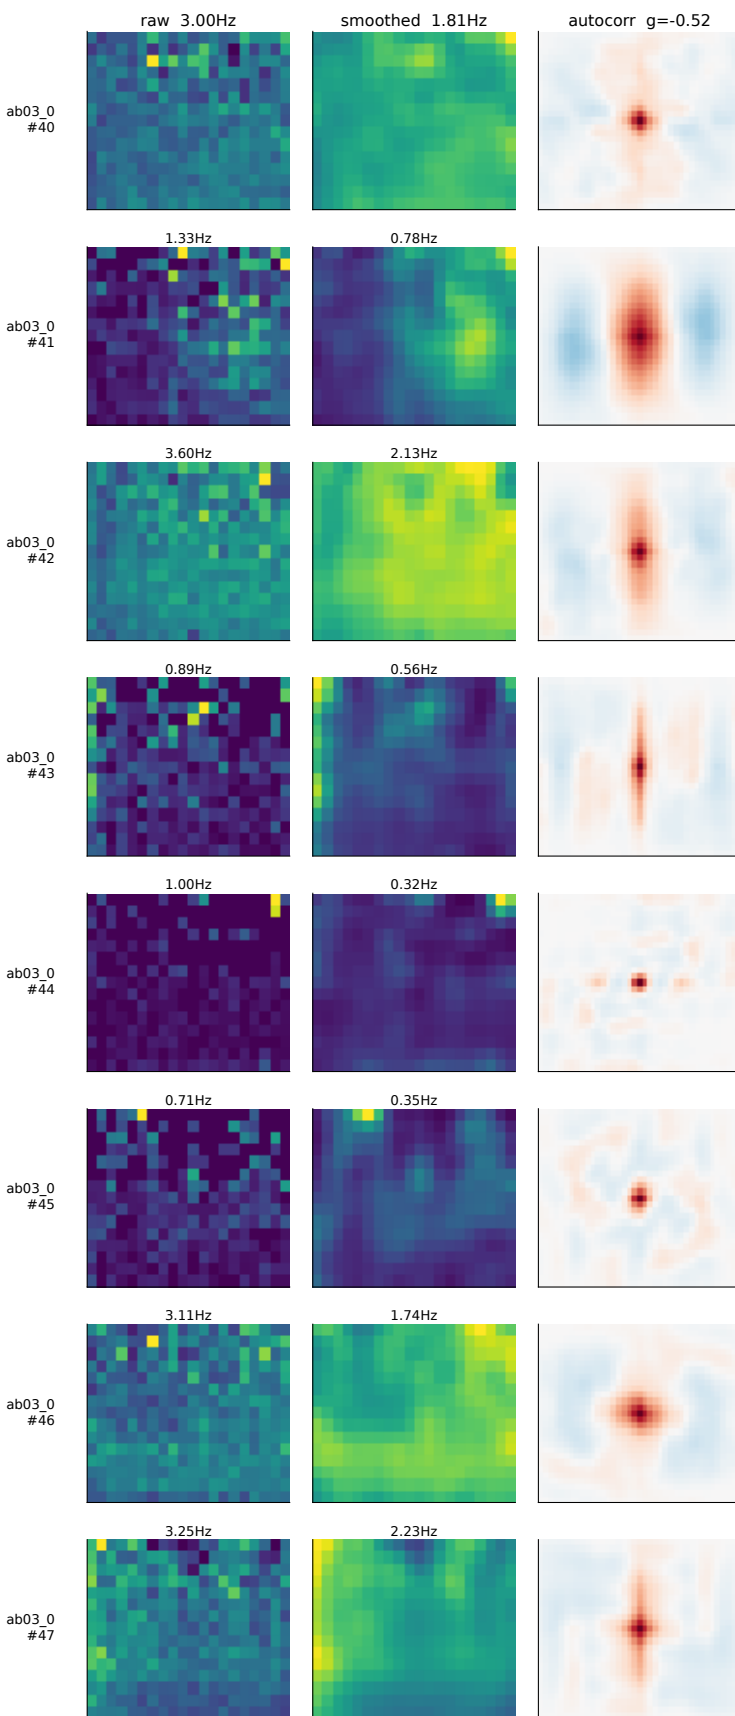

aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

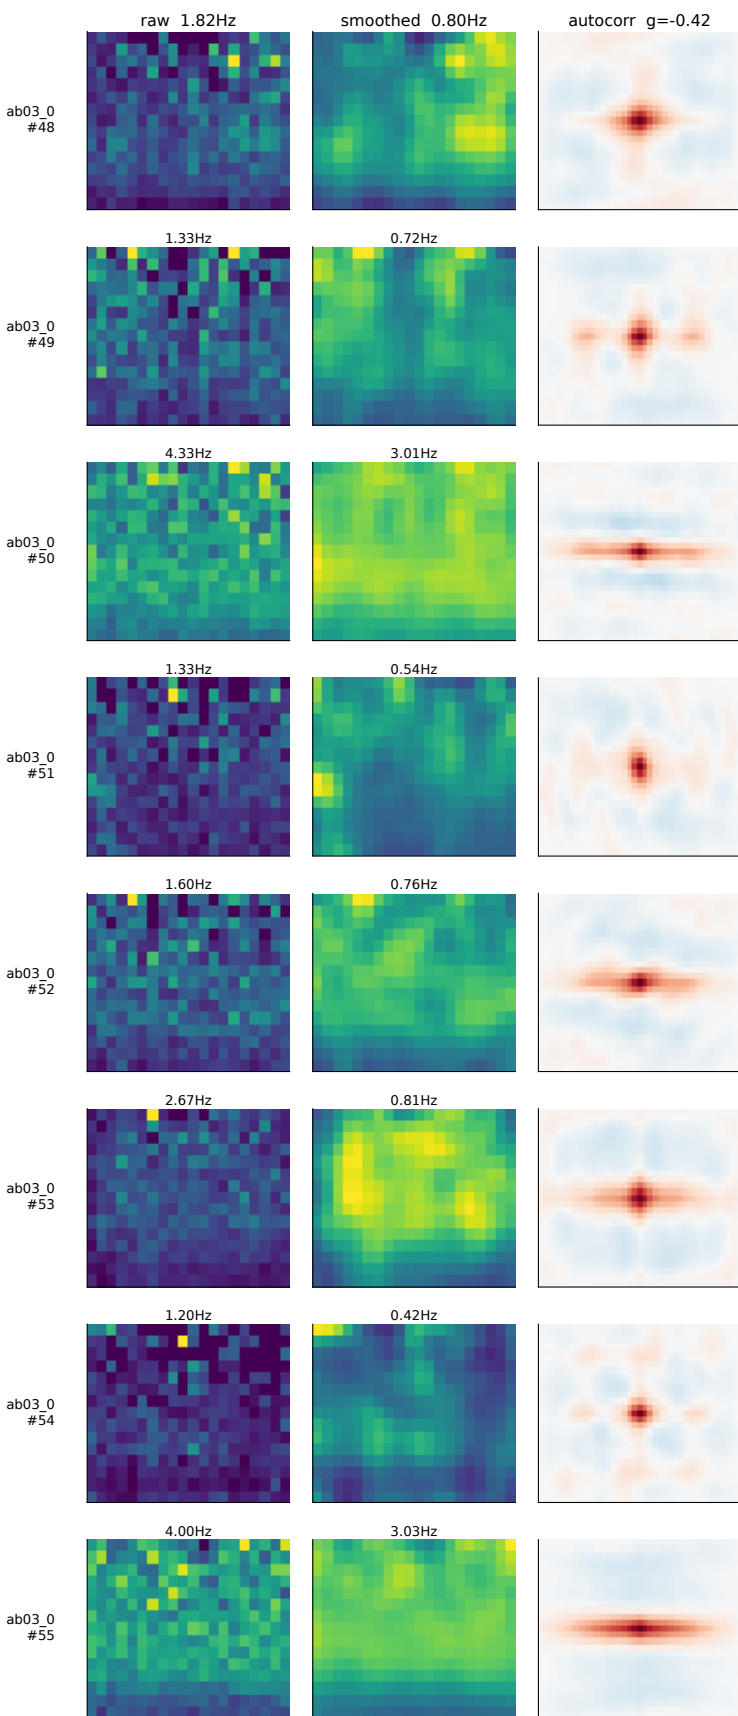


aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
own beside smoothed because smoothing can create structure; no reliability measure or null is co

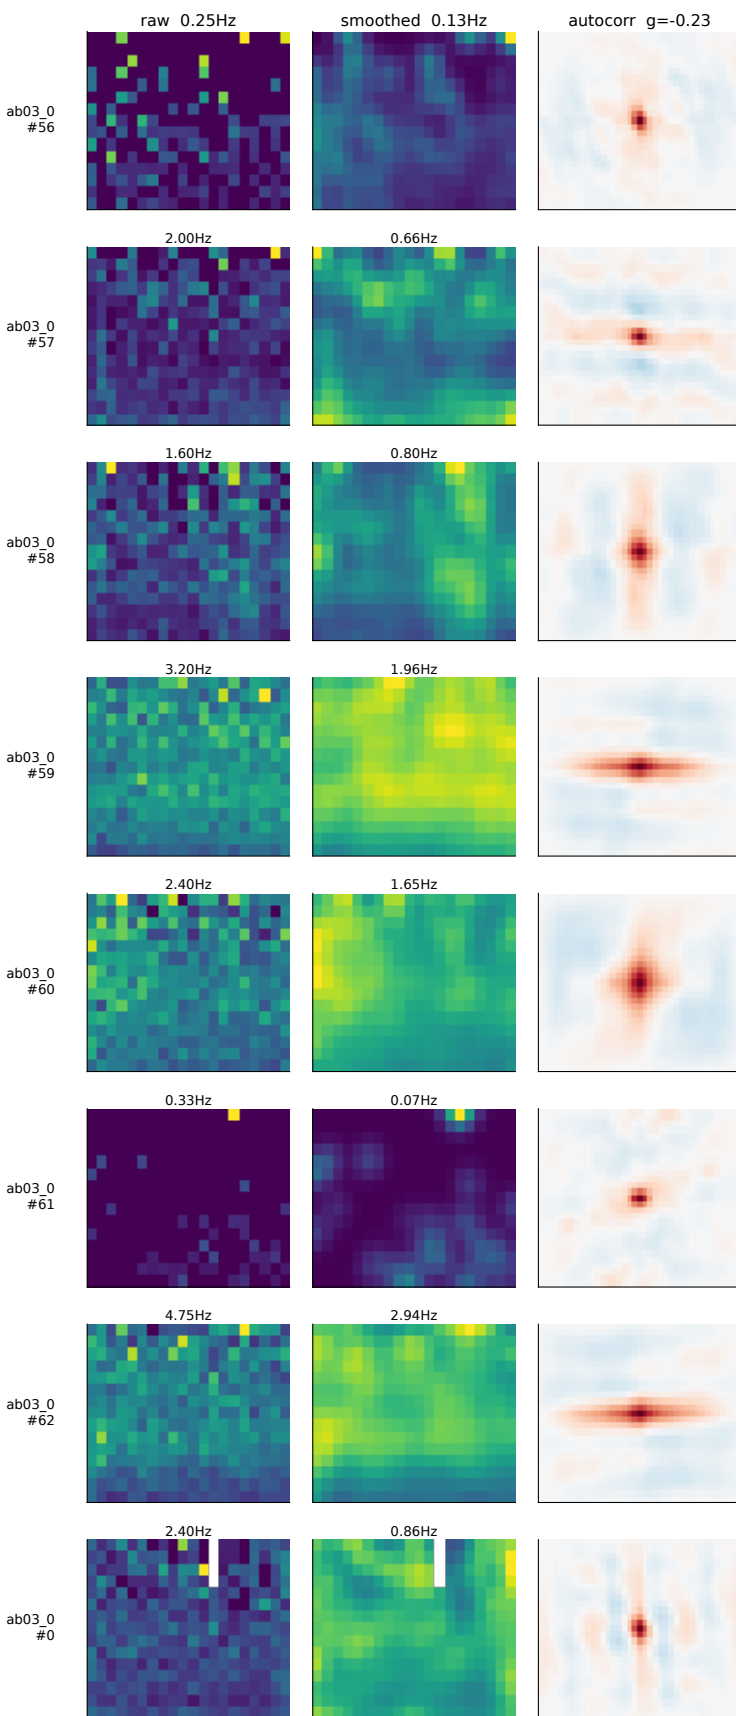





aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

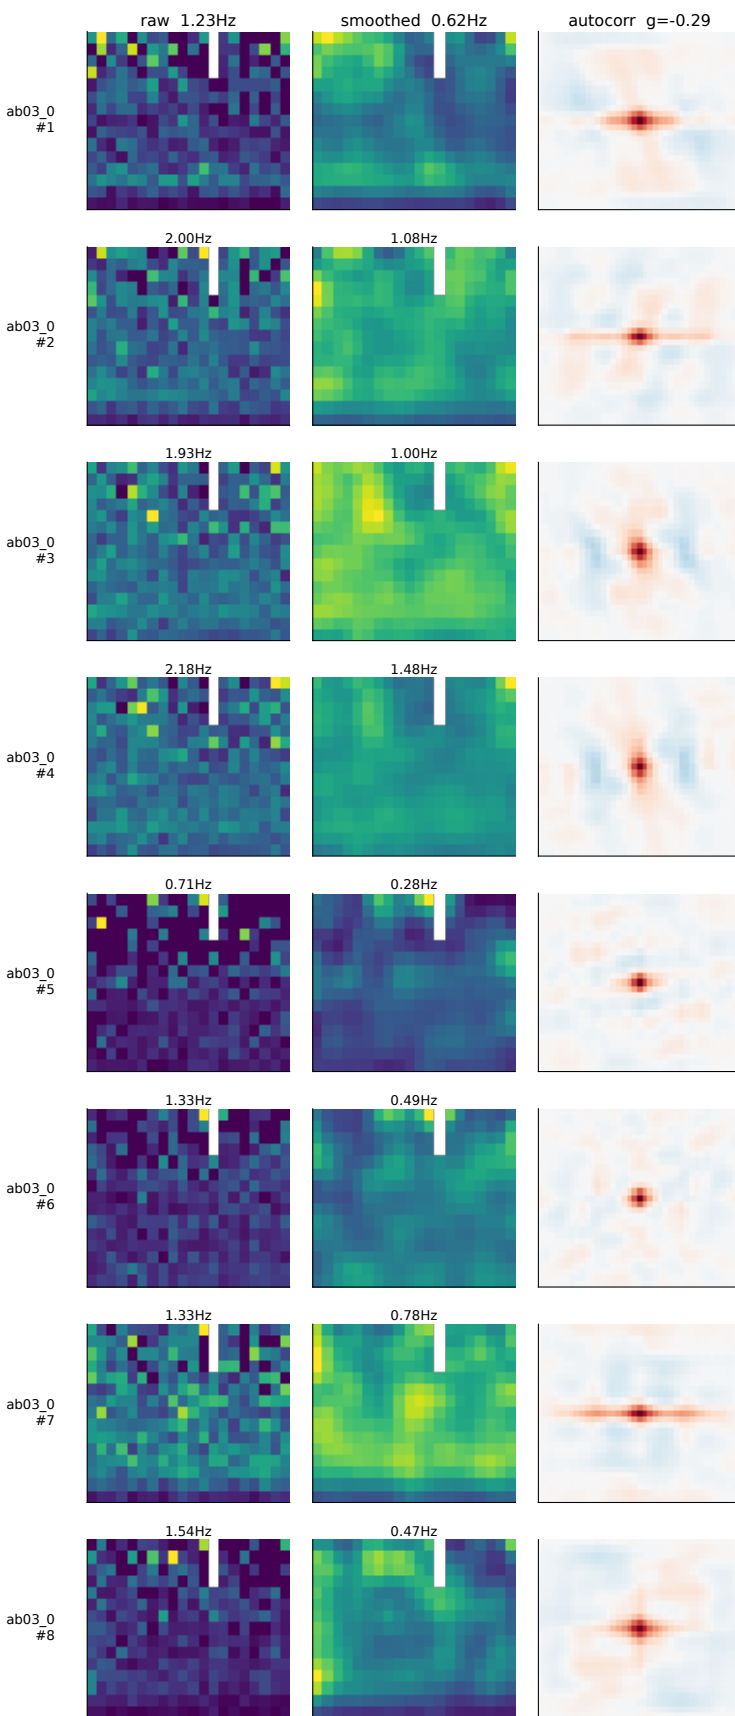


aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

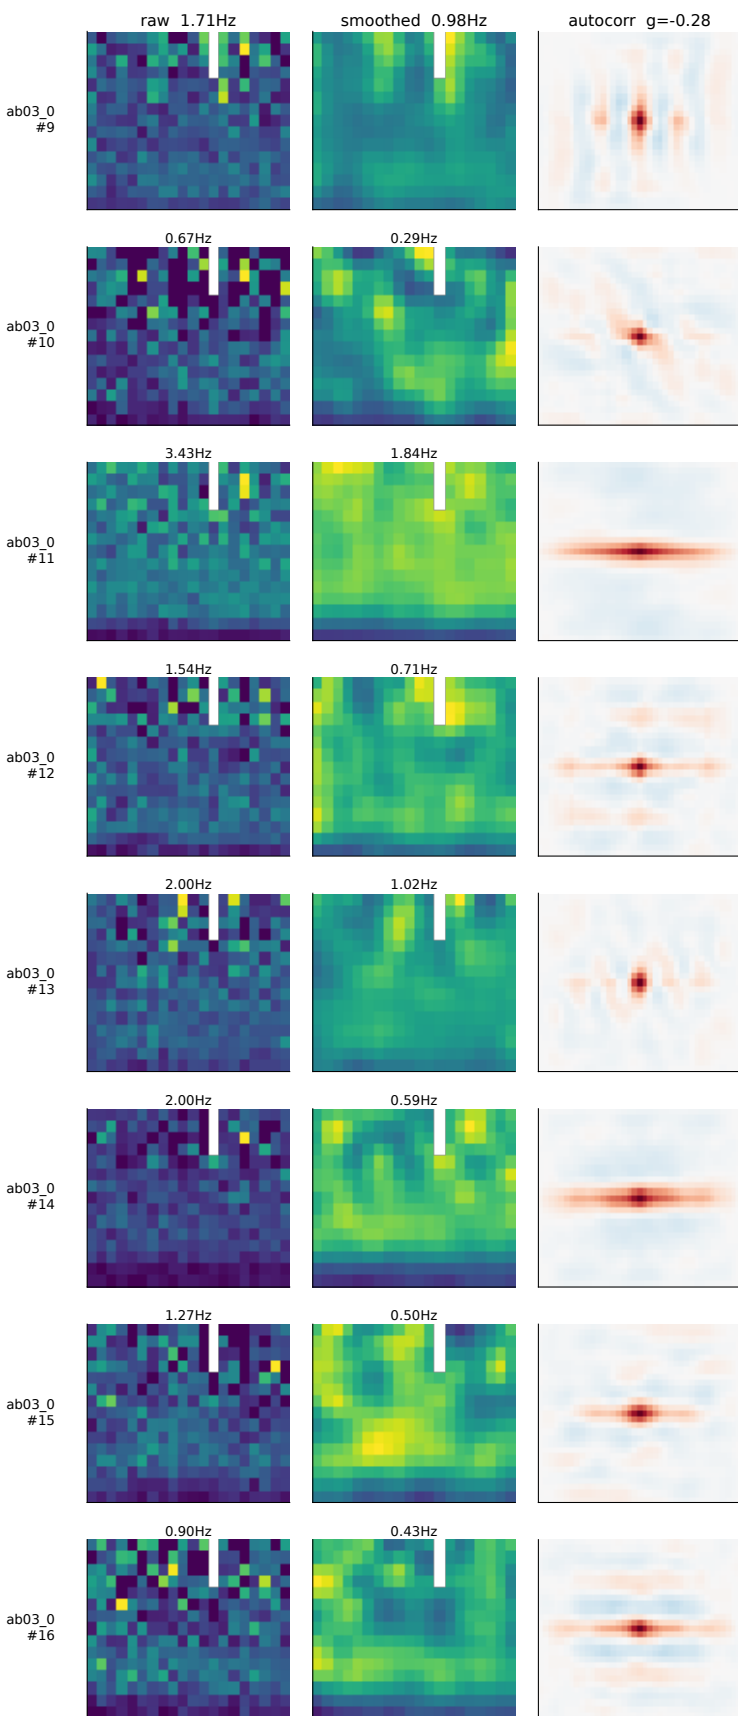


aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

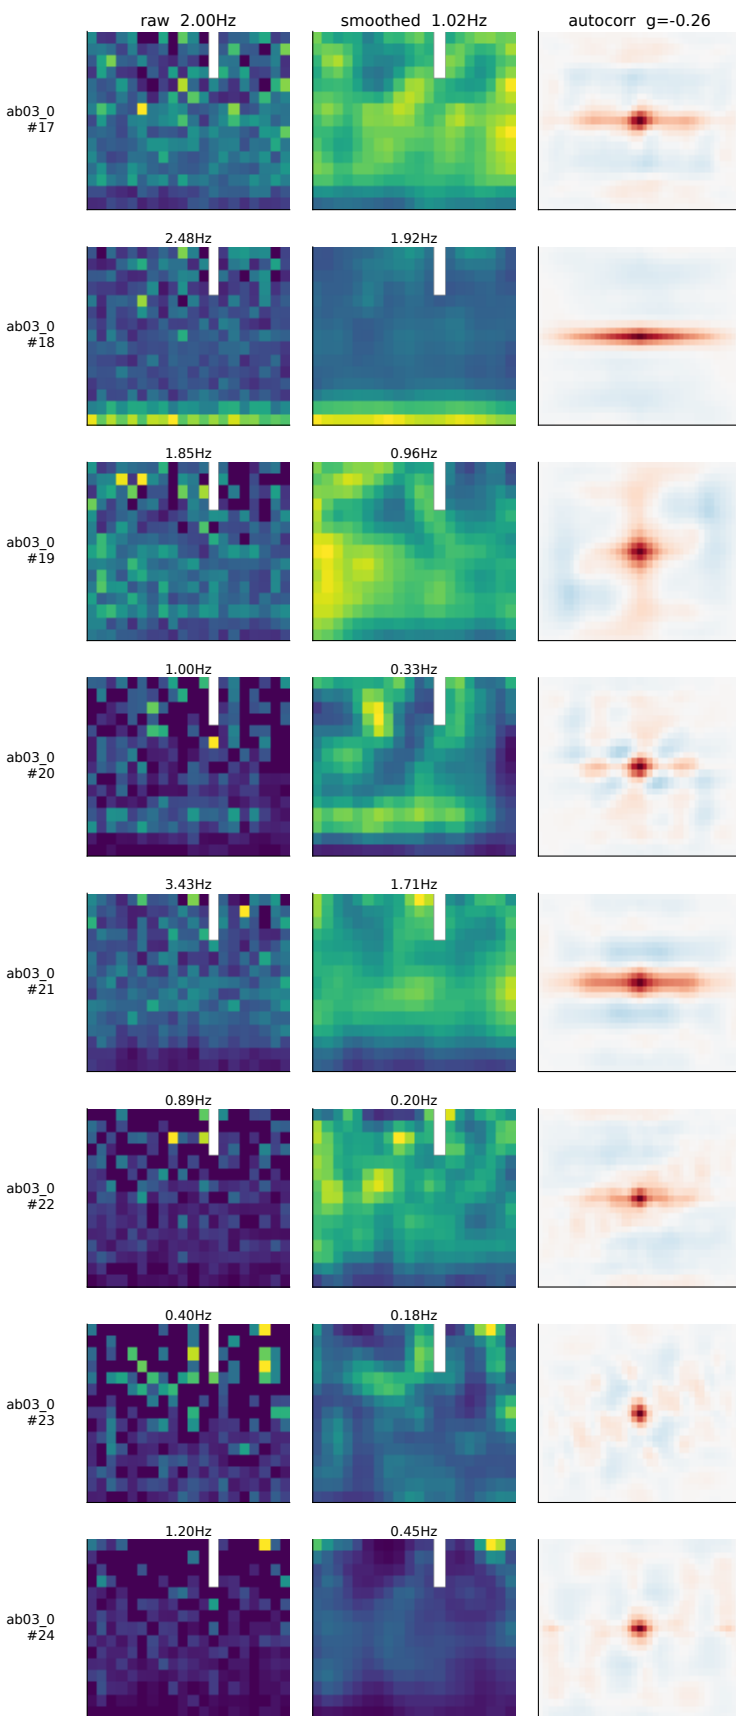


aps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

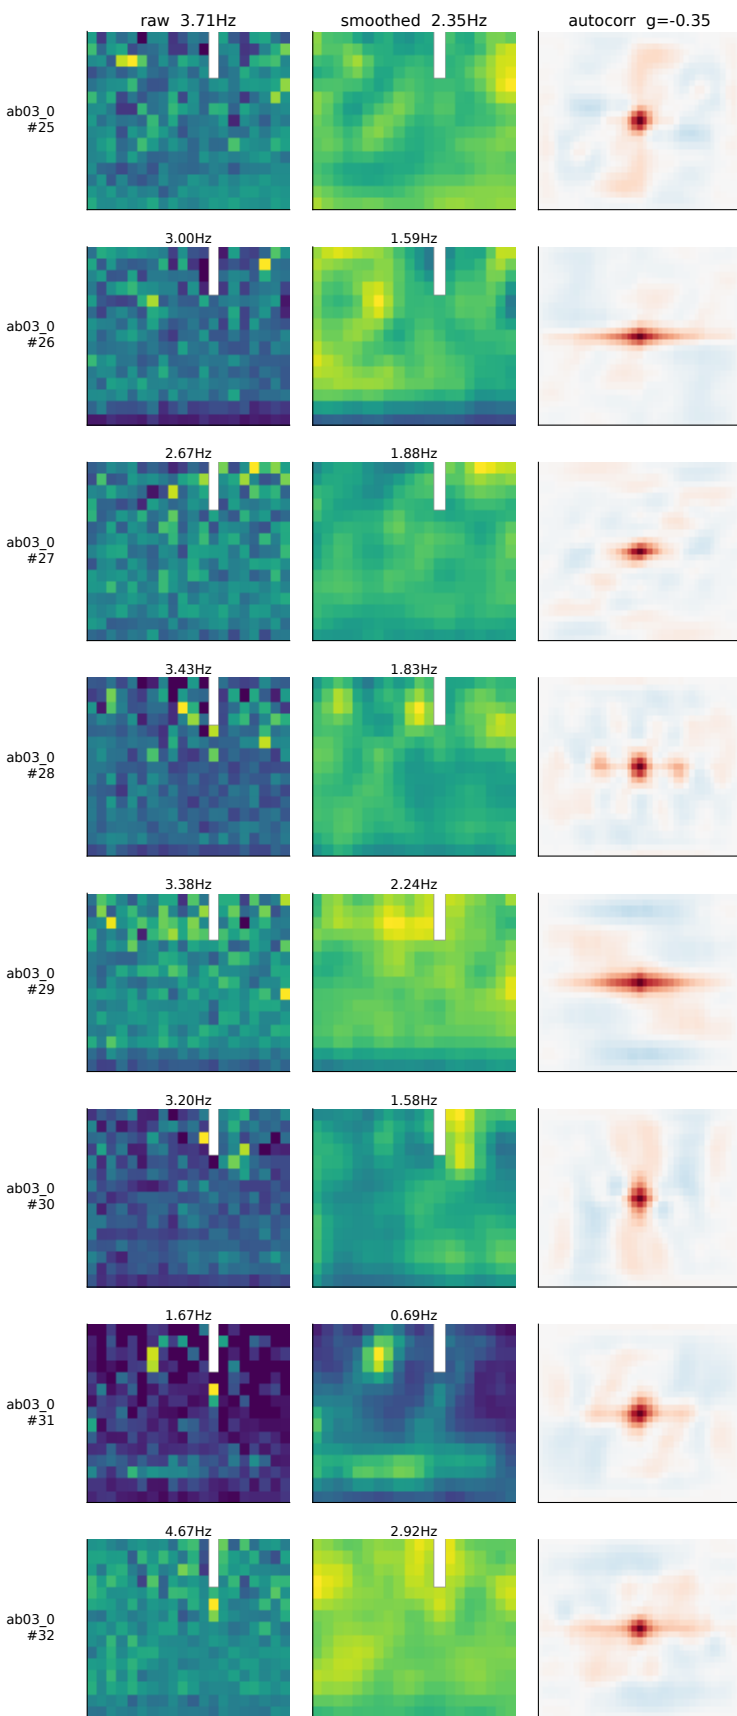


ps: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons shown beside smoothed because smoothing can create structure; no reliability measure or null is co

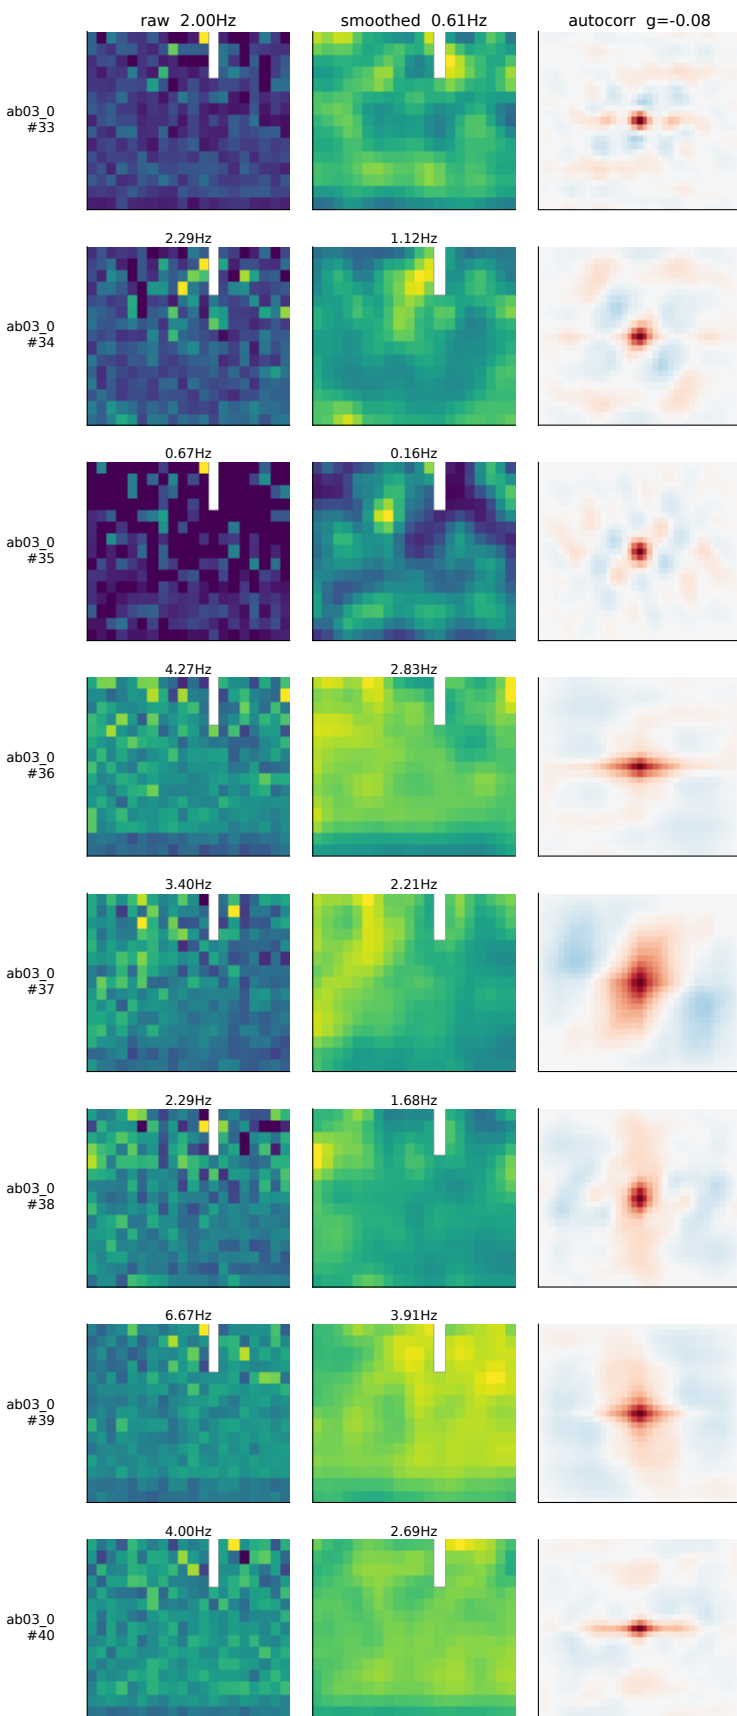


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

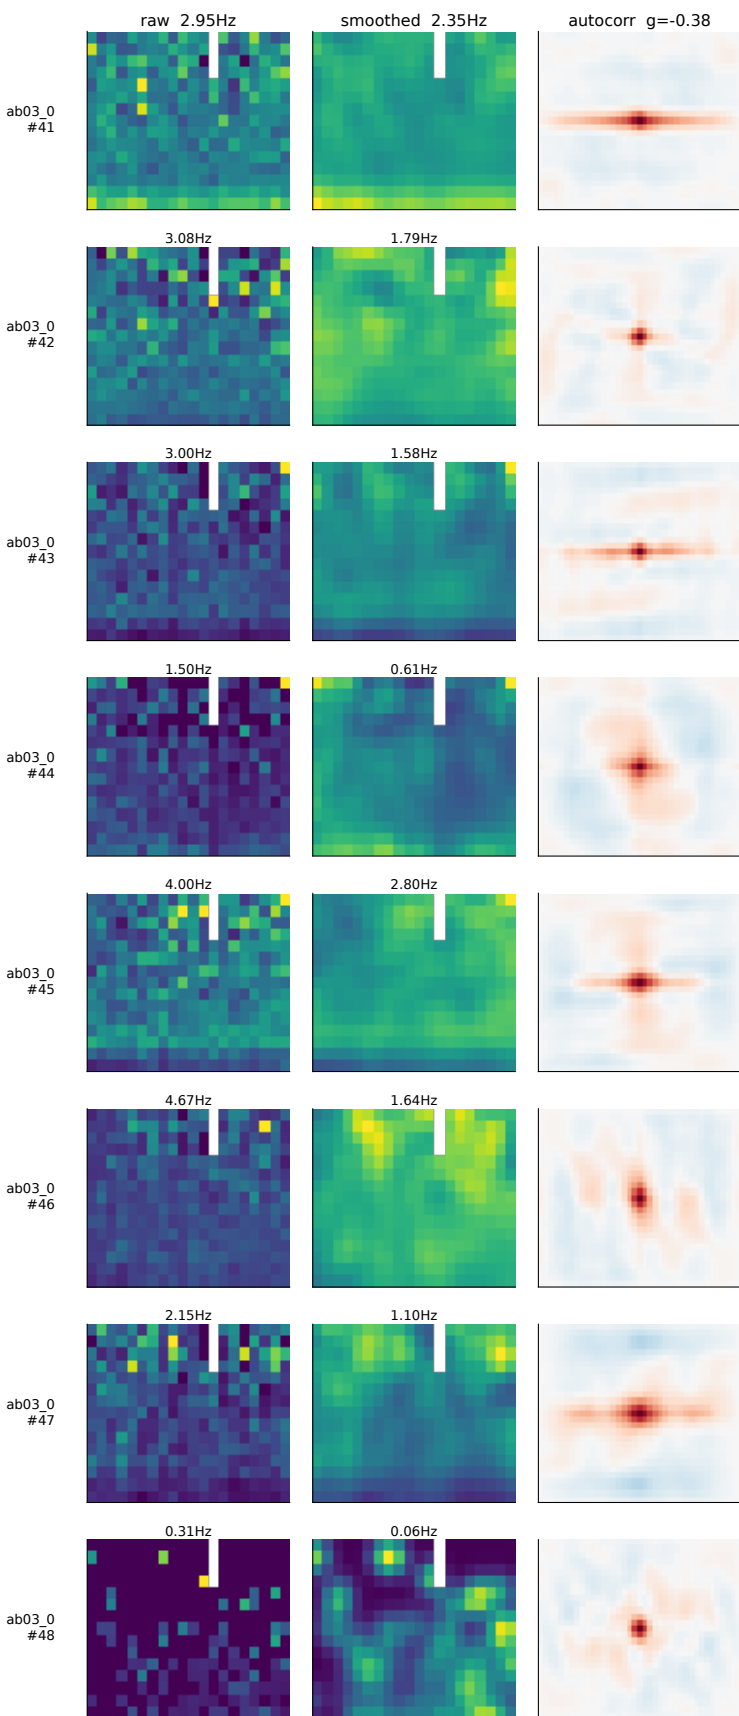

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

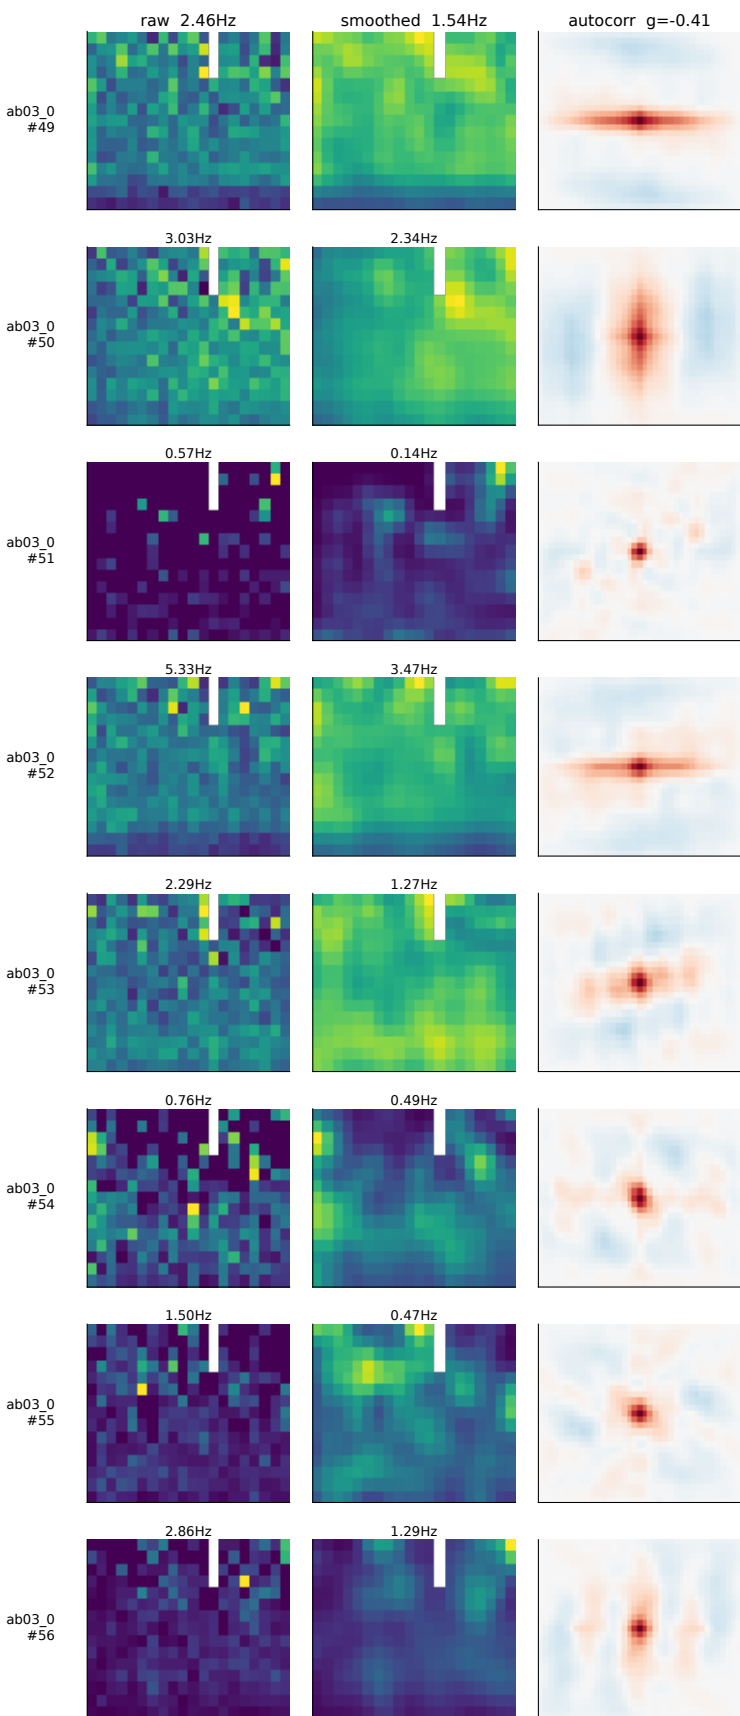


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

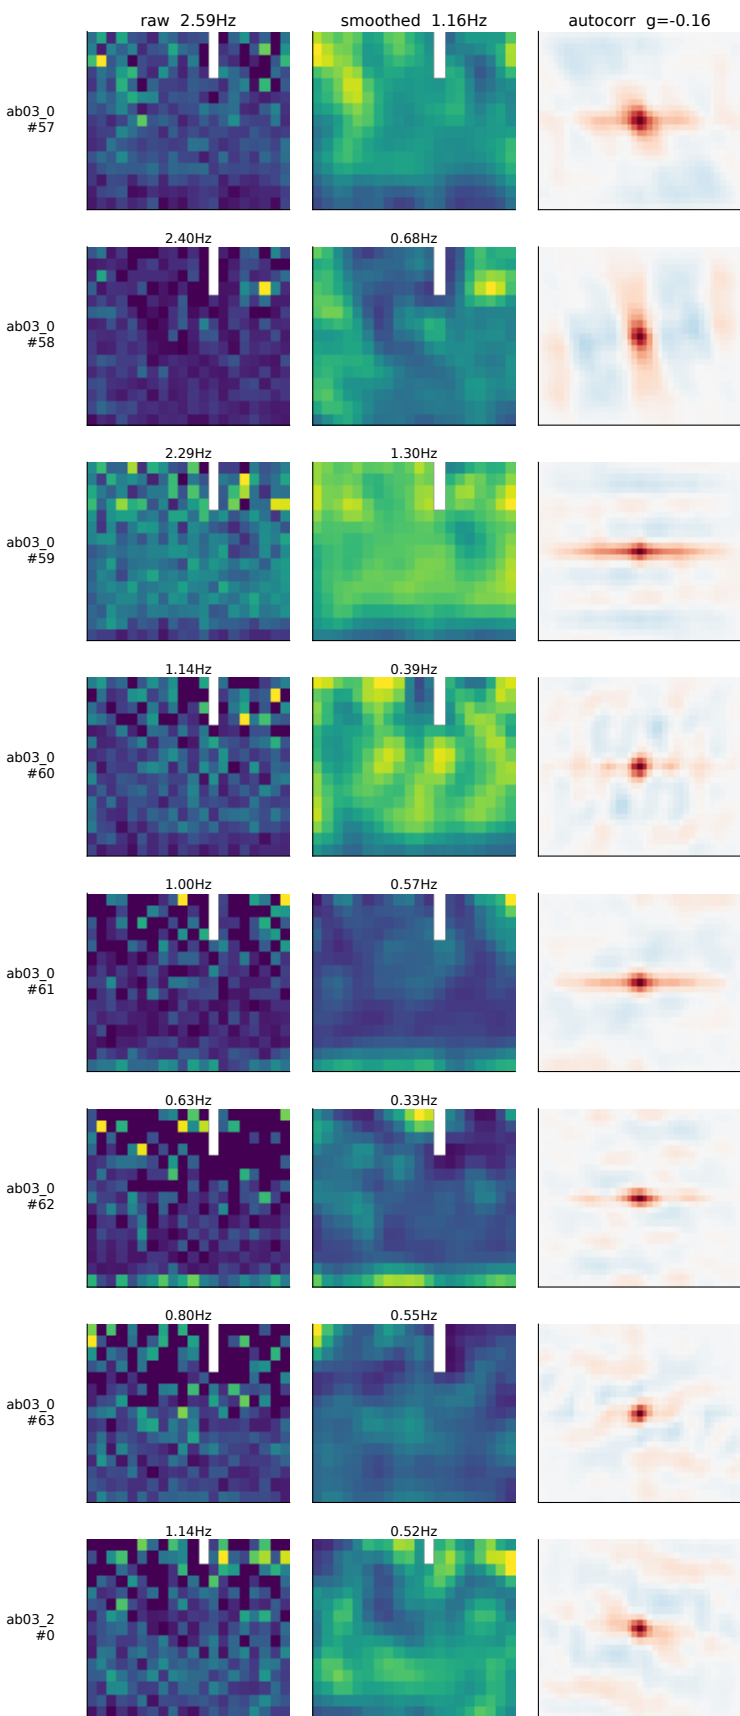





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

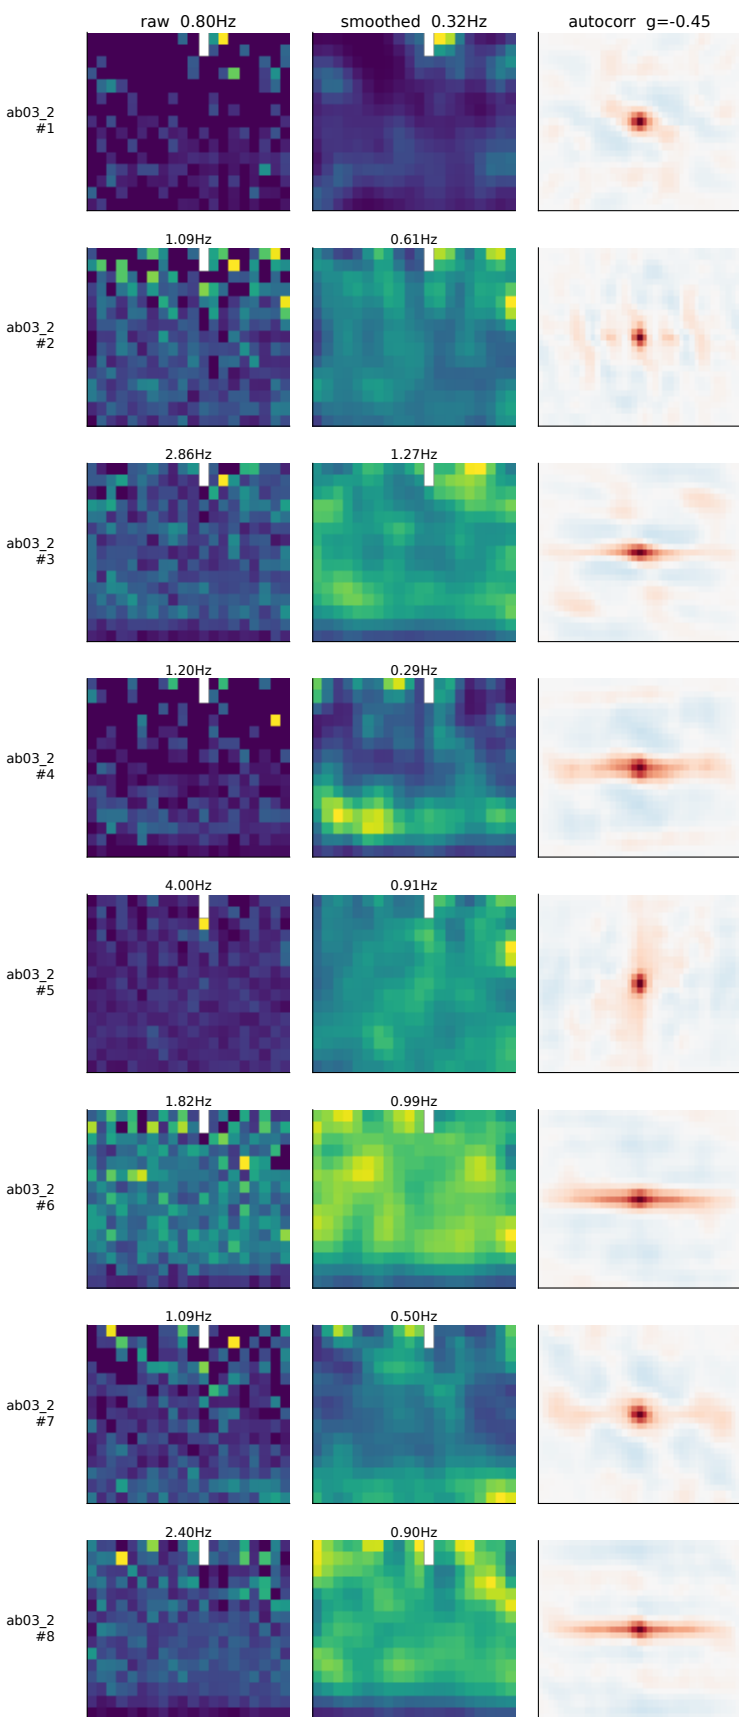


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

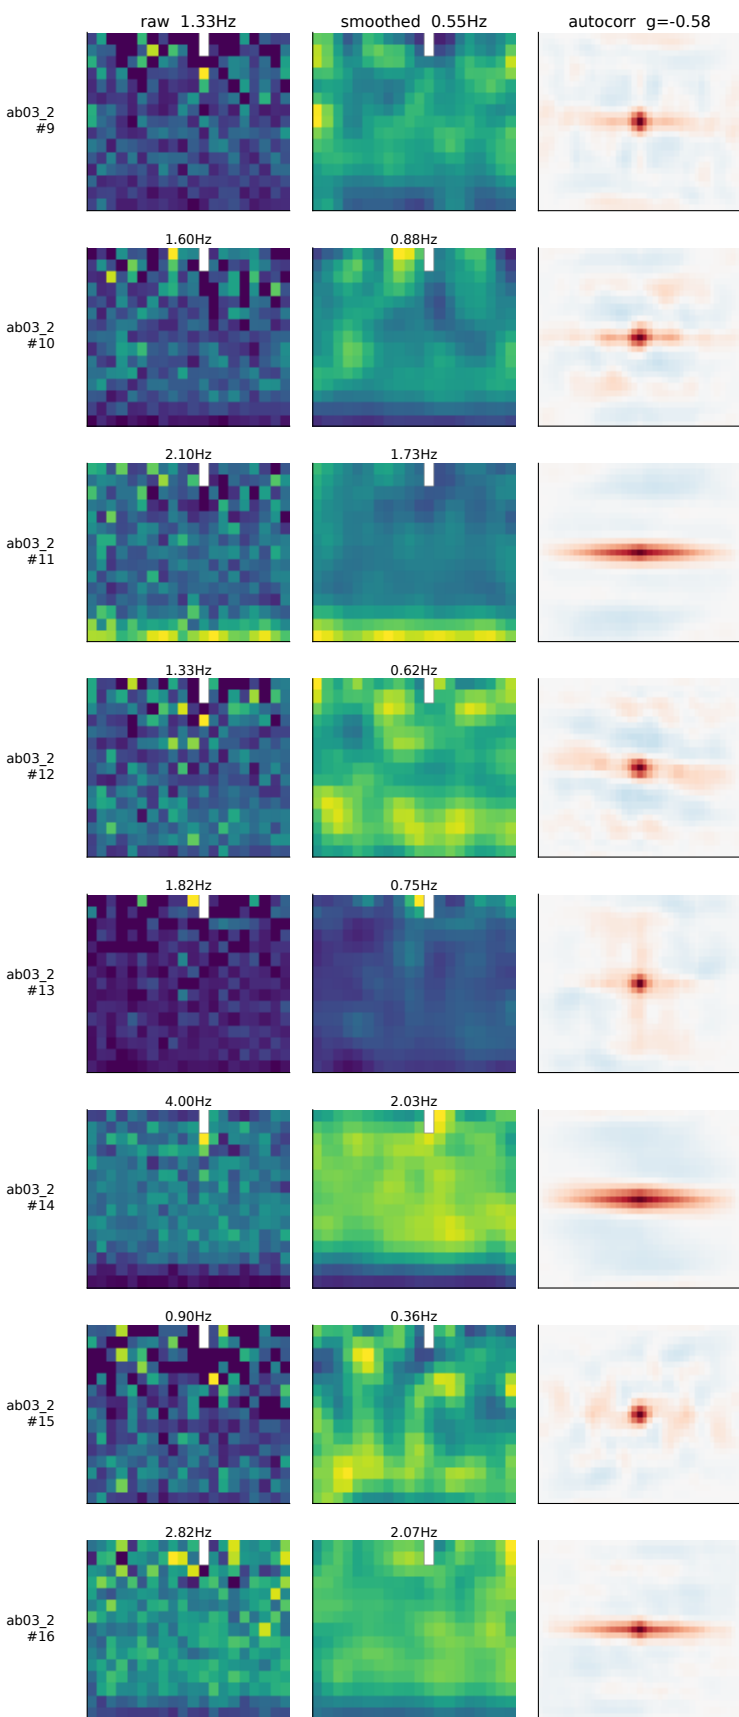


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

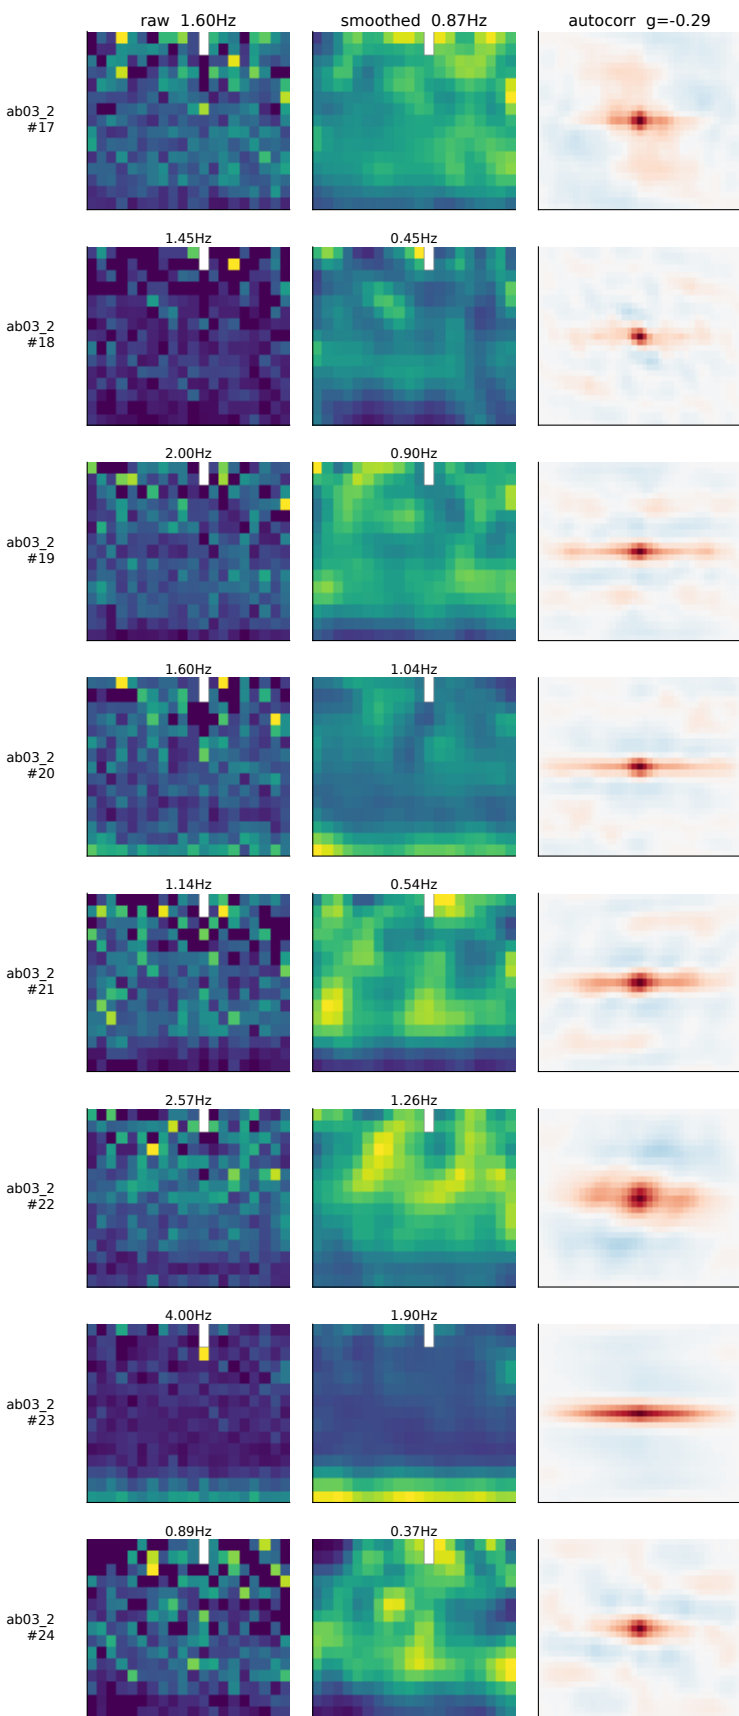


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

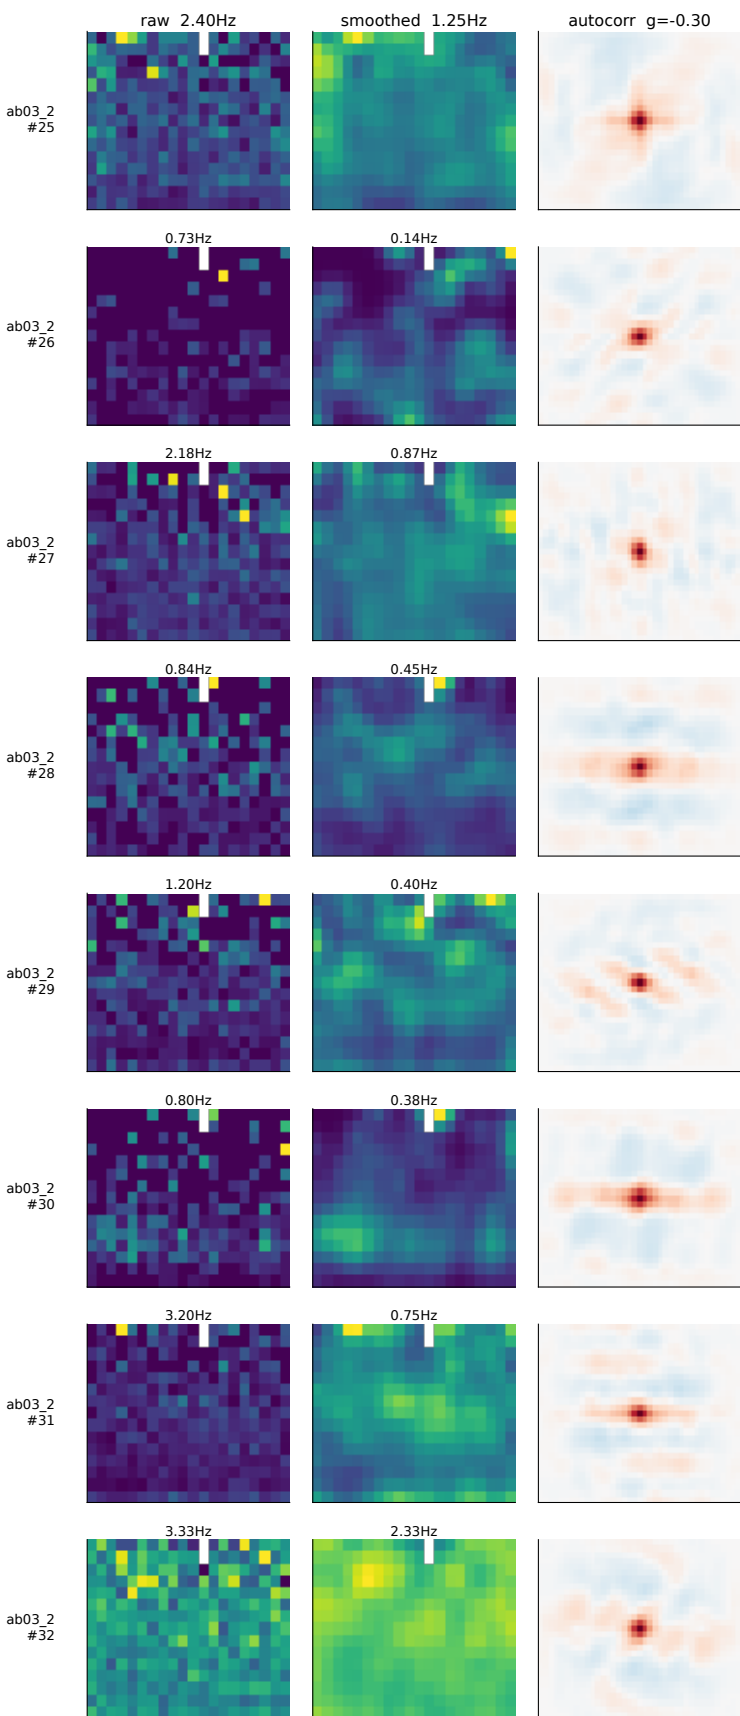


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

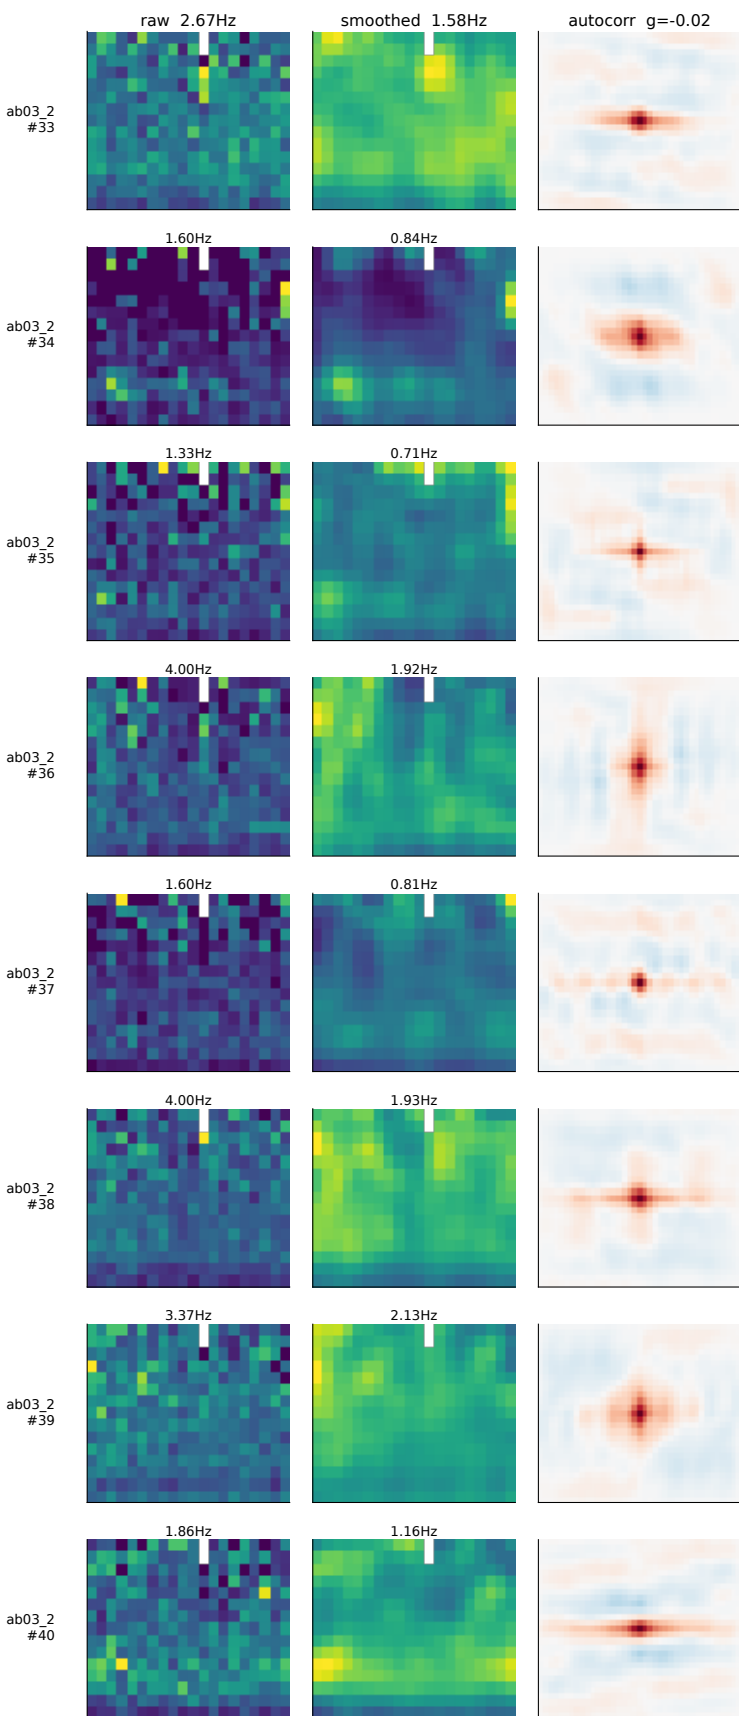


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

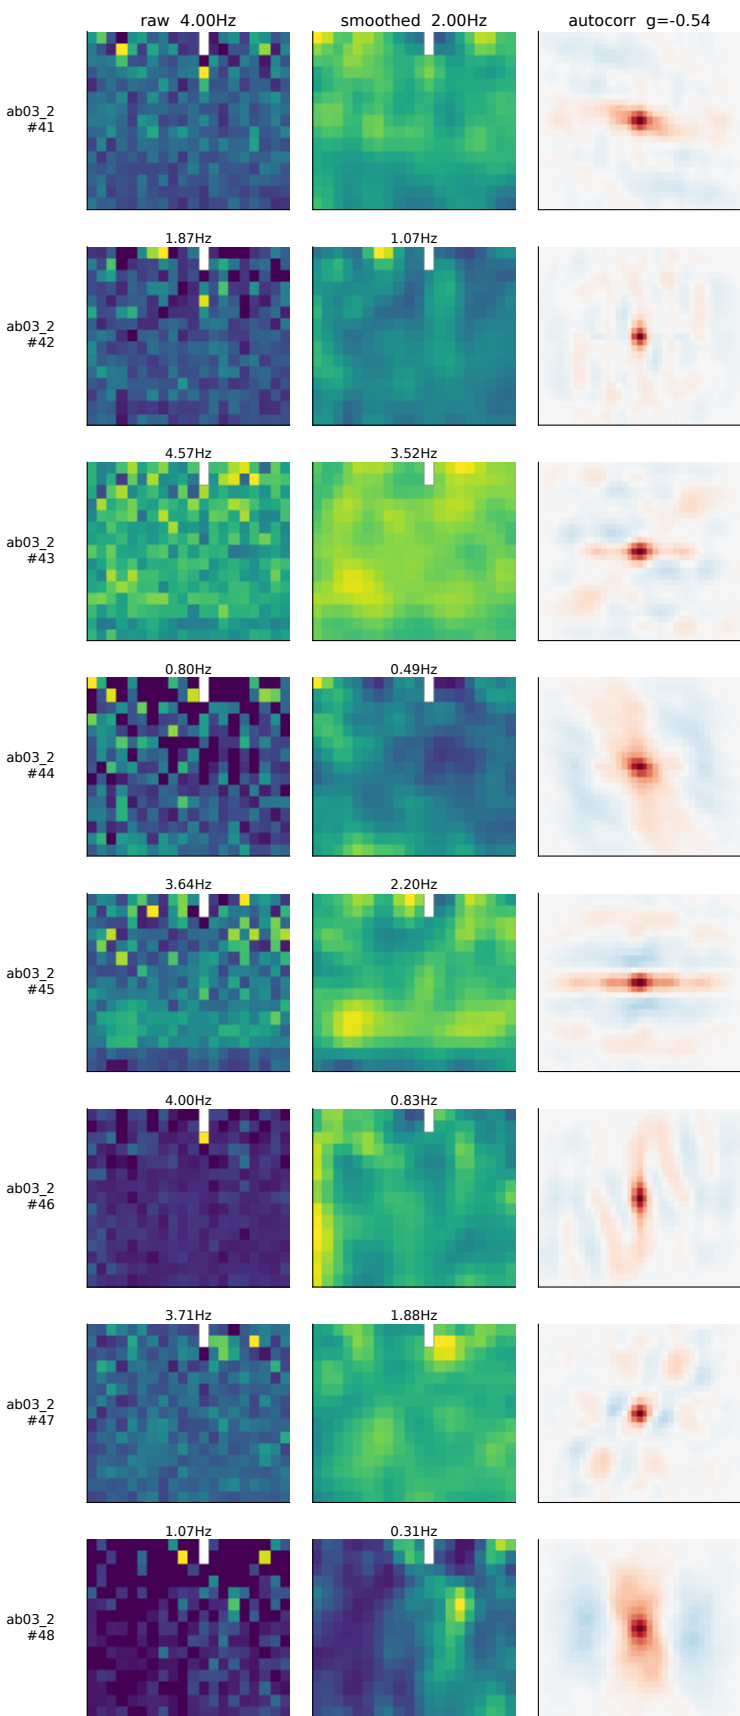

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

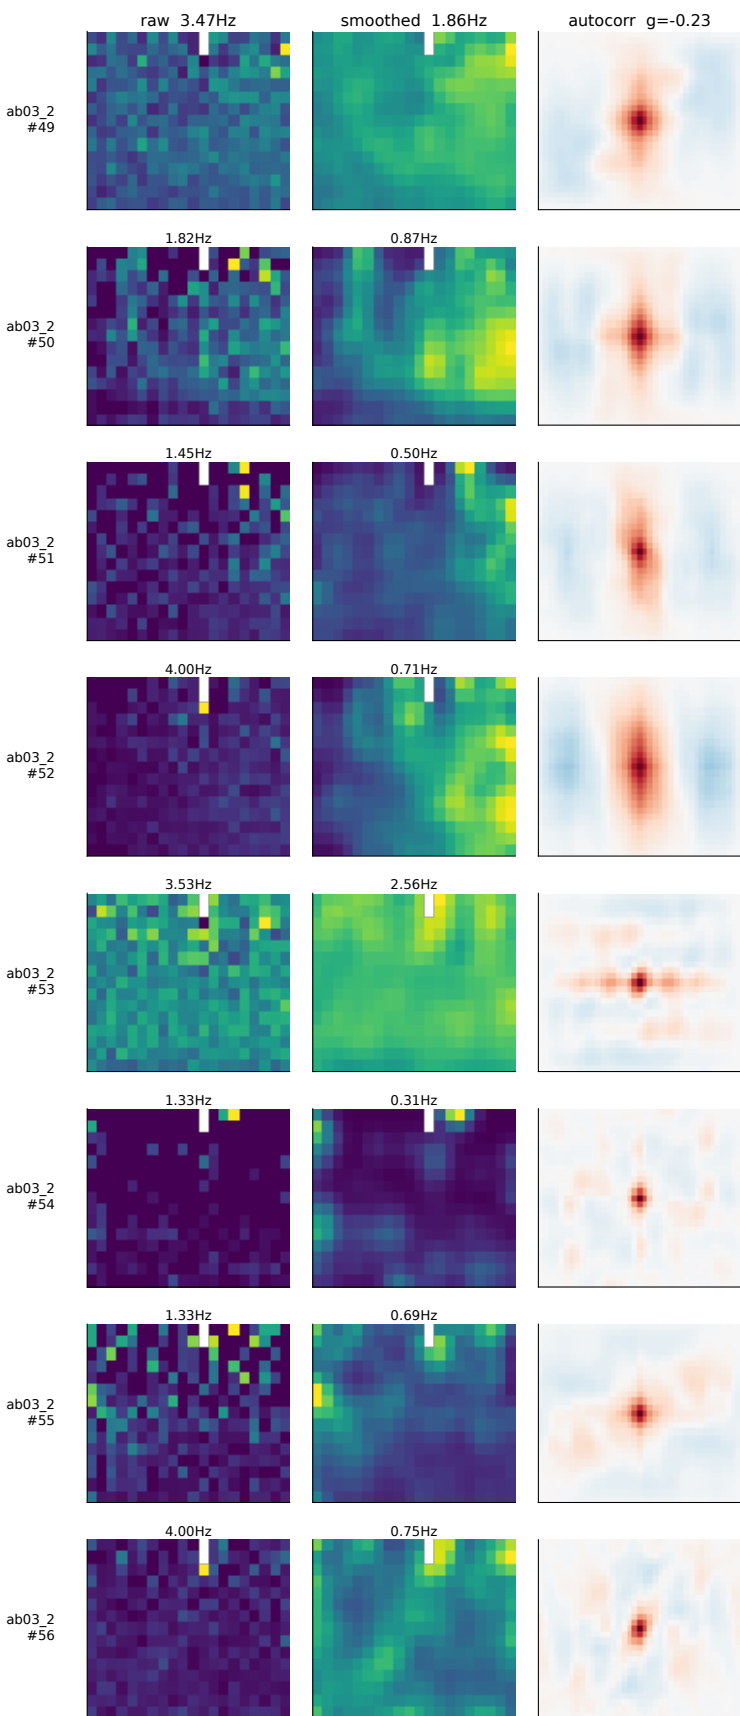


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

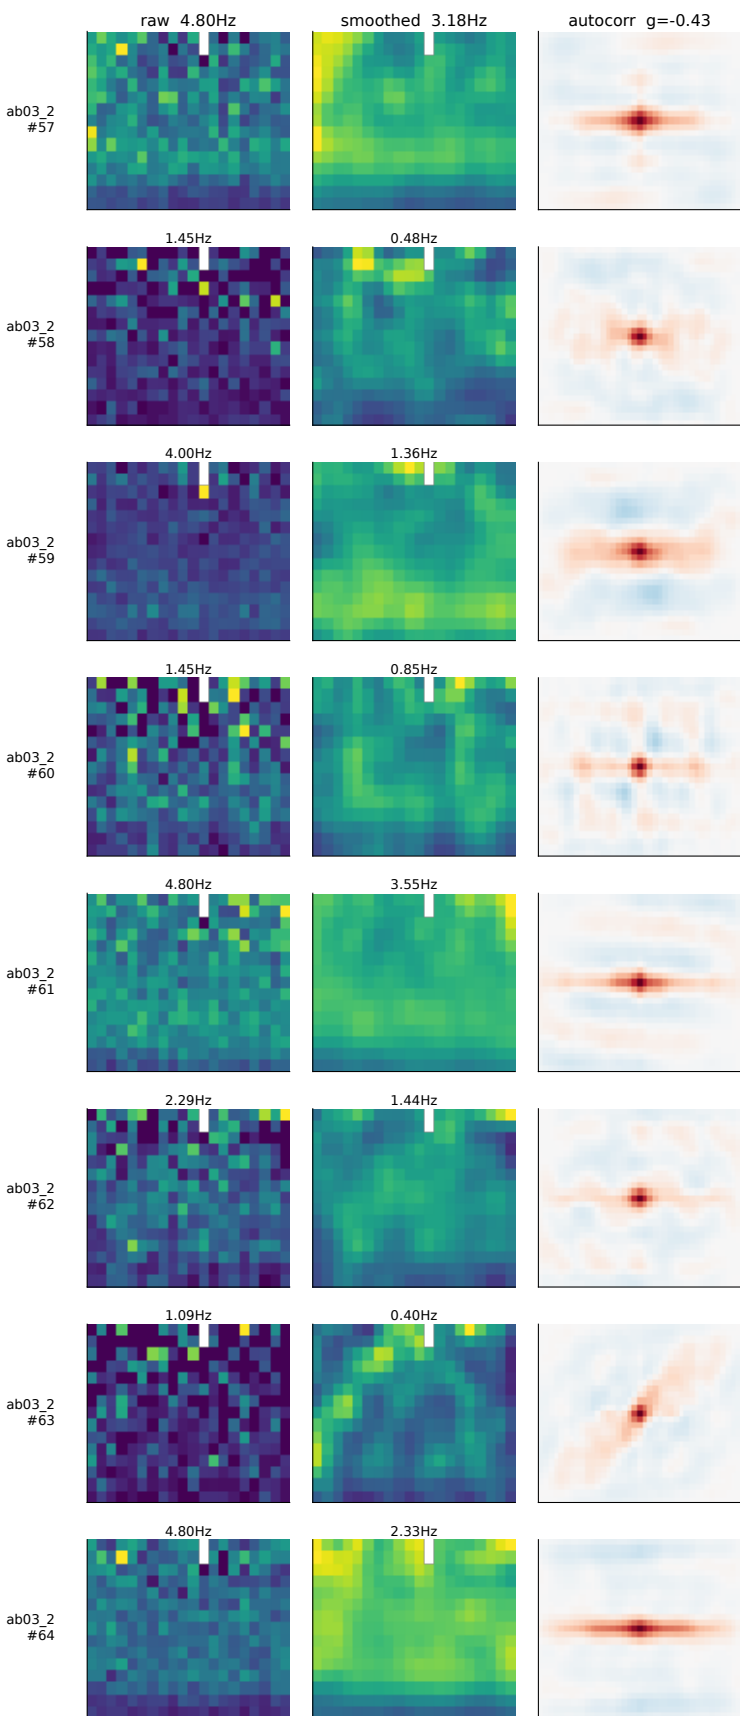





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 1  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

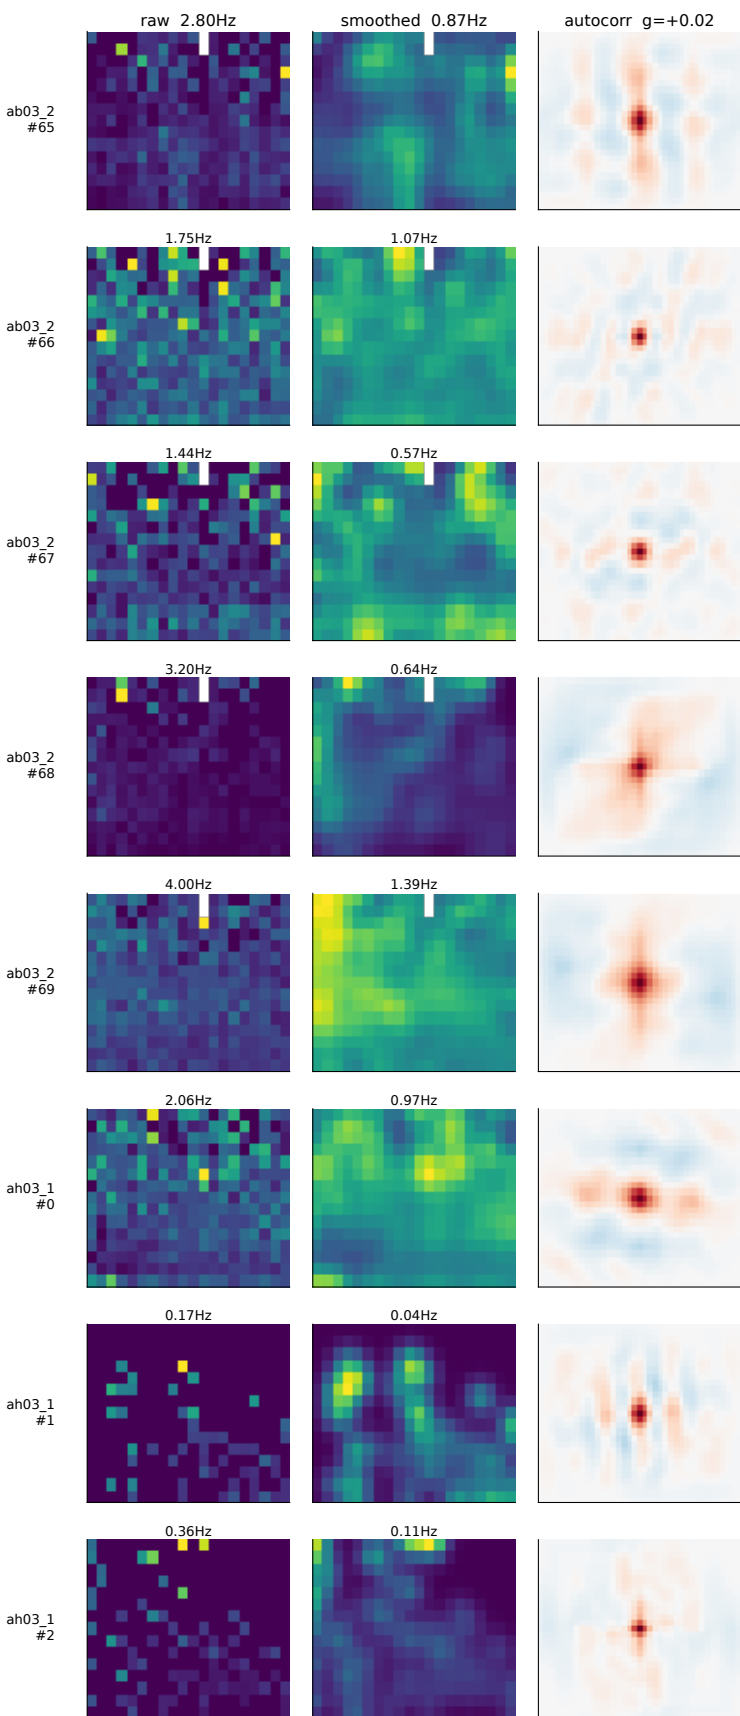


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

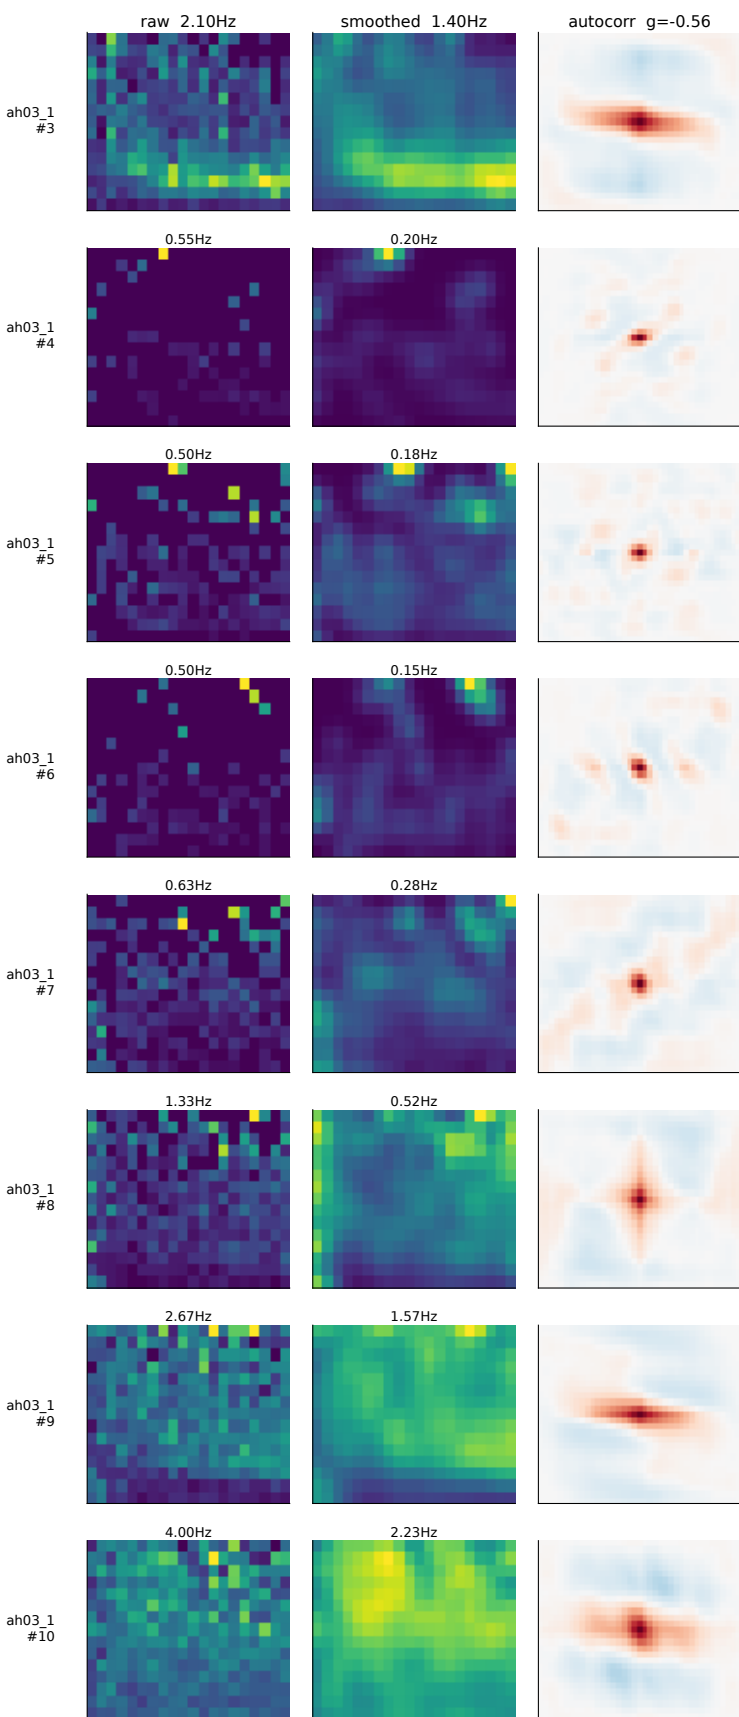


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

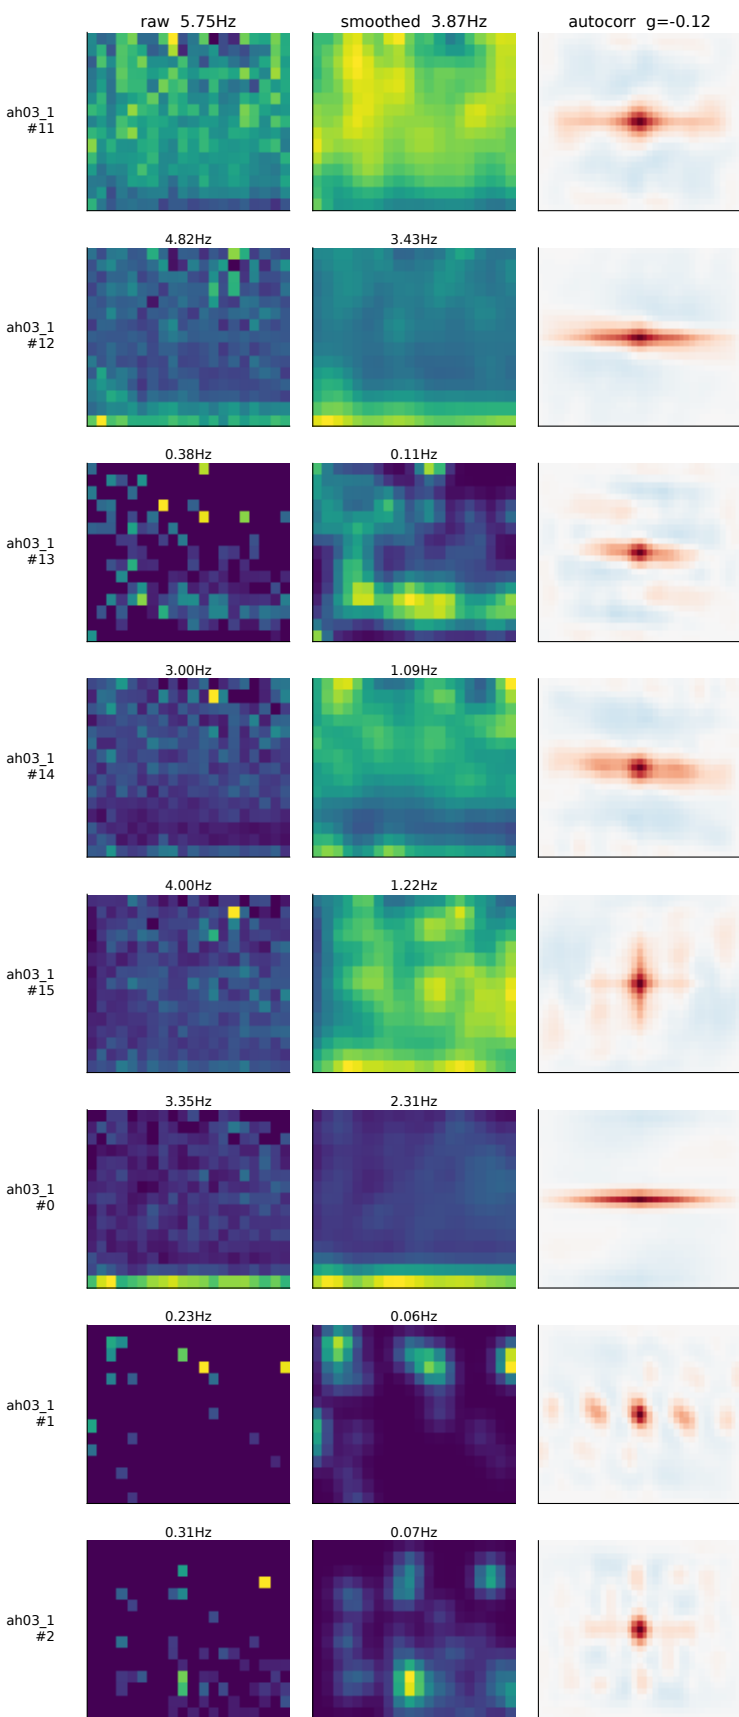


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

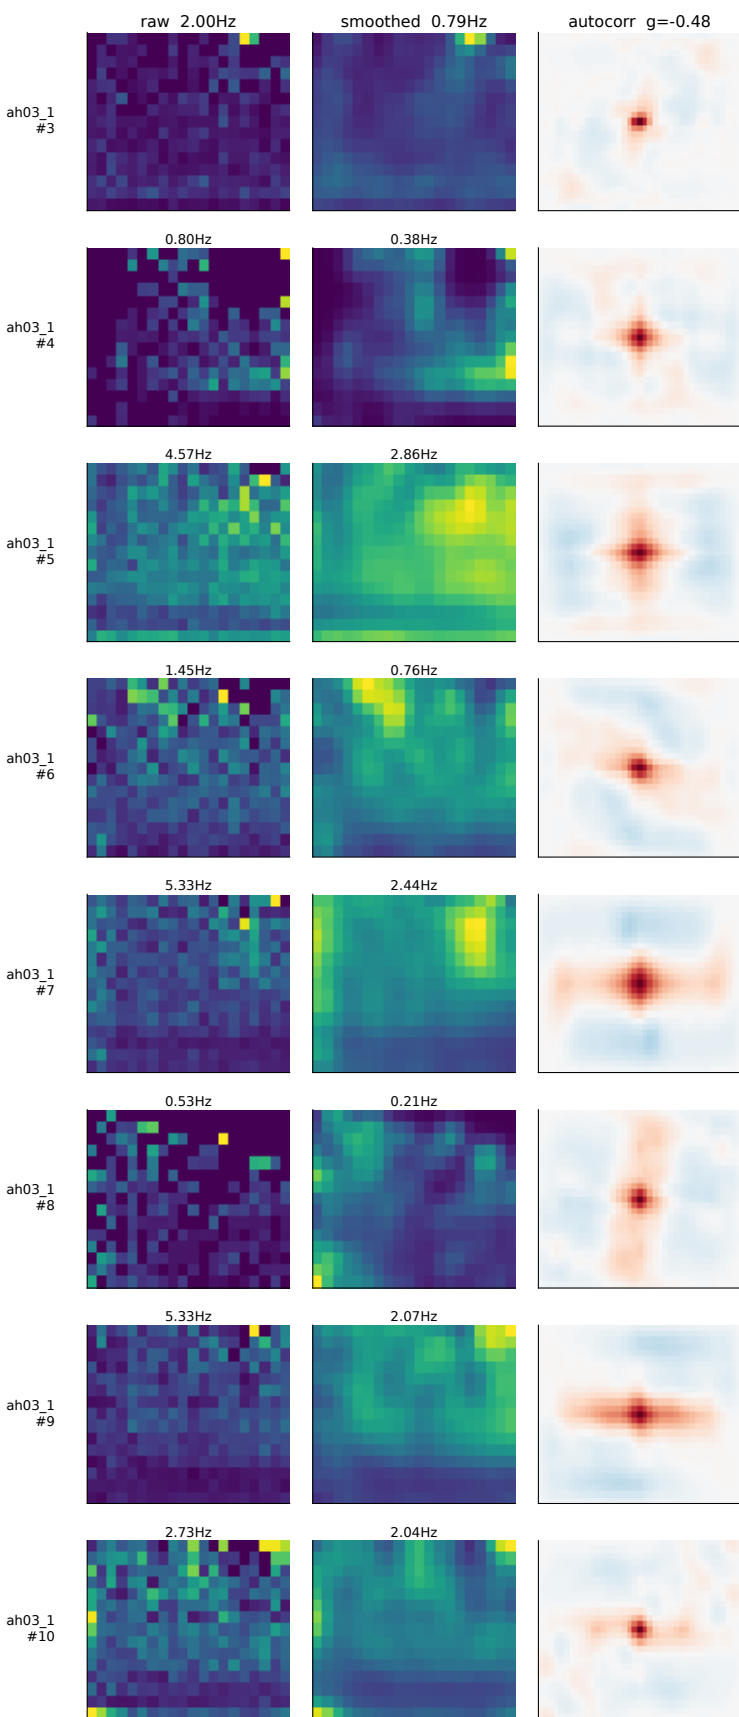


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

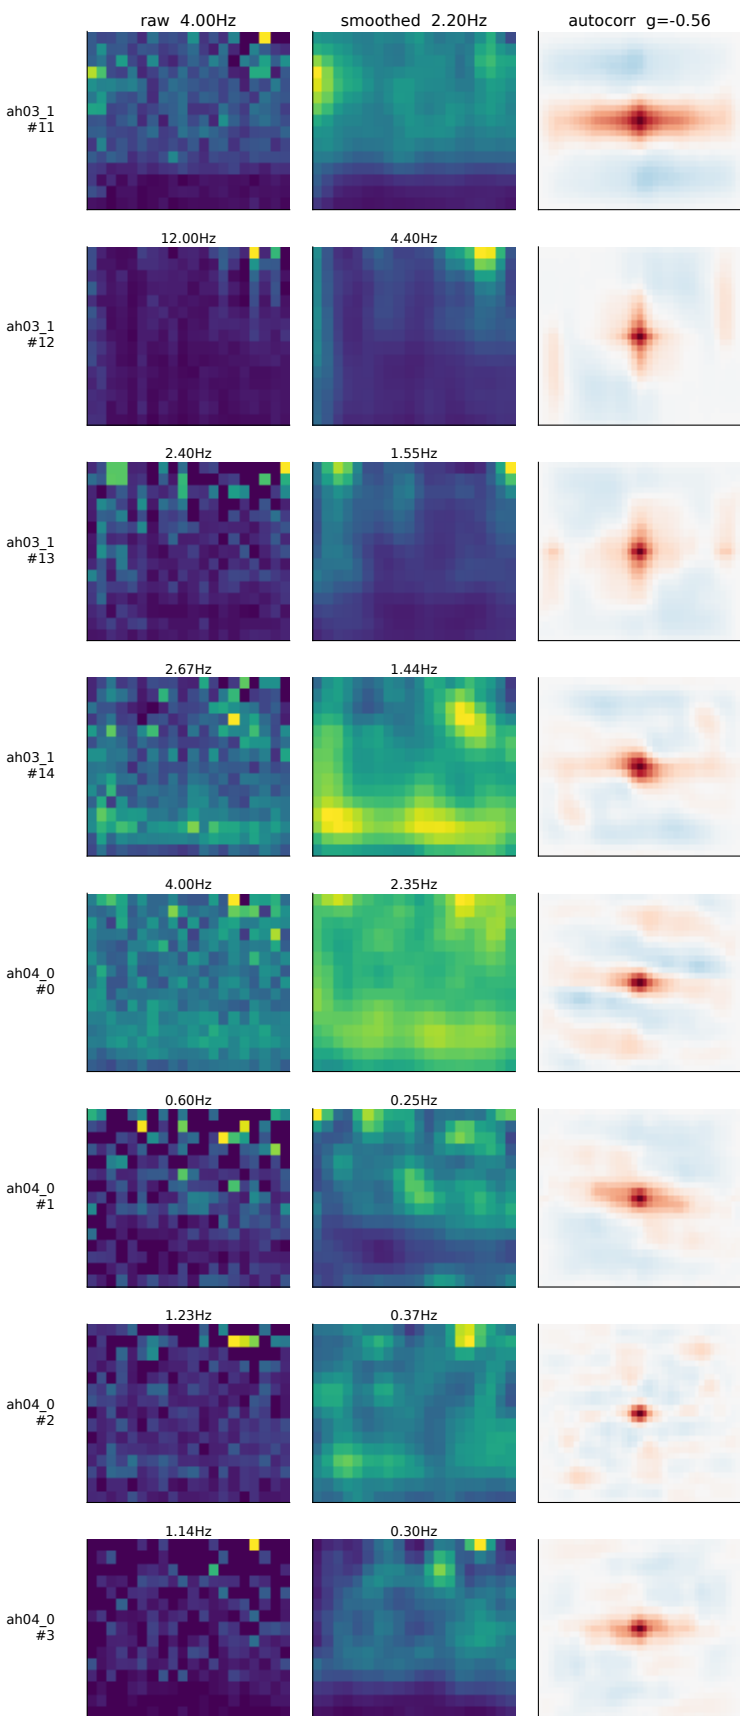


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

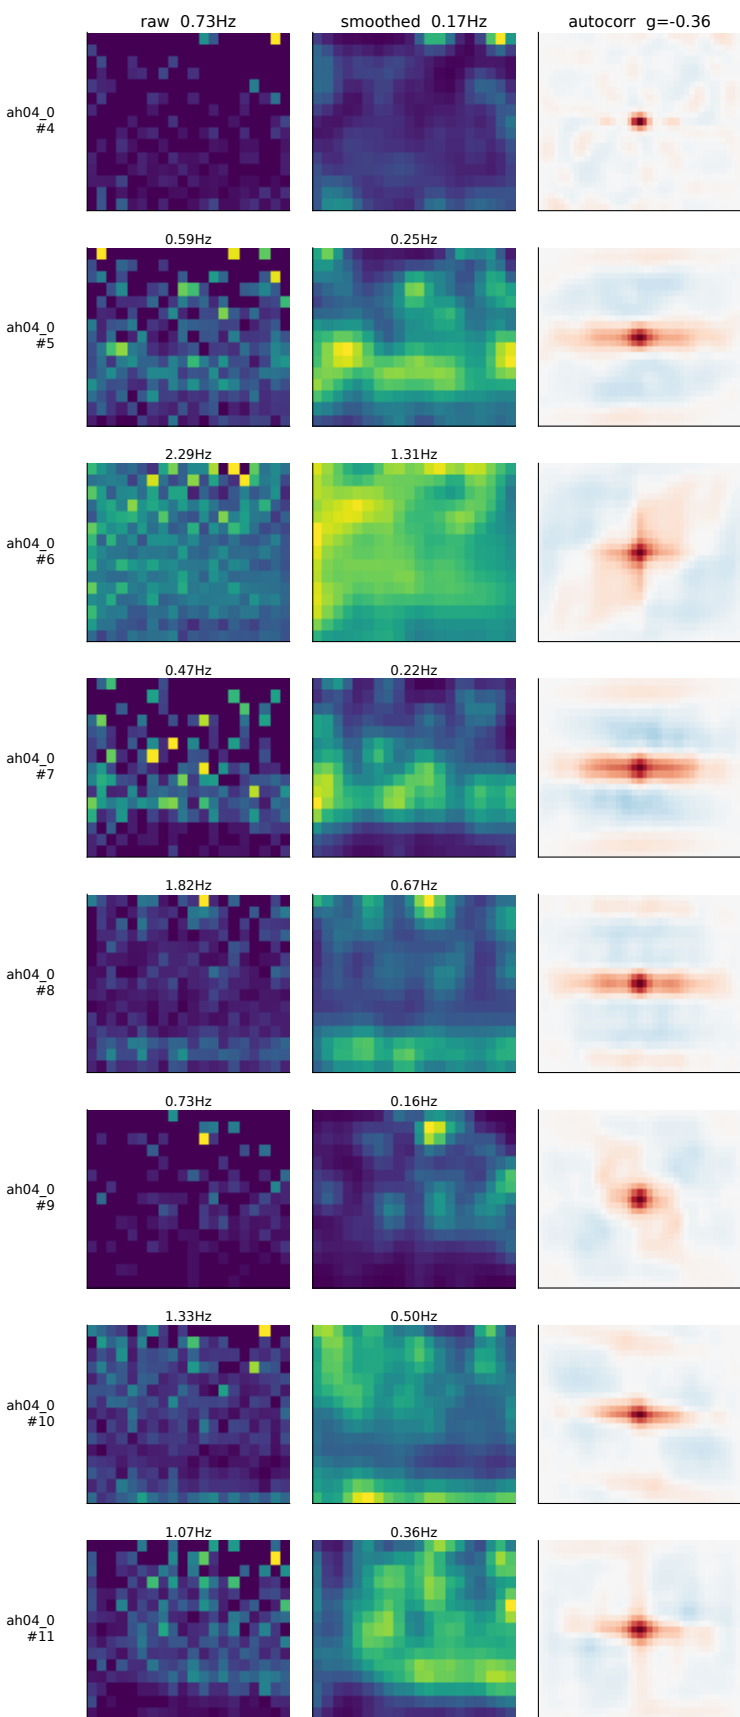

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

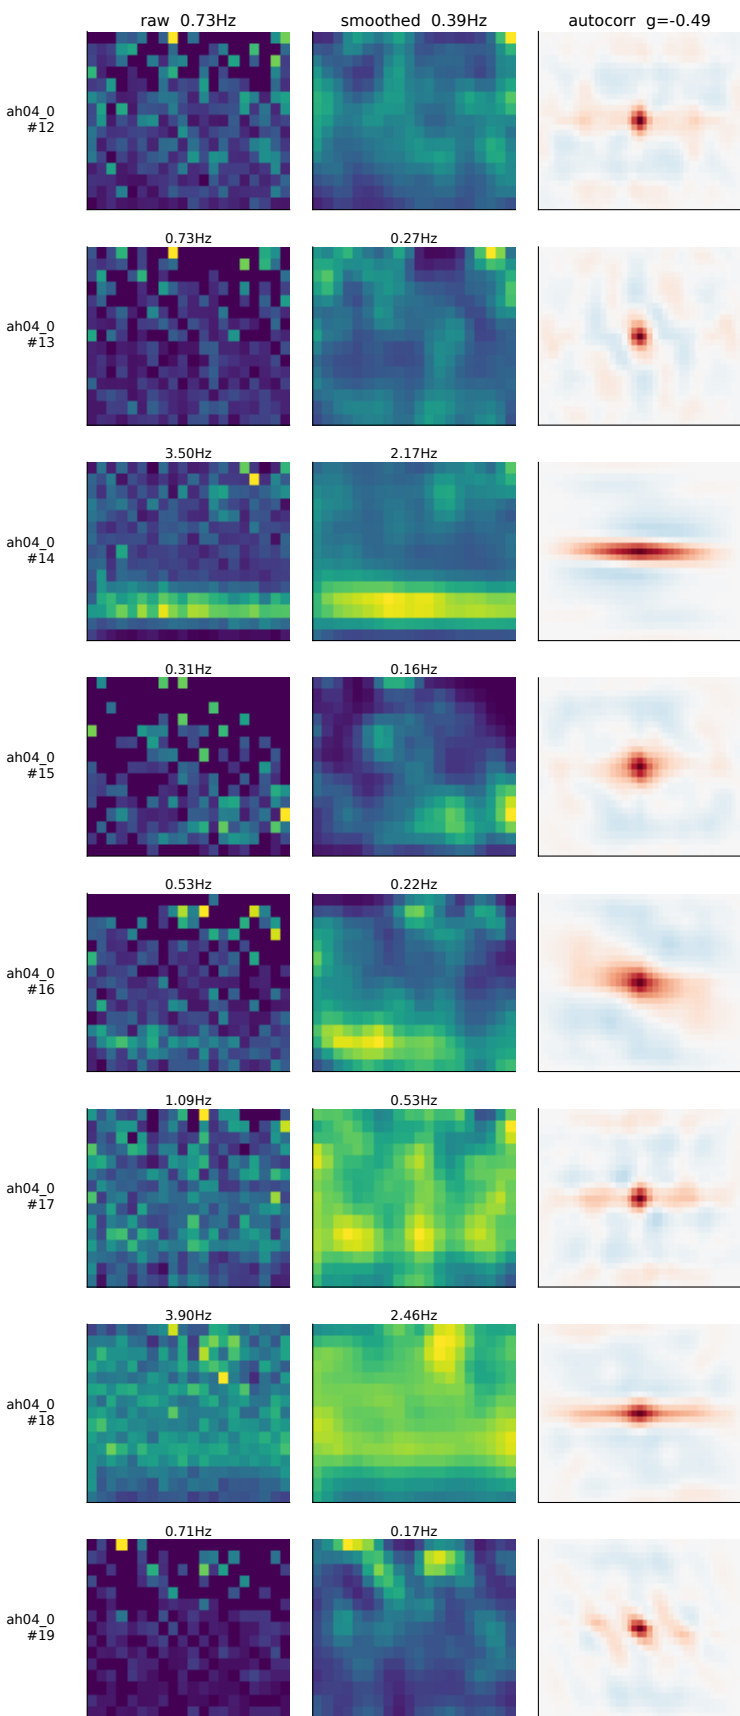


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

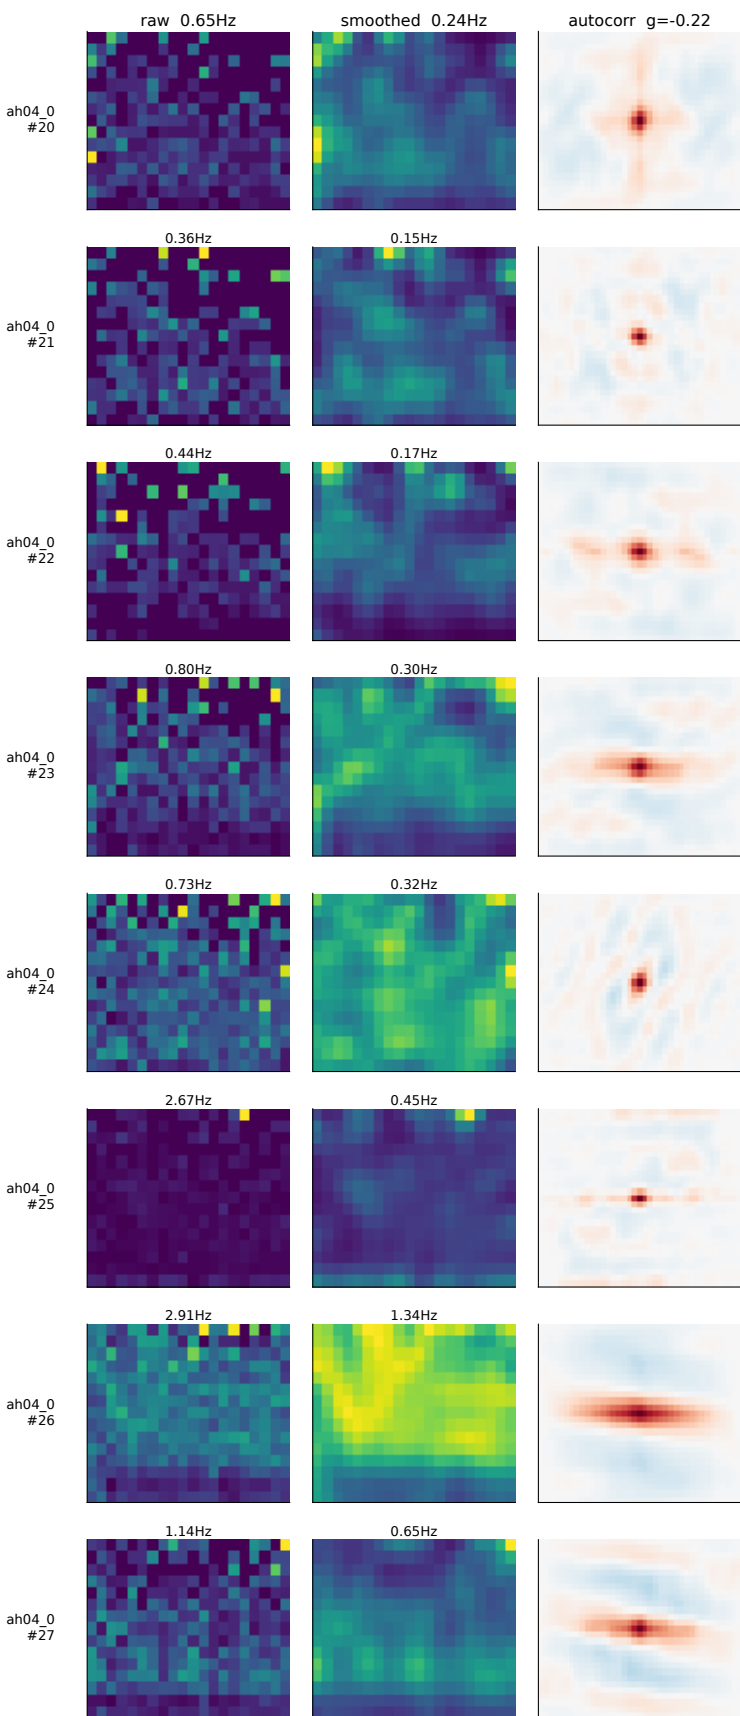





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

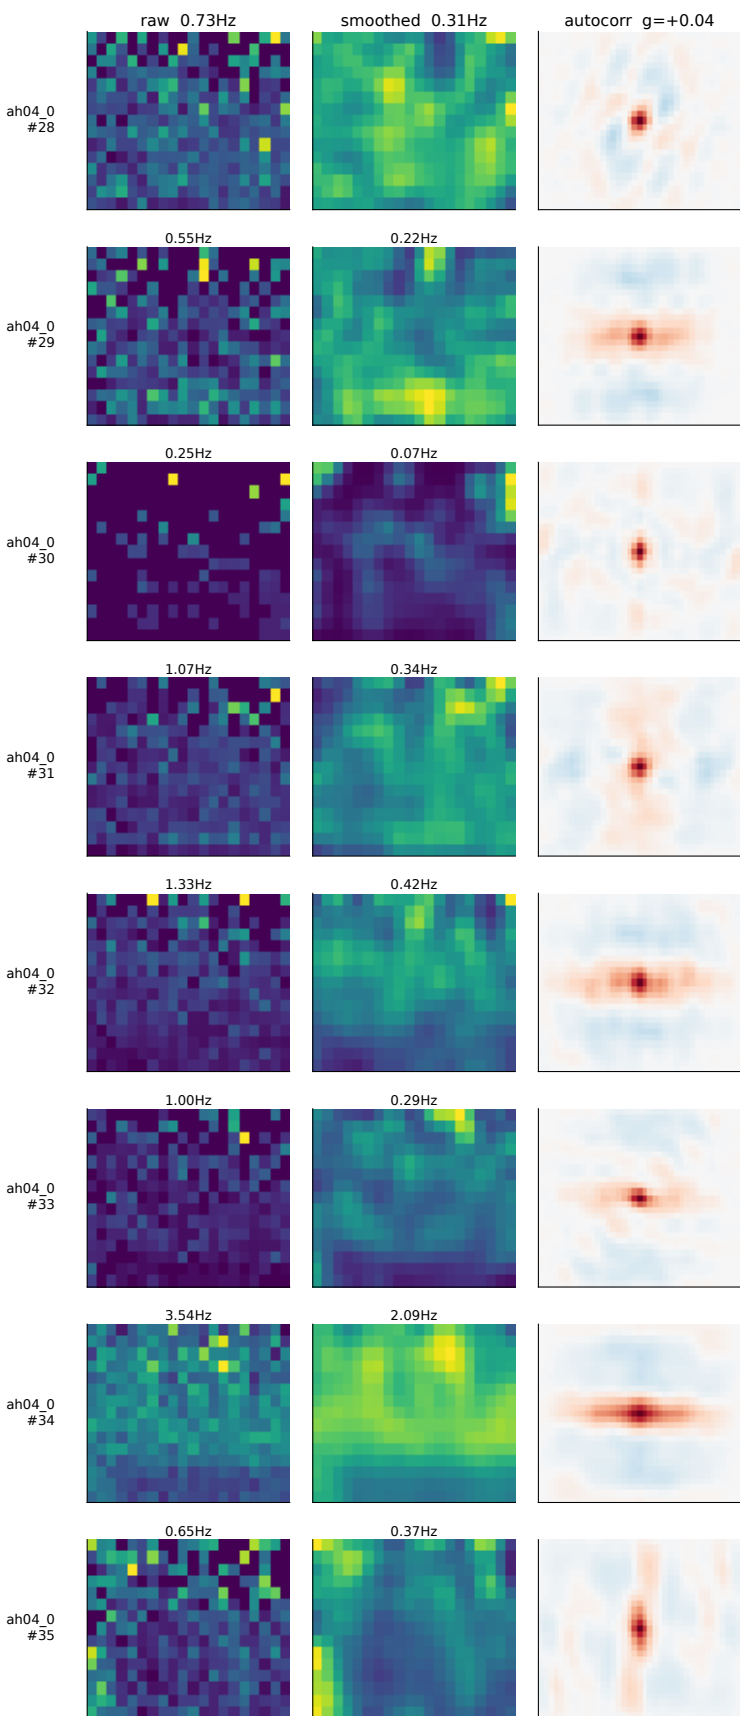


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

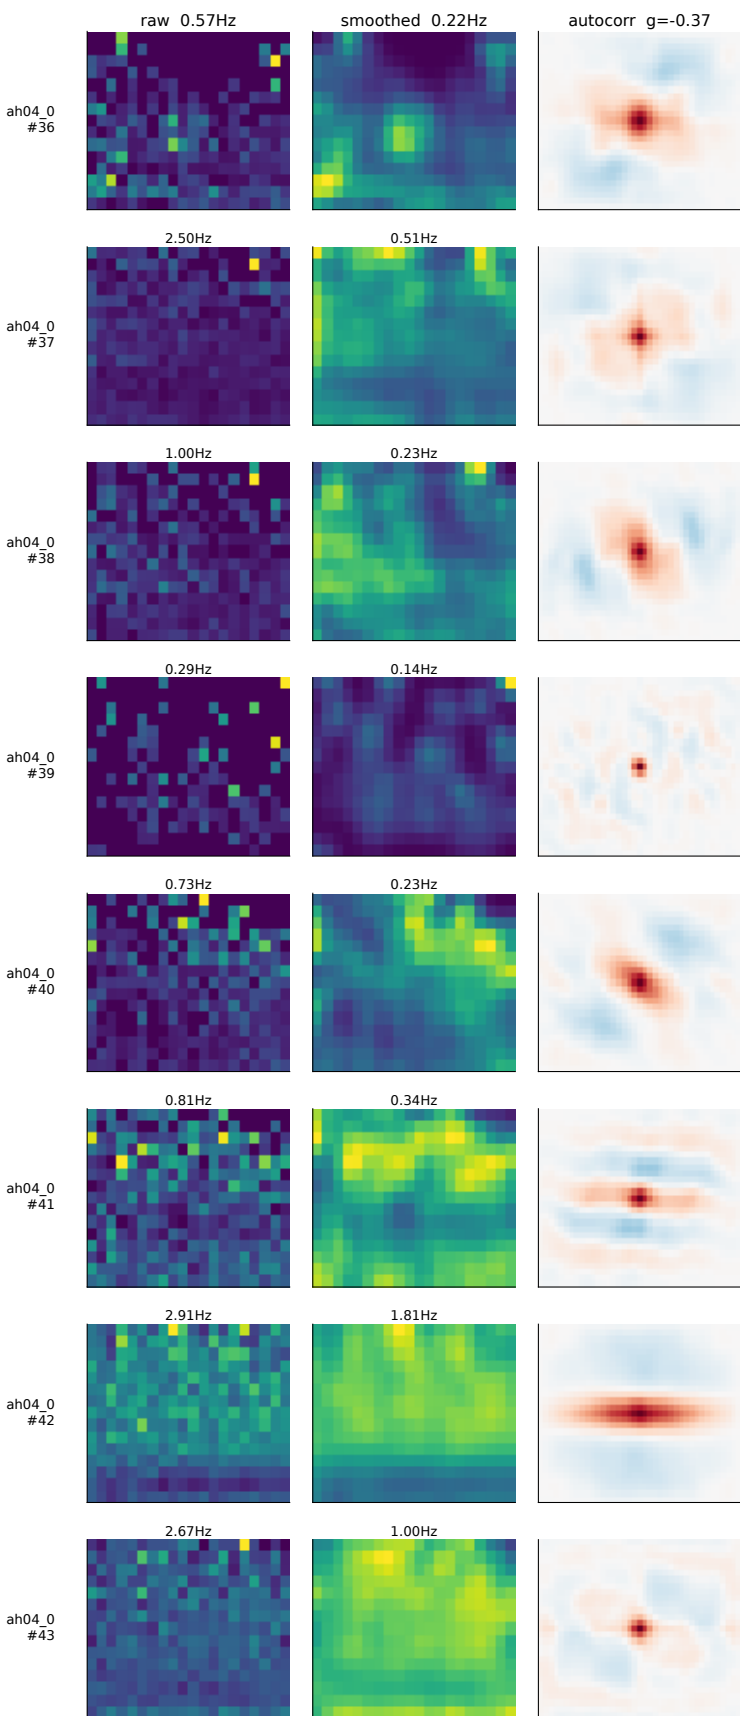


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

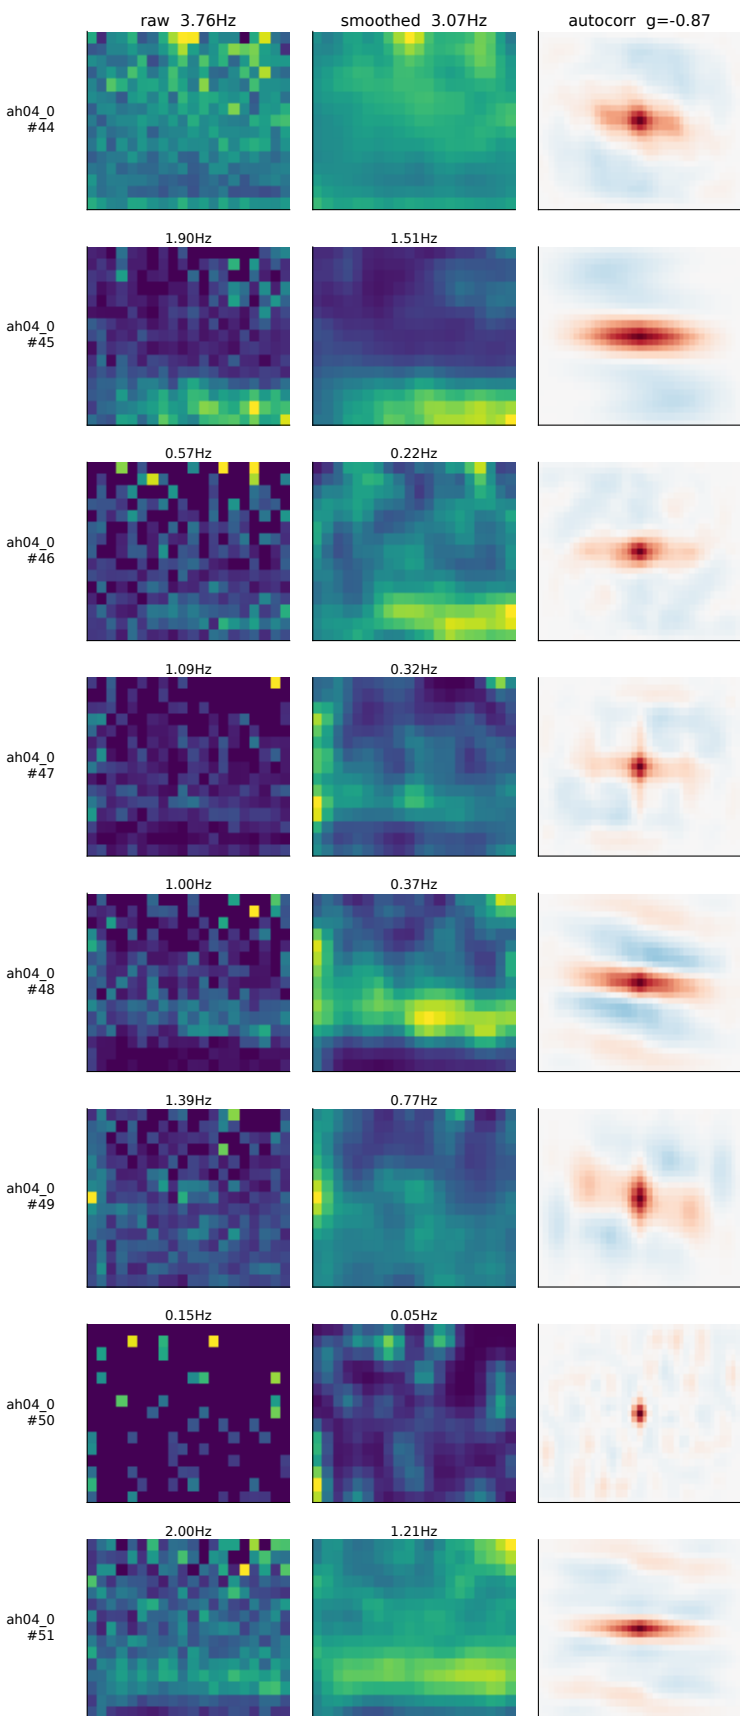


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

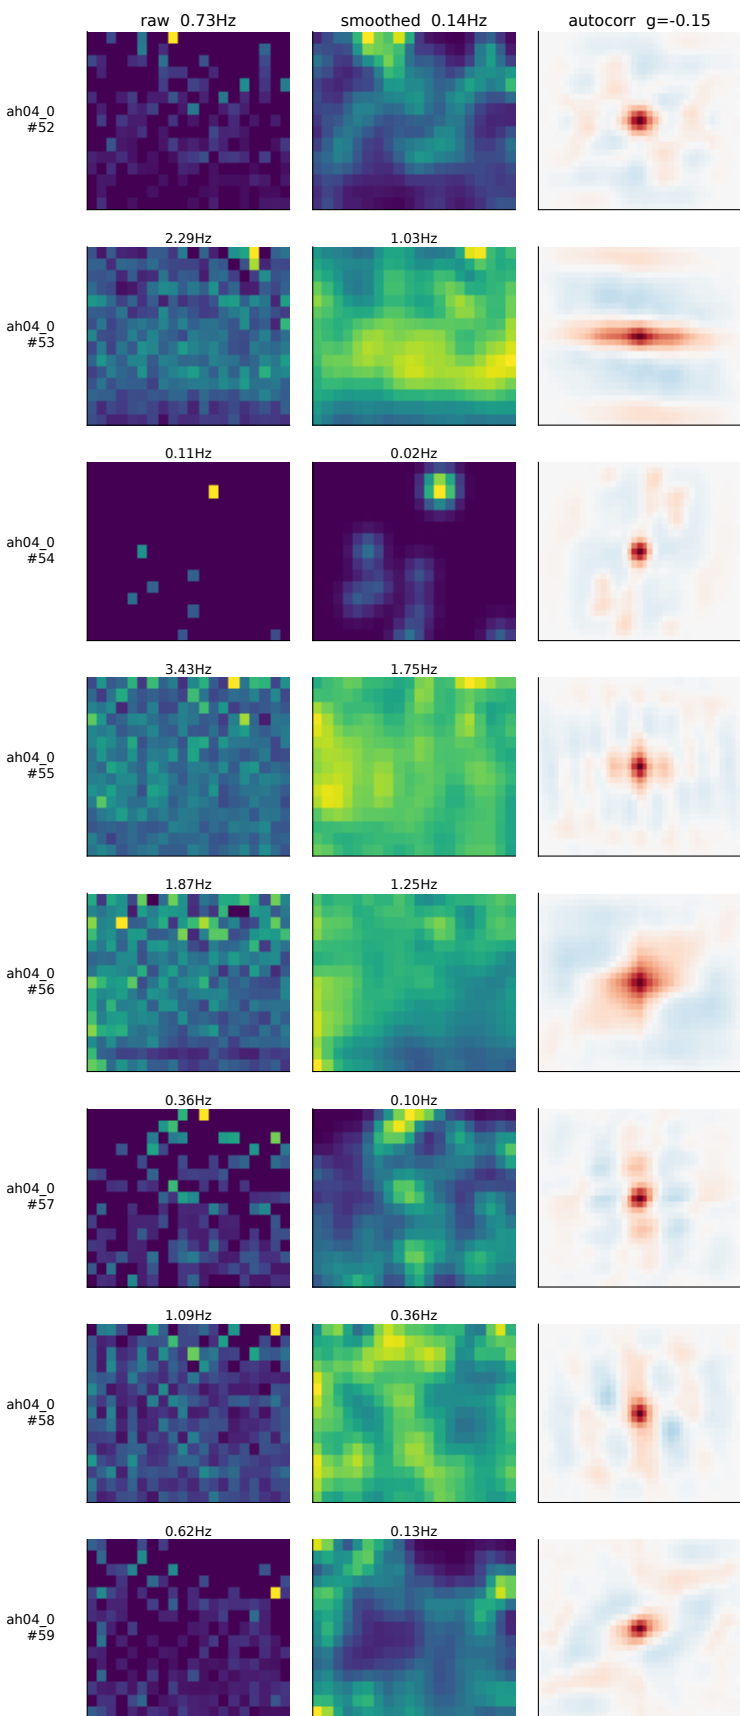


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

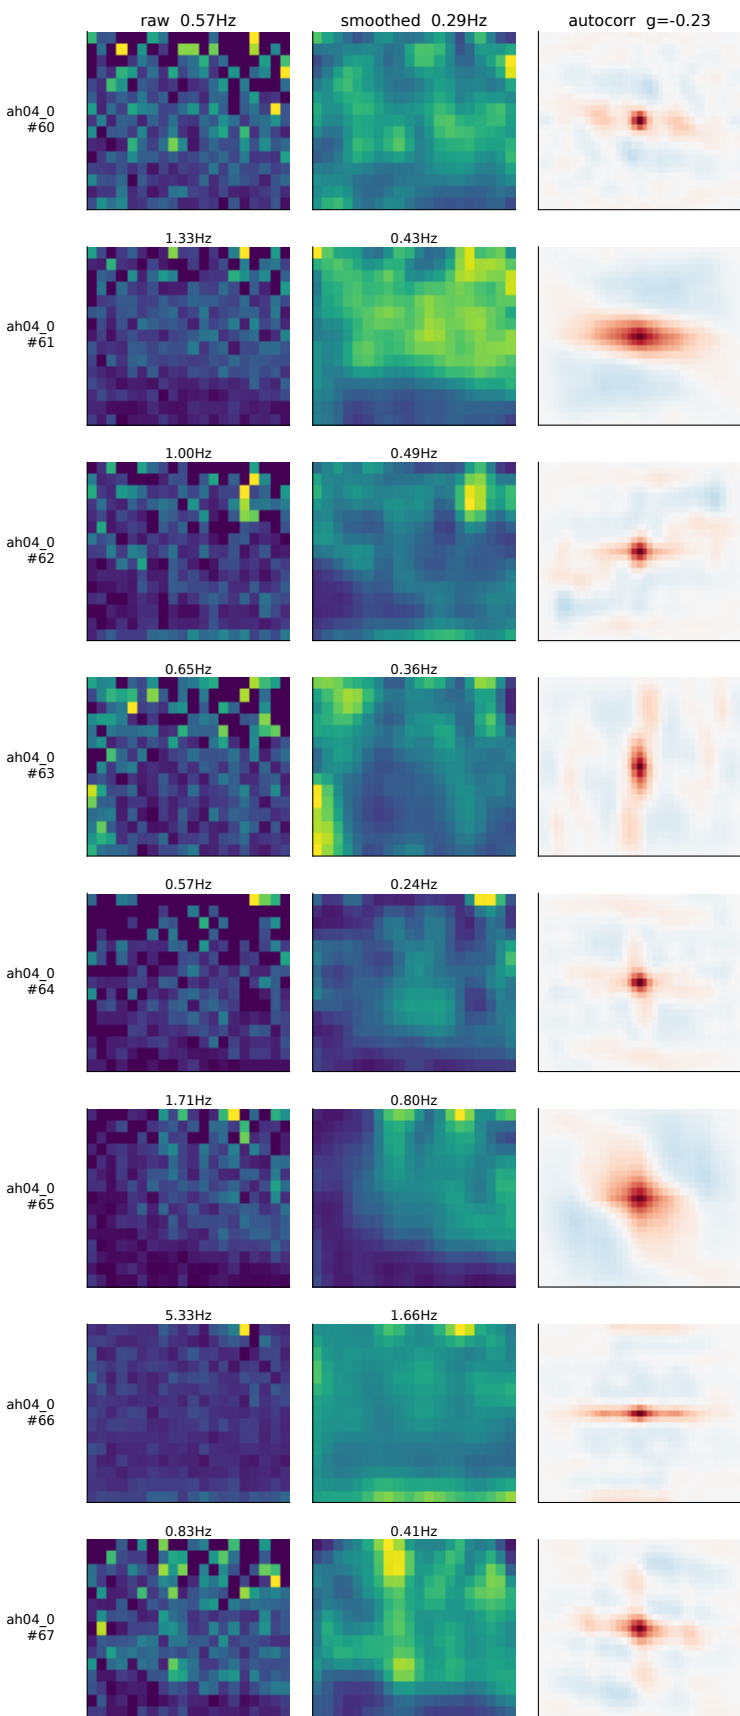


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 2  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

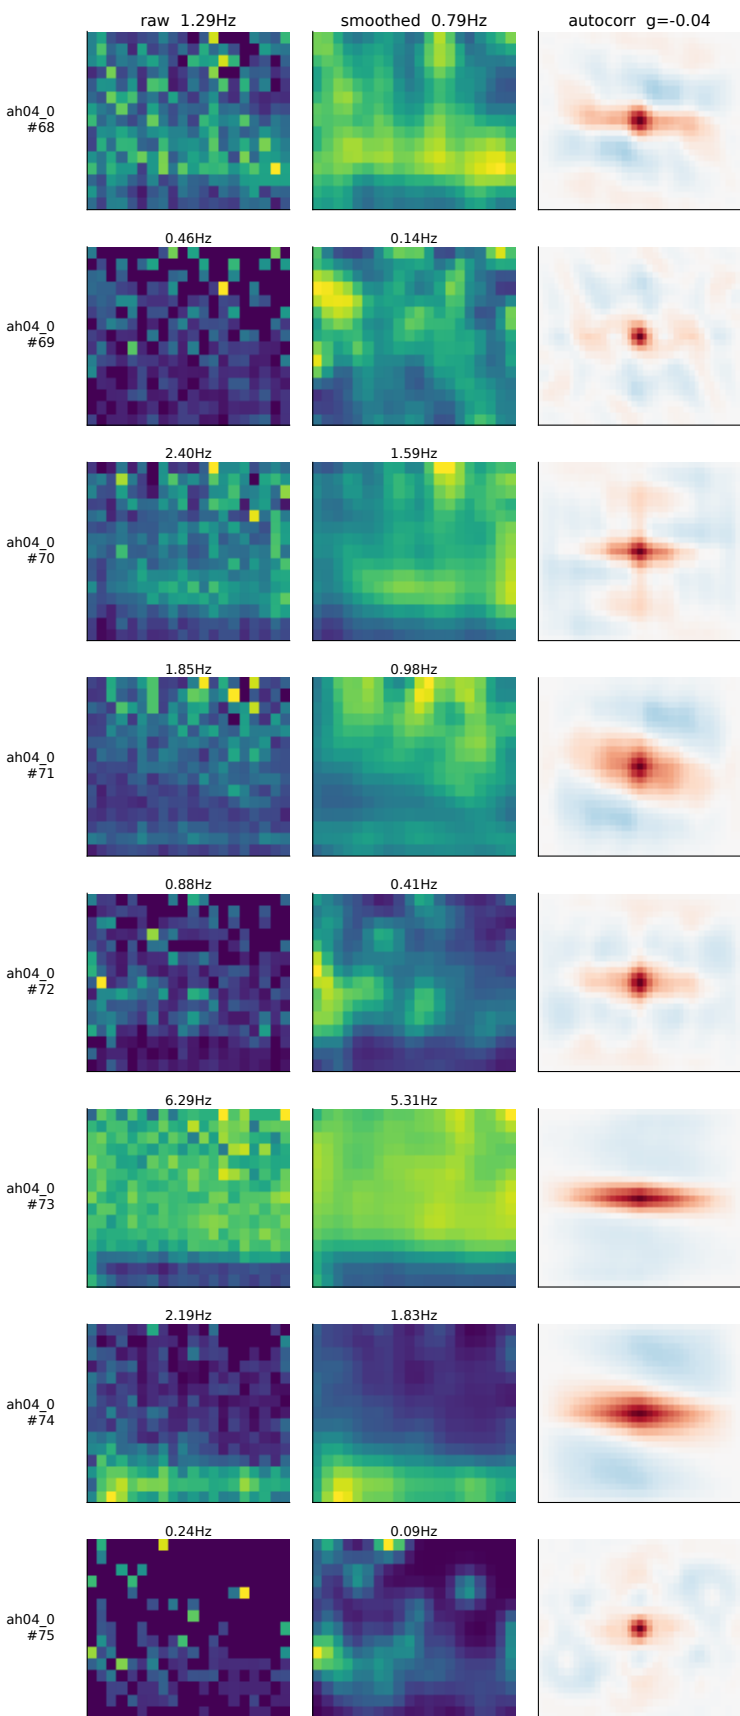

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

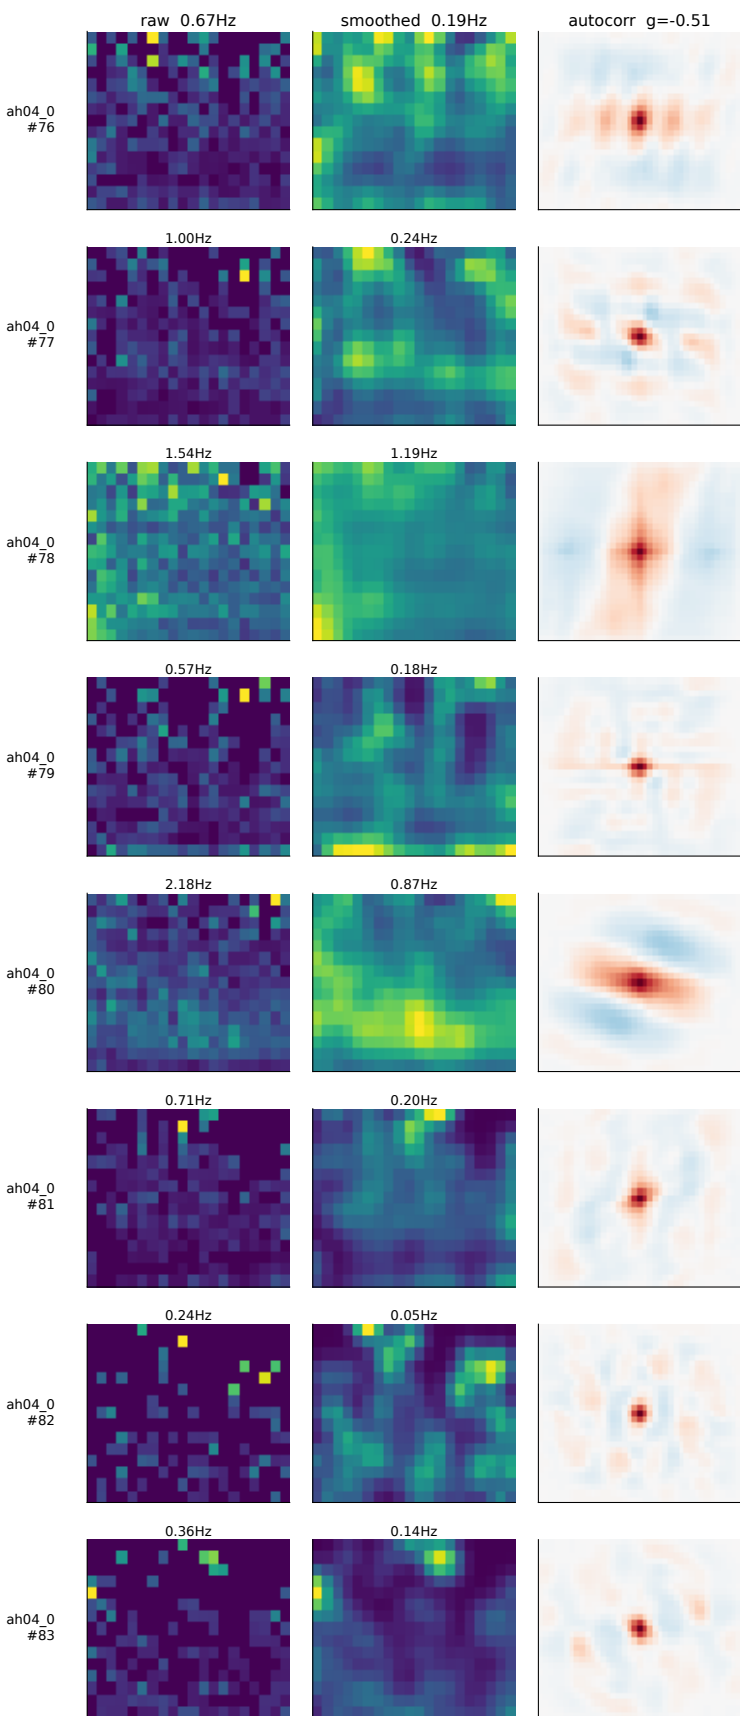


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

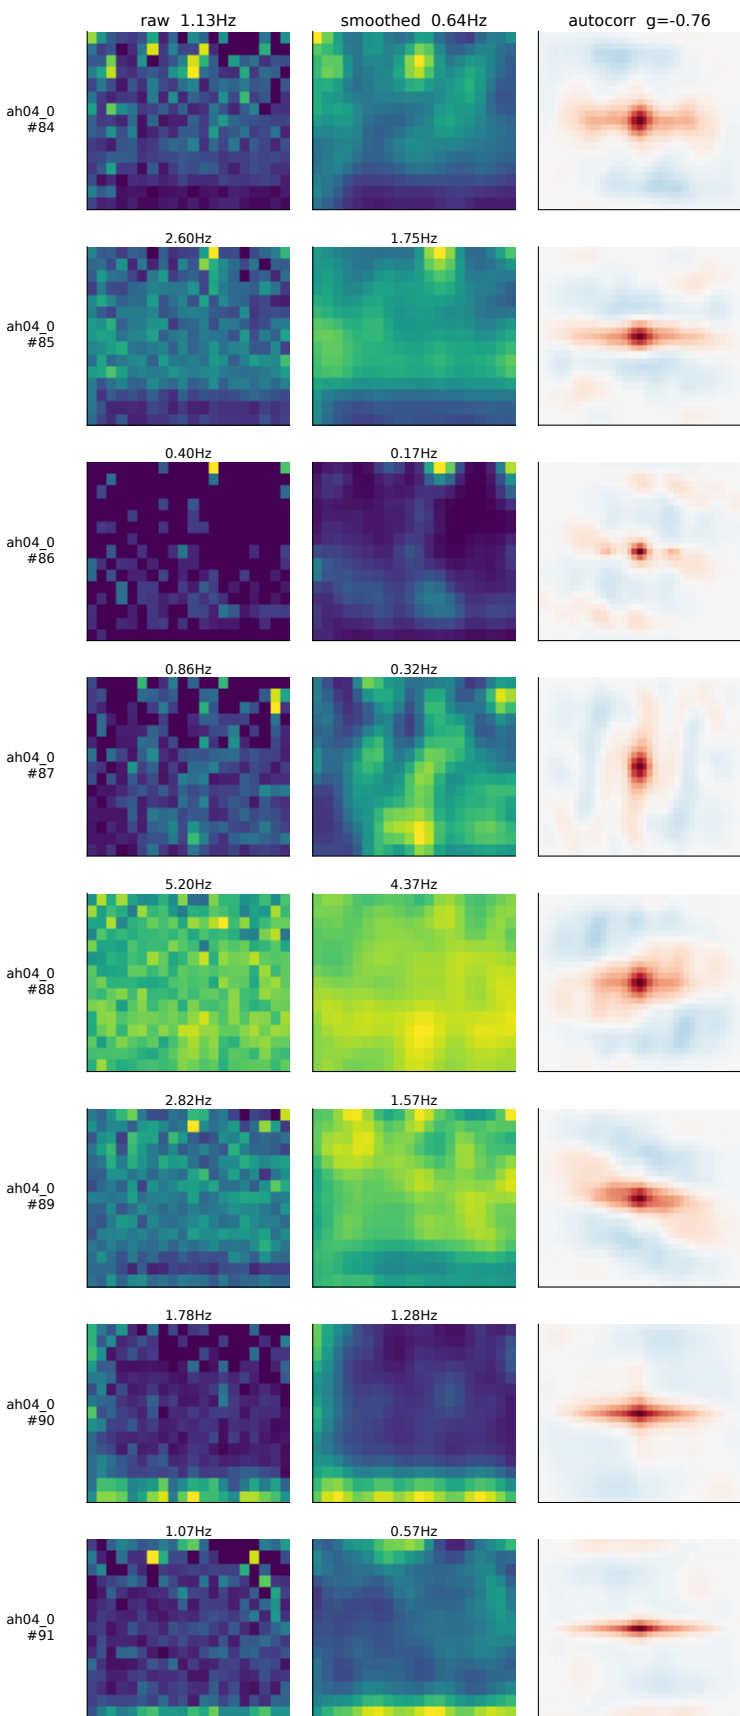





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

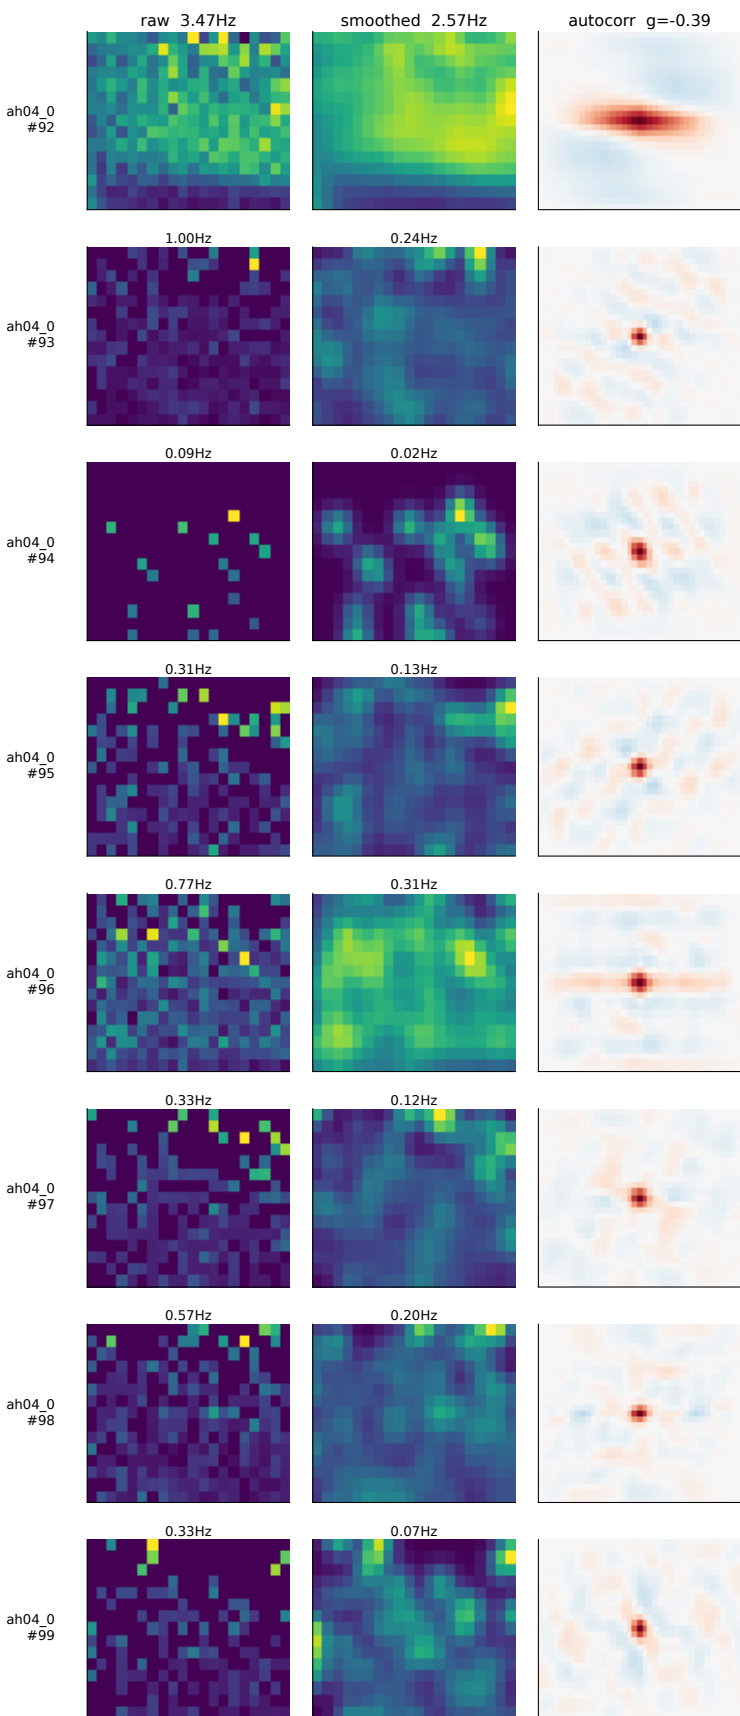


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

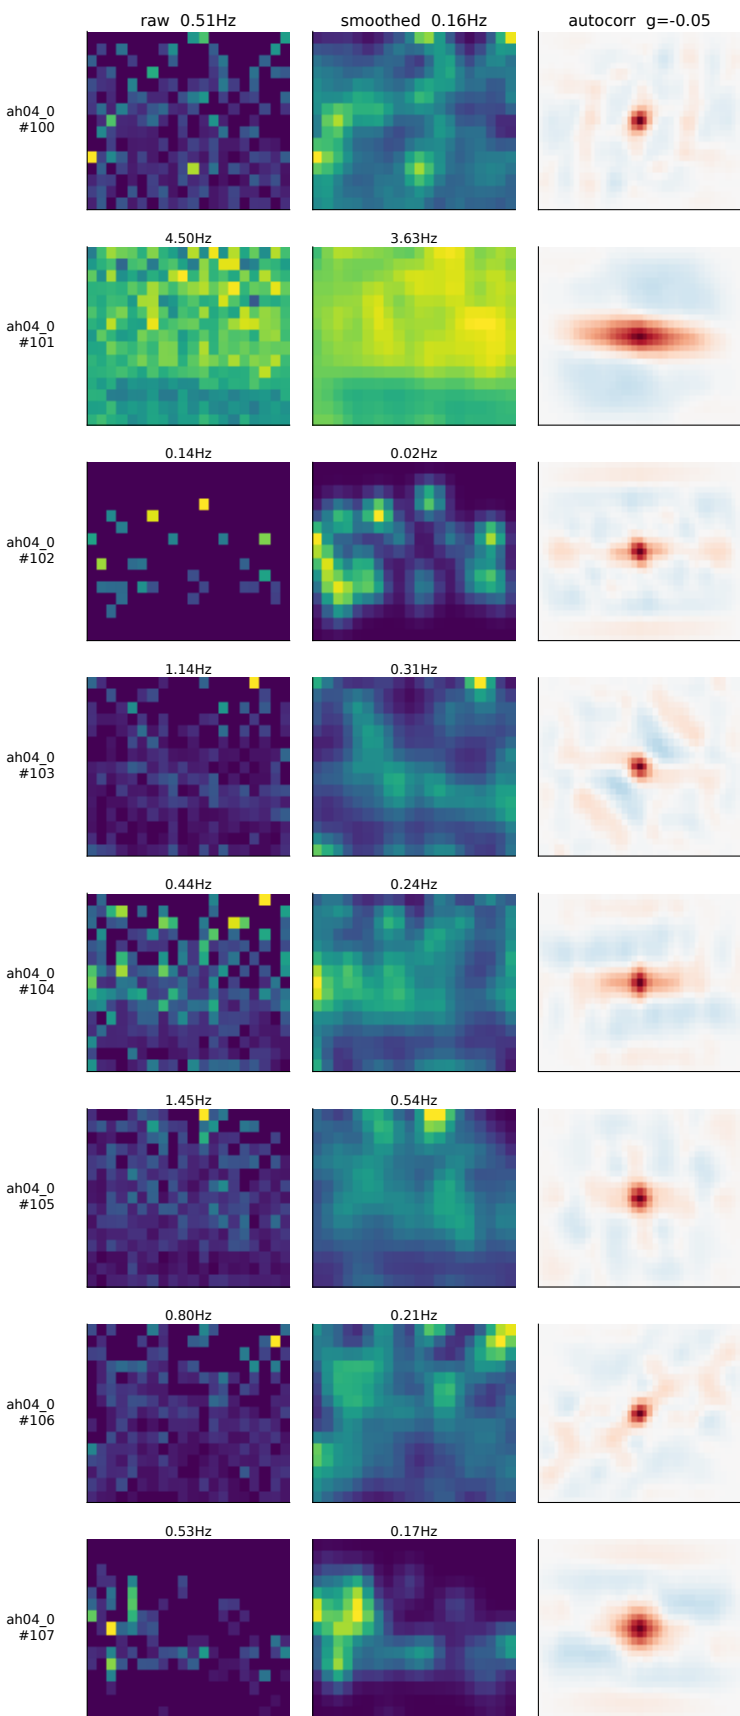


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

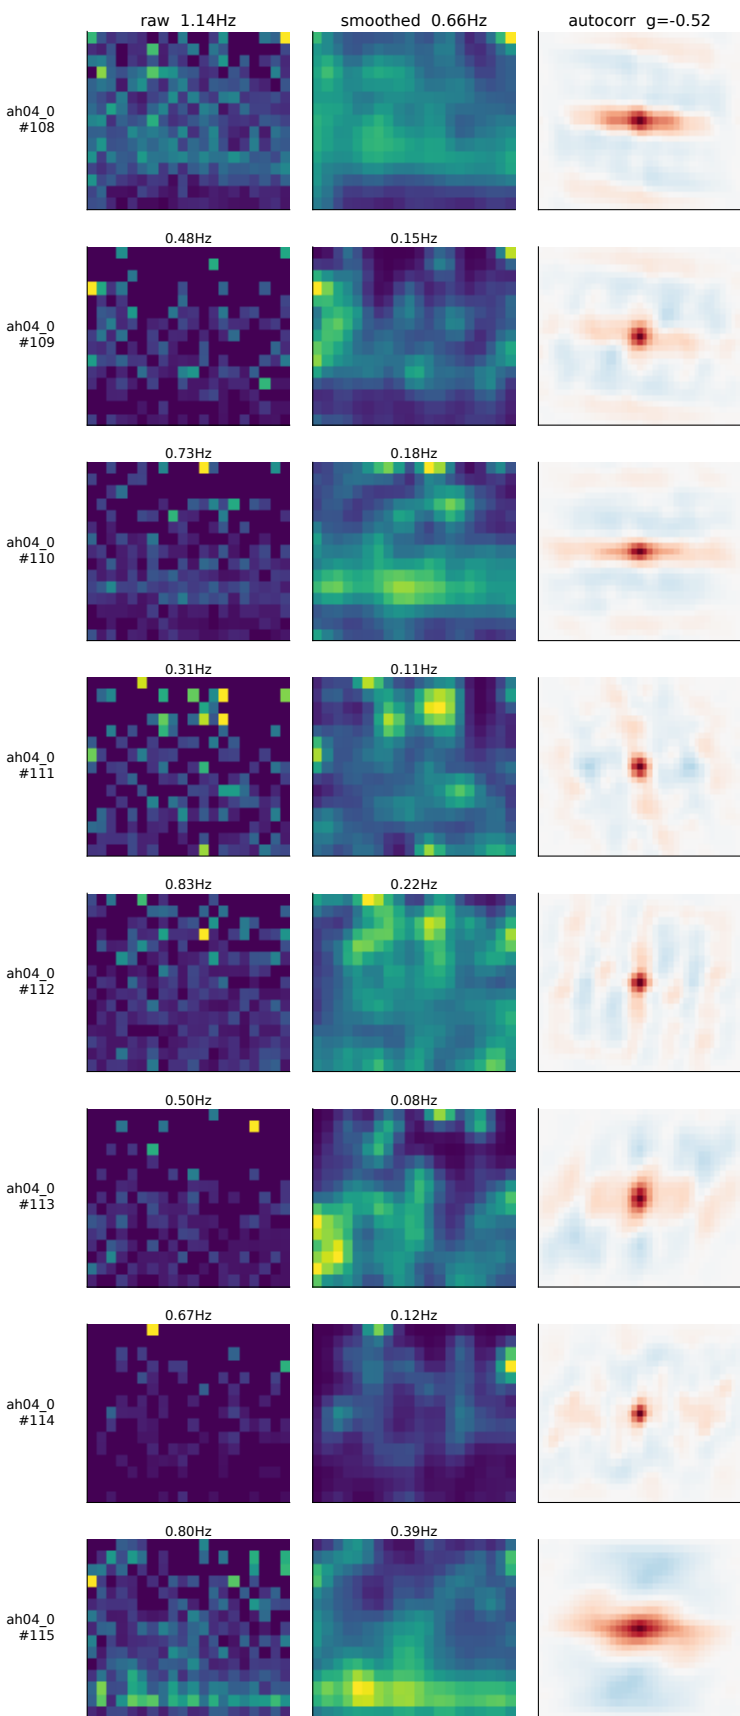


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

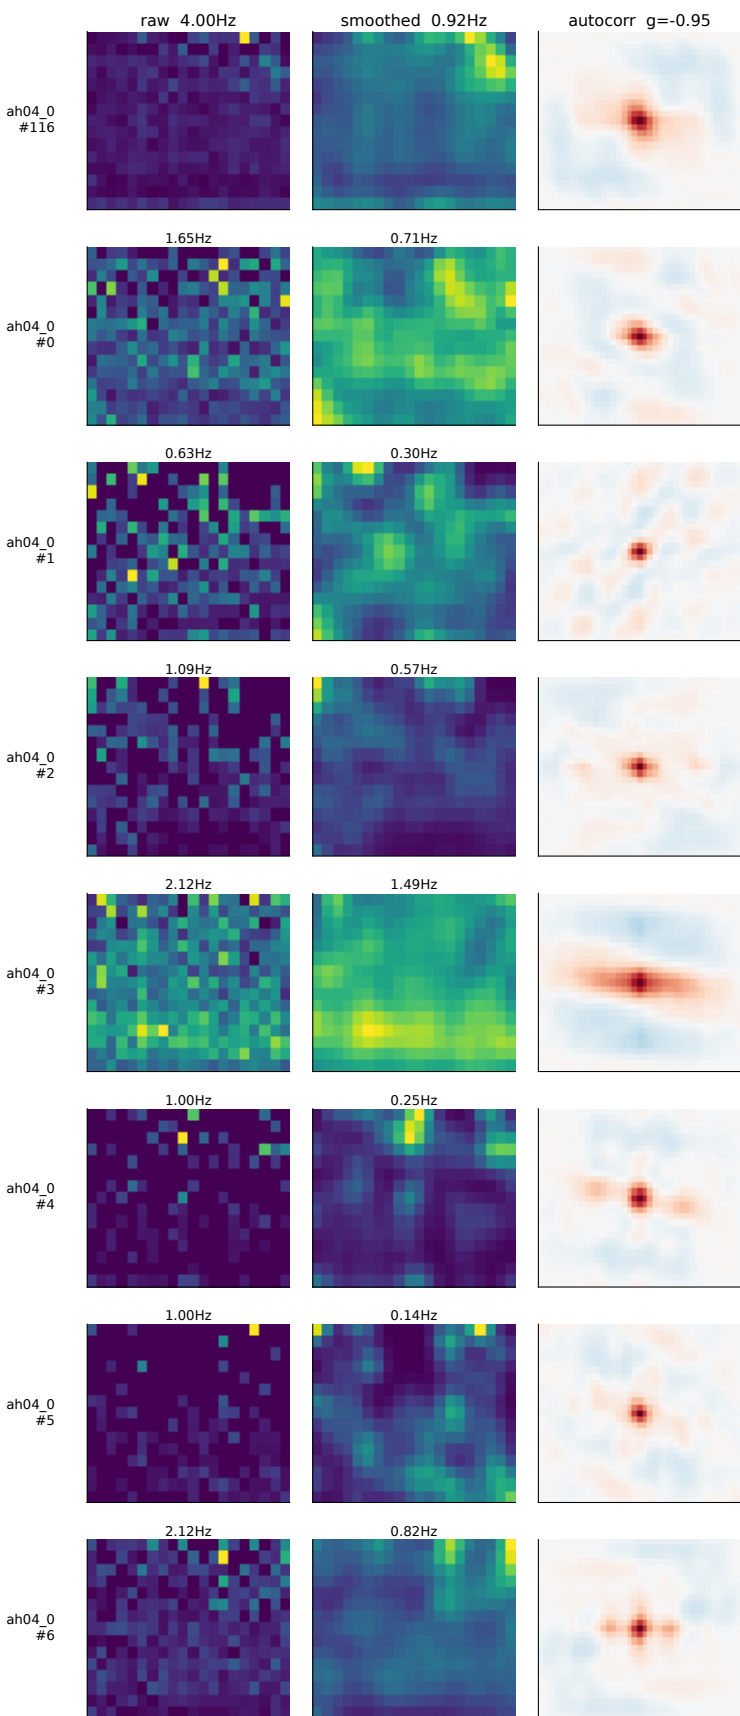


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

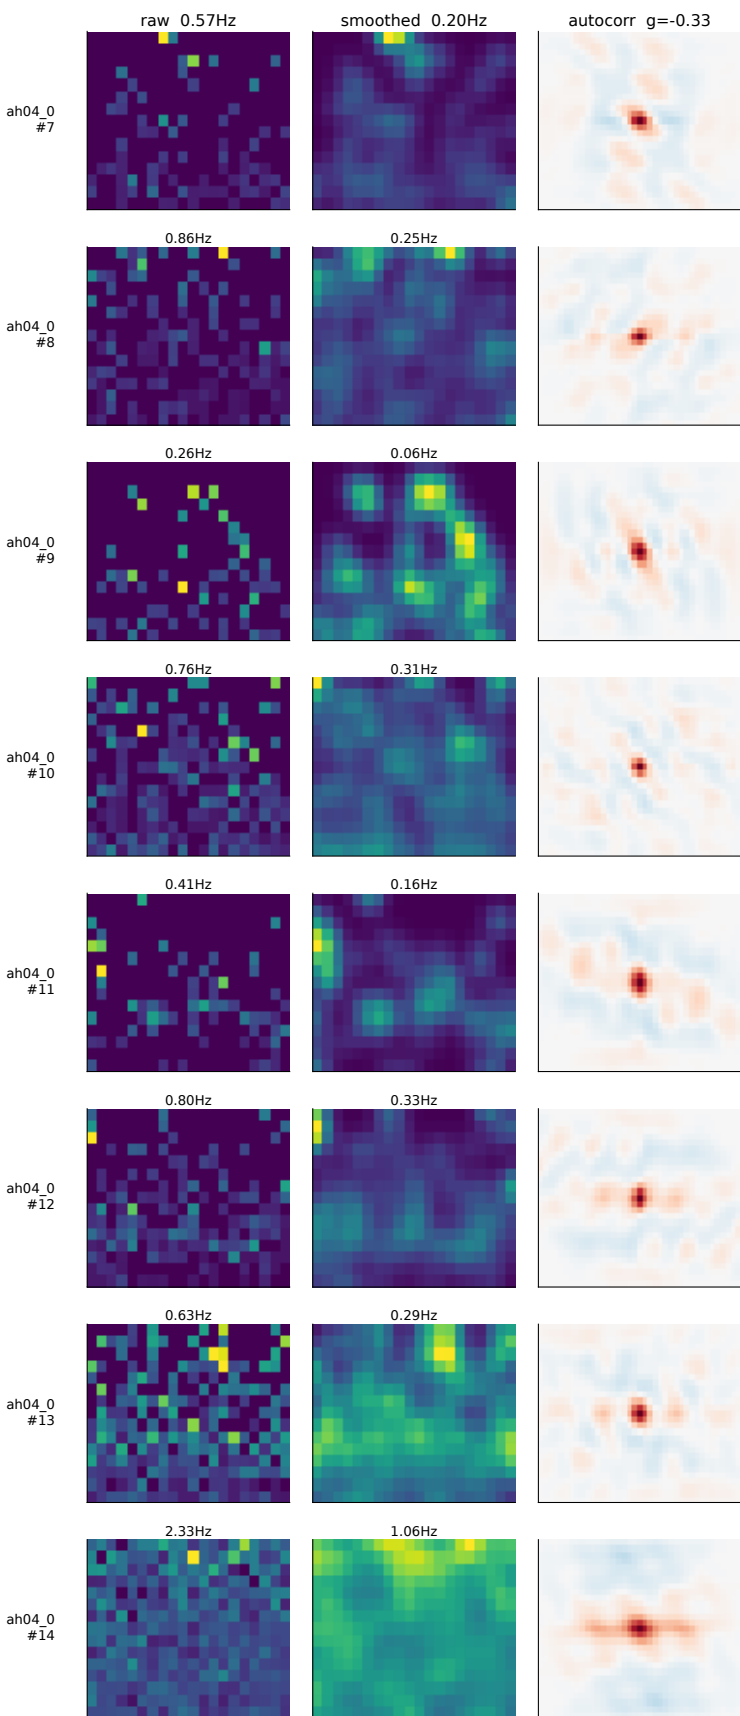


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

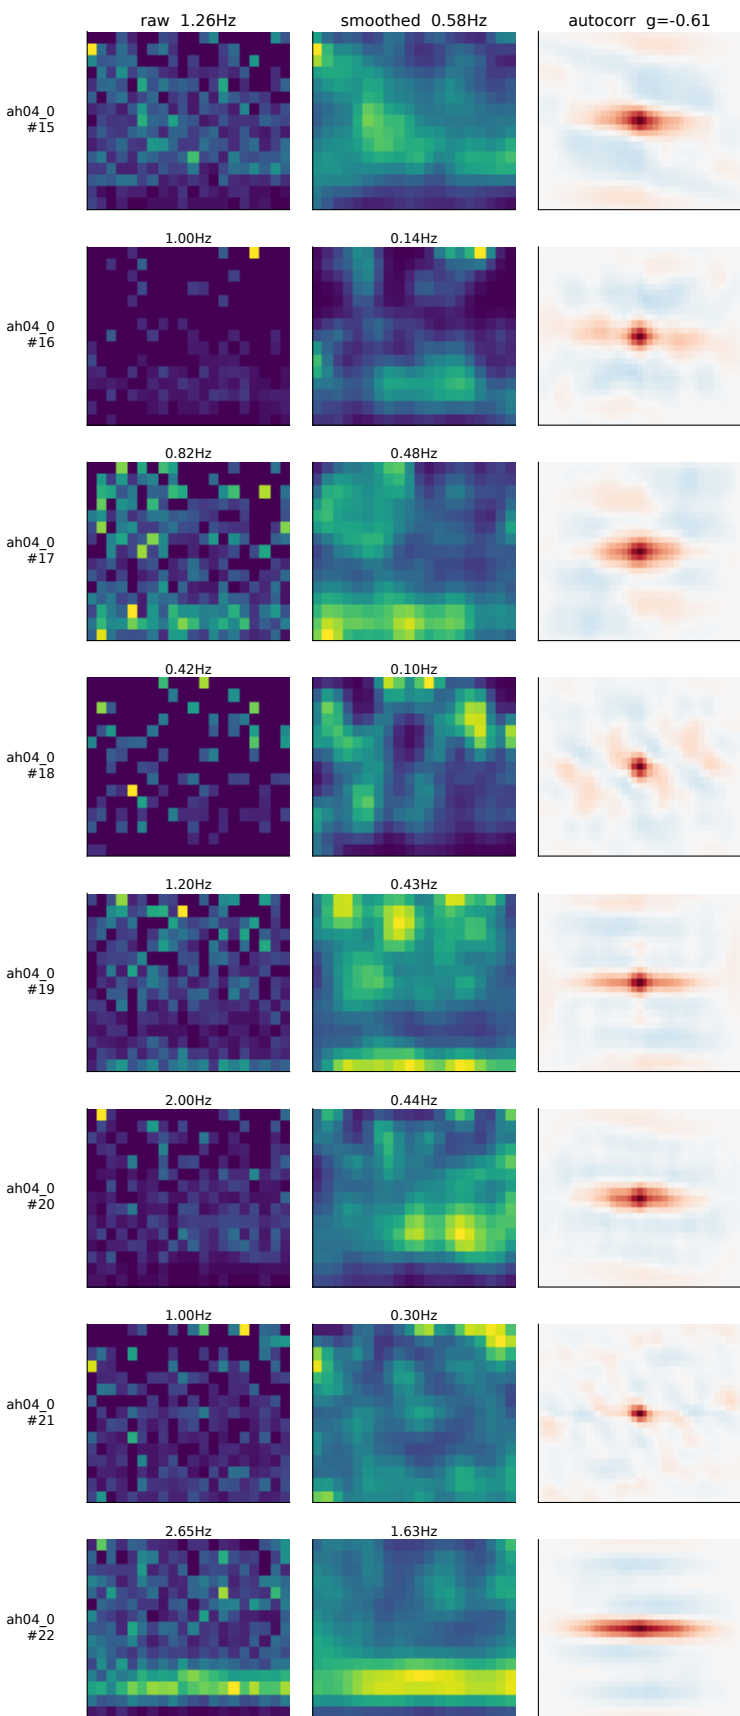

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

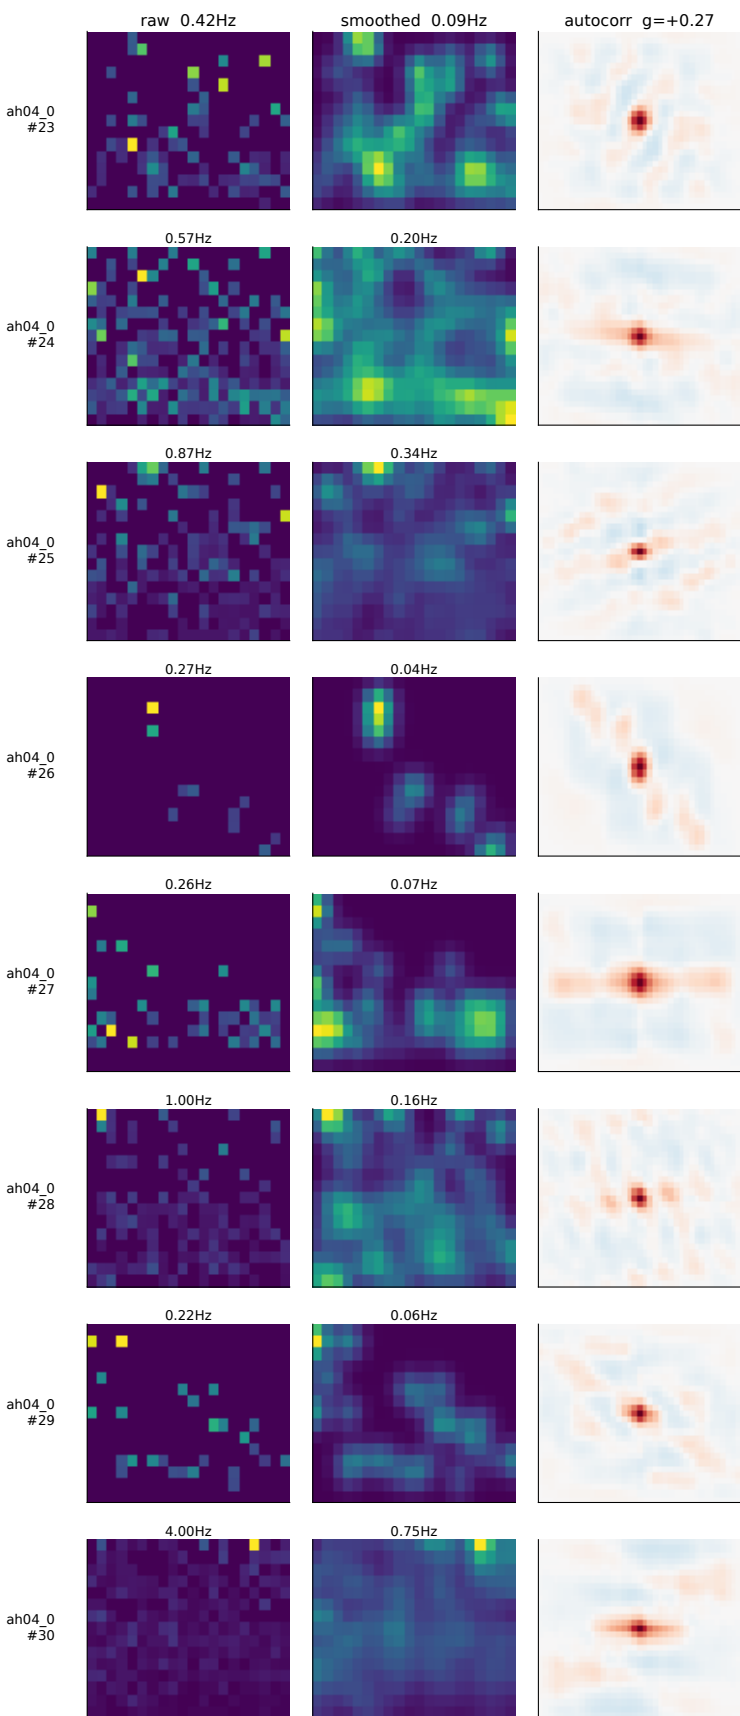


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

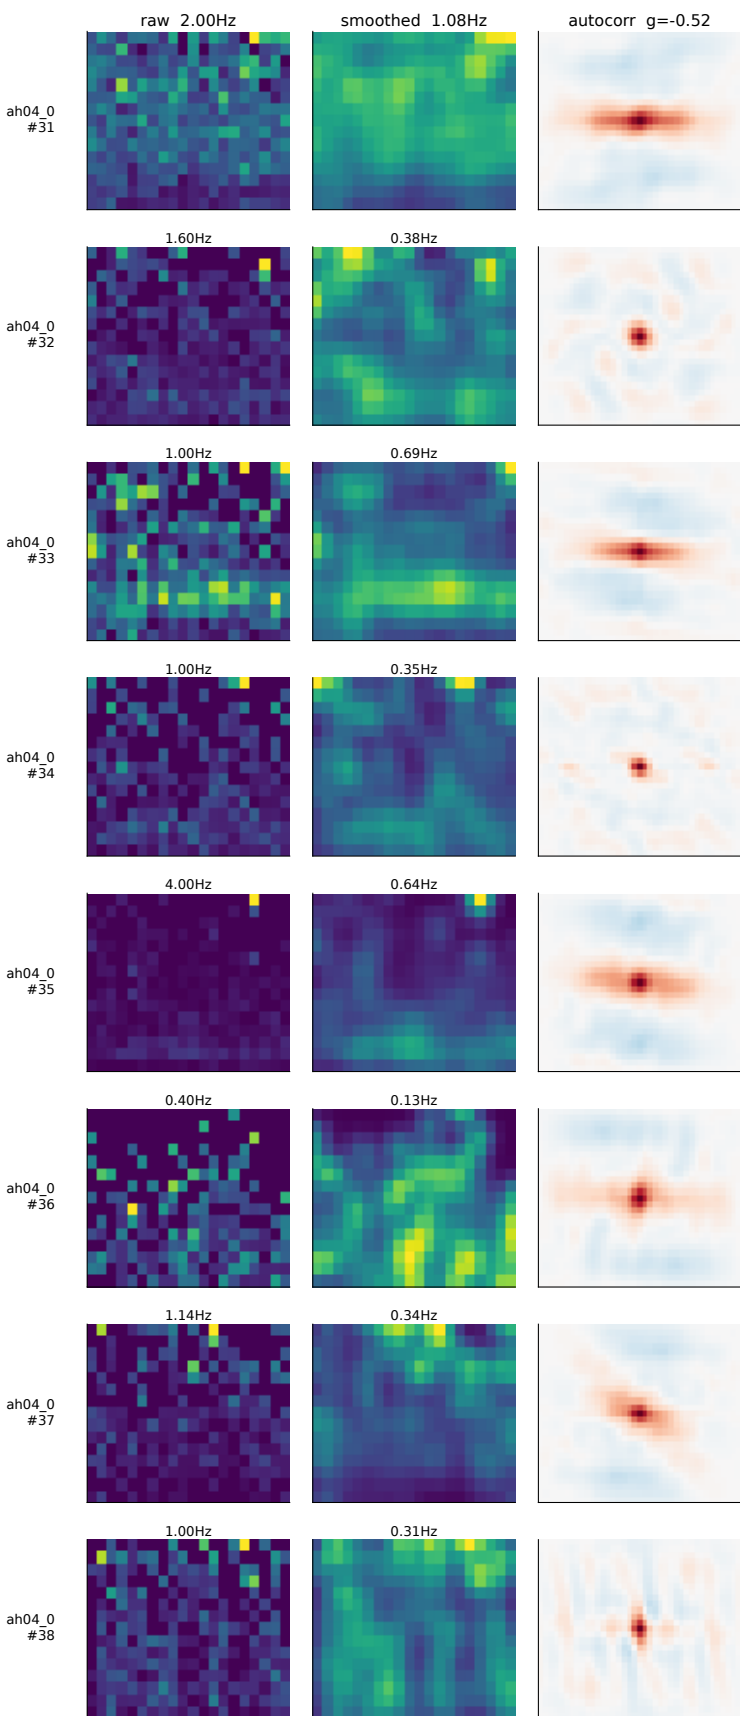





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

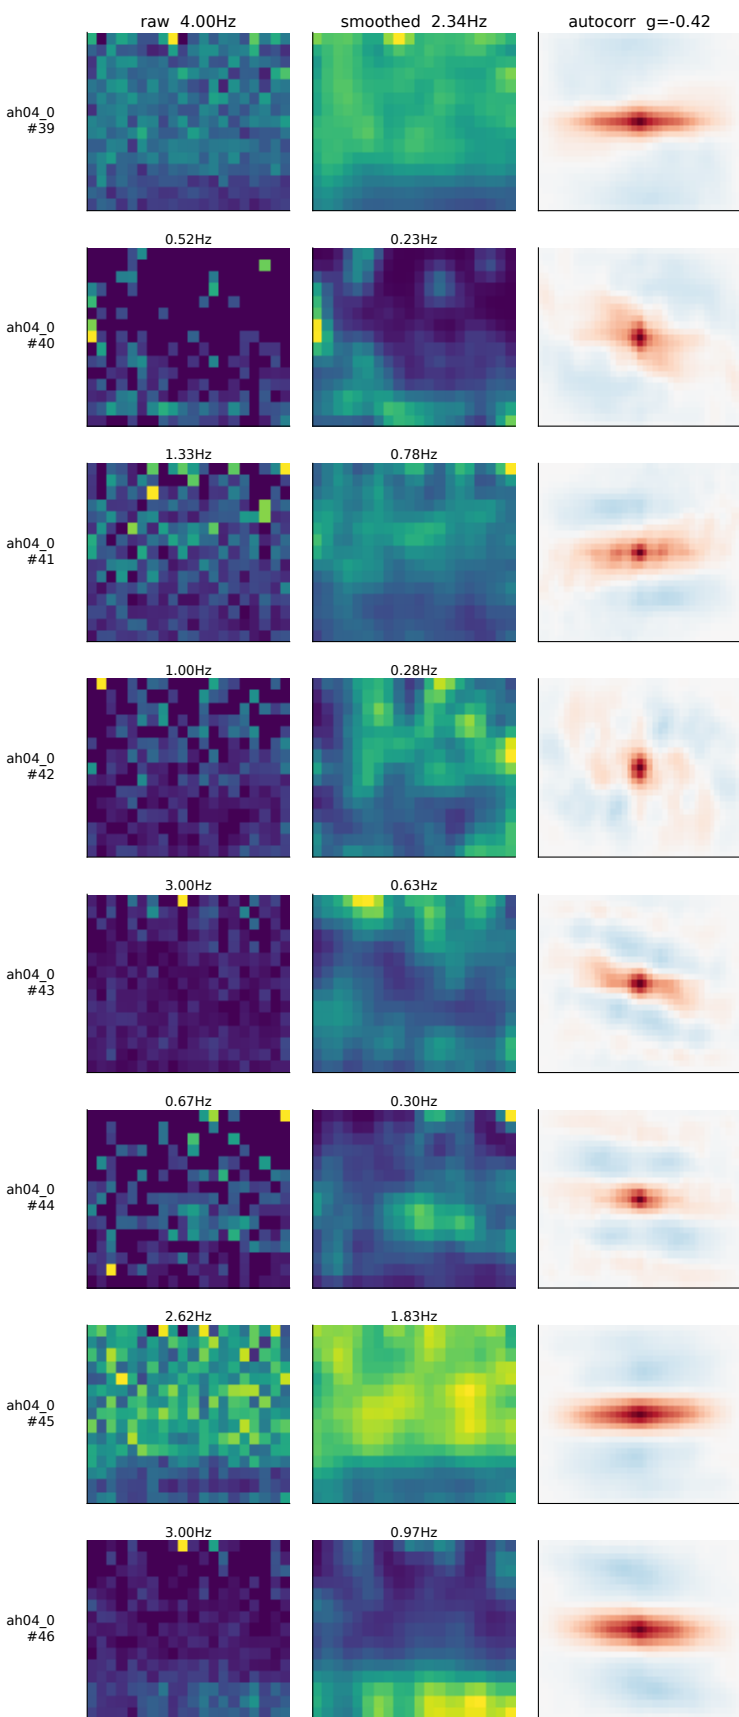


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 3  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

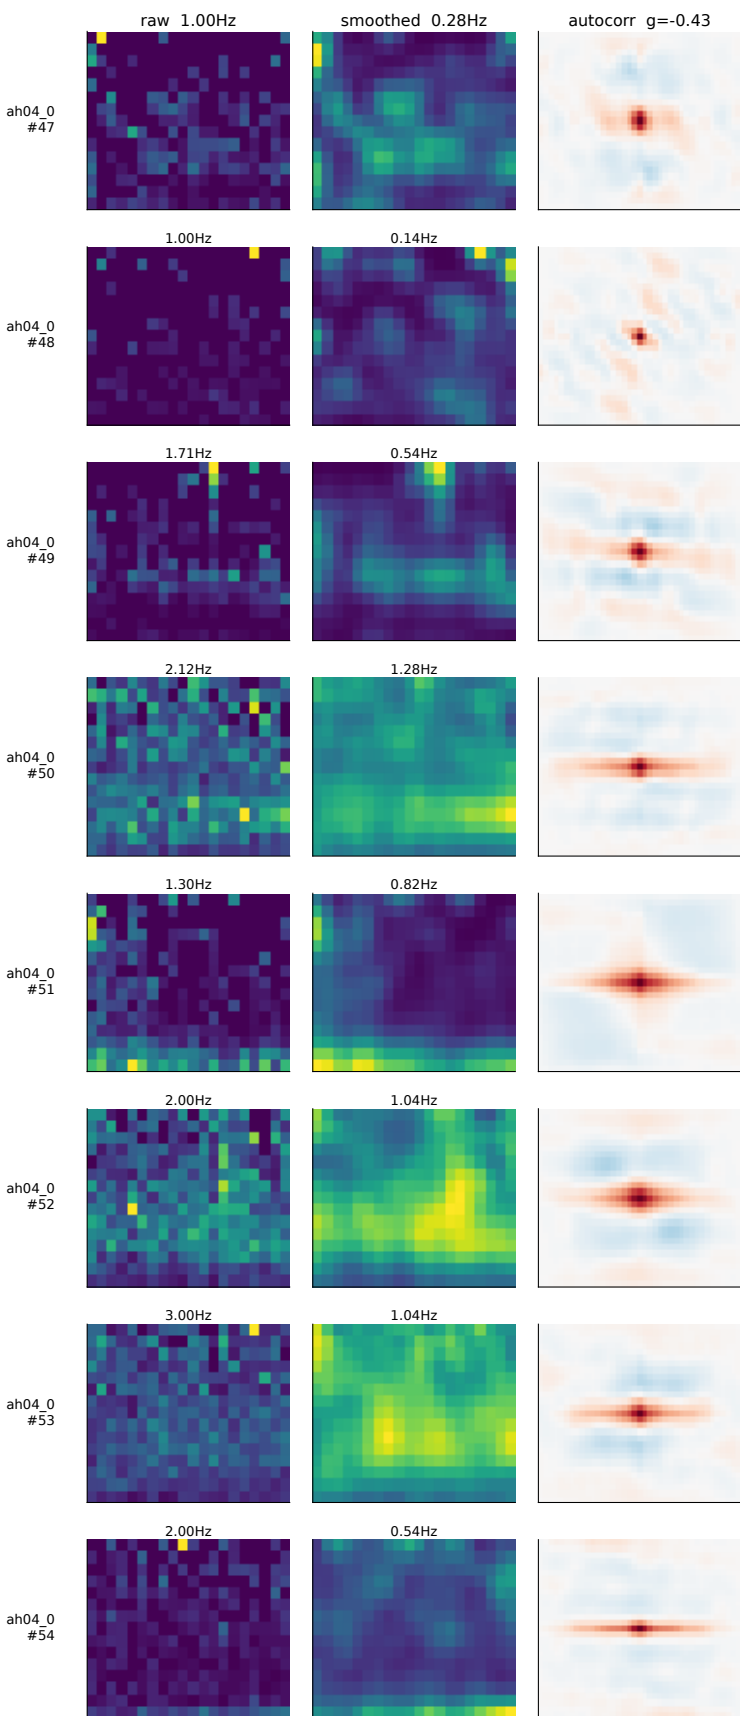


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

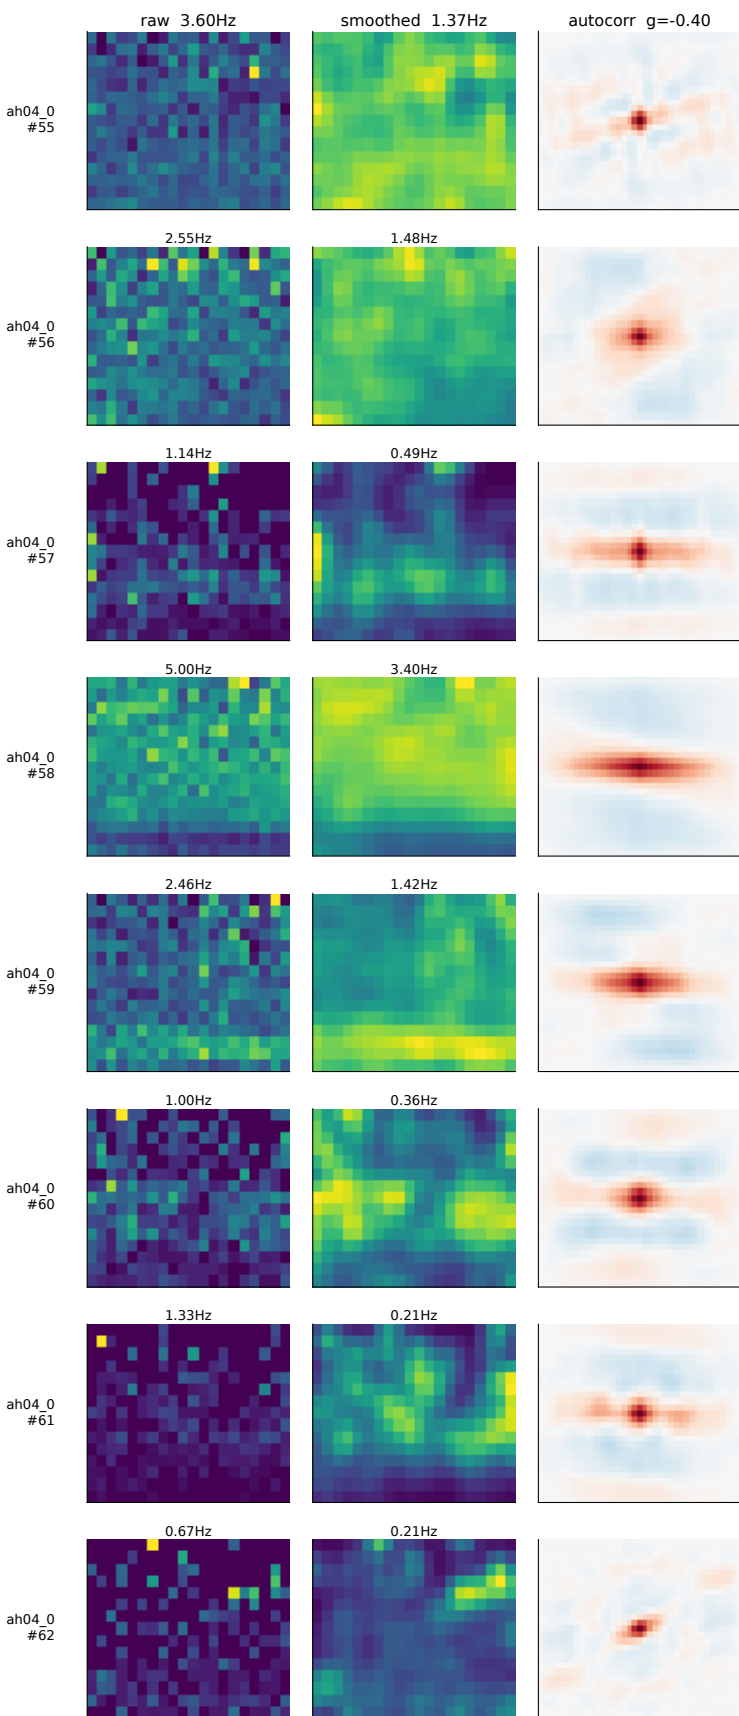


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

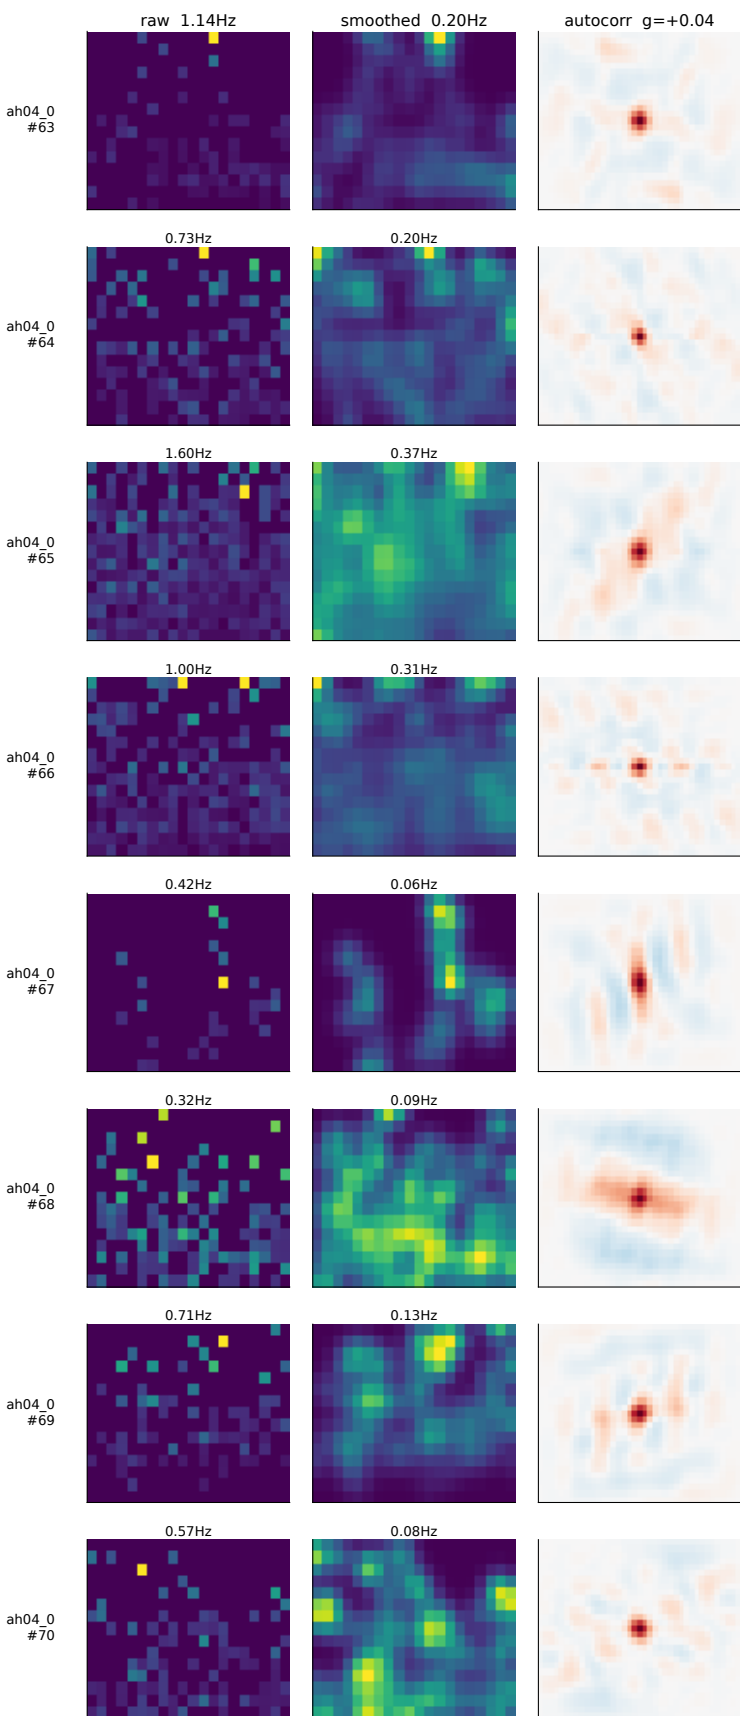


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

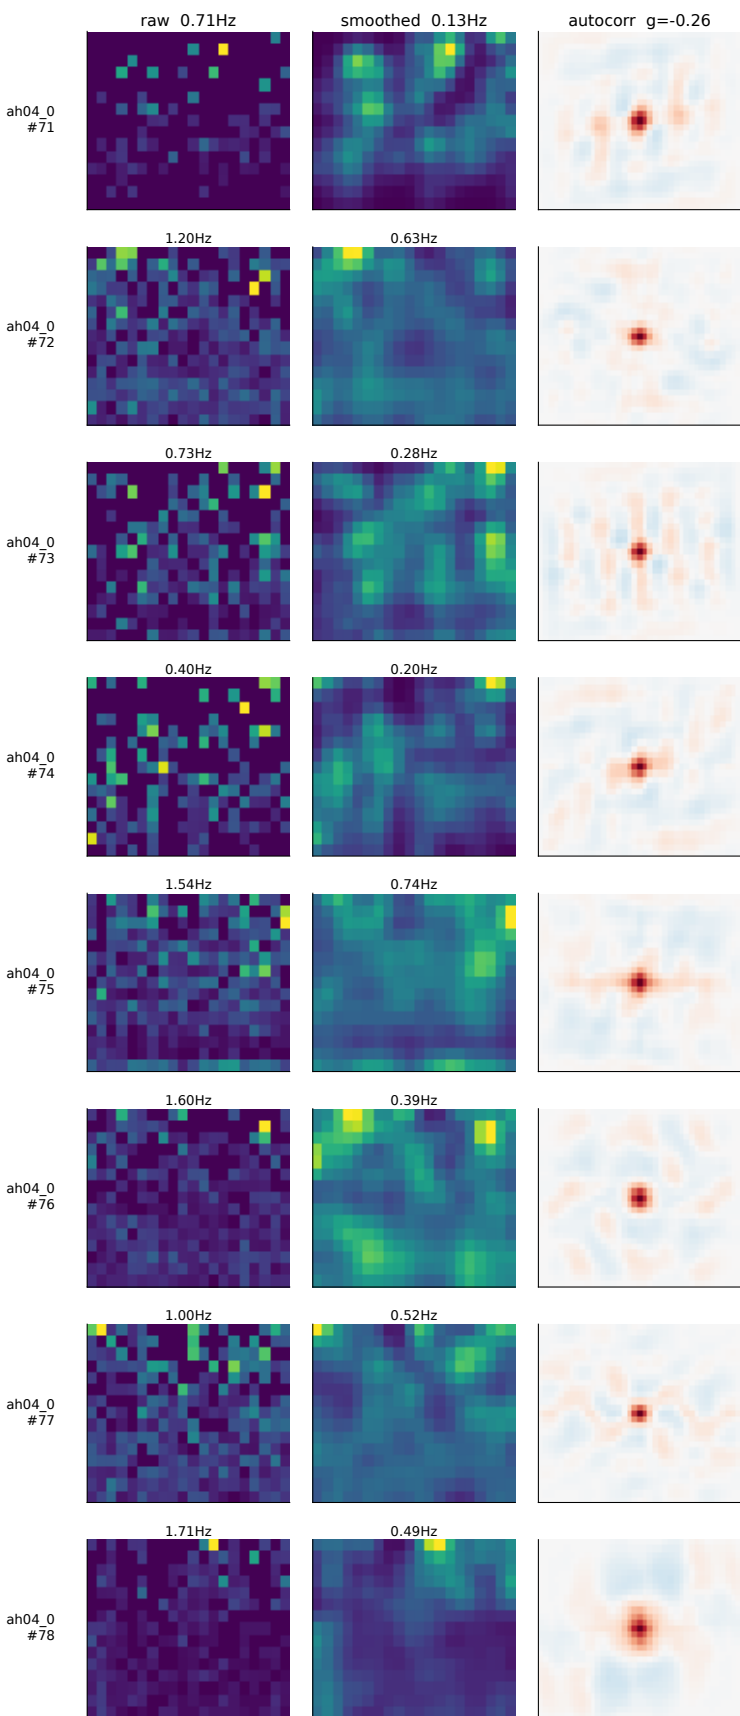


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

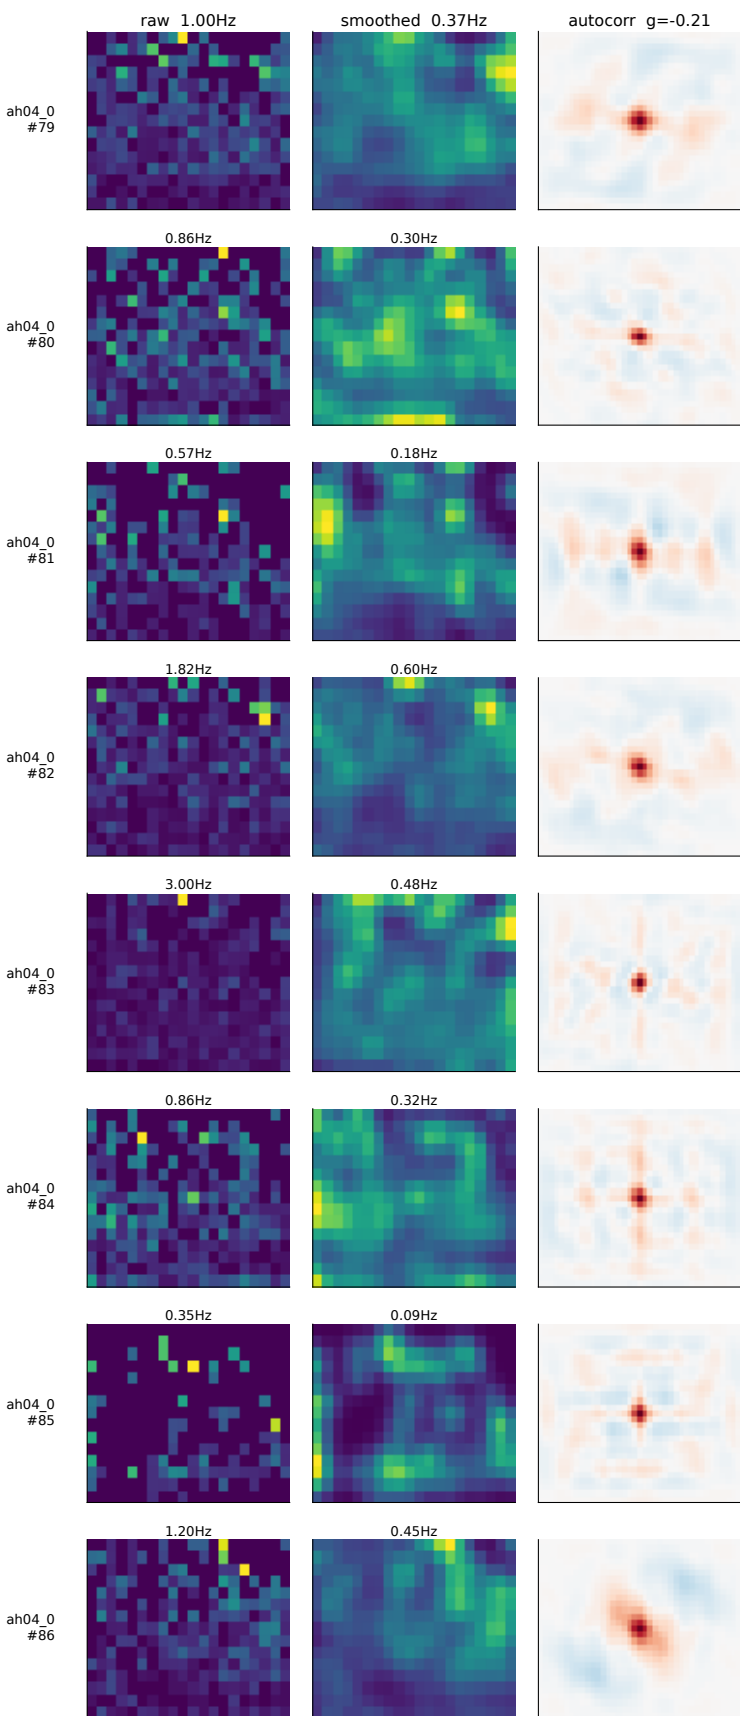

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

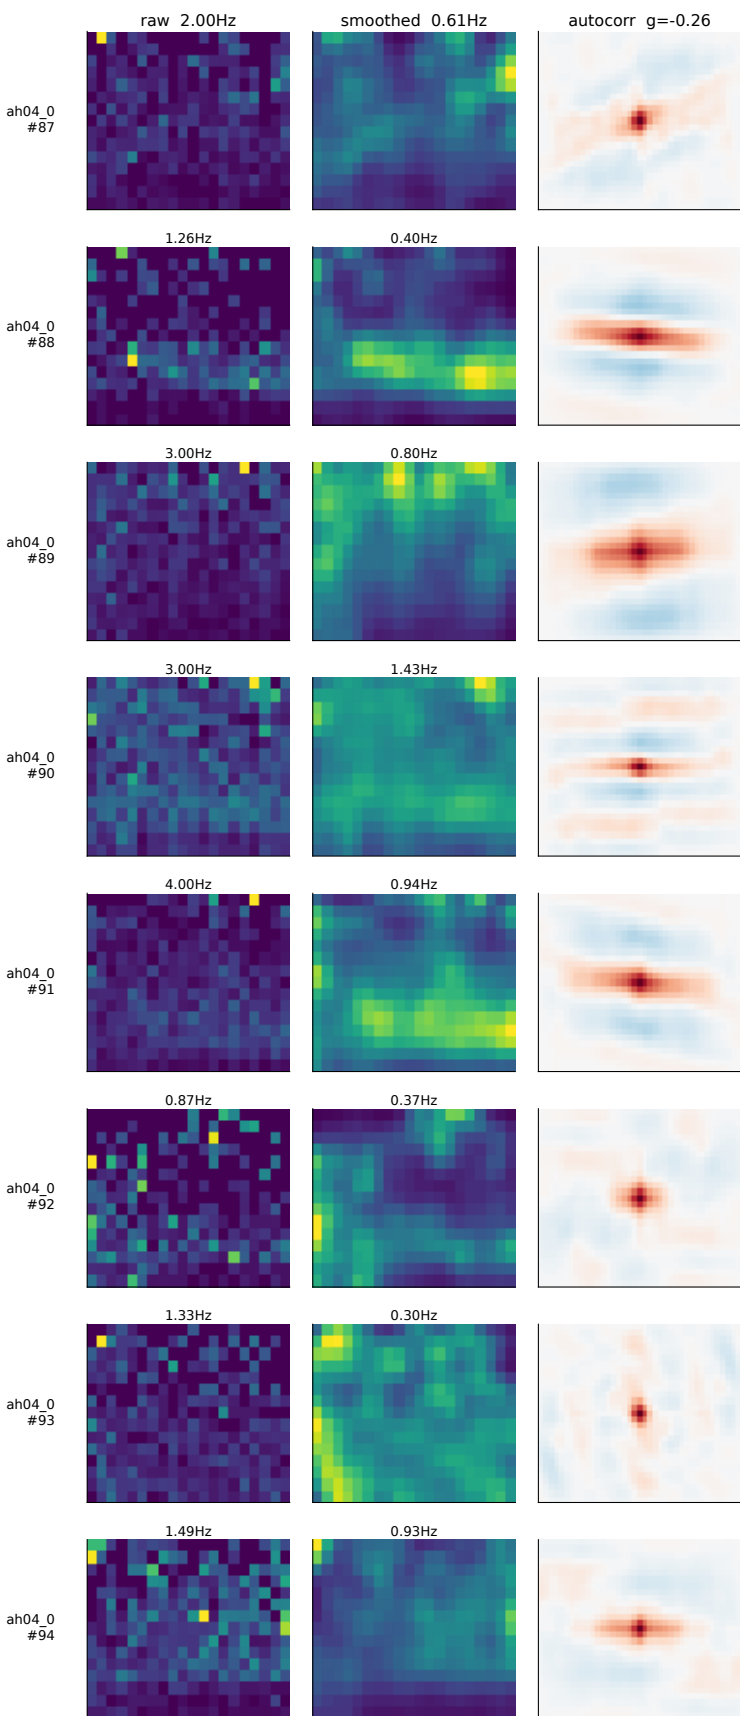


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

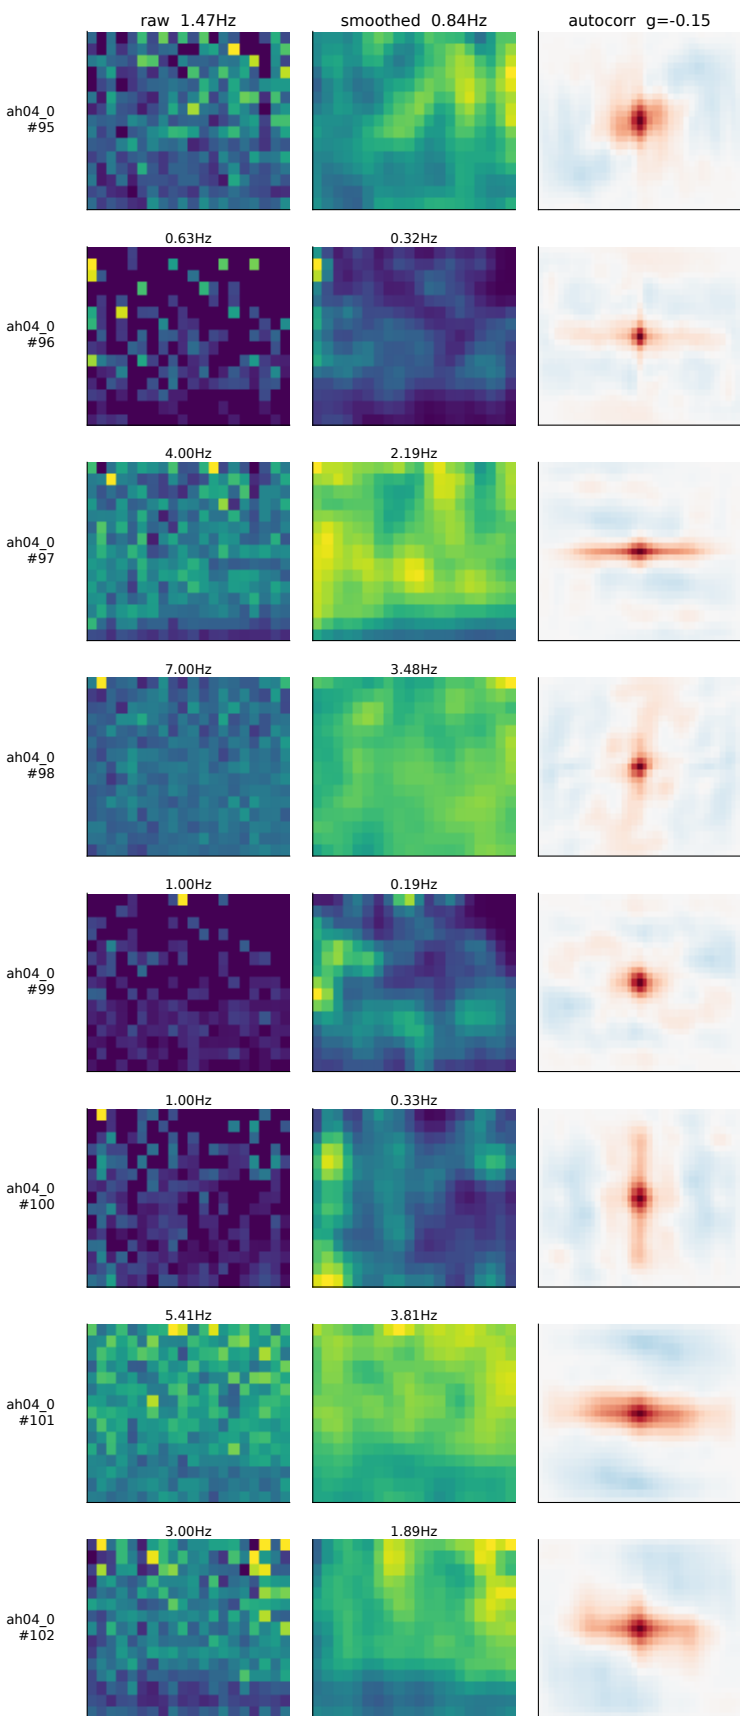





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

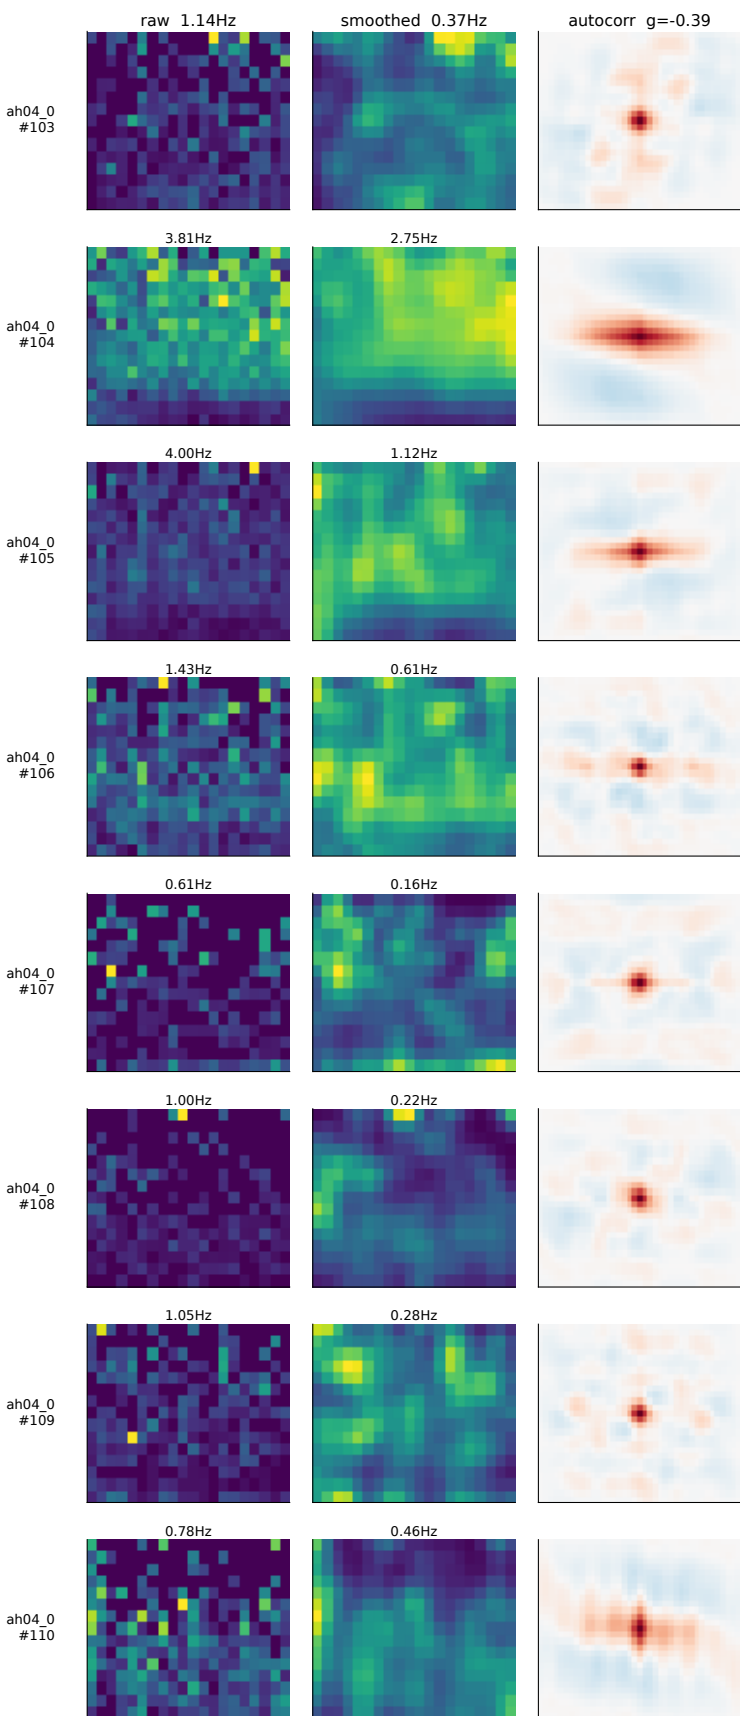


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

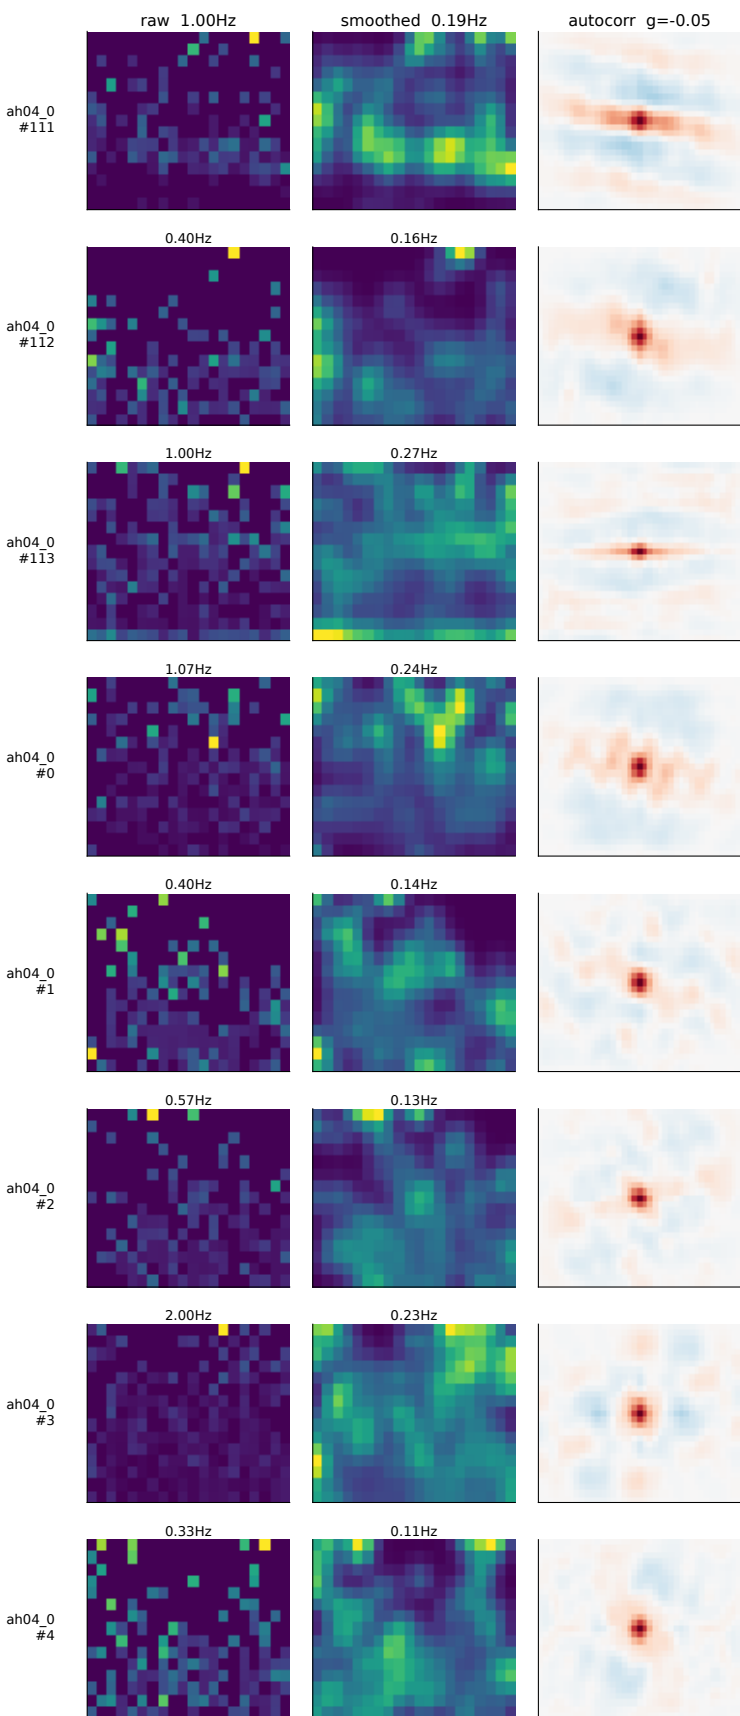


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

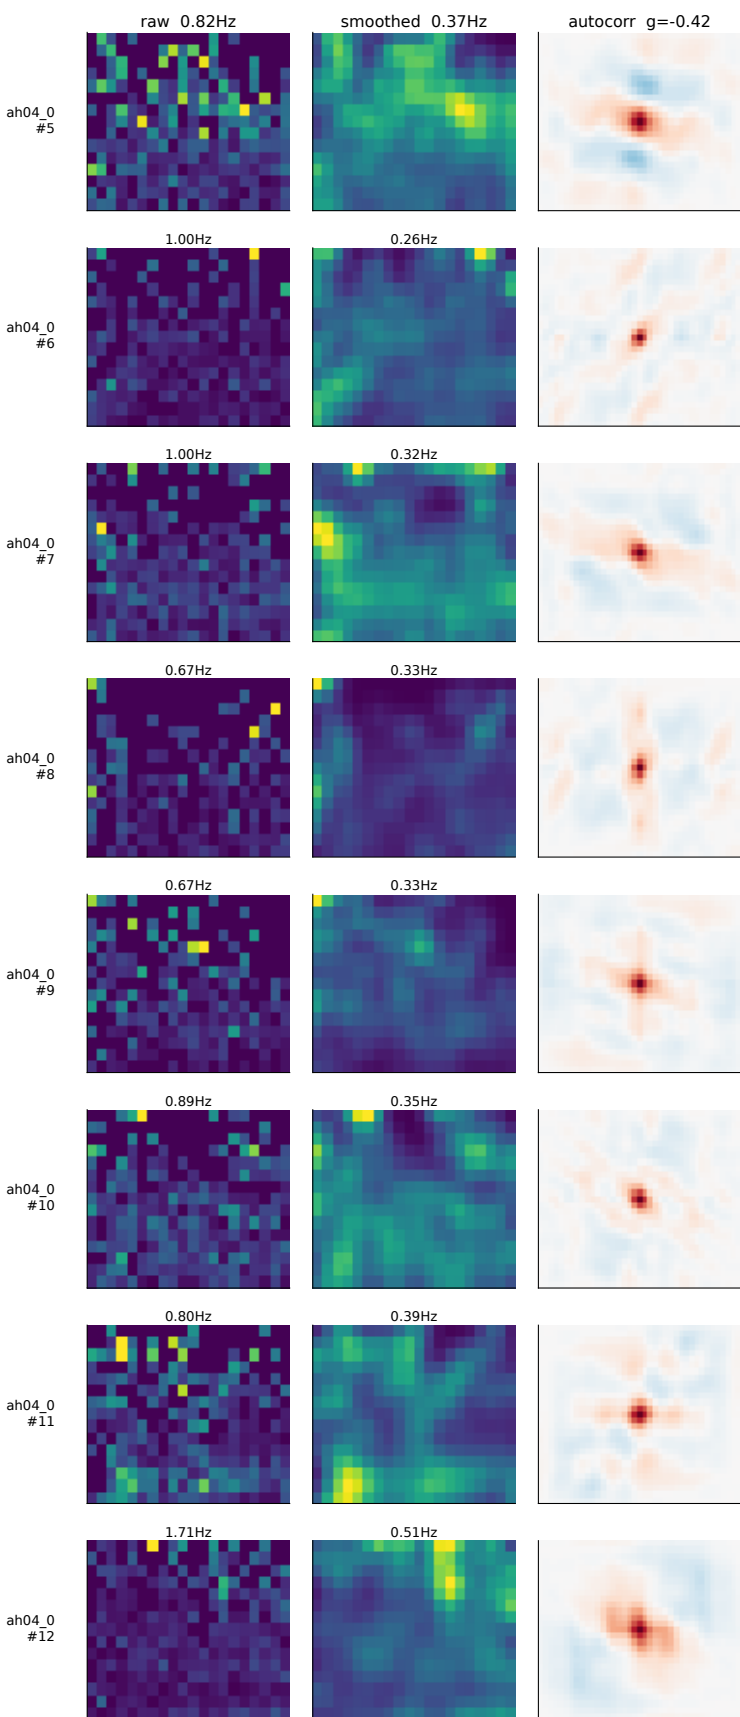


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

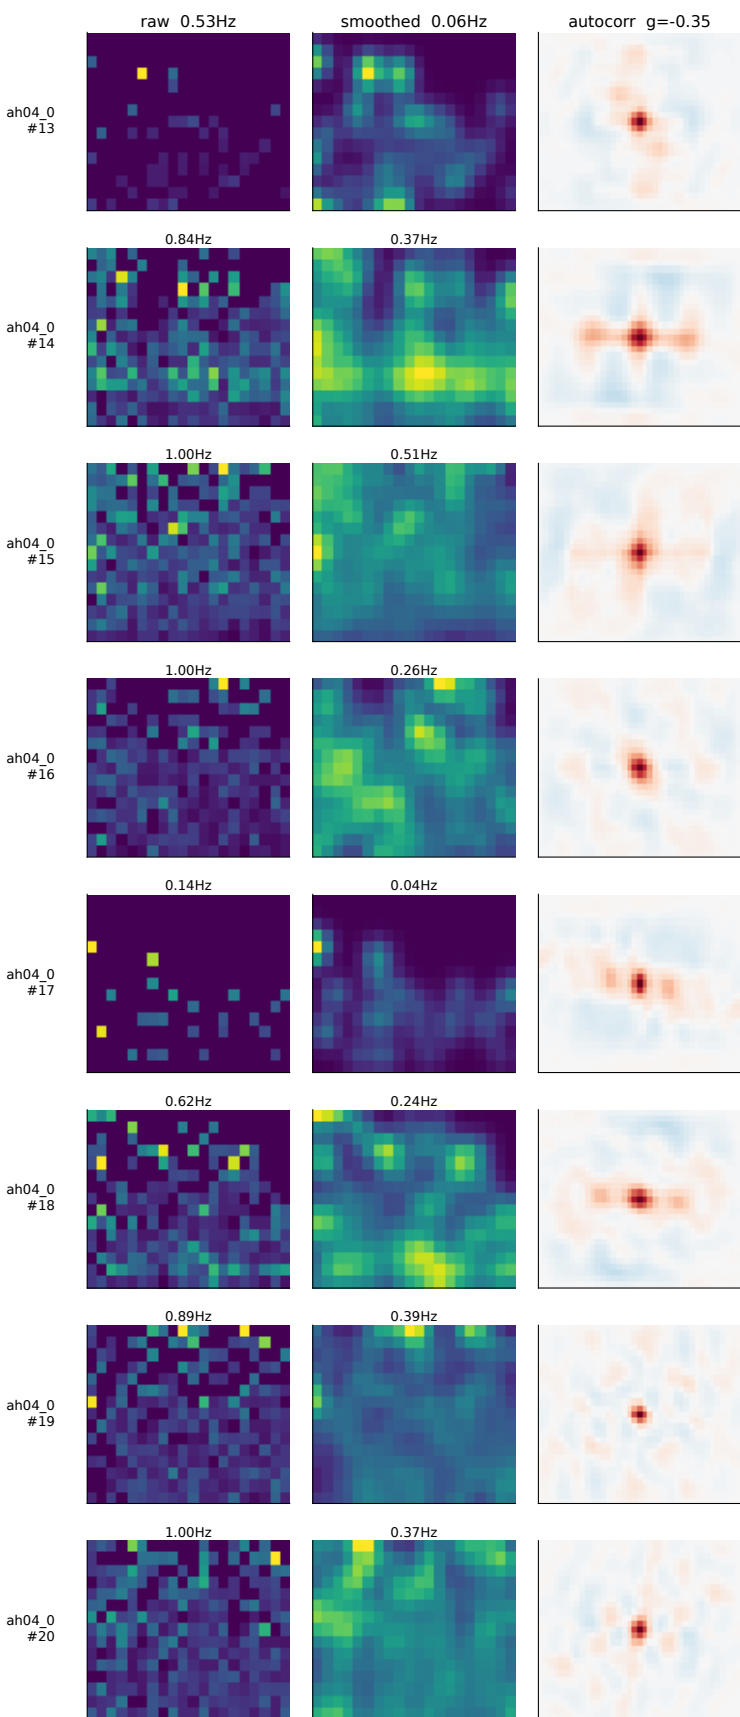


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

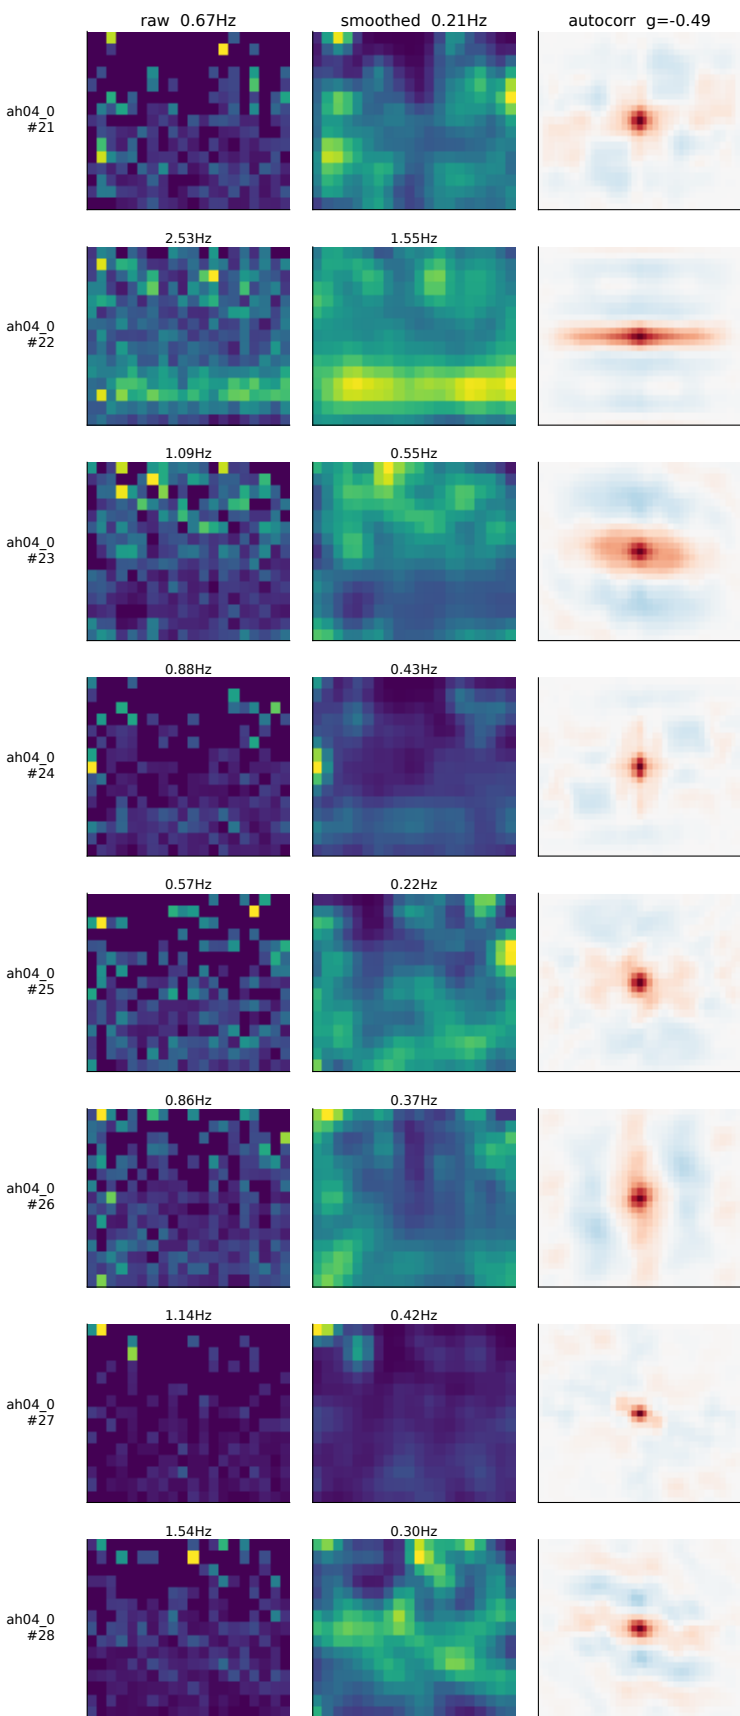


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

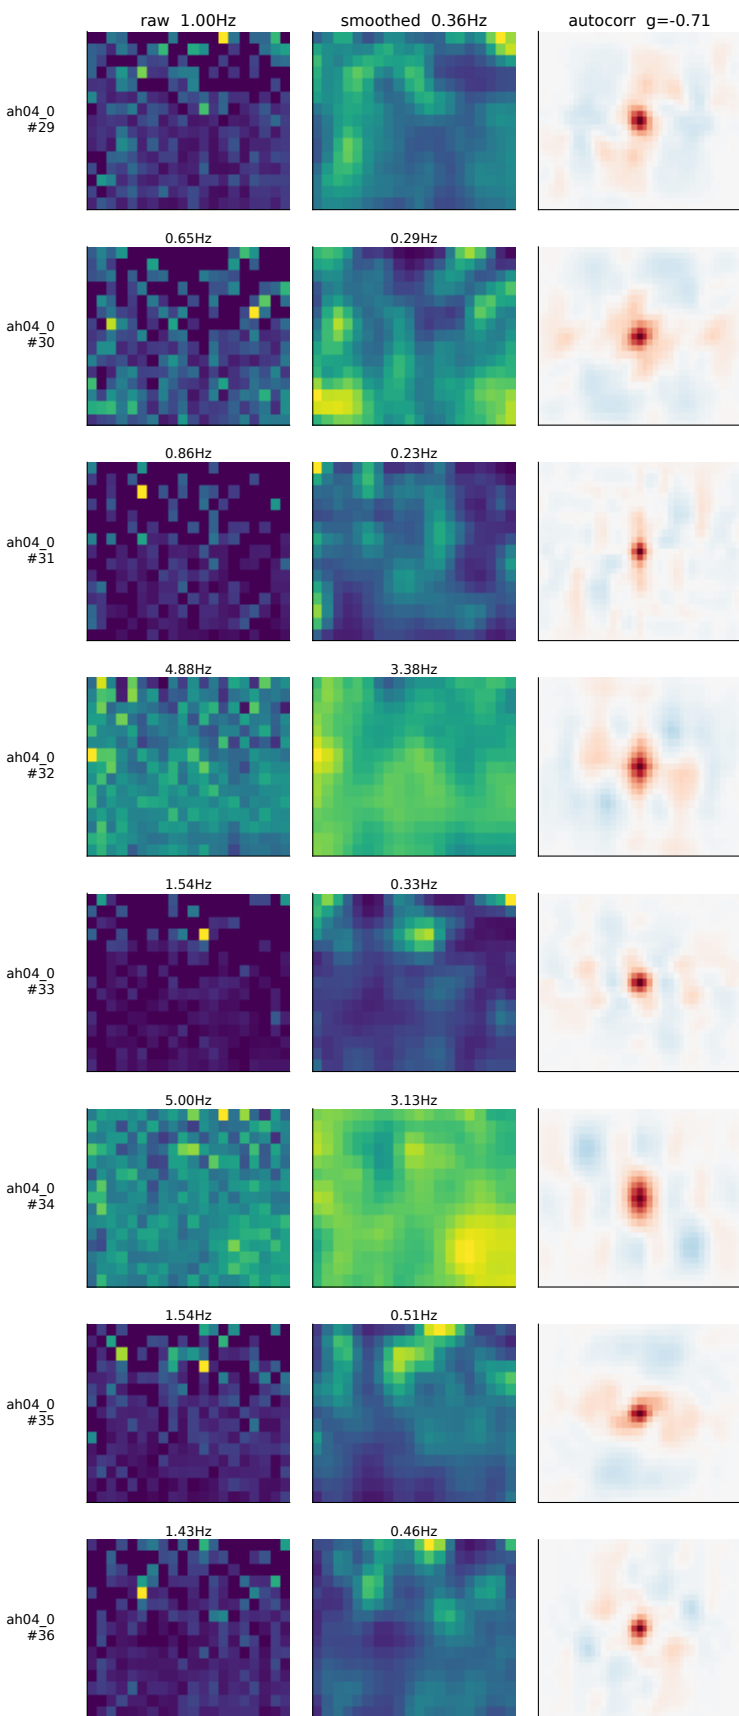

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 4  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

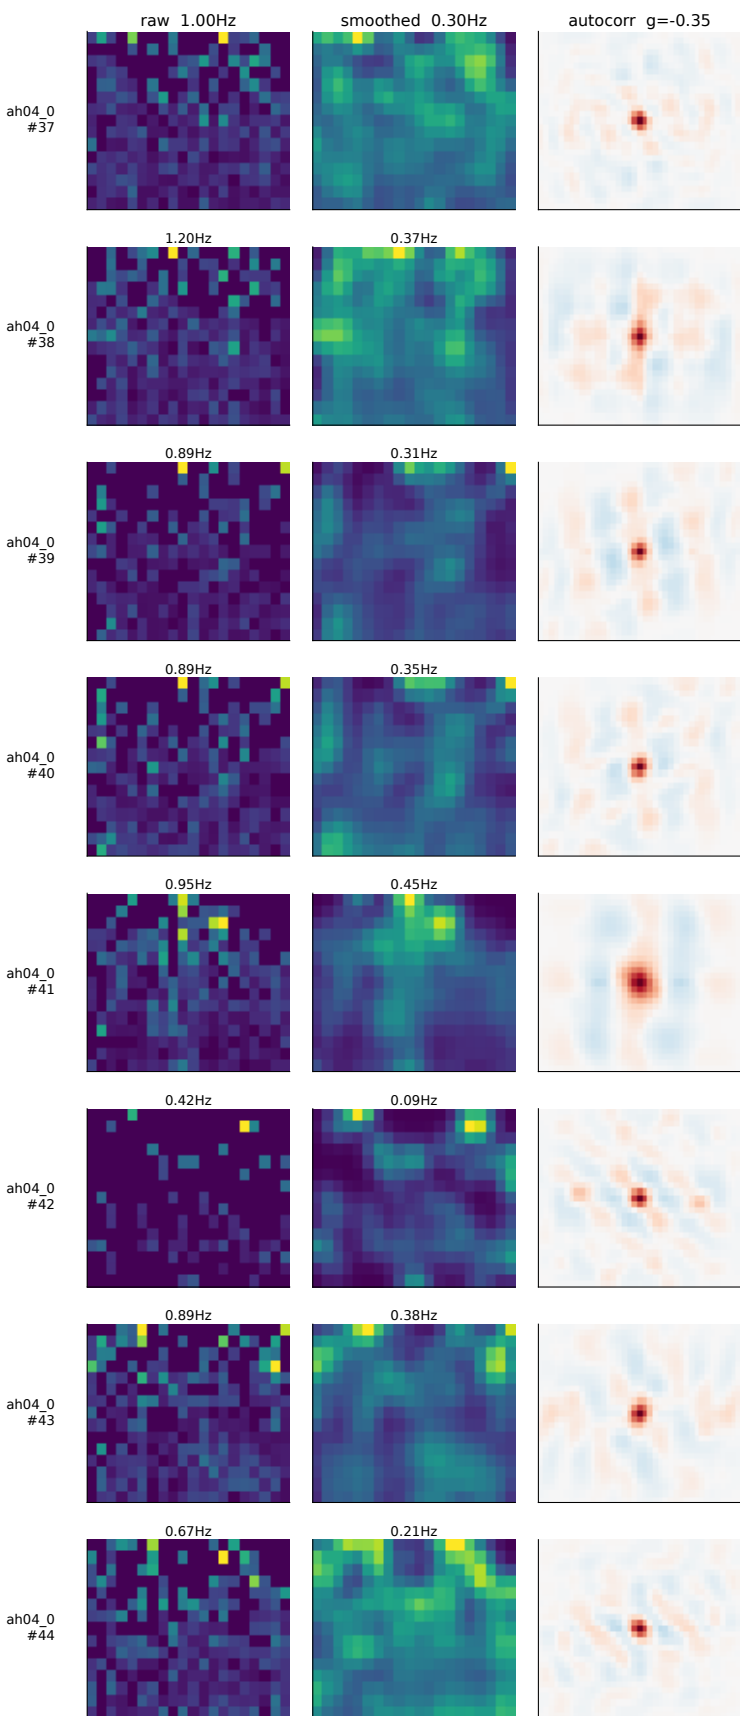


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

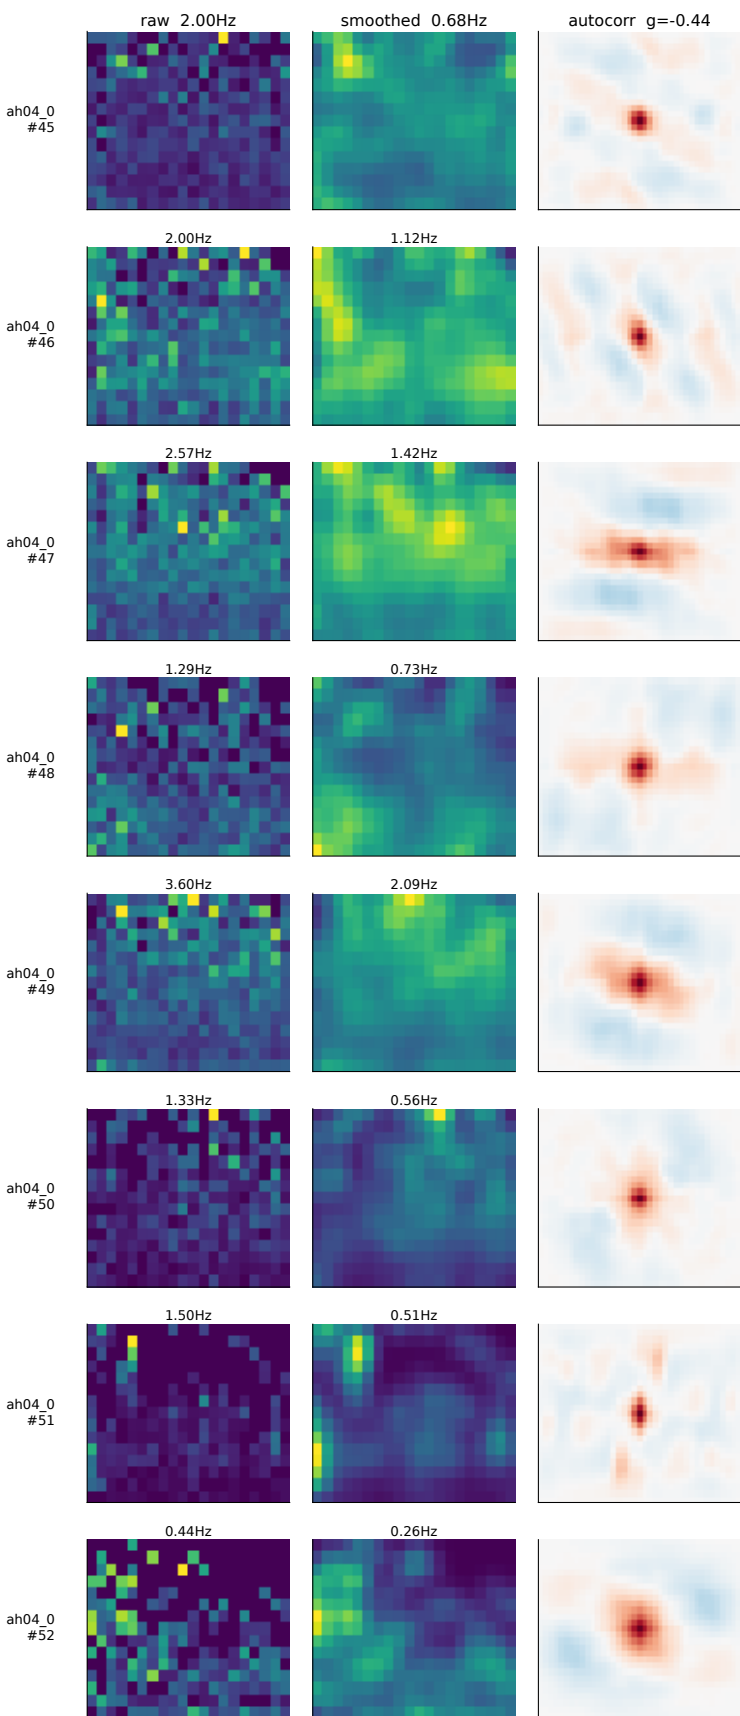





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

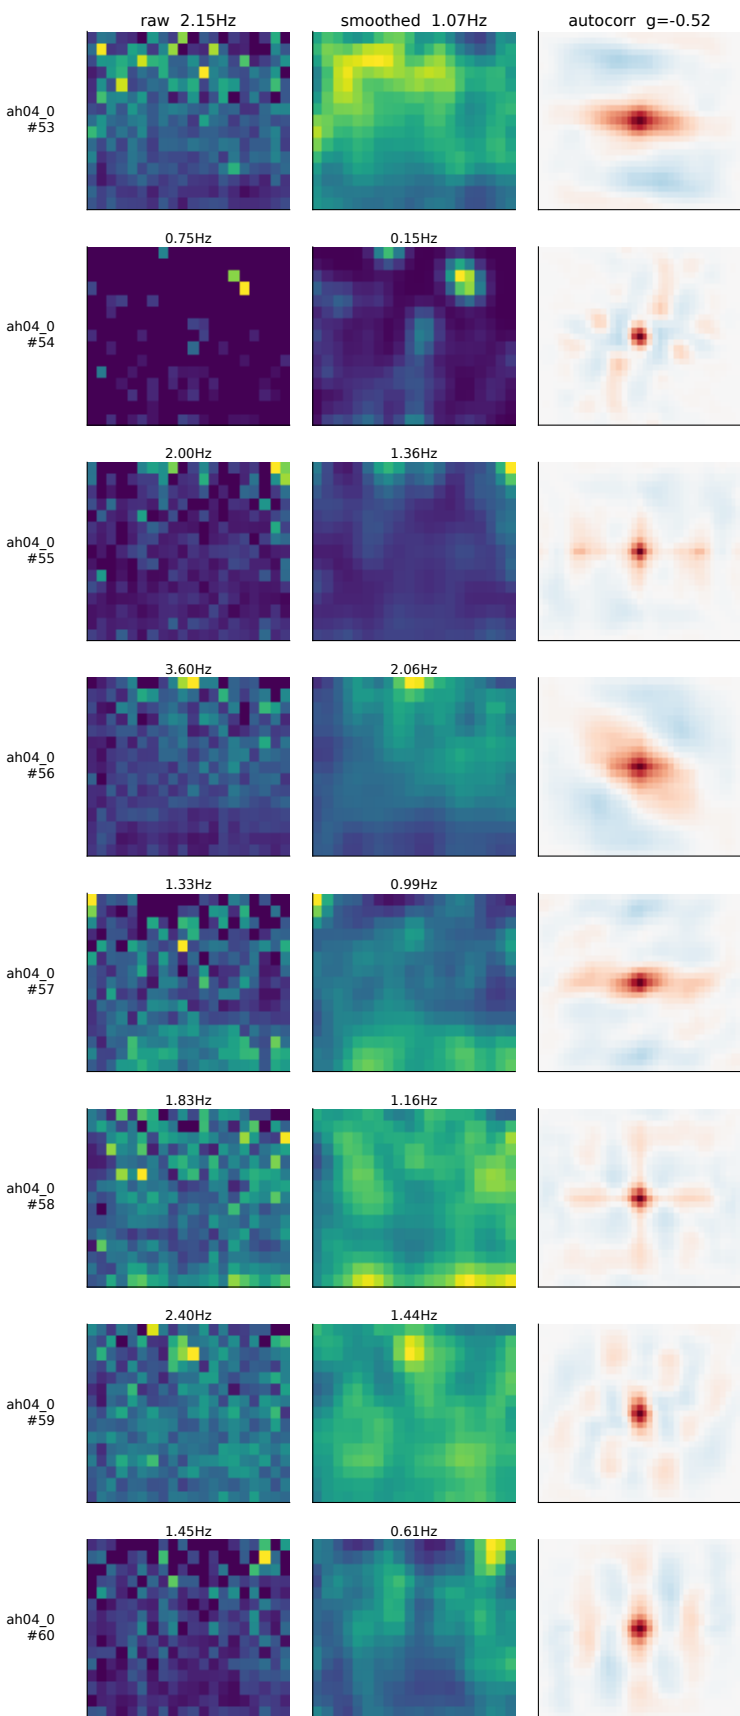


os: x = time in session (min), y = time since reward (s) | autocorr g=-0.56  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

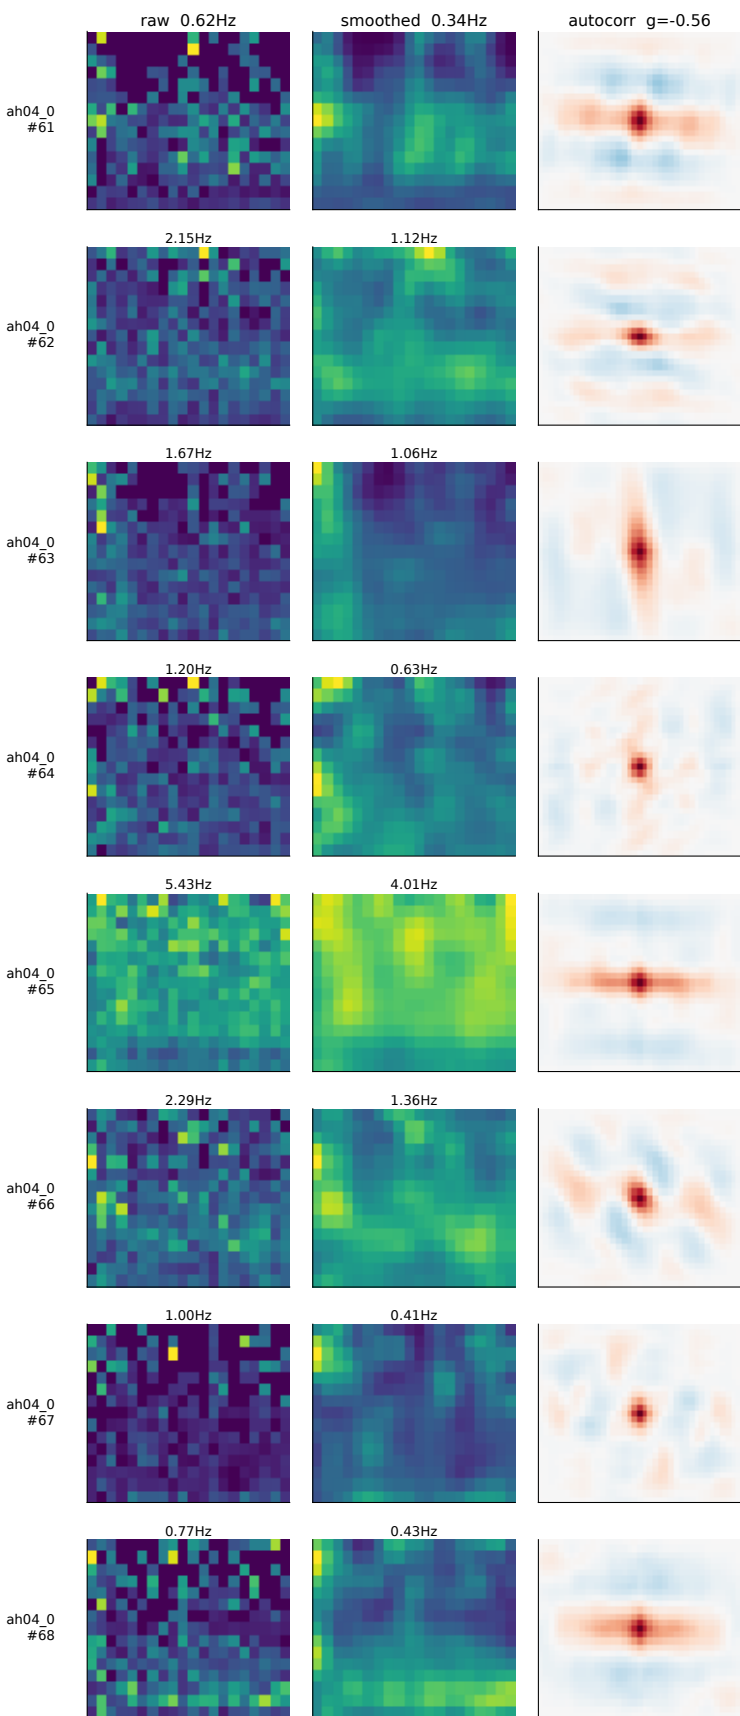


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

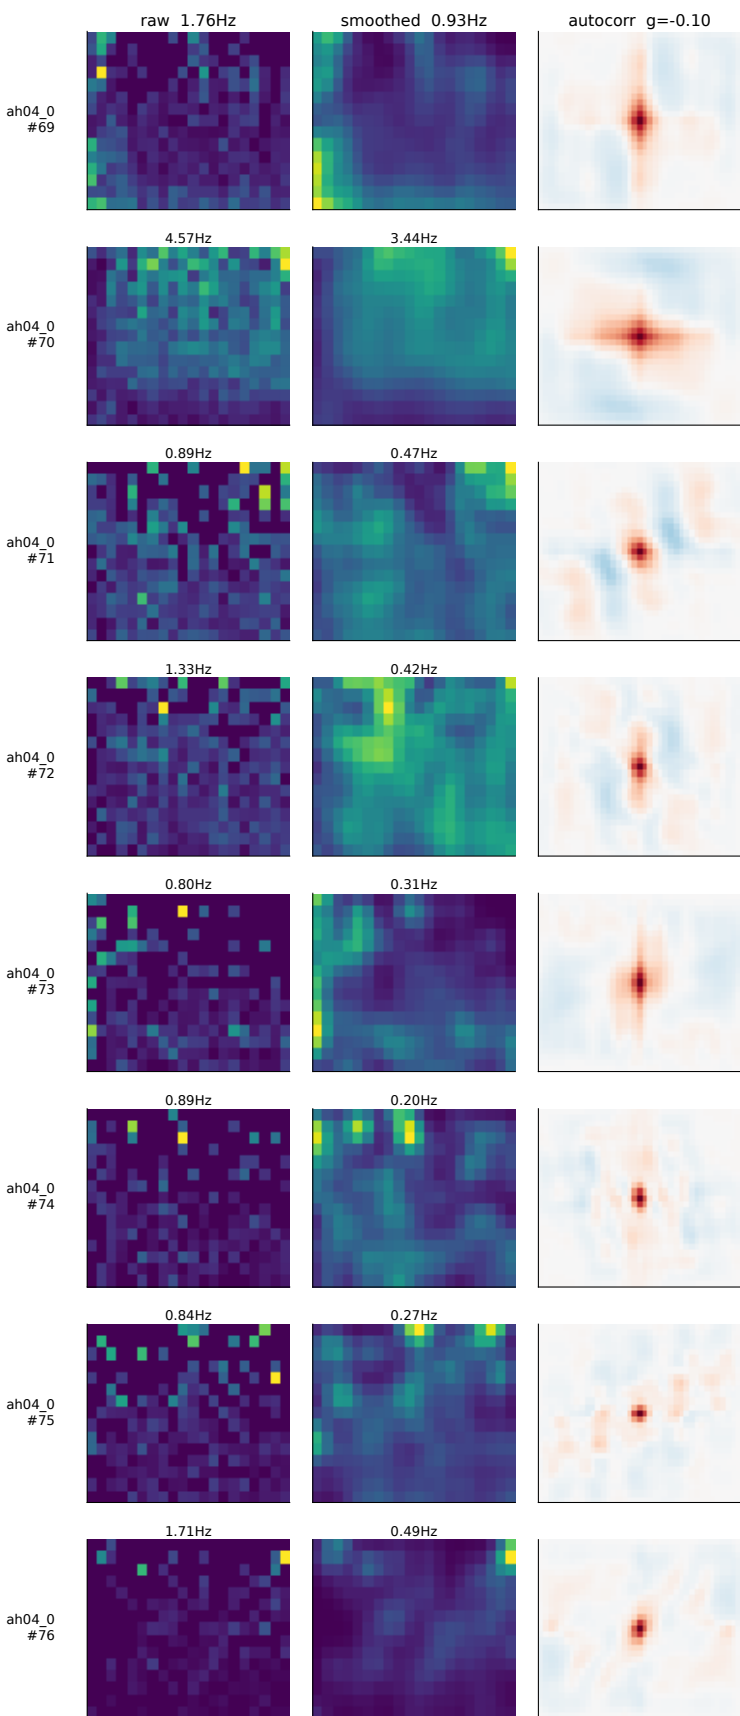


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

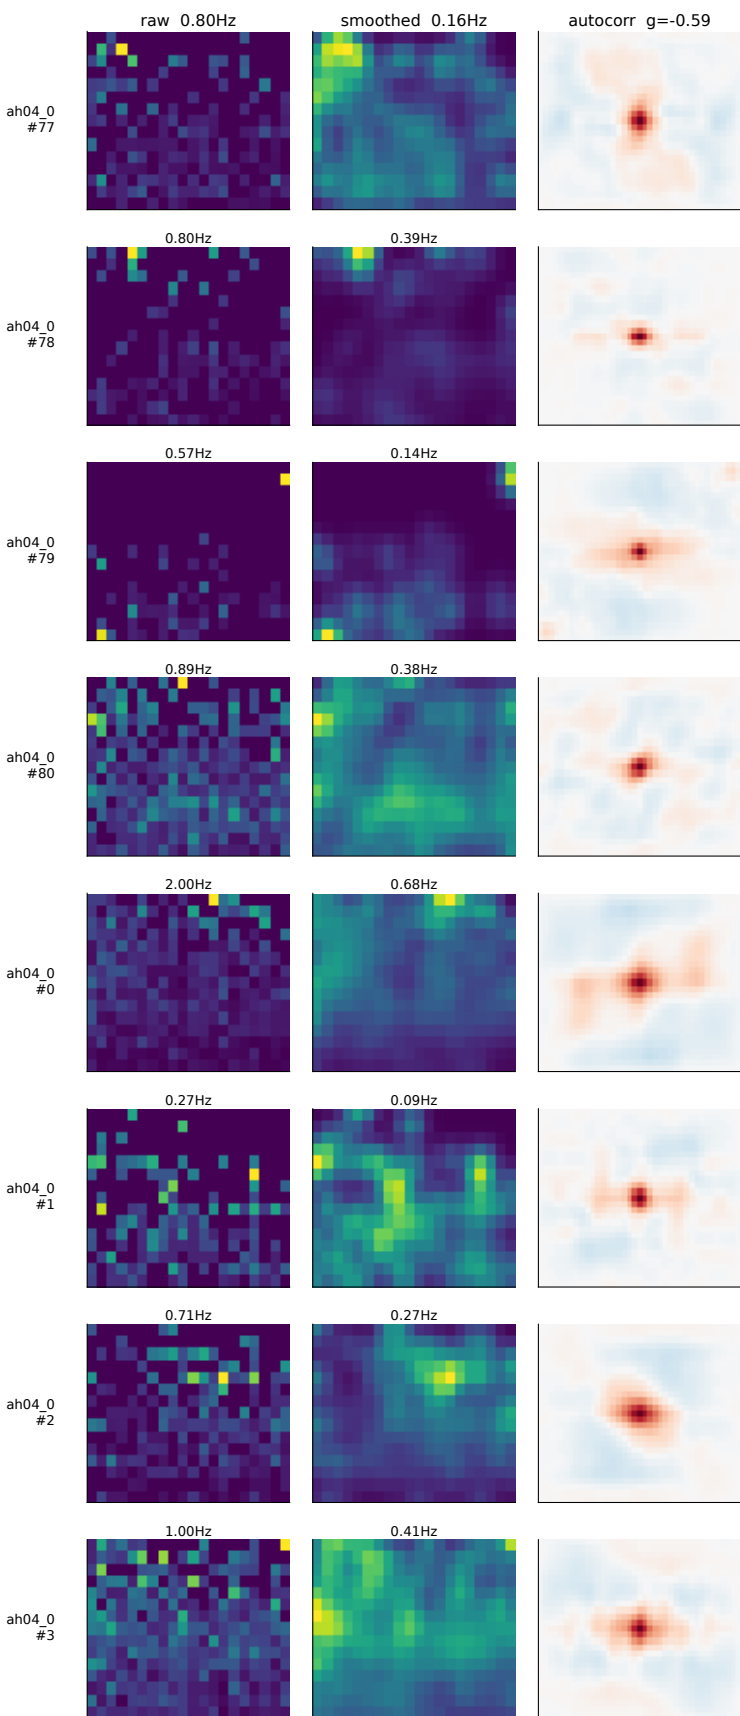


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

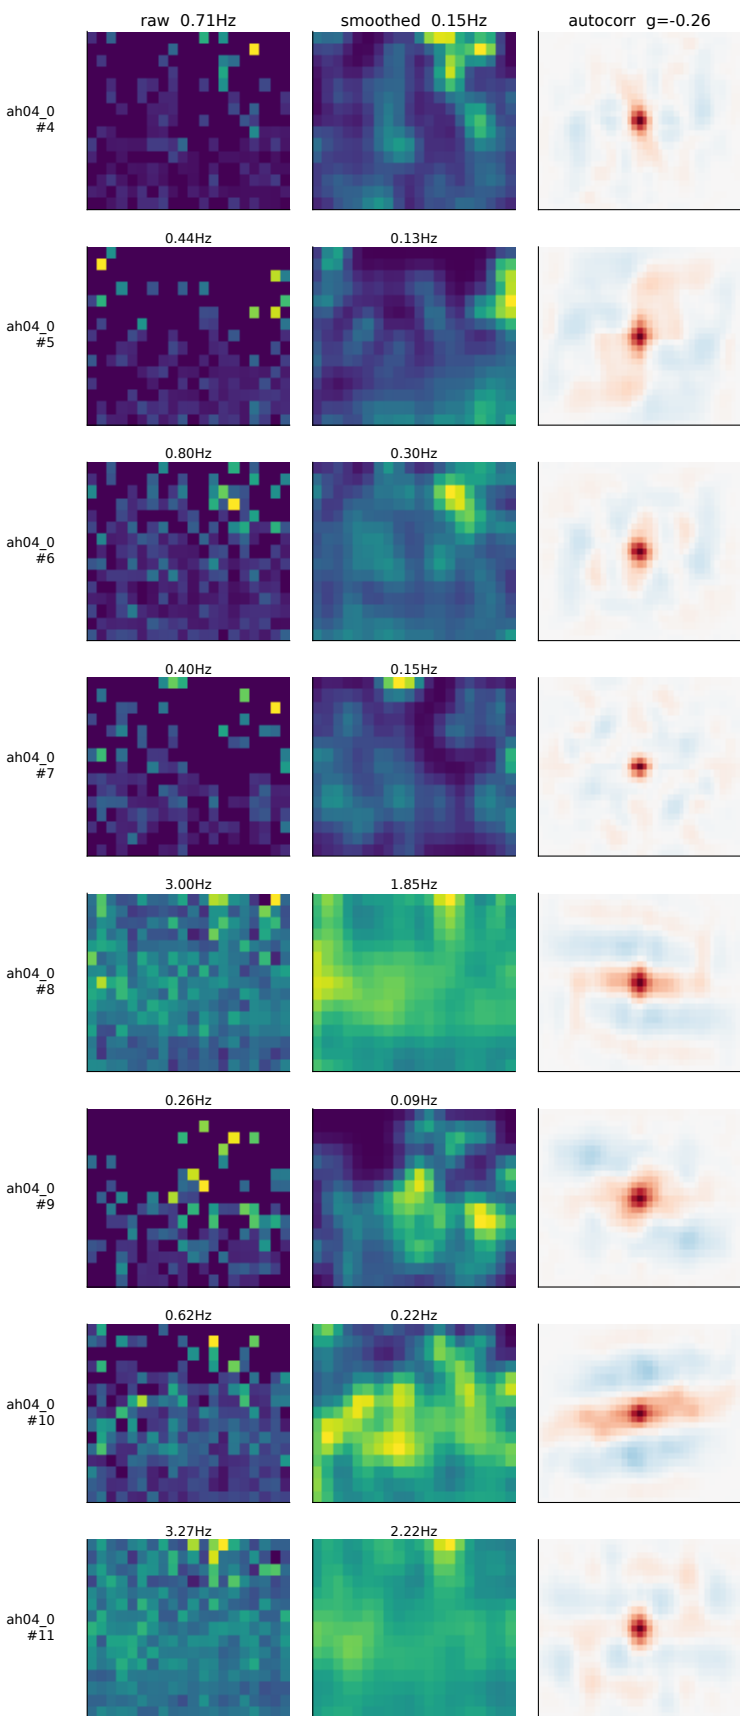


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

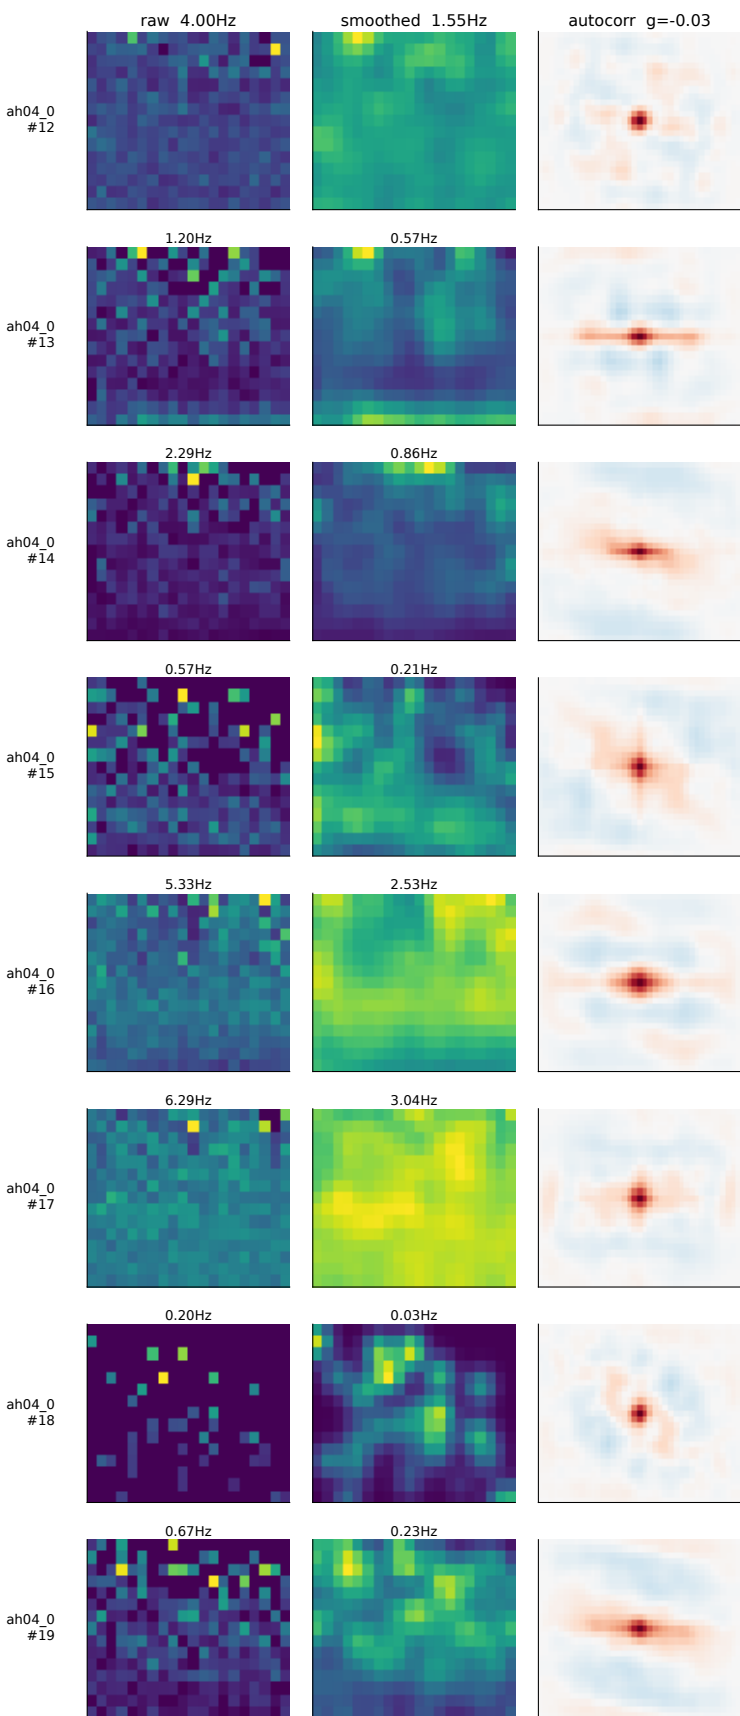

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

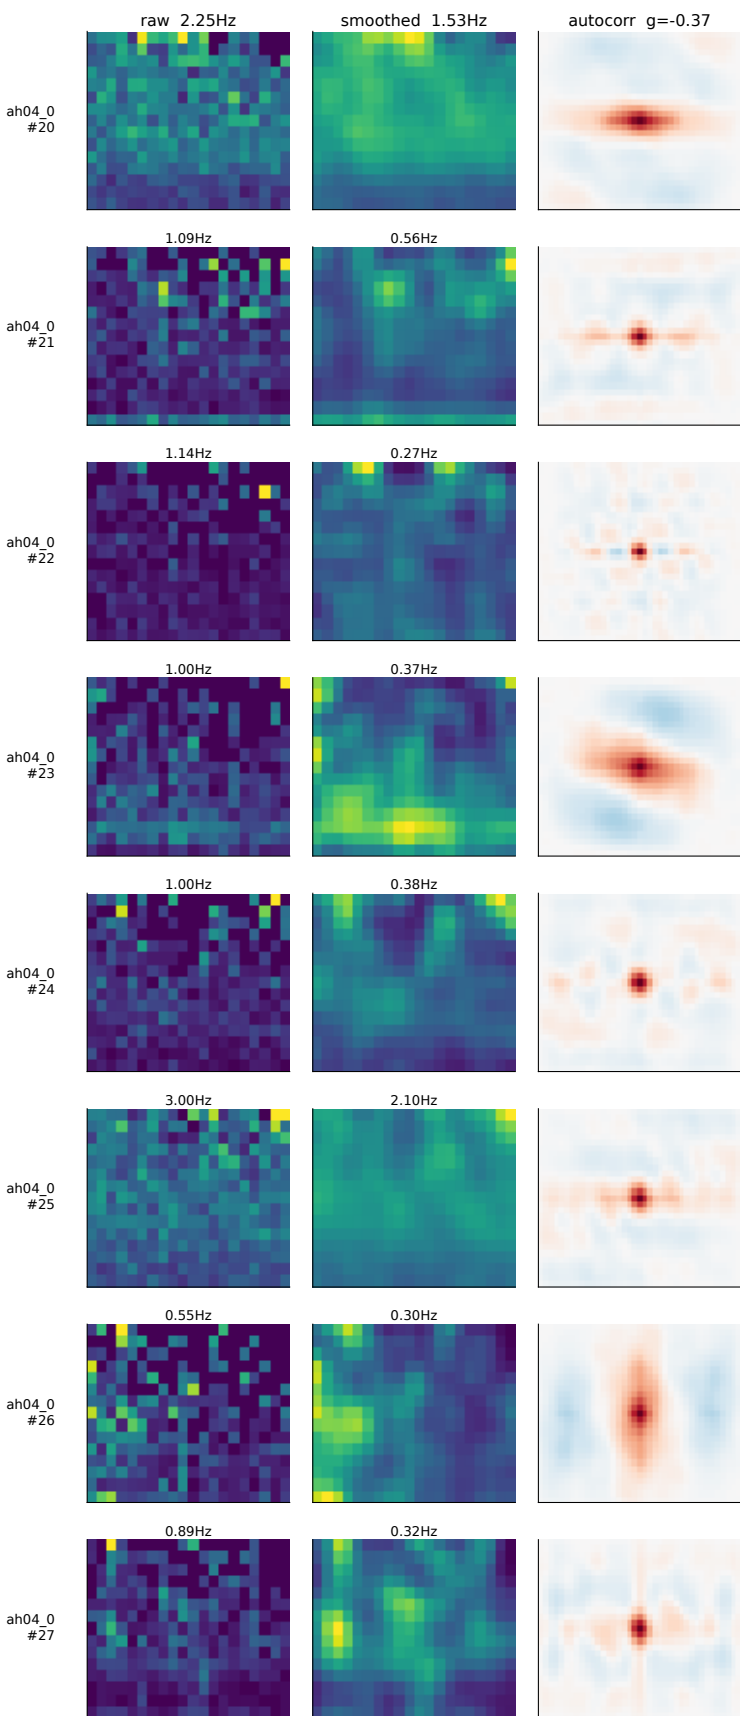


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

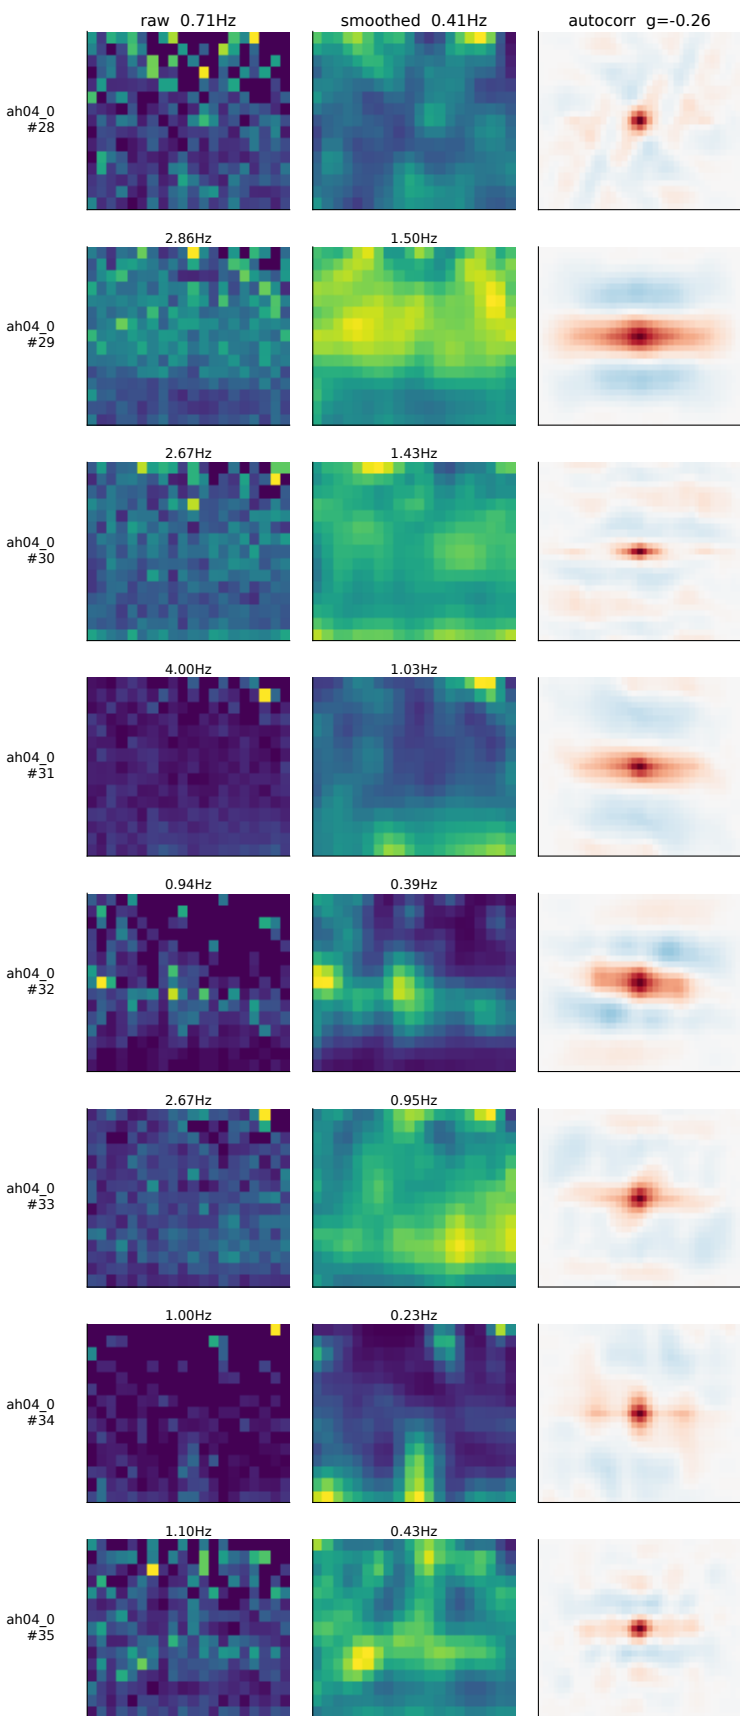





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

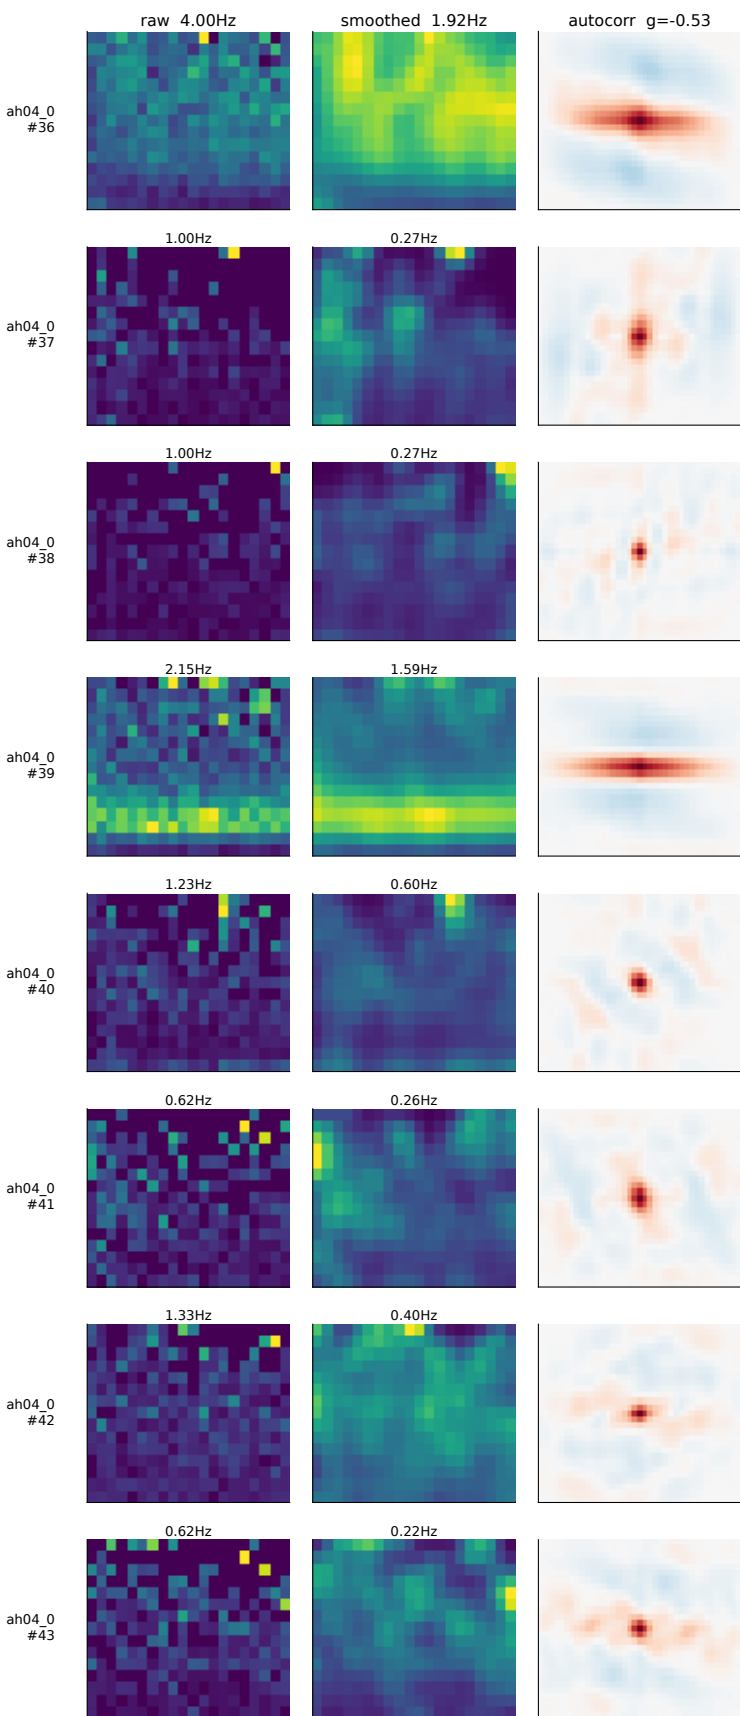


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

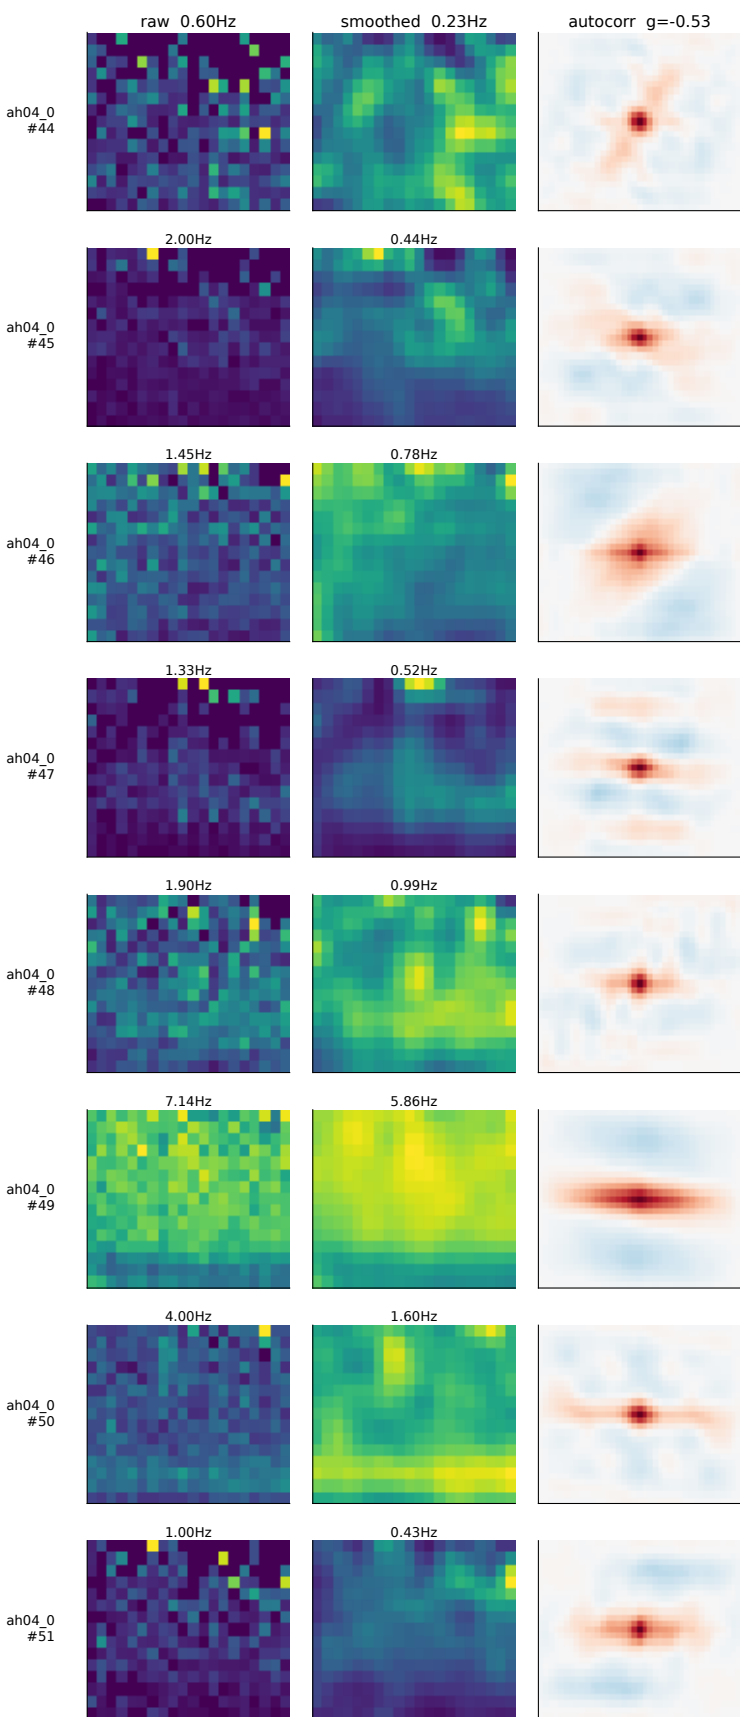


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 5  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

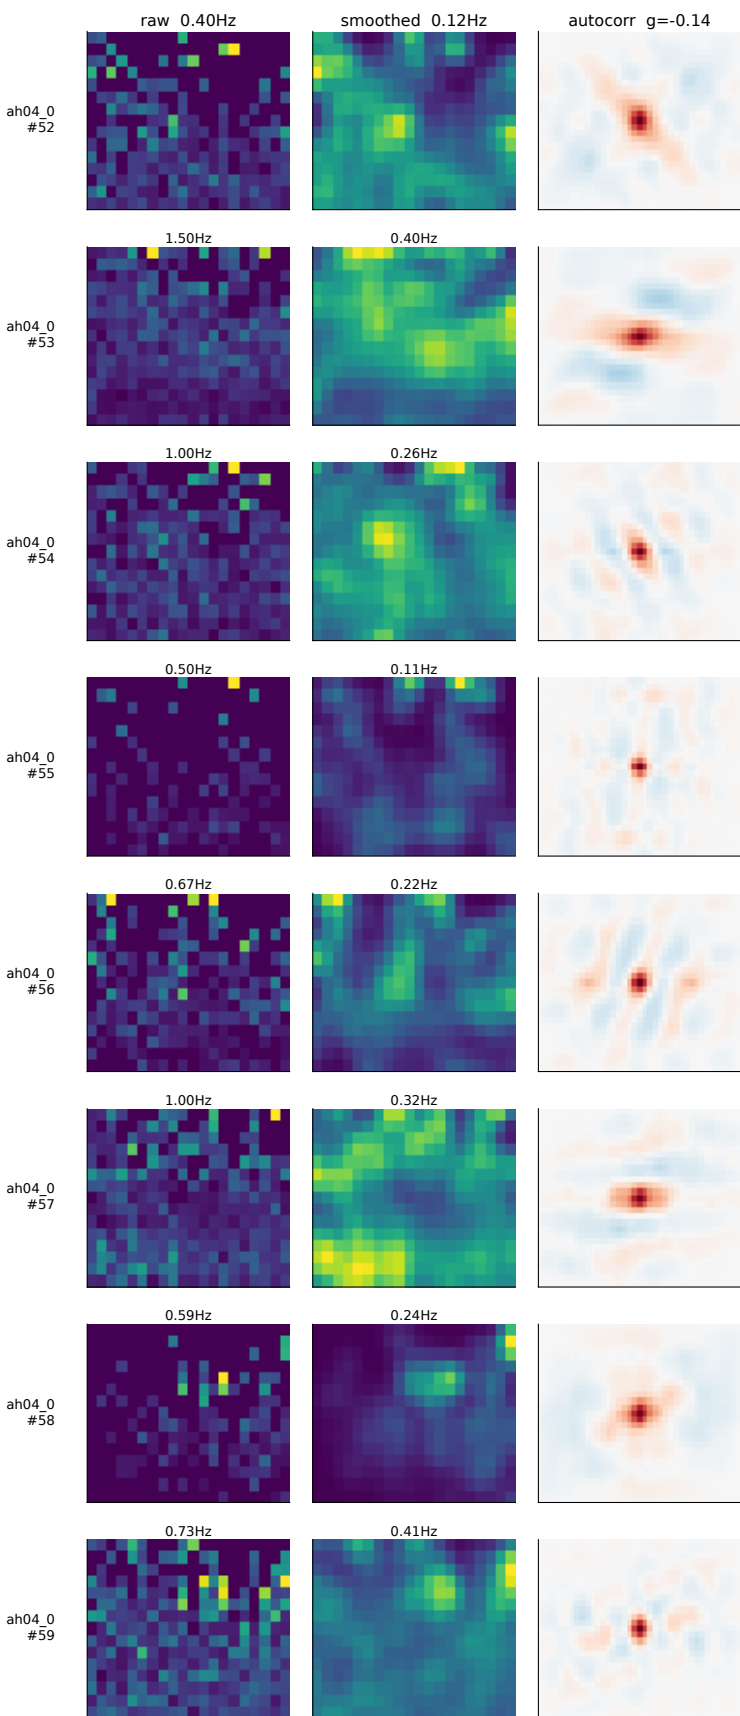


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

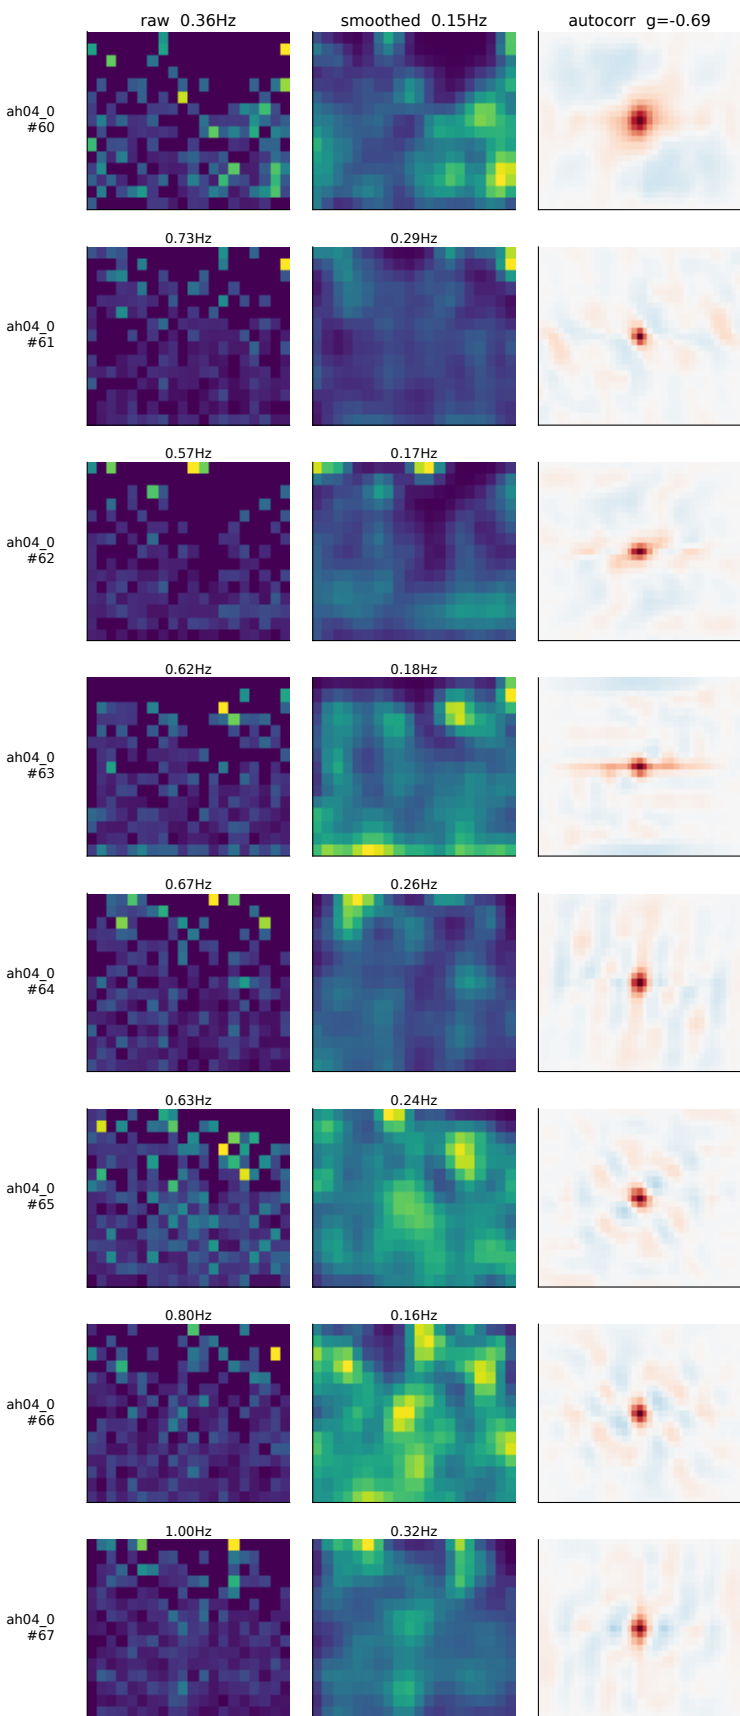


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

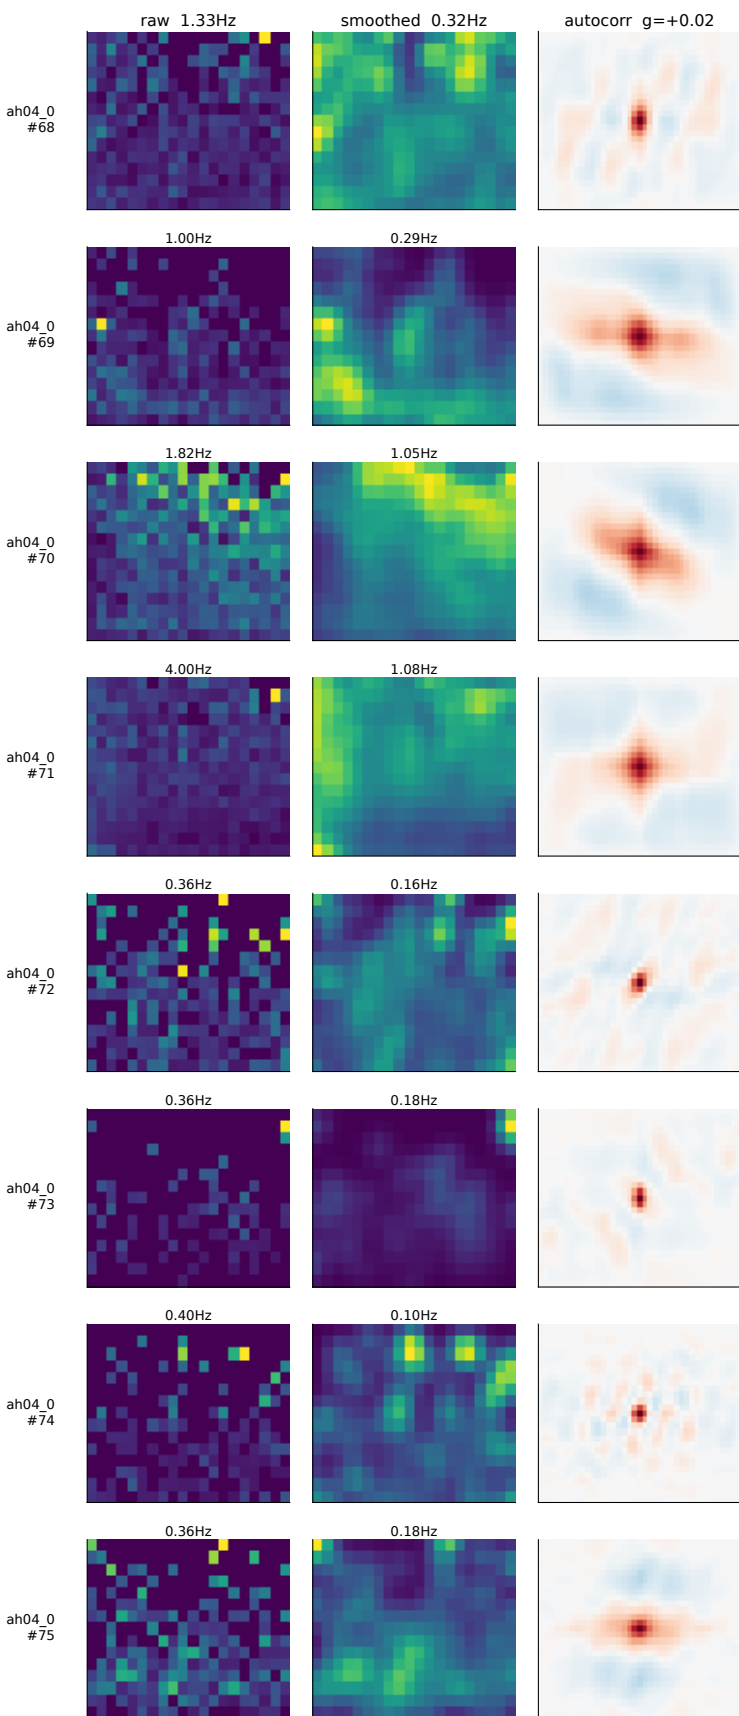


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

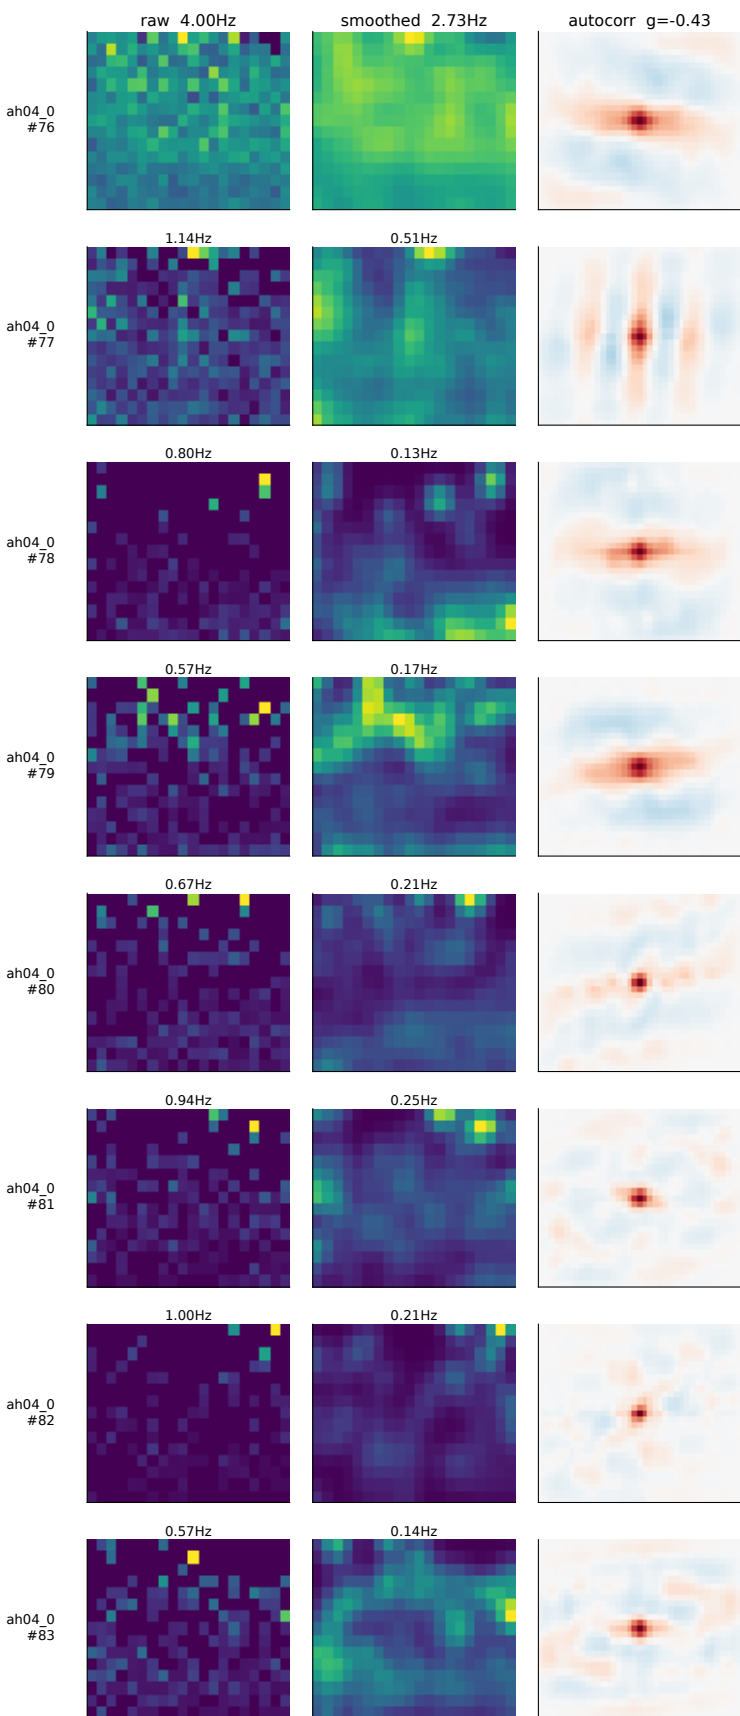

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

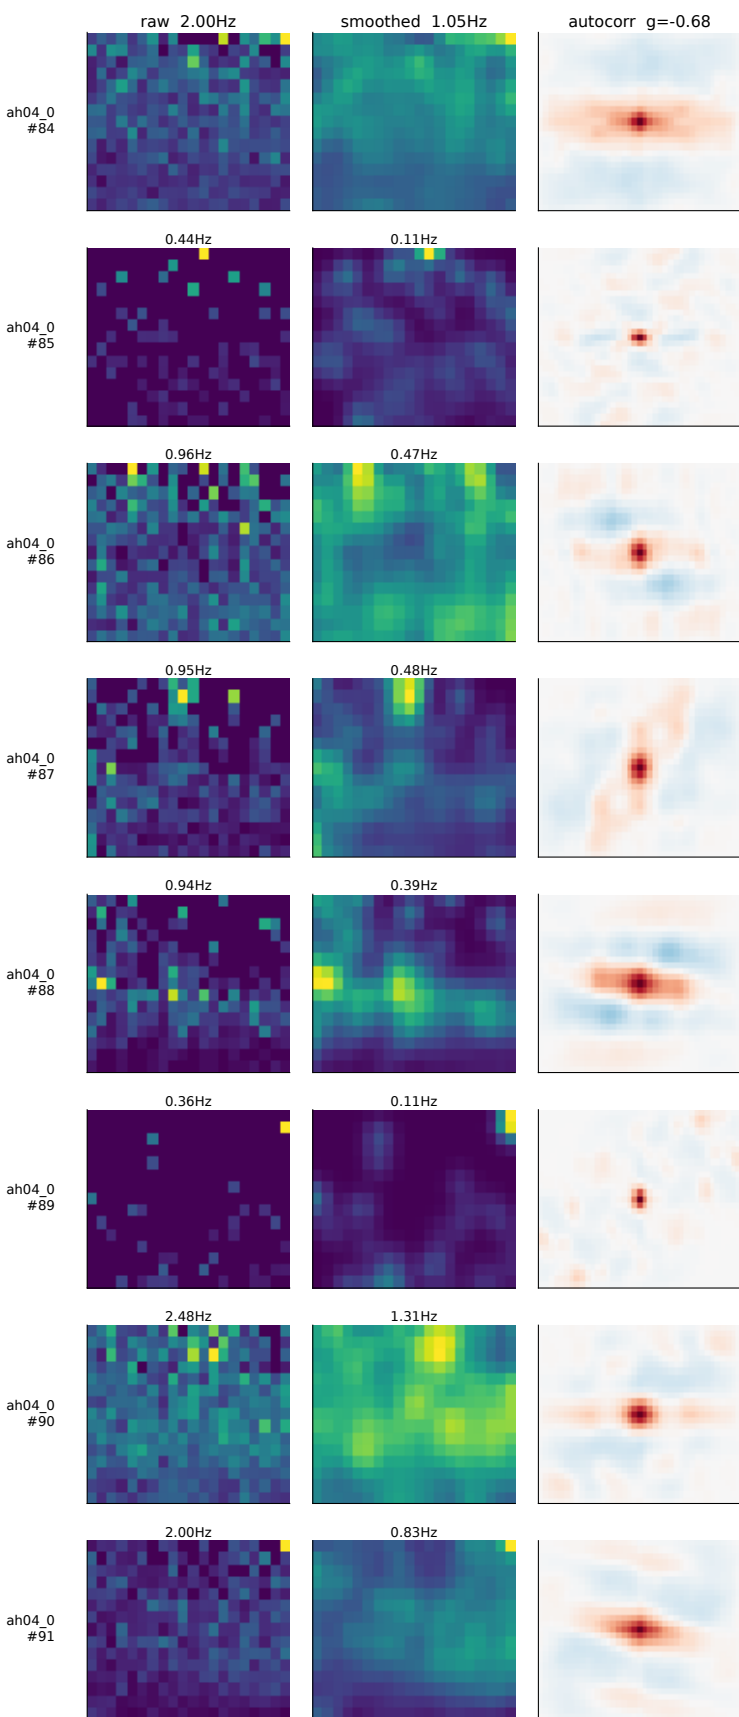


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

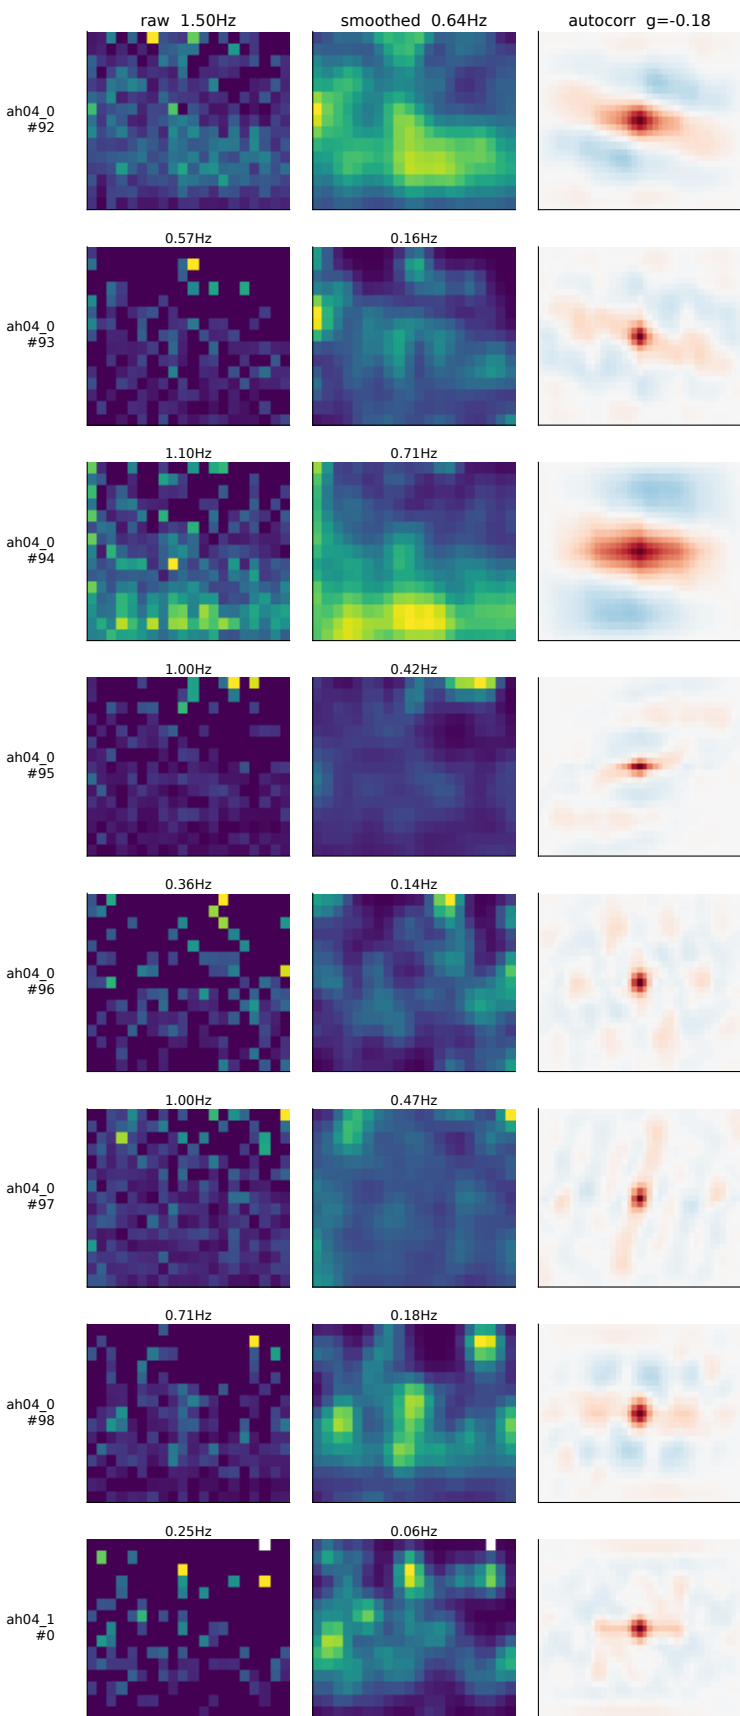





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

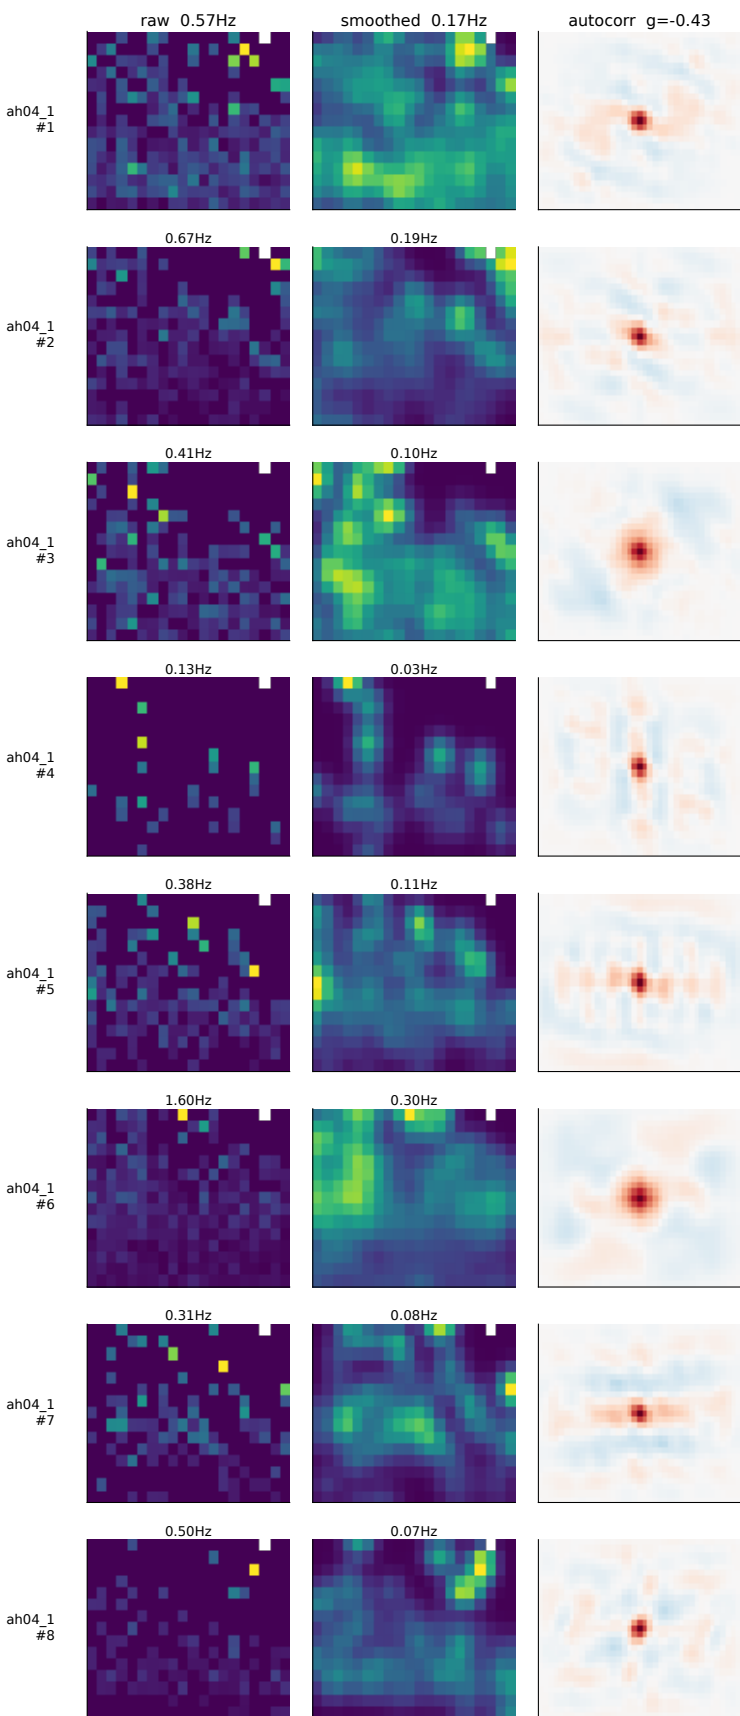


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

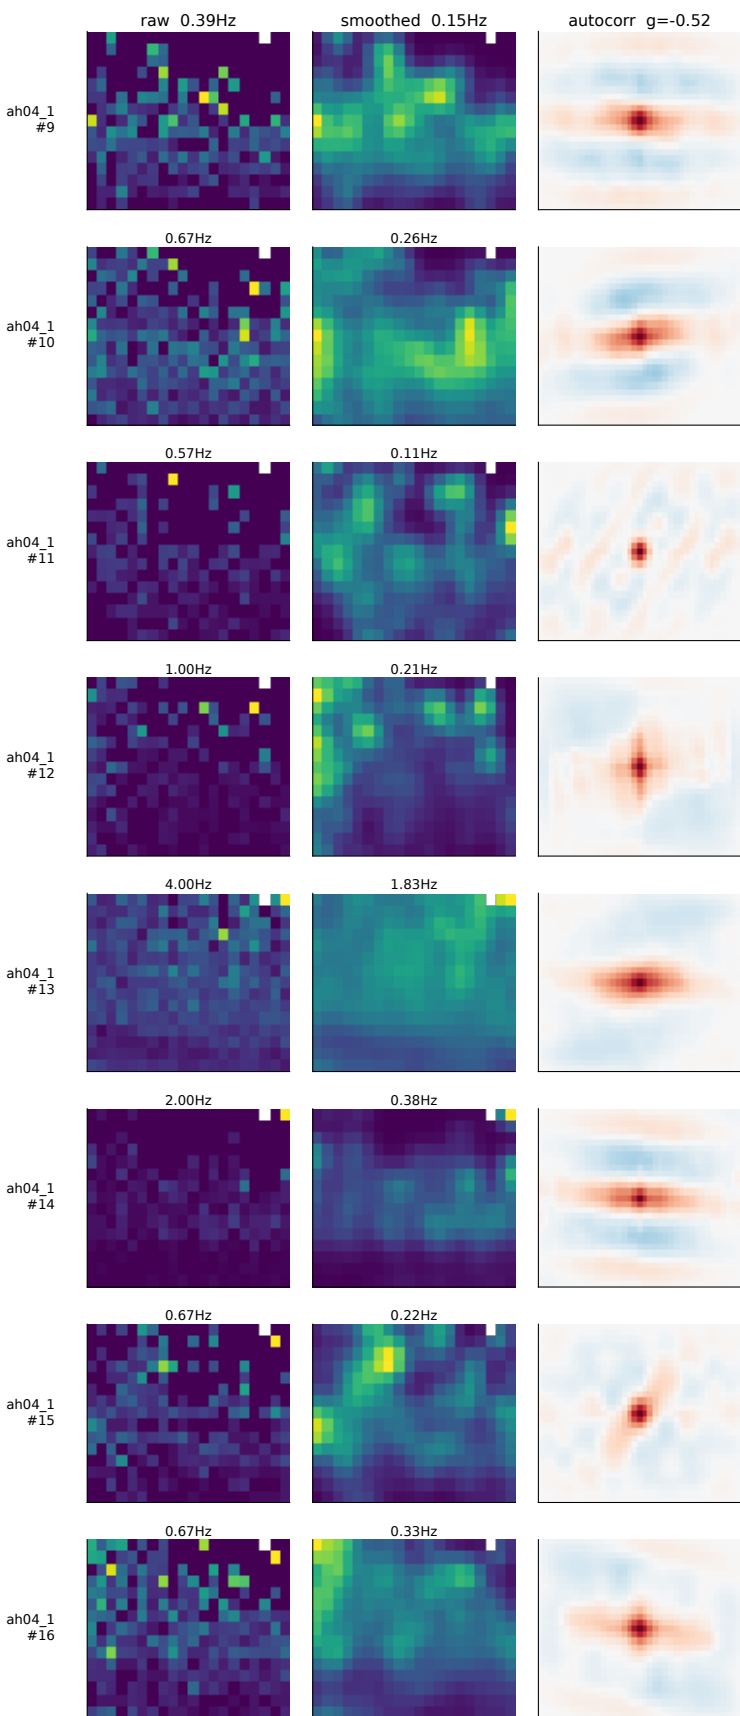


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

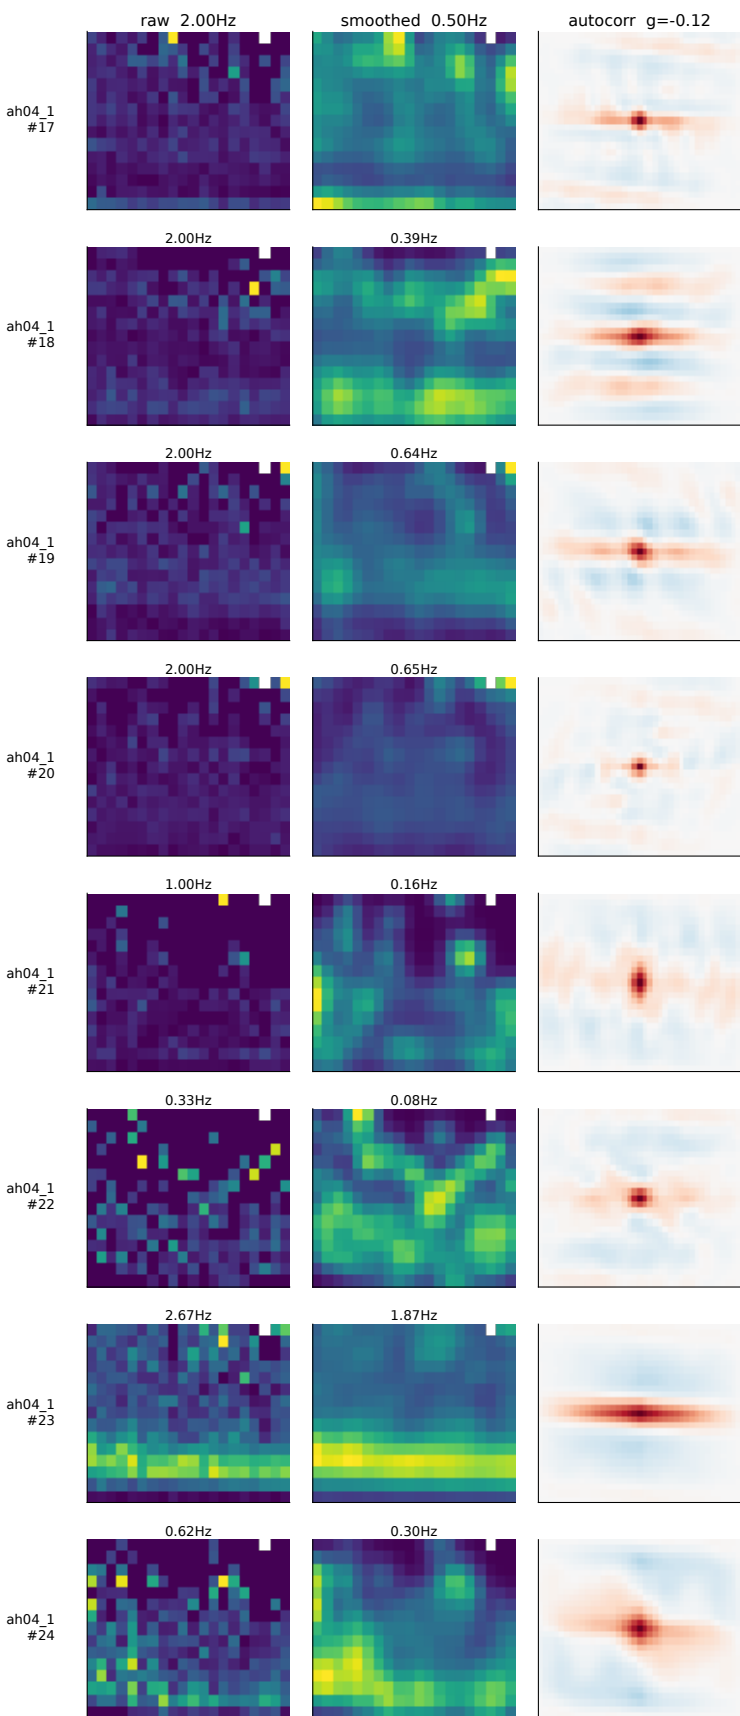


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

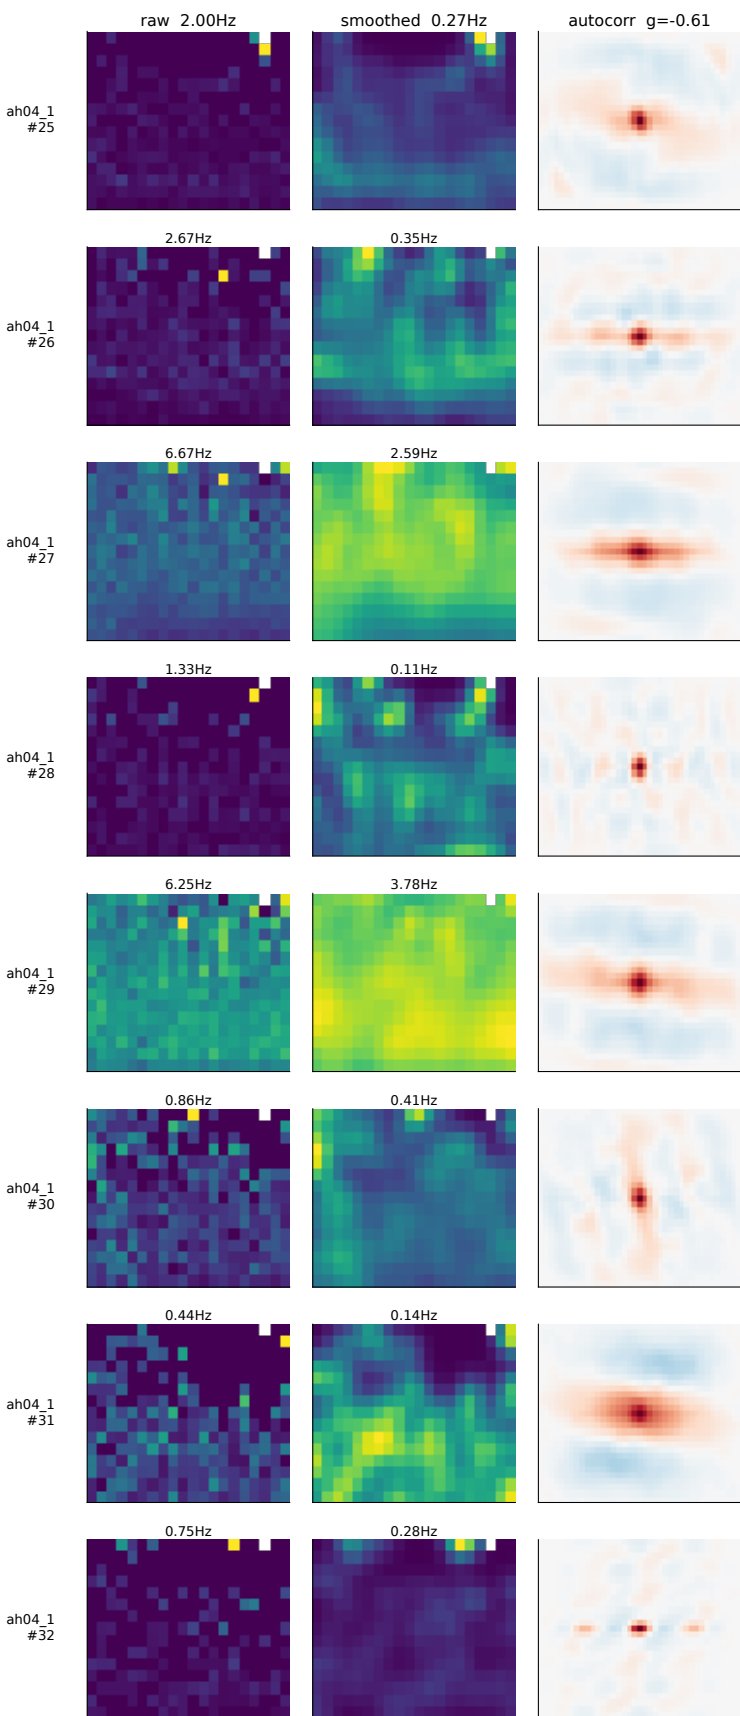


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

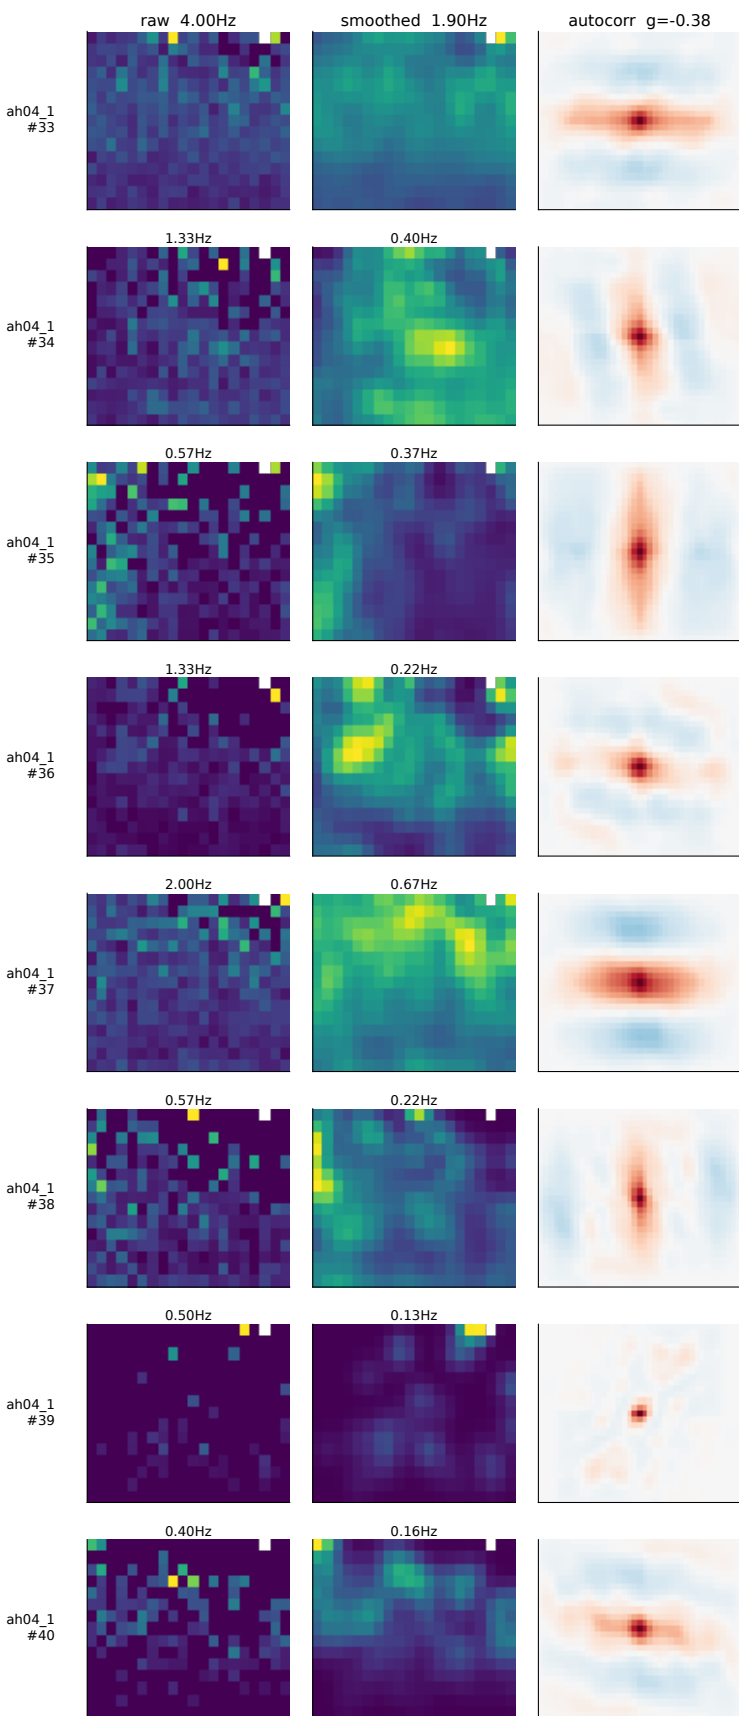


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

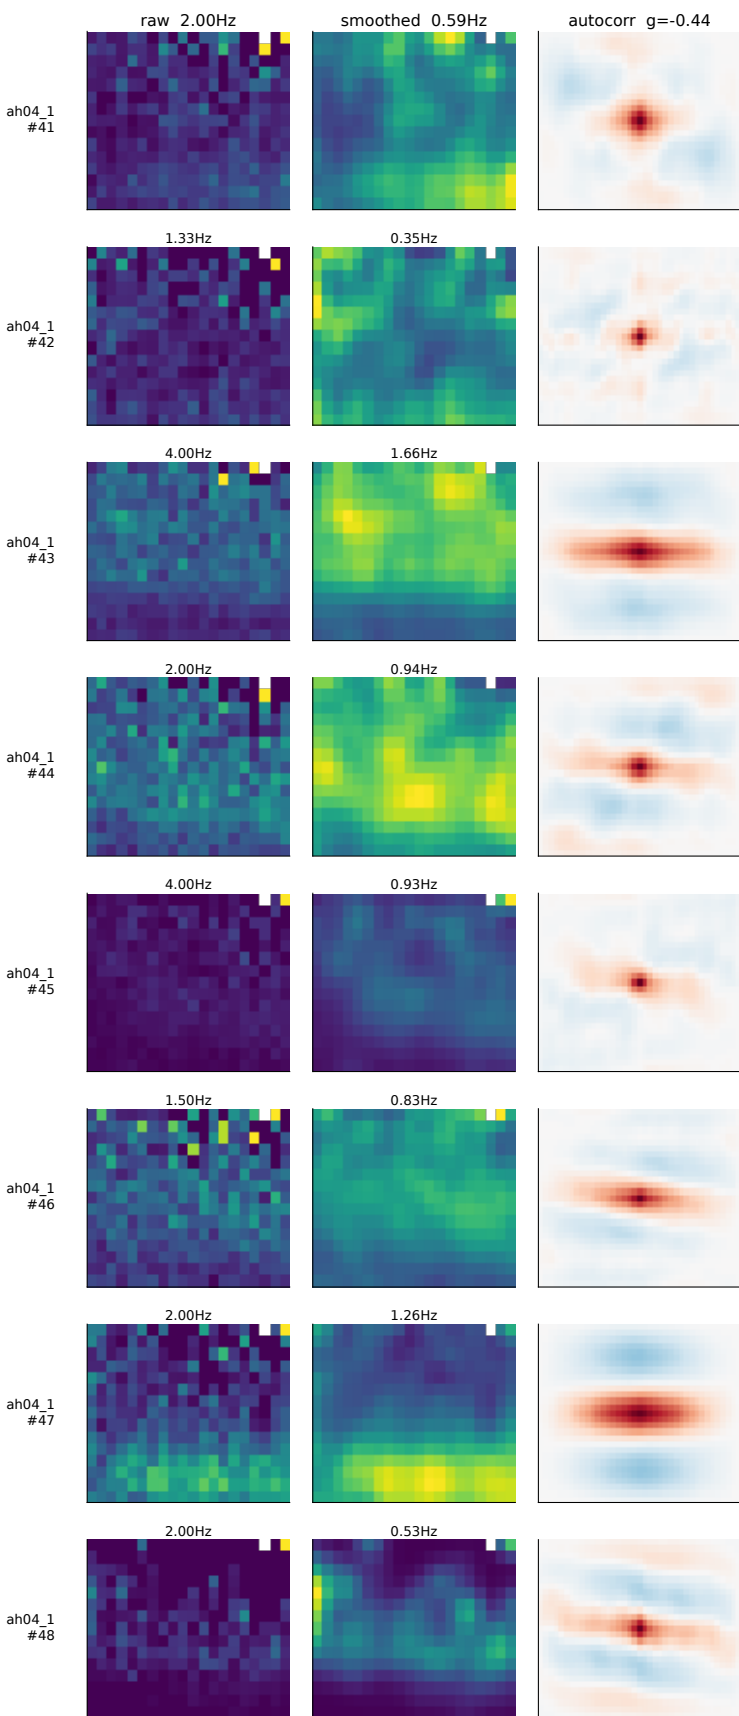

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

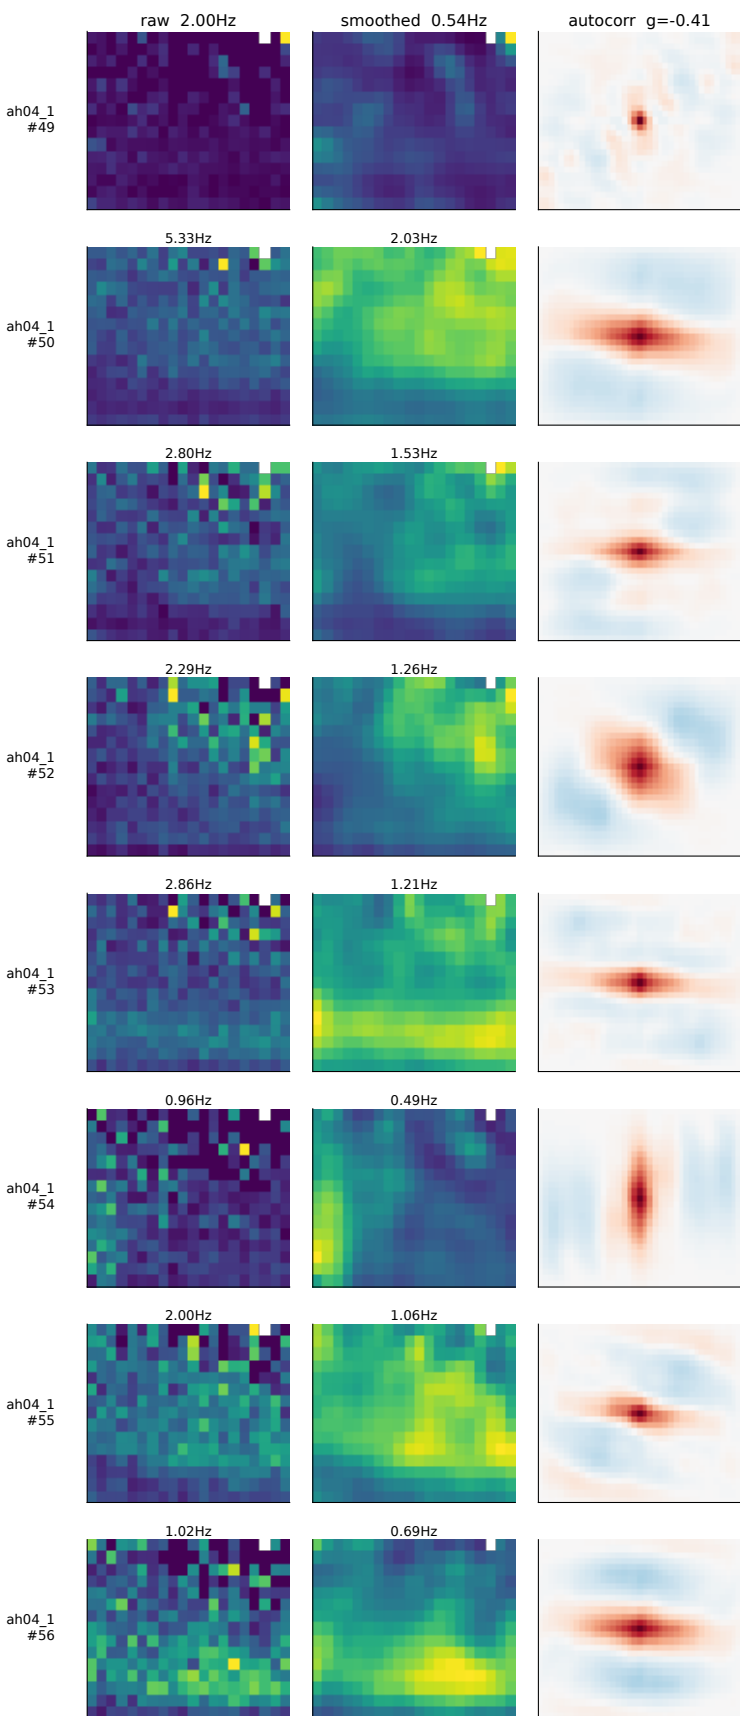


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 6  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

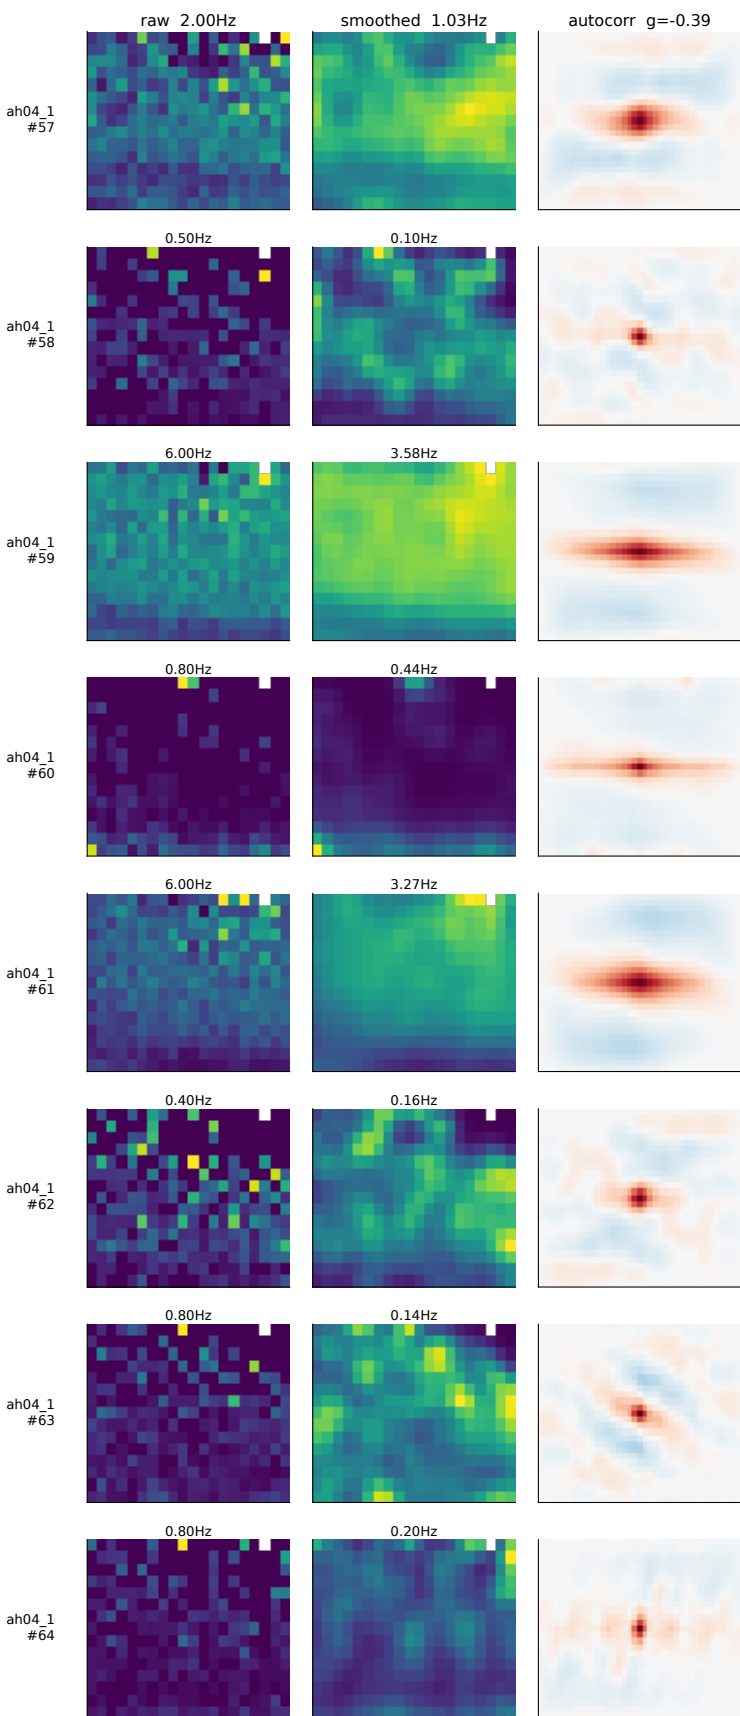





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

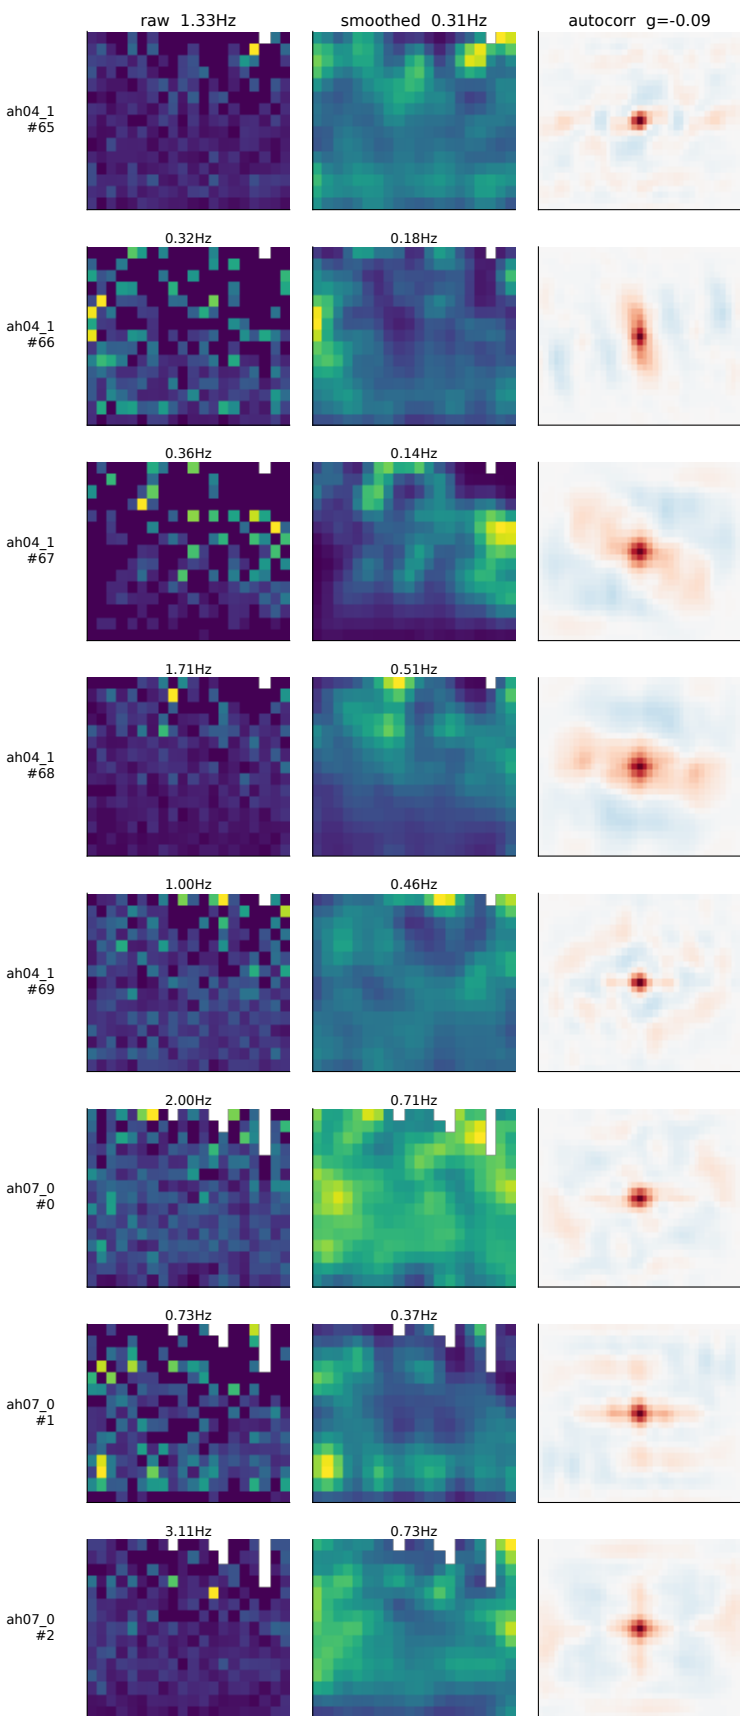


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

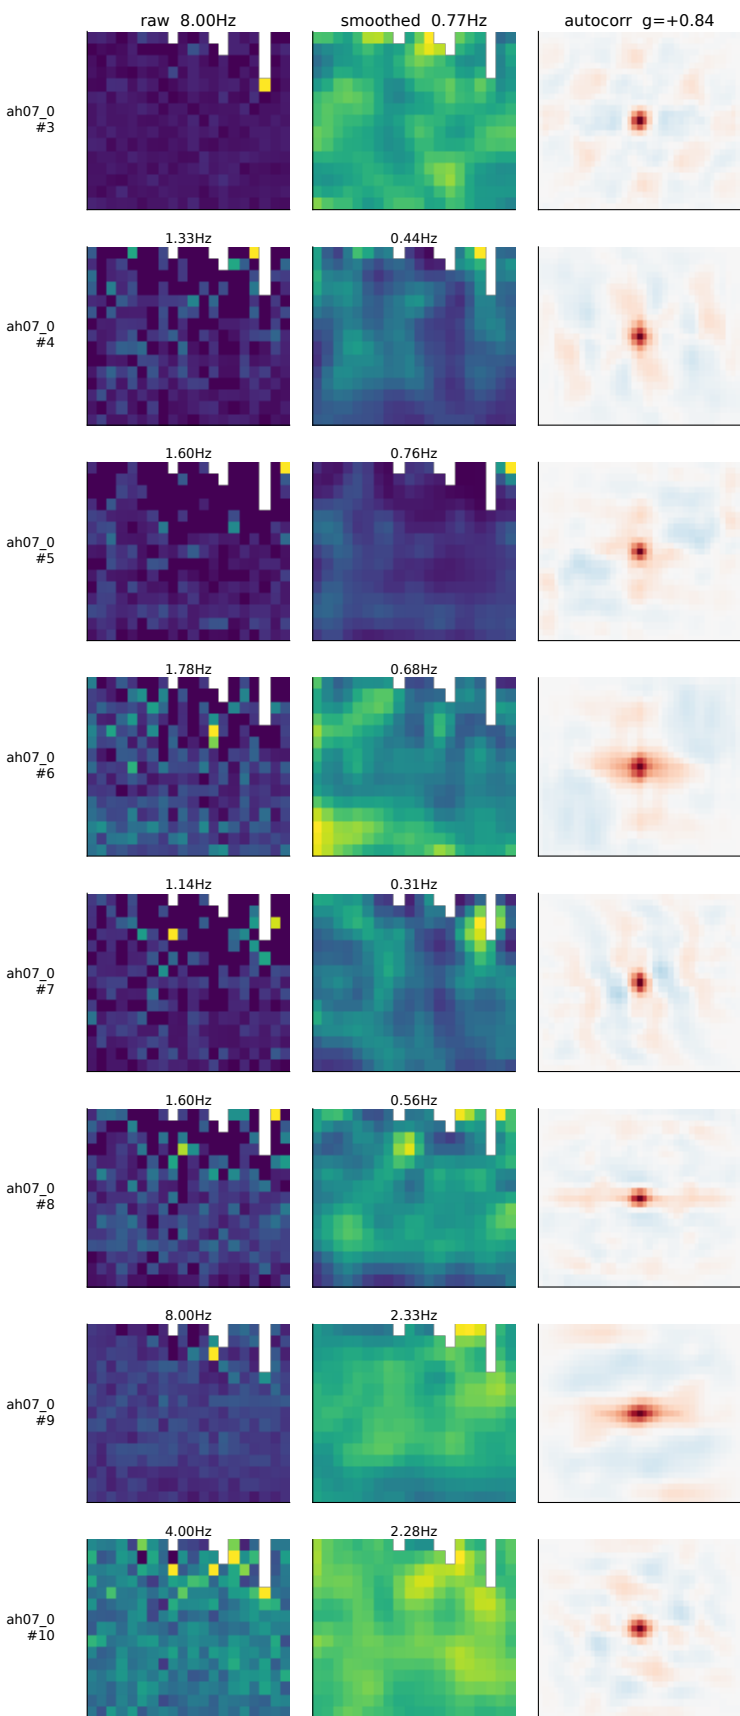


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

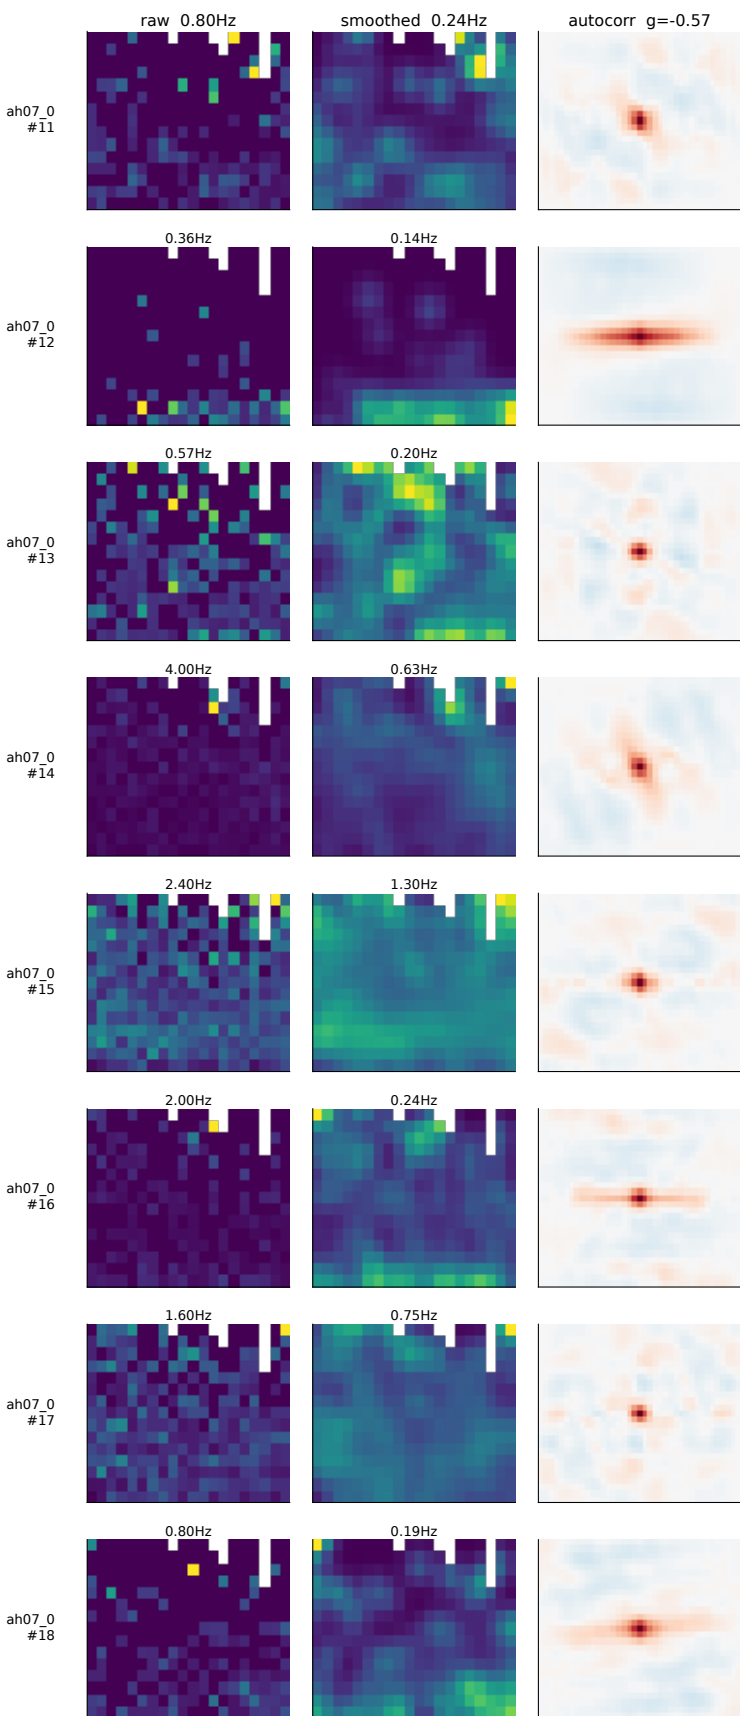


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

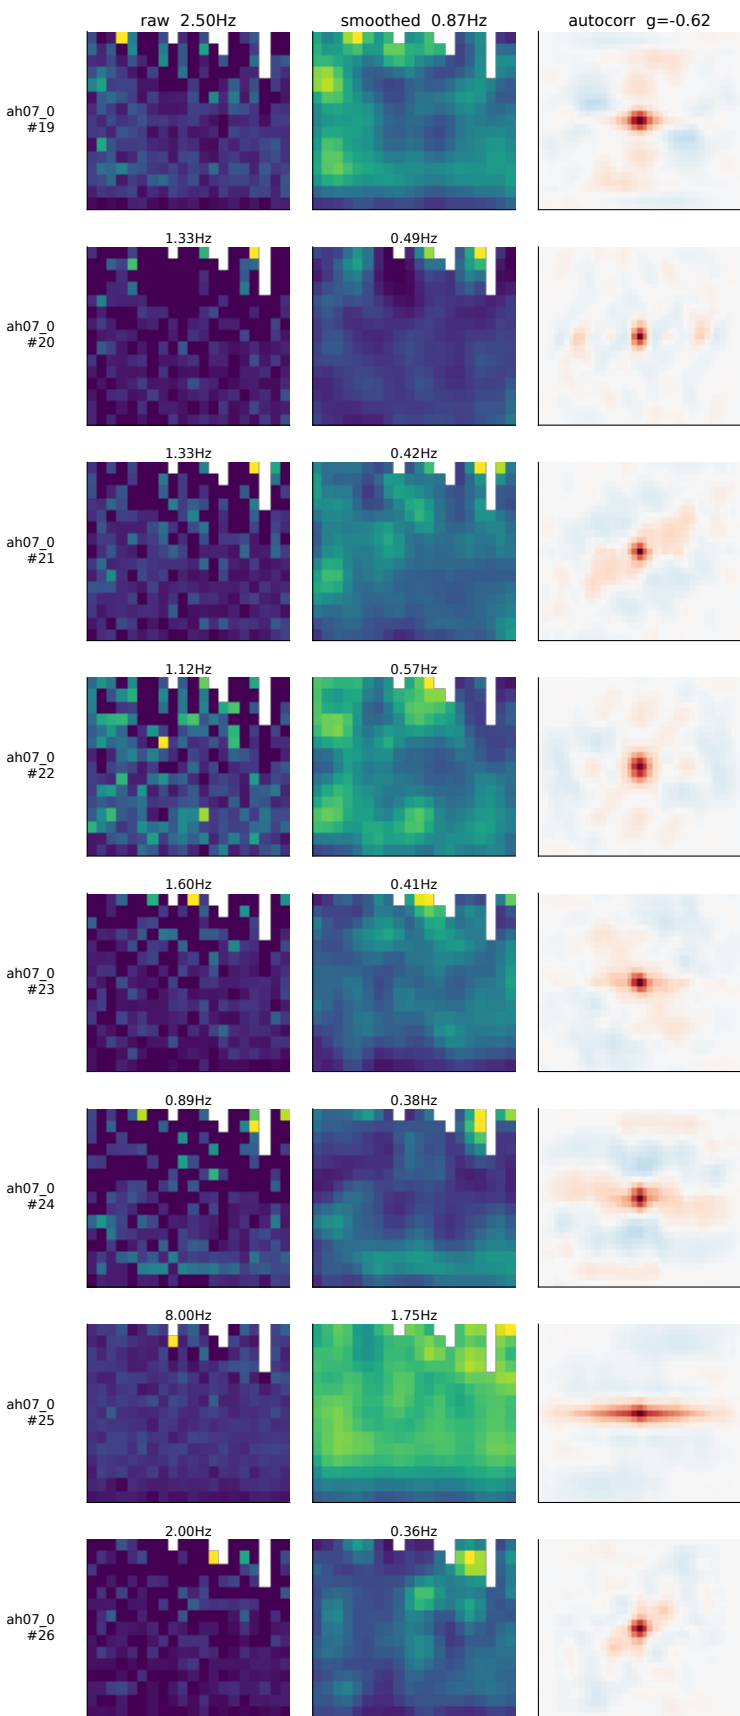


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

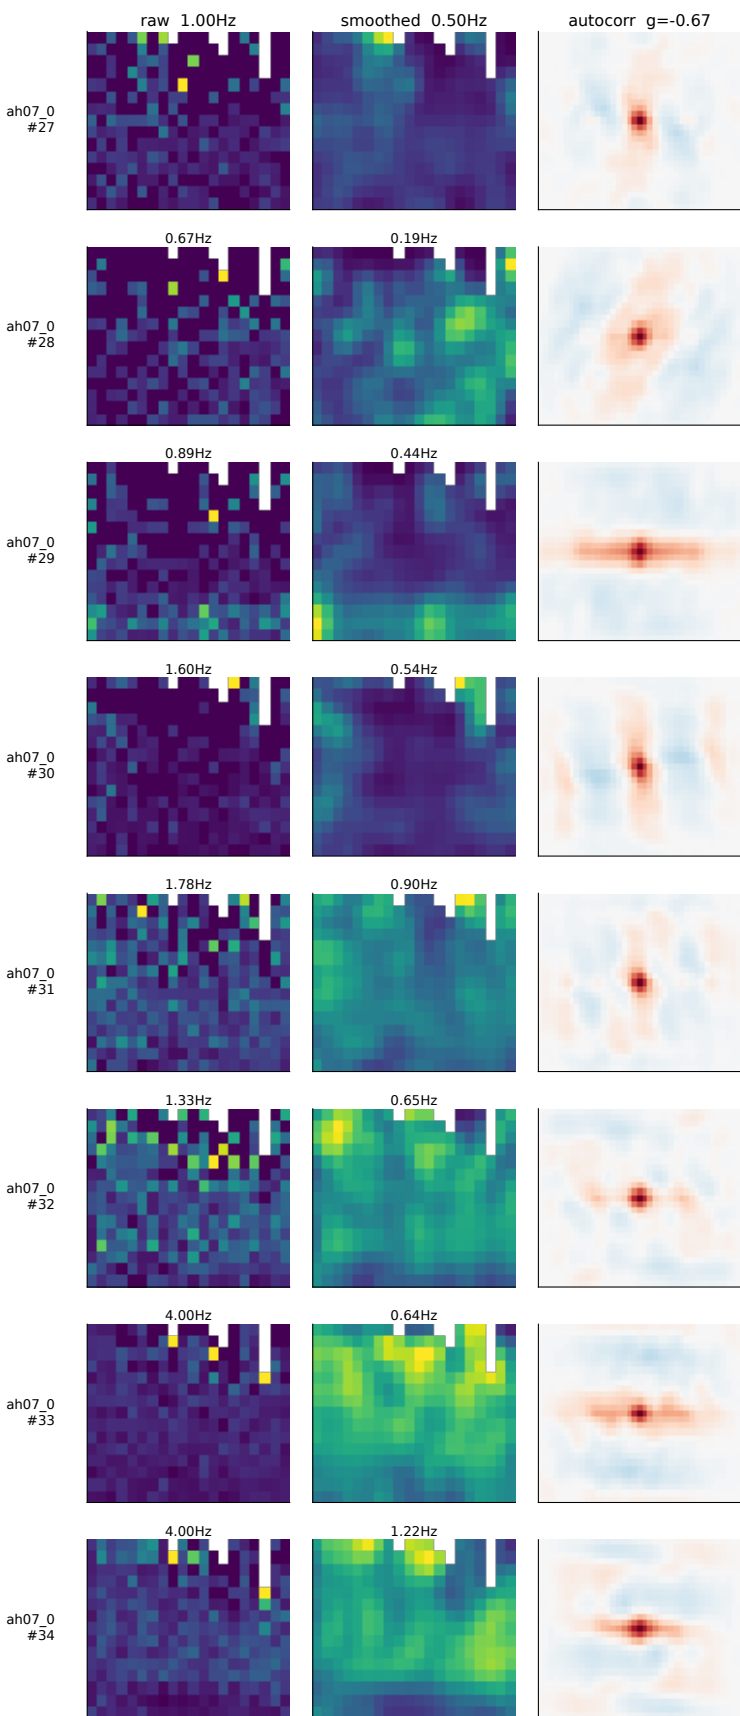


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

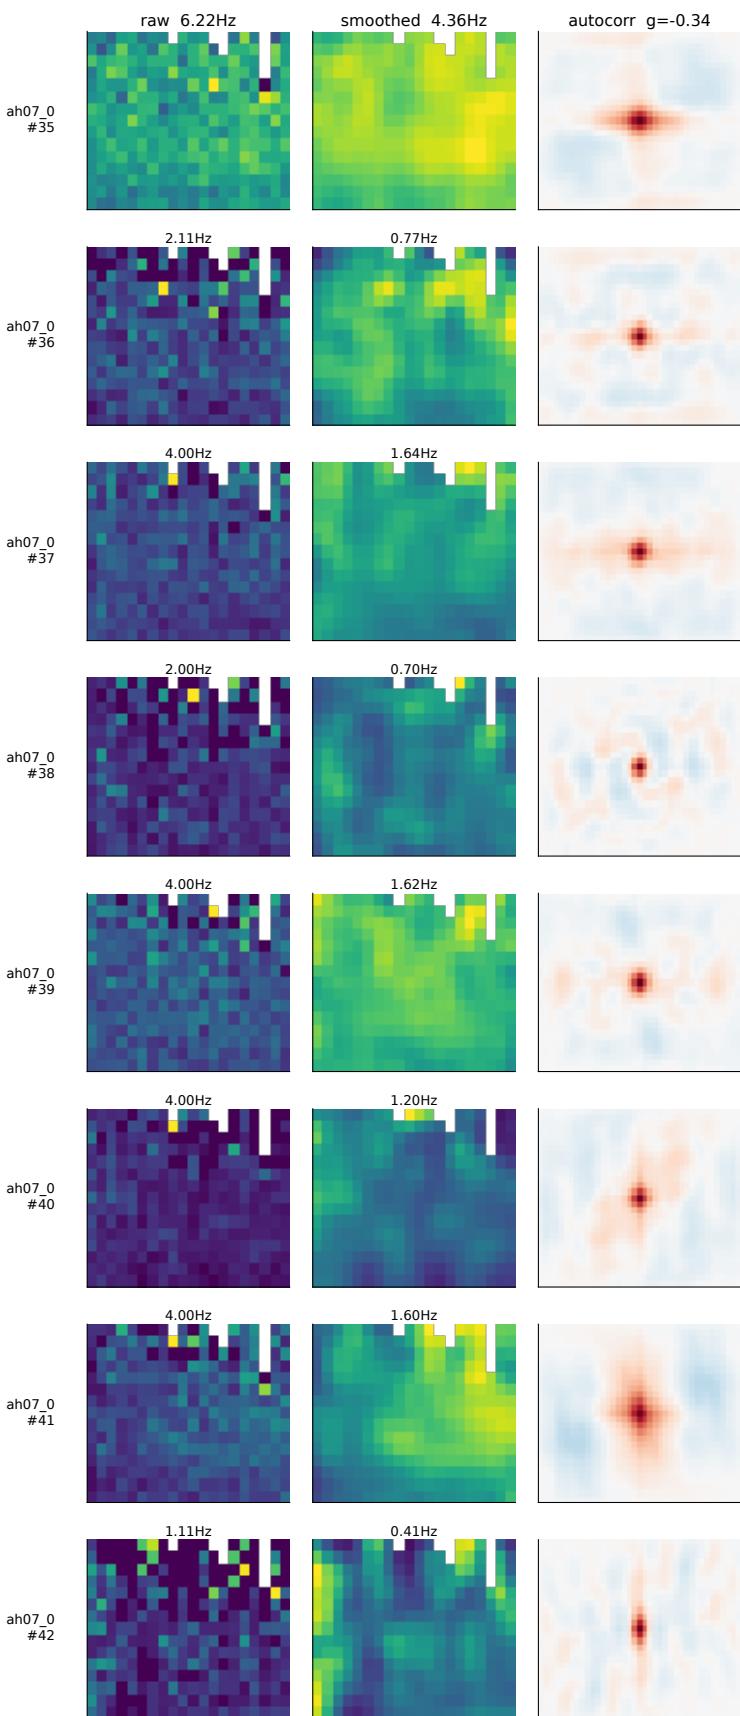

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

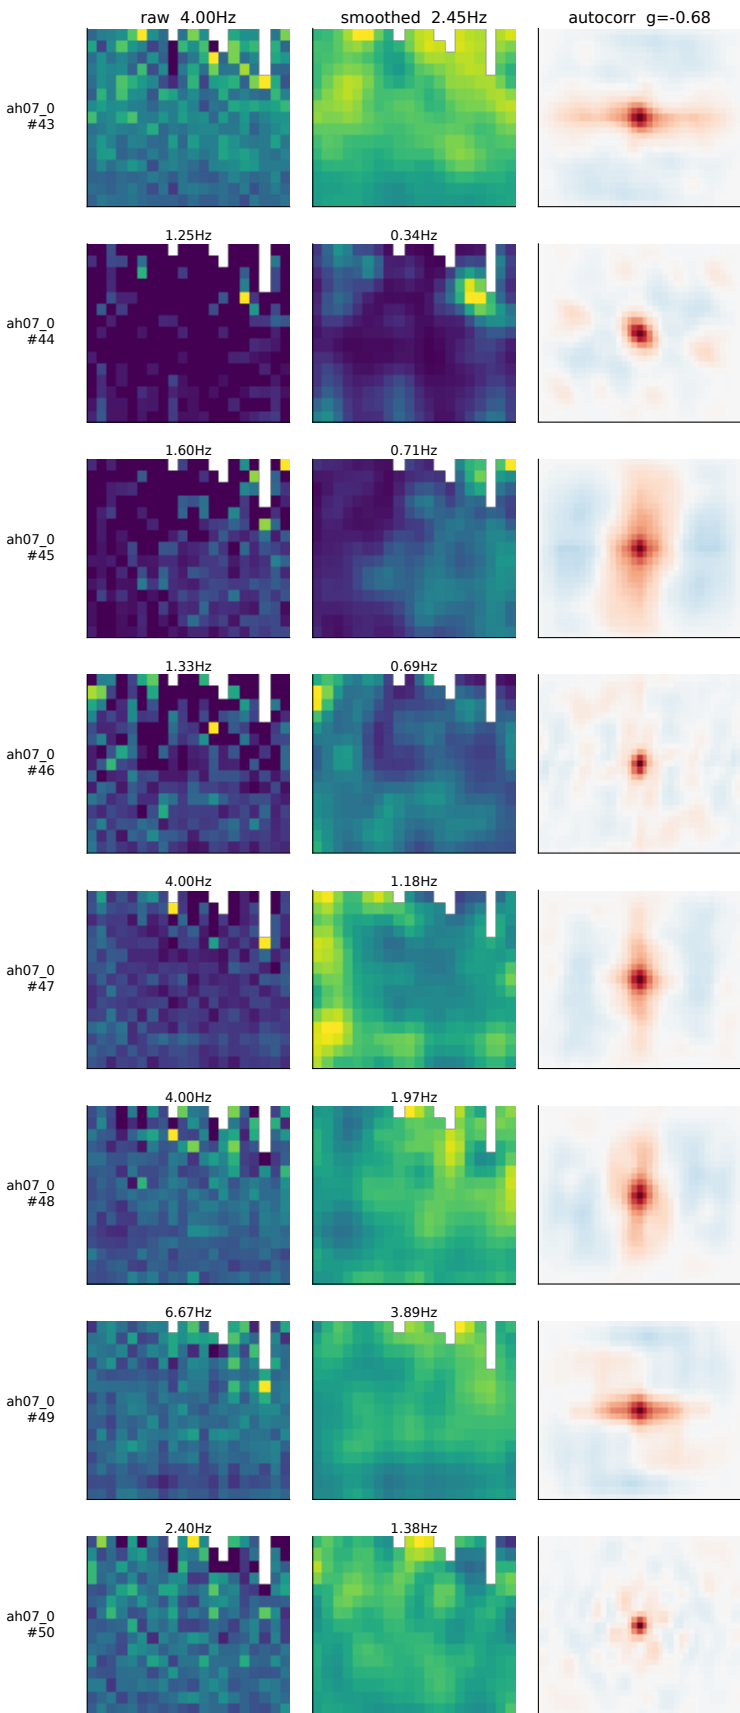


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

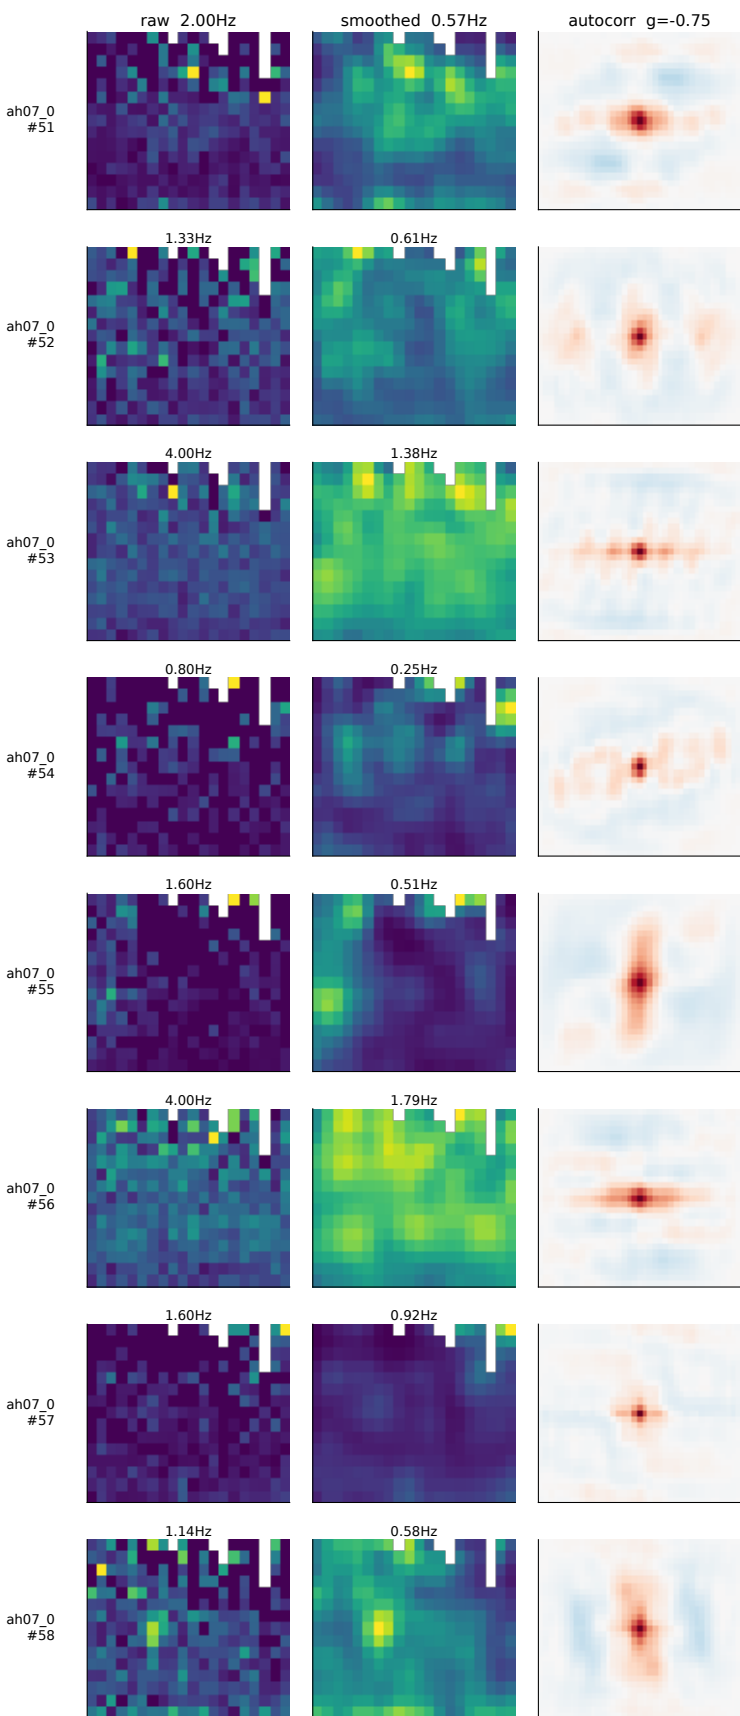





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

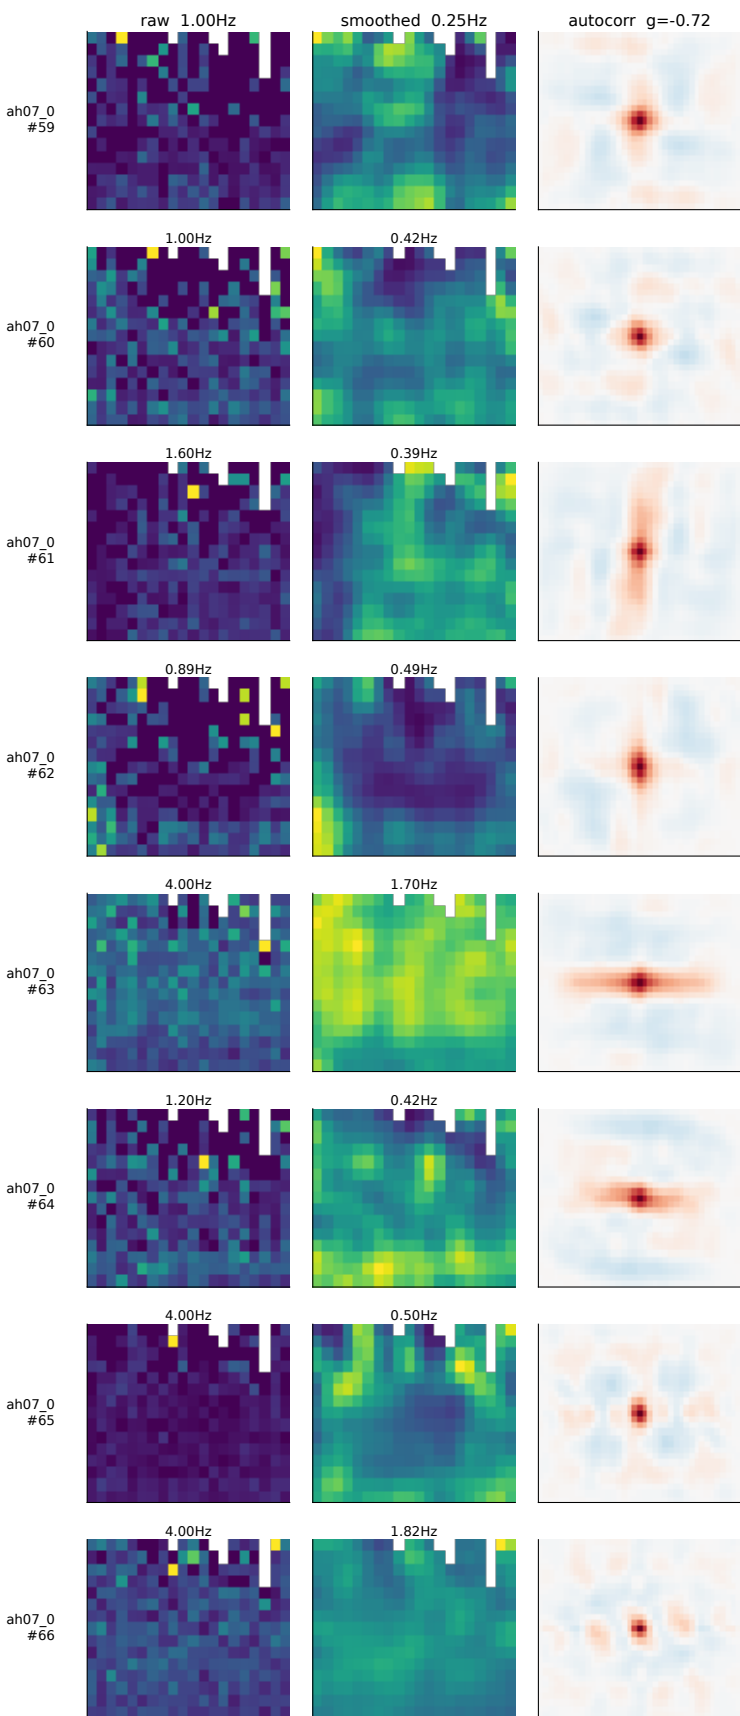


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

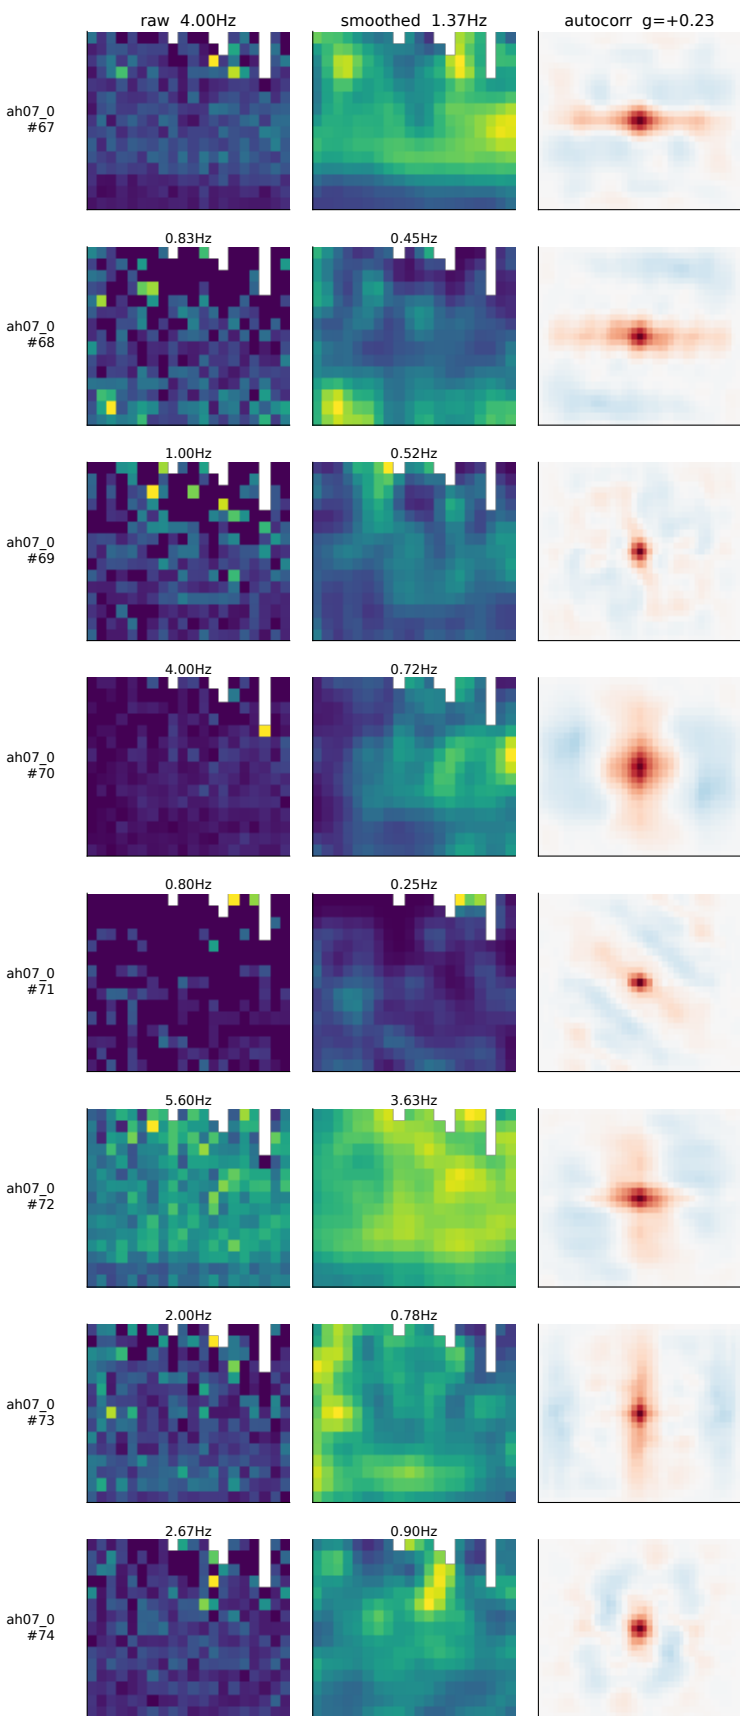


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

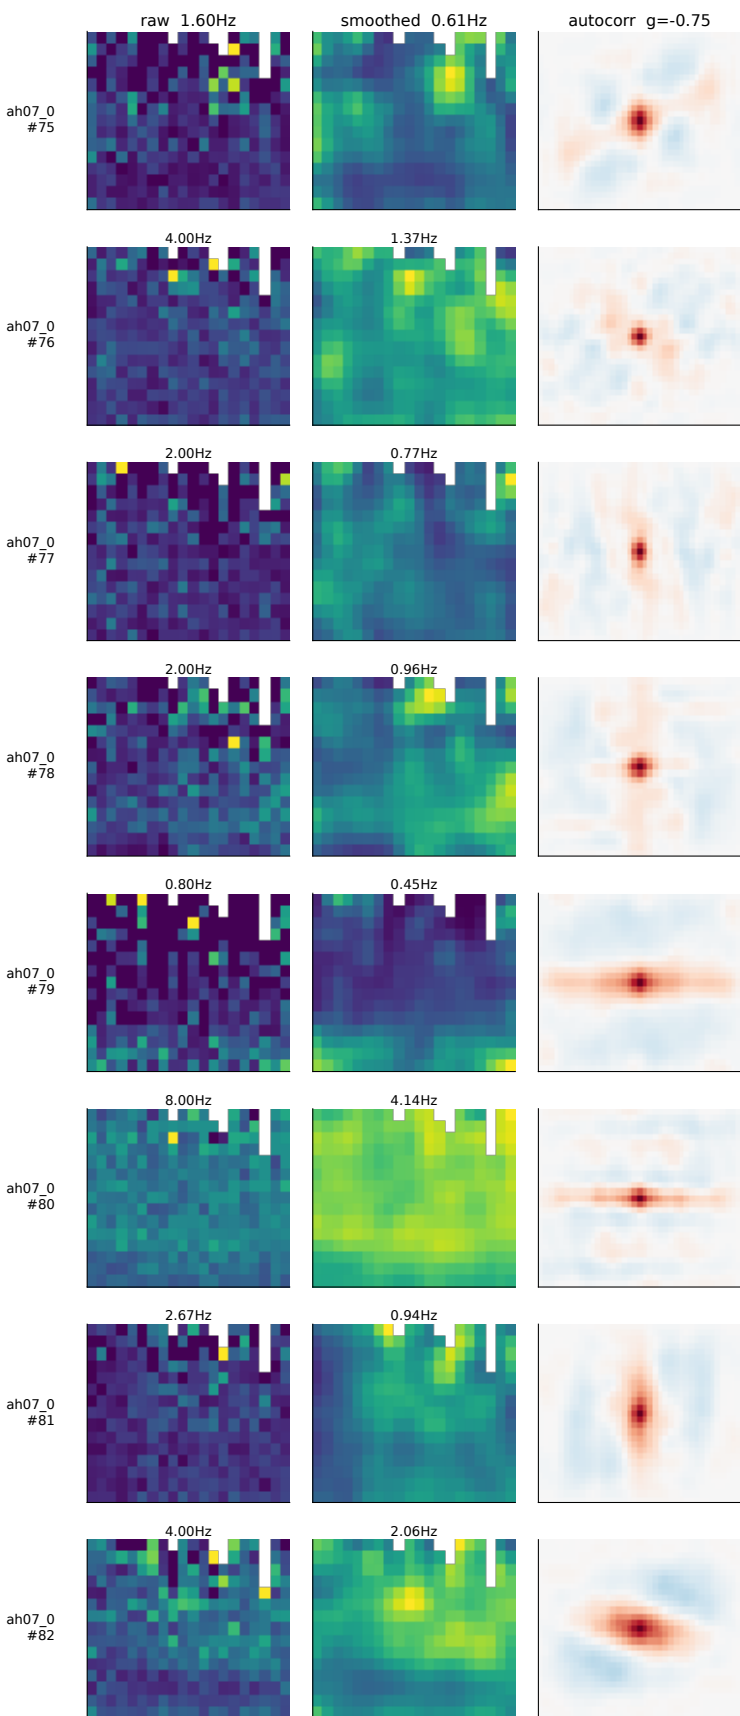


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 7  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

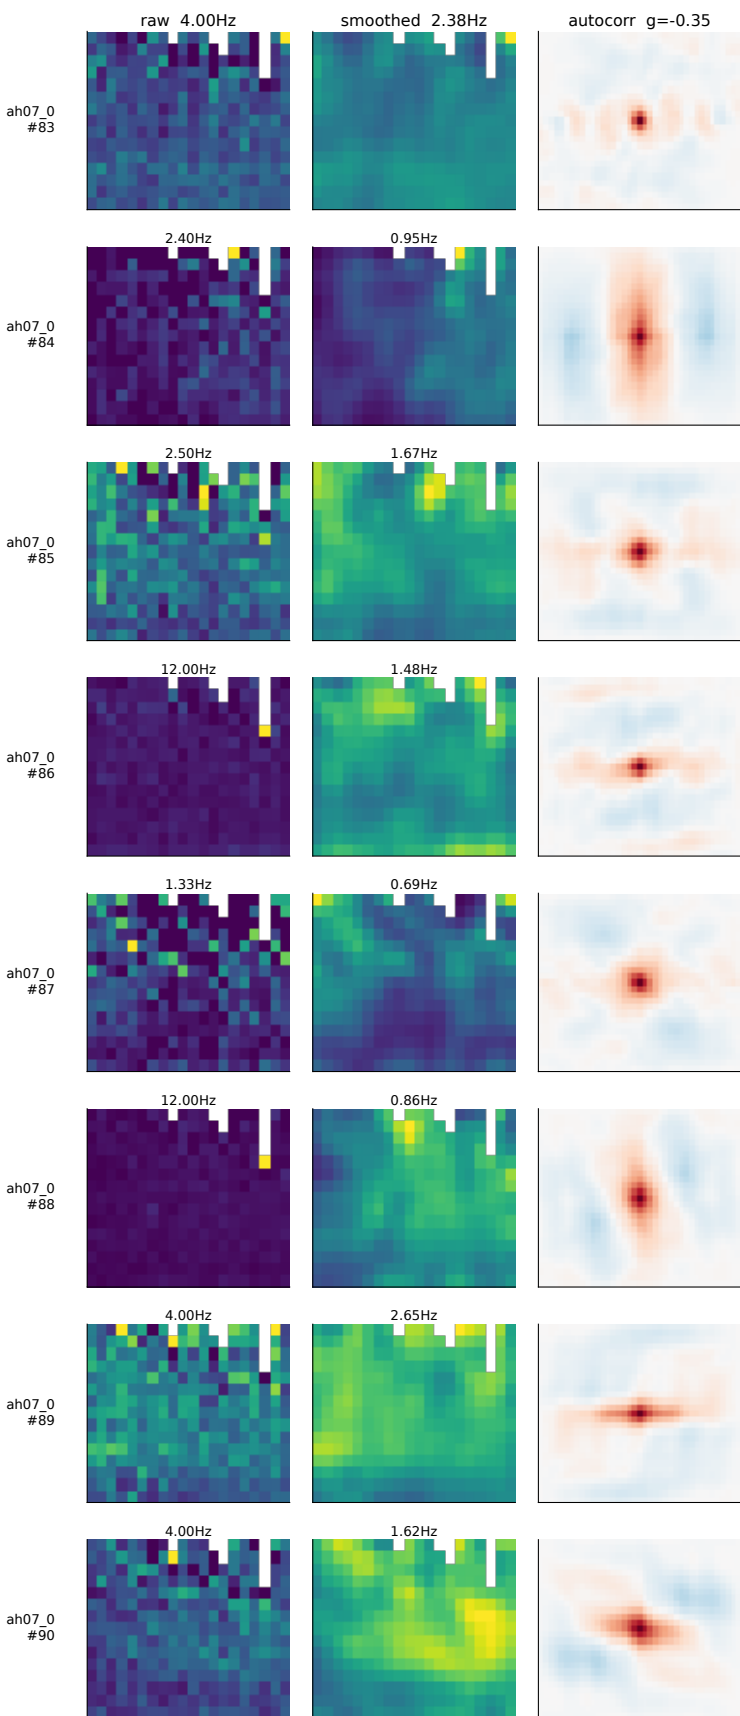


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

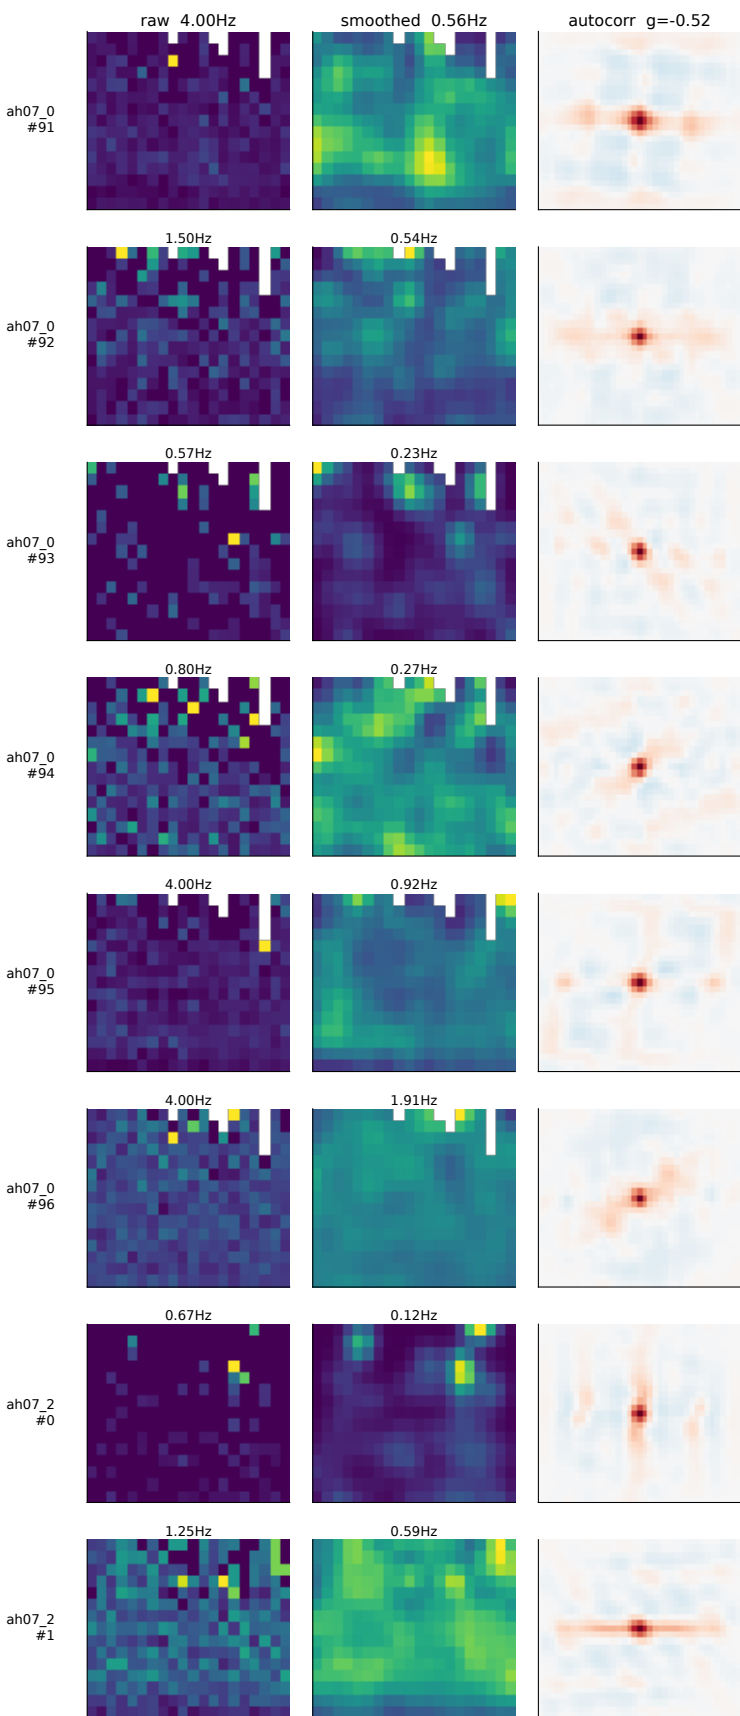


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

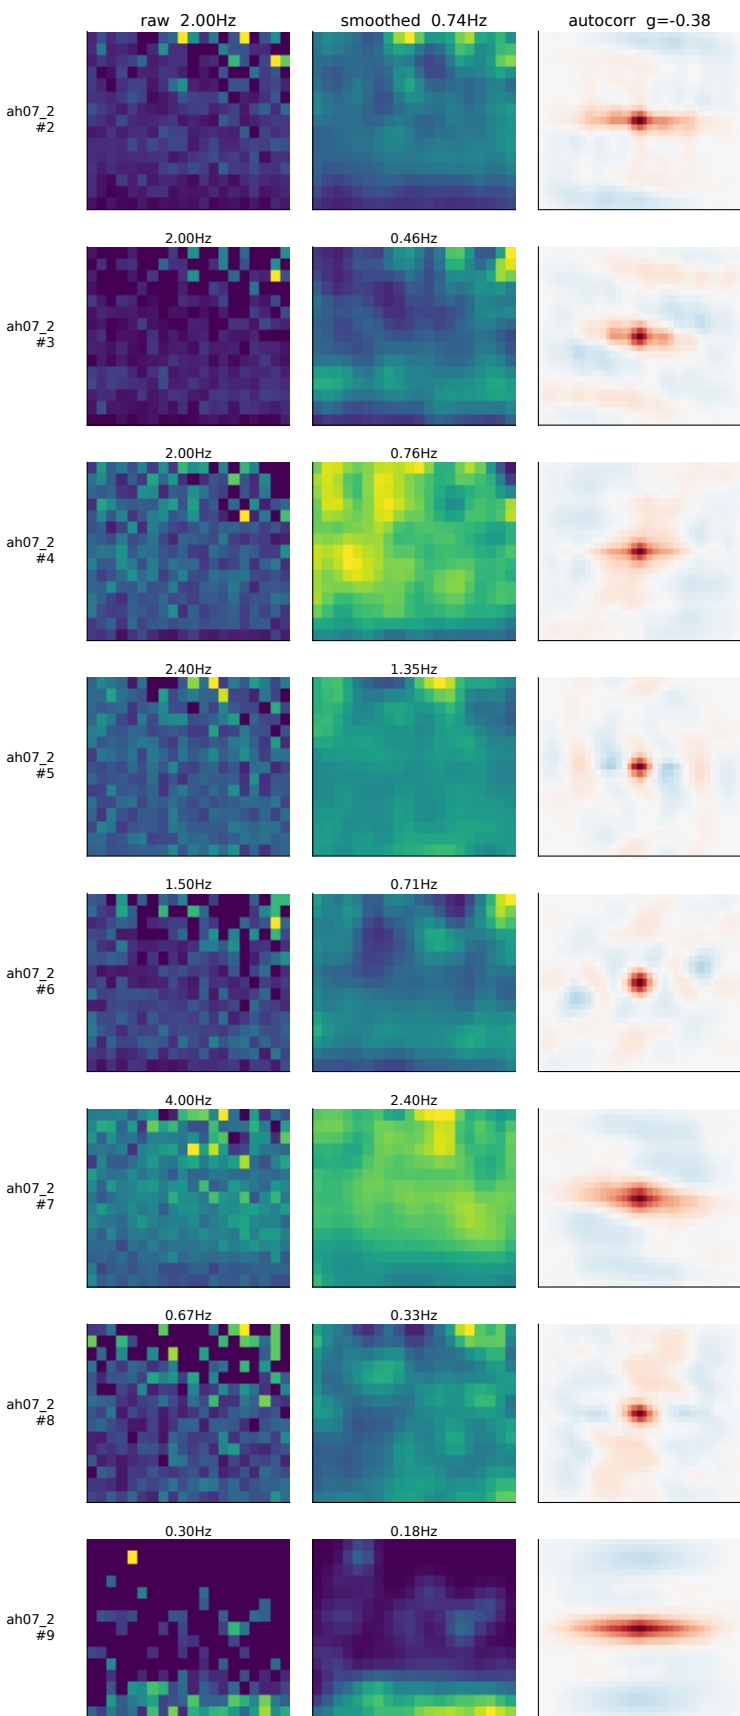

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

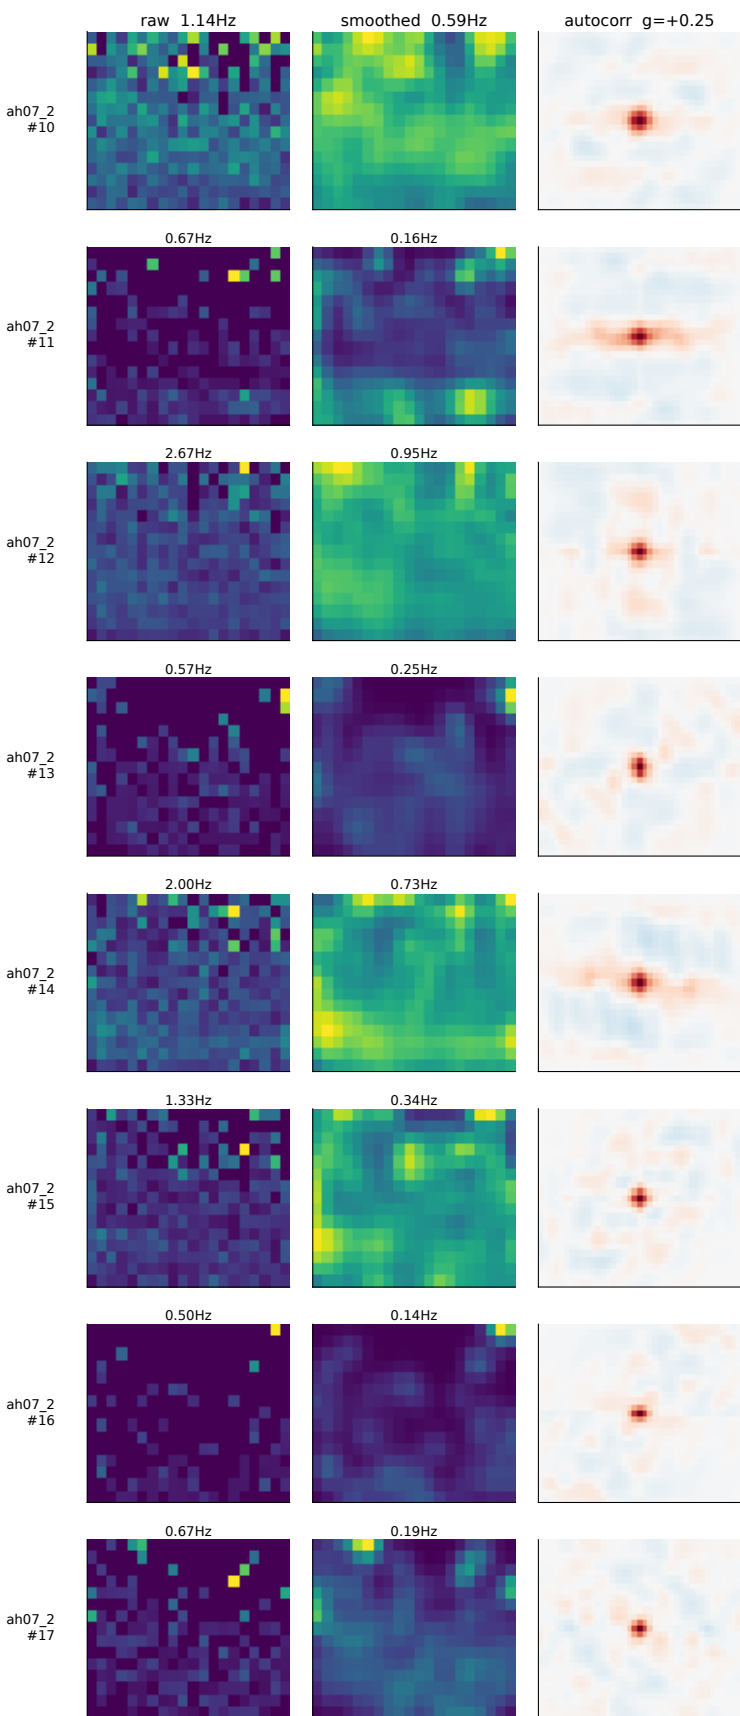


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

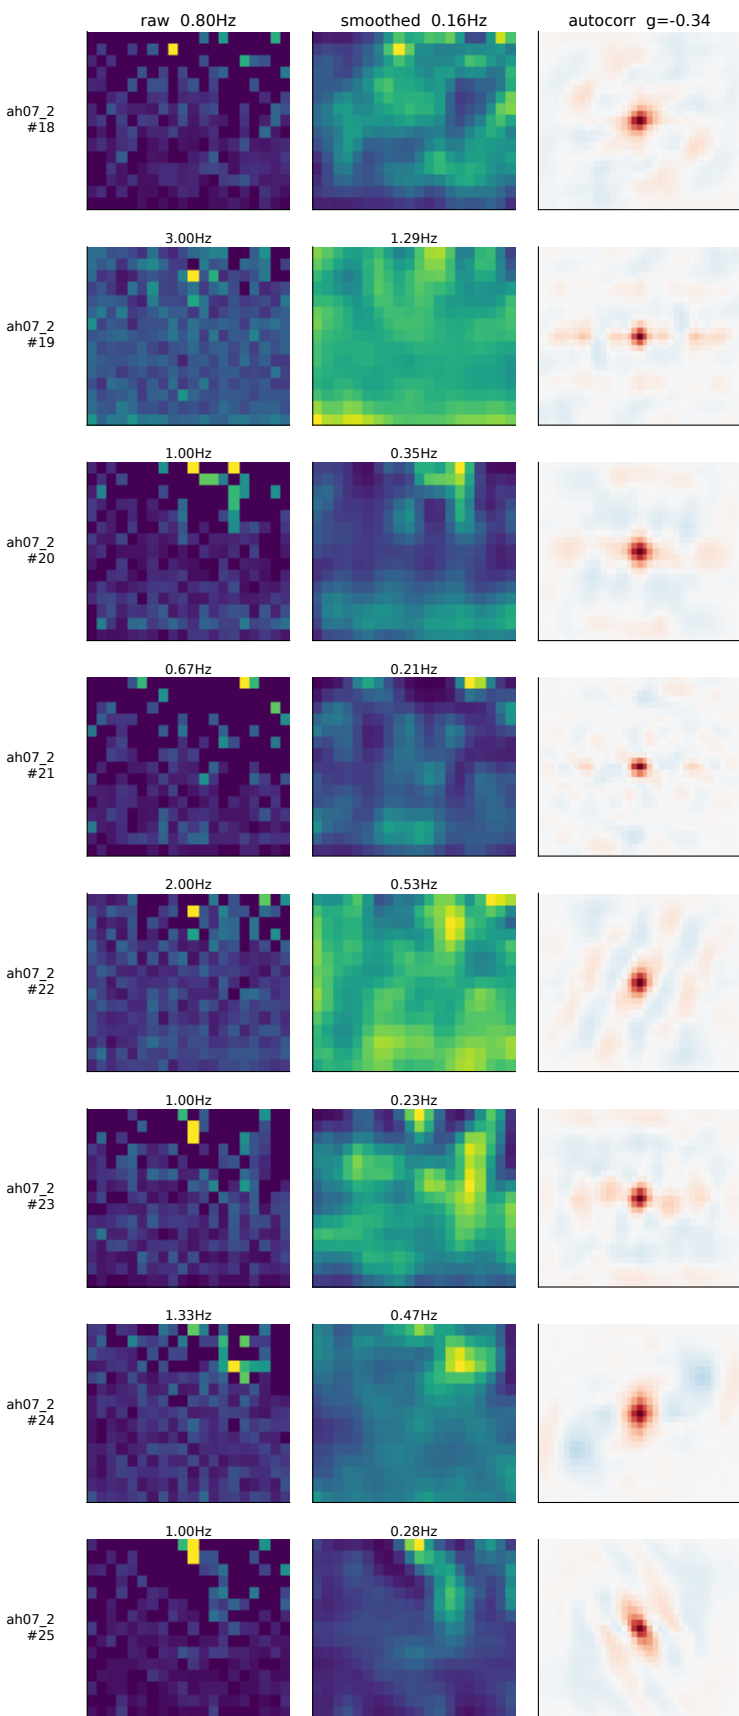





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

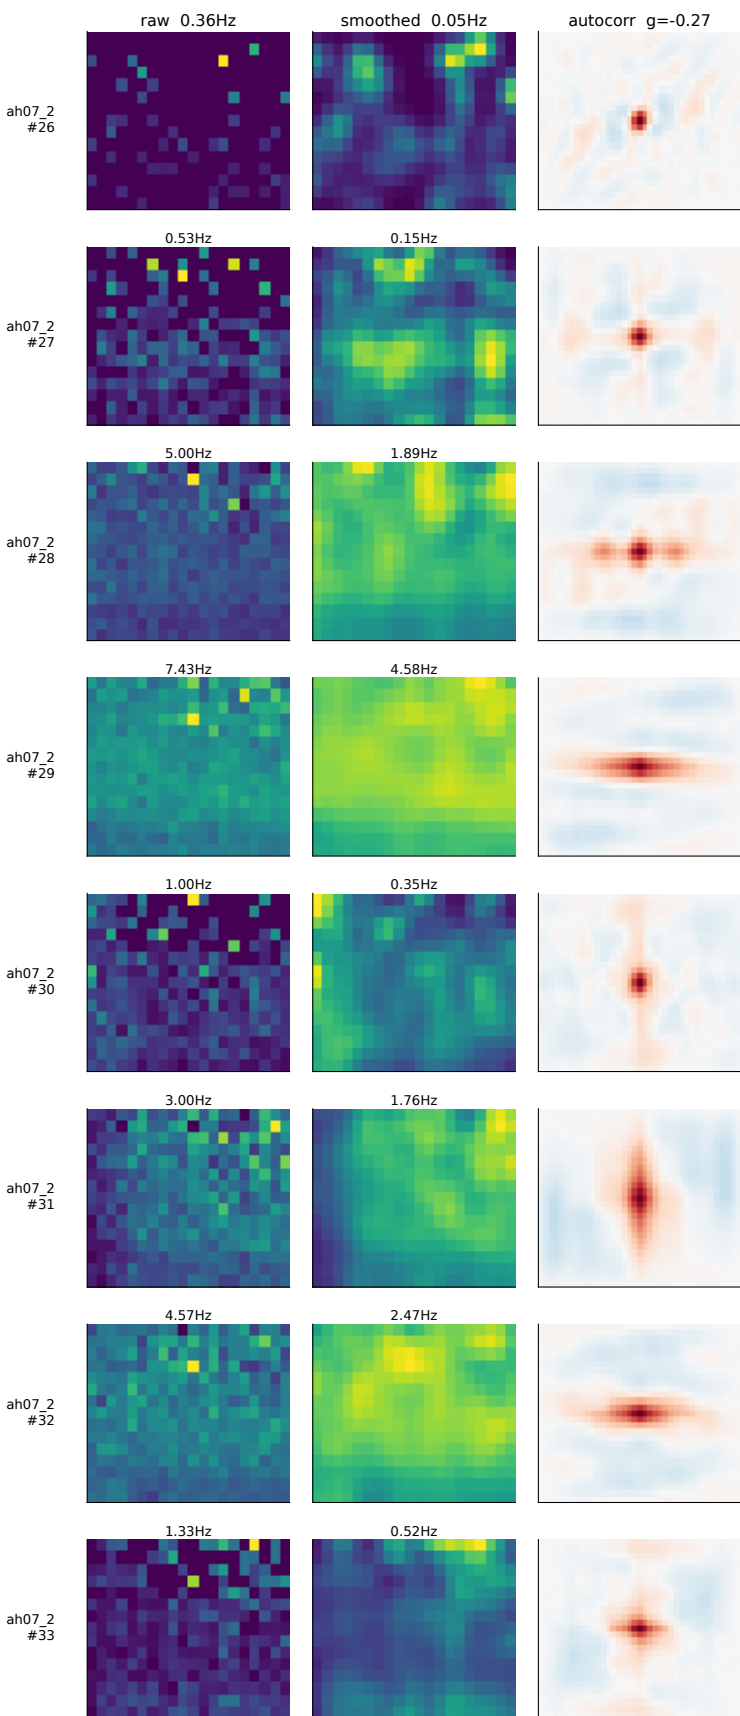


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

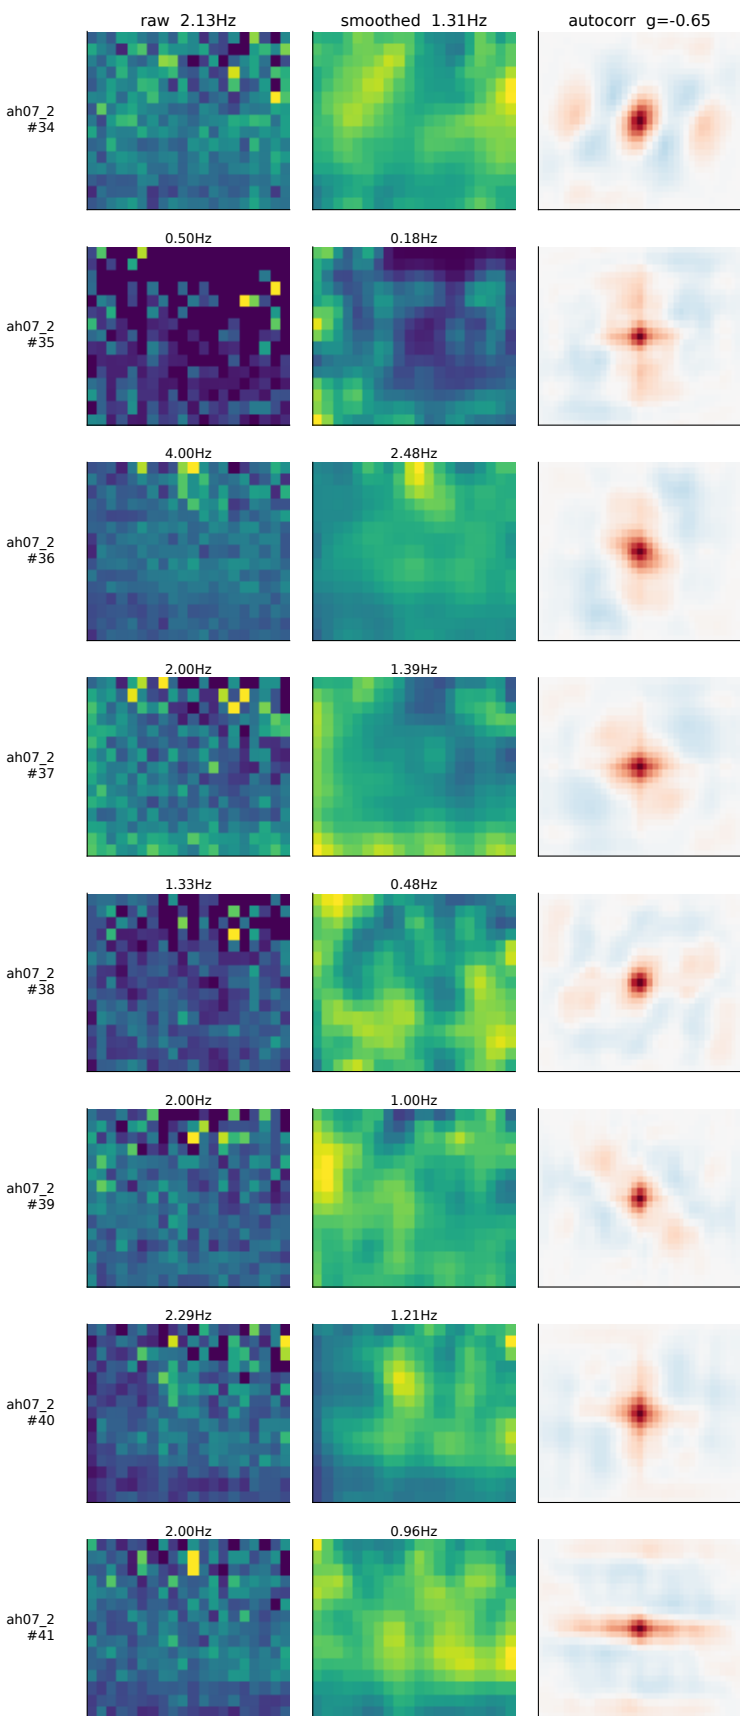


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

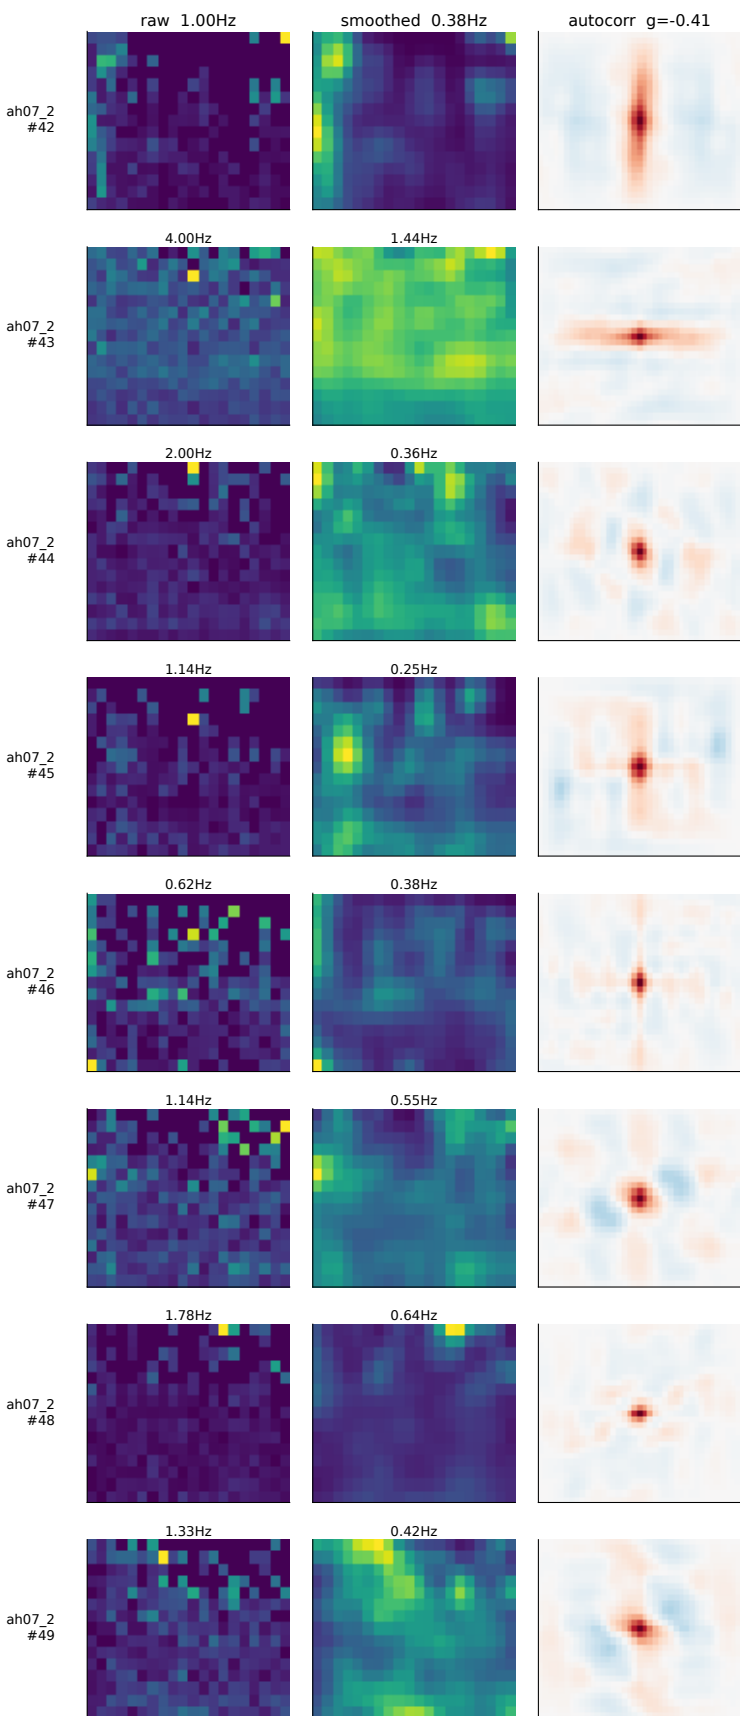


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

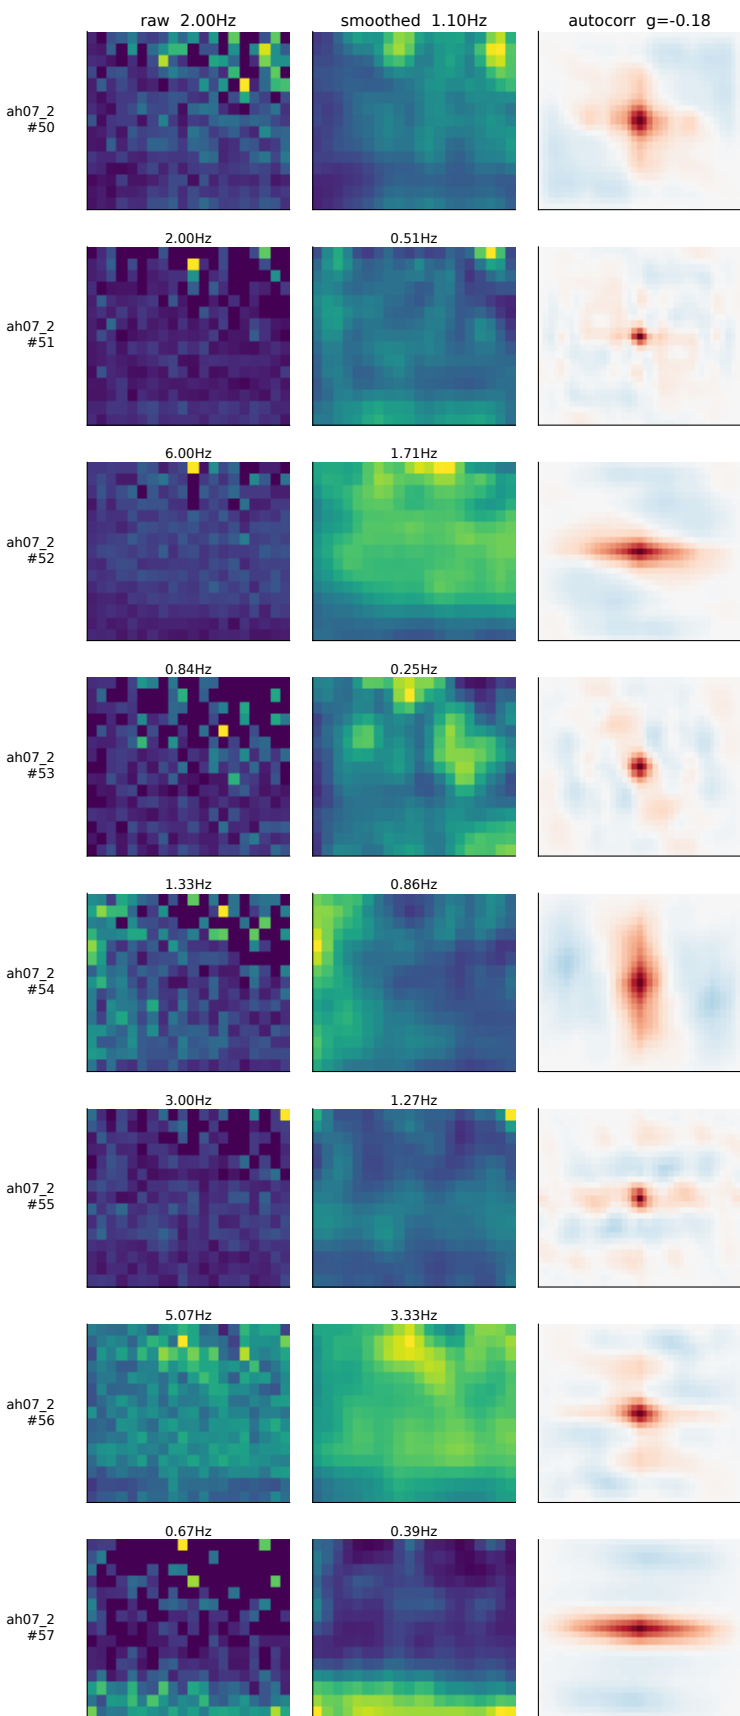


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

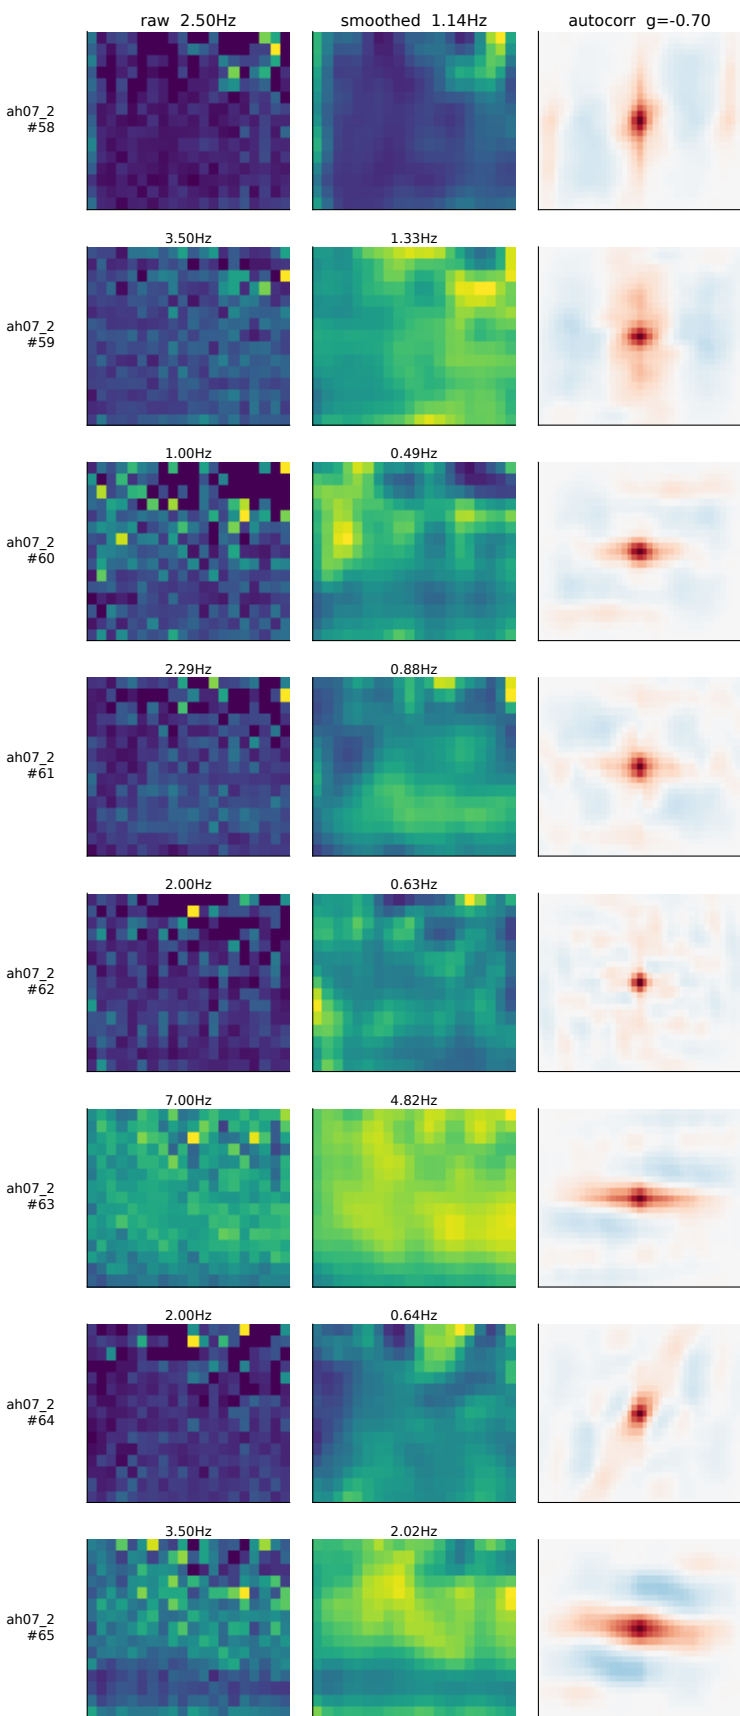


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

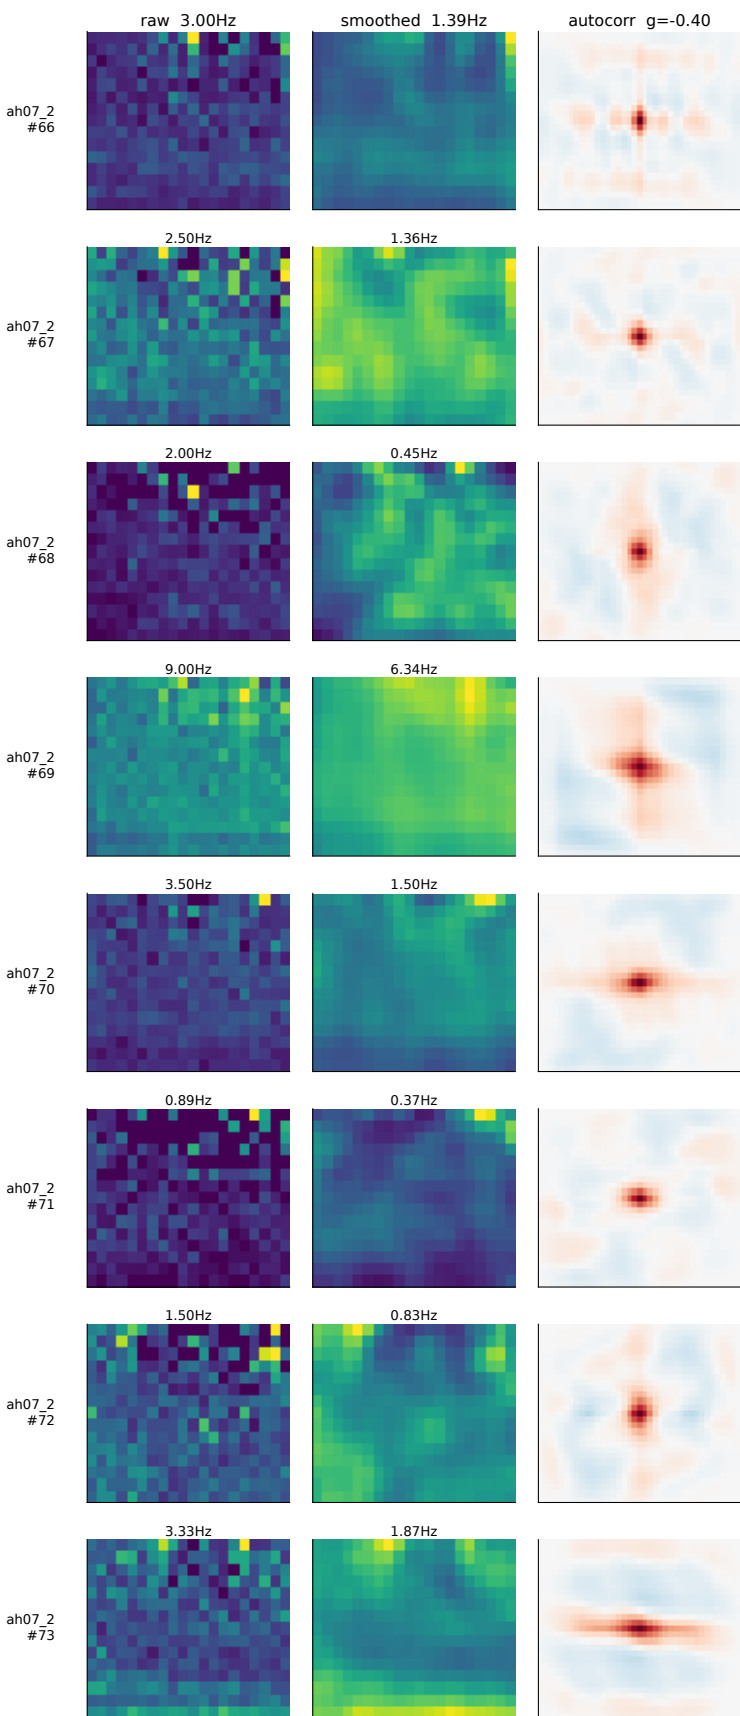

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

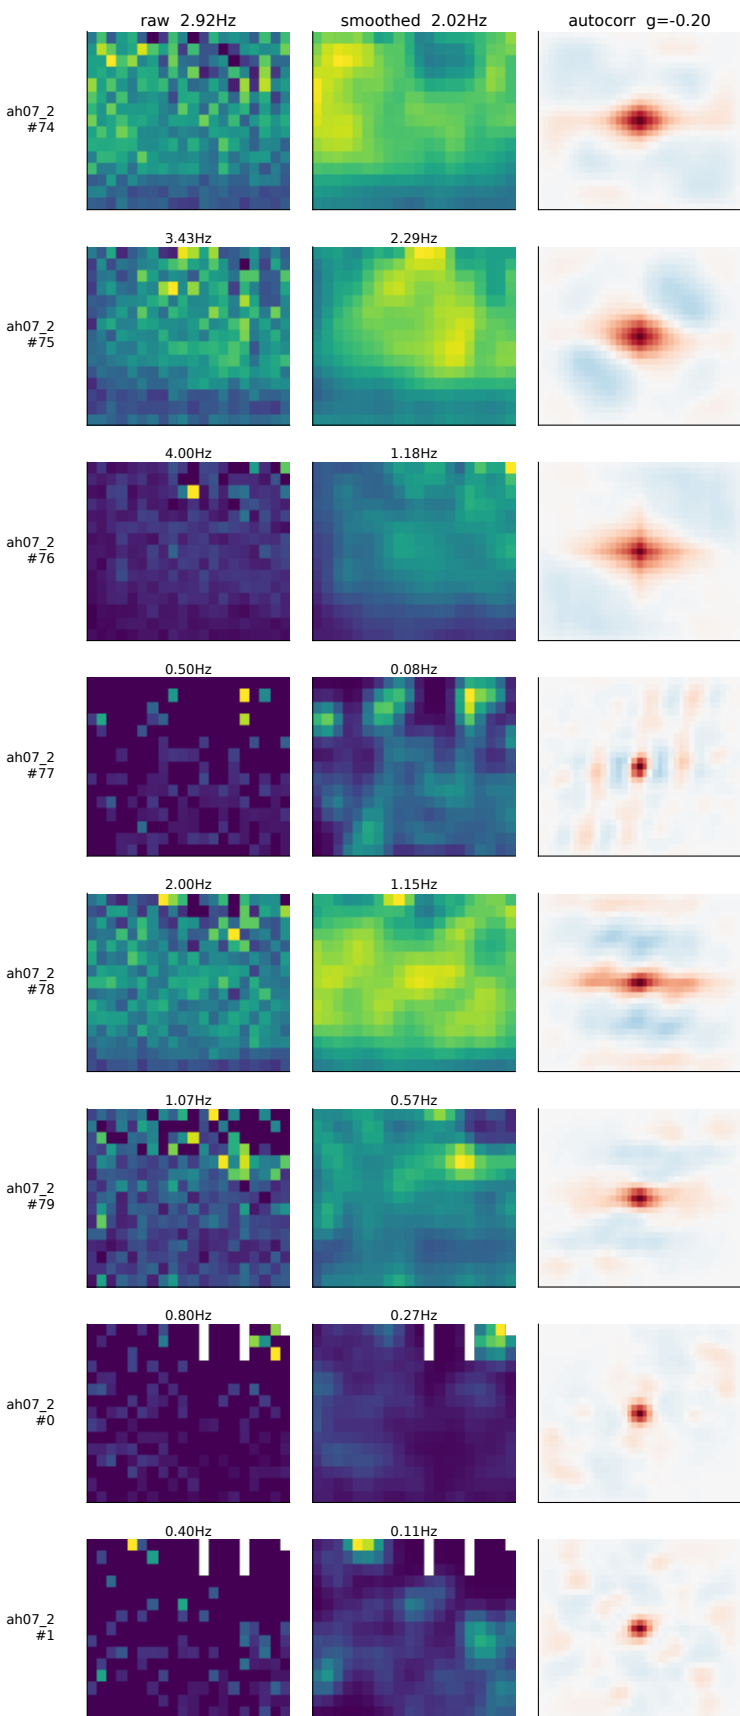


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

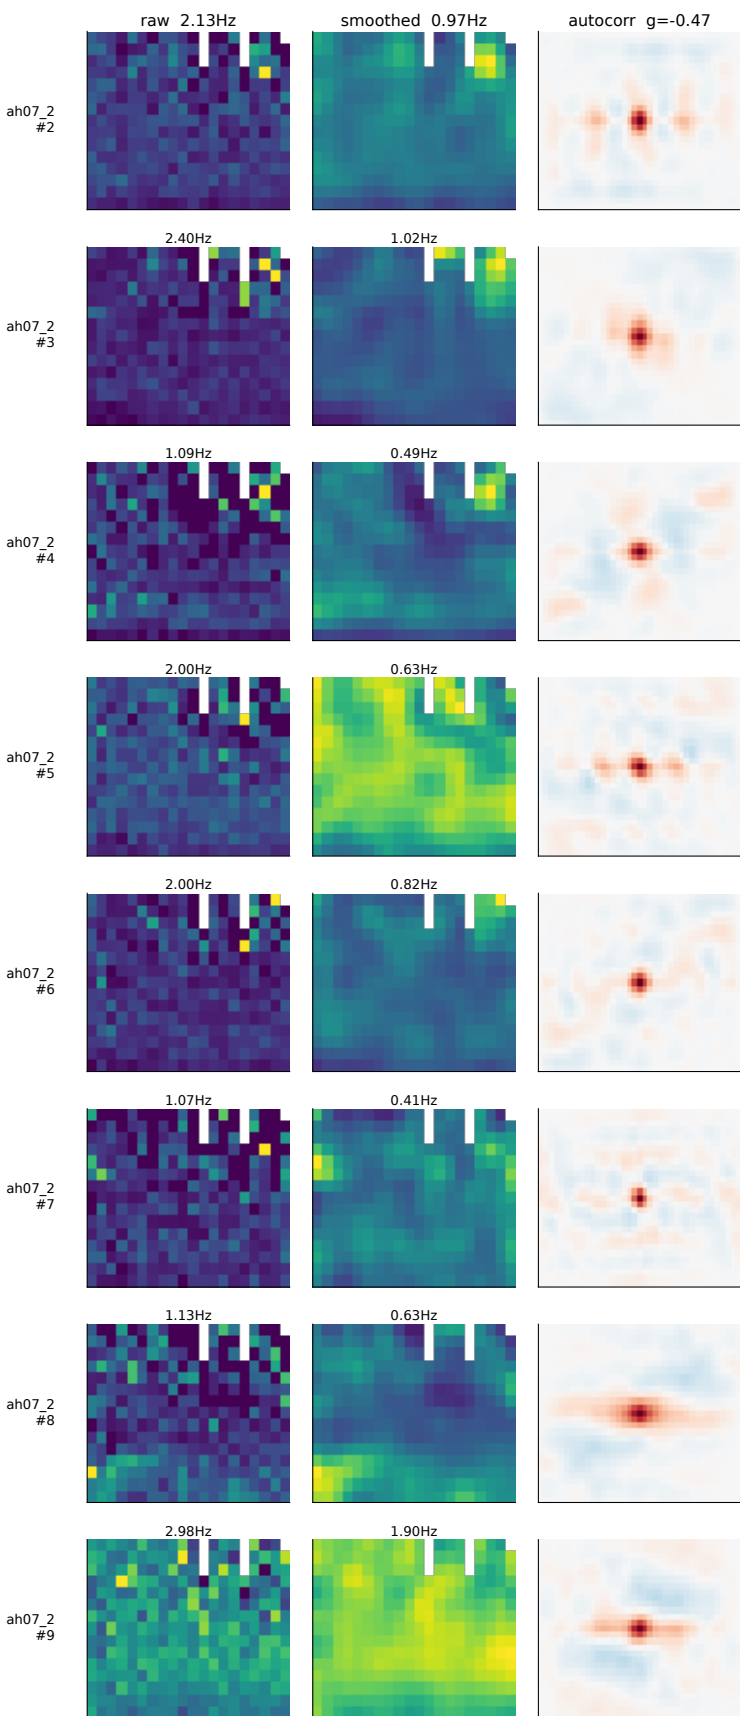





os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 8  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

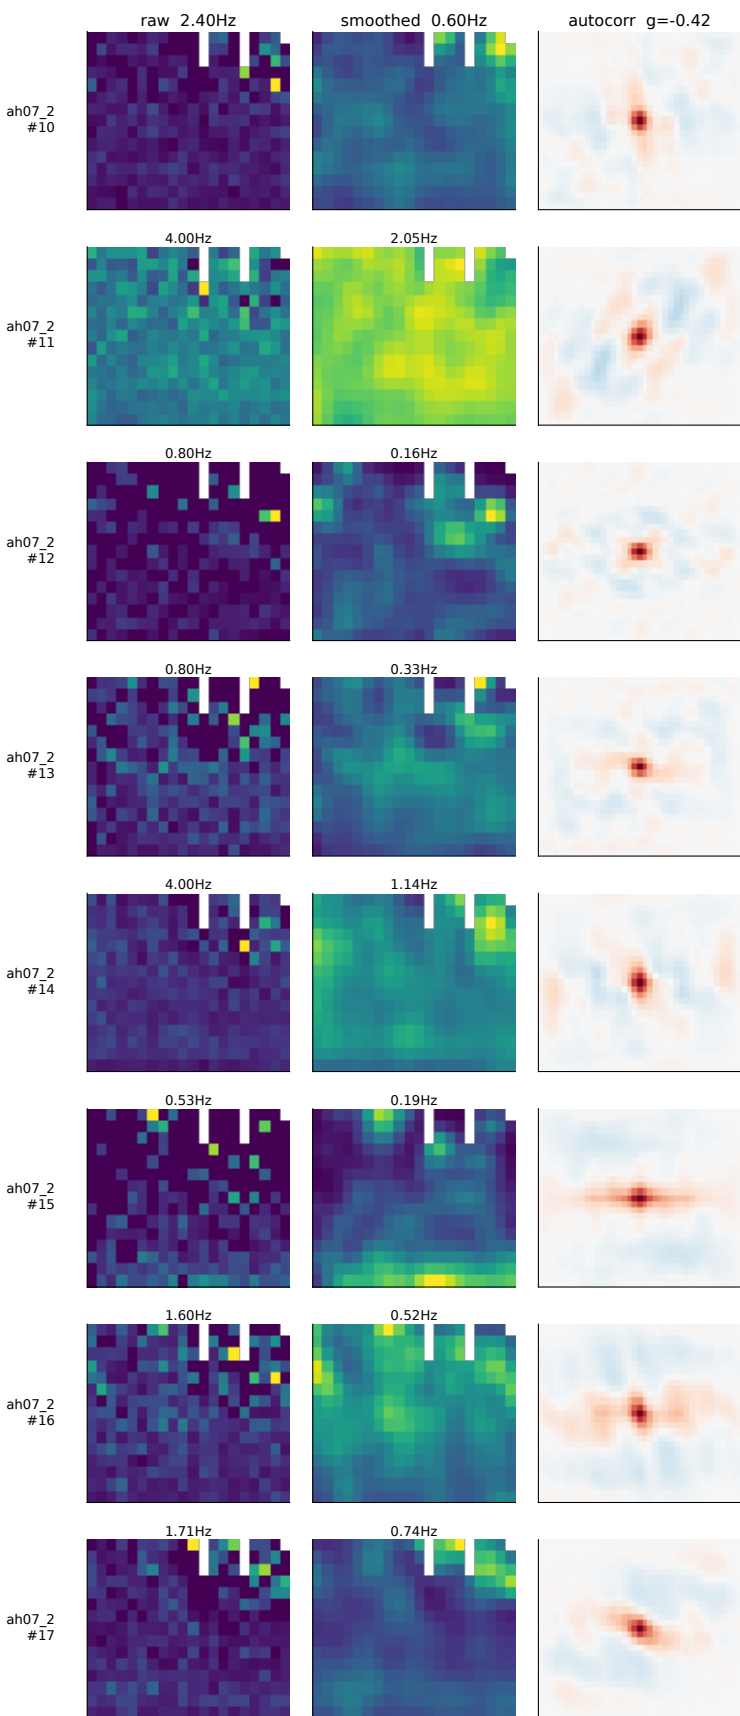


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

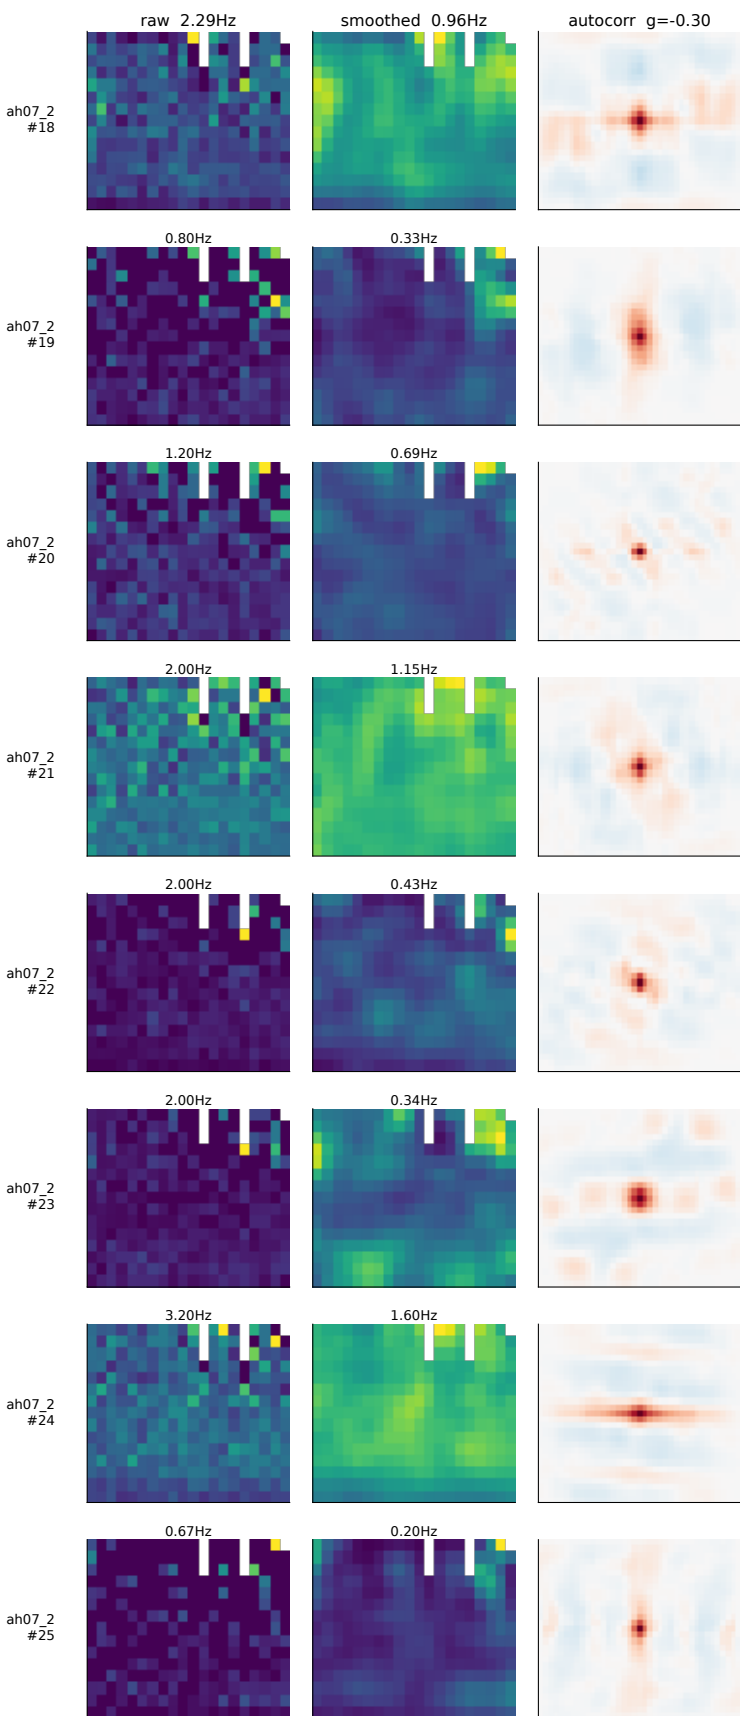


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

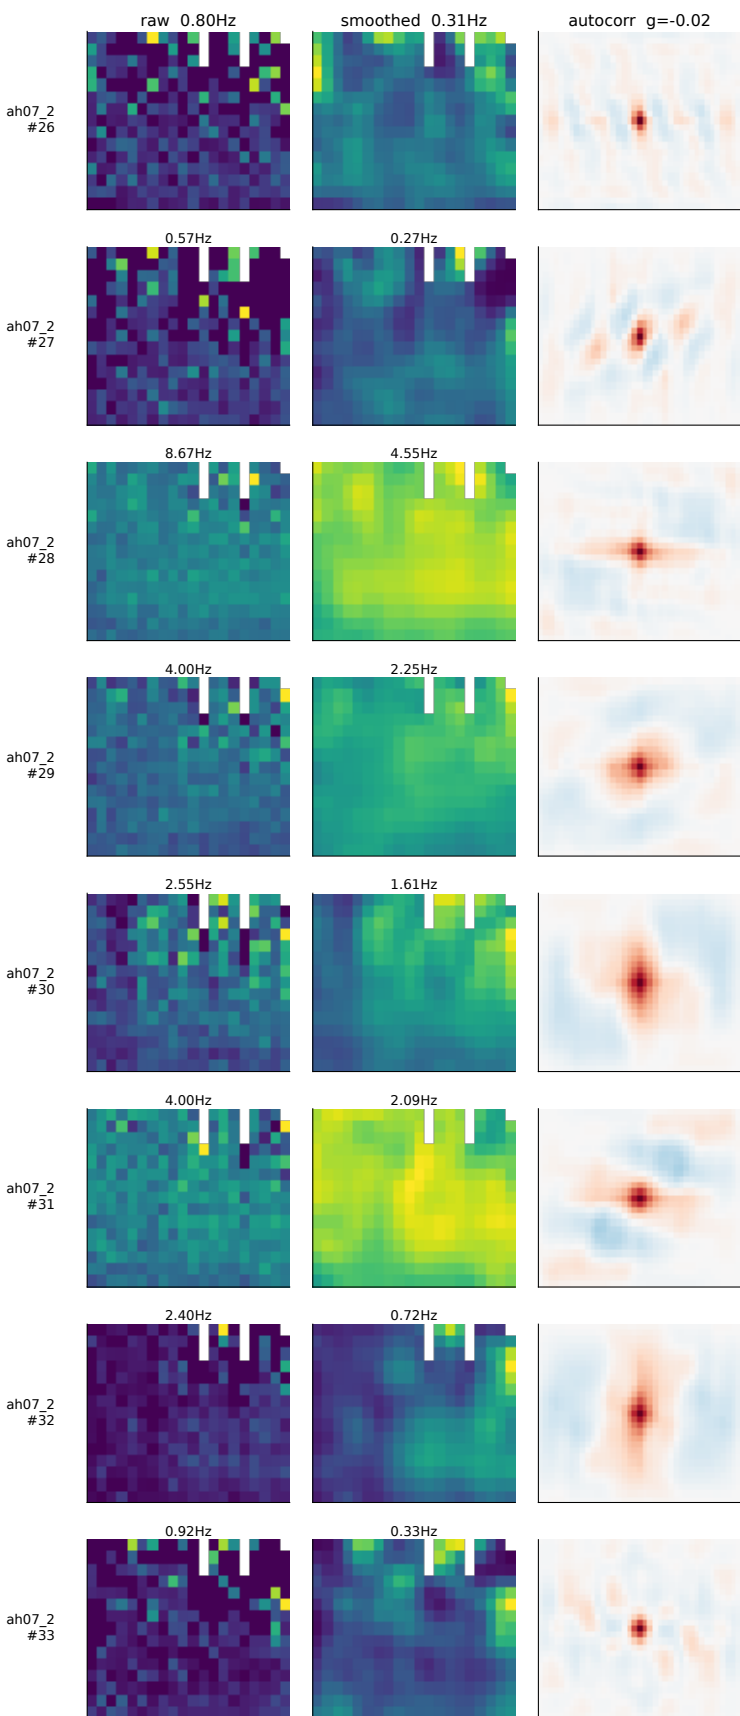


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

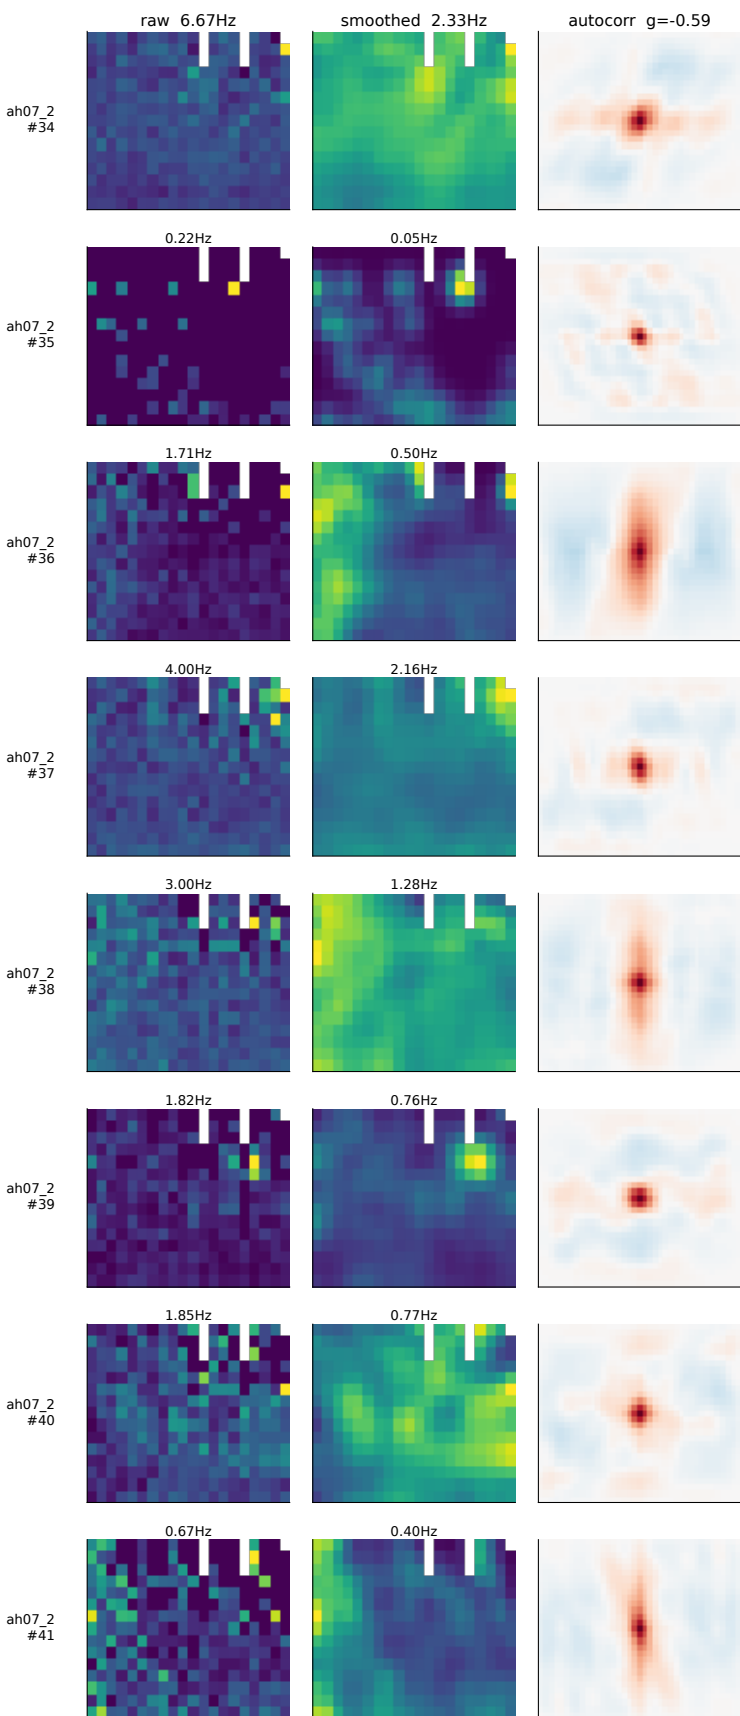


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

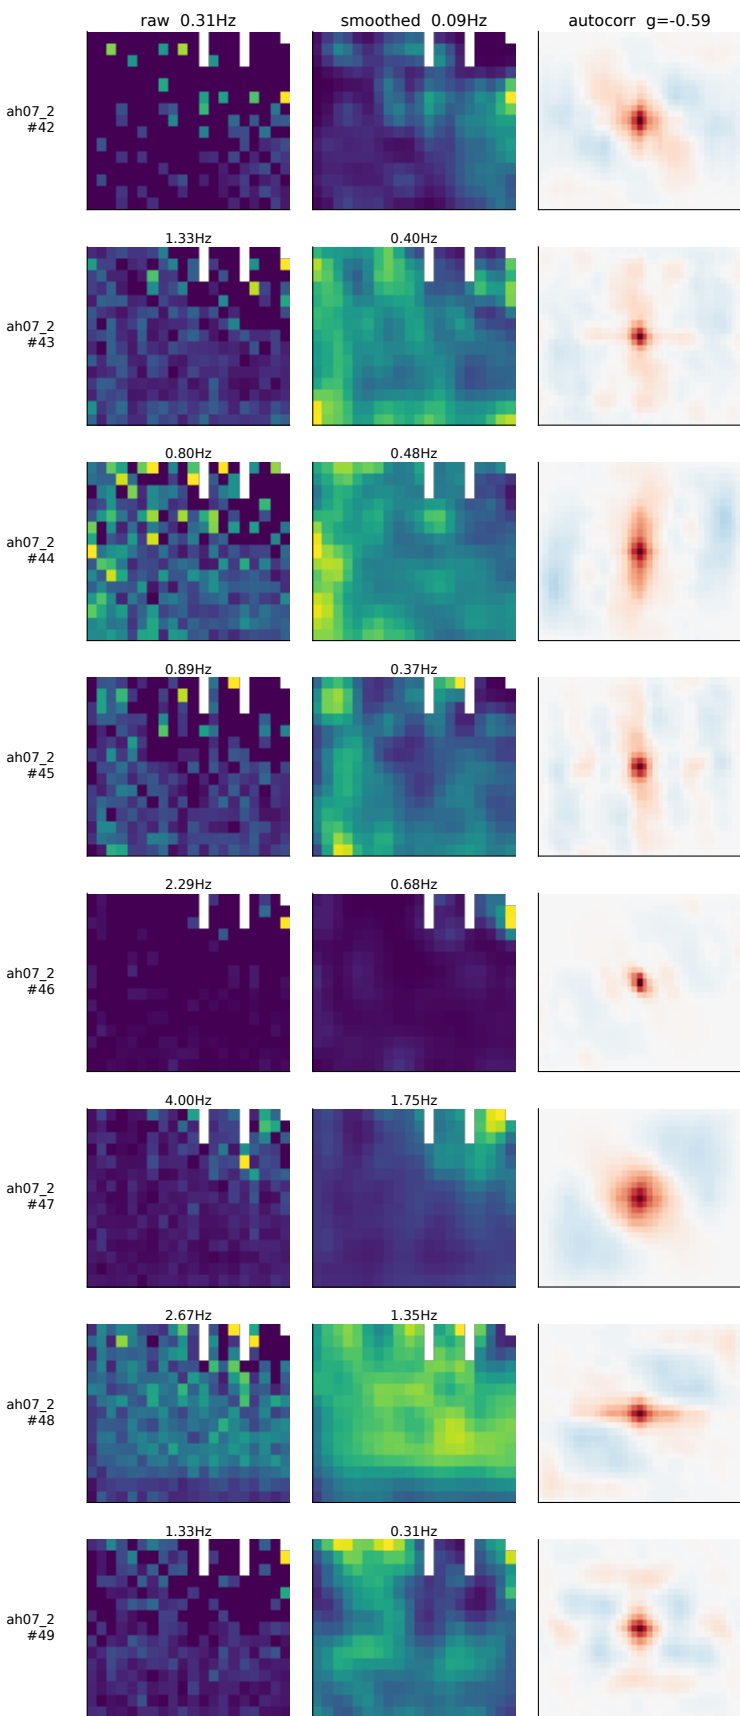


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

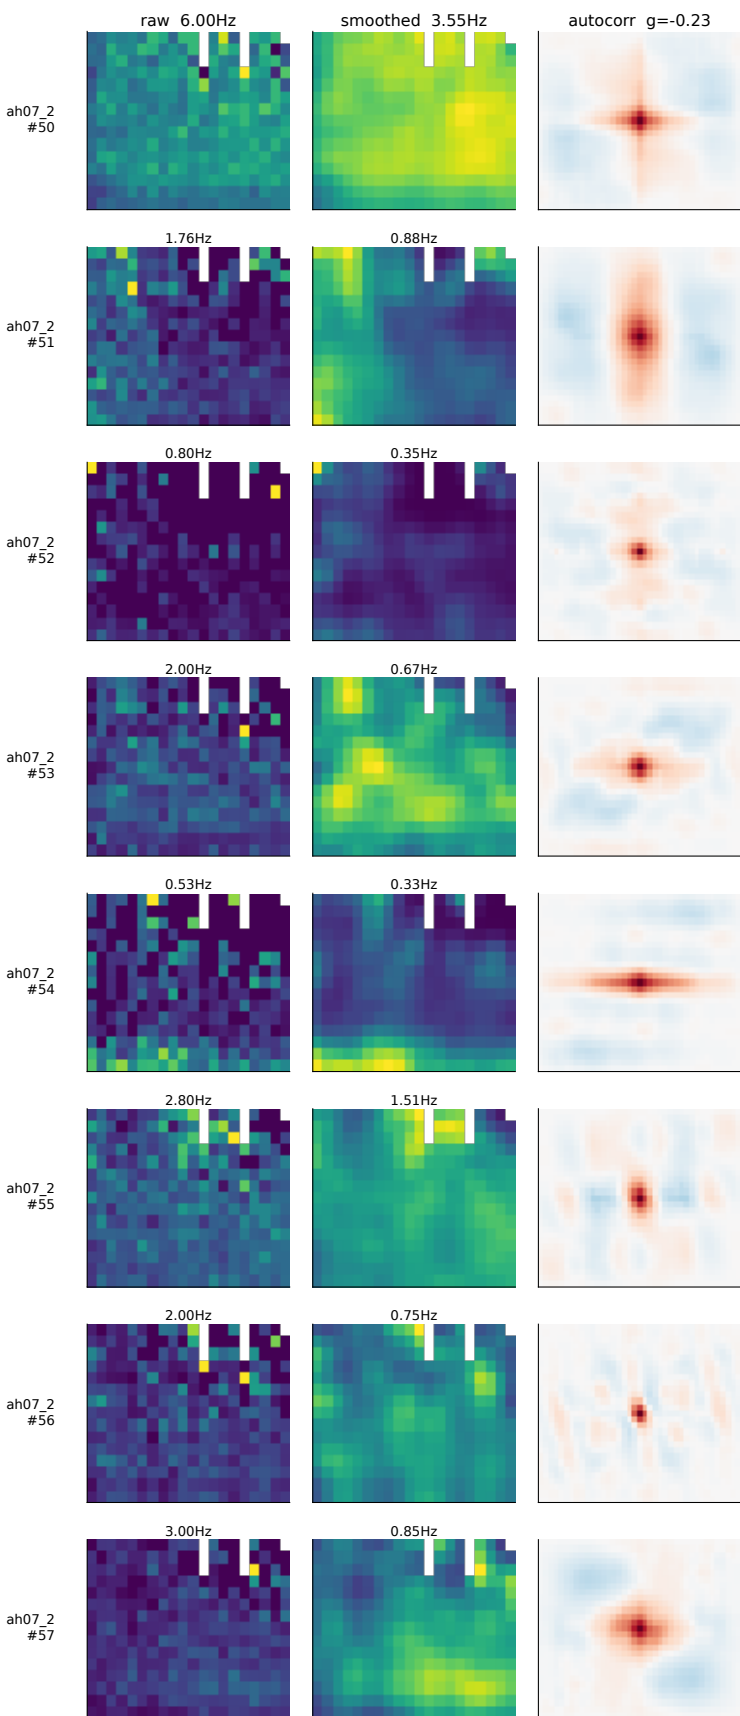

os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

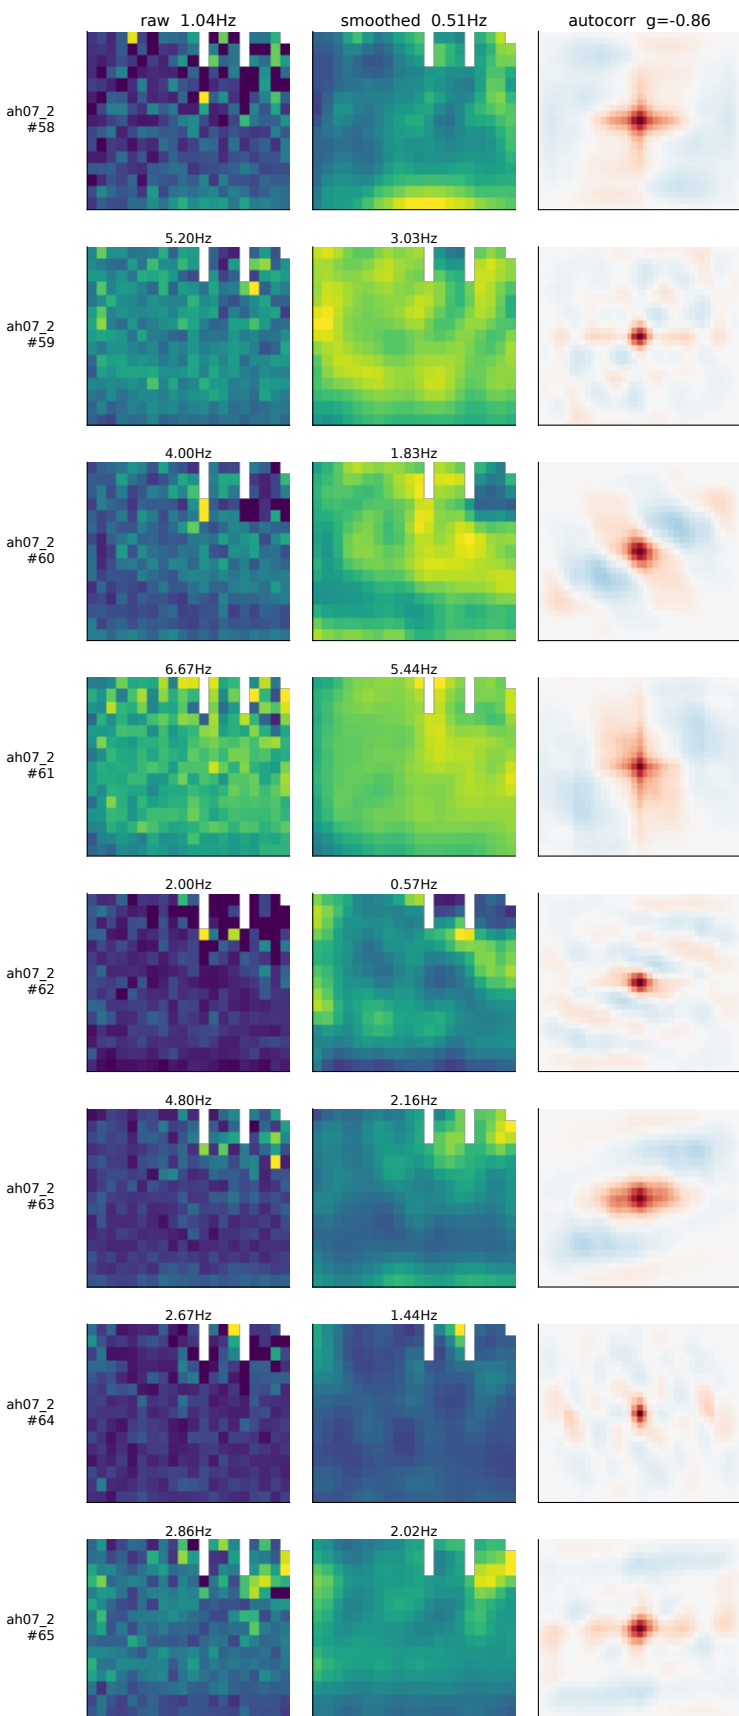


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

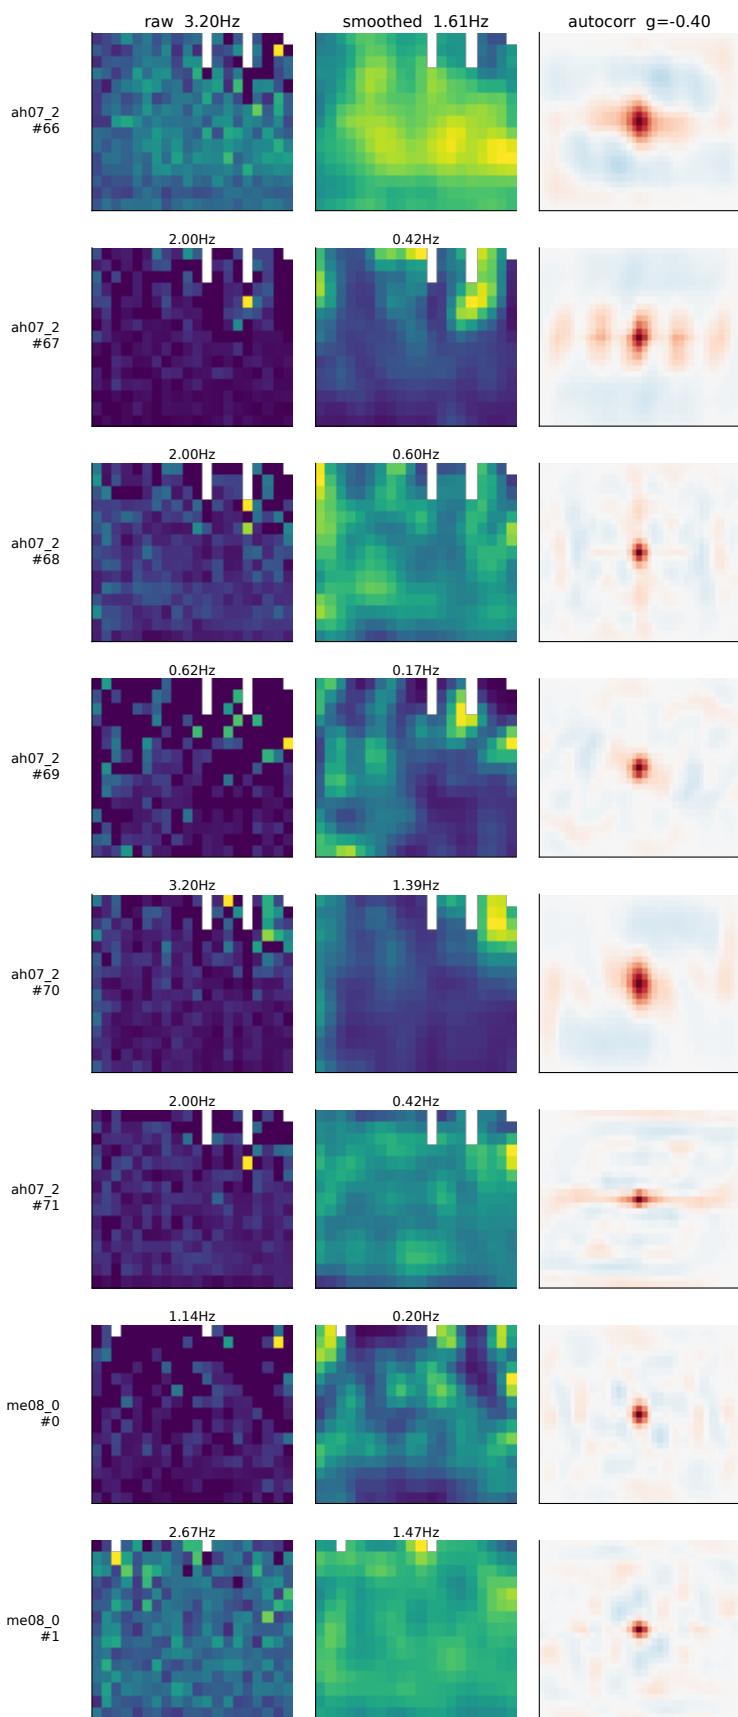





bs: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

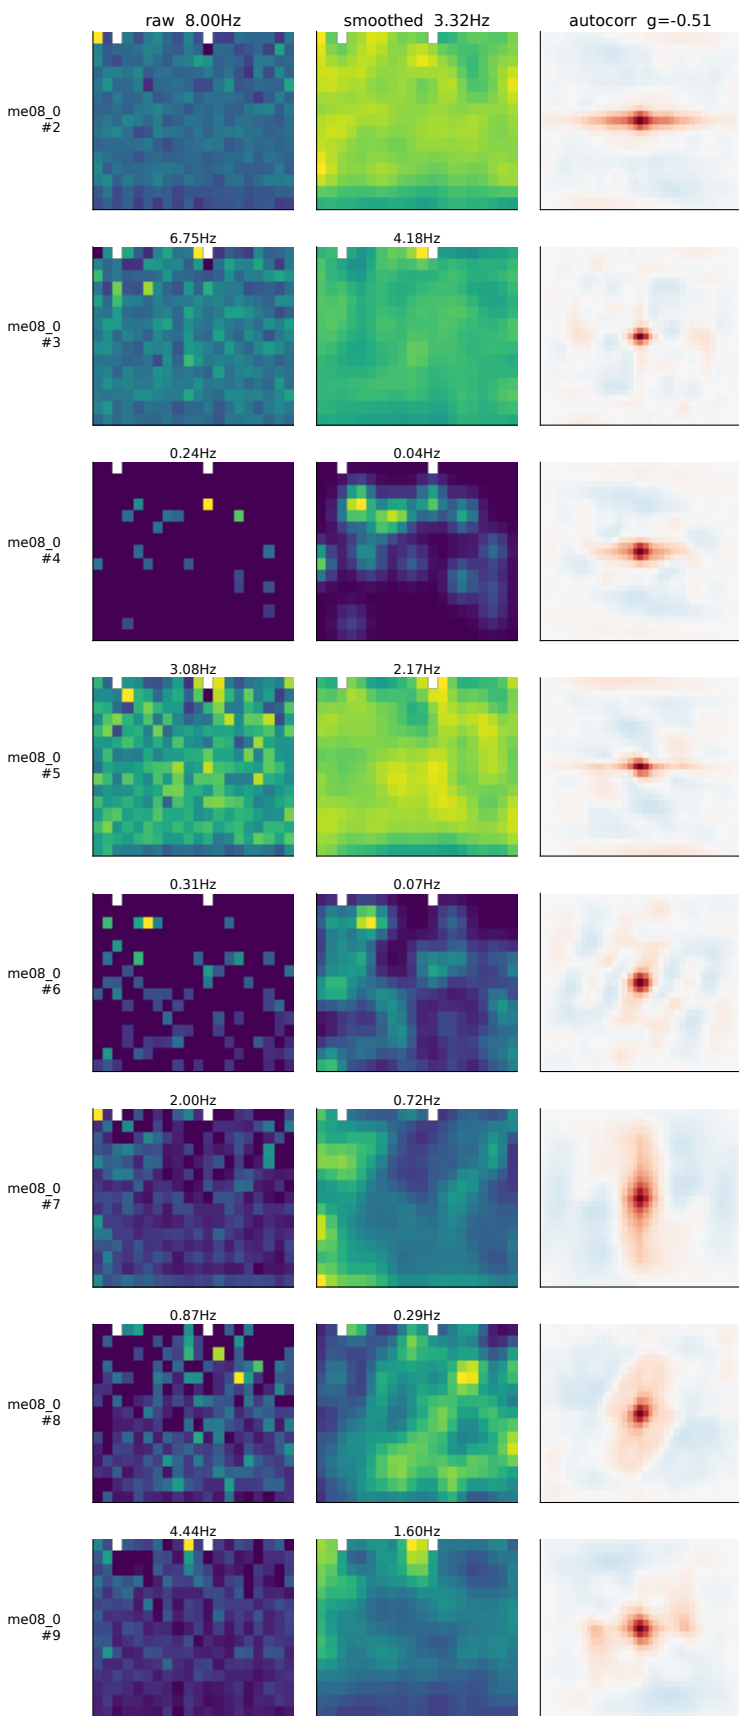


bs: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

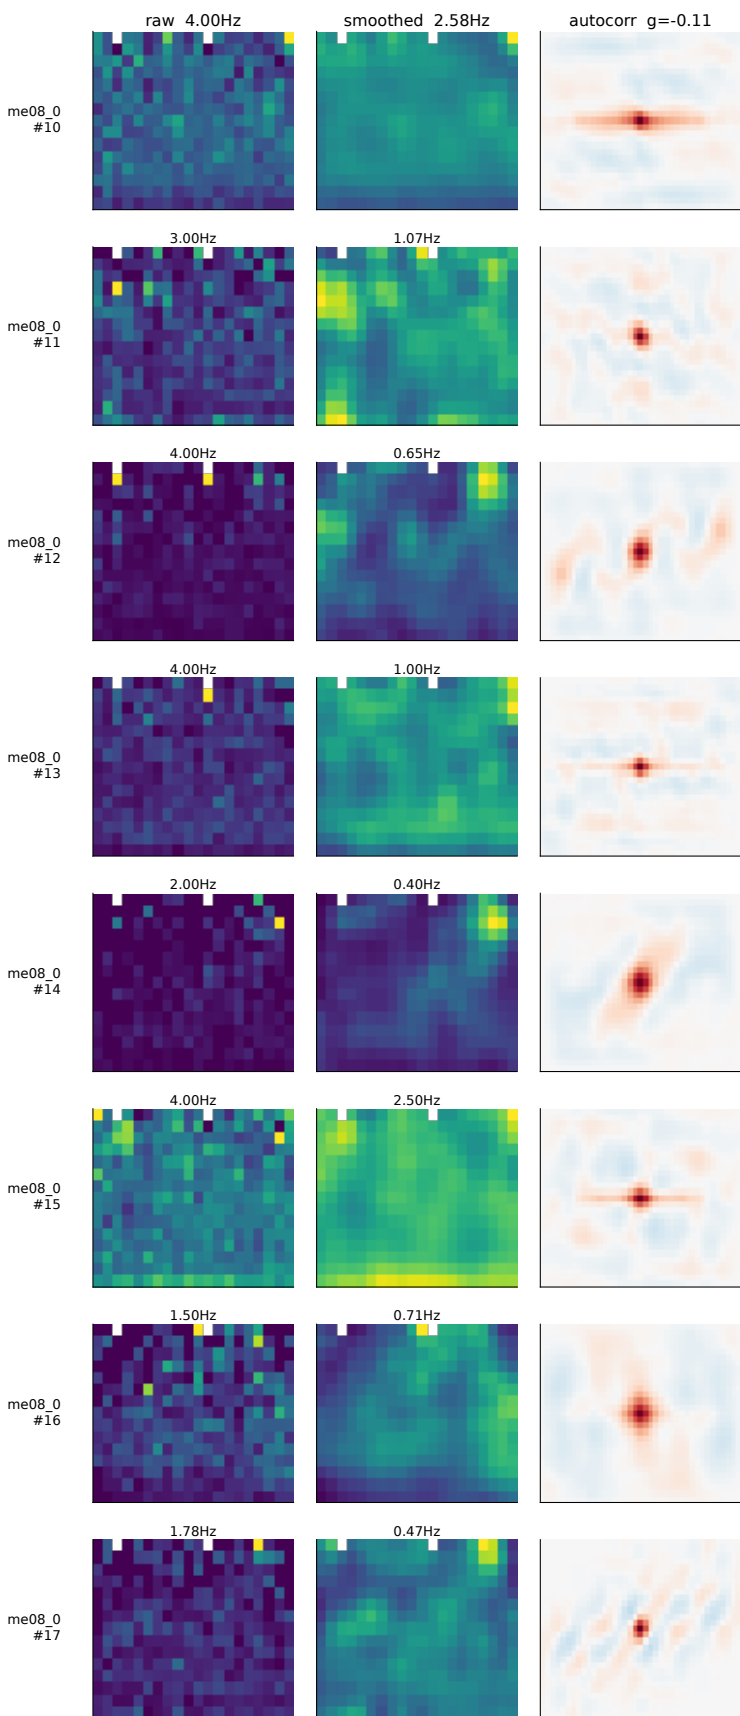


bs: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

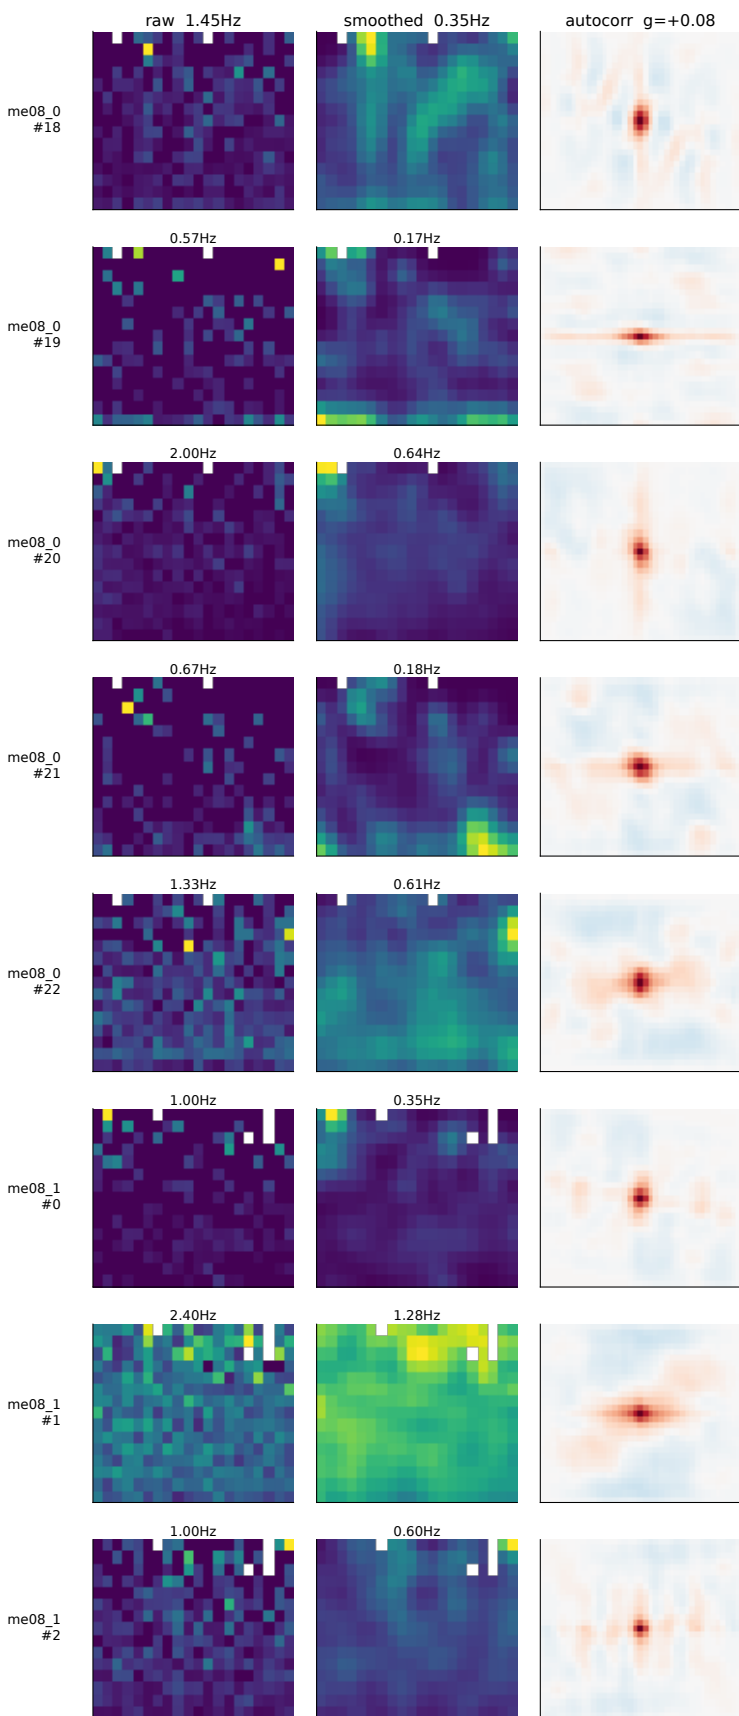


bs: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

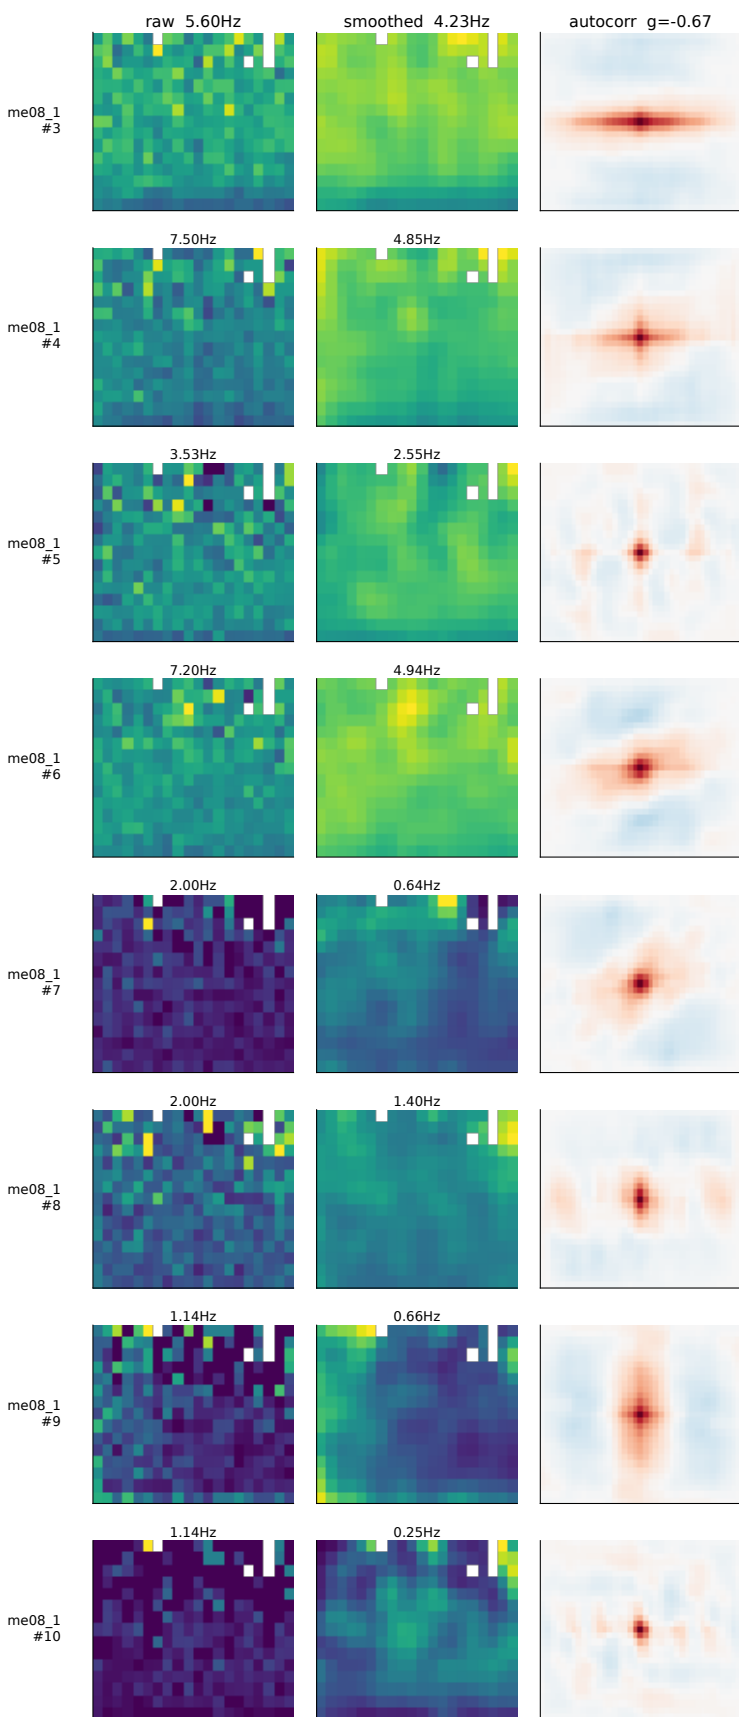


os: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 9  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

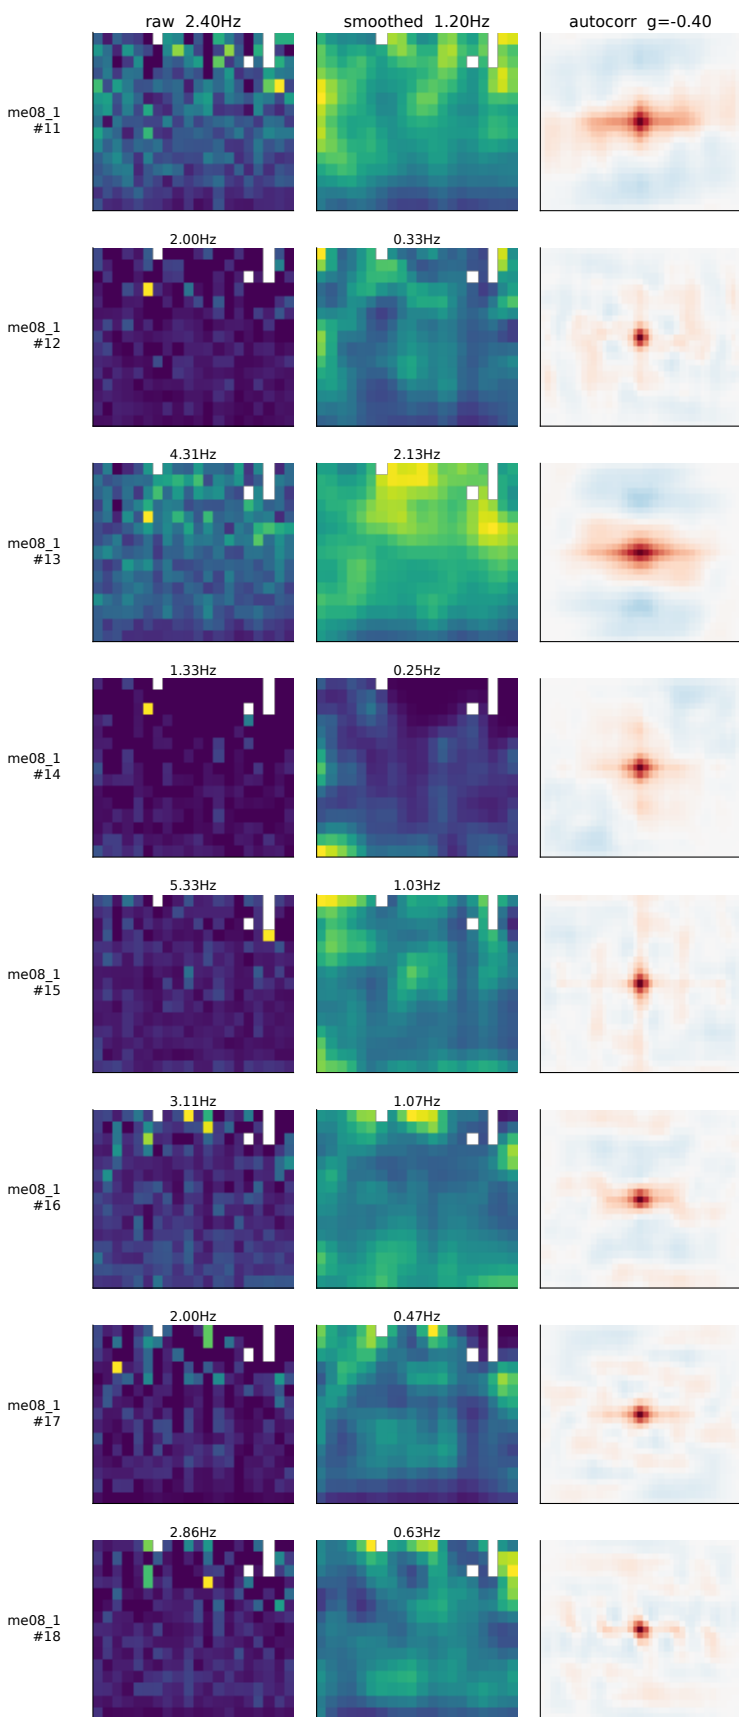


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

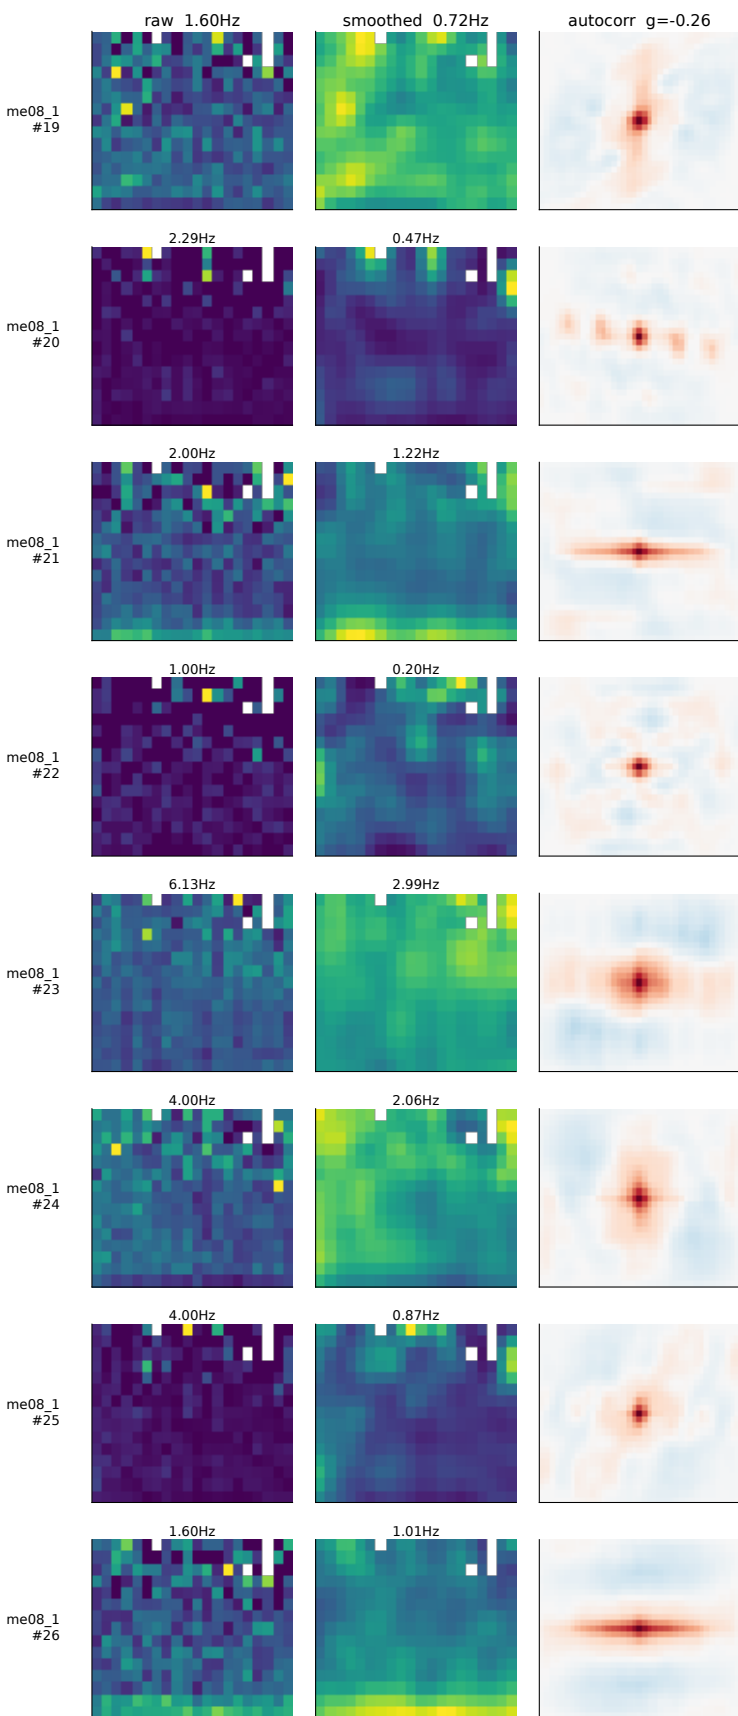

s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

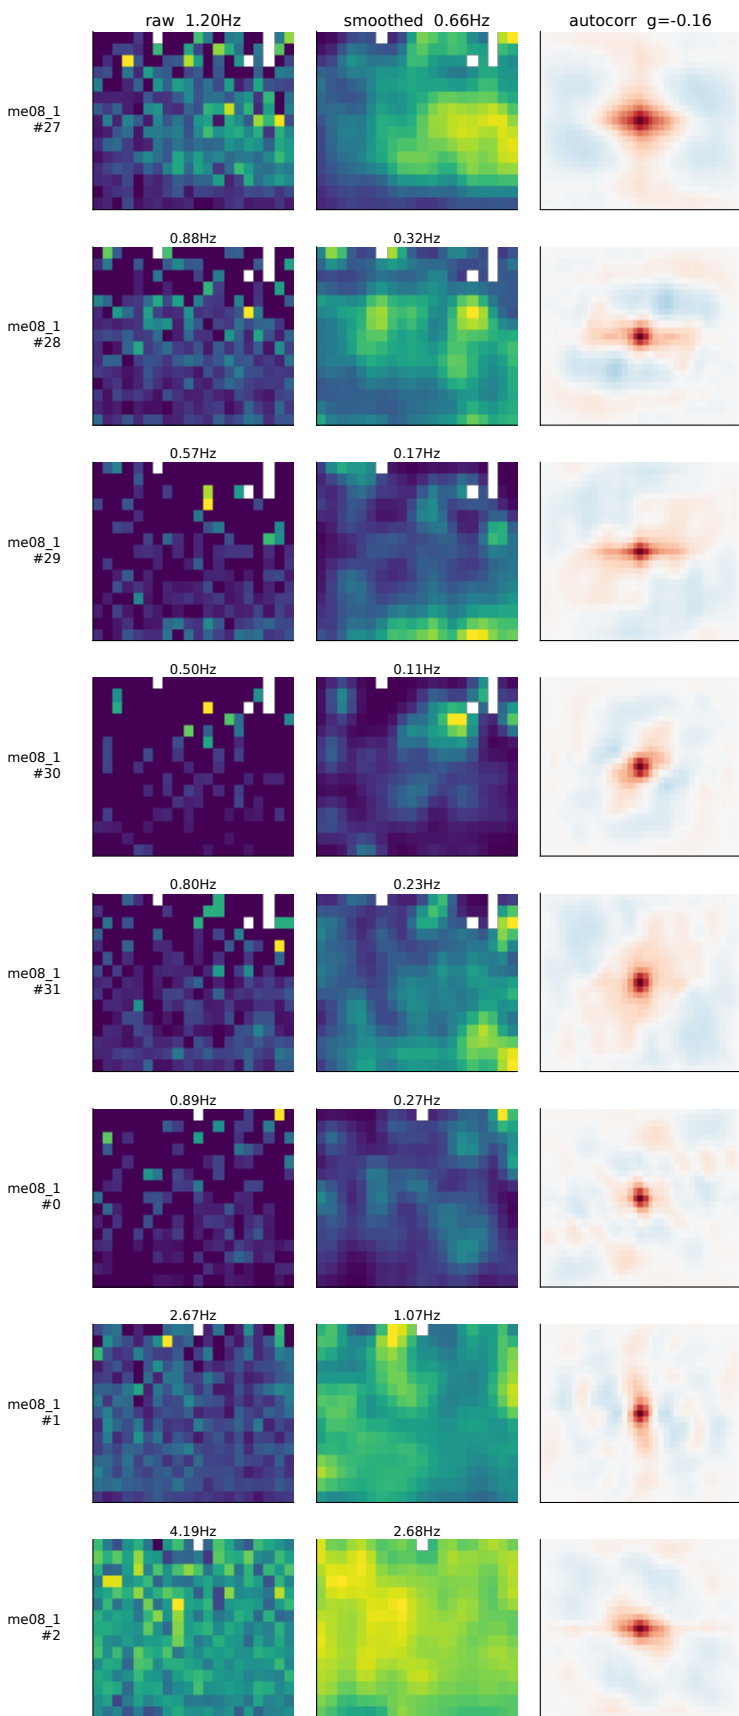


6: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

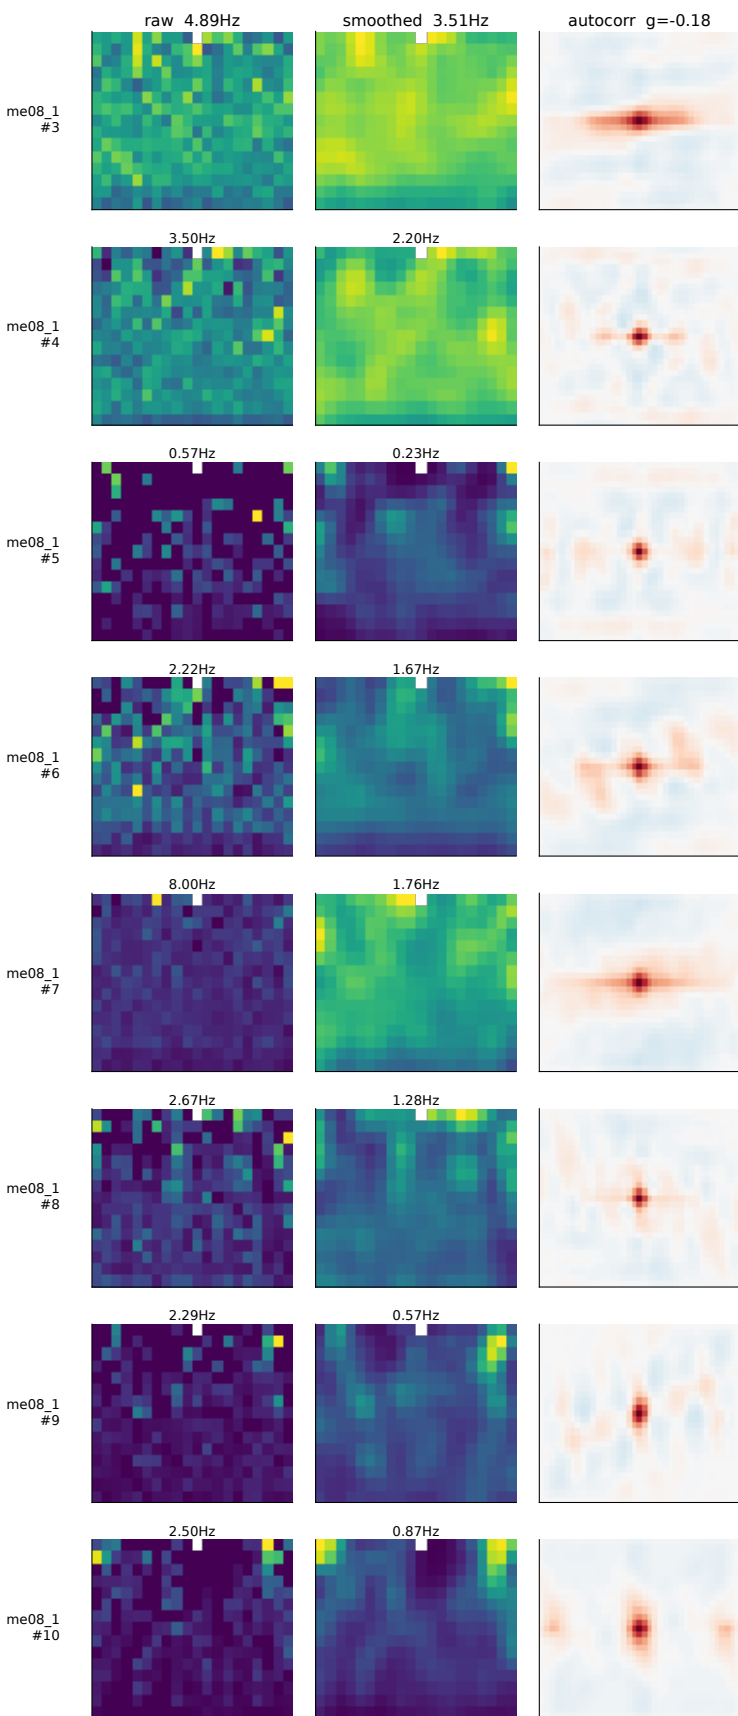





s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

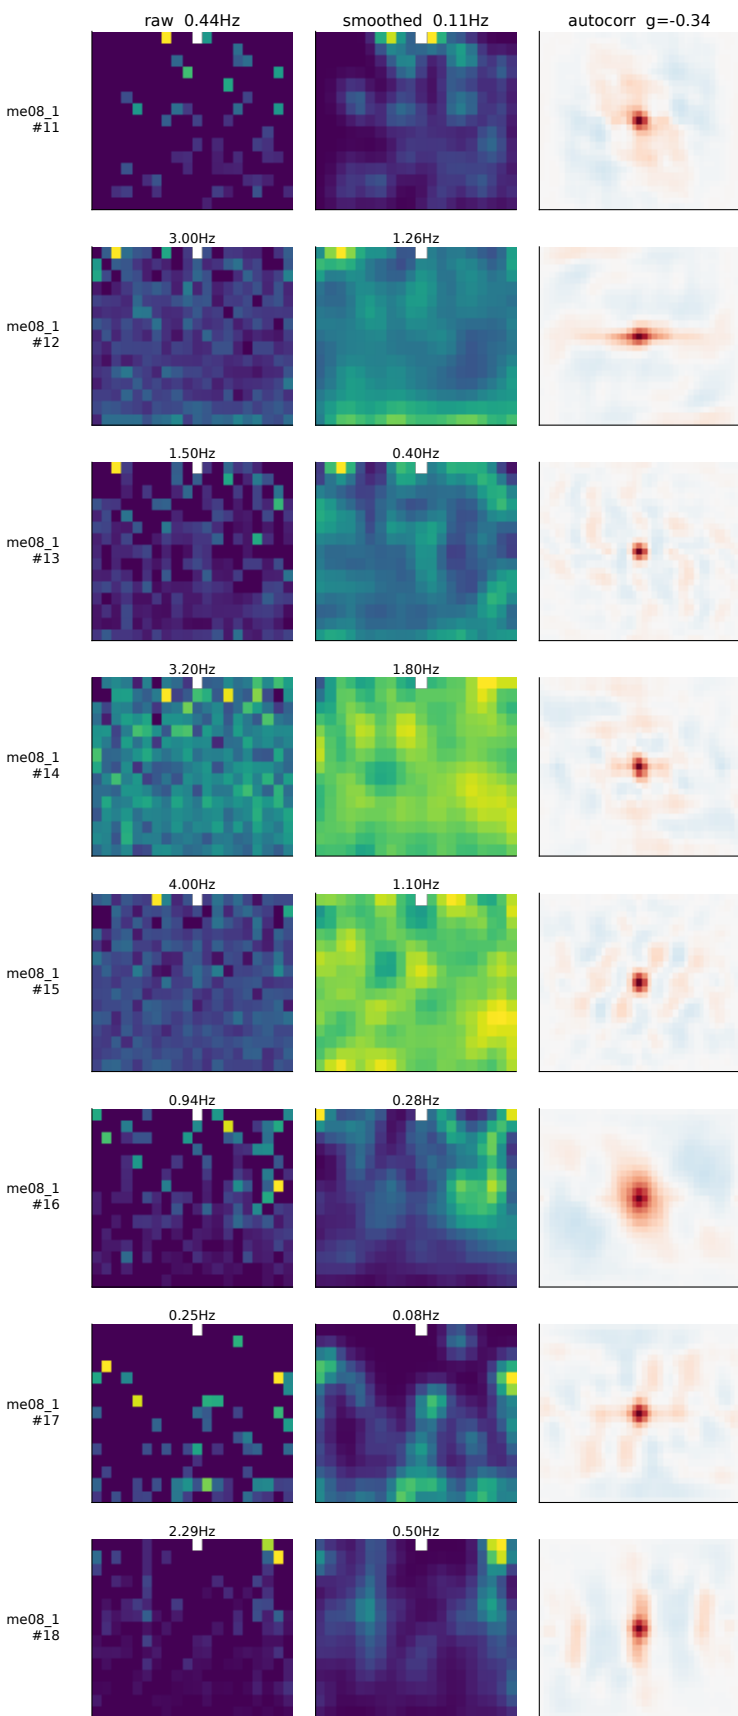


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

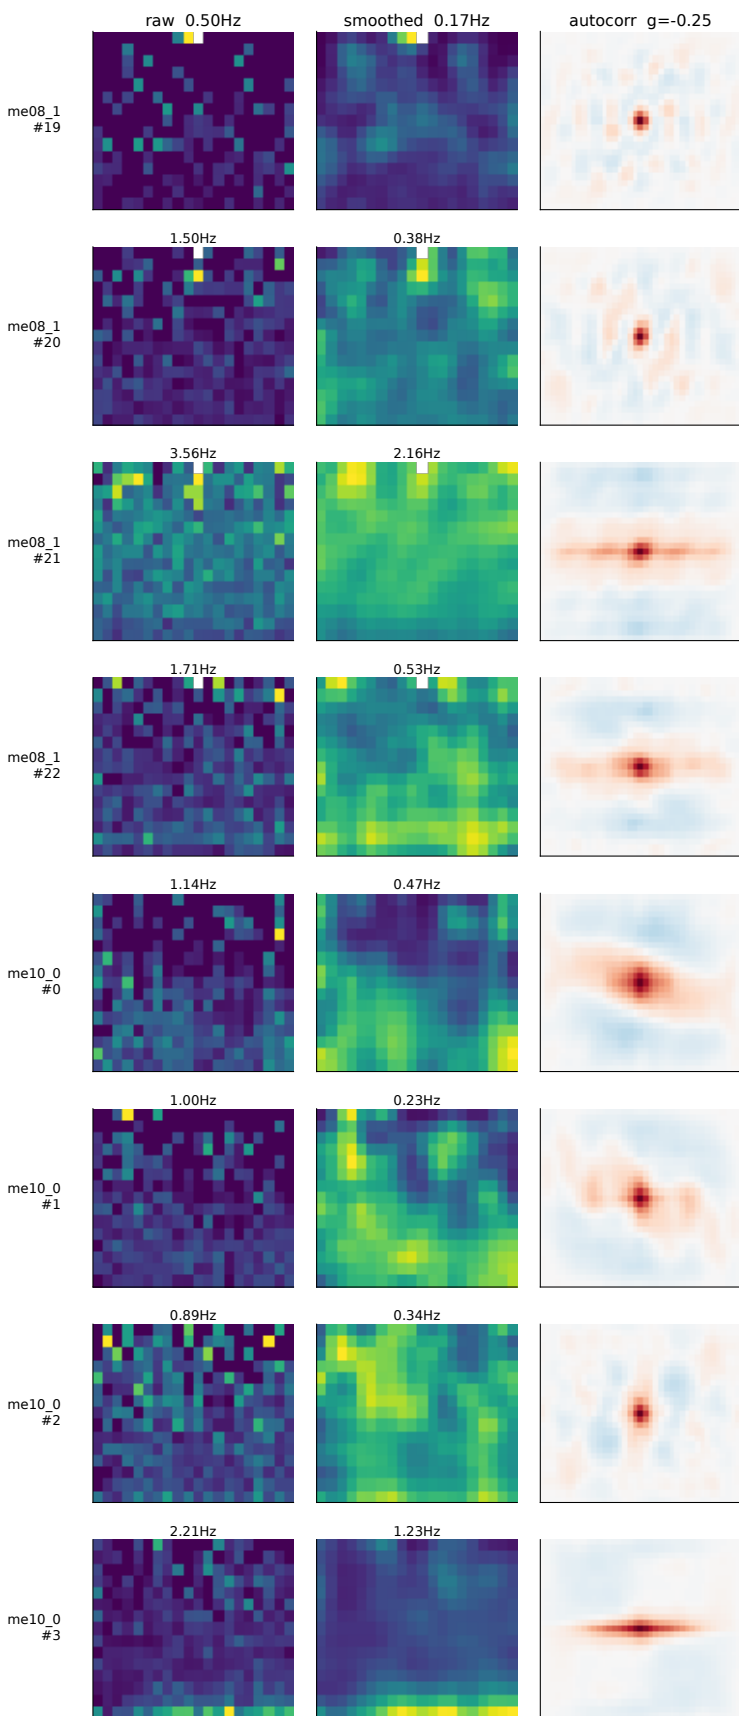


6: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

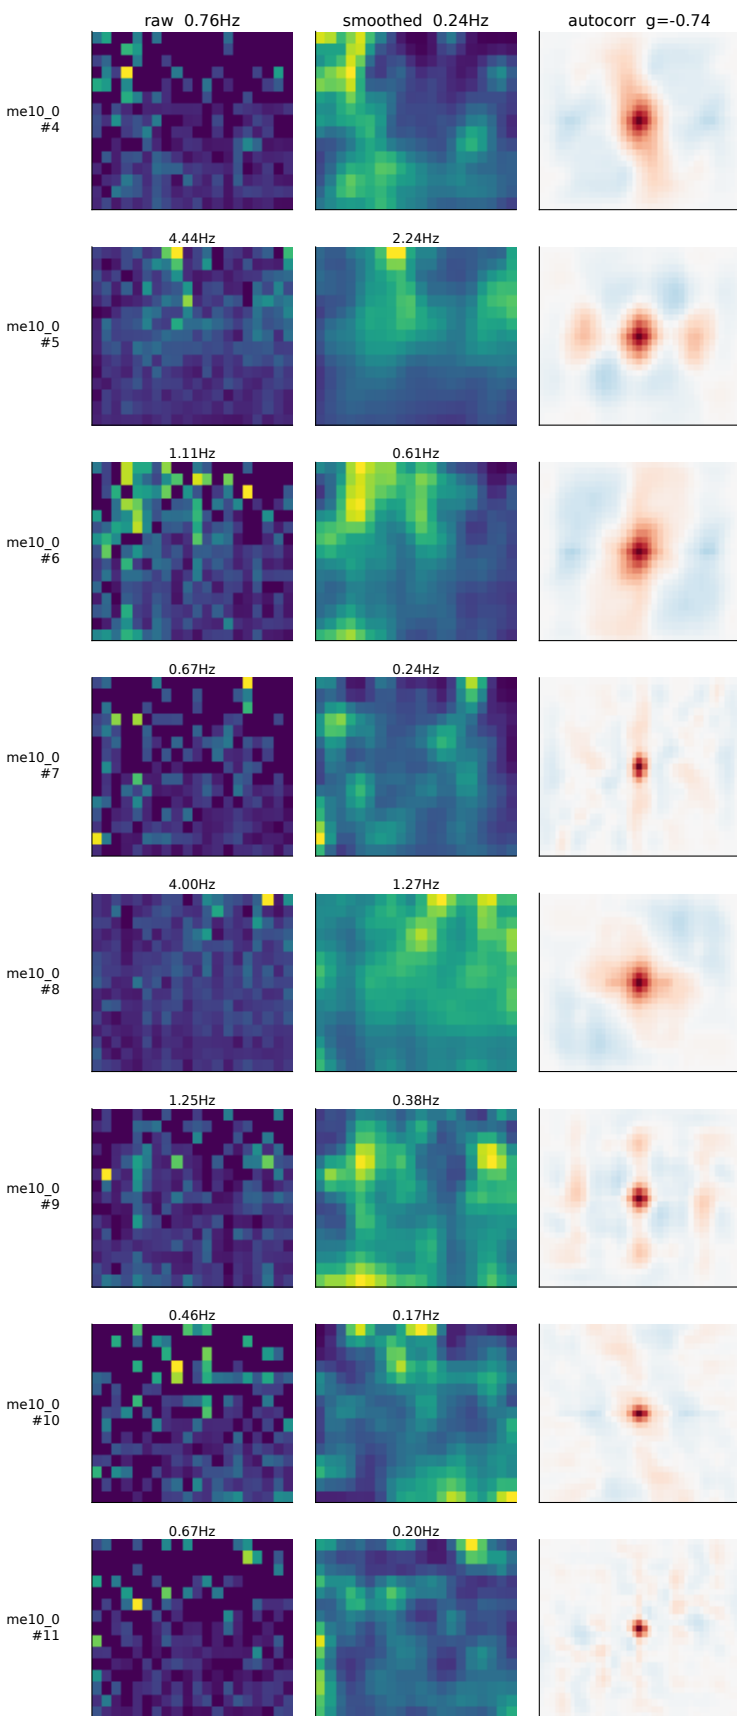


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

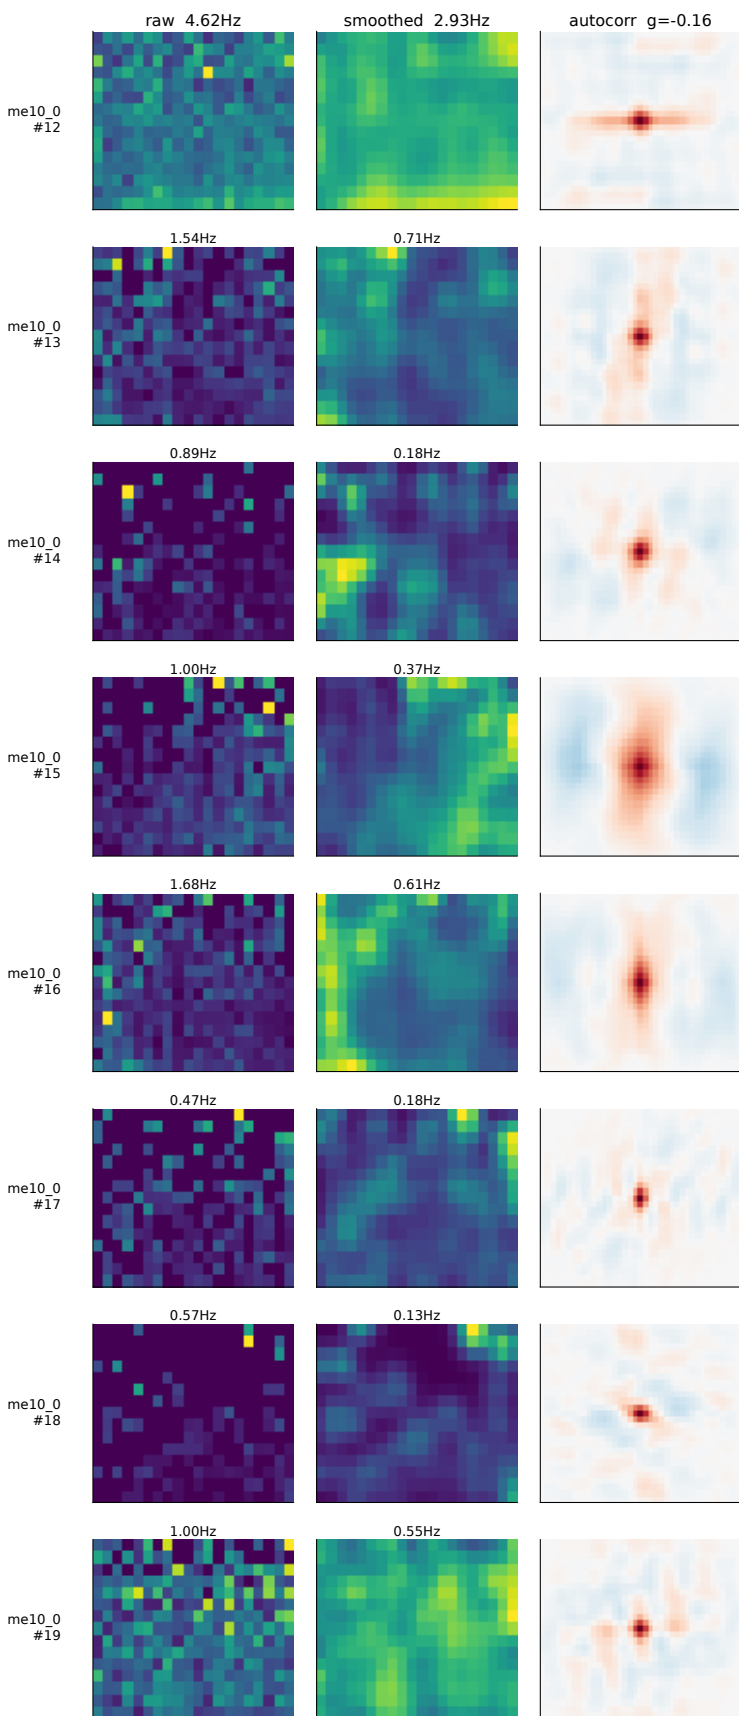


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

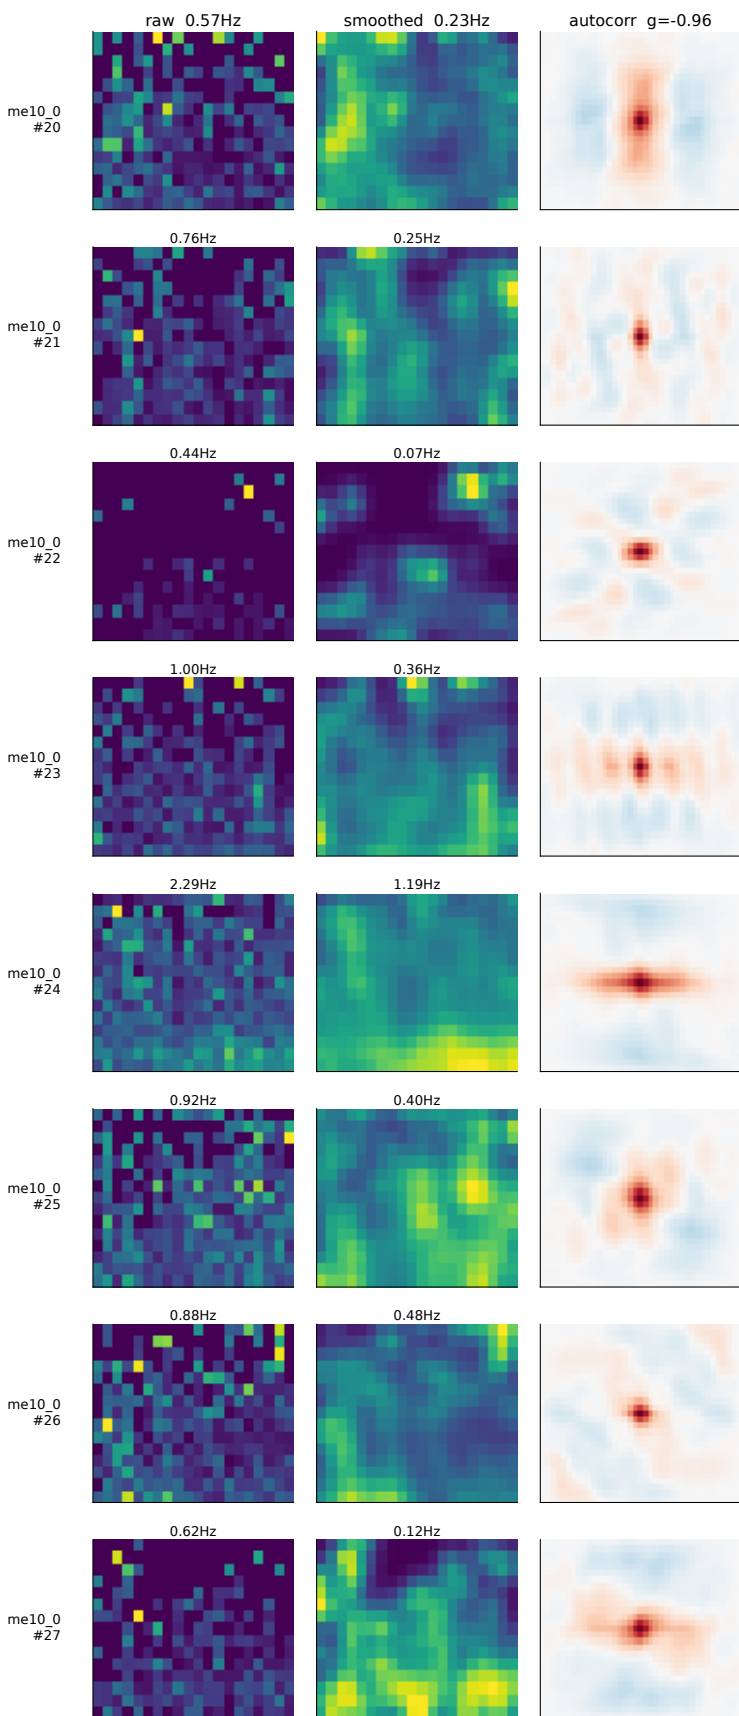


6: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

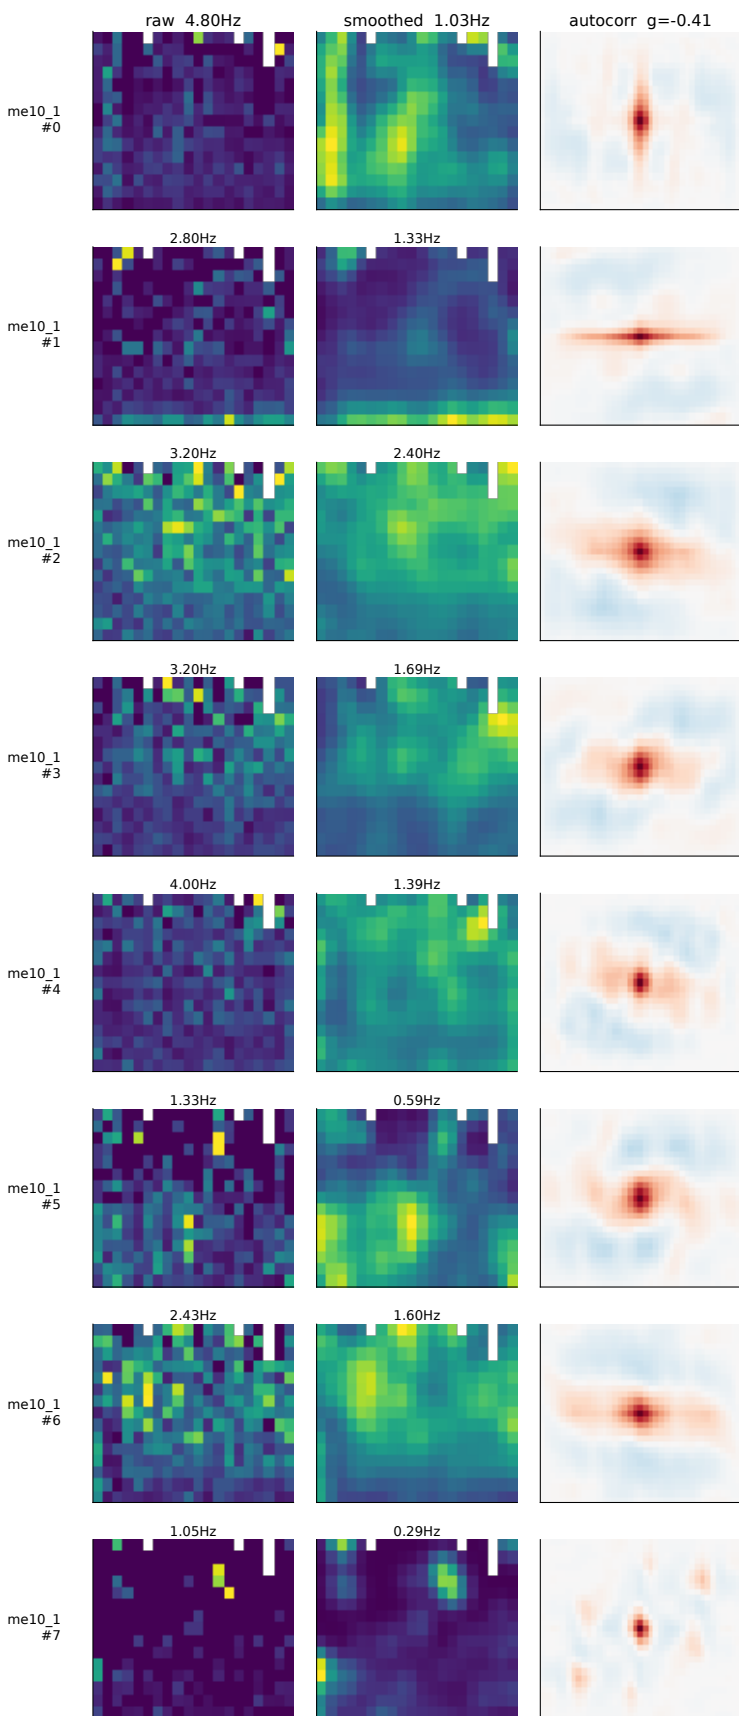

s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

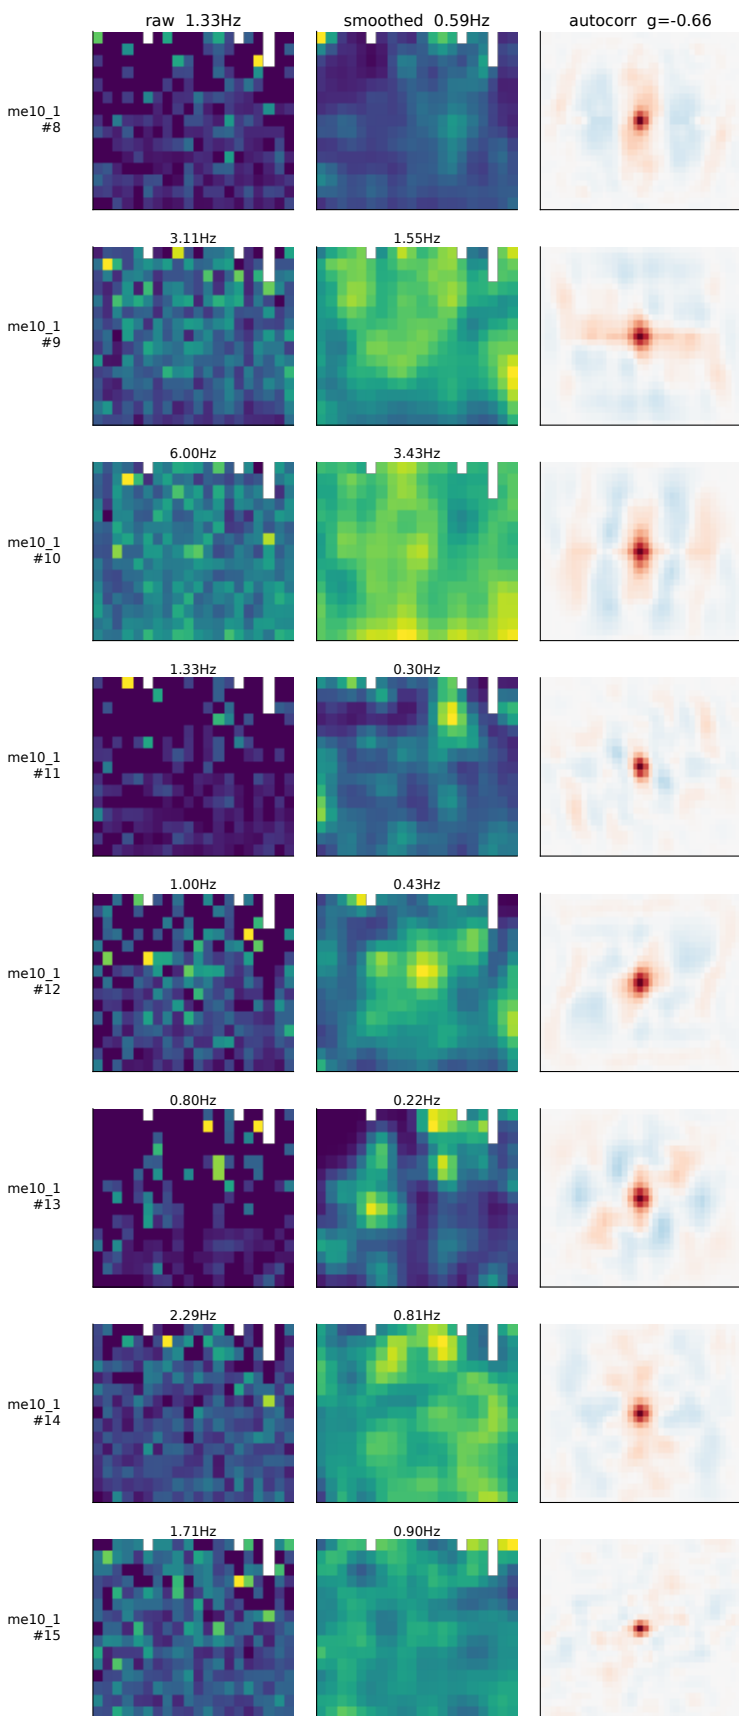


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

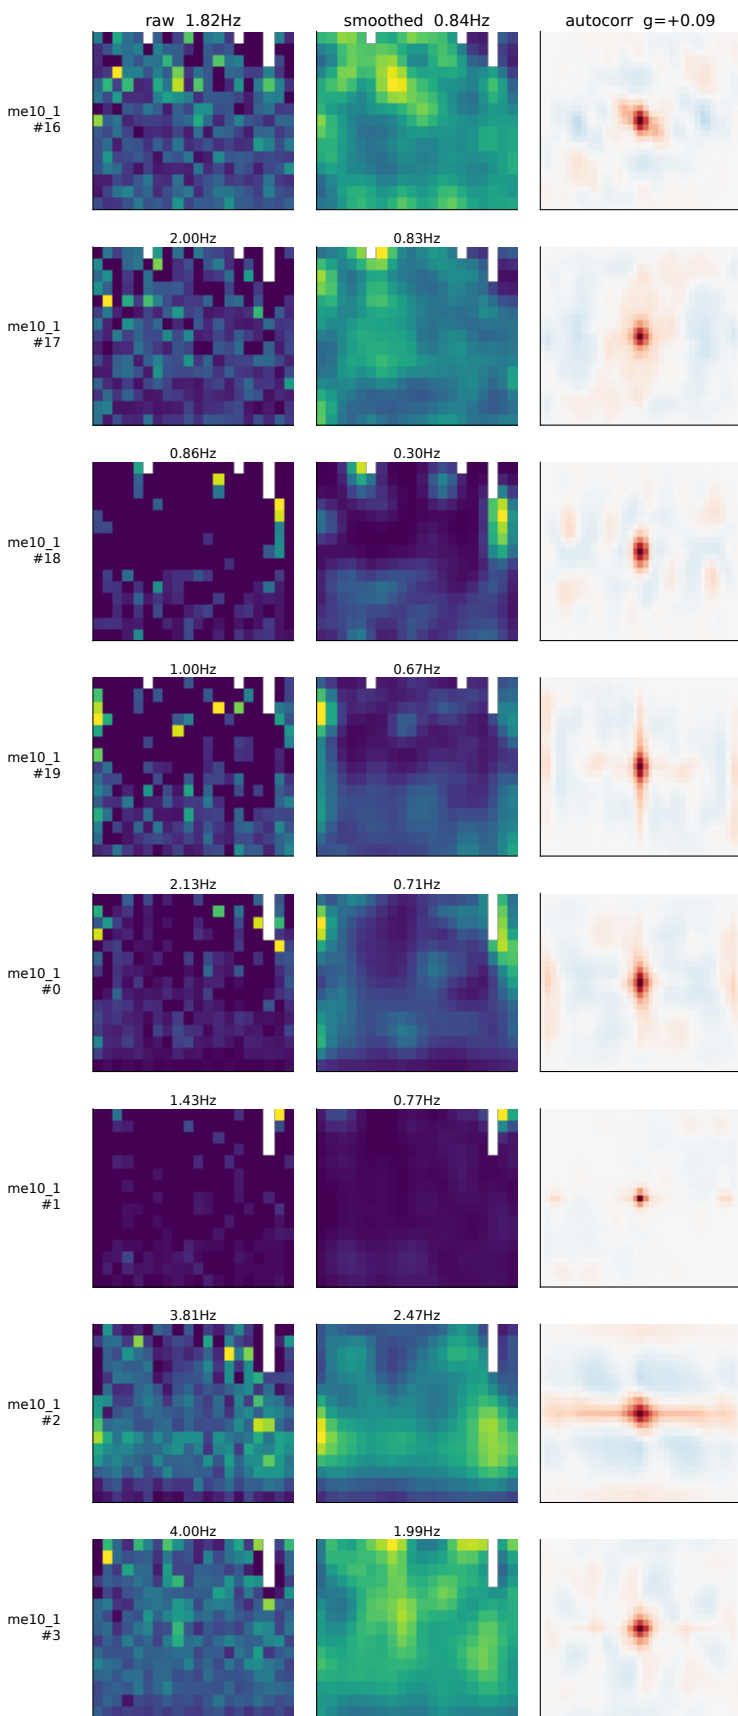





s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

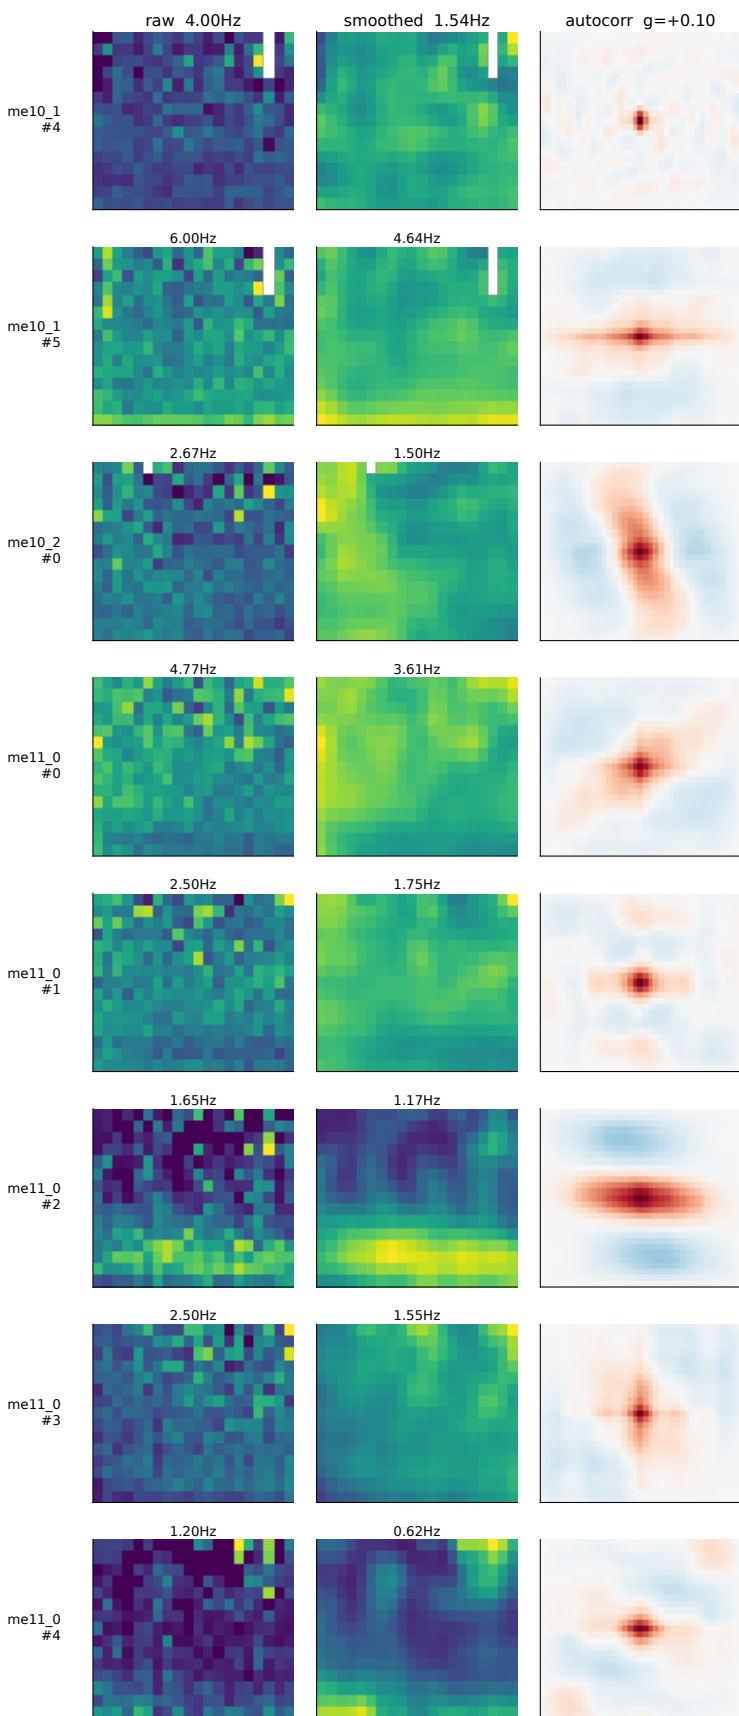


6: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 10  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

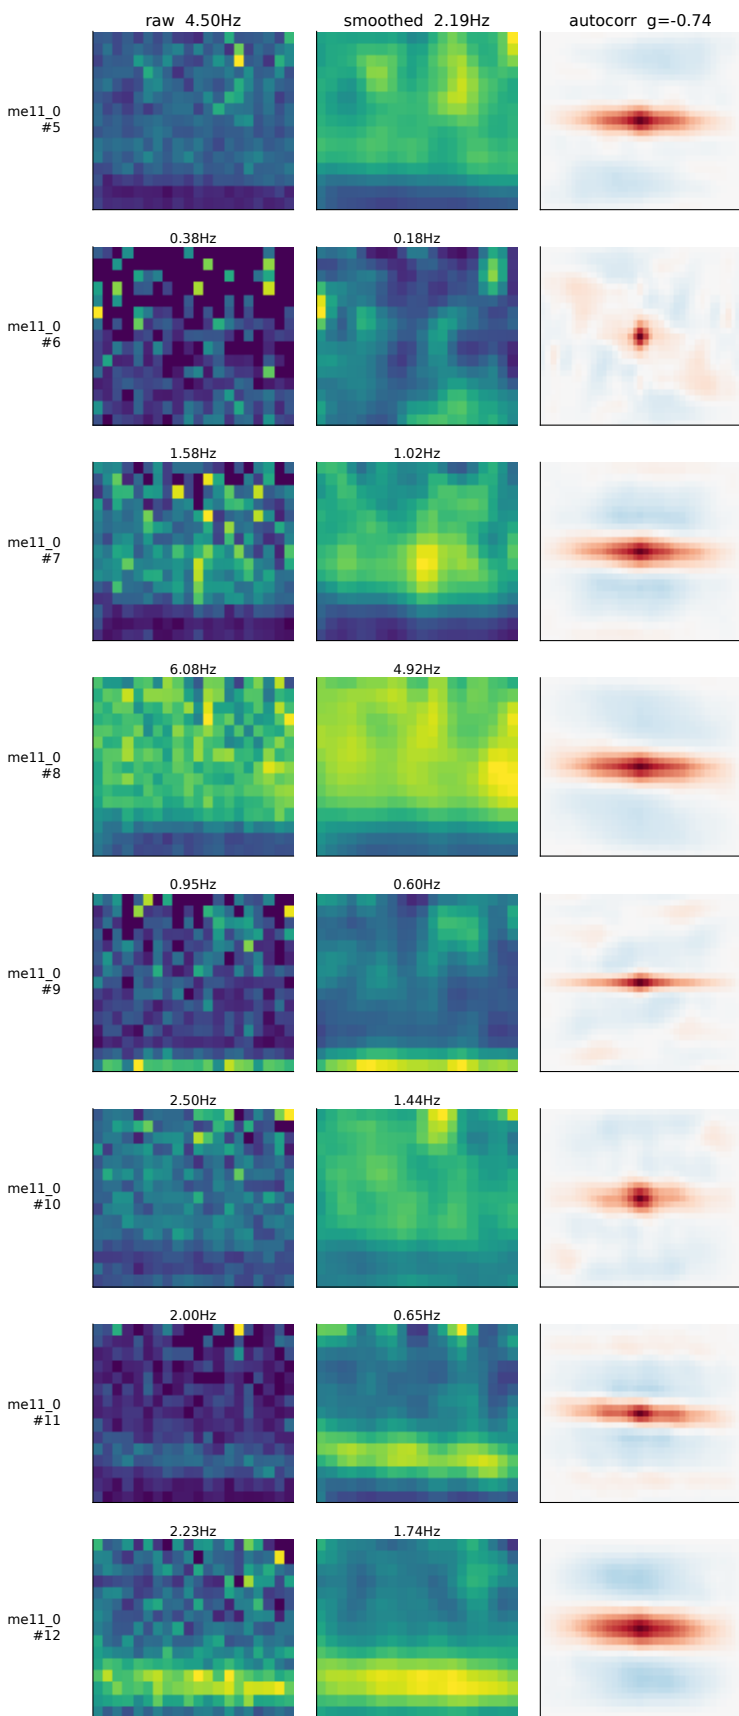


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

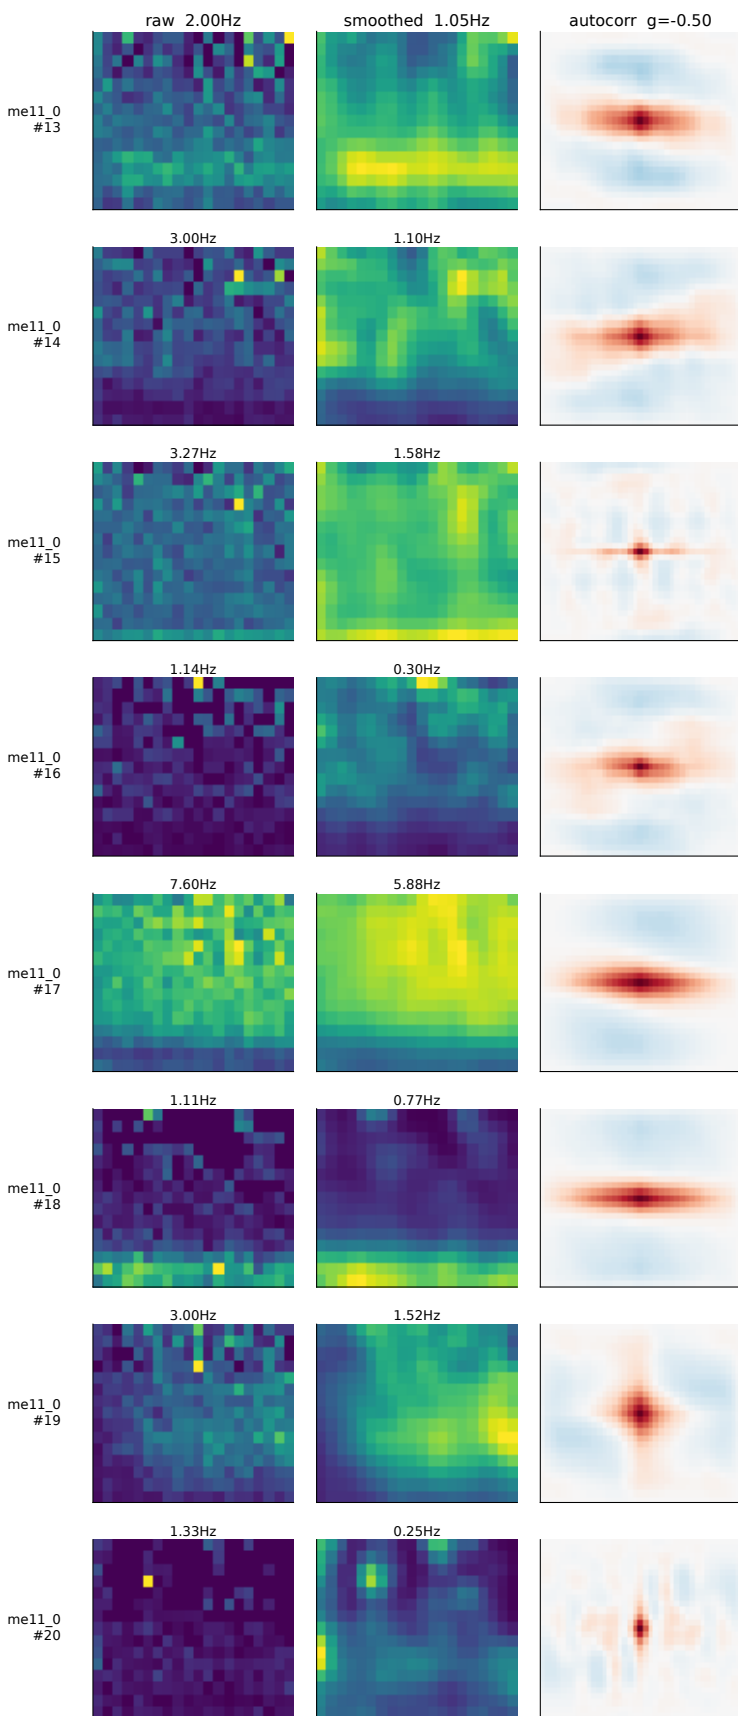


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

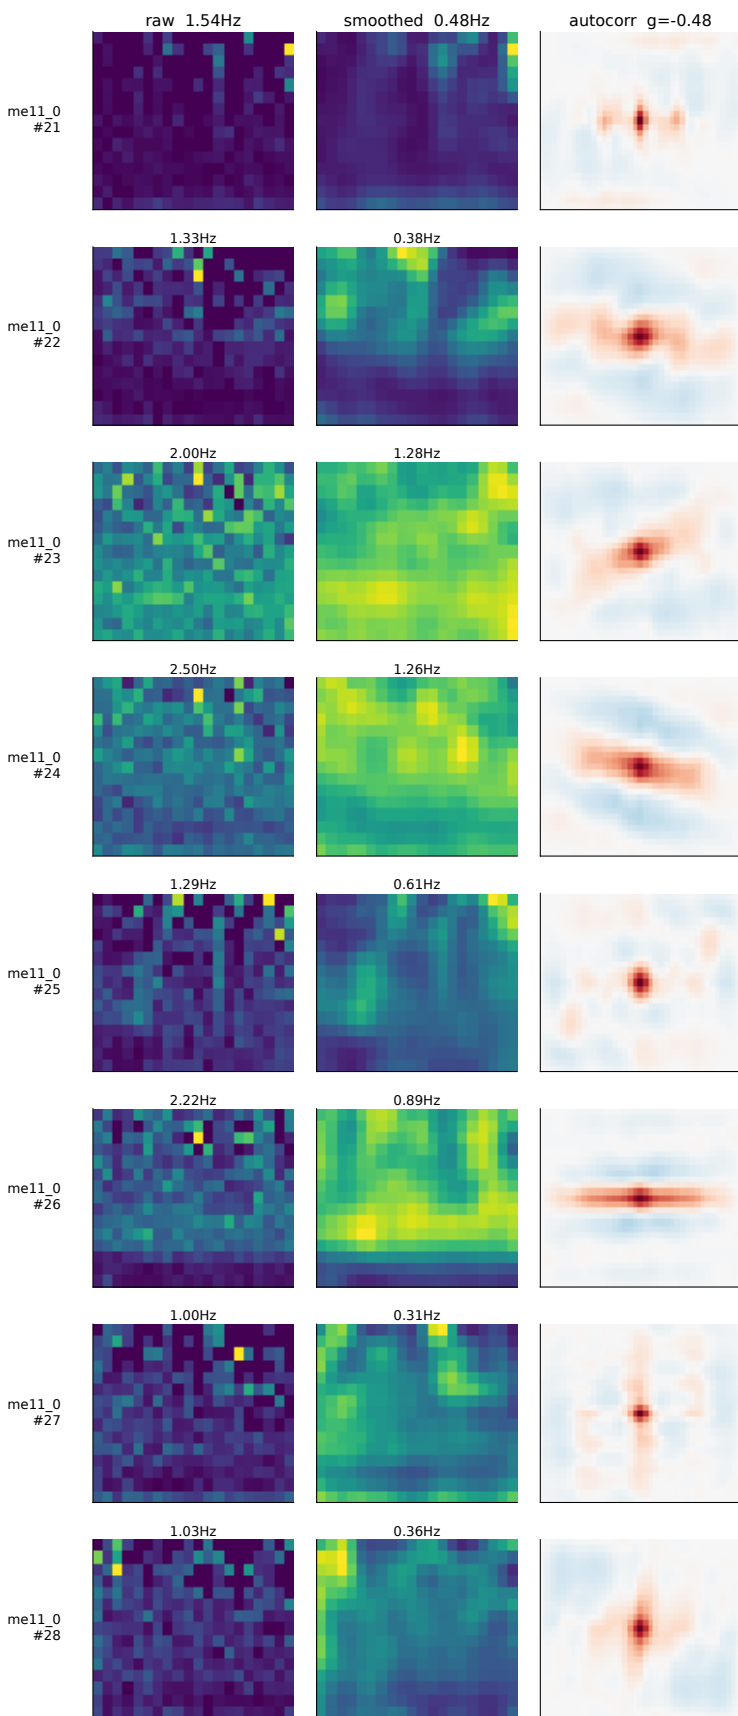


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

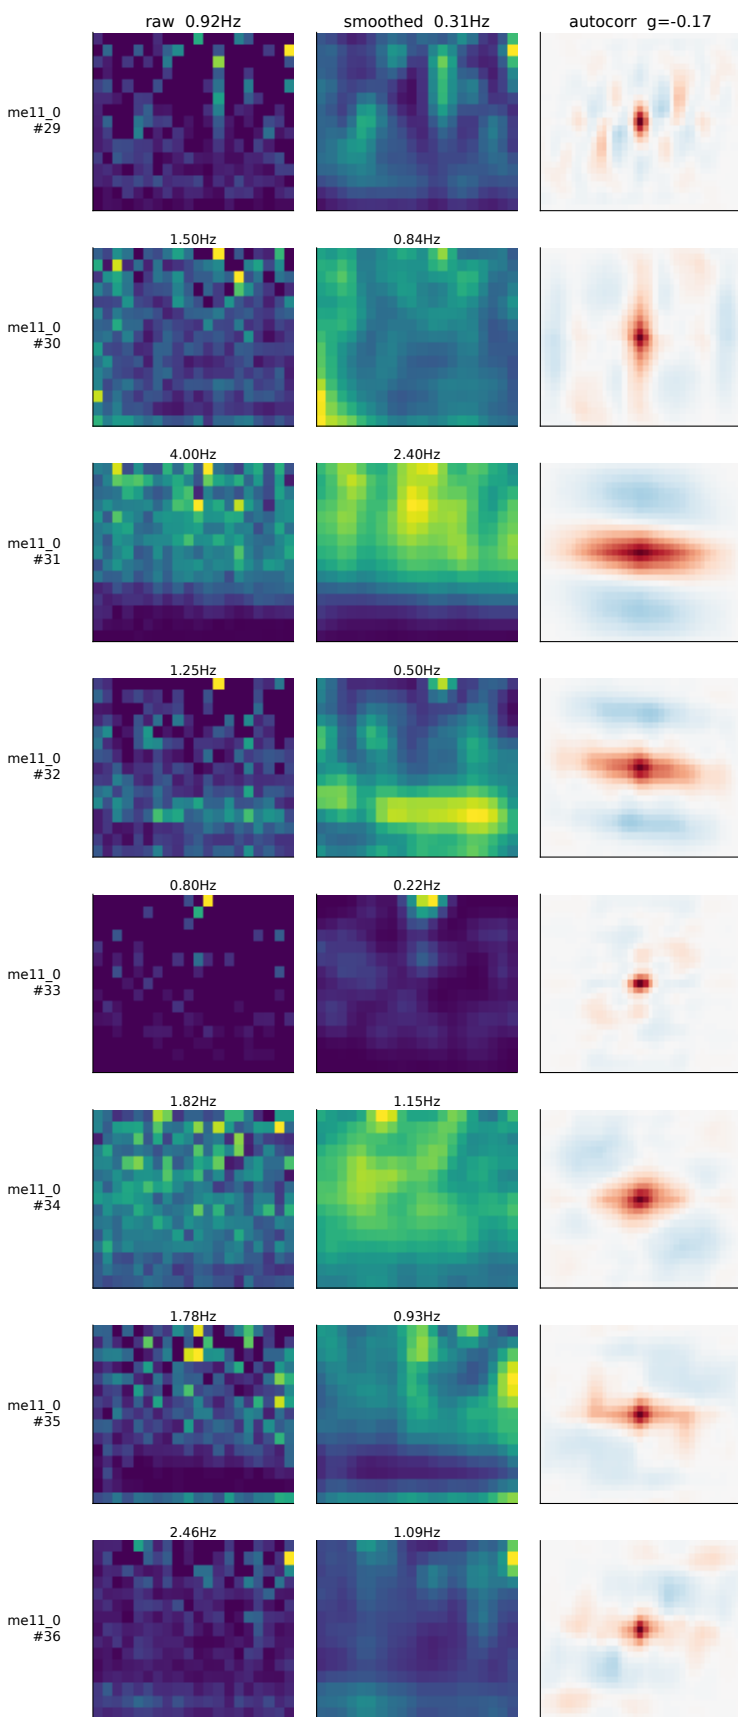


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

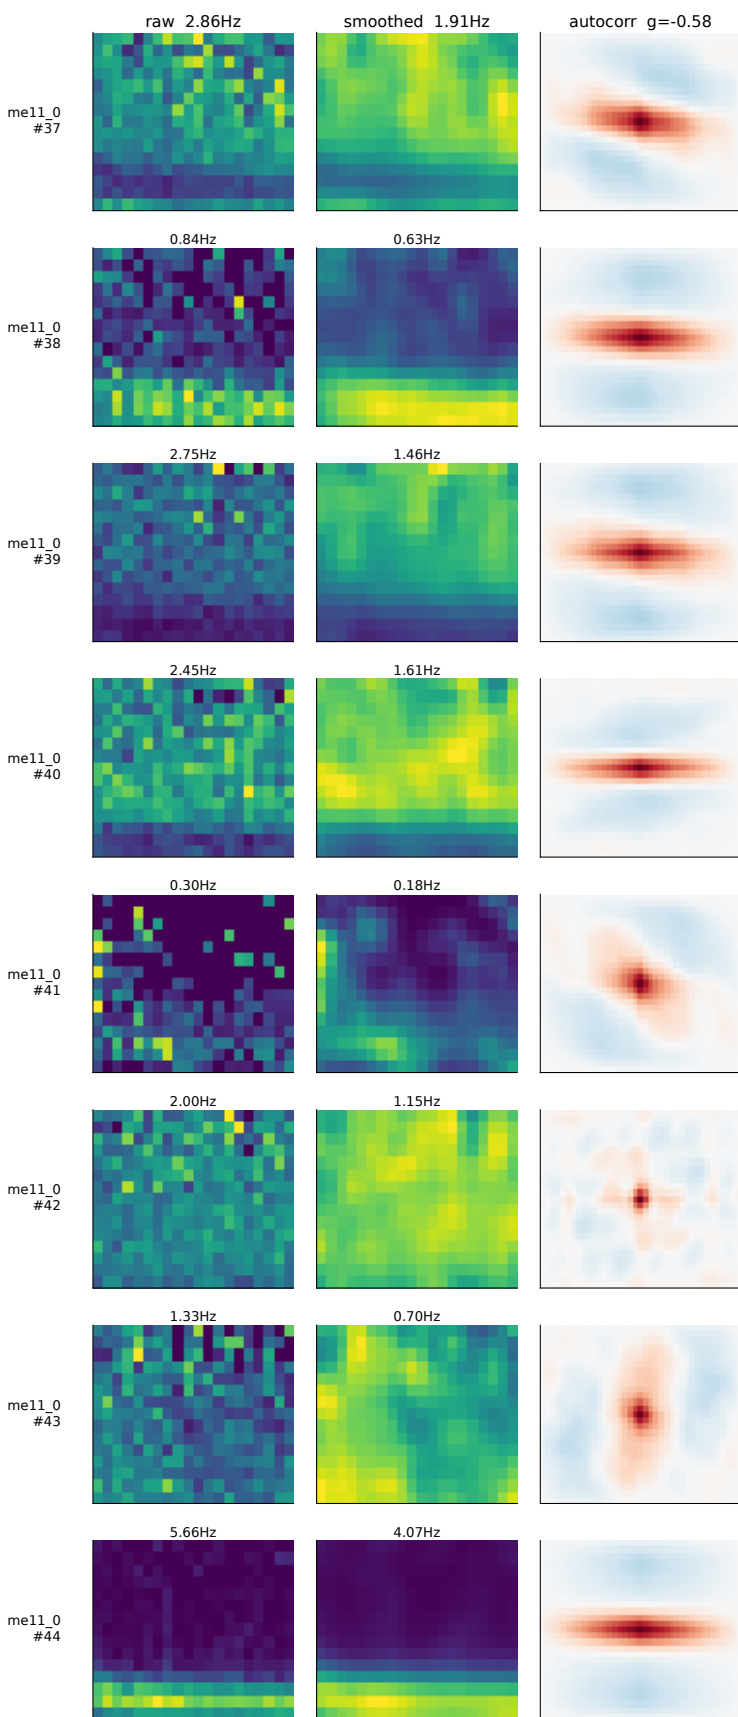

s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

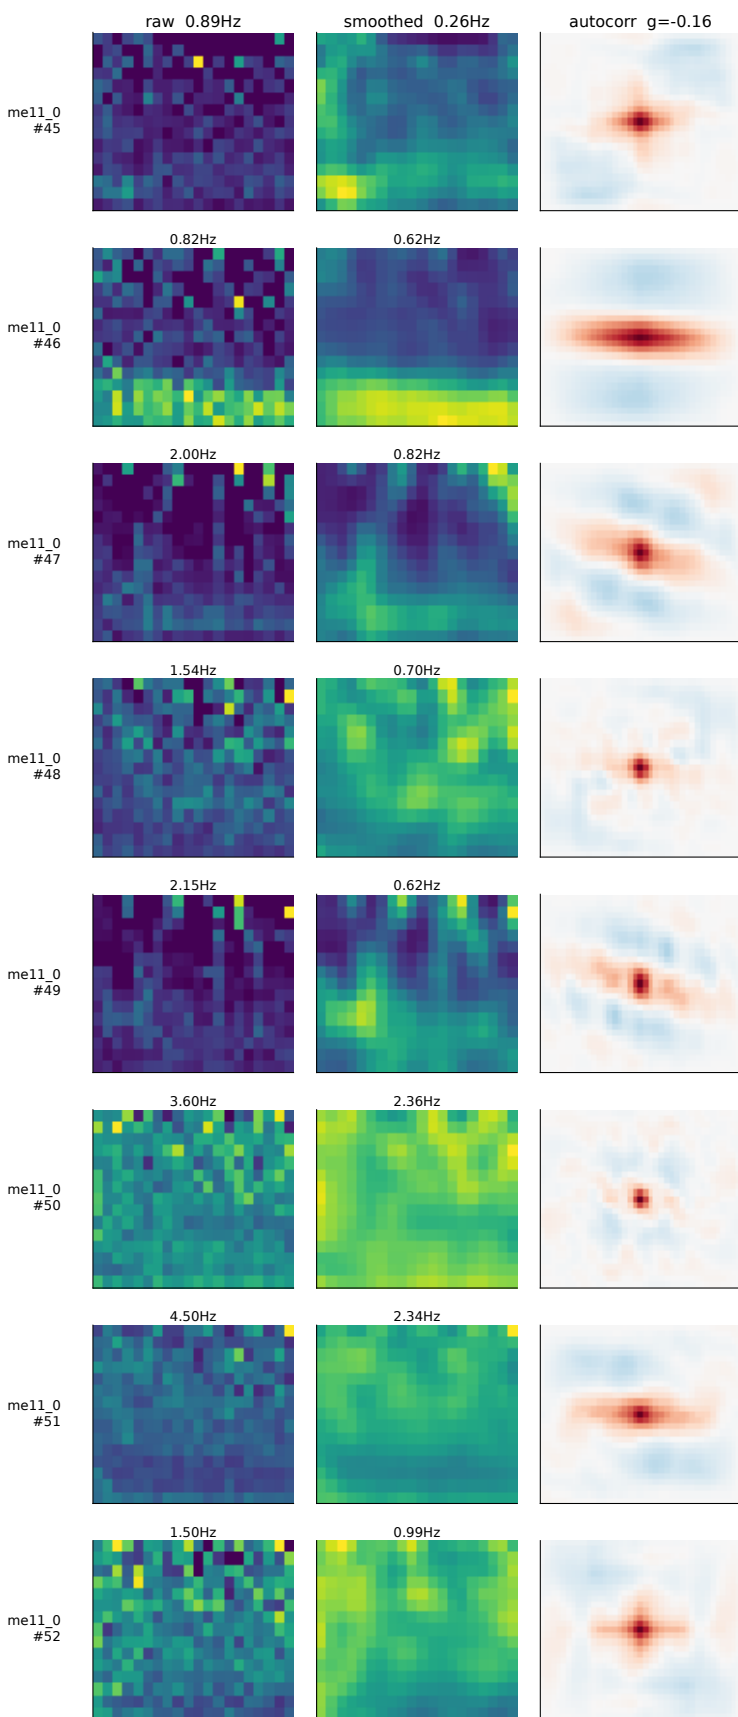


6: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

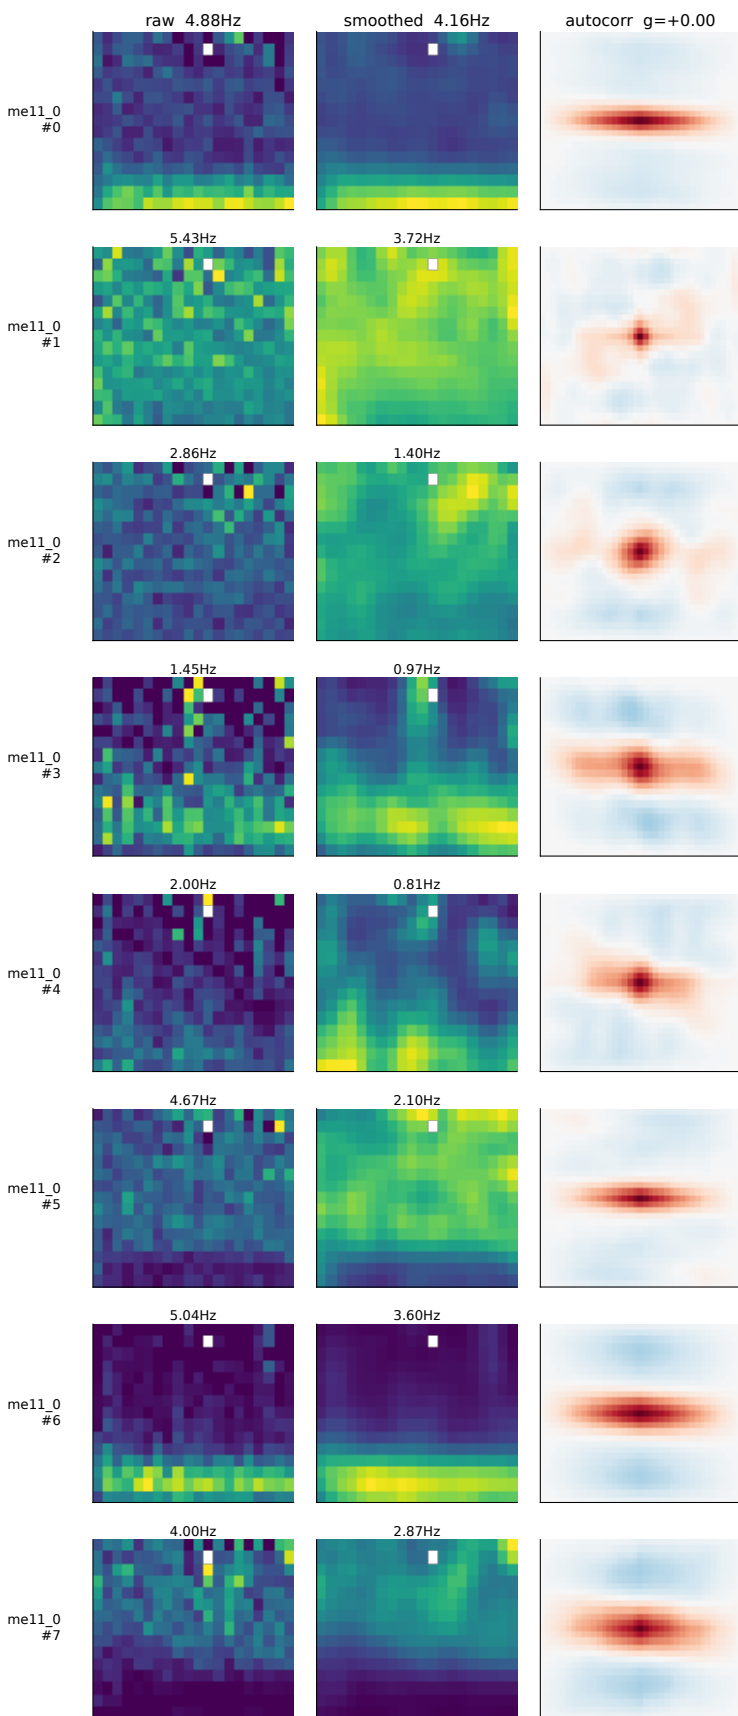





s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

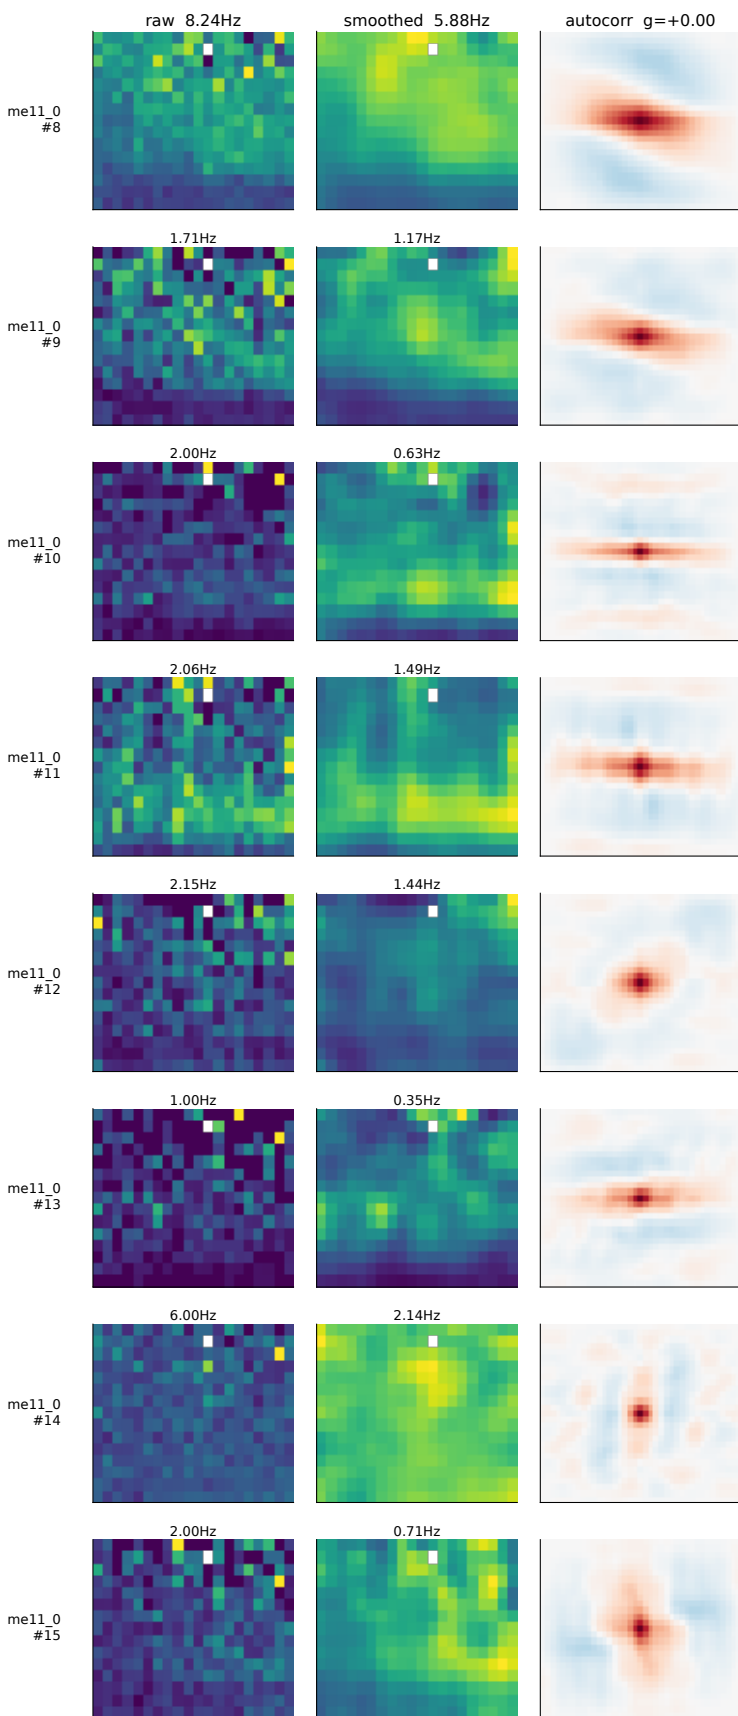


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

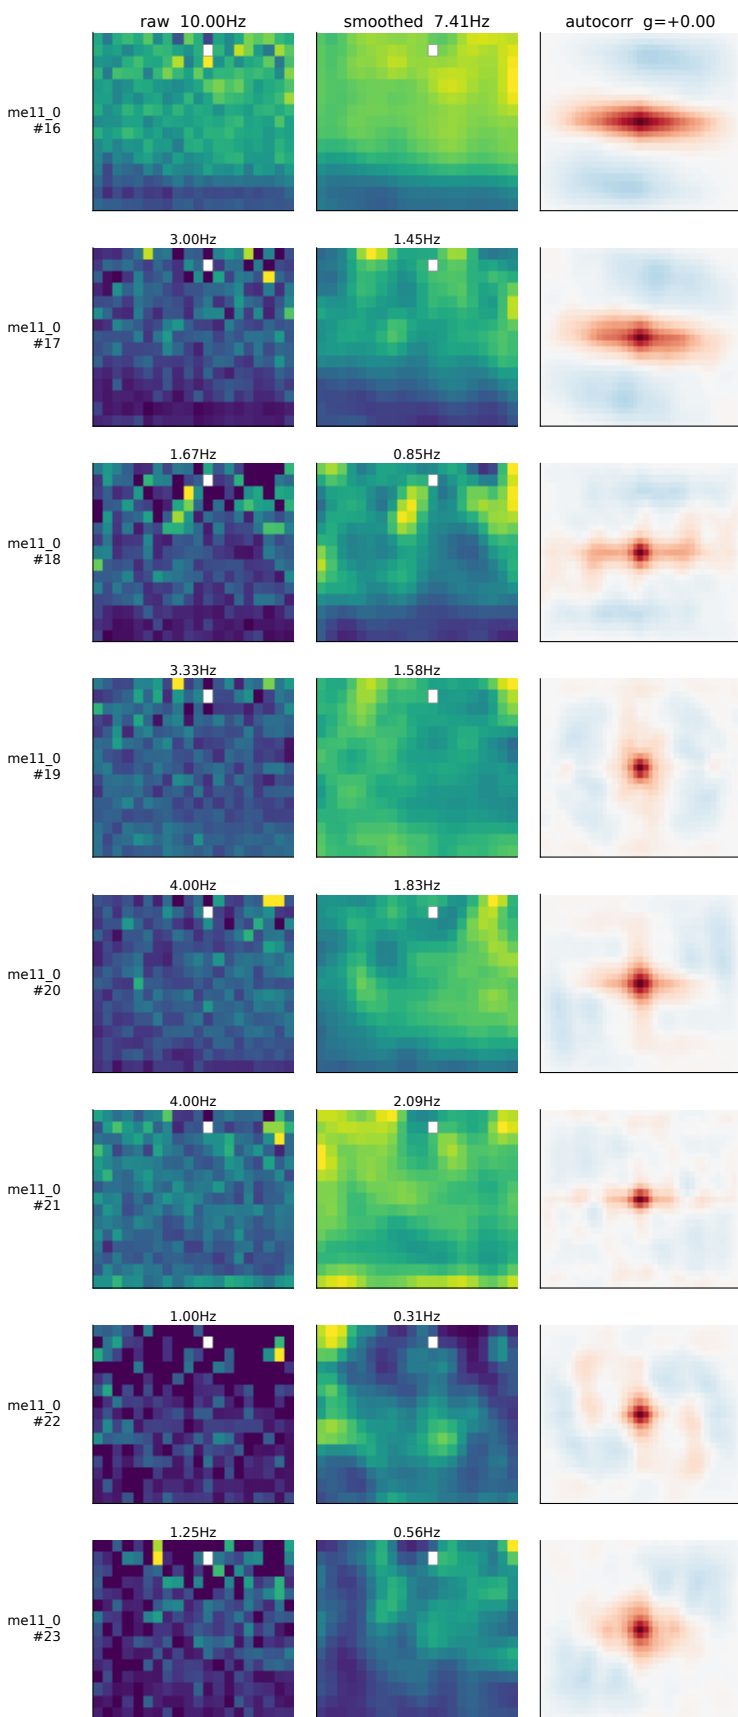


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

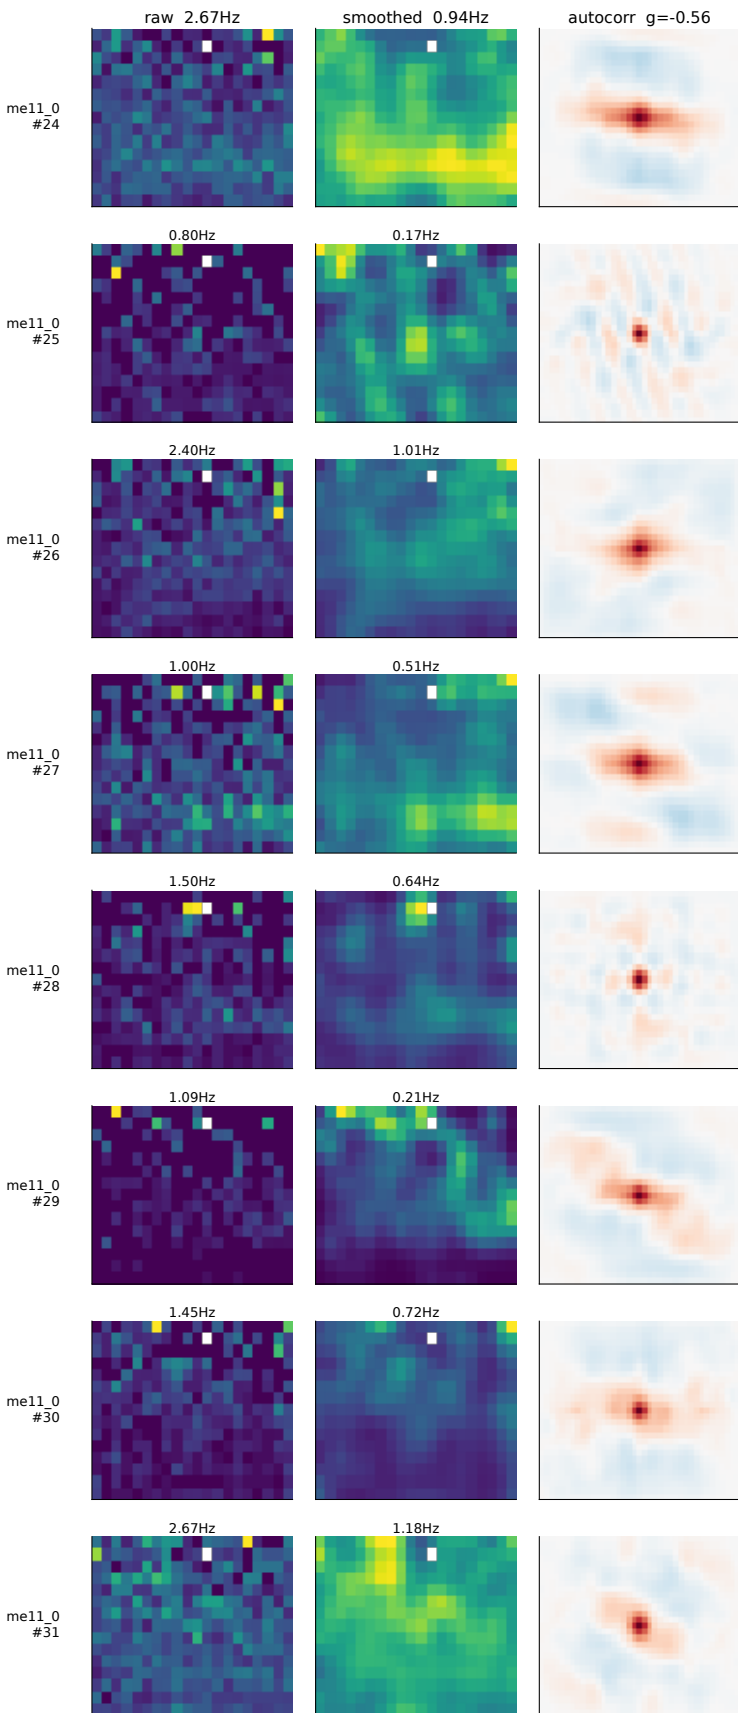


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

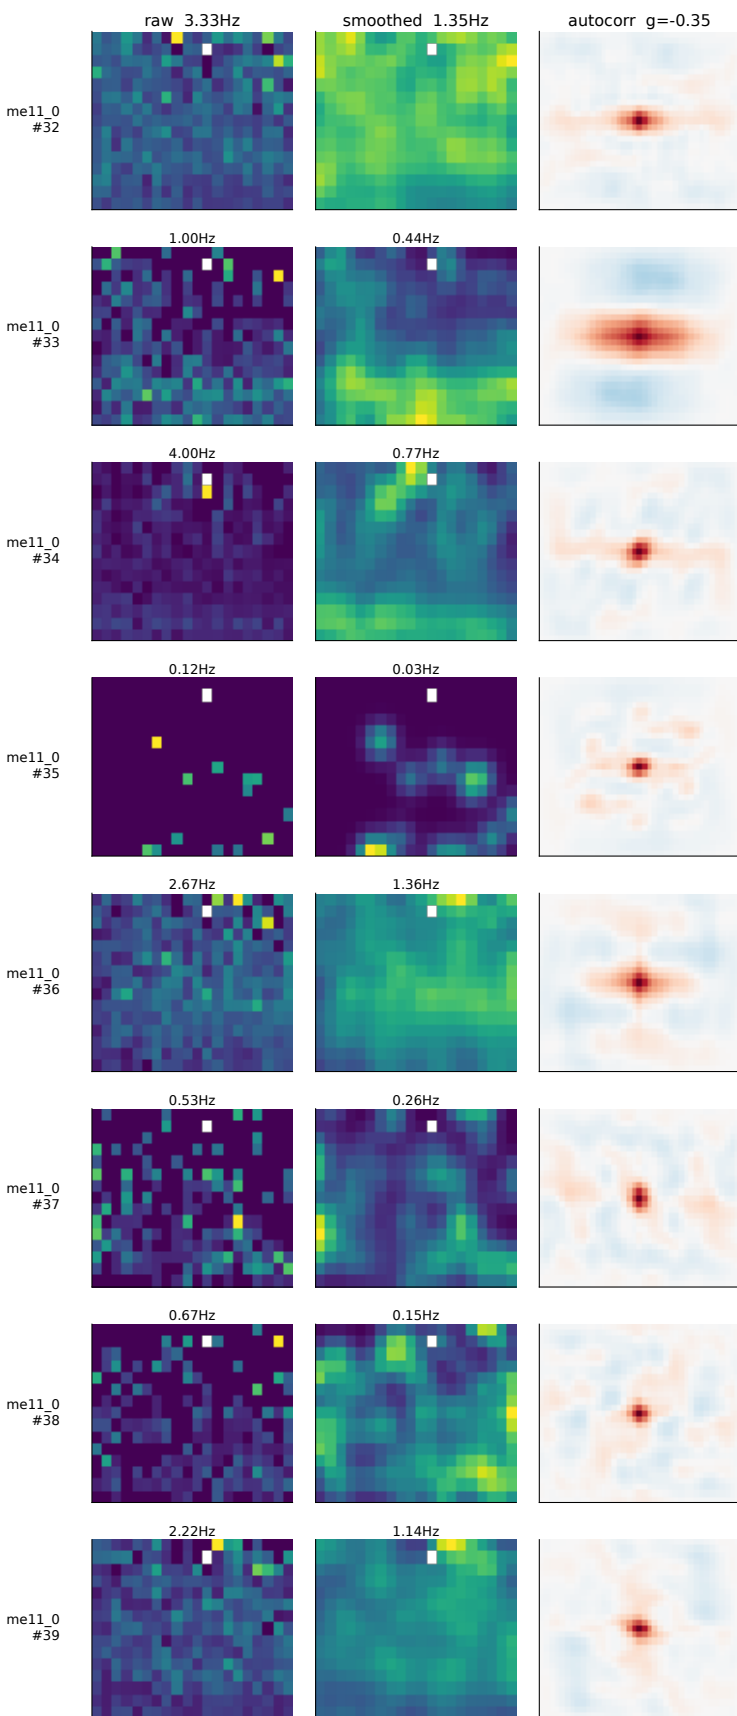


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

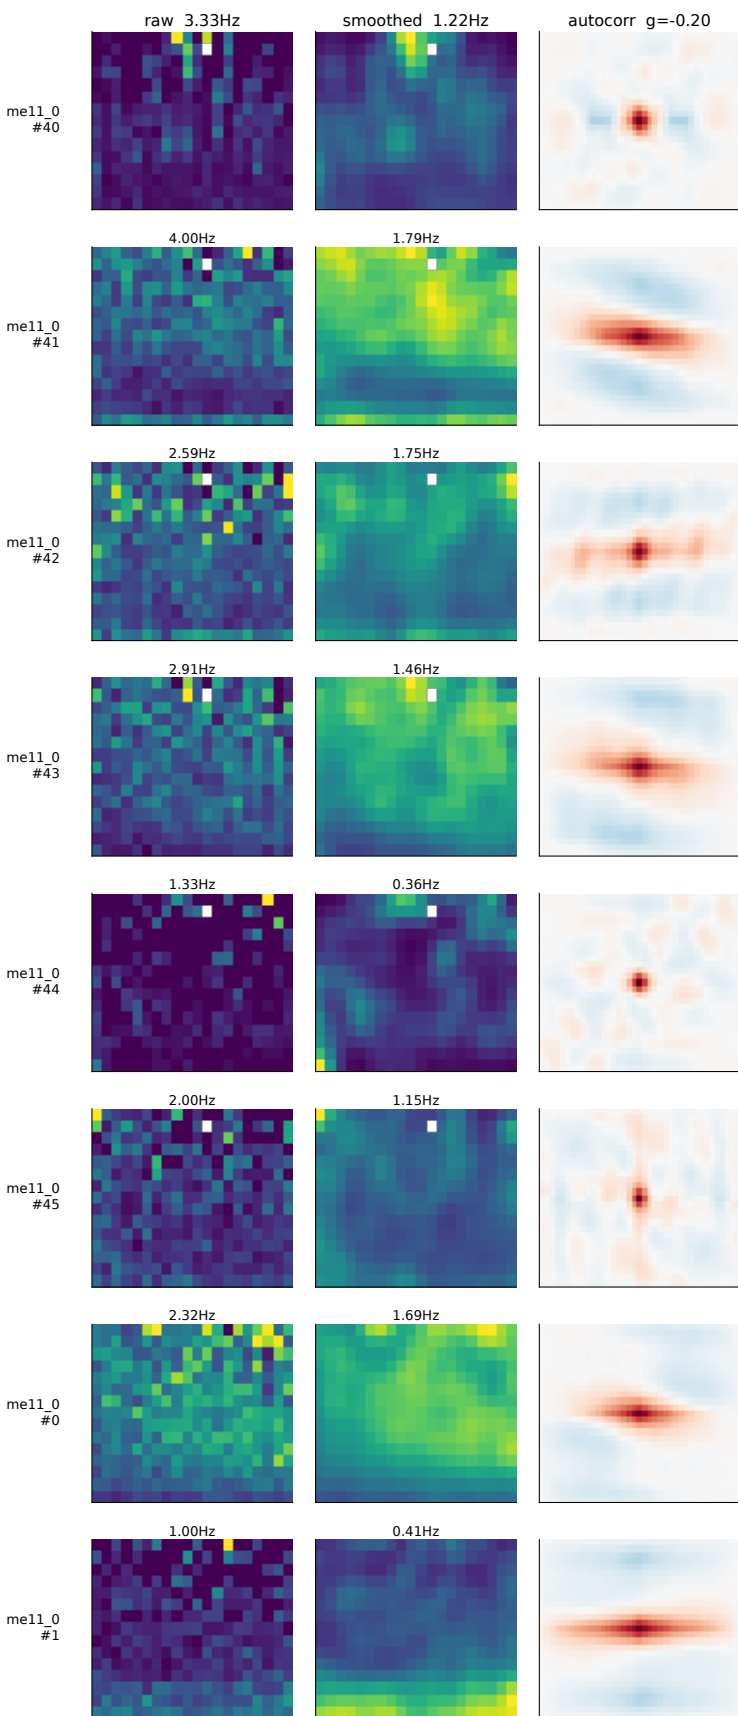


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 11  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

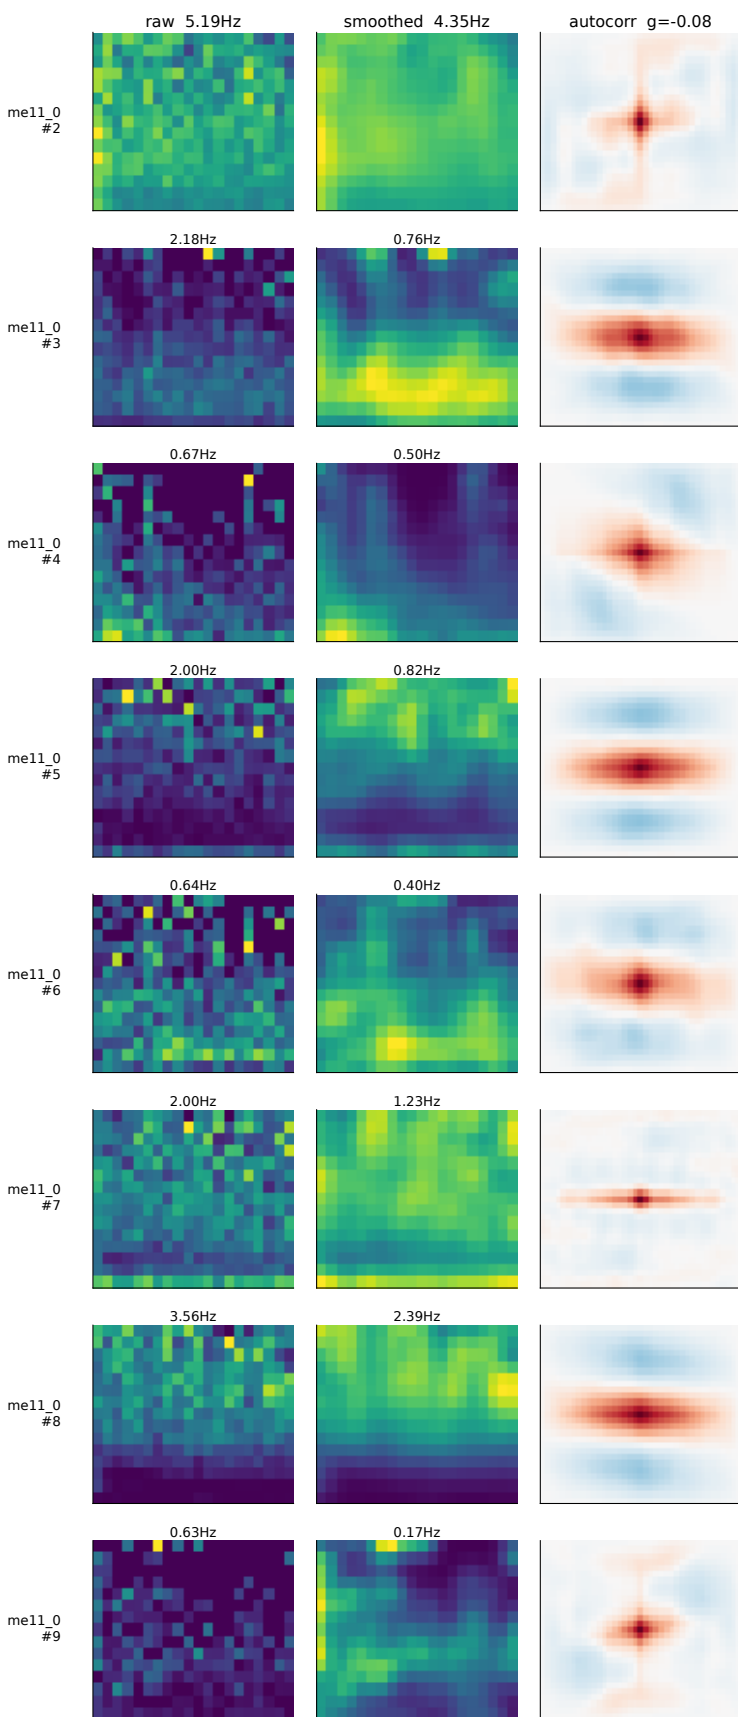

s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 12  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

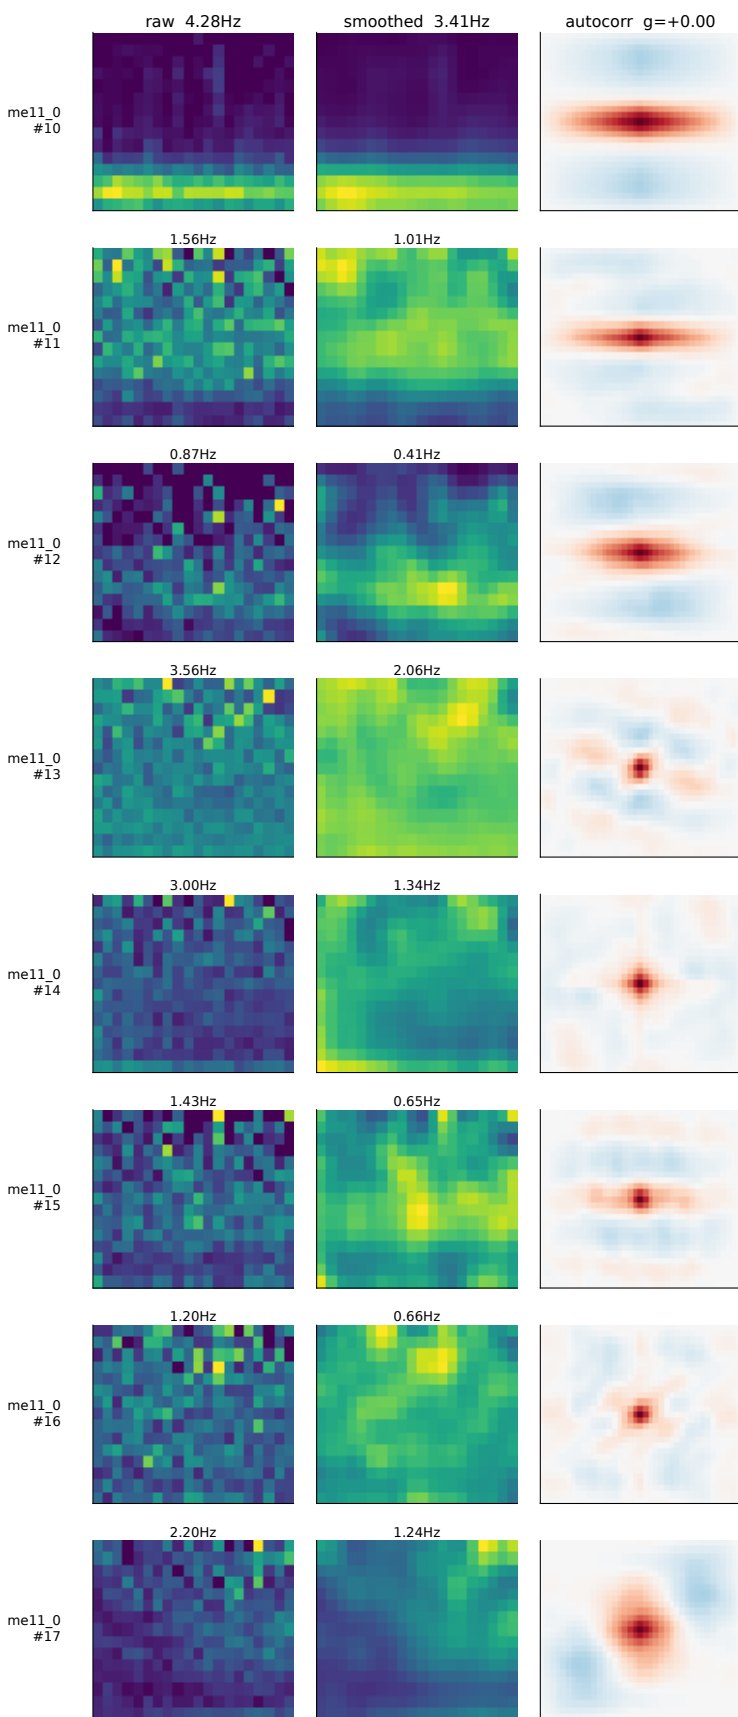


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 12  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

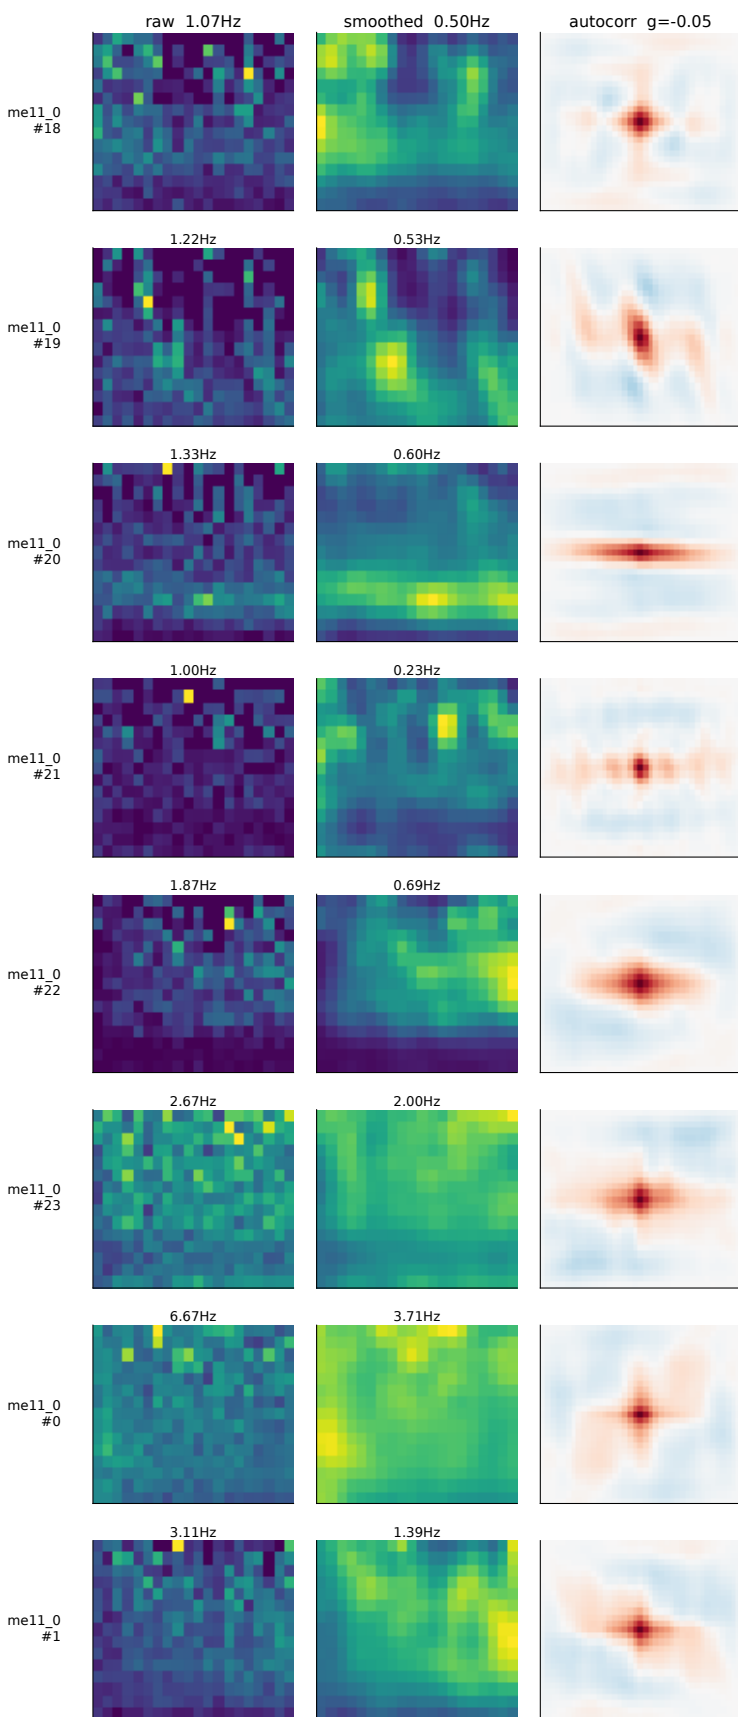





s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 12  
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

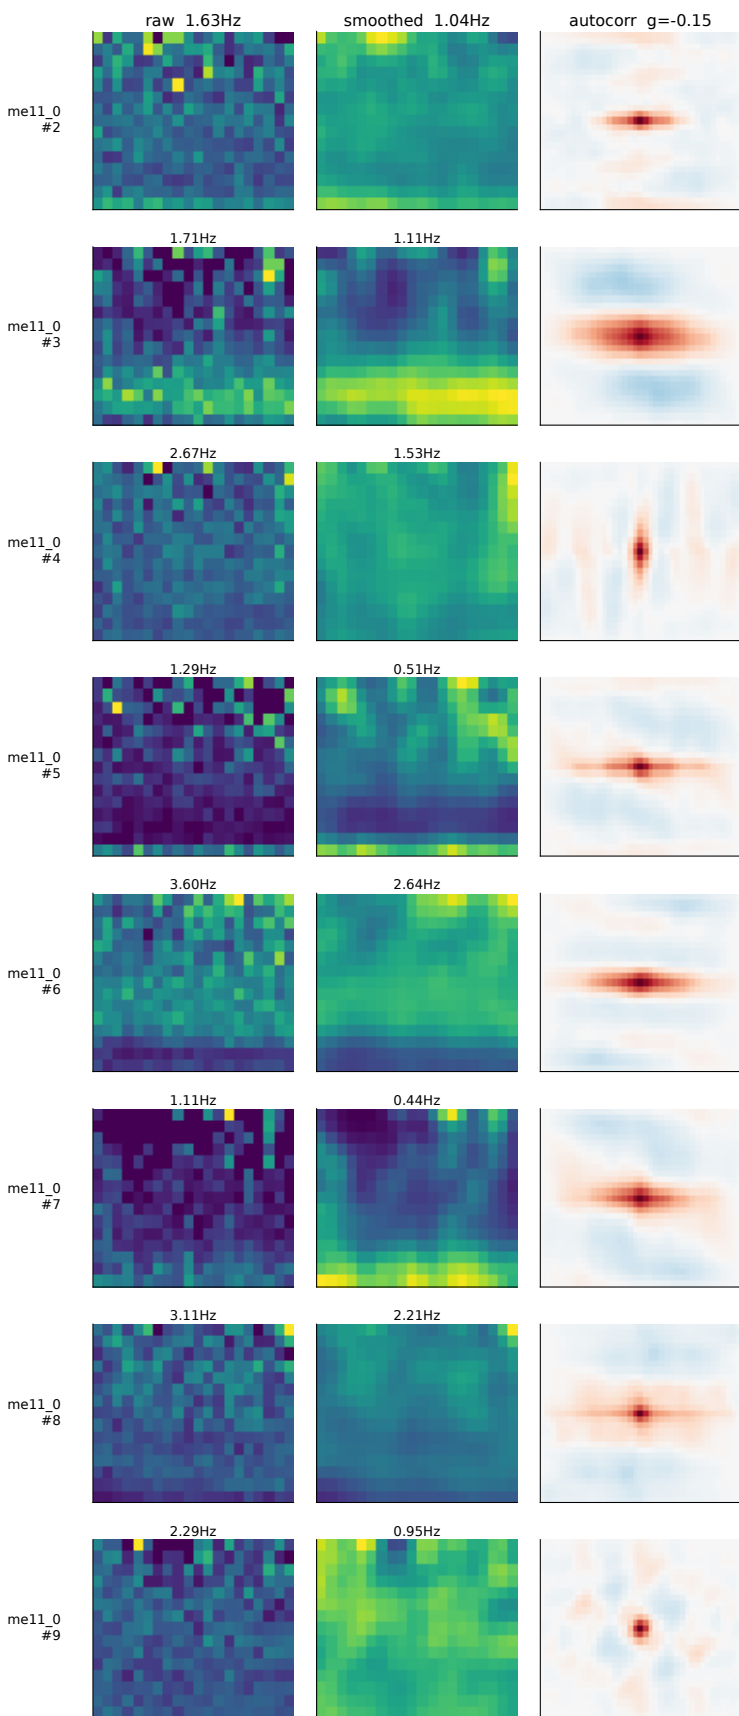


s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 12  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

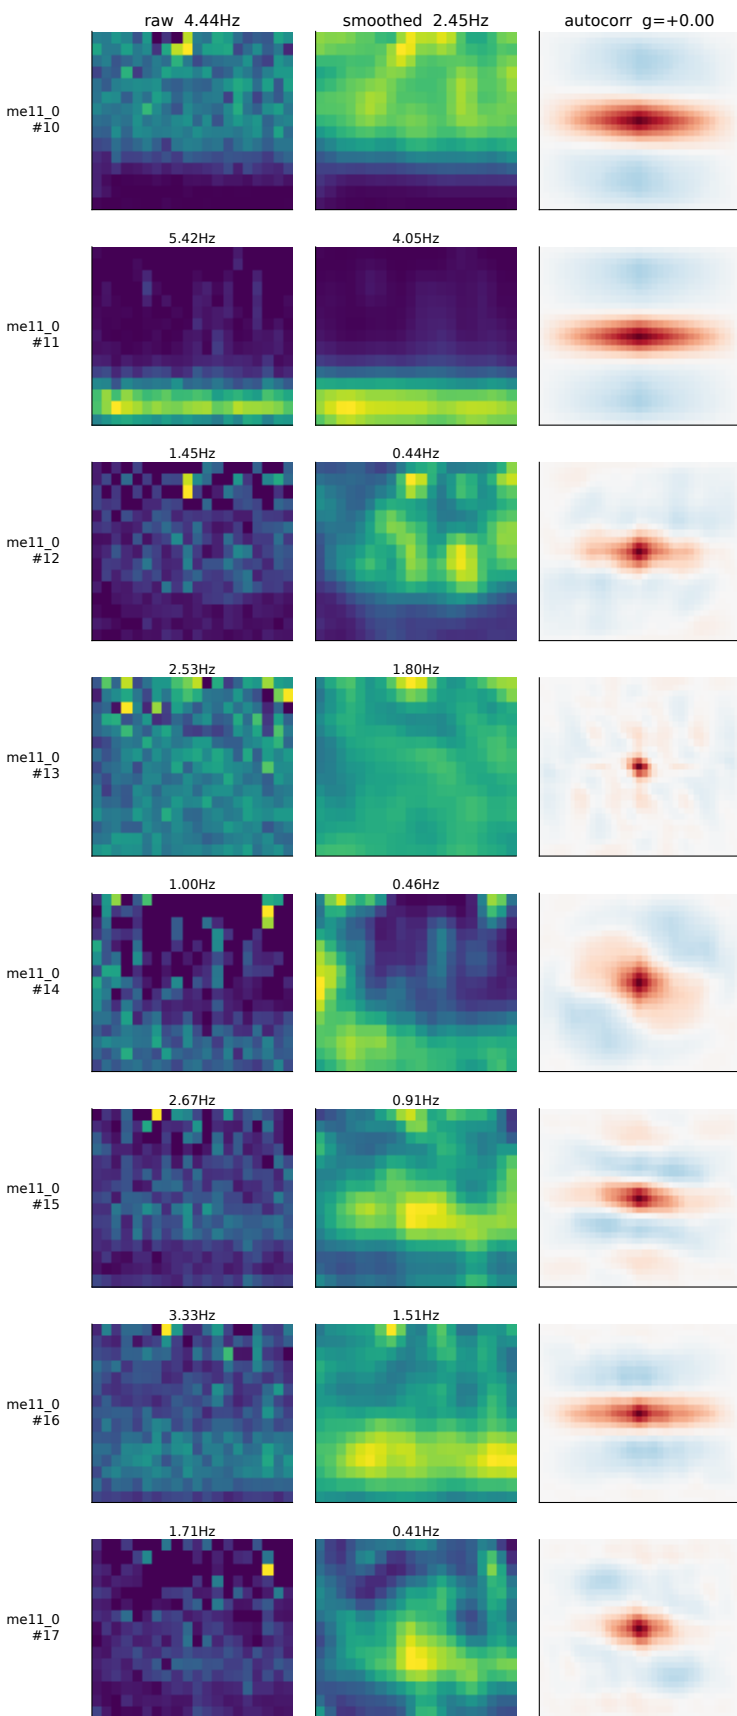

s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 12  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

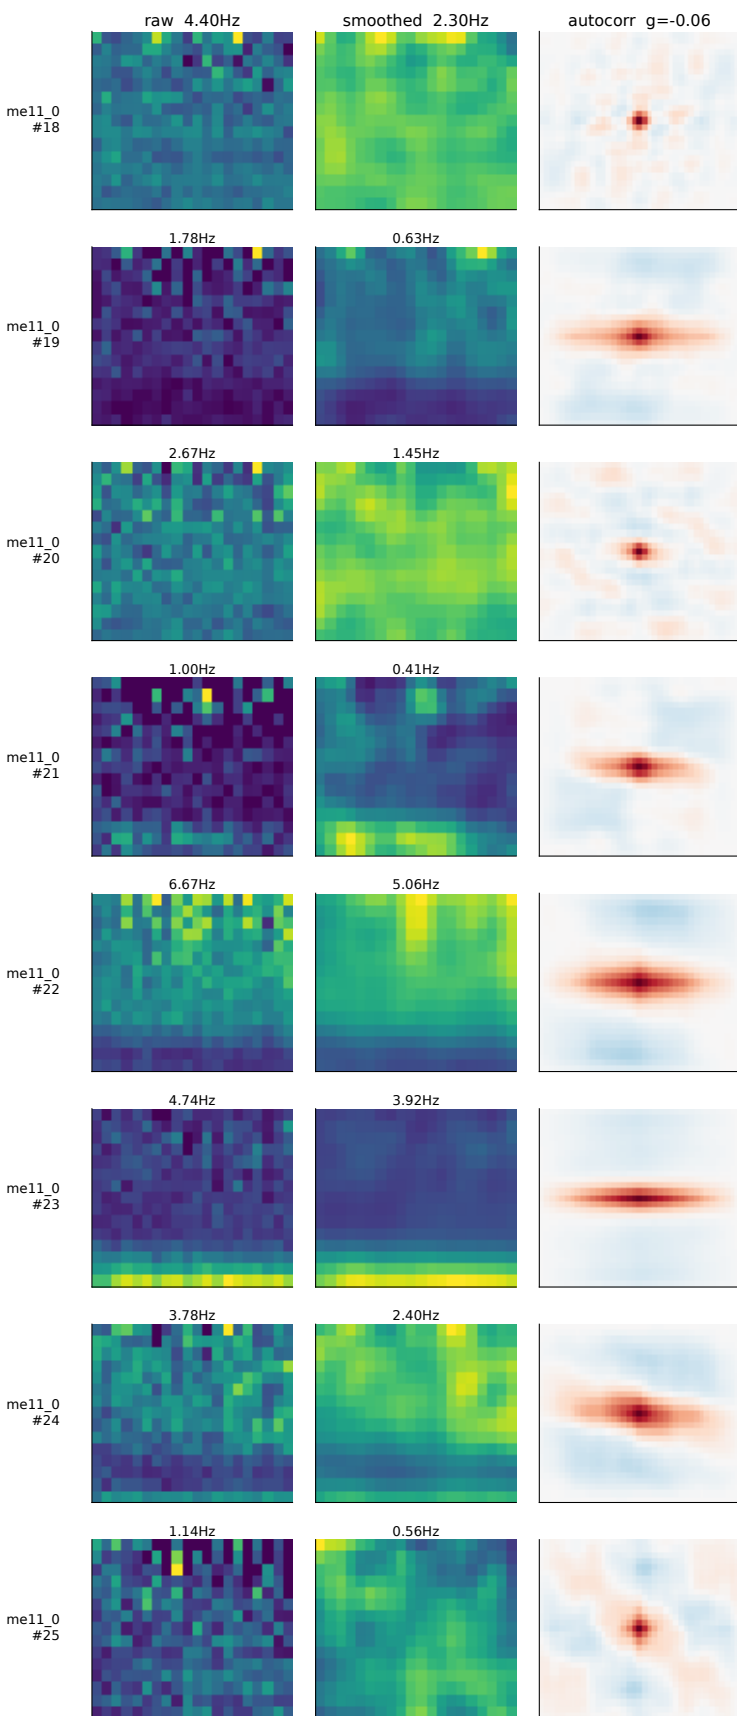

s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 12  
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

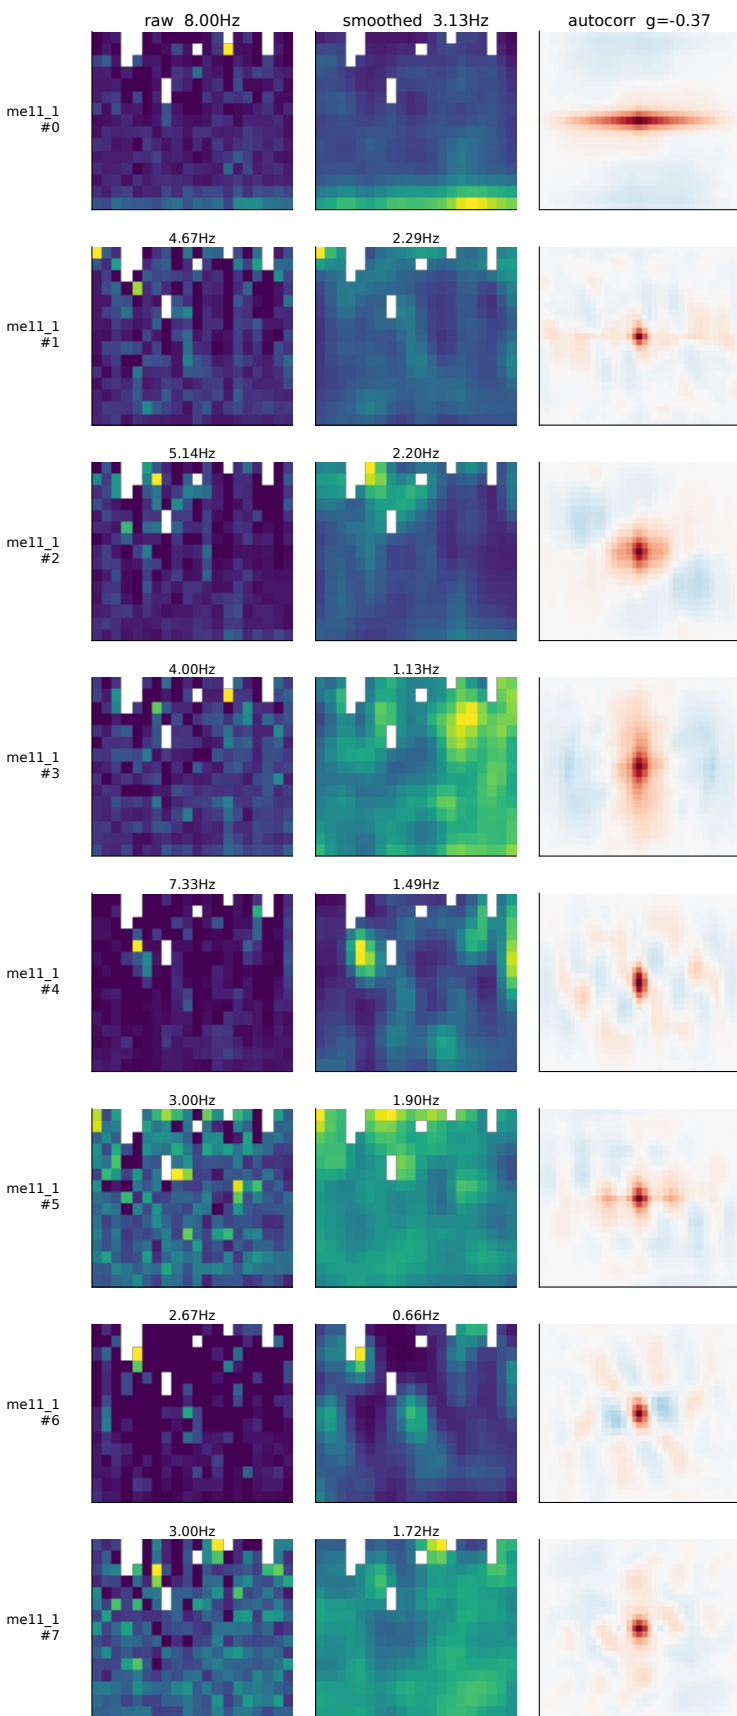

s: x = time in session (min), y = time since reward (s) | autocorr: lag on both axes | neurons 12  
own beside smoothed because smoothing can create structure; no reliability measure or null is co

