




ps: x = fraction of session, y = fraction of goal-goal transition | ne
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

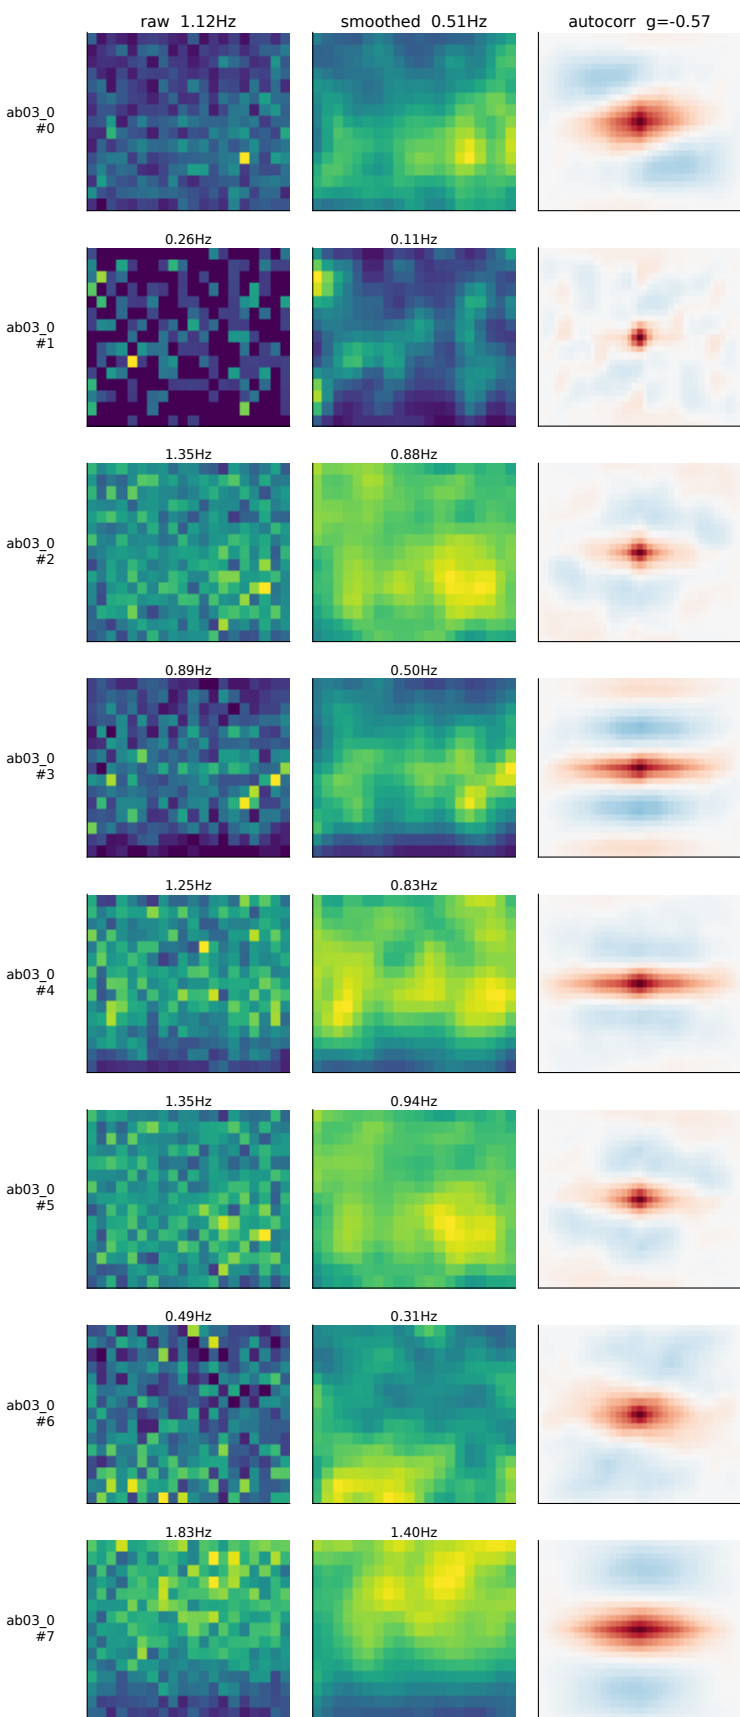


os: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neu
own beside smoothed because smoothing can create structure; no reliability measure or null is co

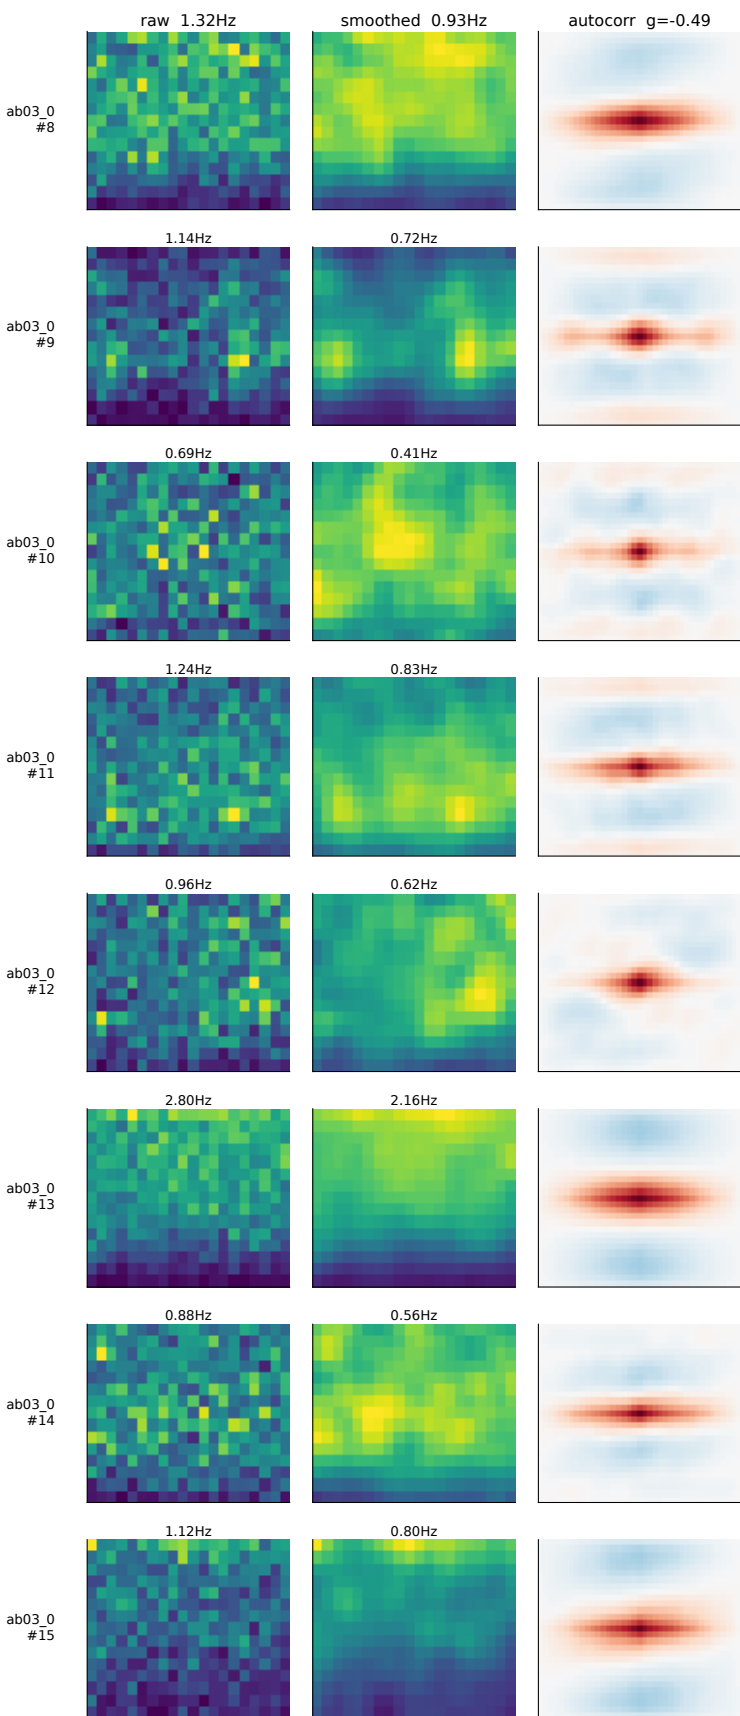


s: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
shown beside smoothed because smoothing can create structure; no reliability measure or null is co

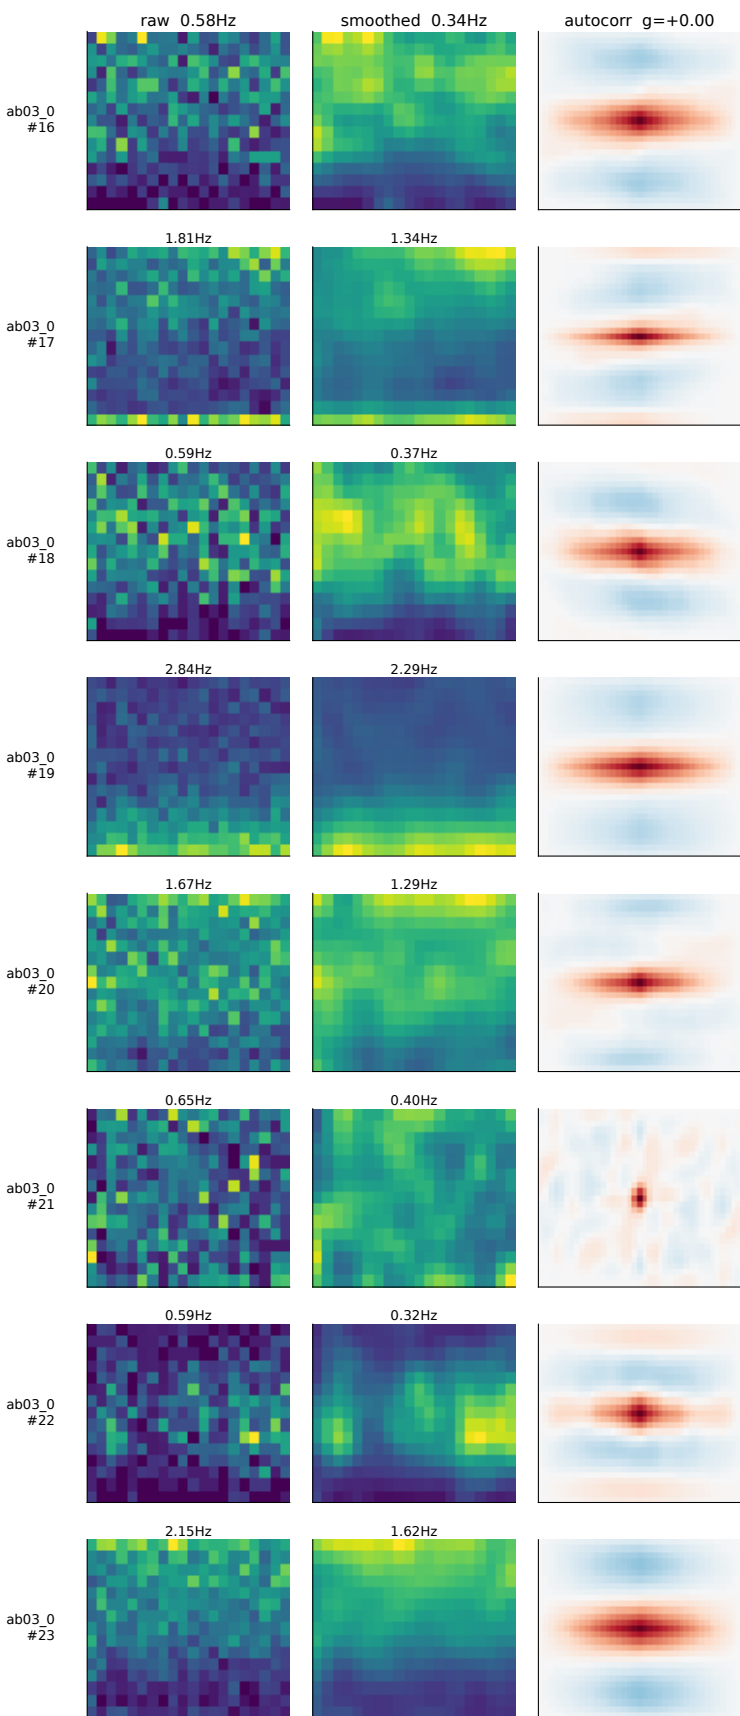


s: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
shown beside smoothed because smoothing can create structure; no reliability measure or null is co

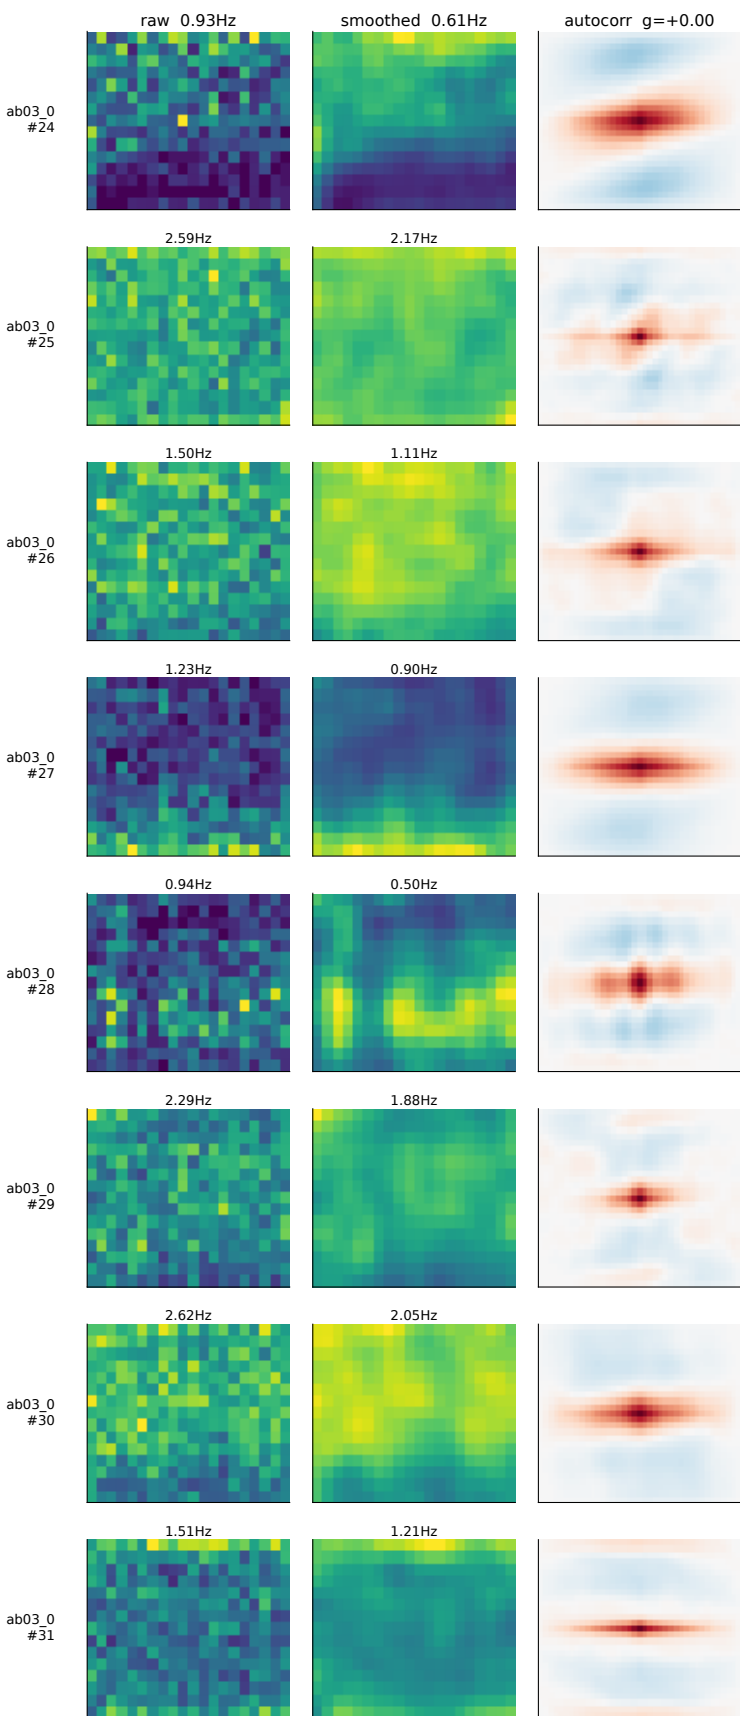


s: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

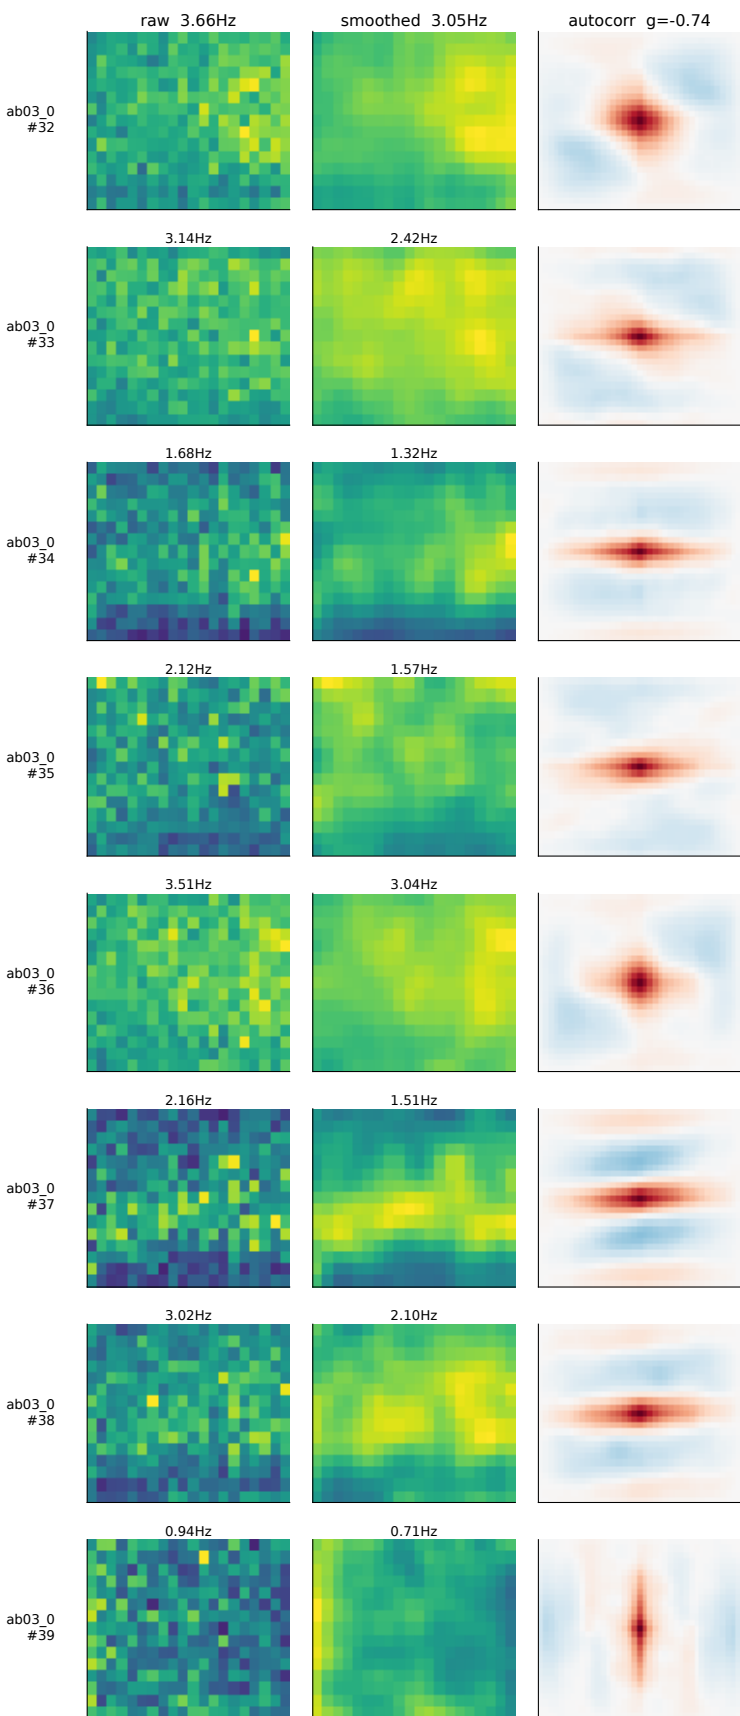


s: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
shown beside smoothed because smoothing can create structure; no reliability measure or null is co

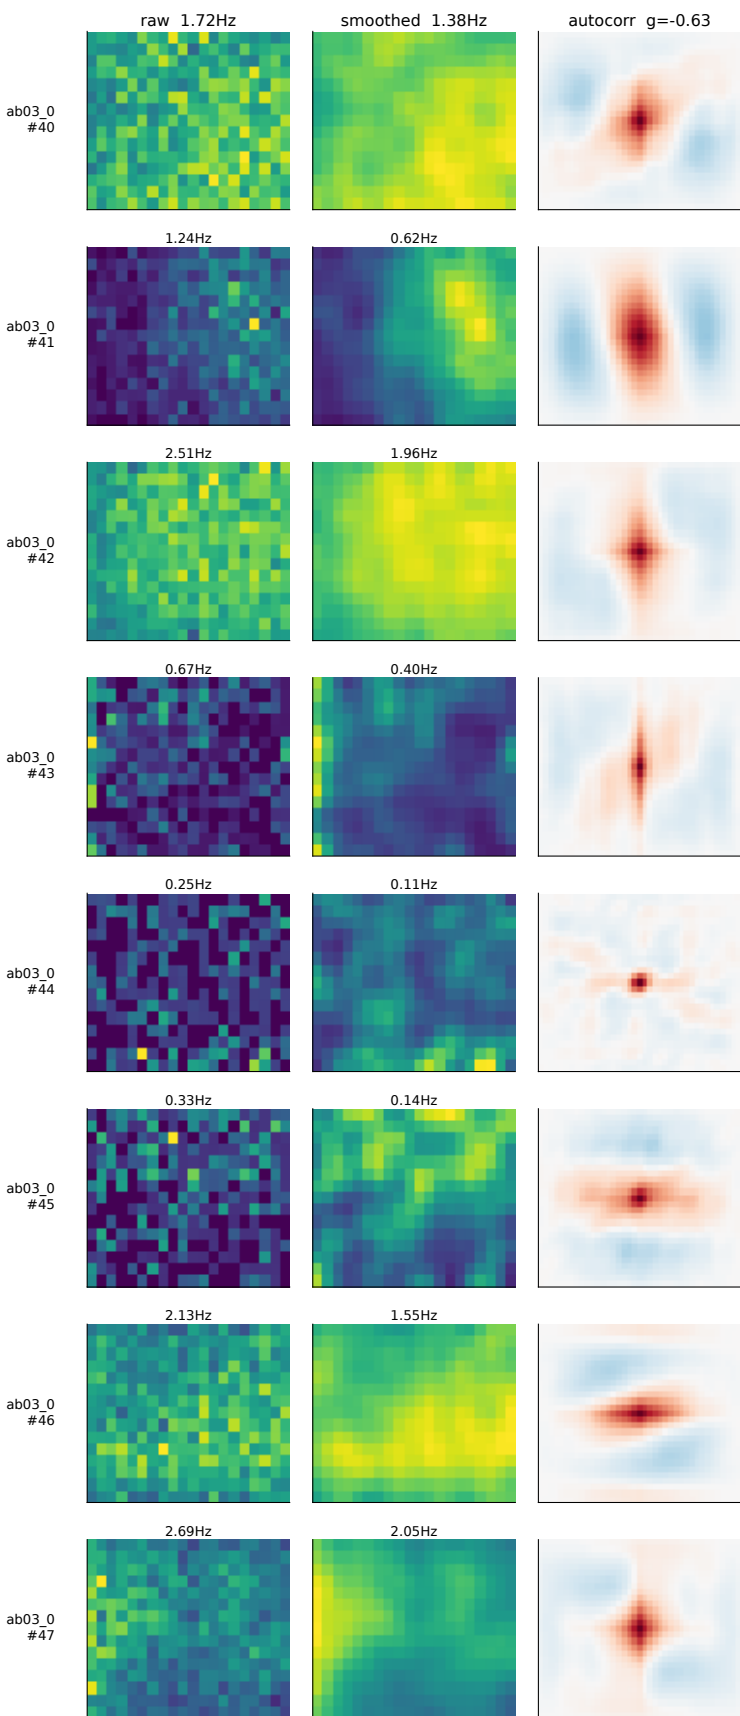


s: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
shown beside smoothed because smoothing can create structure; no reliability measure or null is co

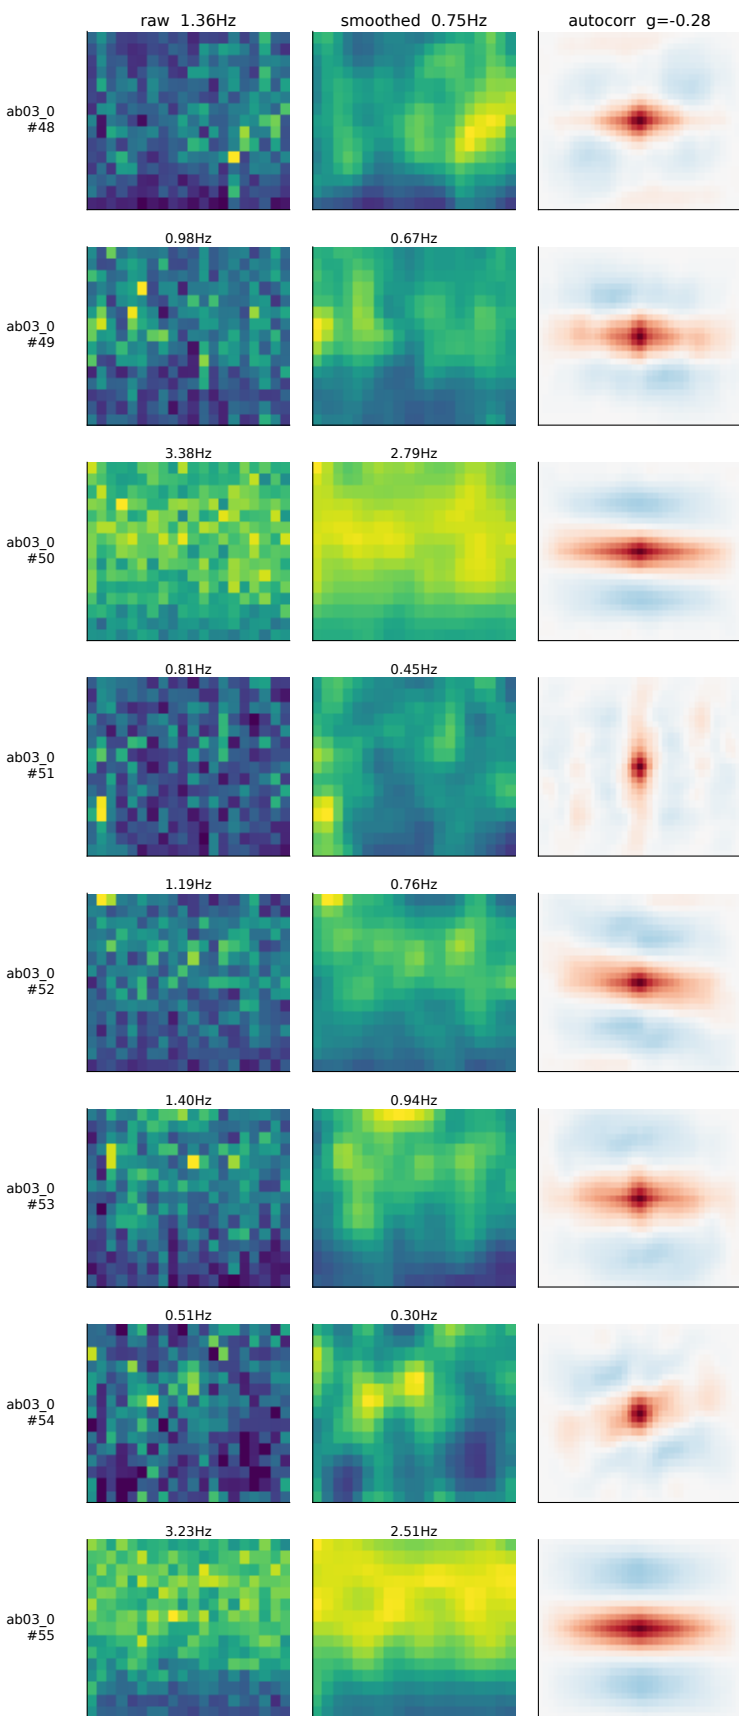


s: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron: neuron ID
shown beside smoothed because smoothing can create structure; no reliability measure or null is computed

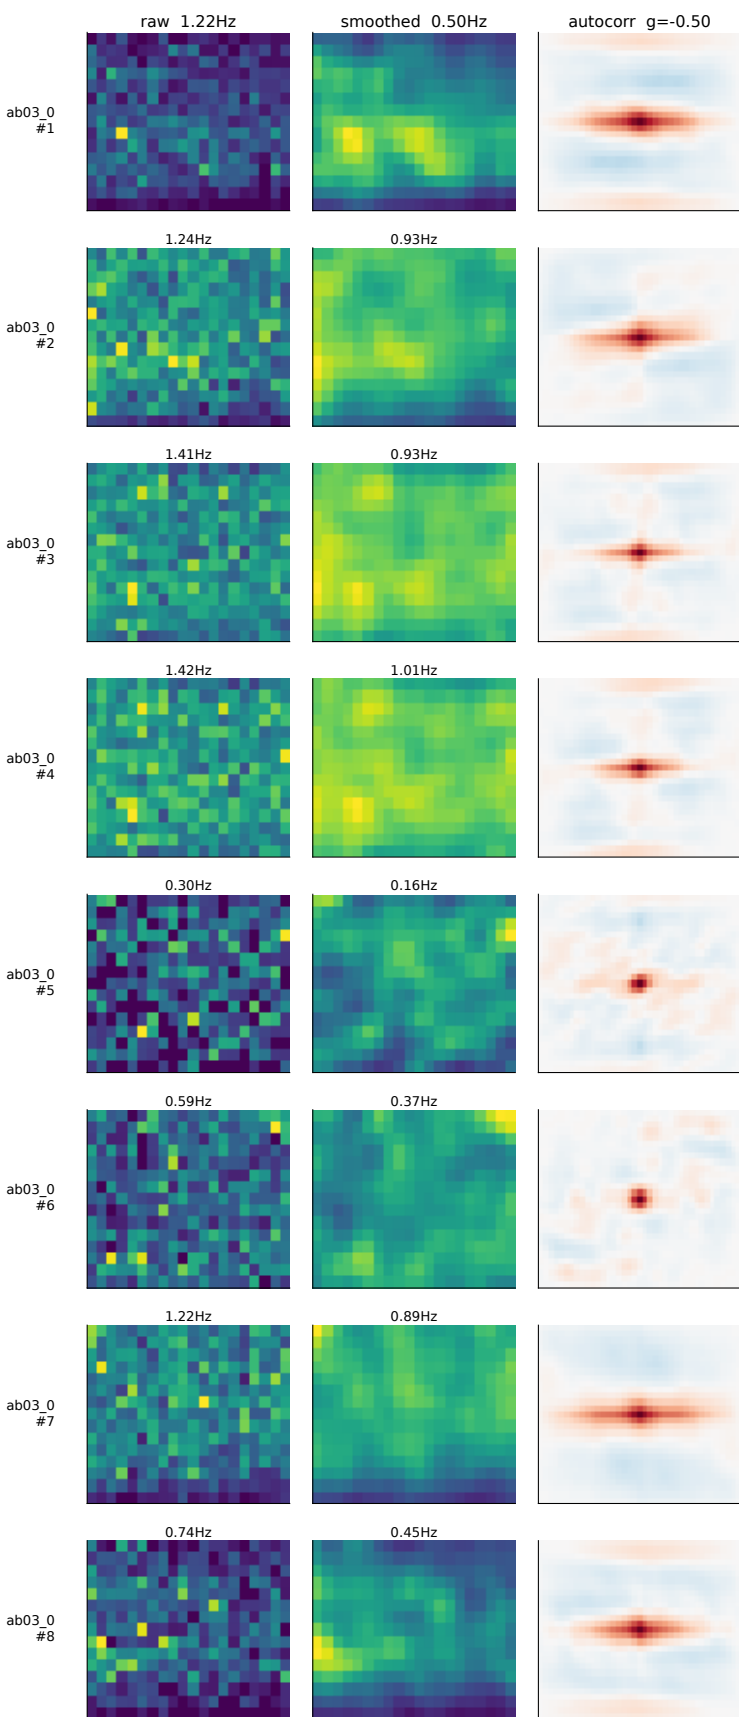


s: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
shown beside smoothed because smoothing can create structure; no reliability measure or null is co

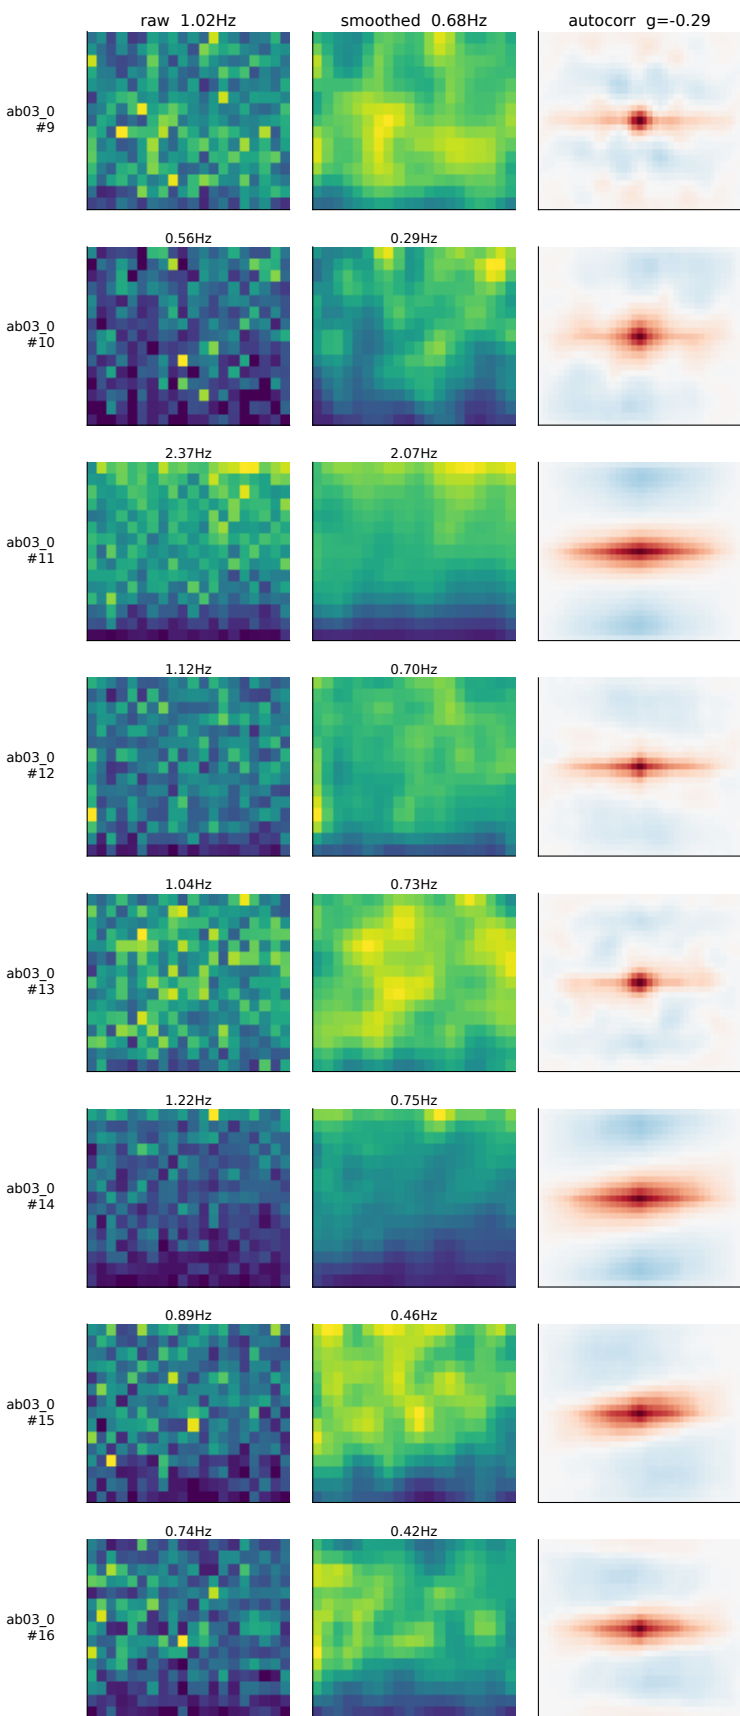


s: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neu
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

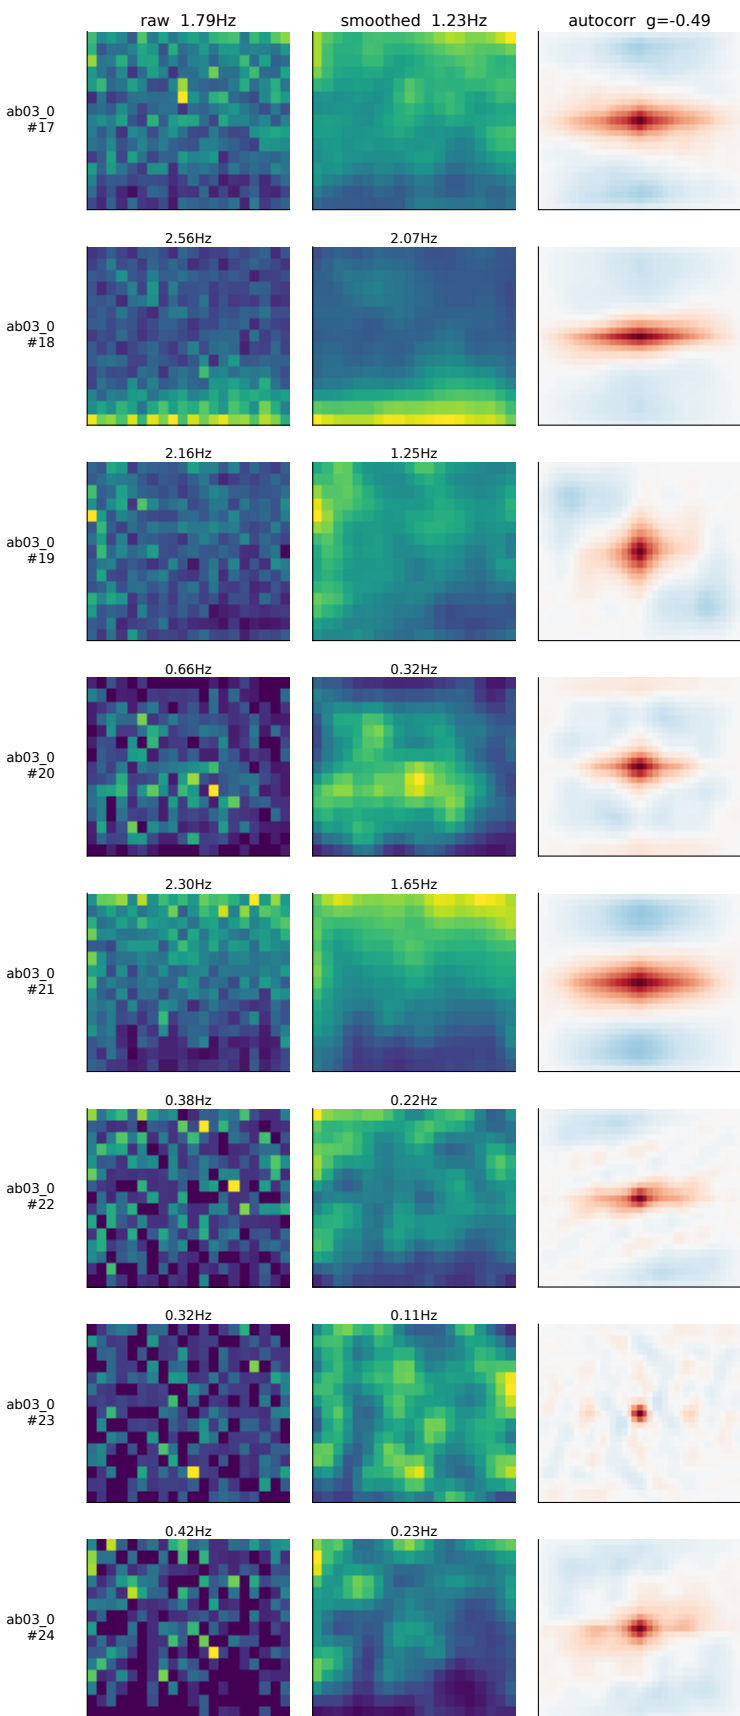


s: x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neu
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

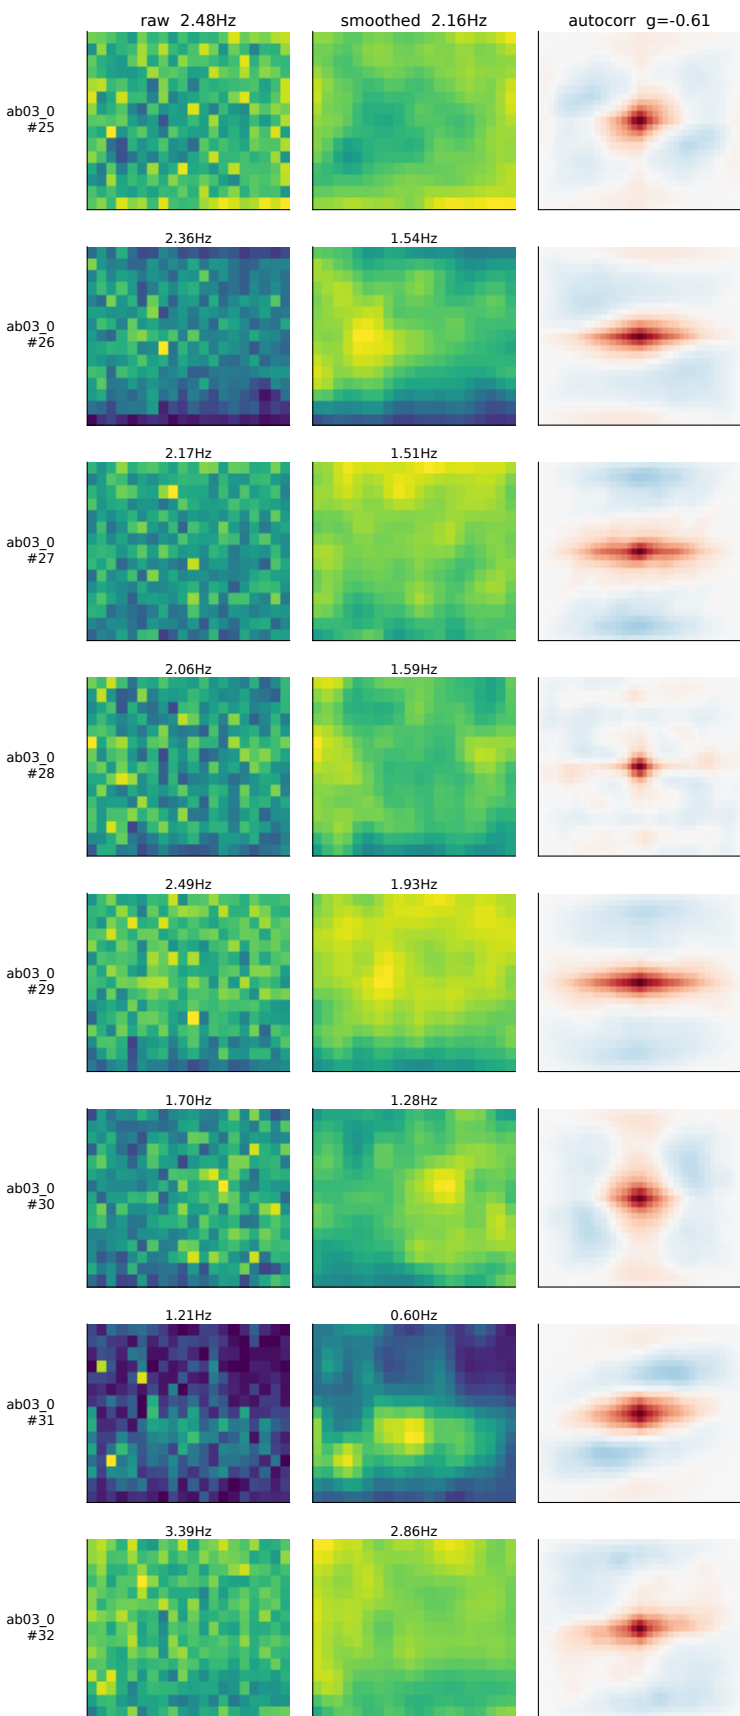


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neur
 own beside smoothed because smoothing can create structure; no reliability measure or null is co

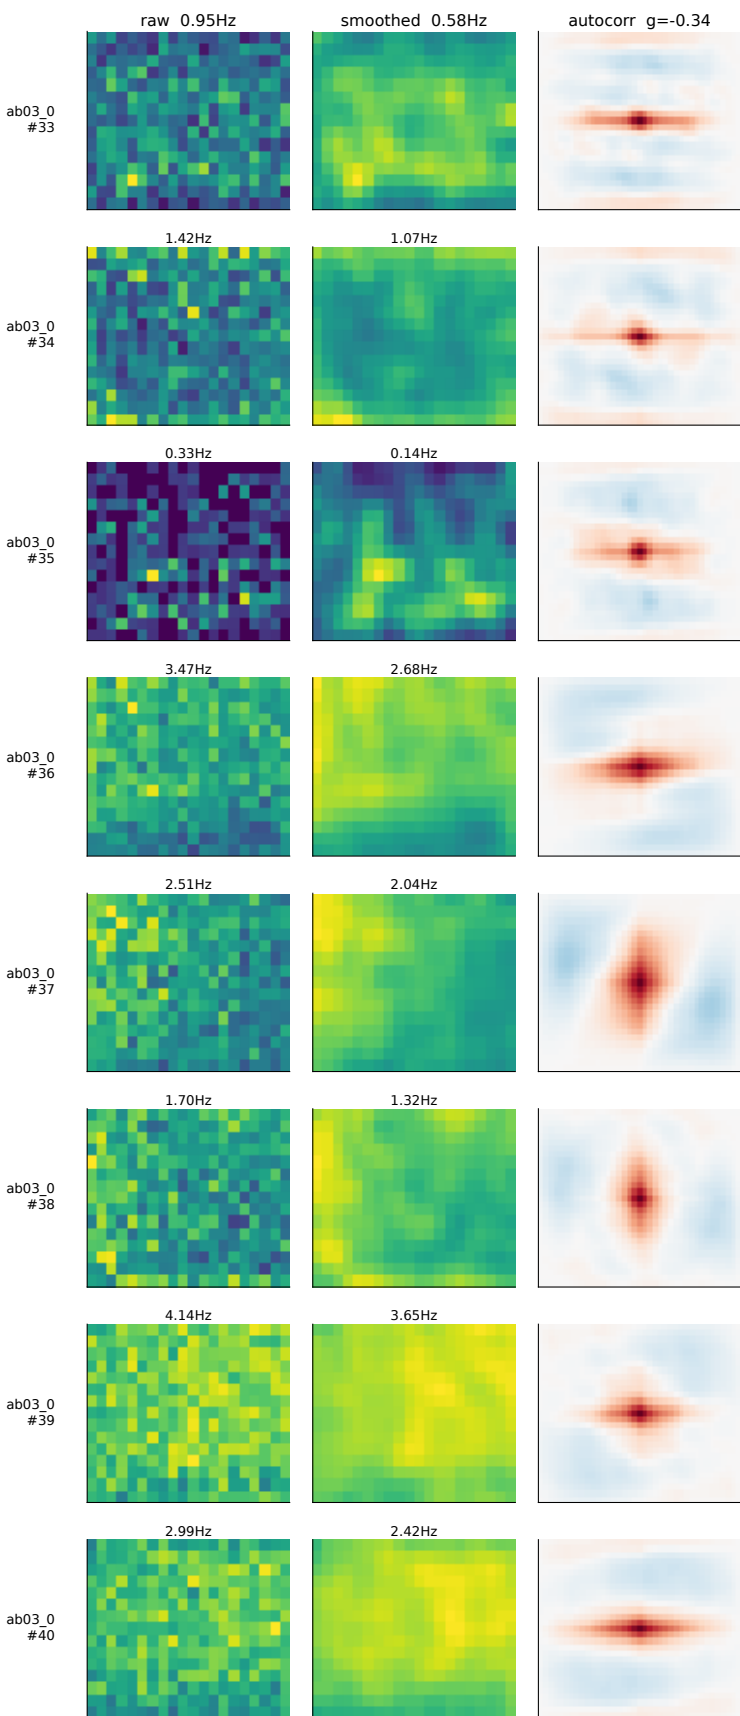


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

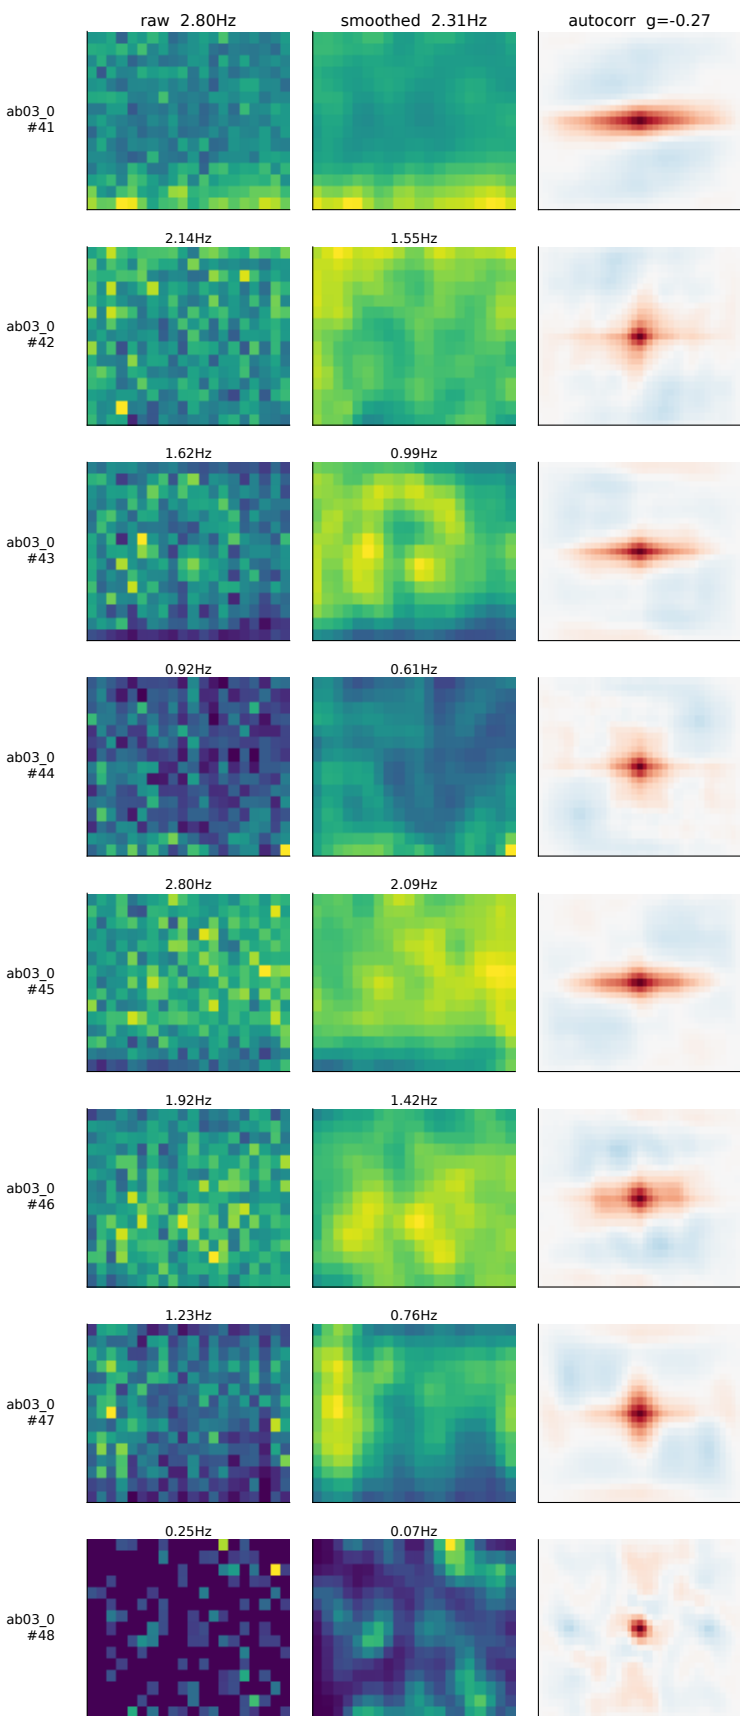


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

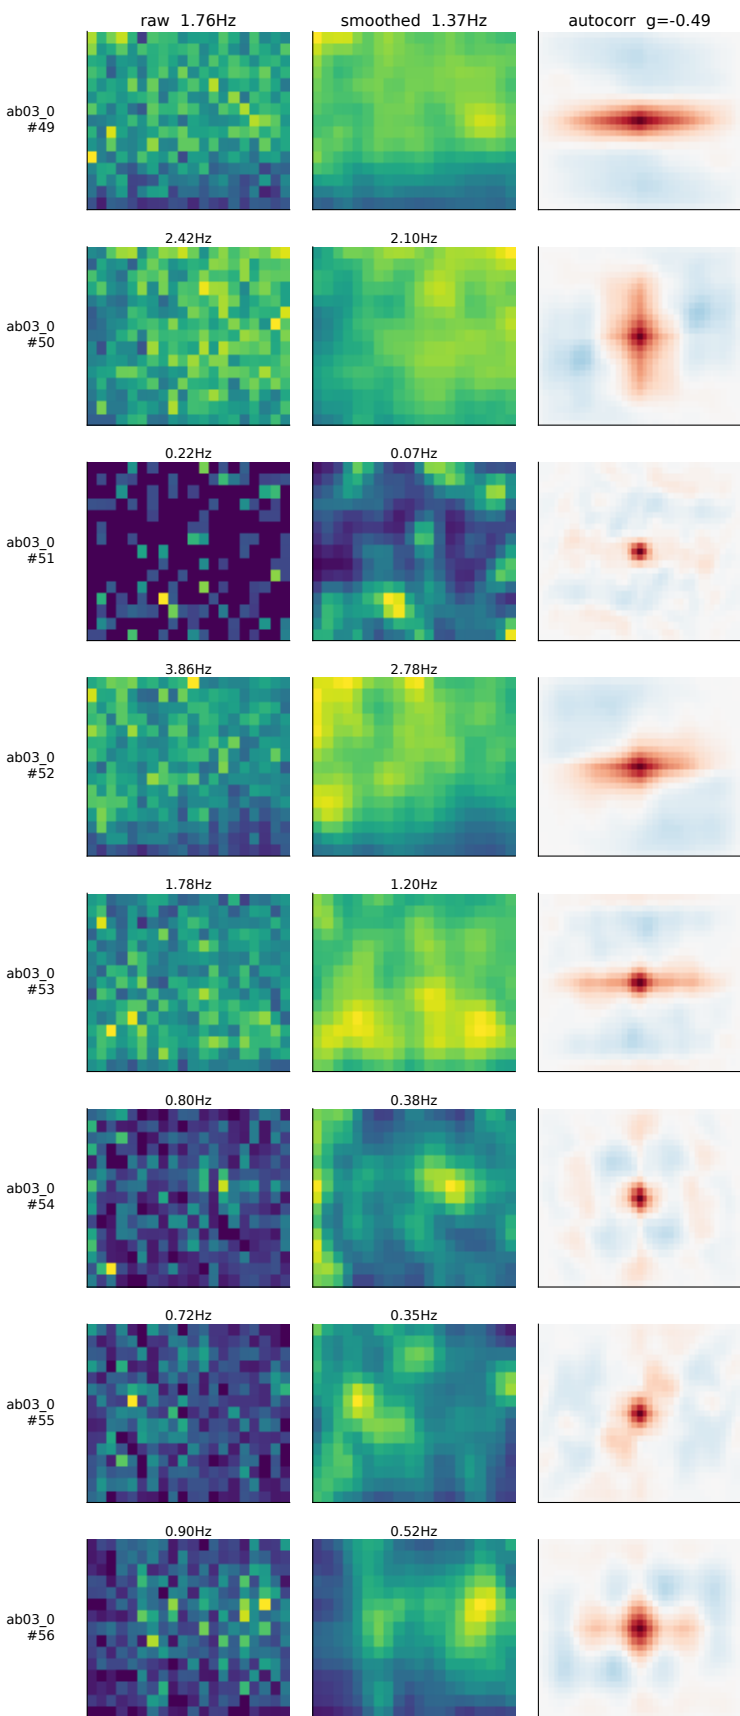


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

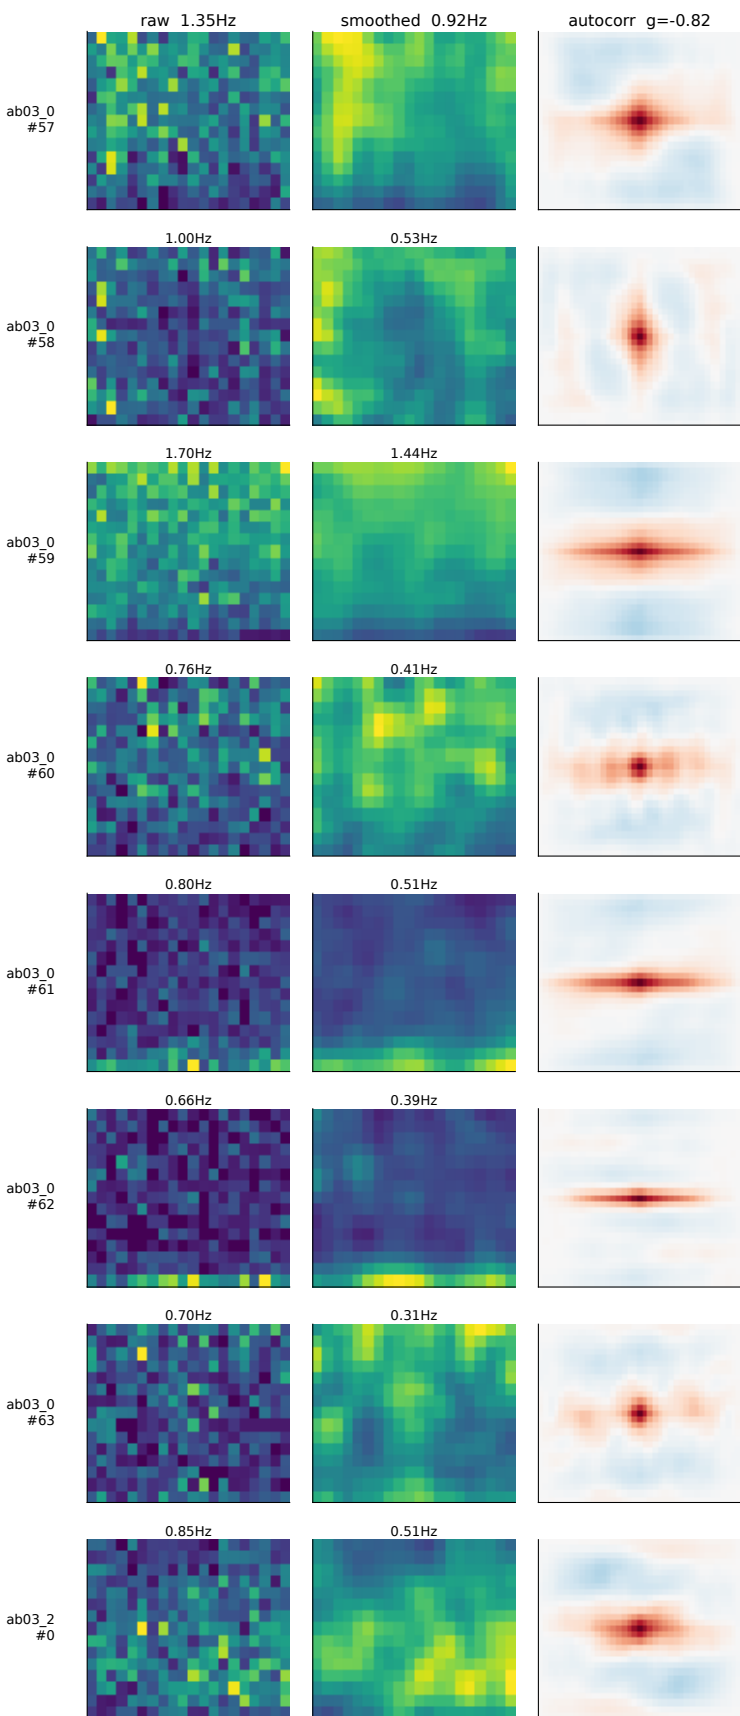


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
own beside smoothed because smoothing can create structure; no reliability measure or null is co

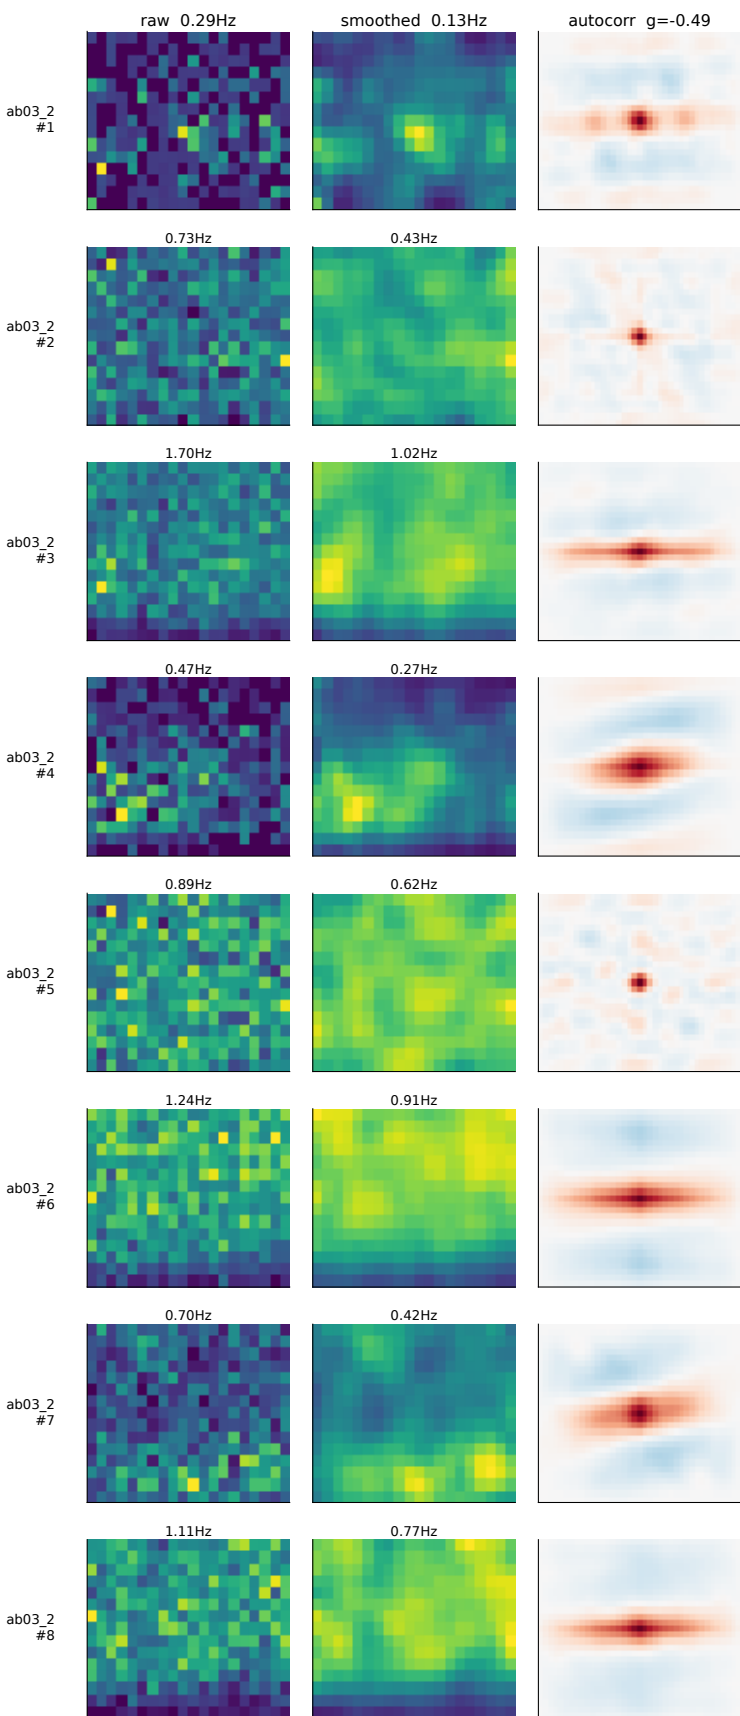


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

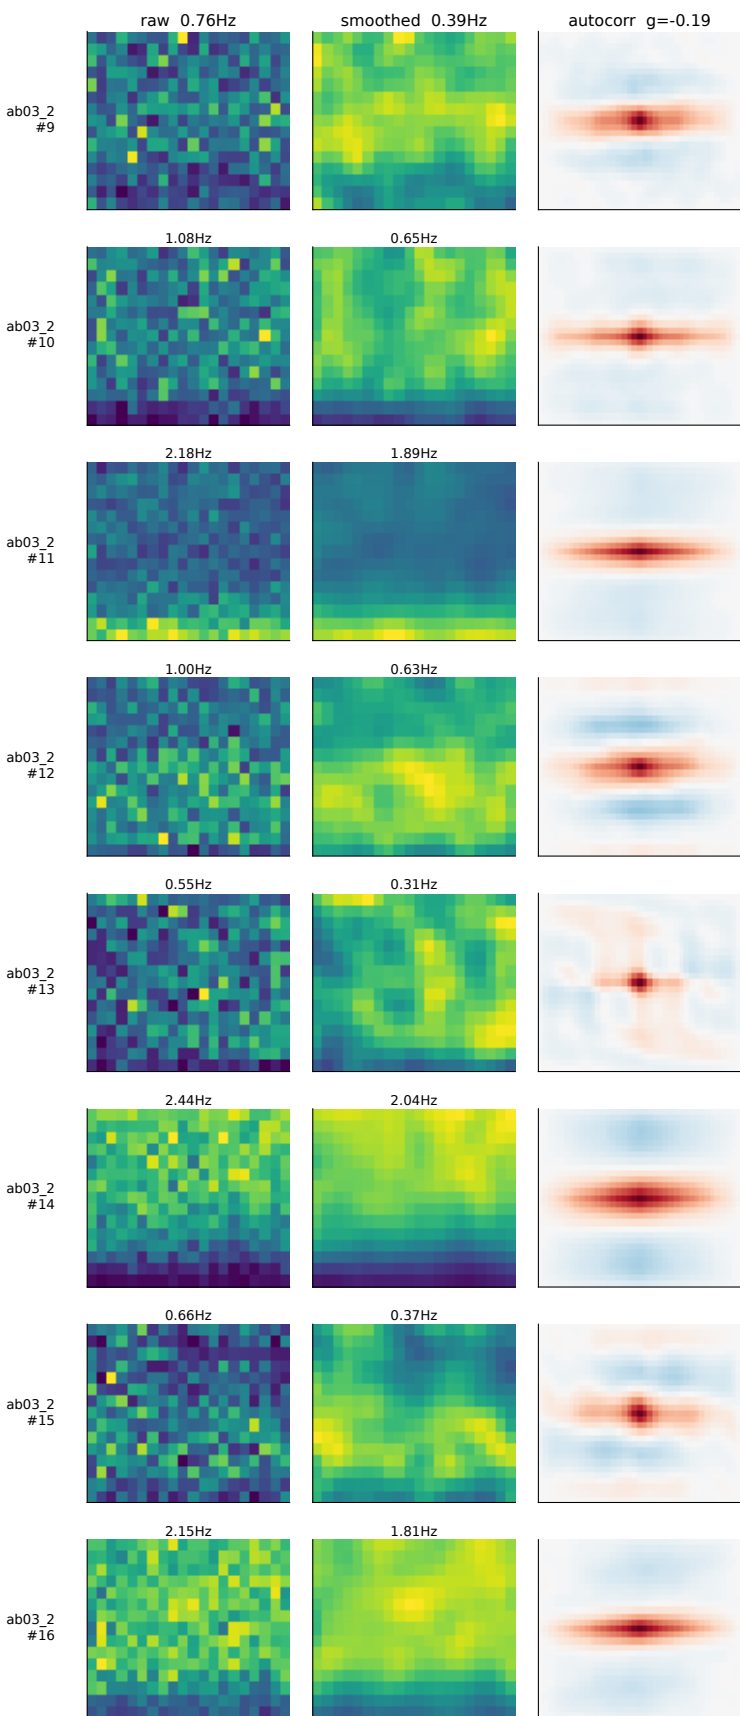


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

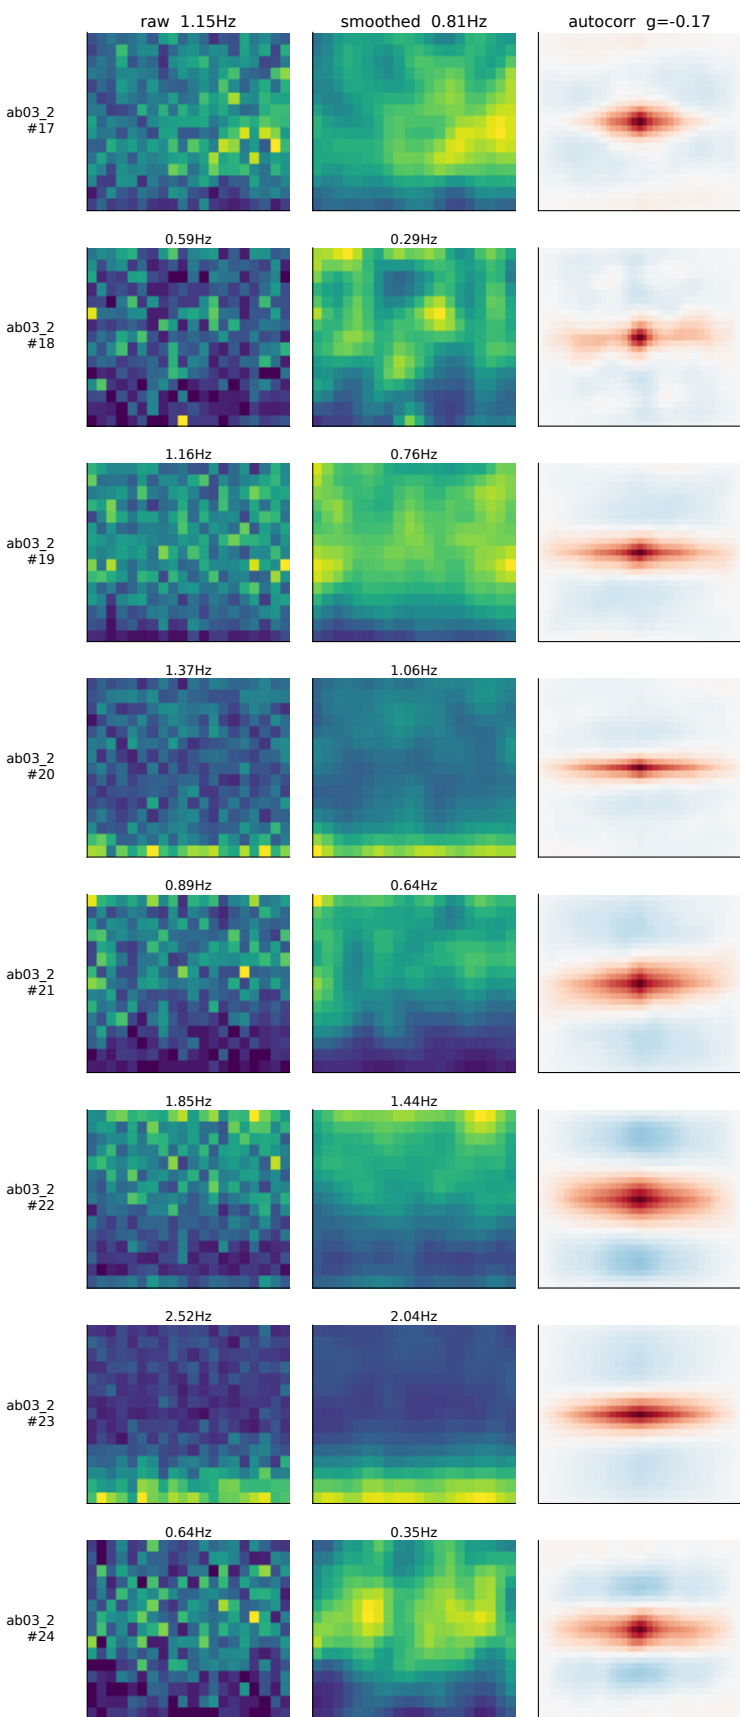


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

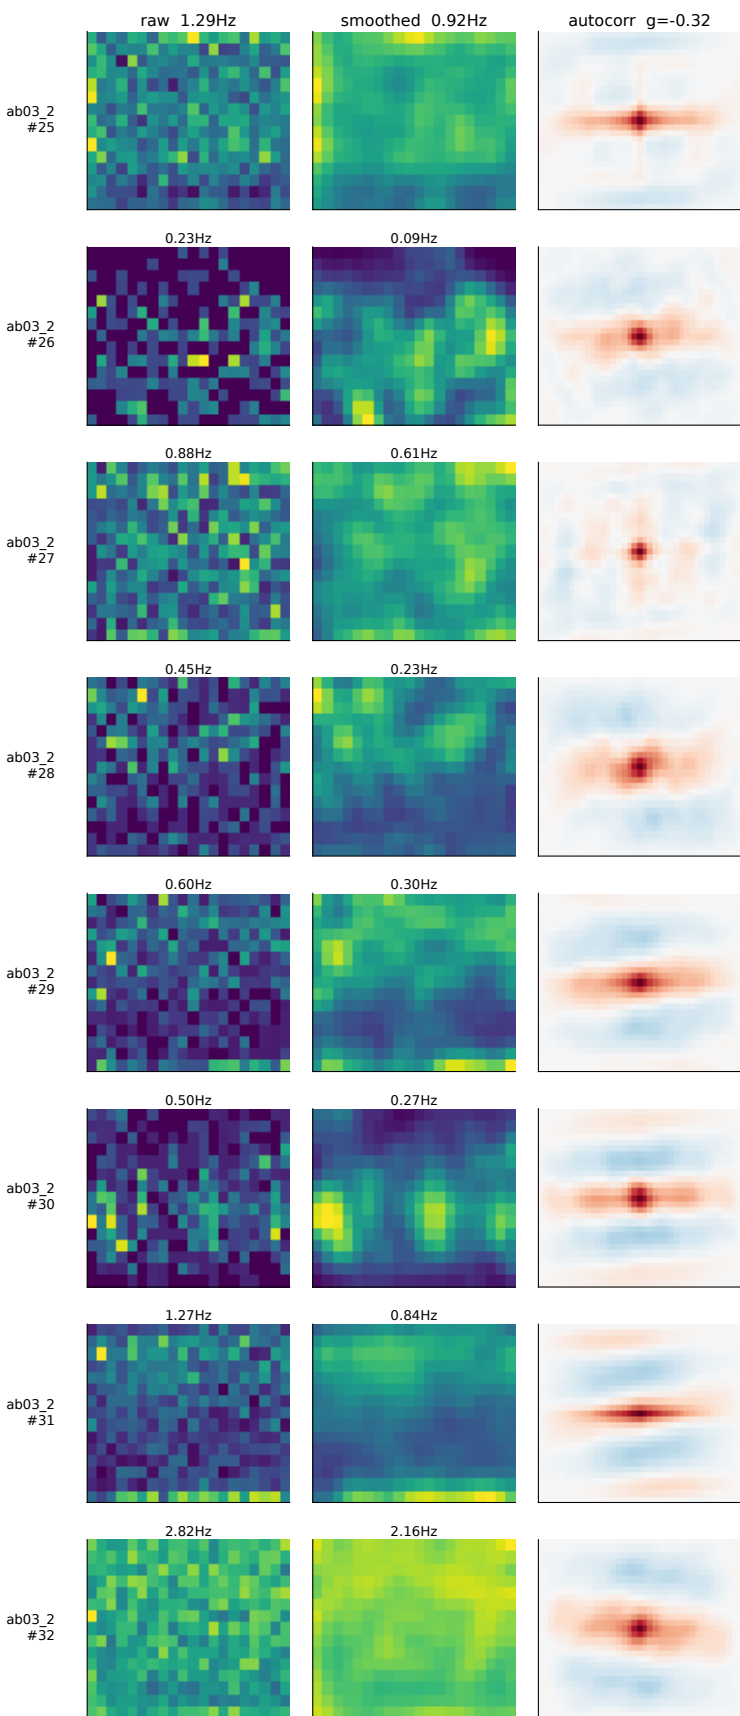


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro:
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

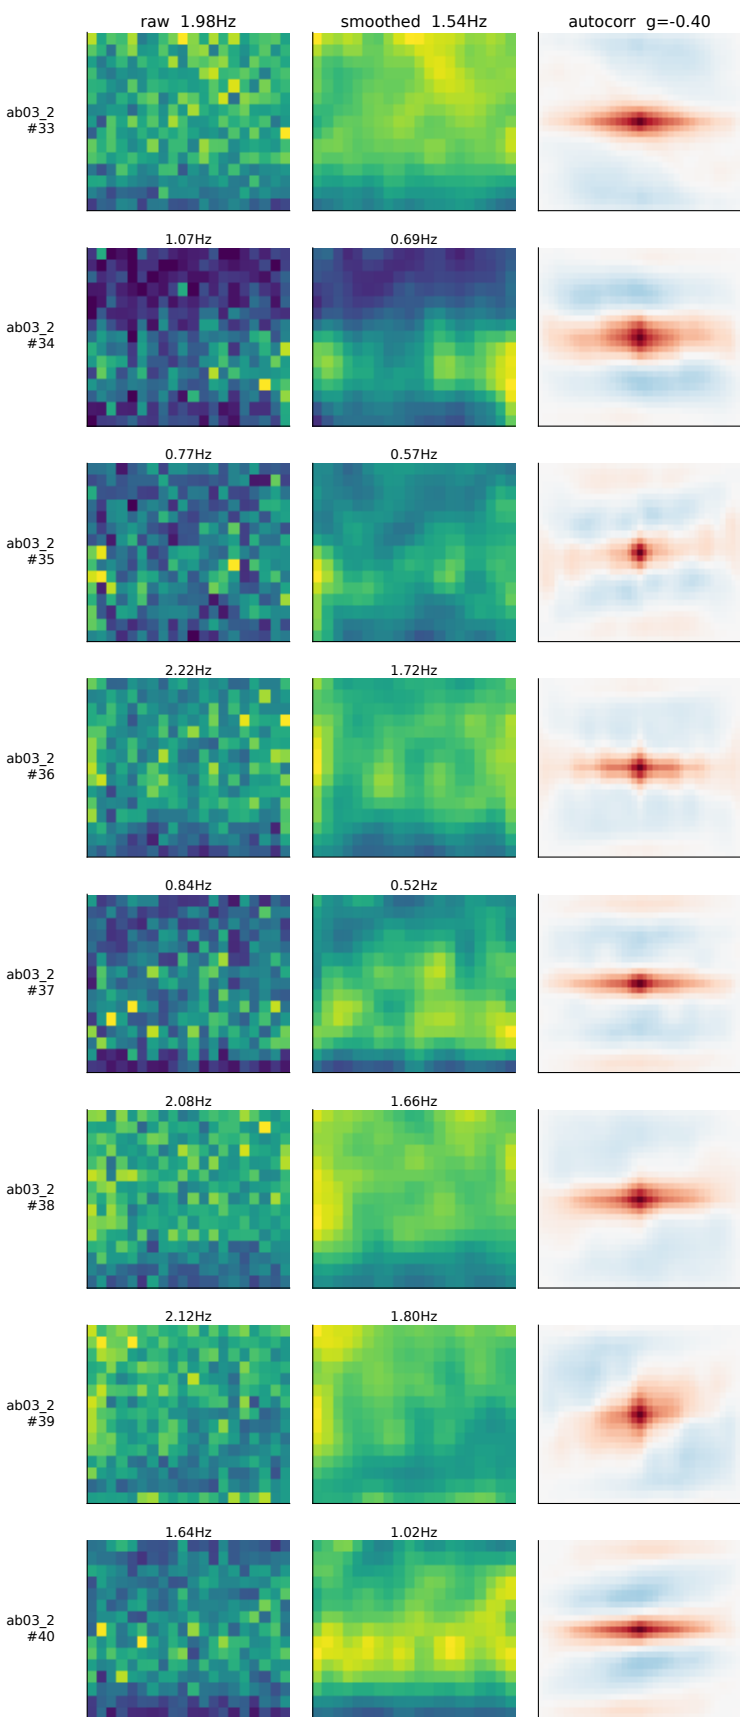


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

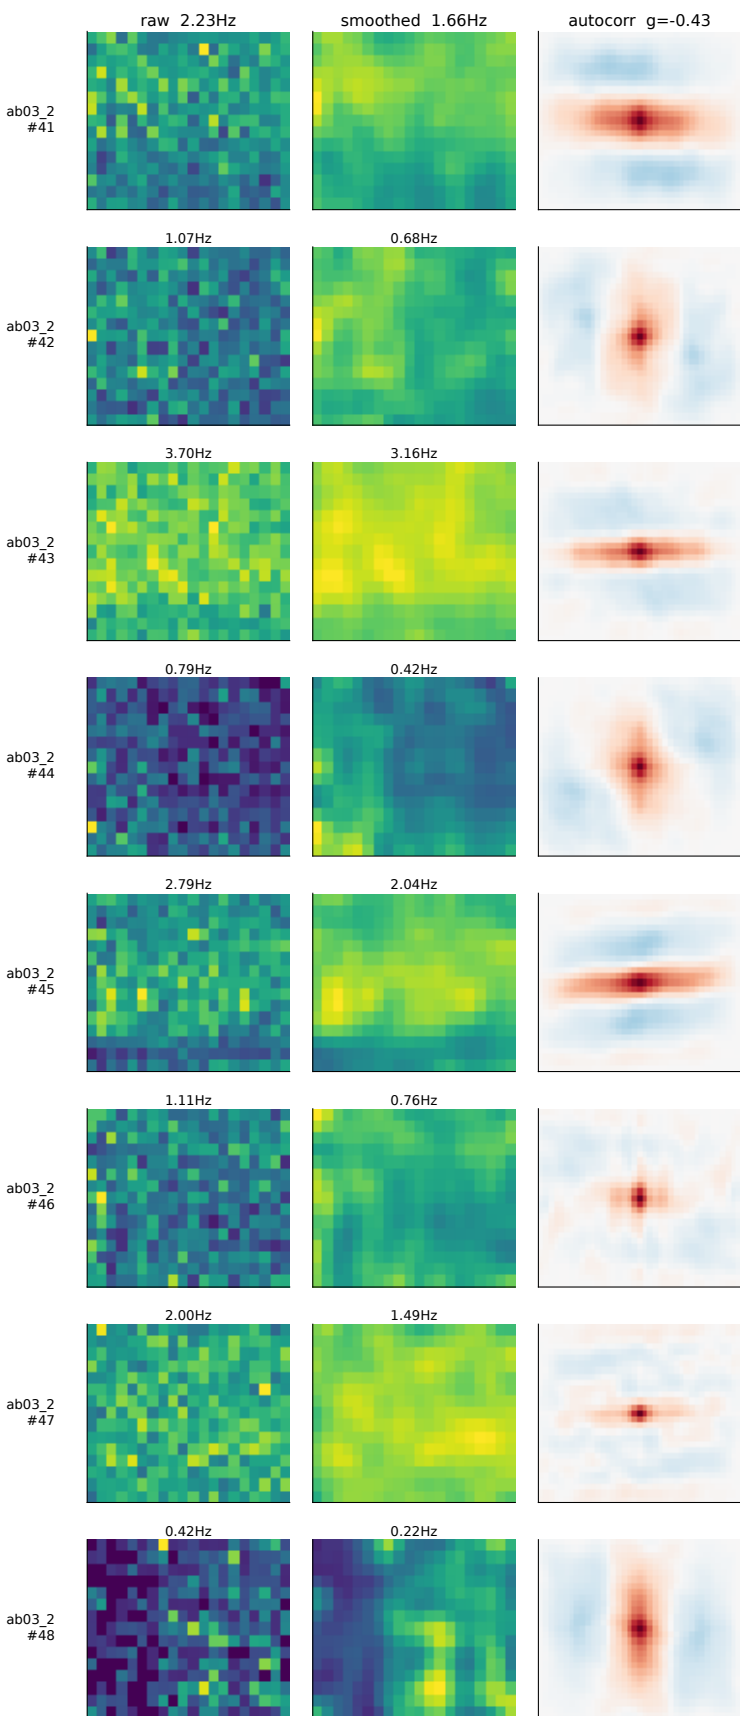


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

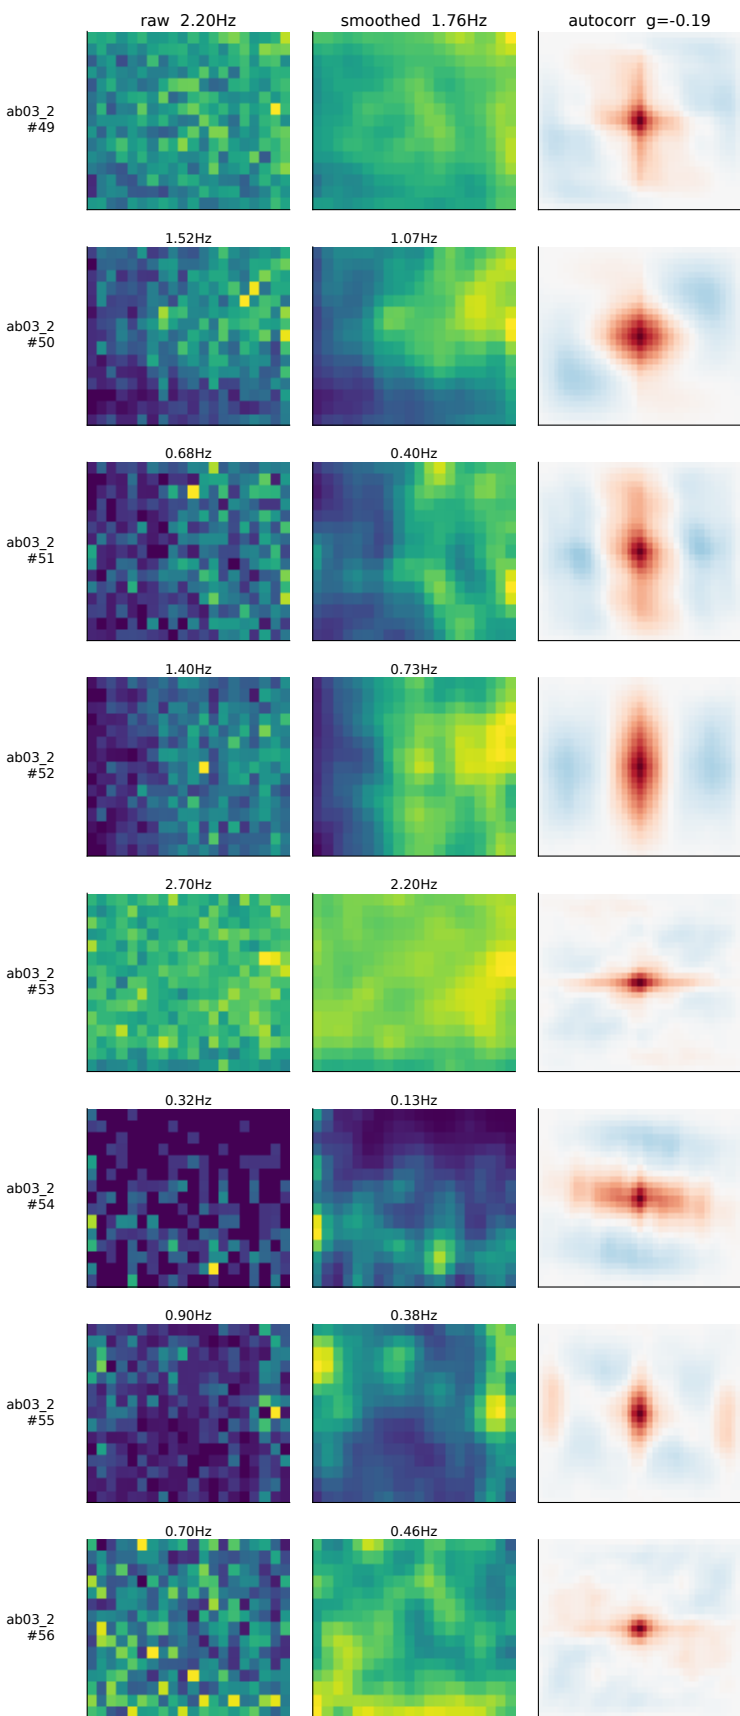


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

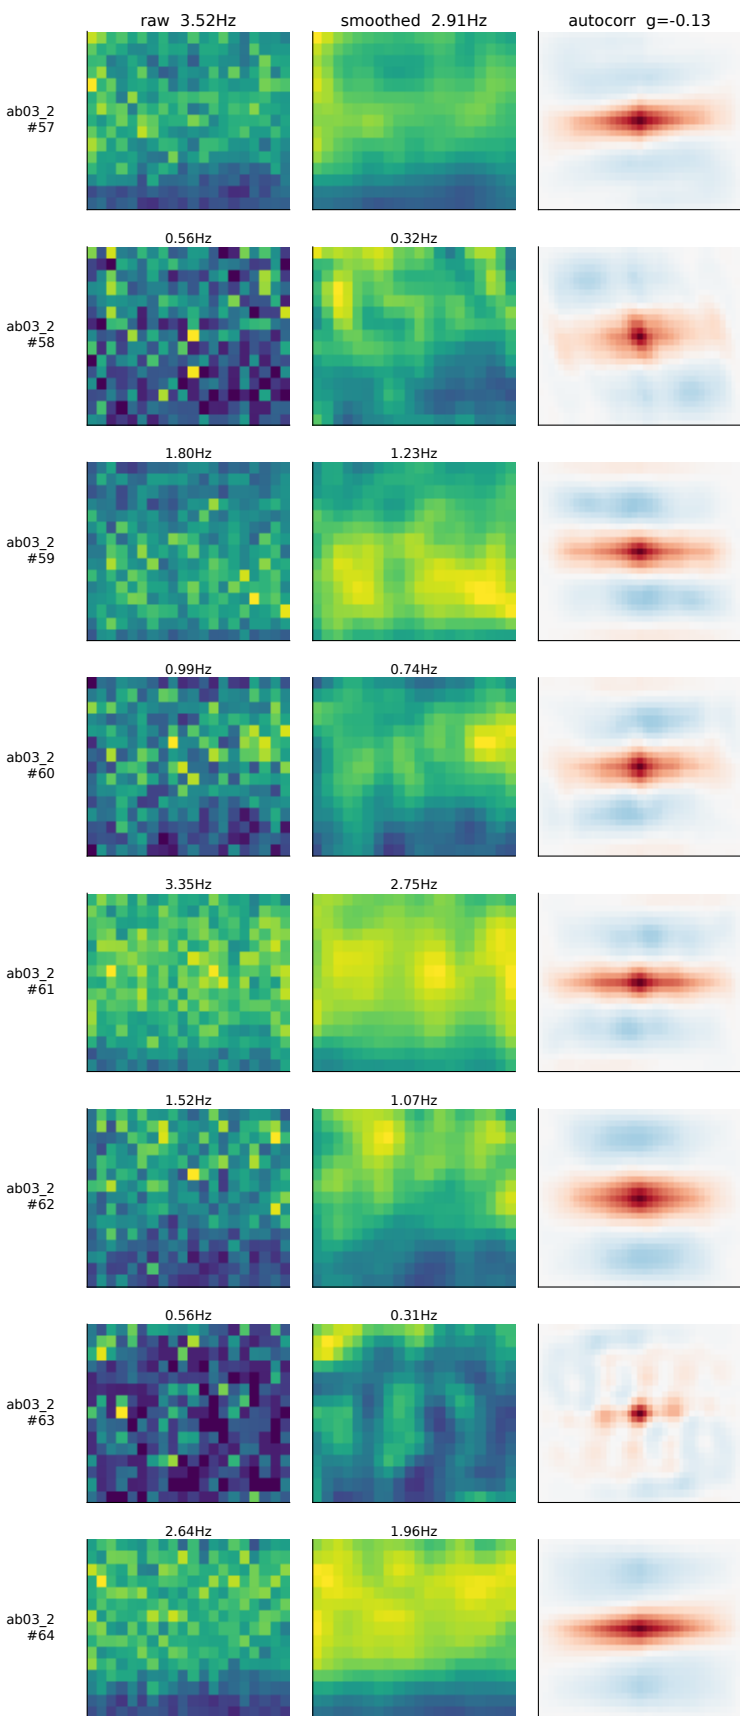


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

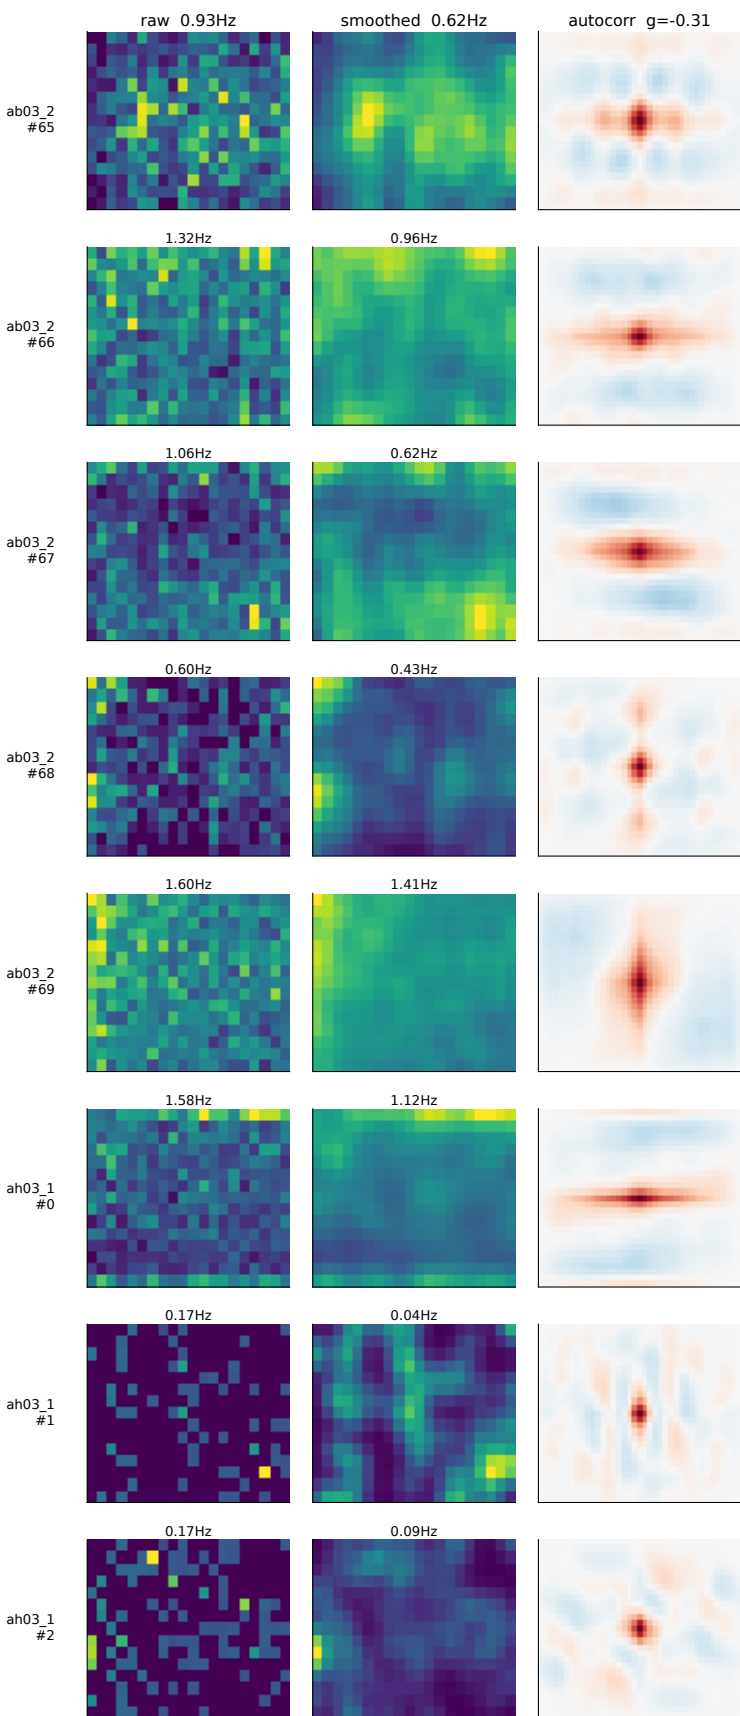


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

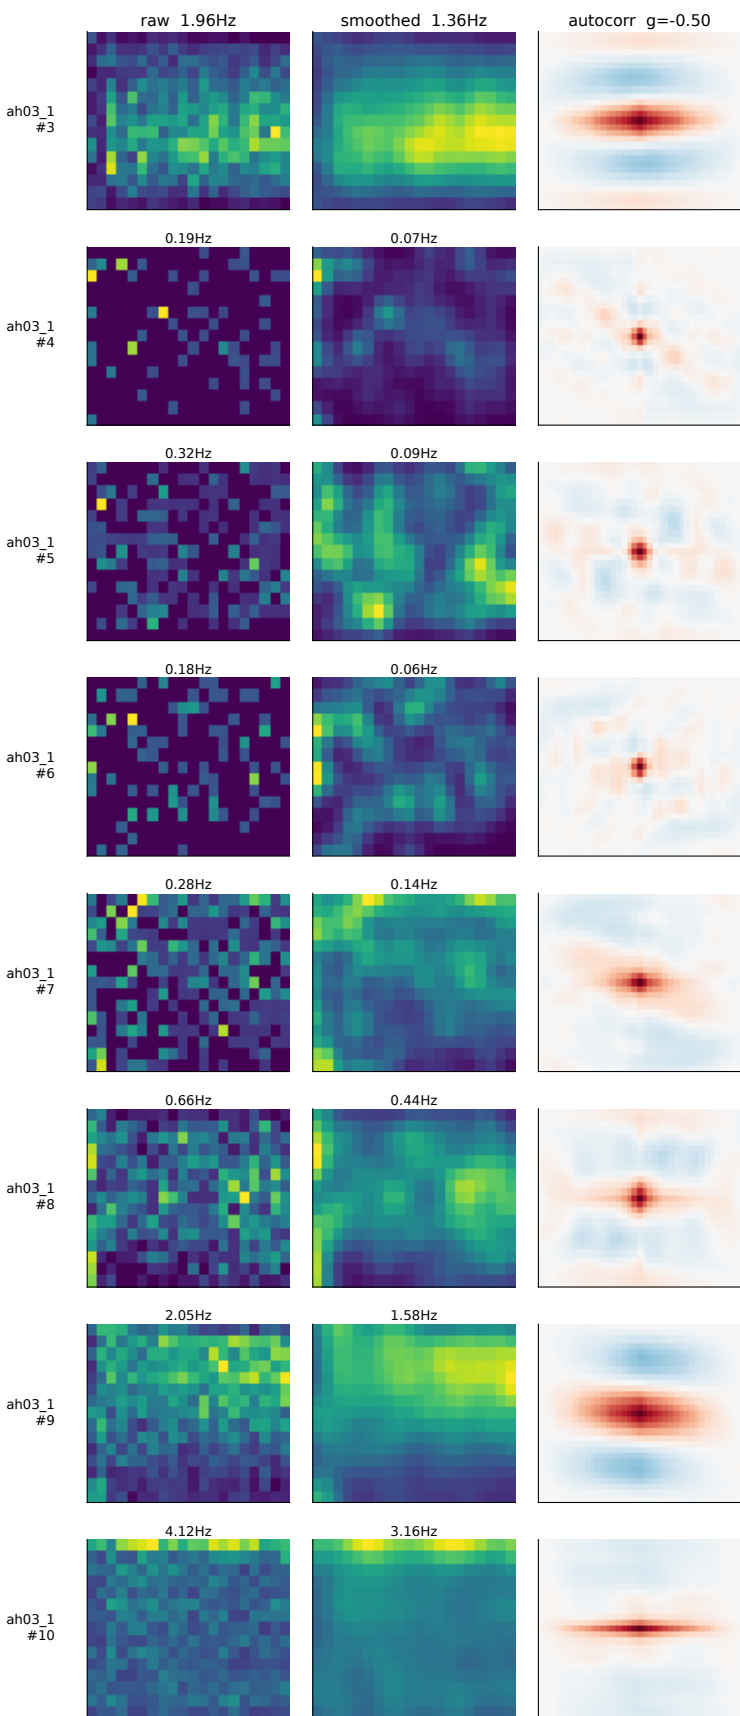


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
own beside smoothed because smoothing can create structure; no reliability measure or null is co

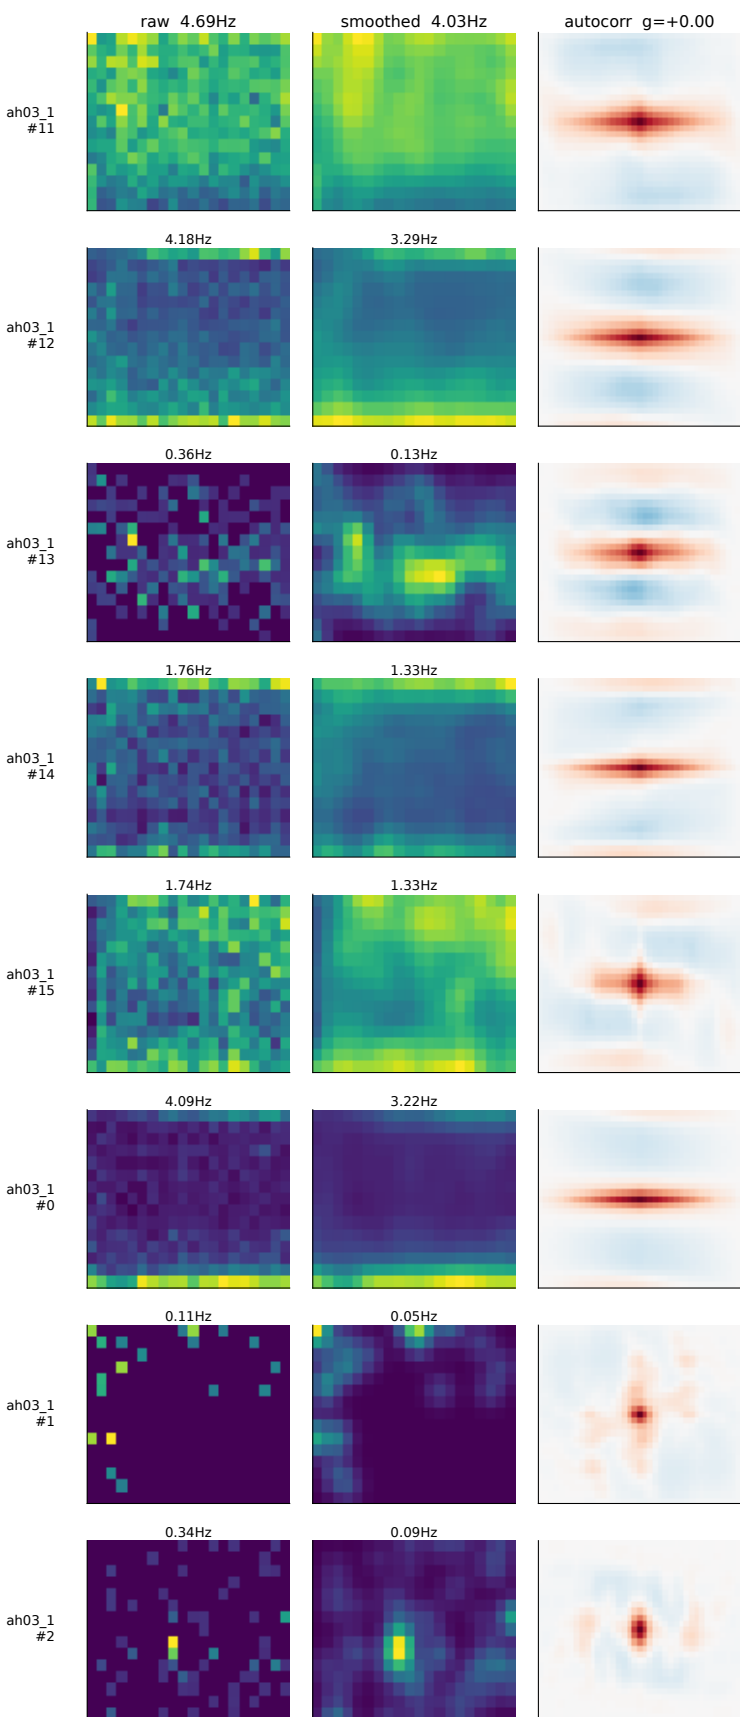


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons shown beside smoothed because smoothing can create structure; no reliability measure or null is co

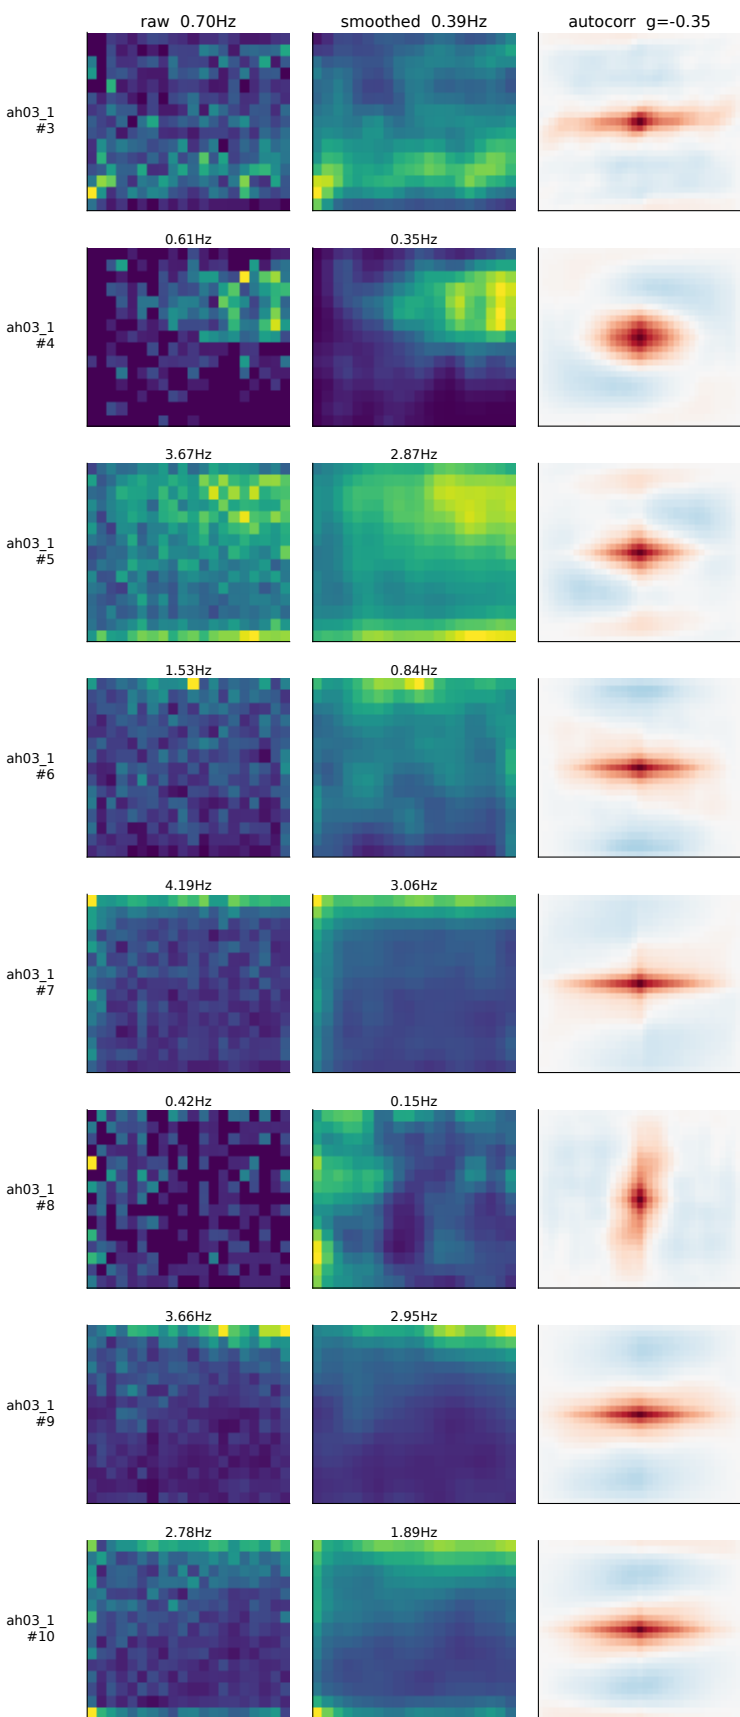


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

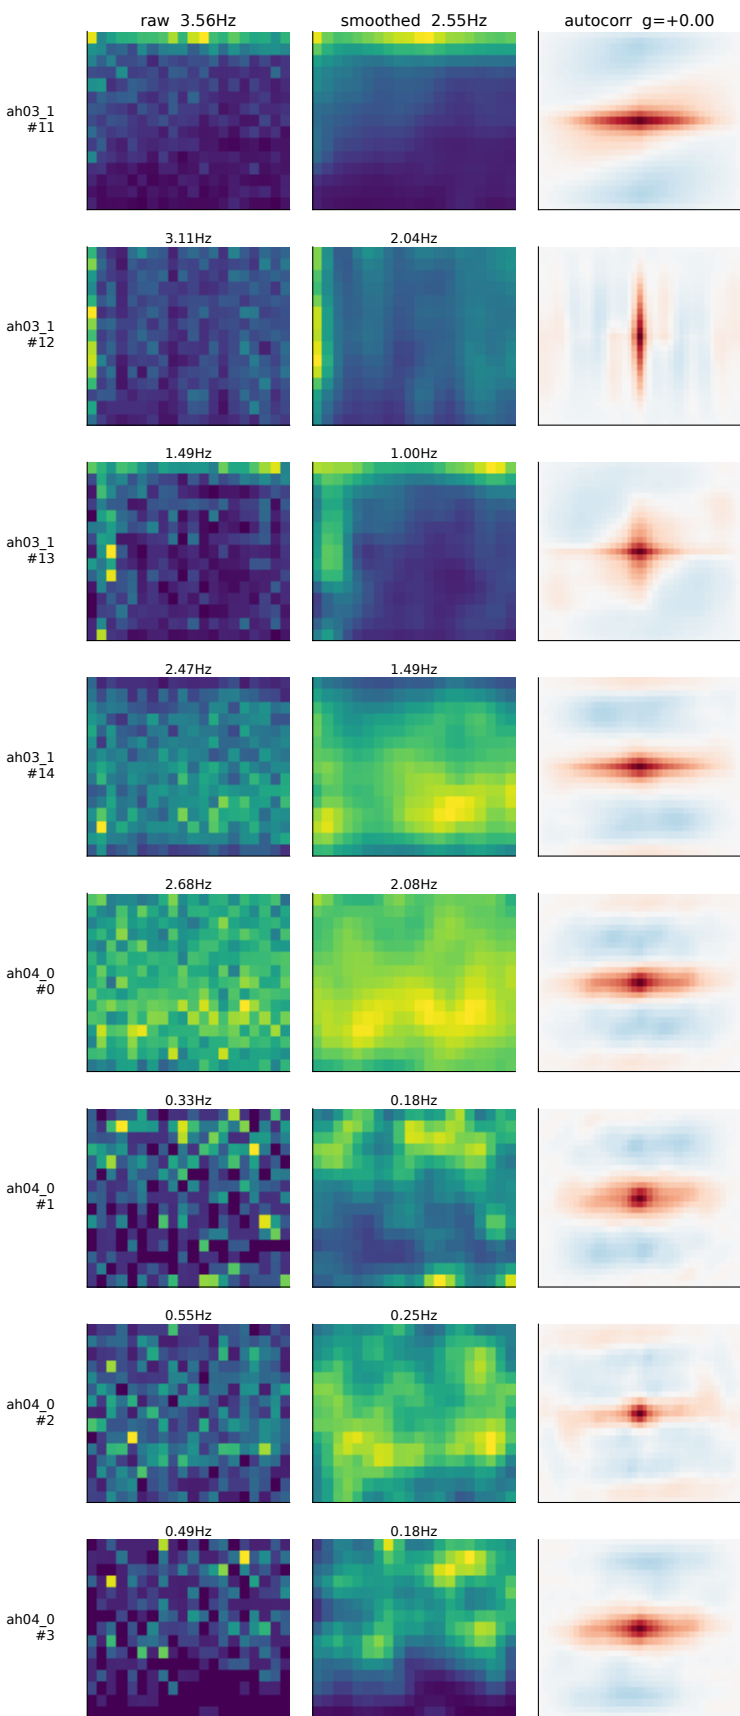


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

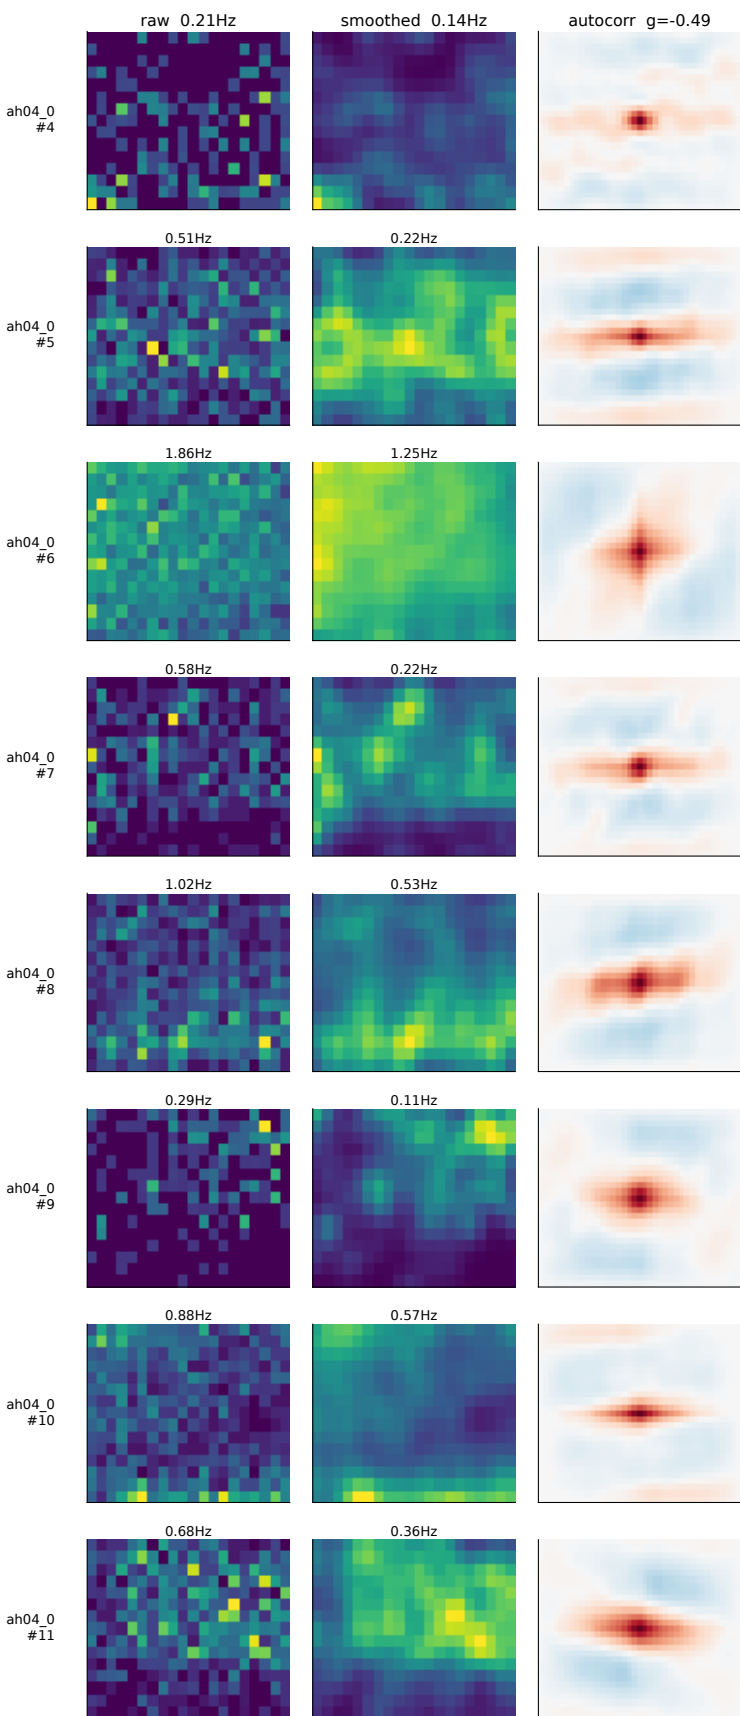


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

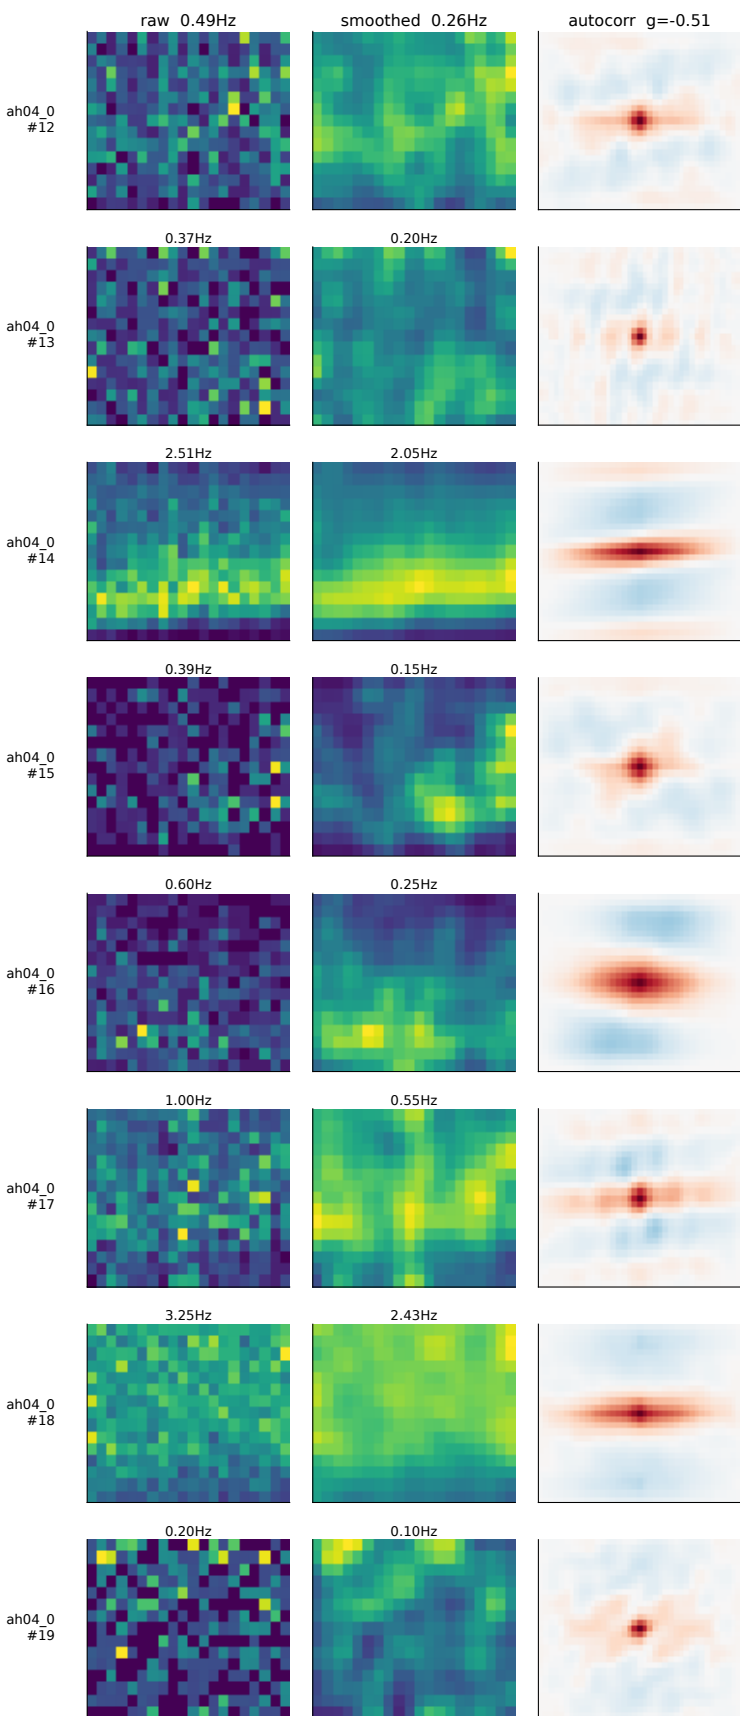


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

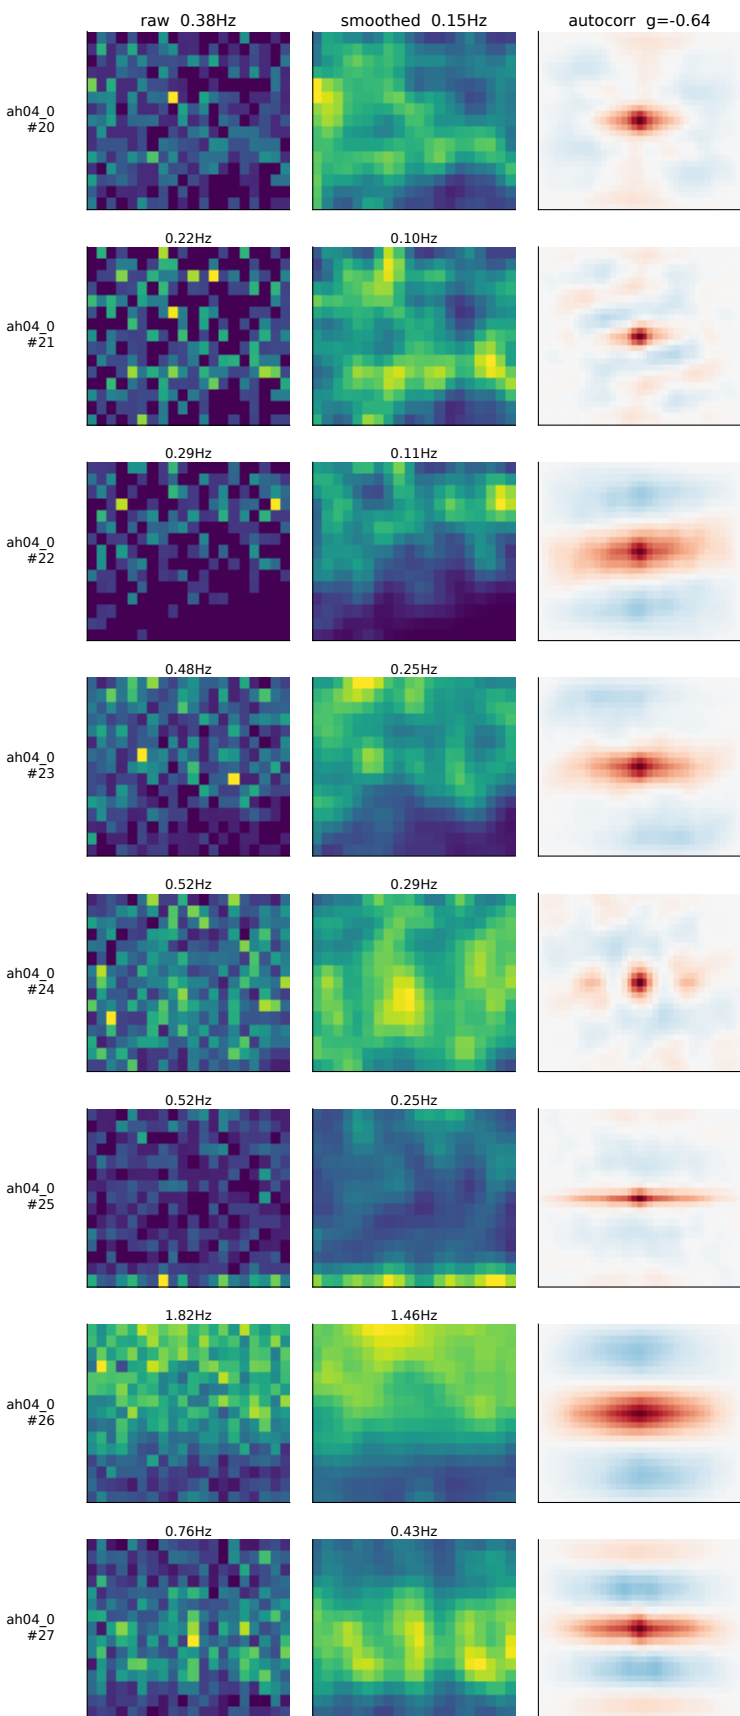


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

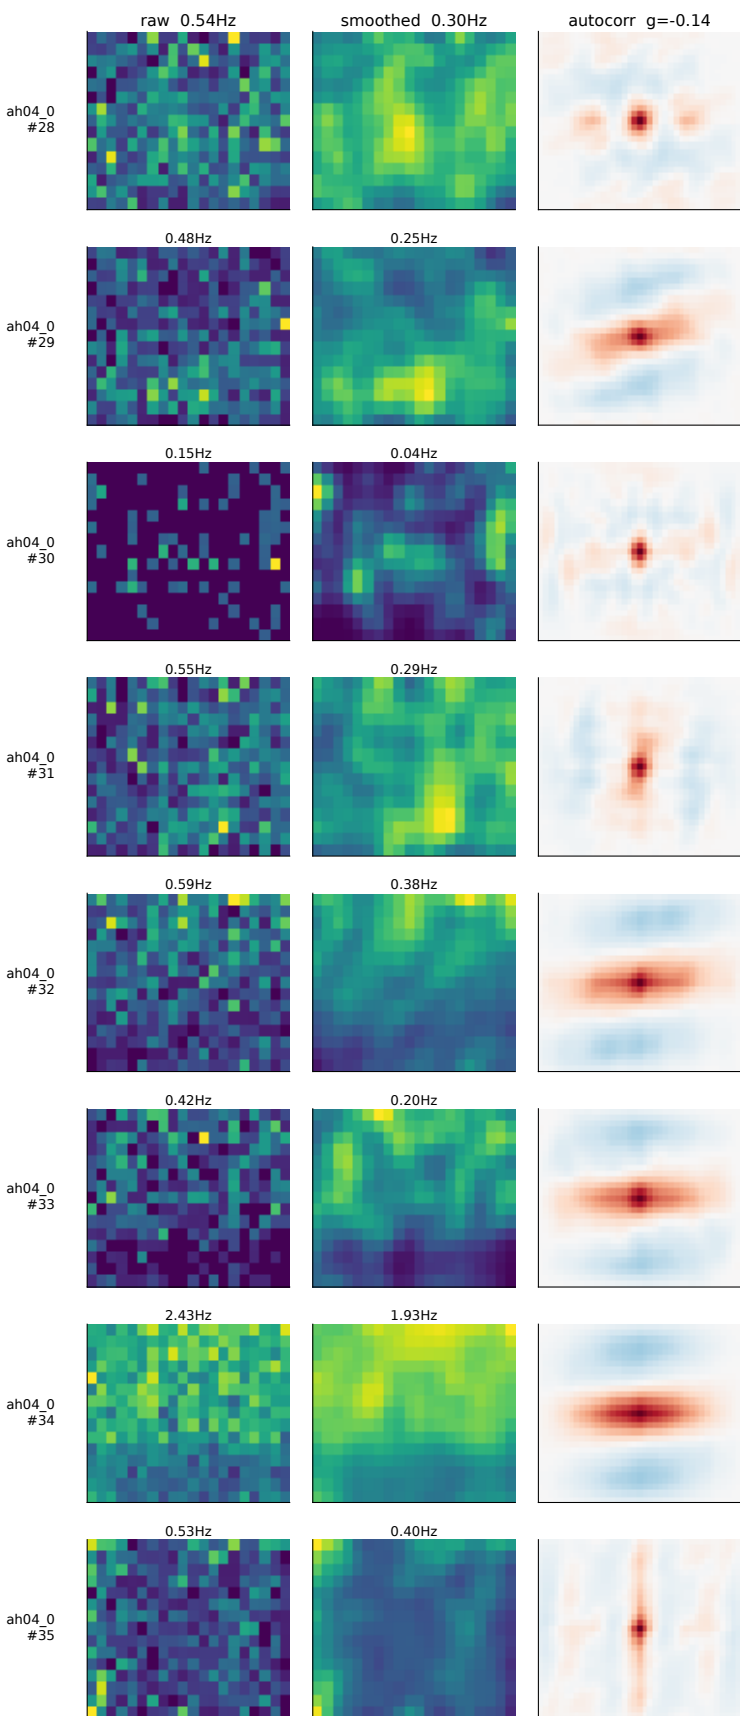


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

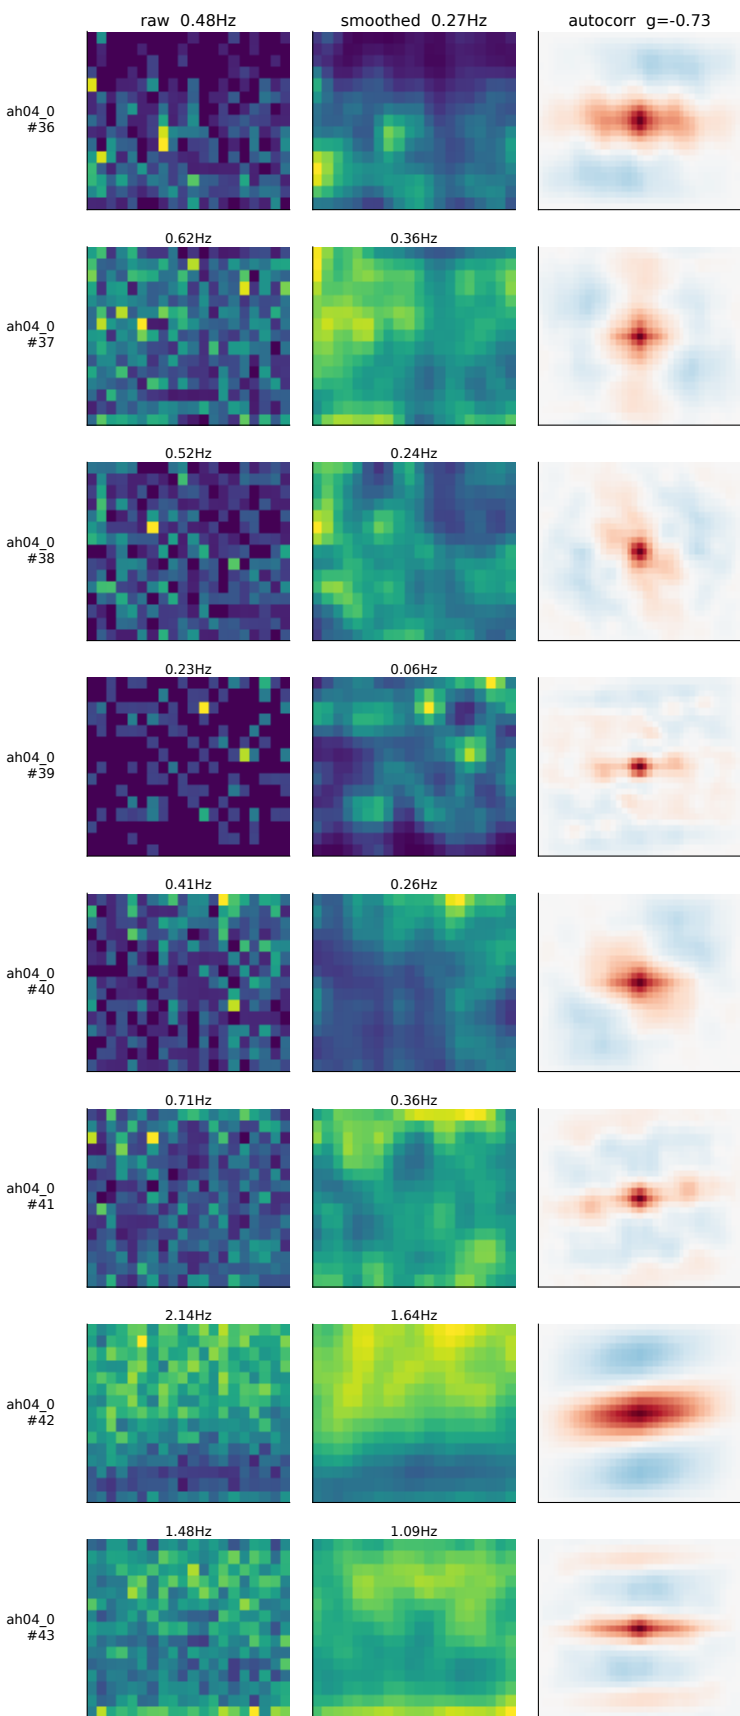


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

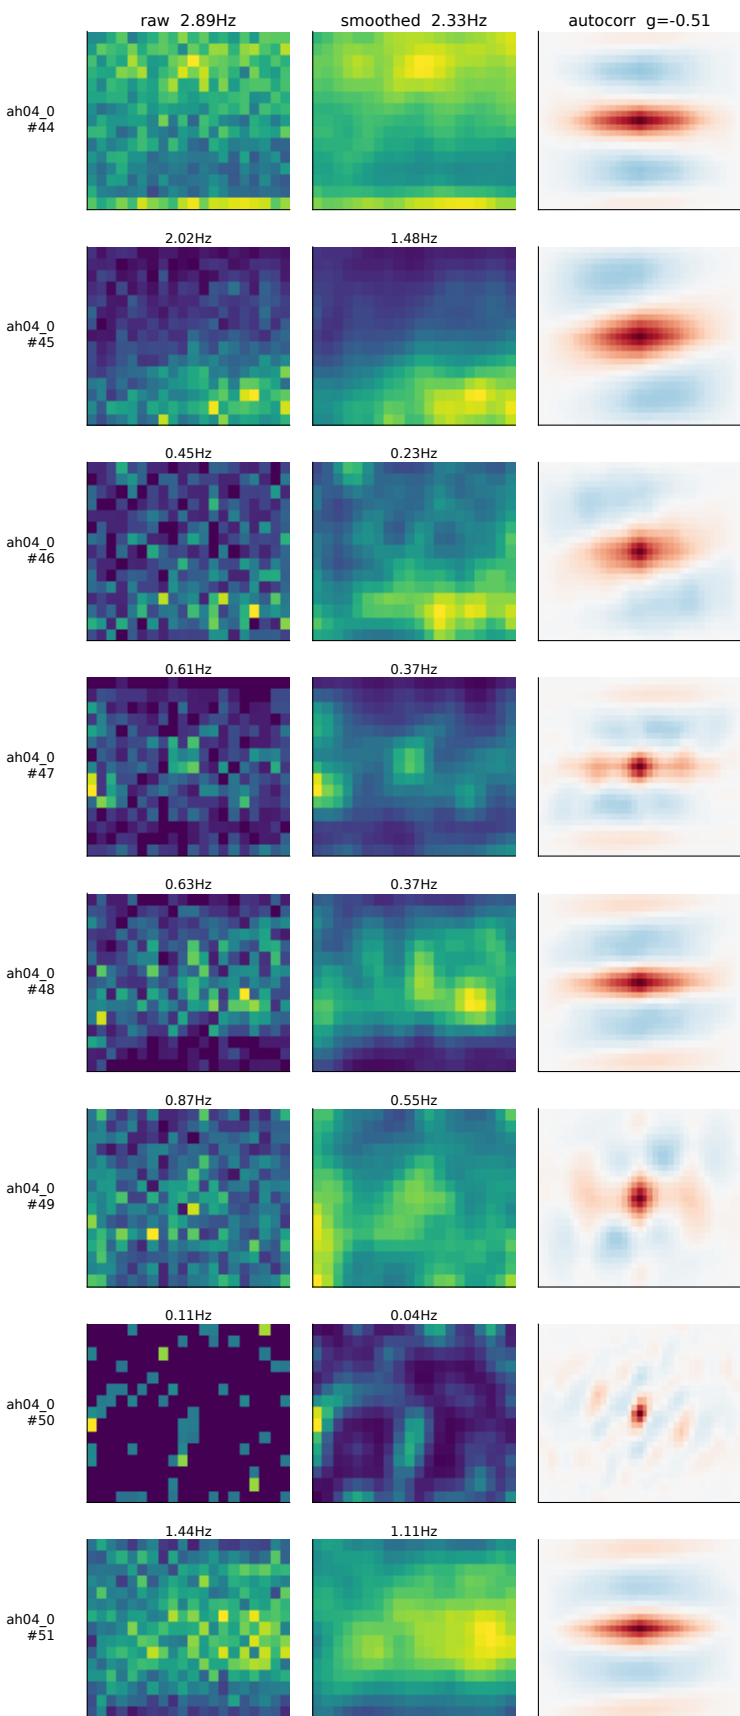


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

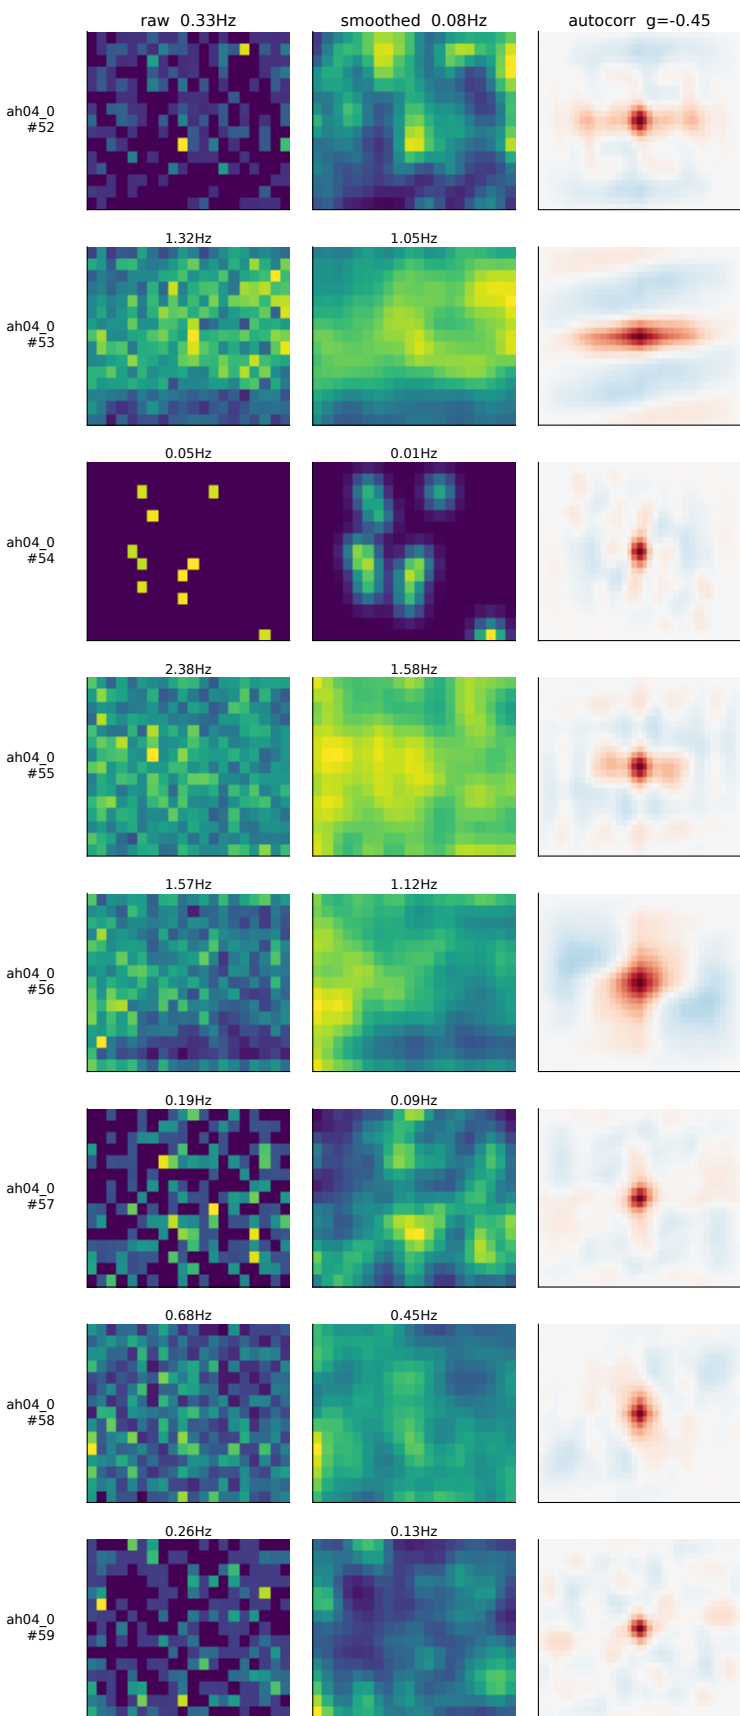


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

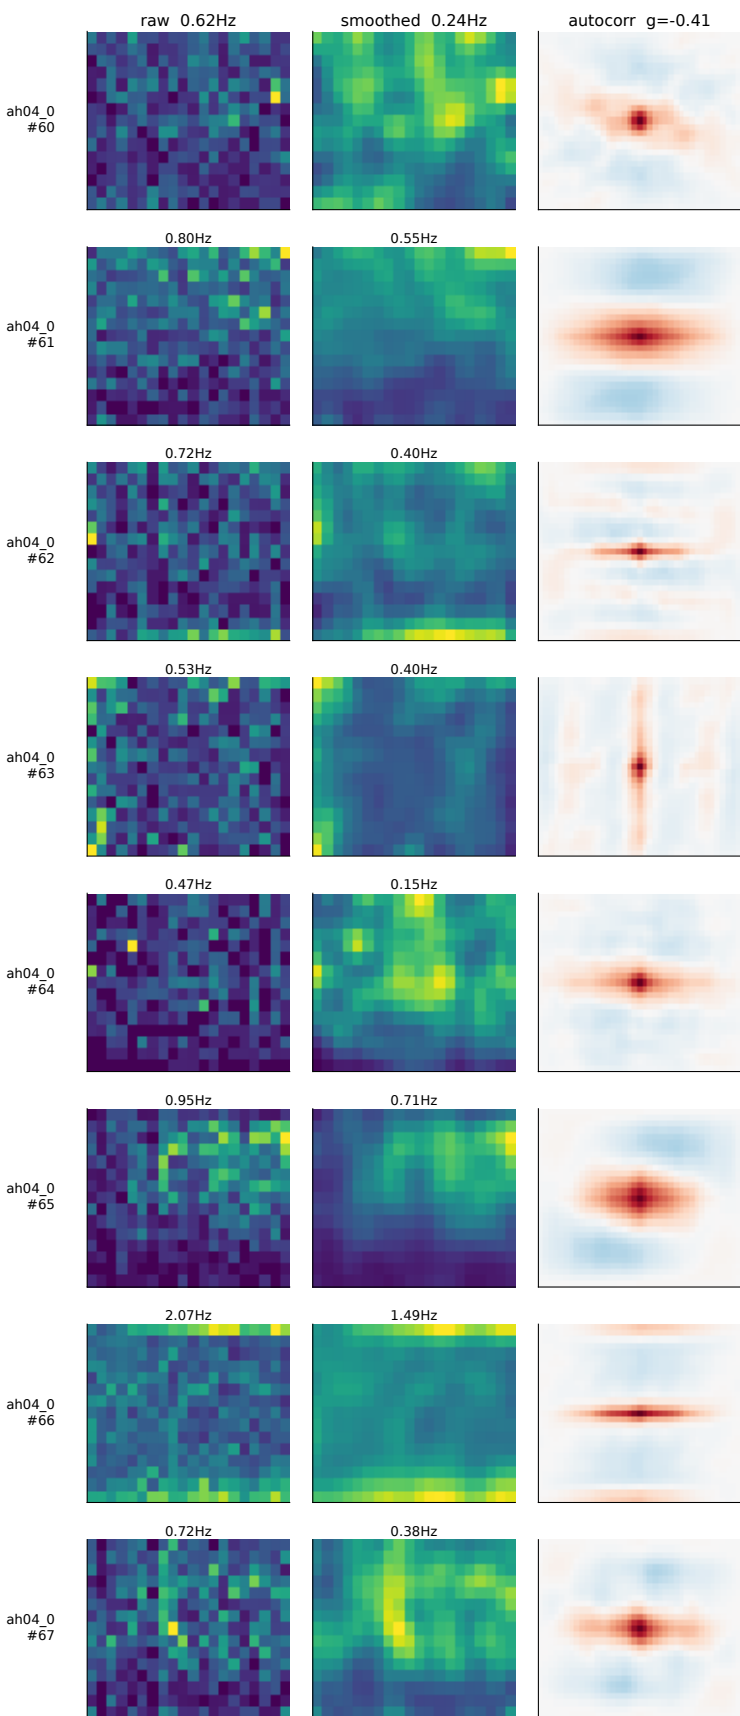


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

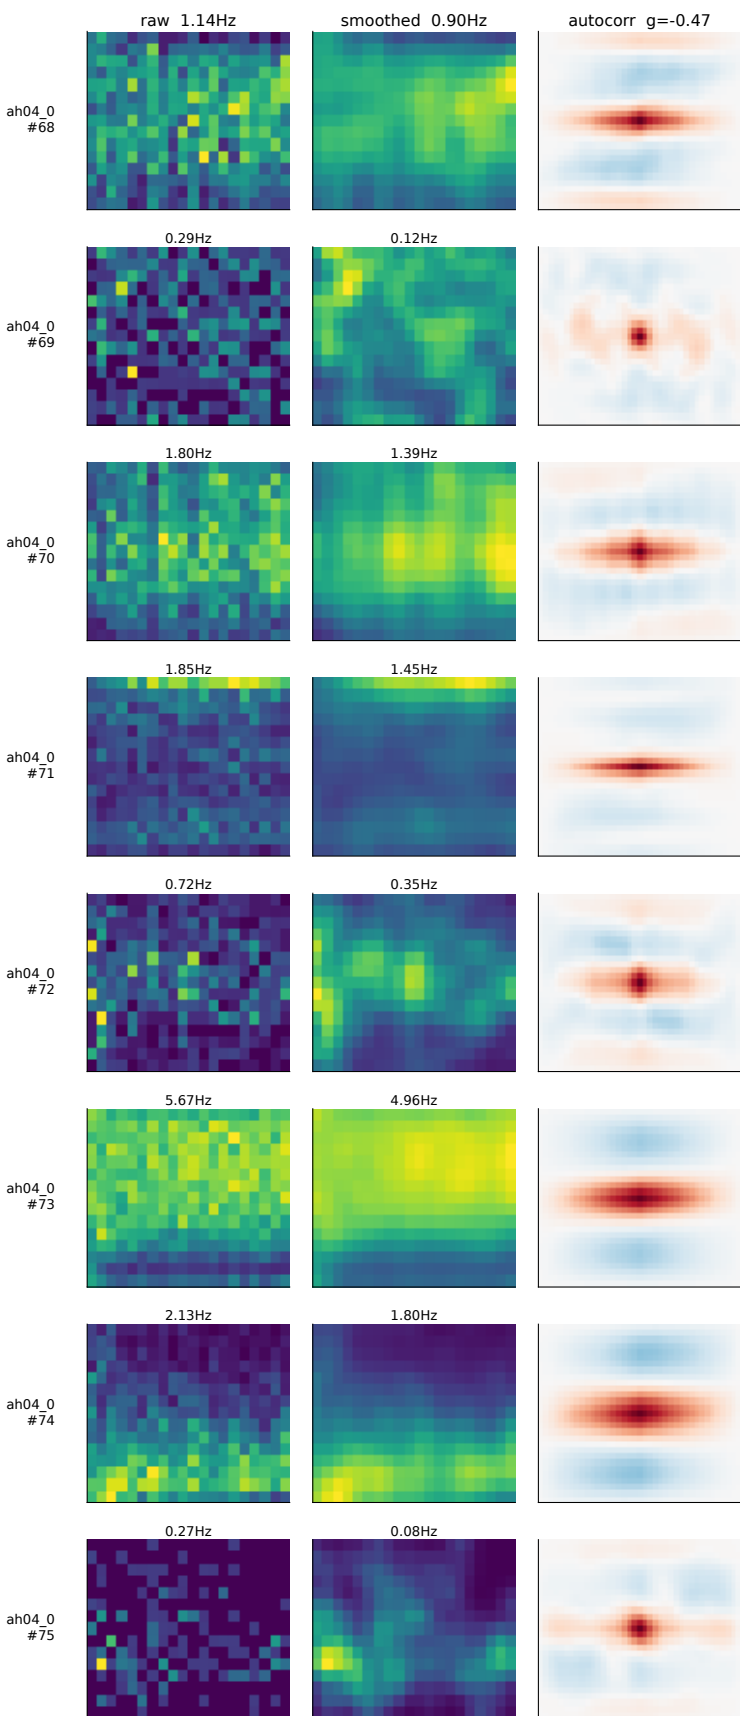


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

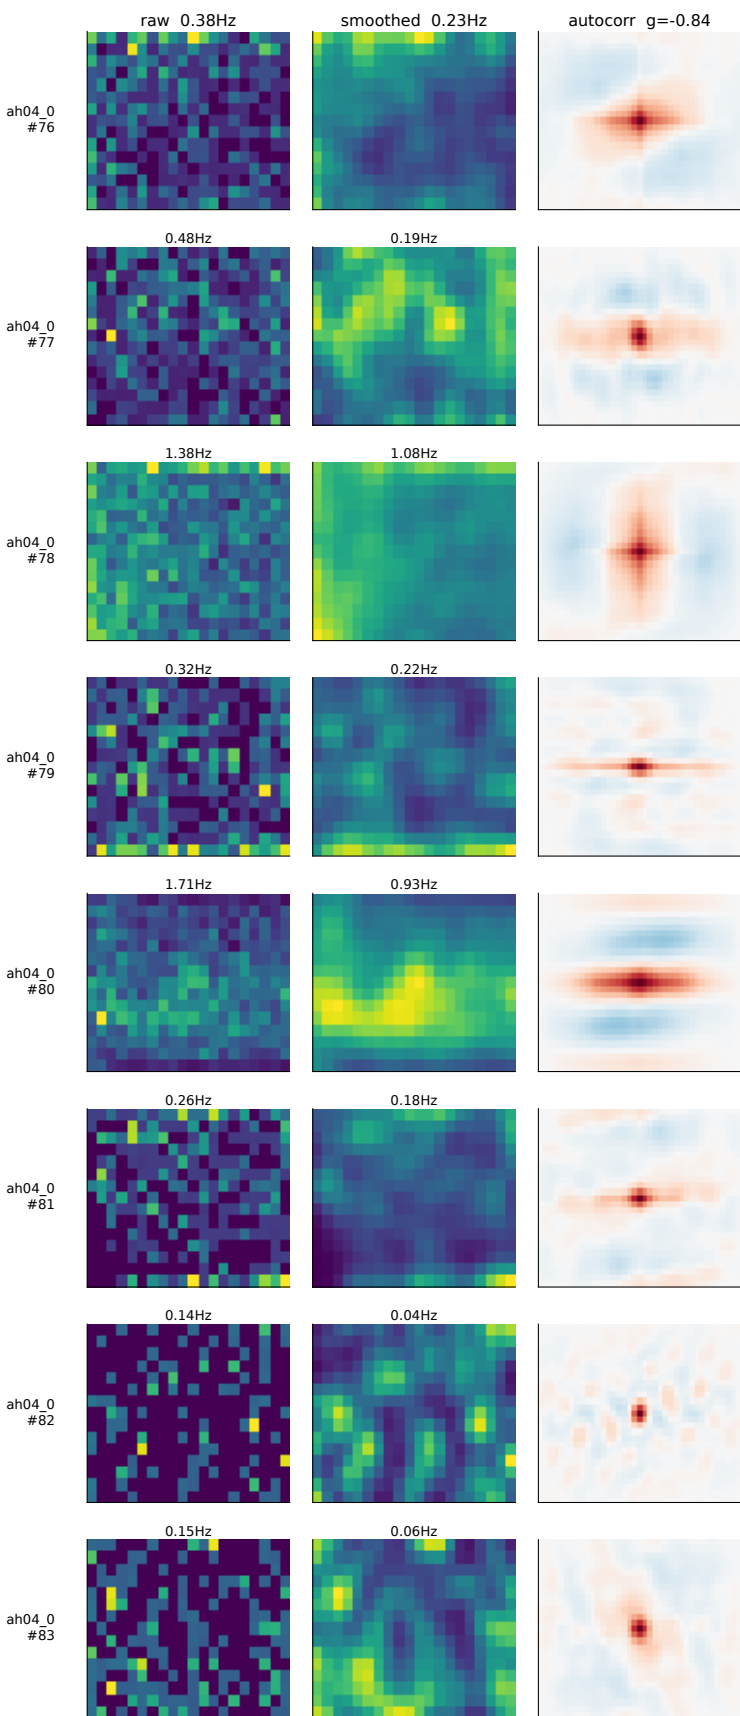


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

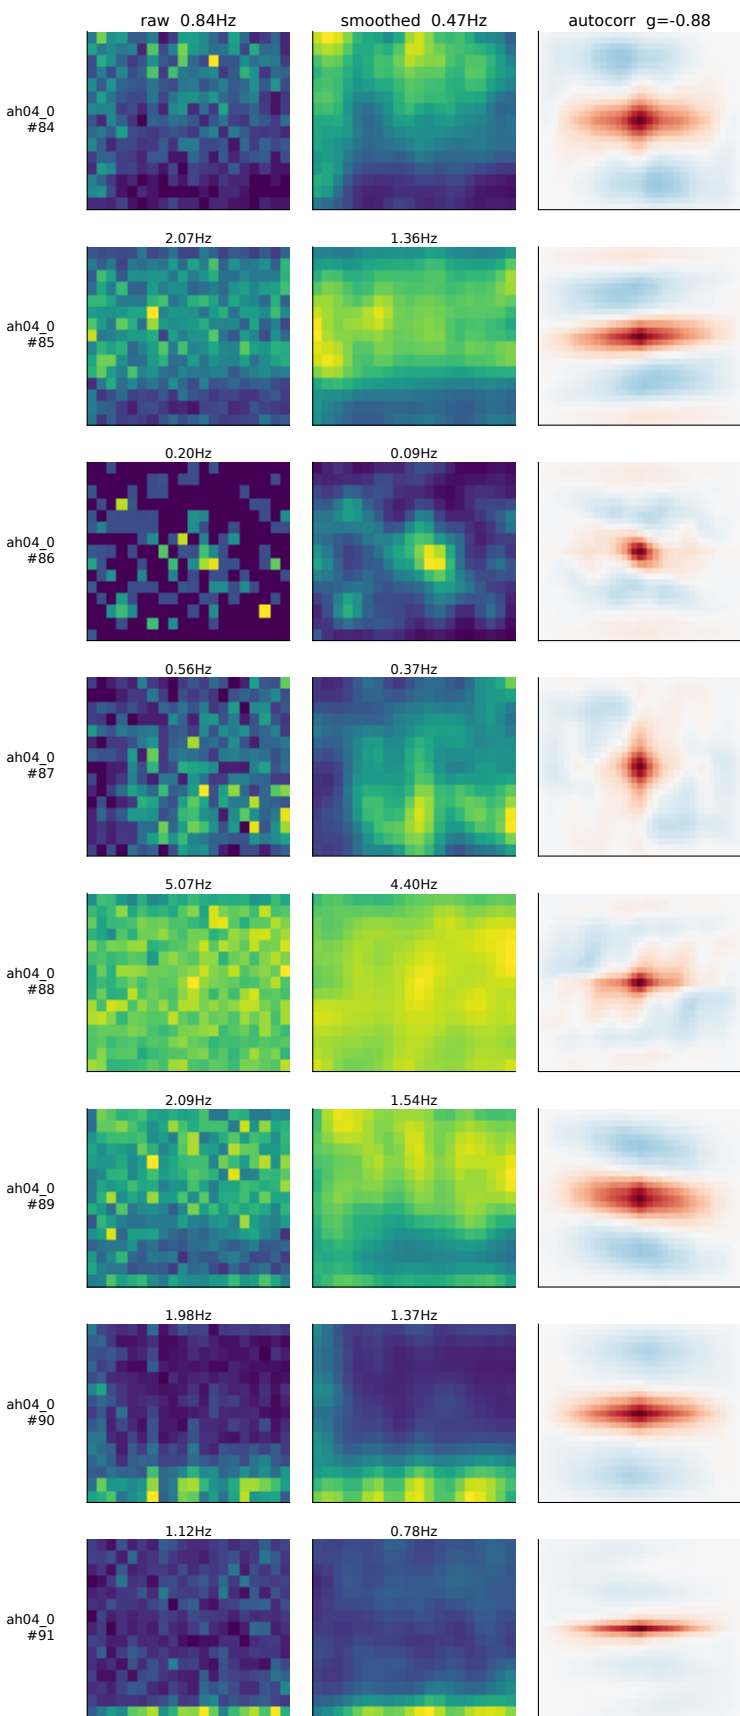


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
own beside smoothed because smoothing can create structure; no reliability measure or null is co

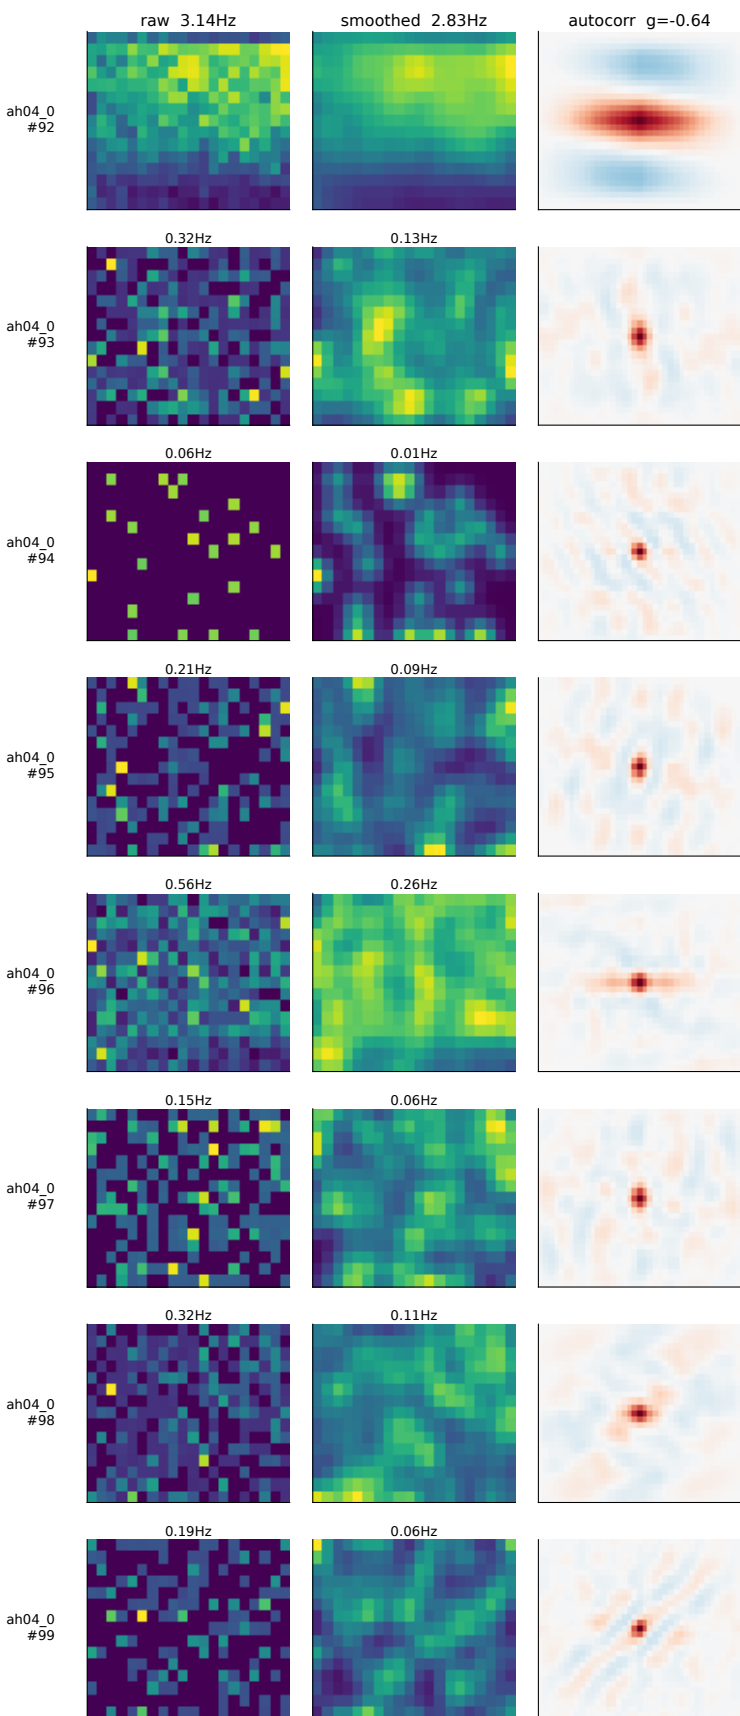


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

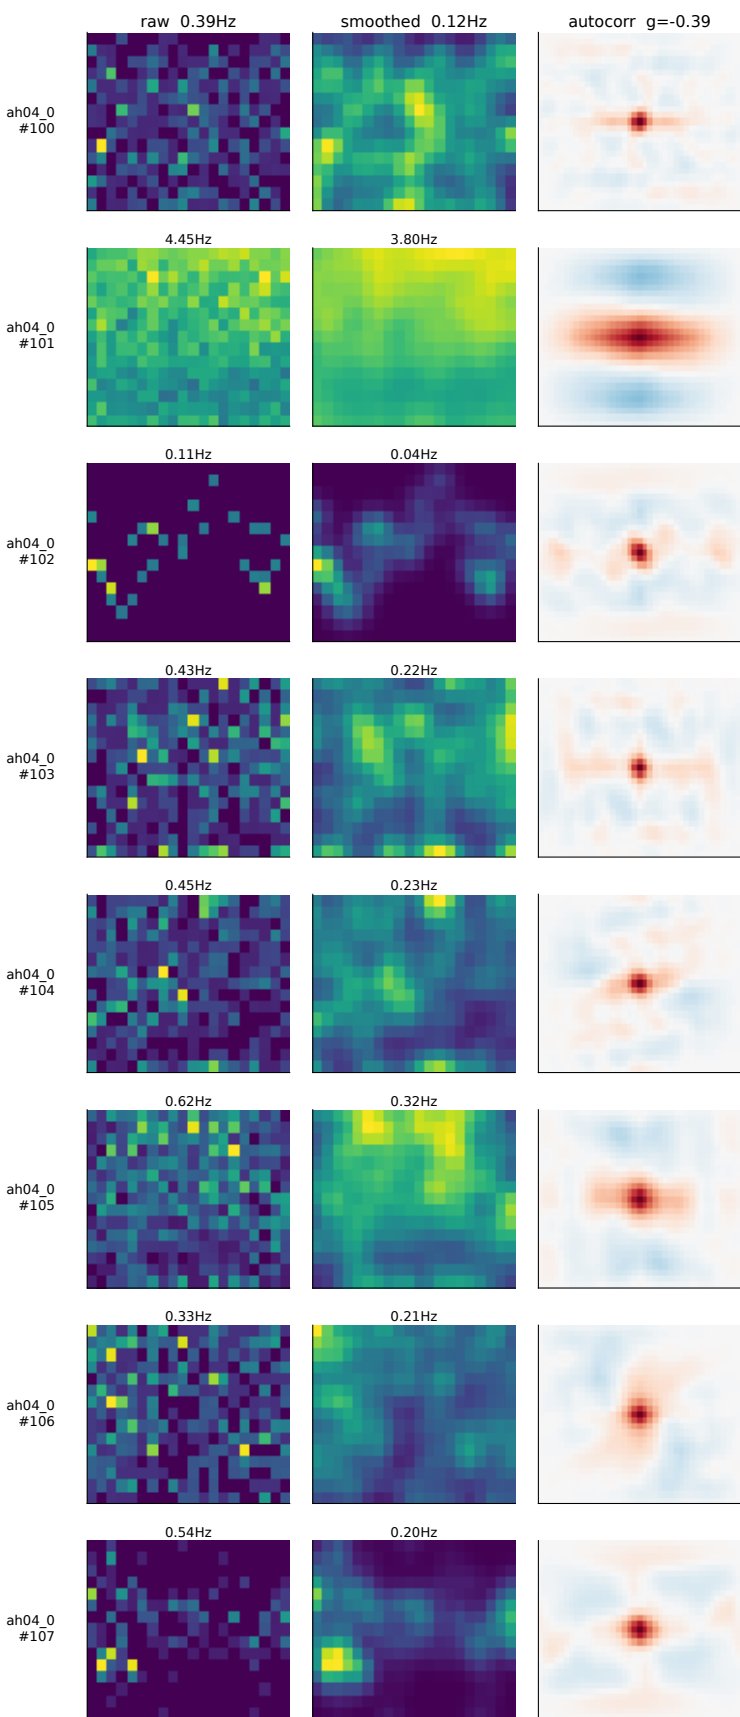


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons shown beside smoothed because smoothing can create structure; no reliability measure or null is co

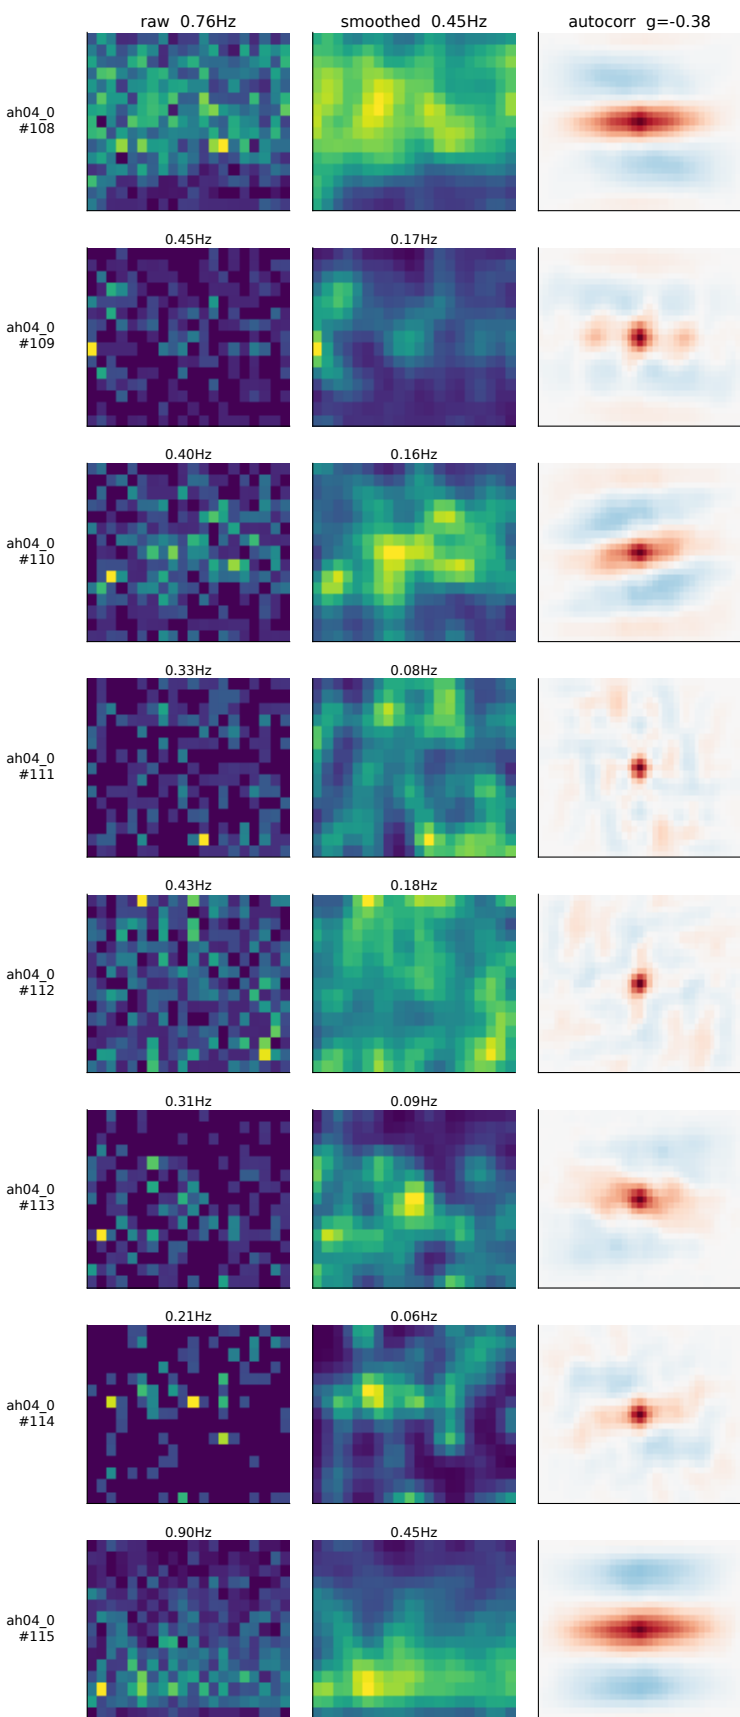


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

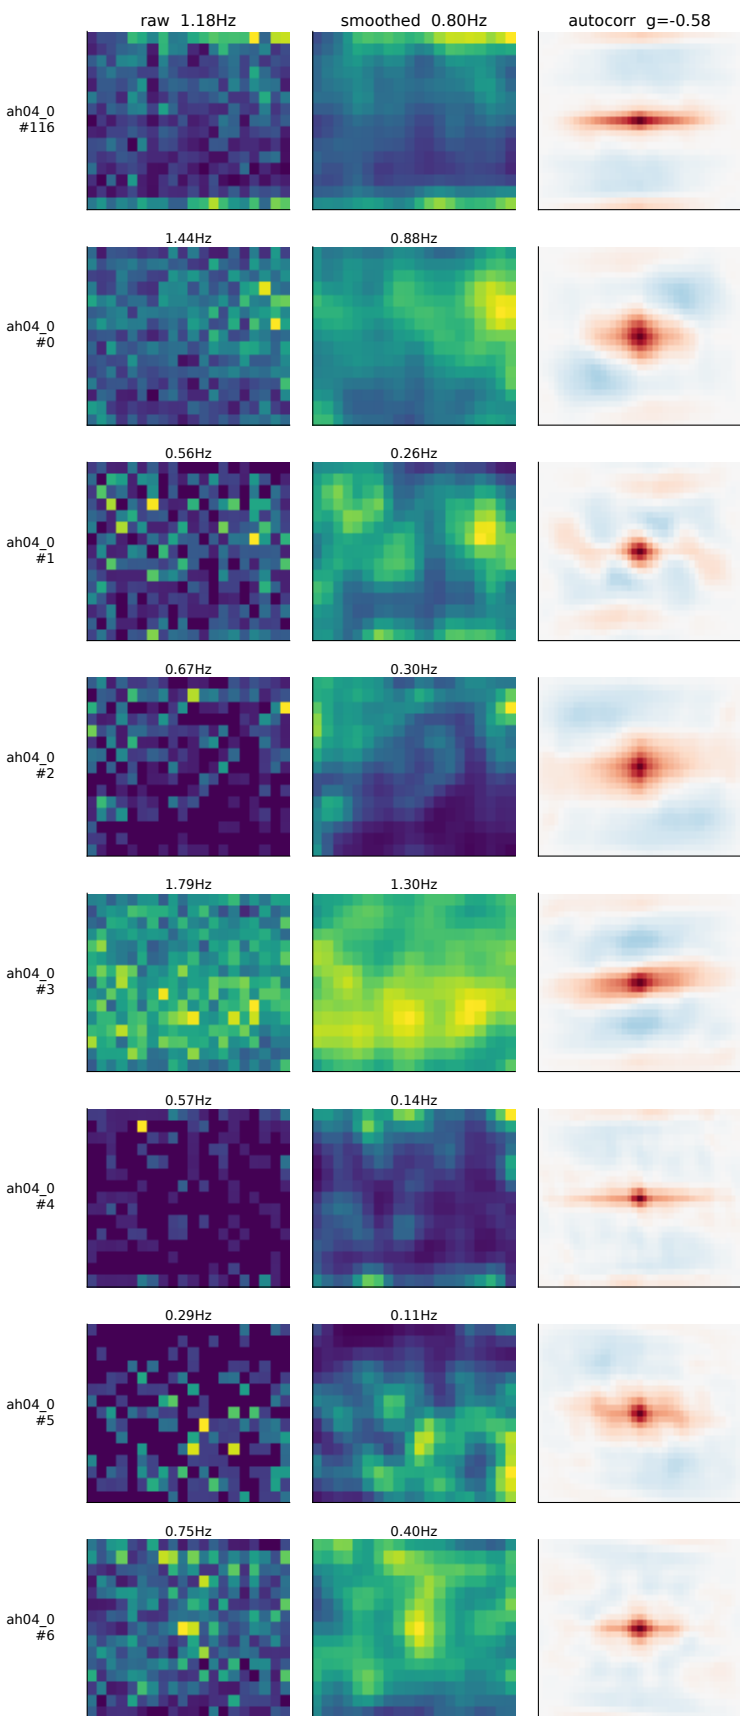


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

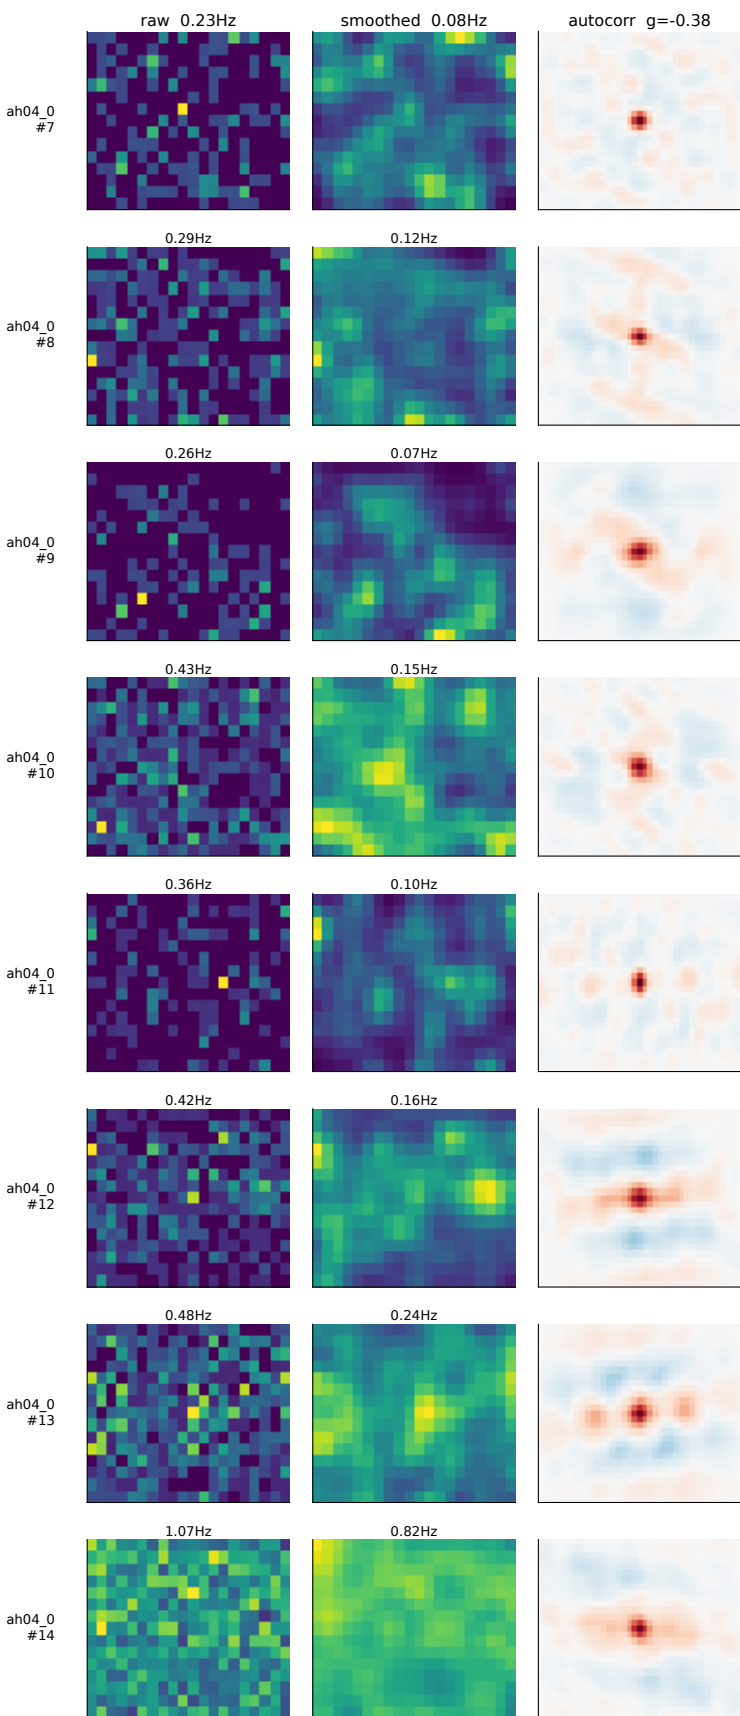


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

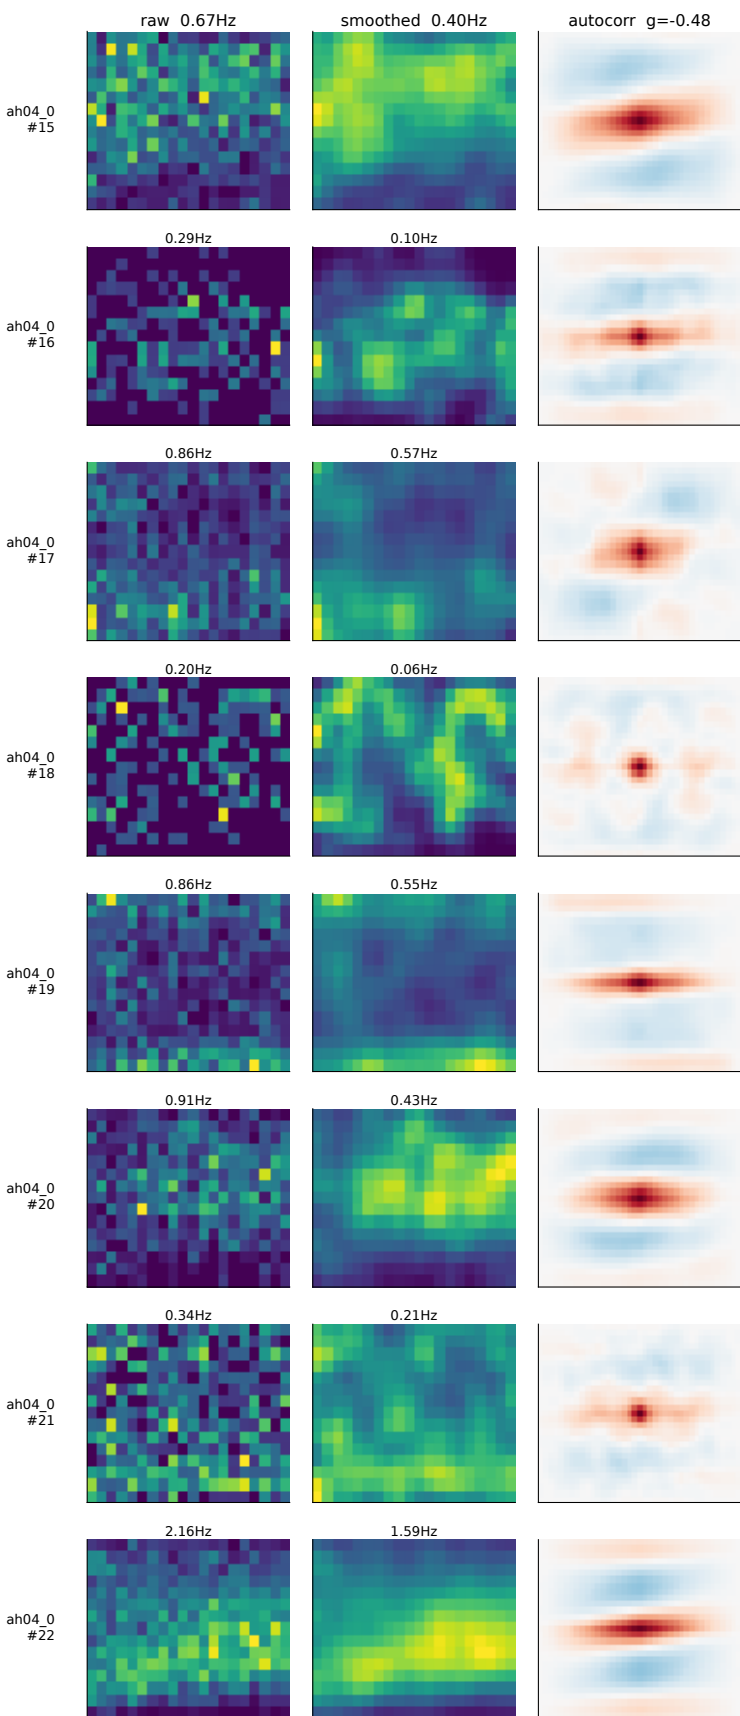


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

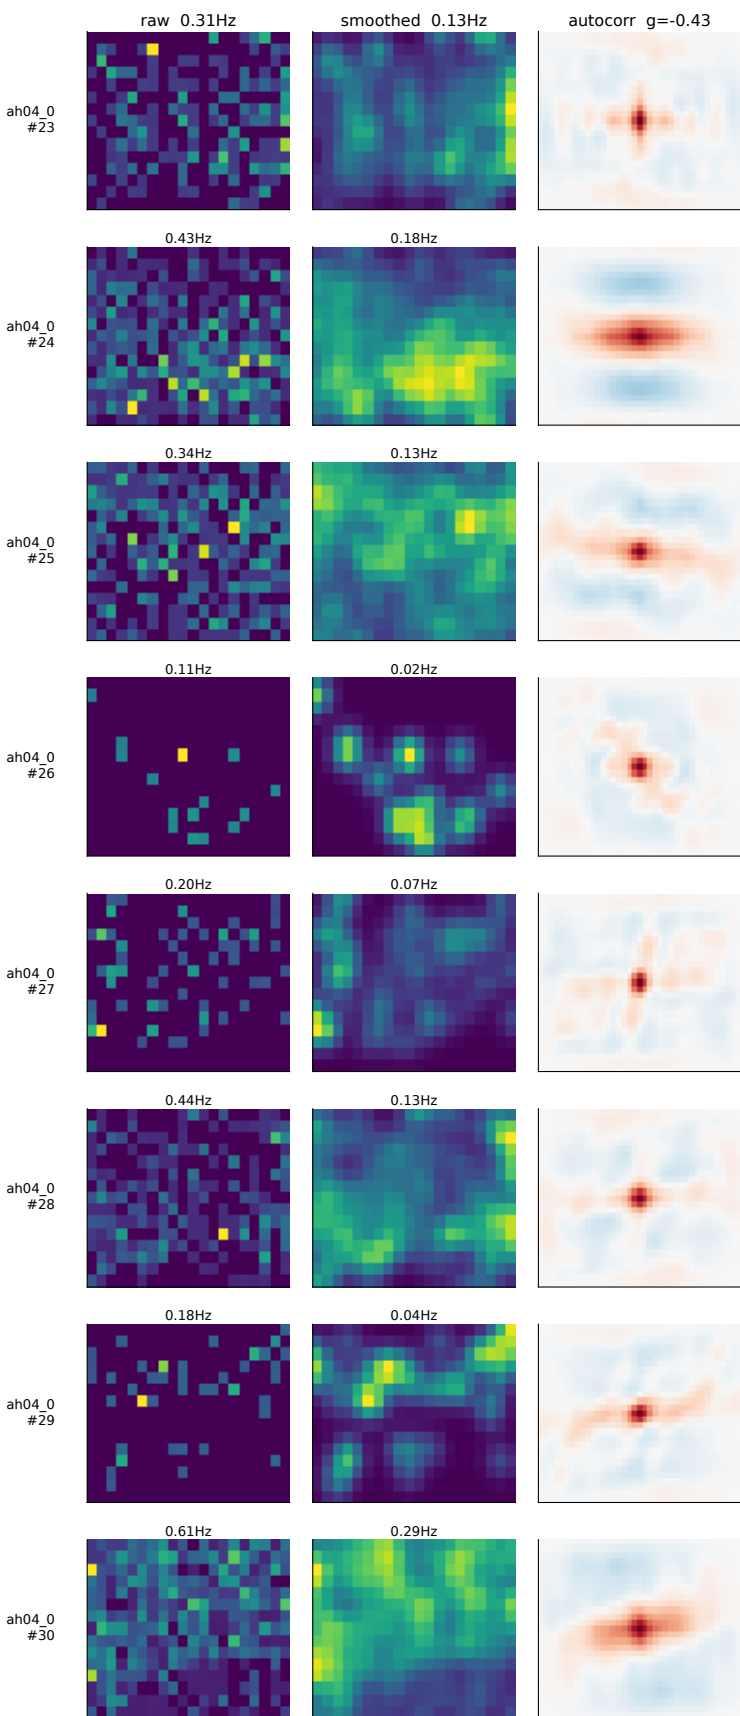


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

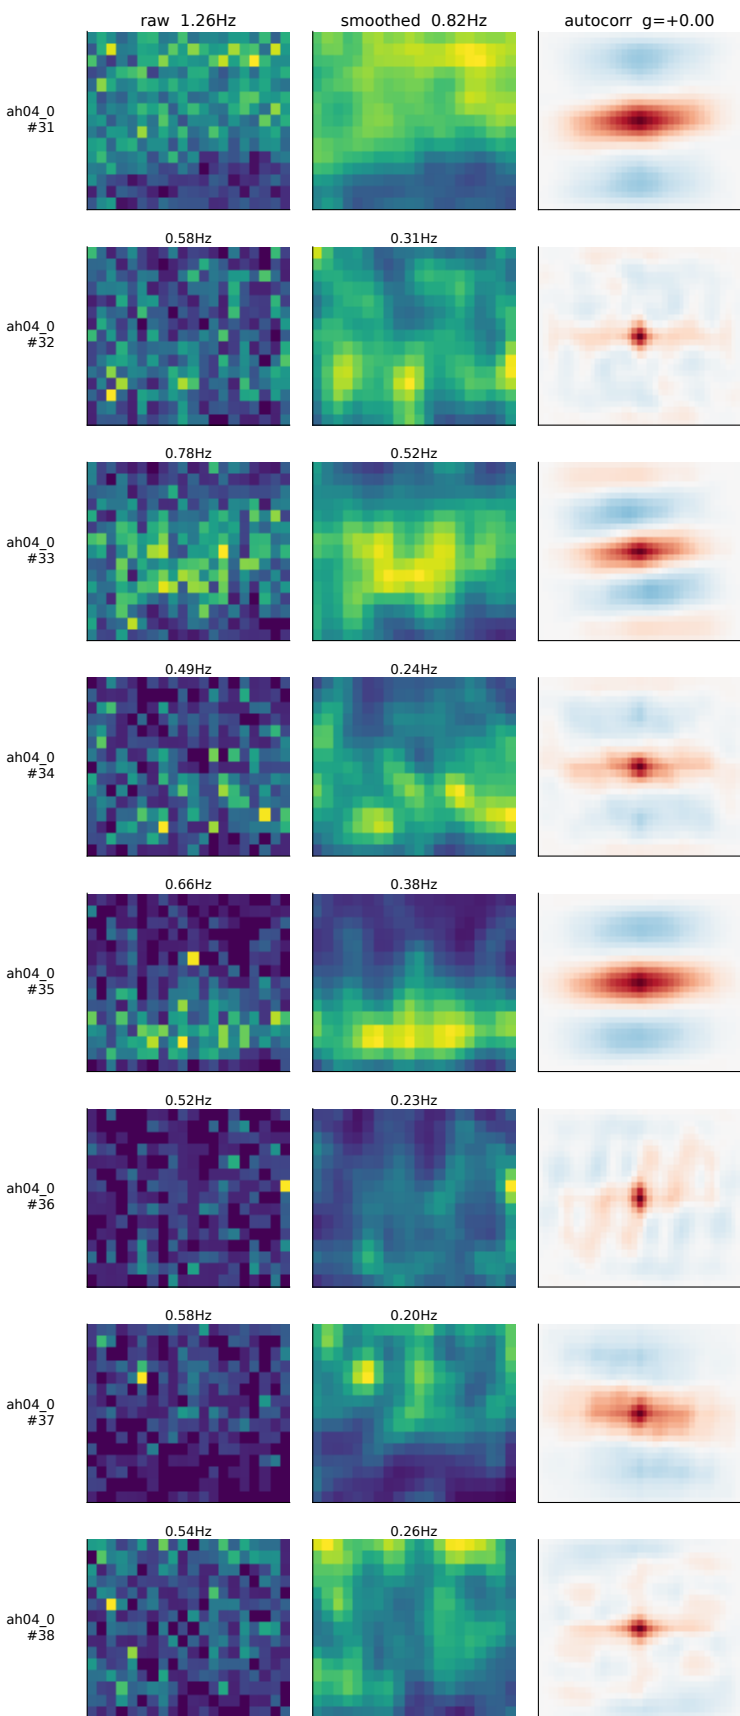


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

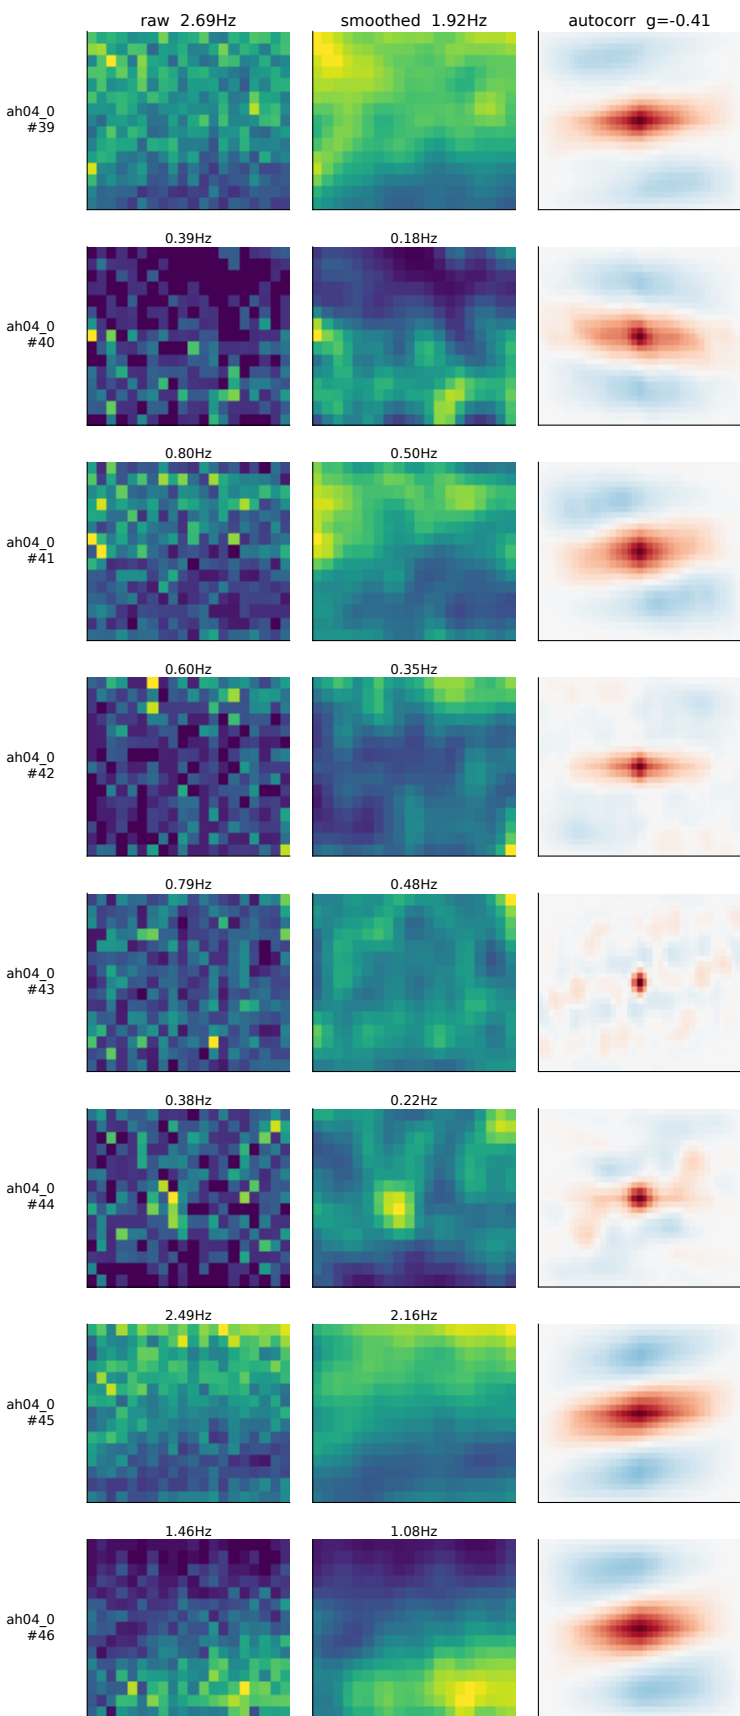


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

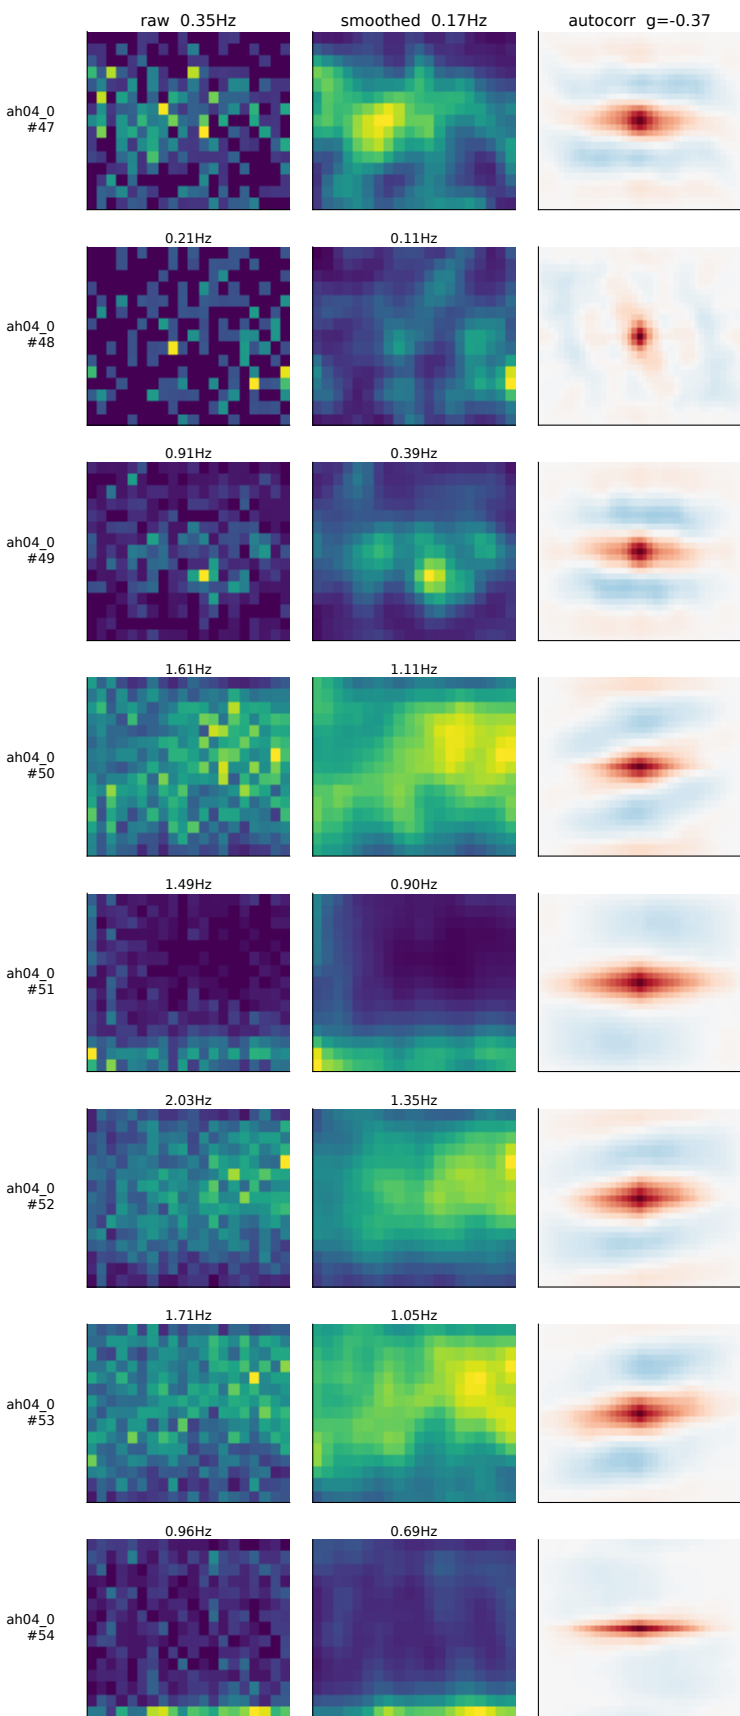


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

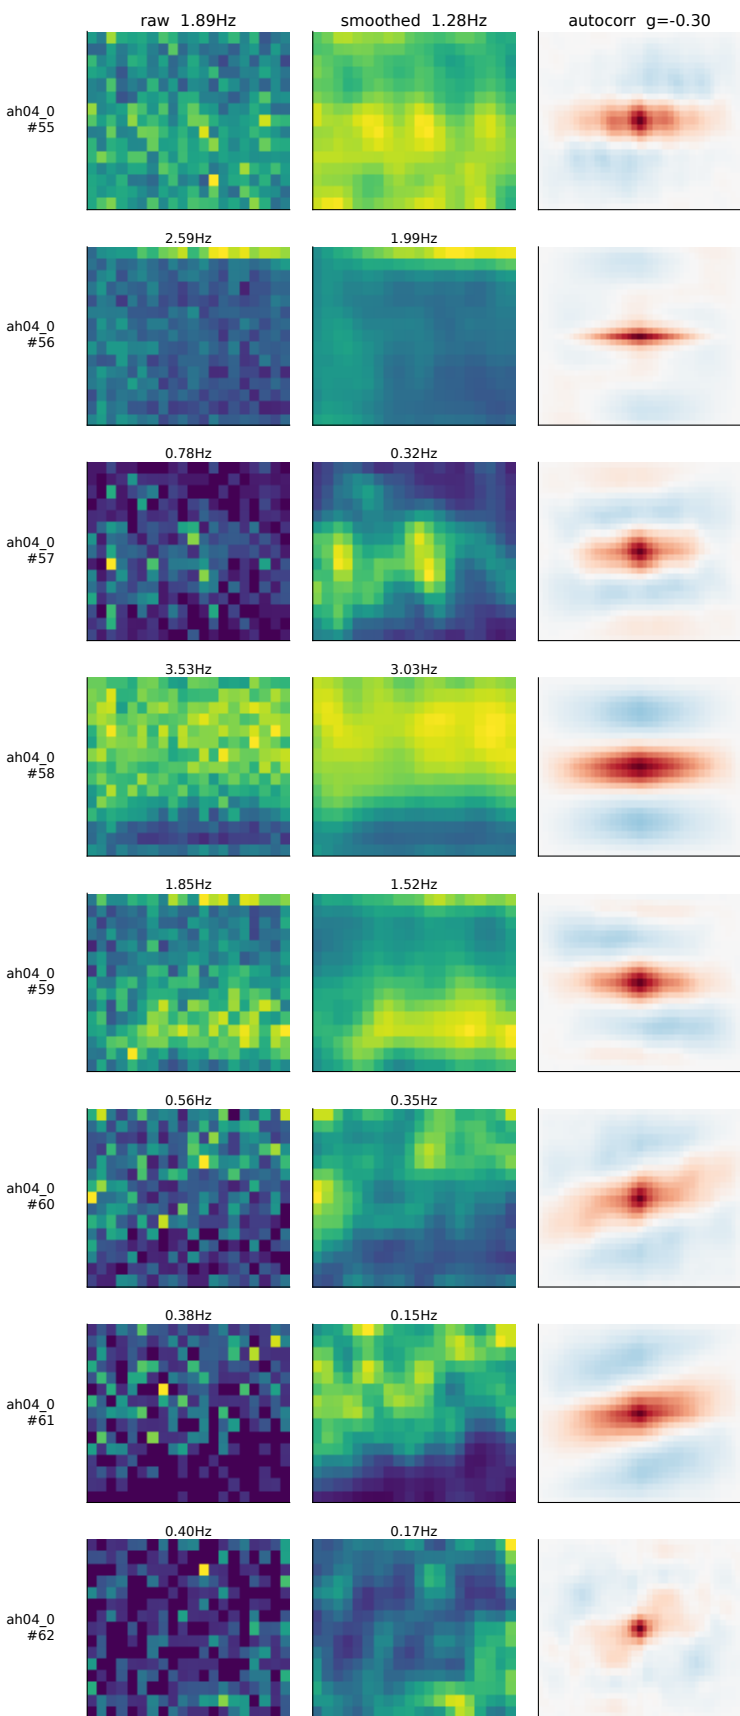


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

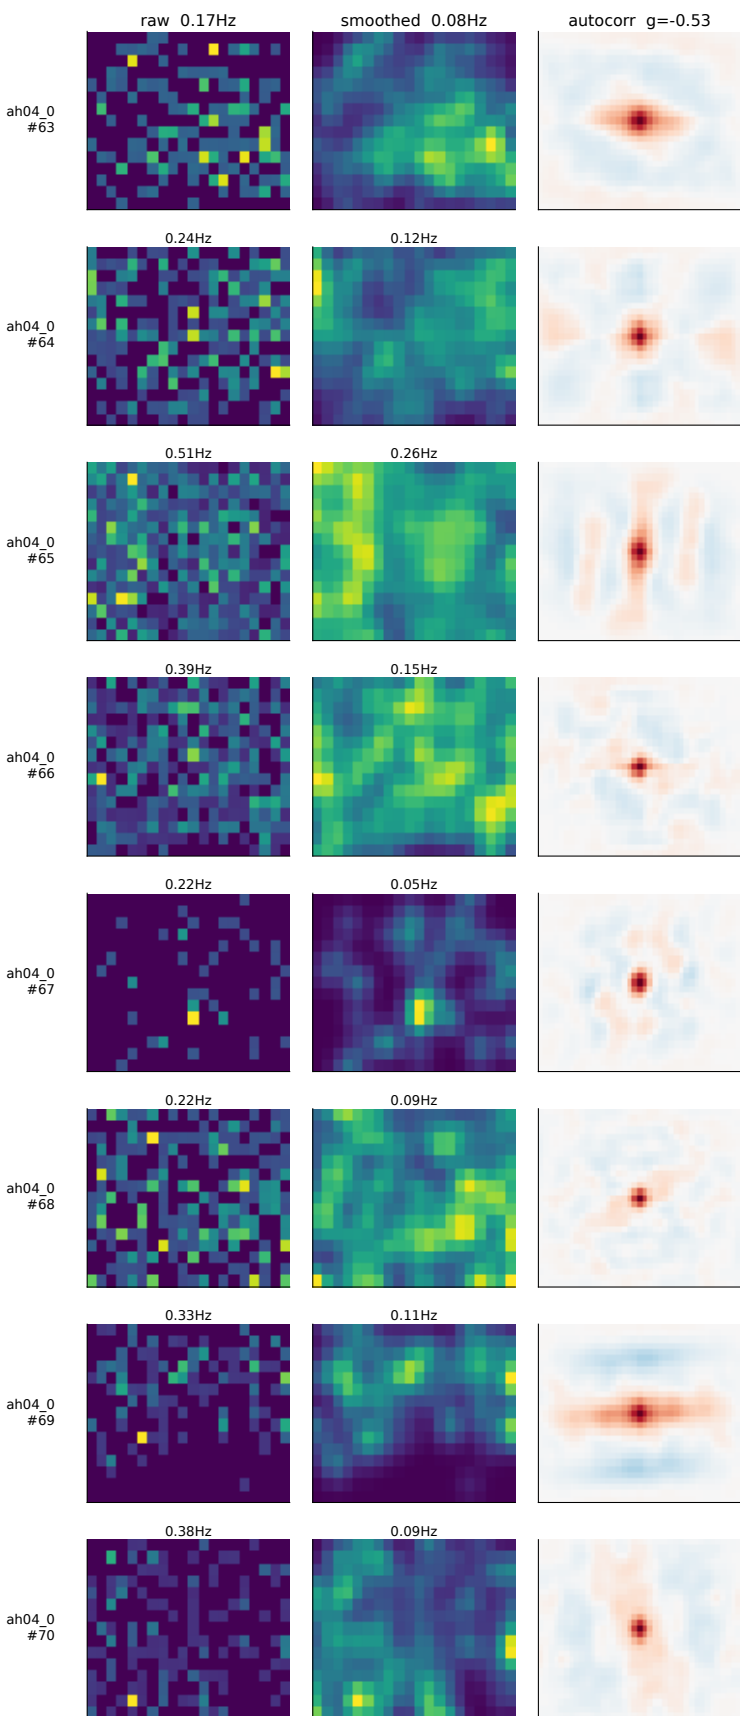


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

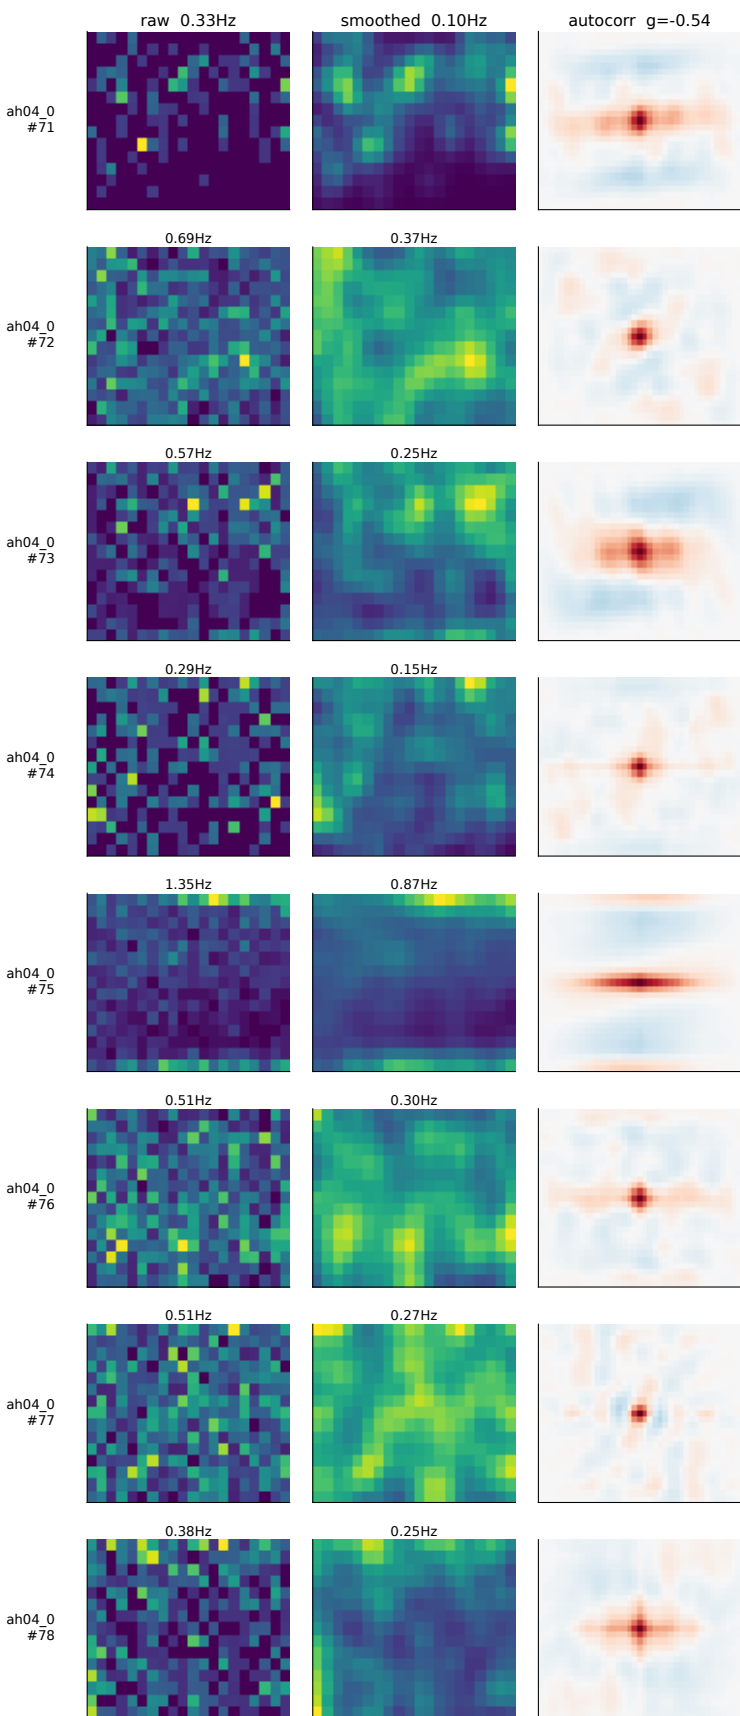


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

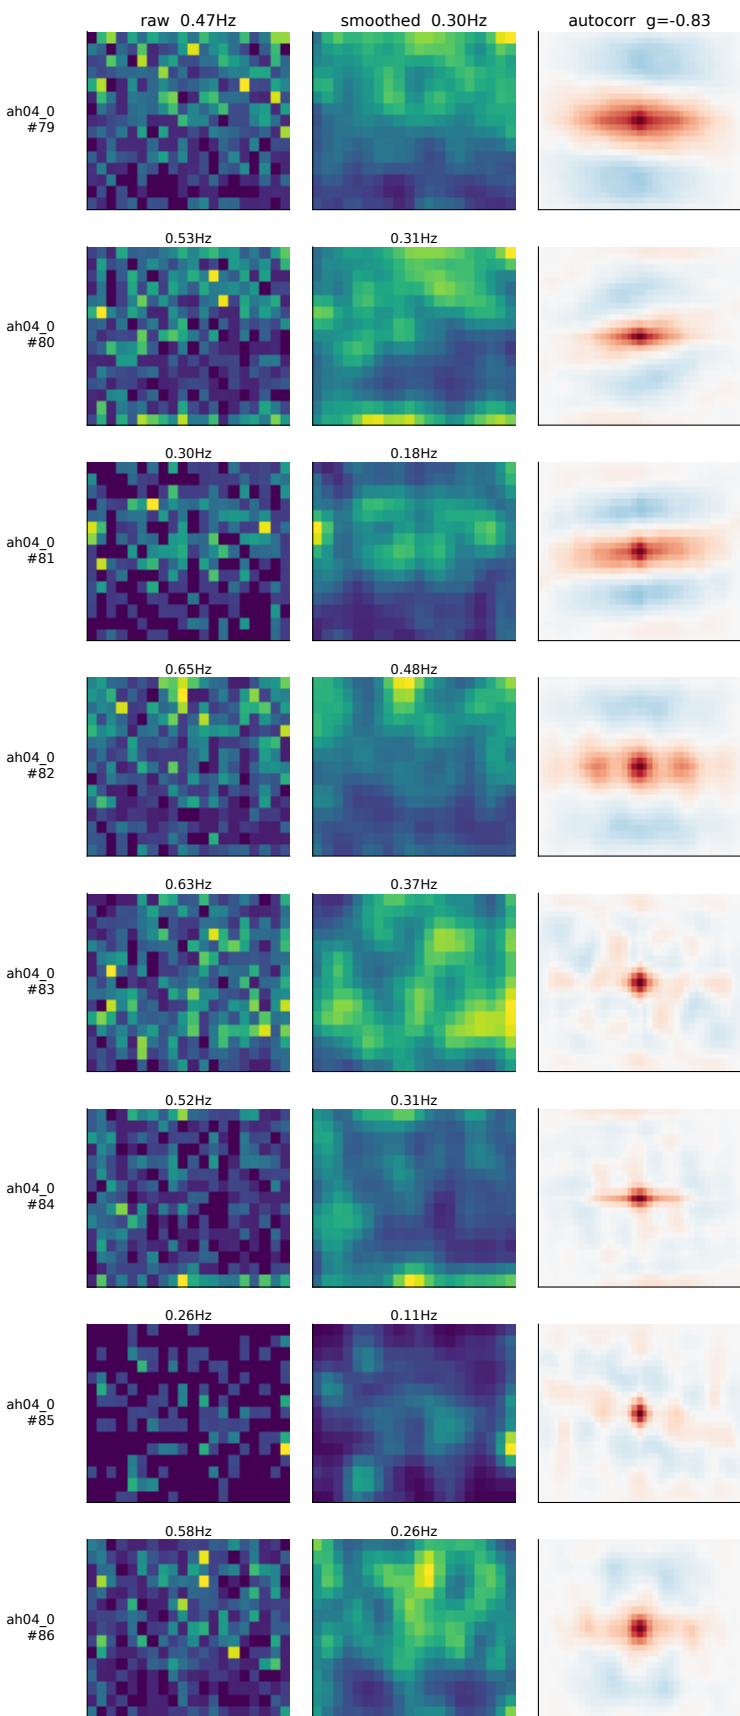


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

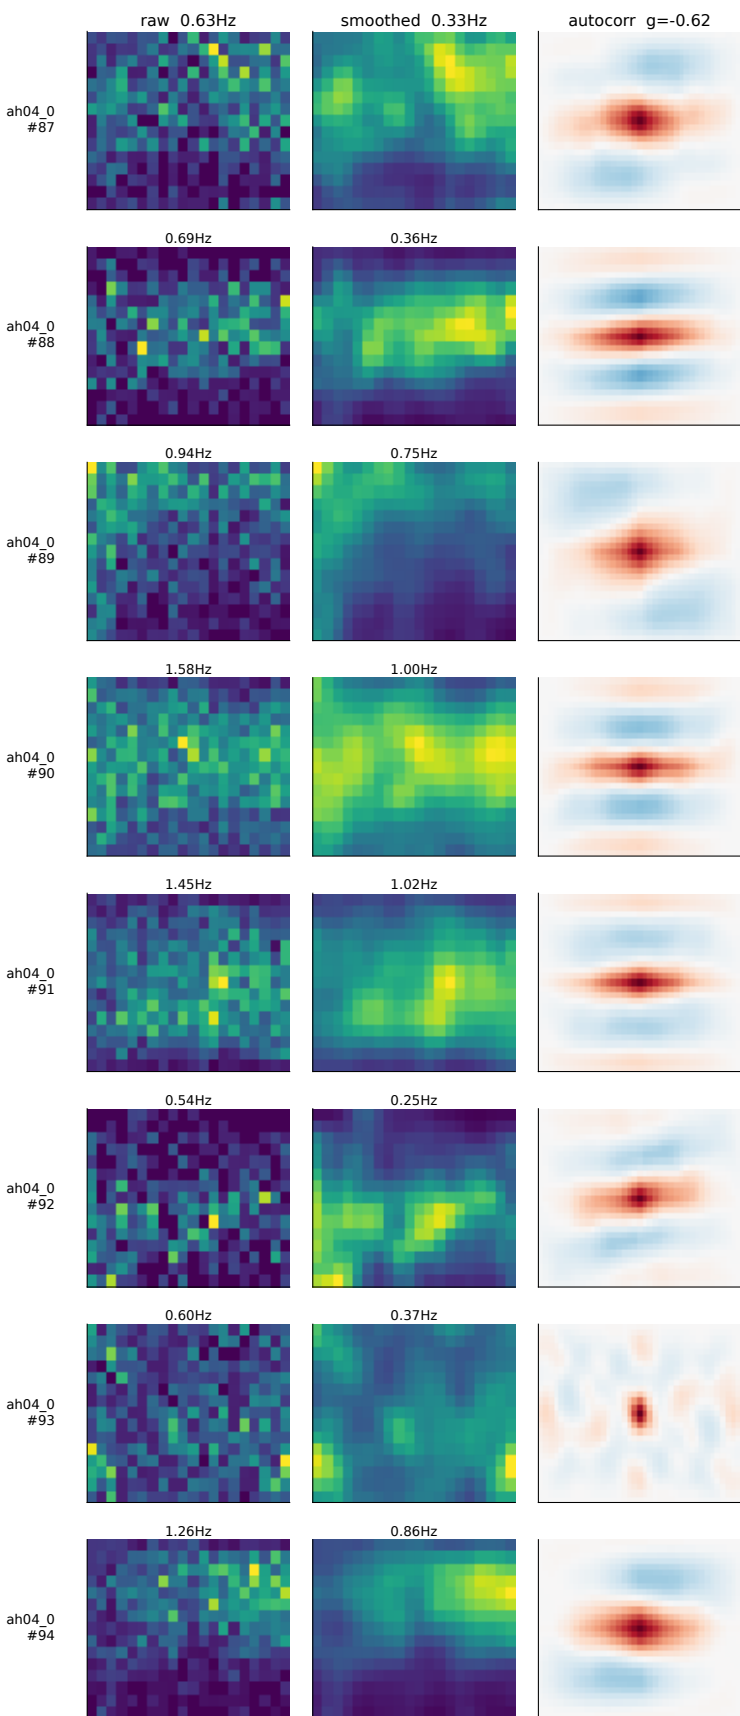


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

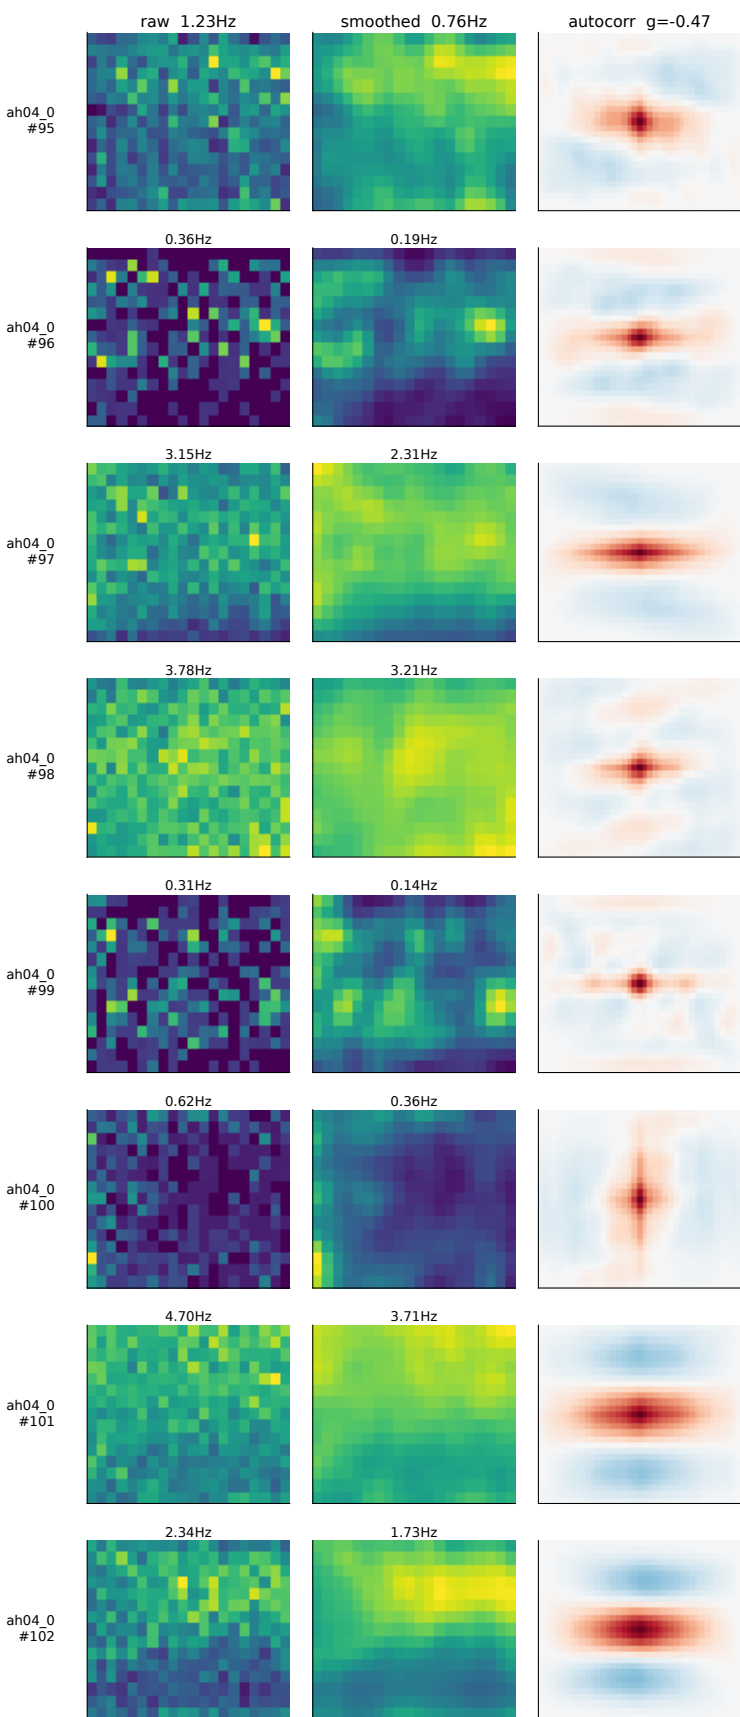


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
own beside smoothed because smoothing can create structure; no reliability measure or null is co

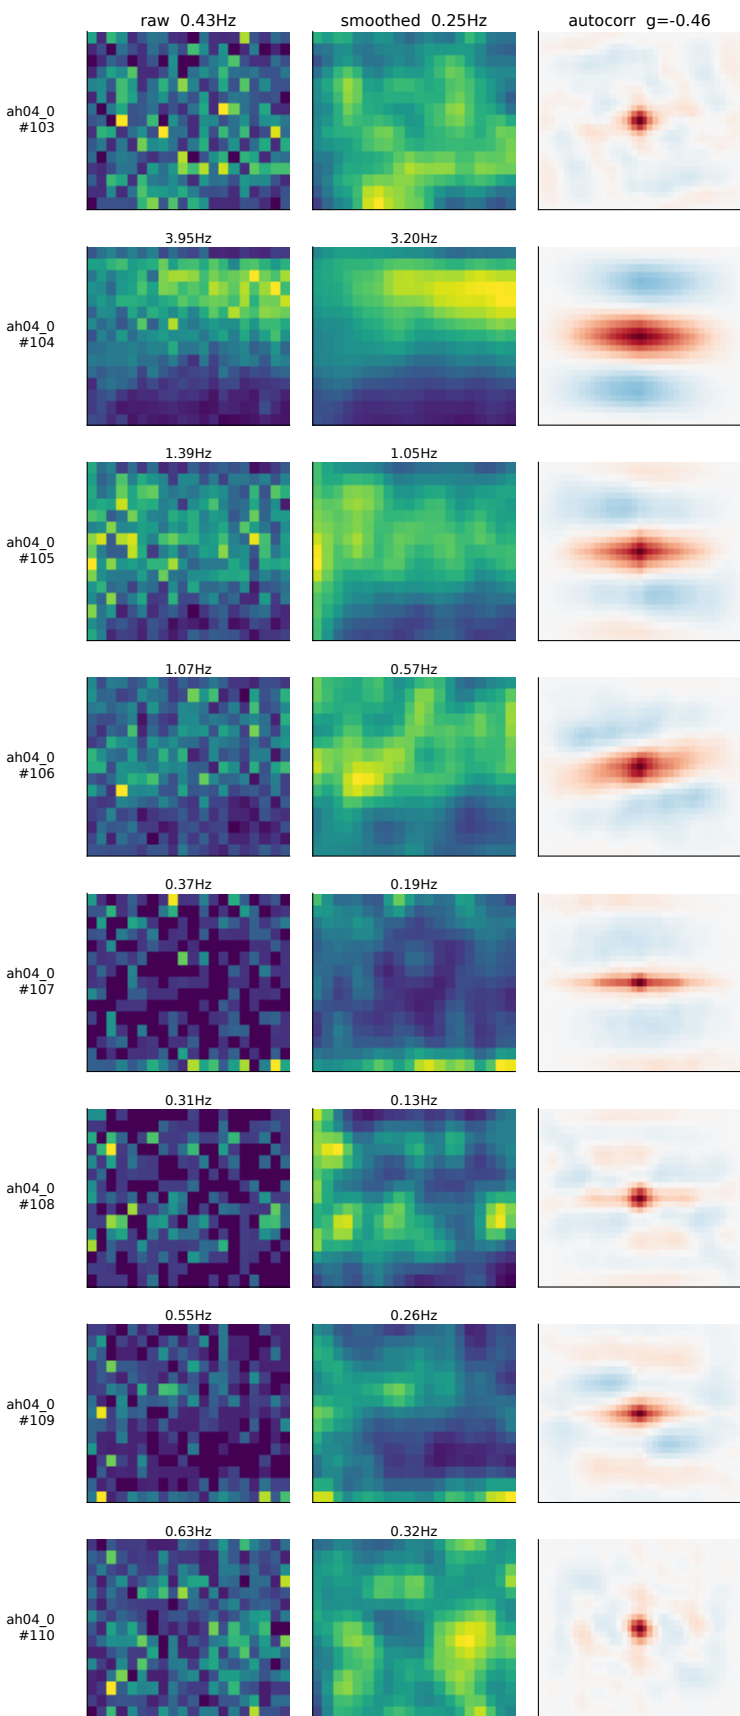


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
own beside smoothed because smoothing can create structure; no reliability measure or null is co

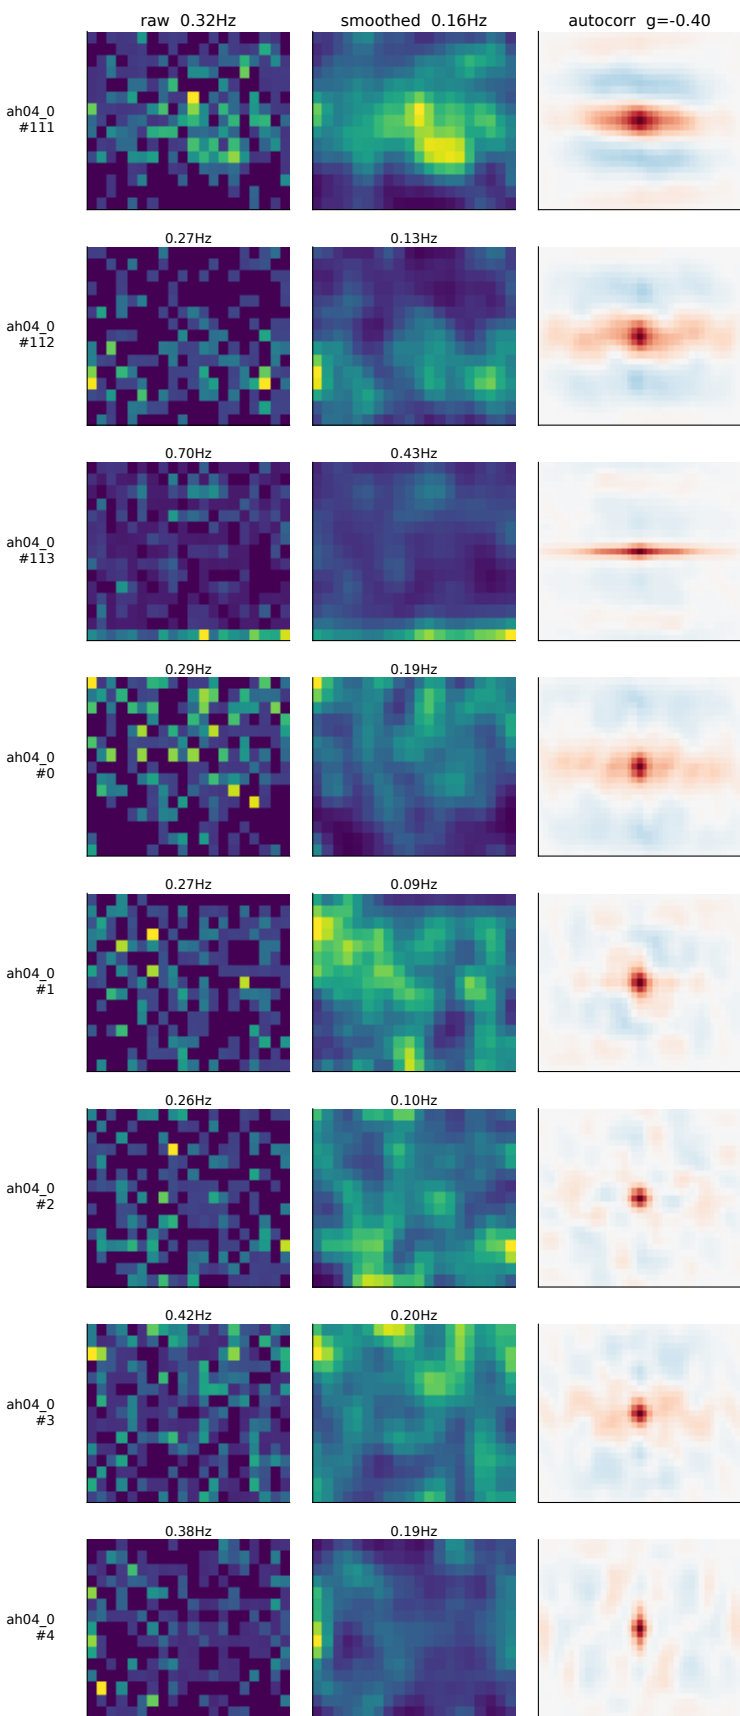


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

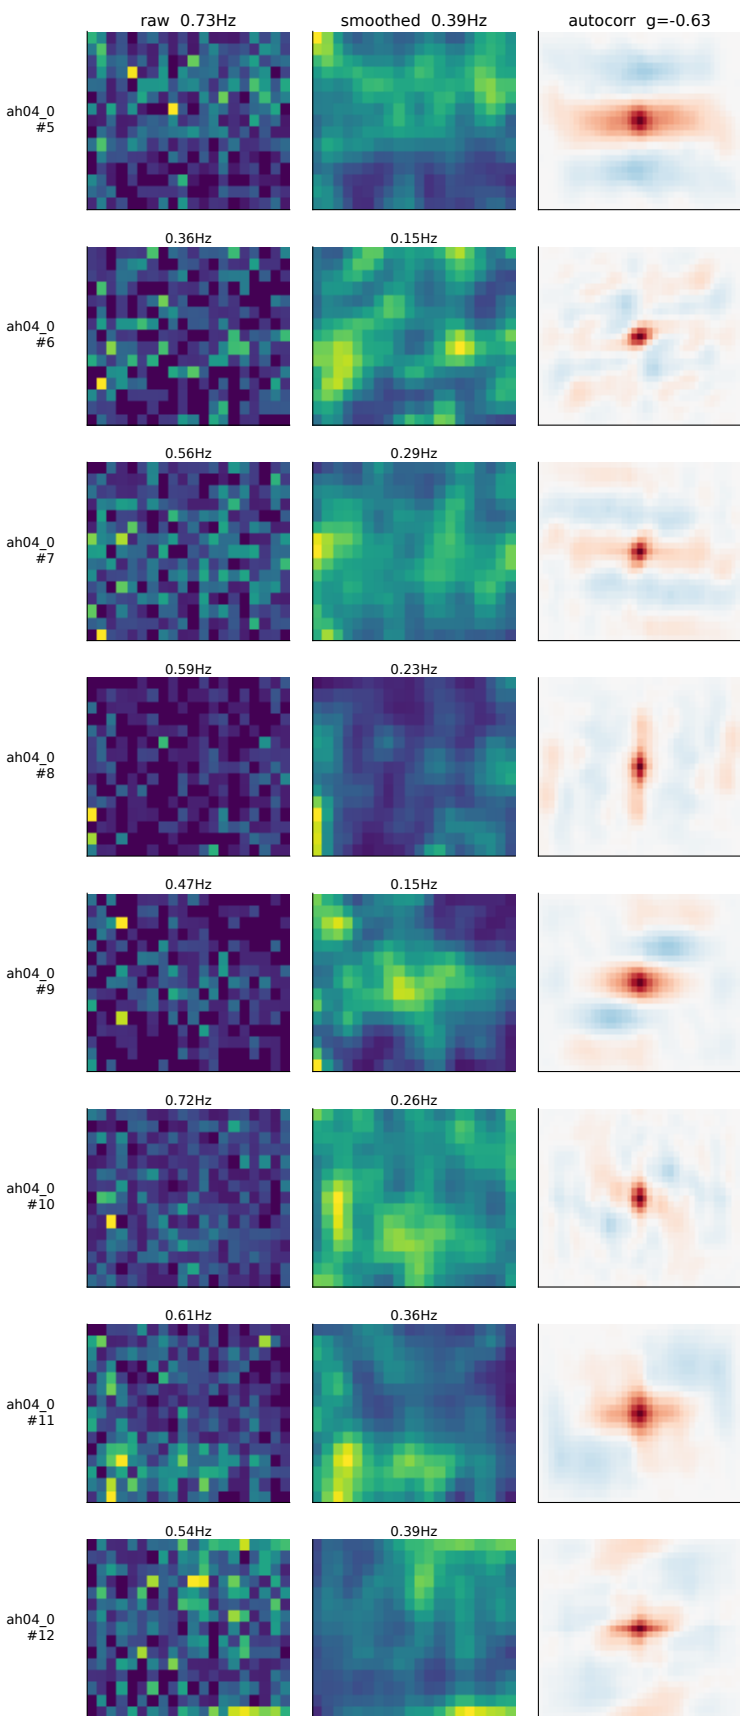


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

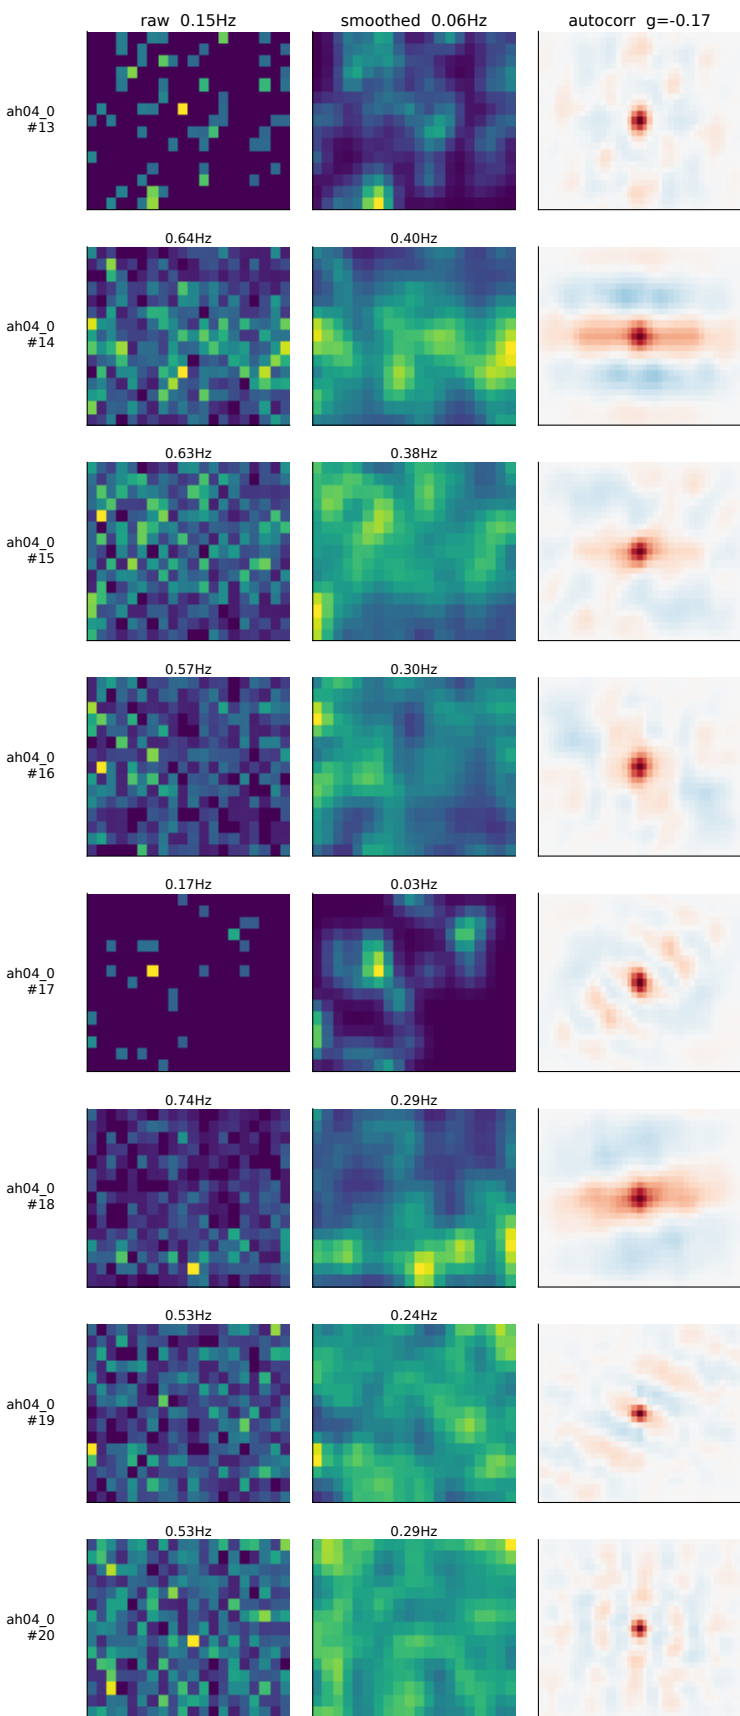


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

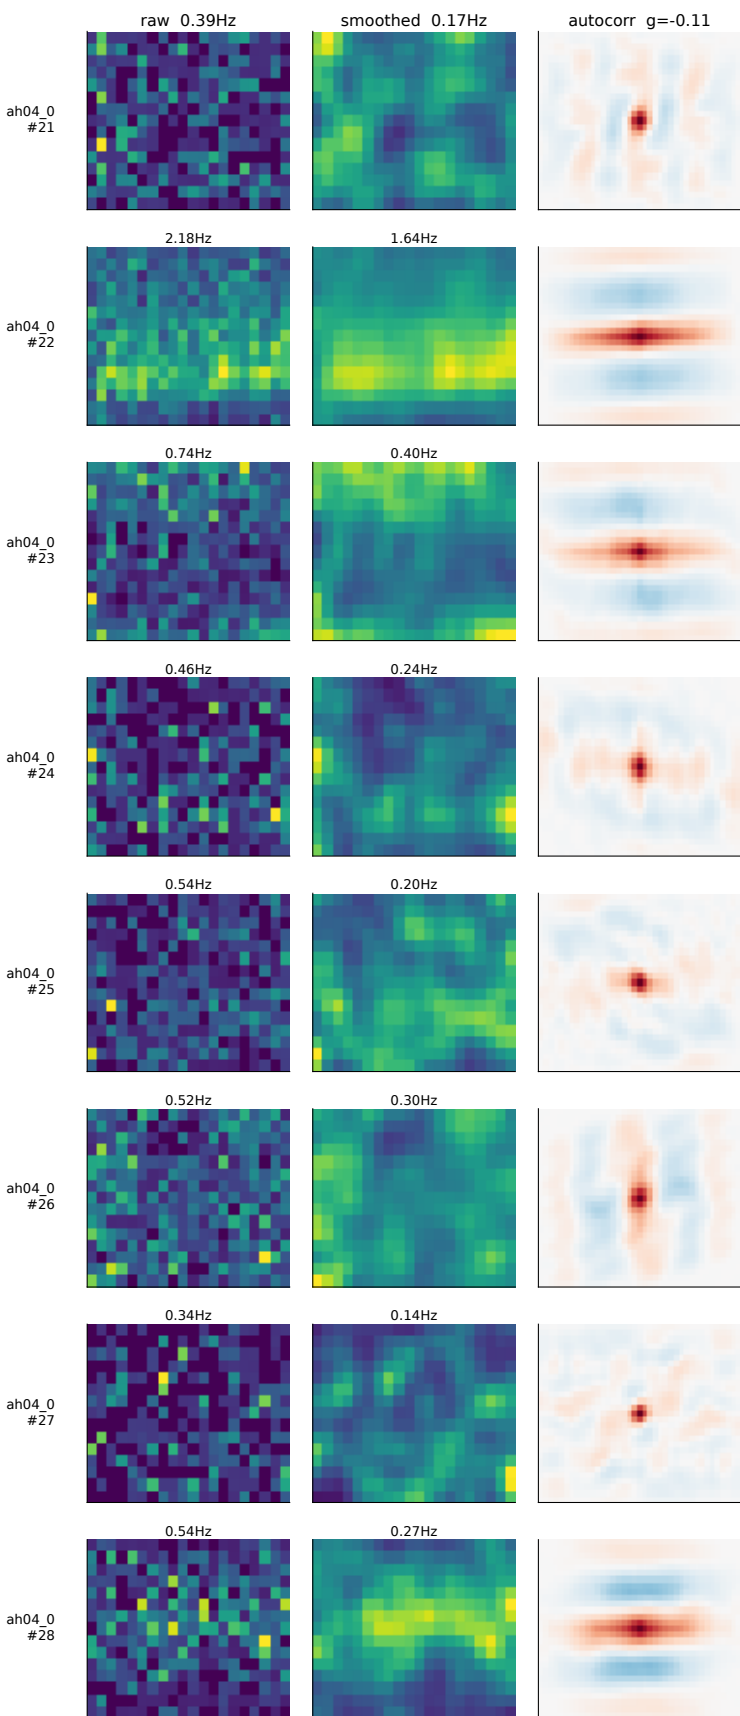


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

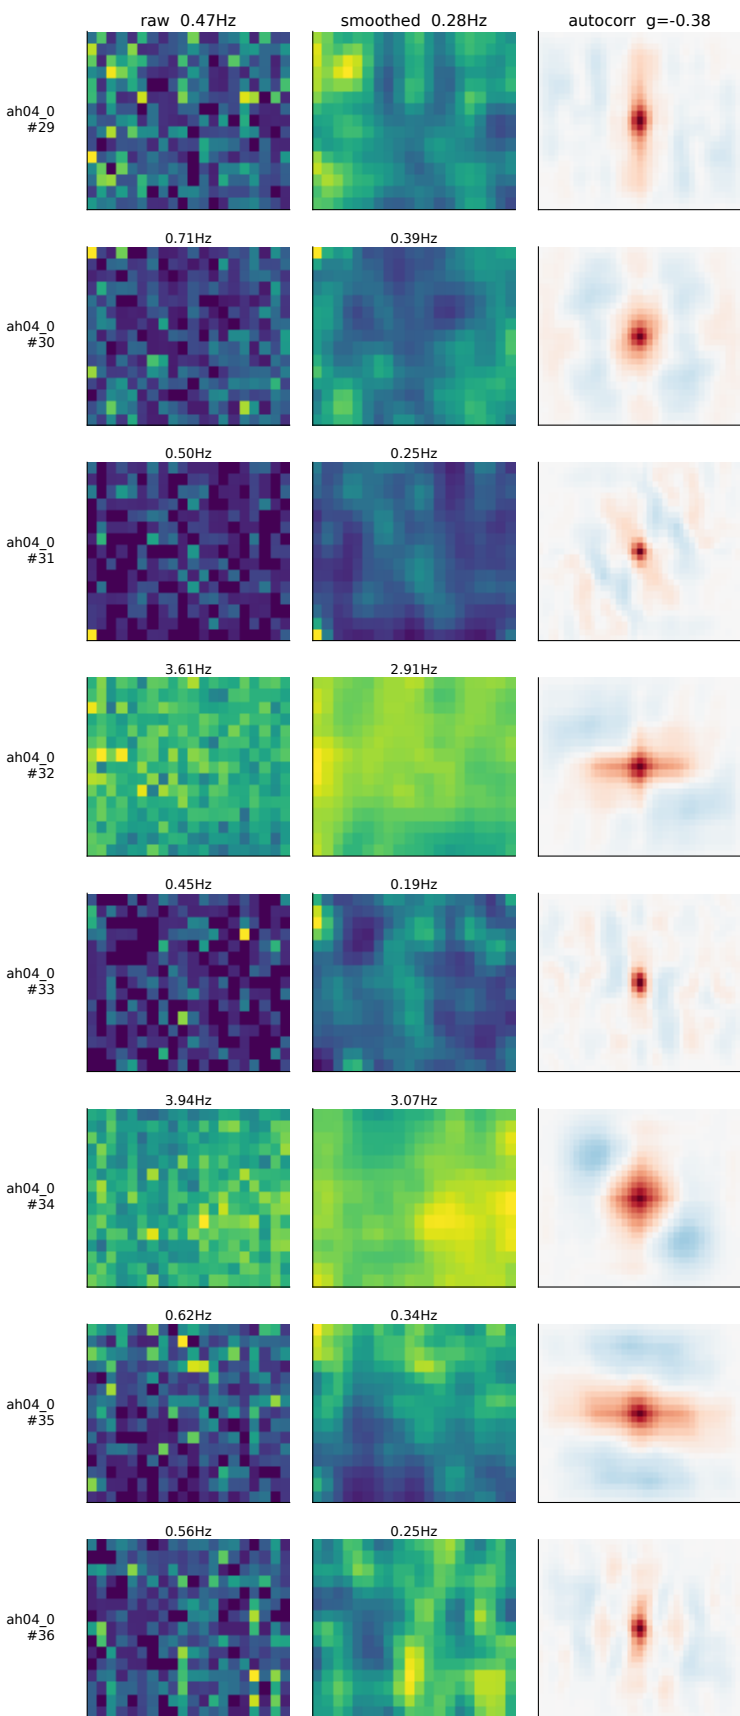


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

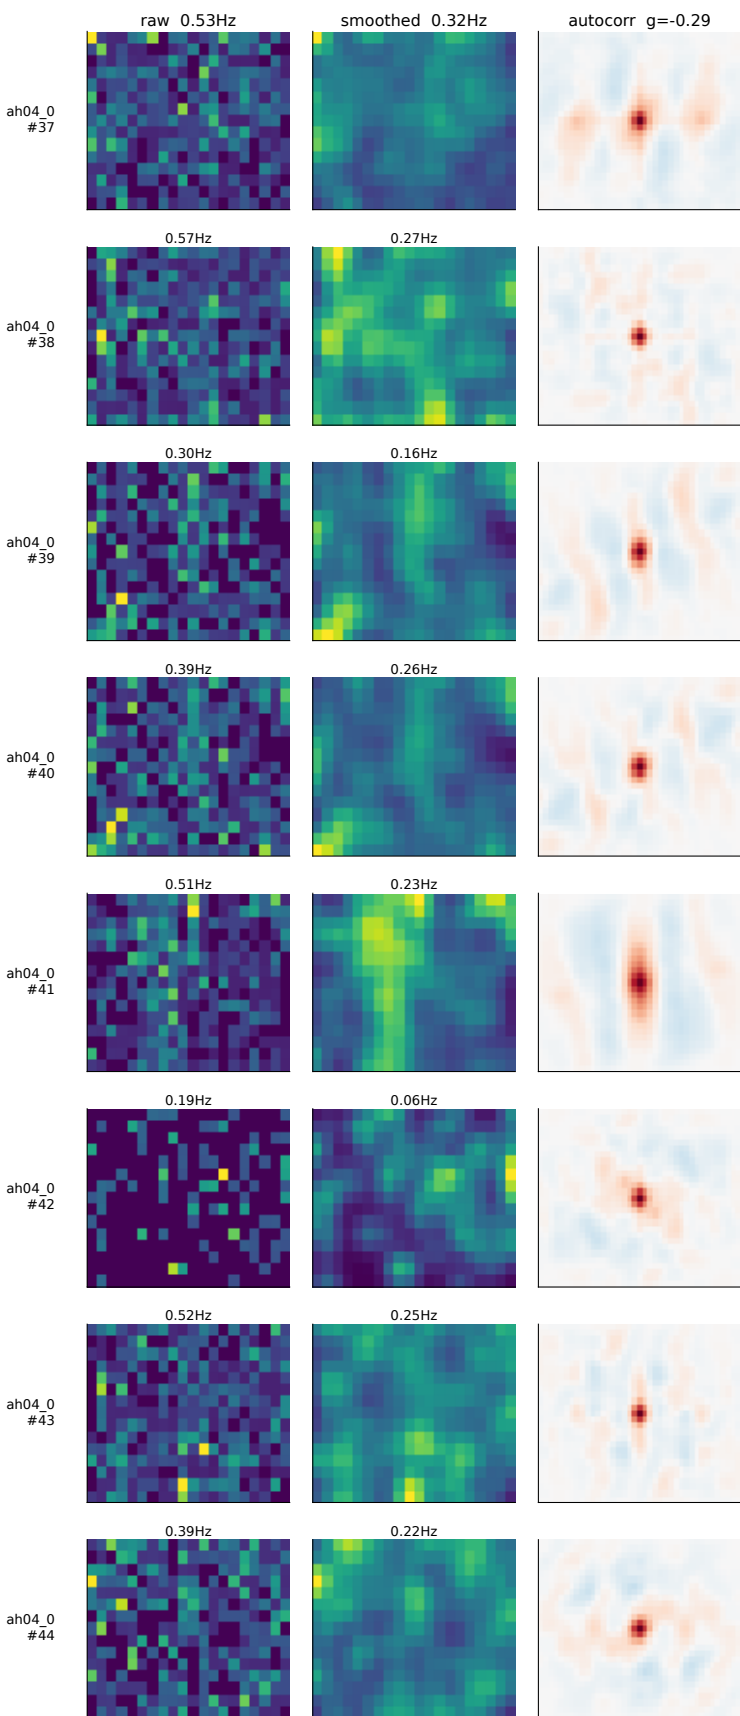


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

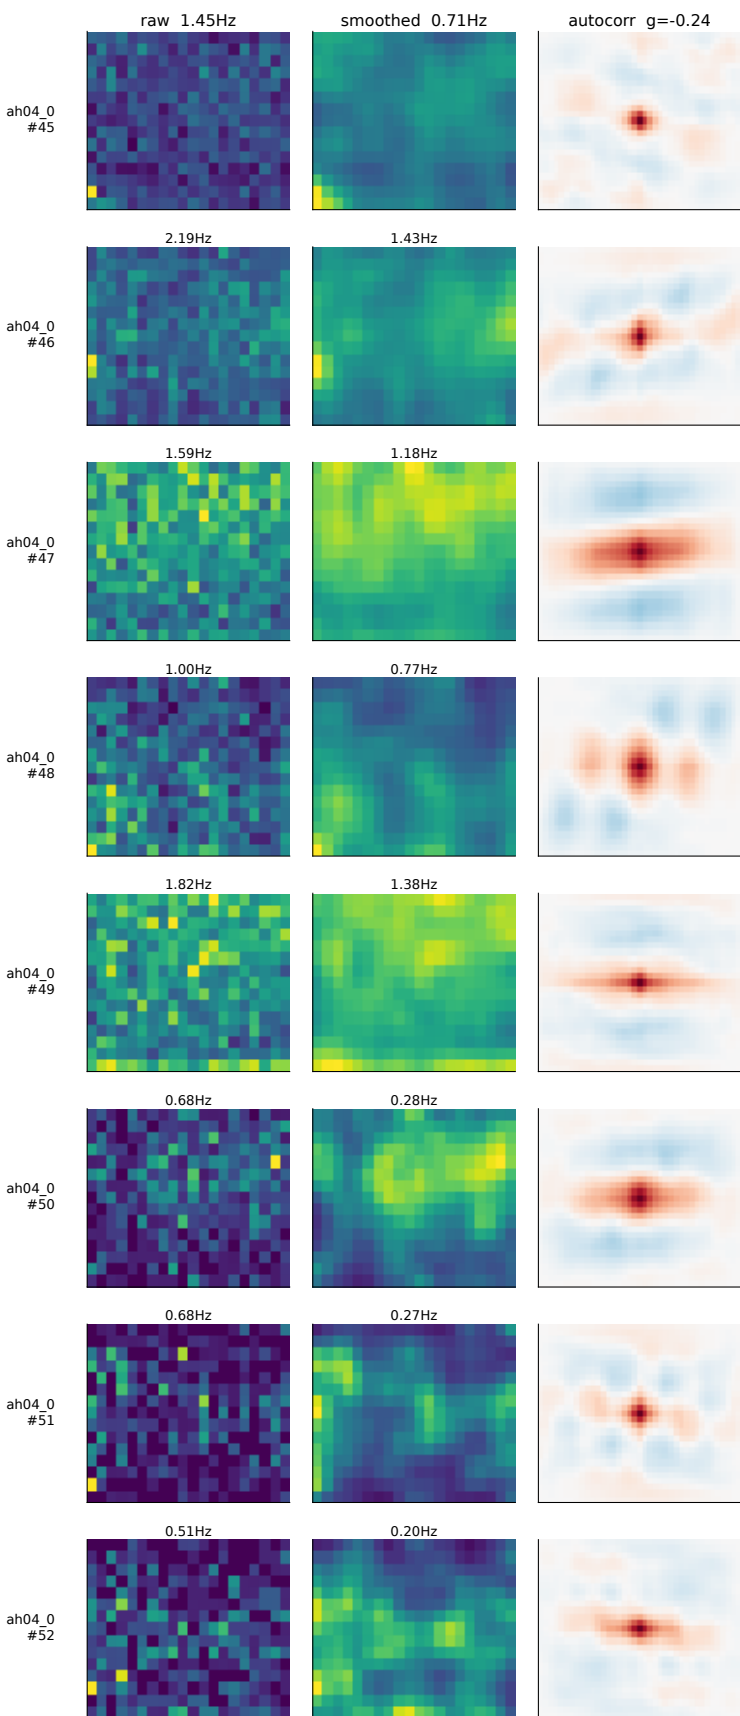


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

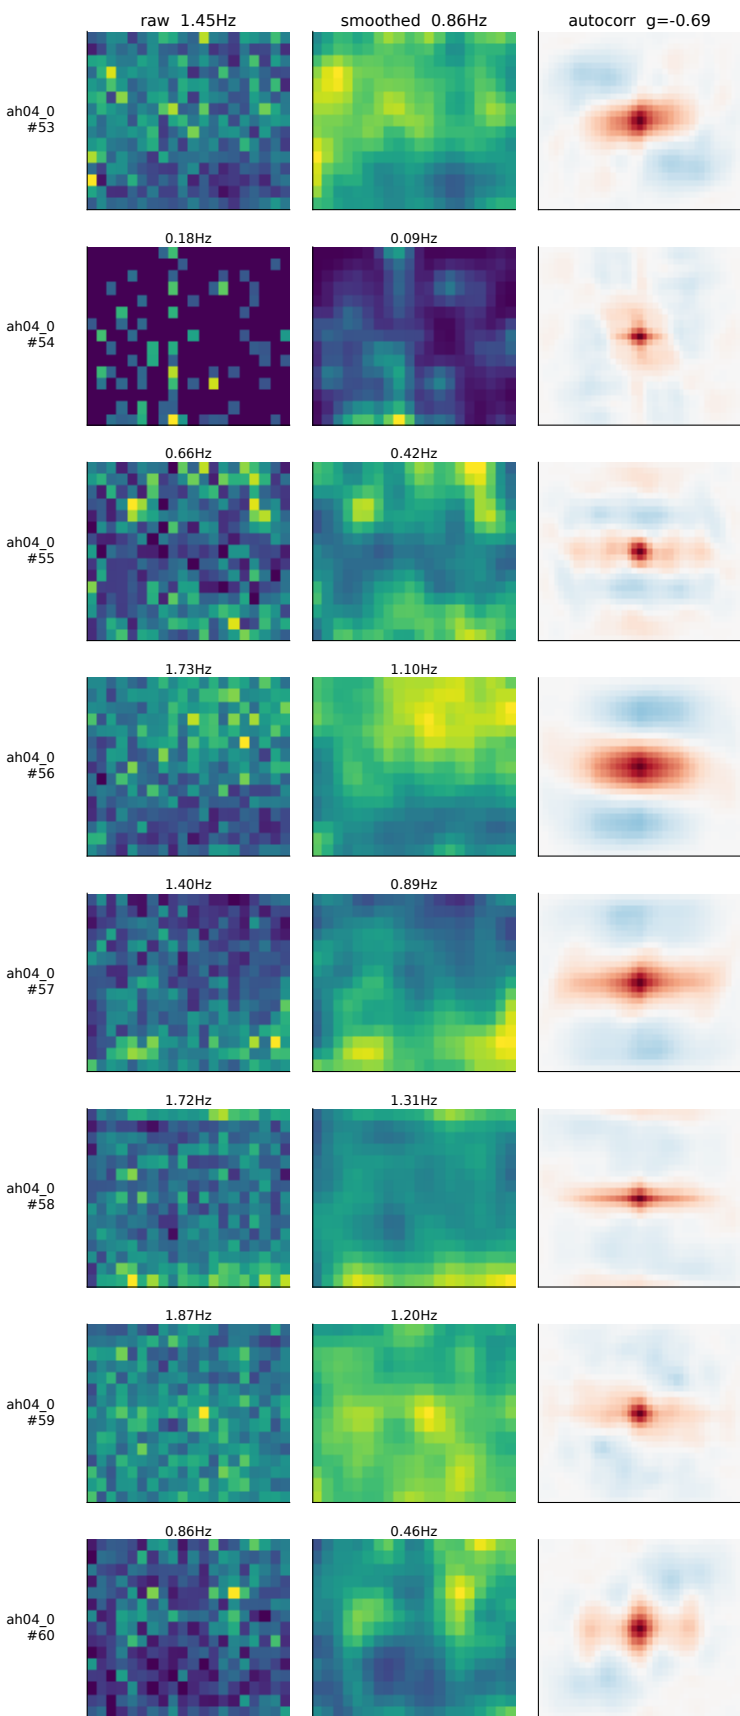


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

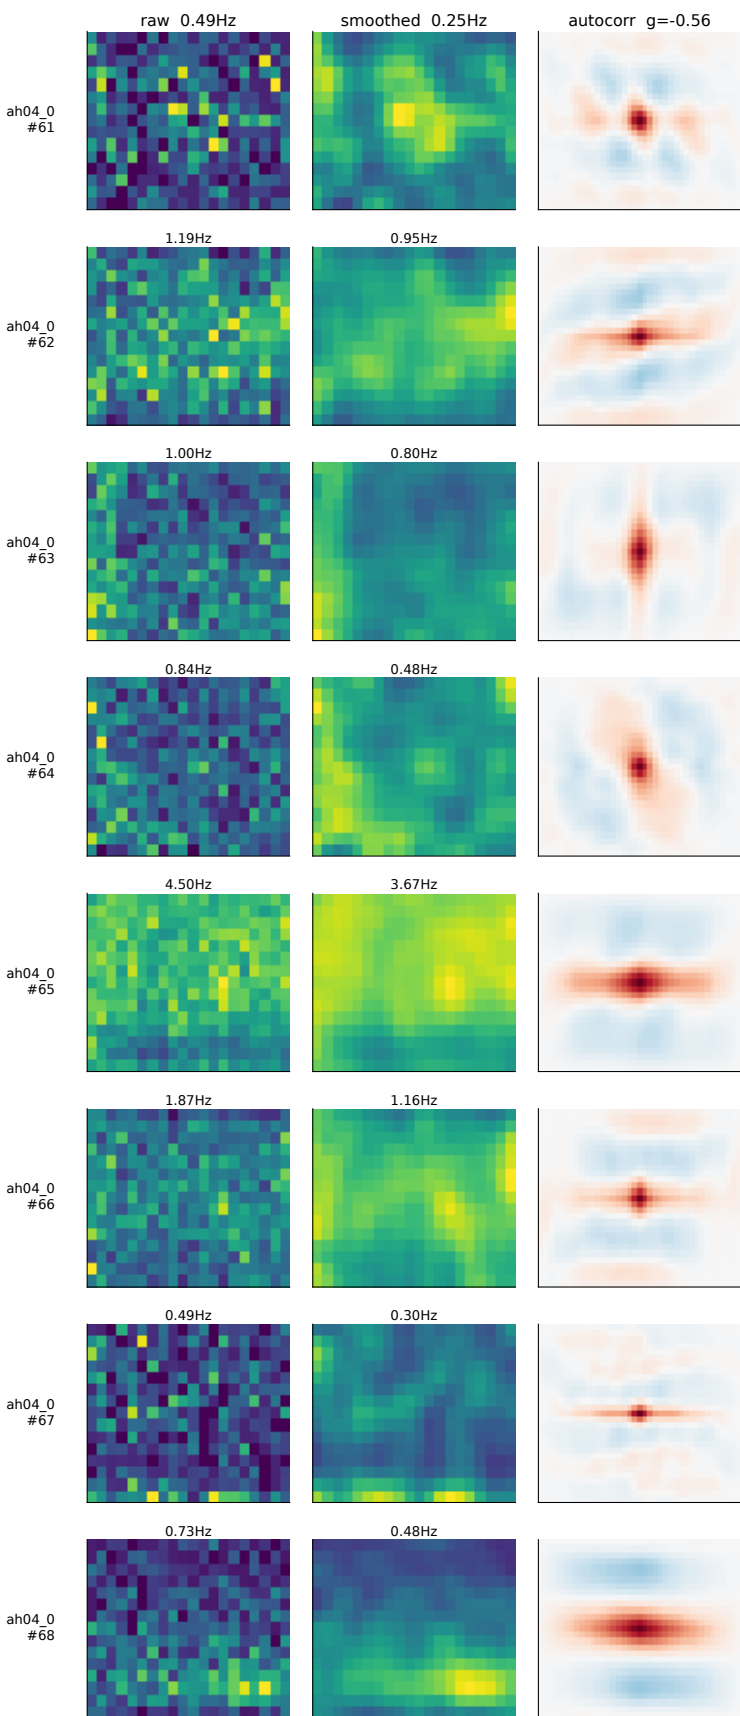


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

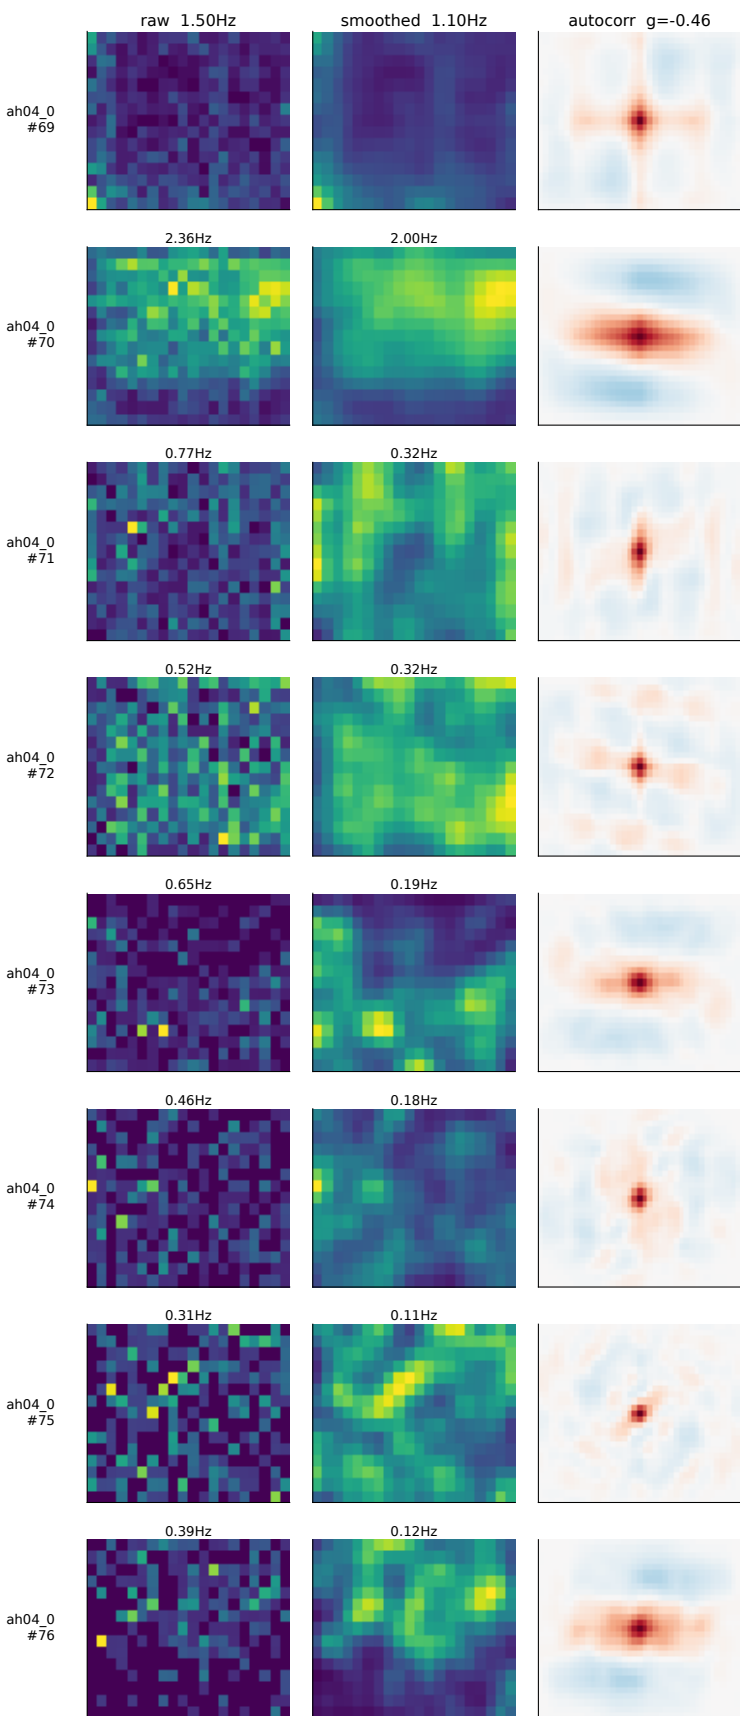


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

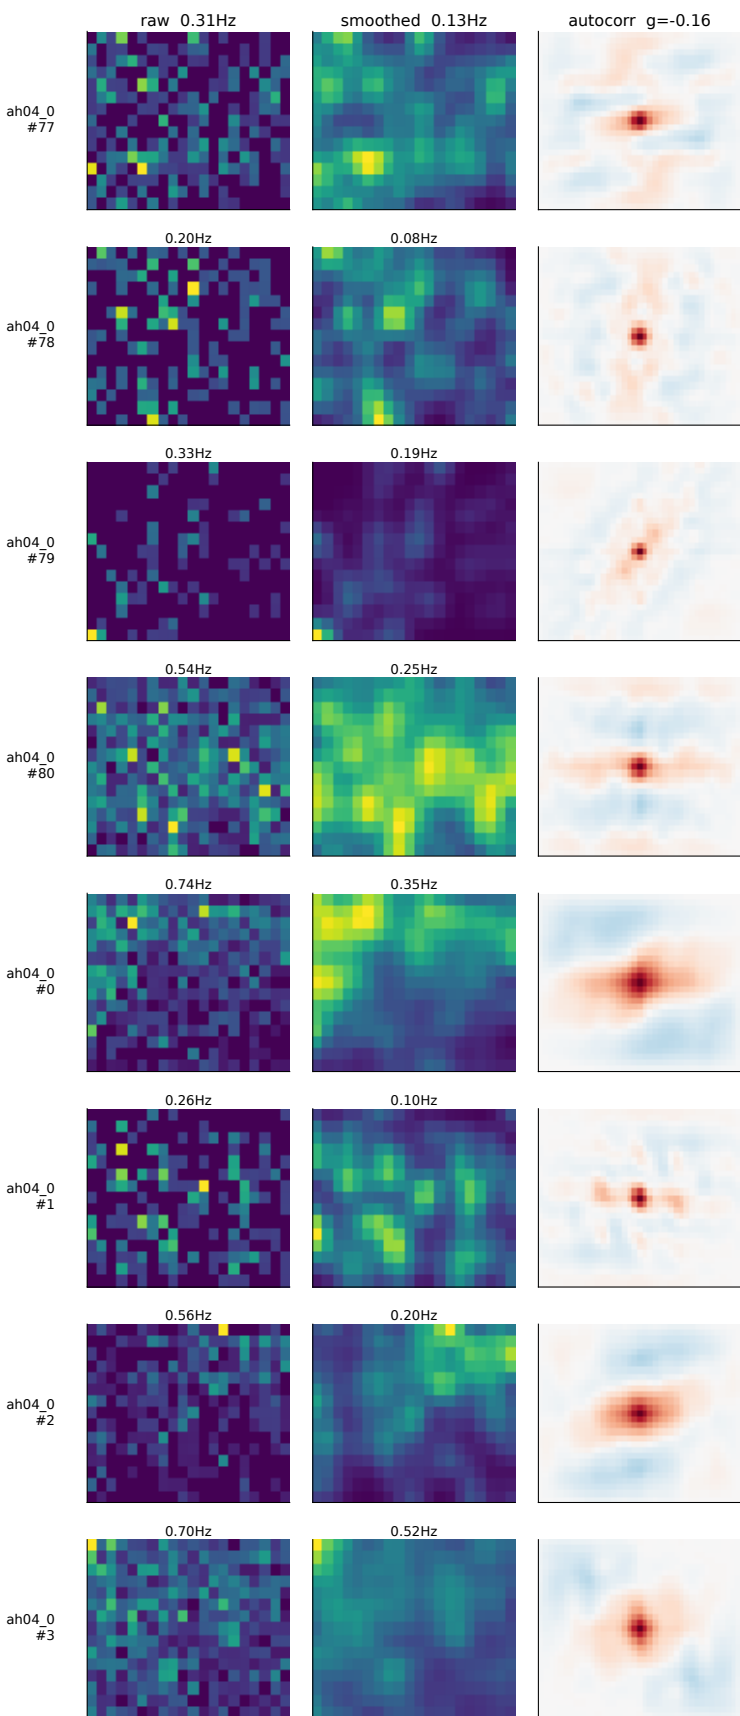


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

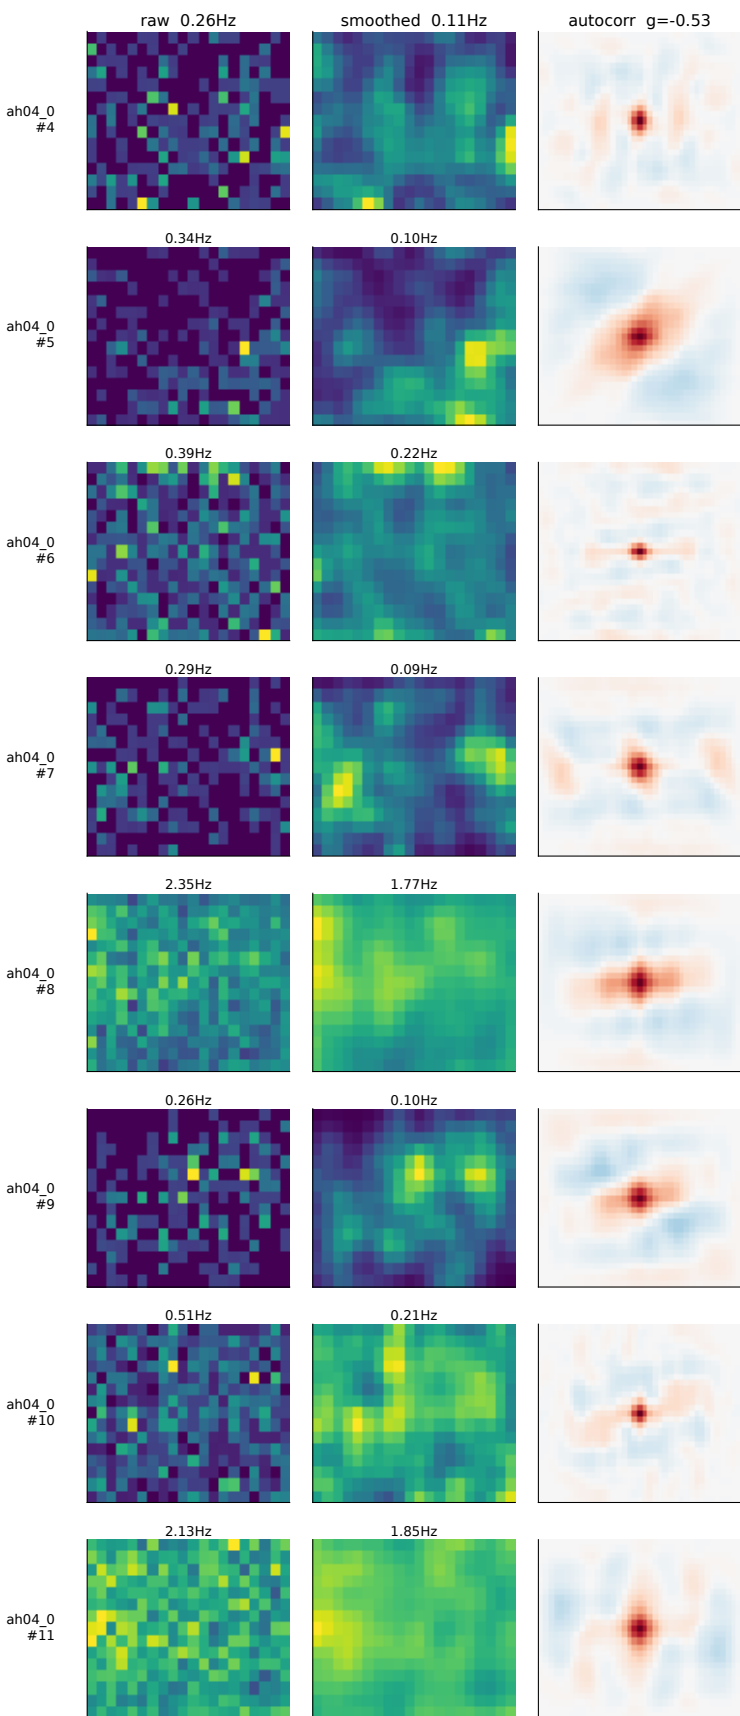


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

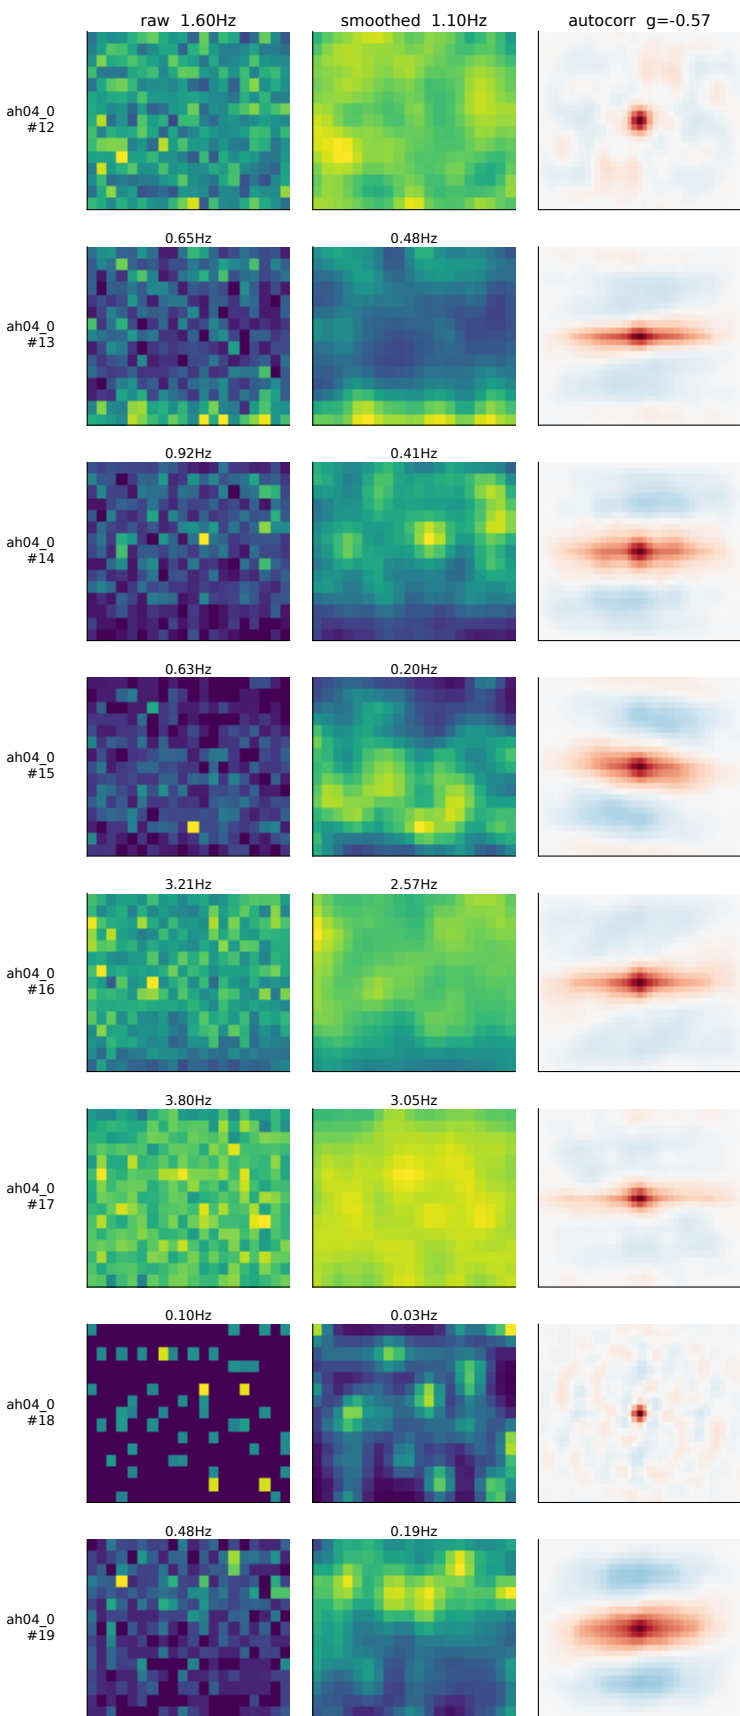


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

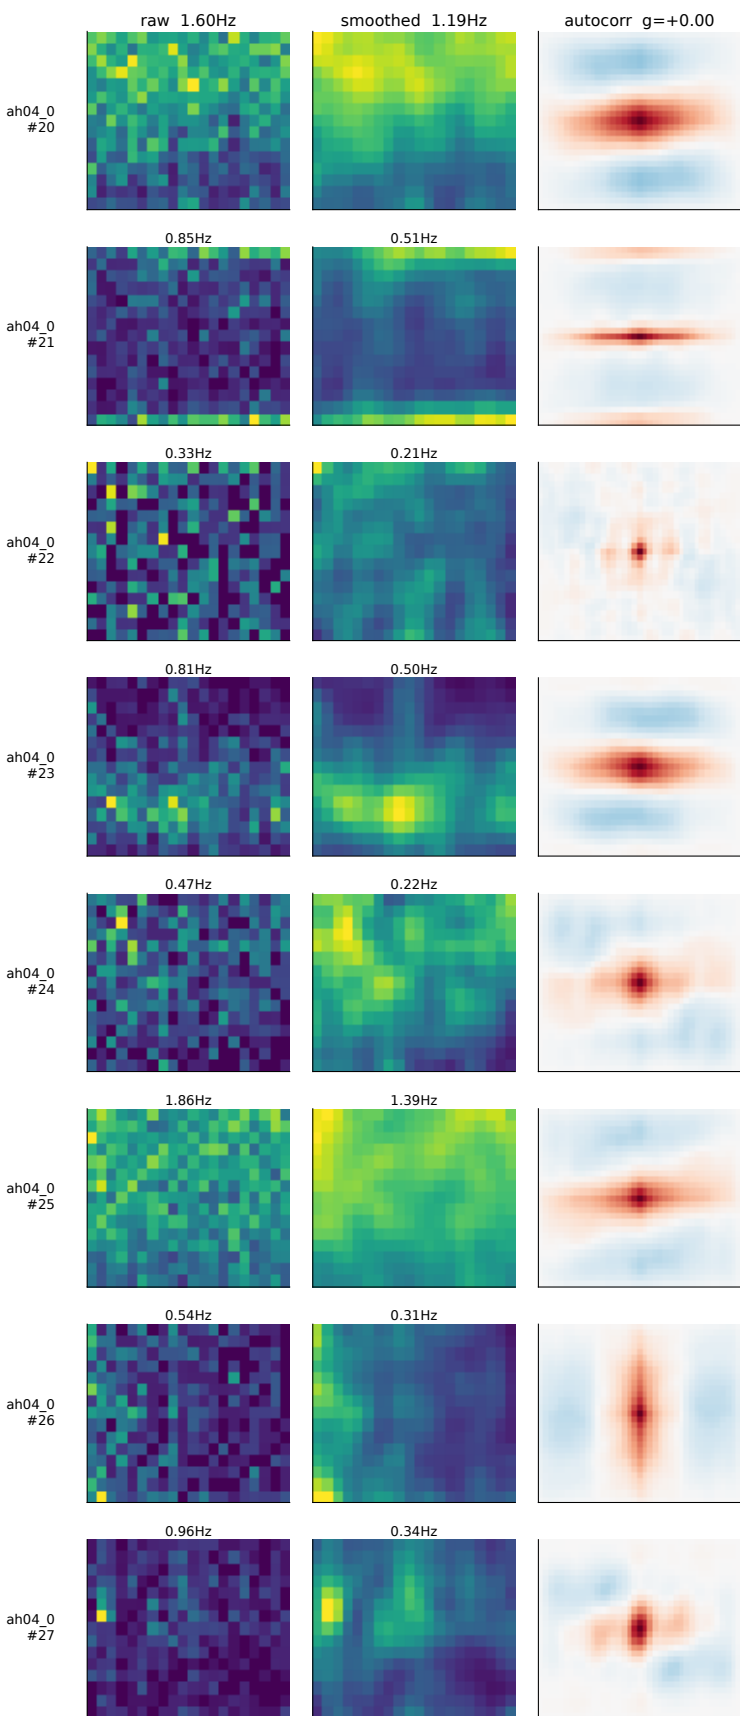


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

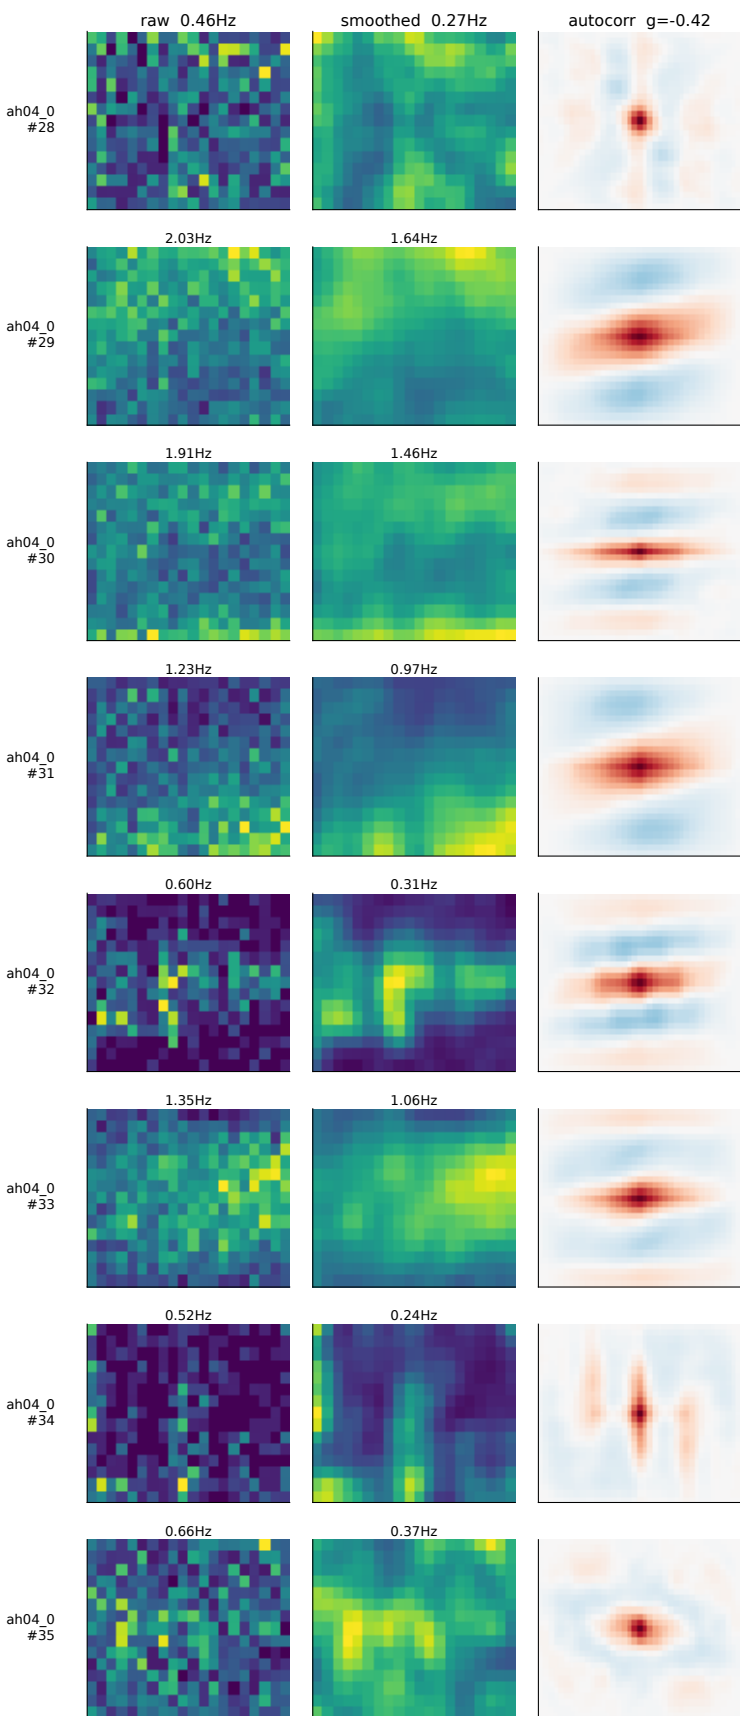


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

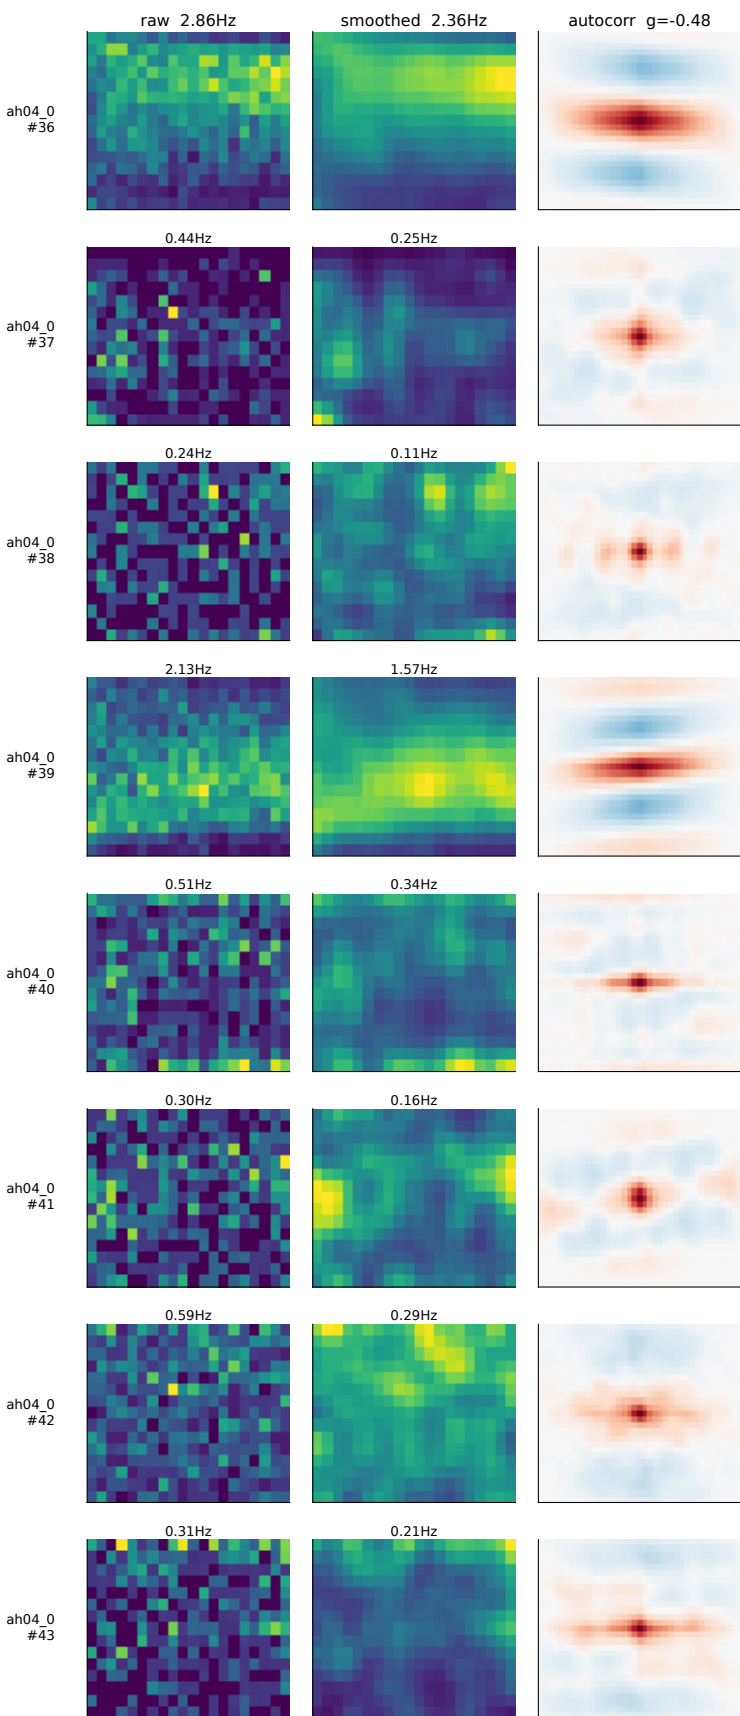


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

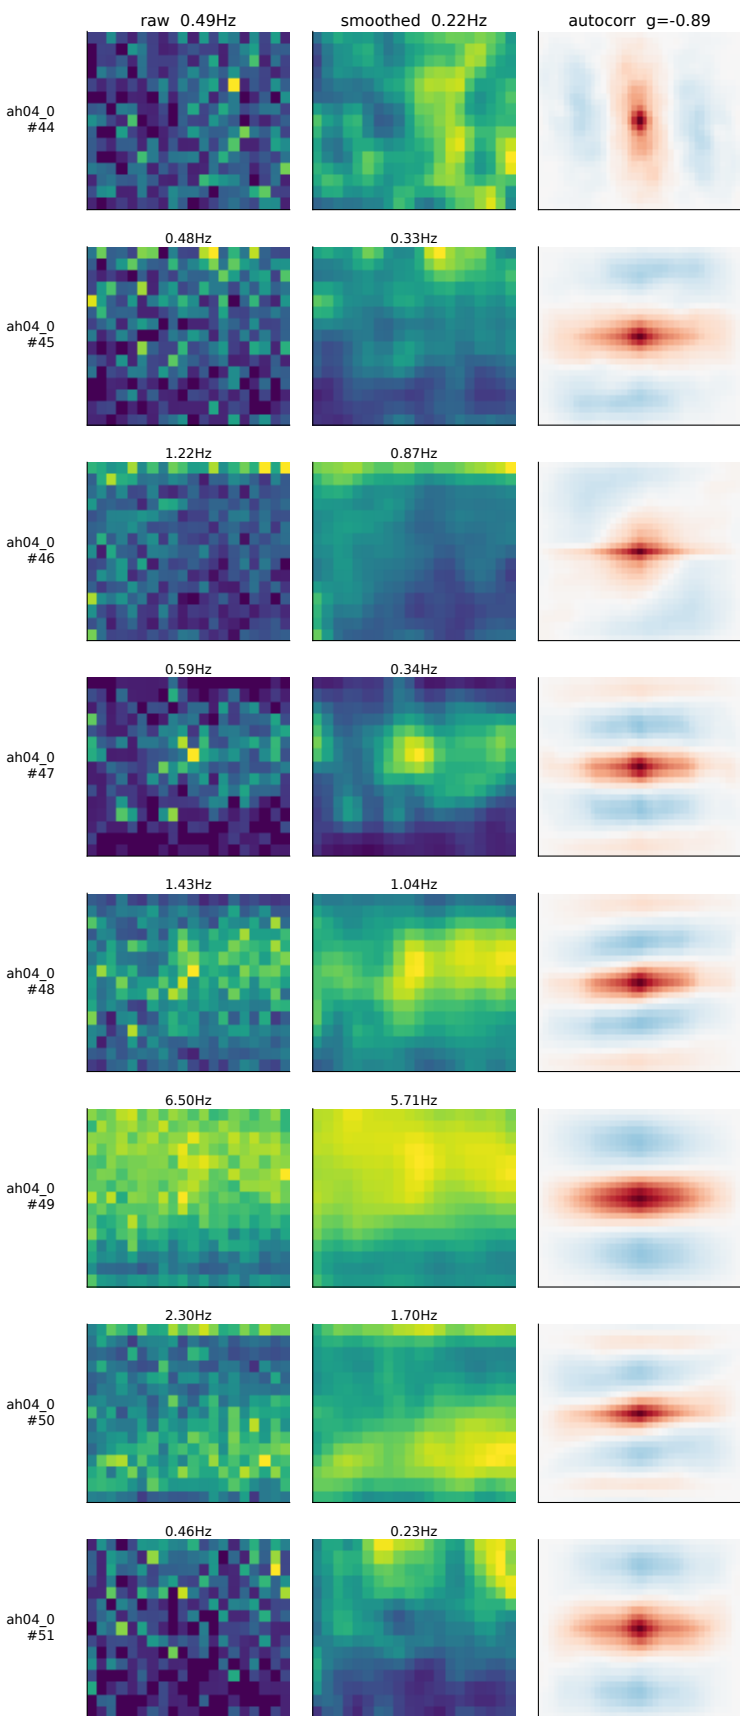


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

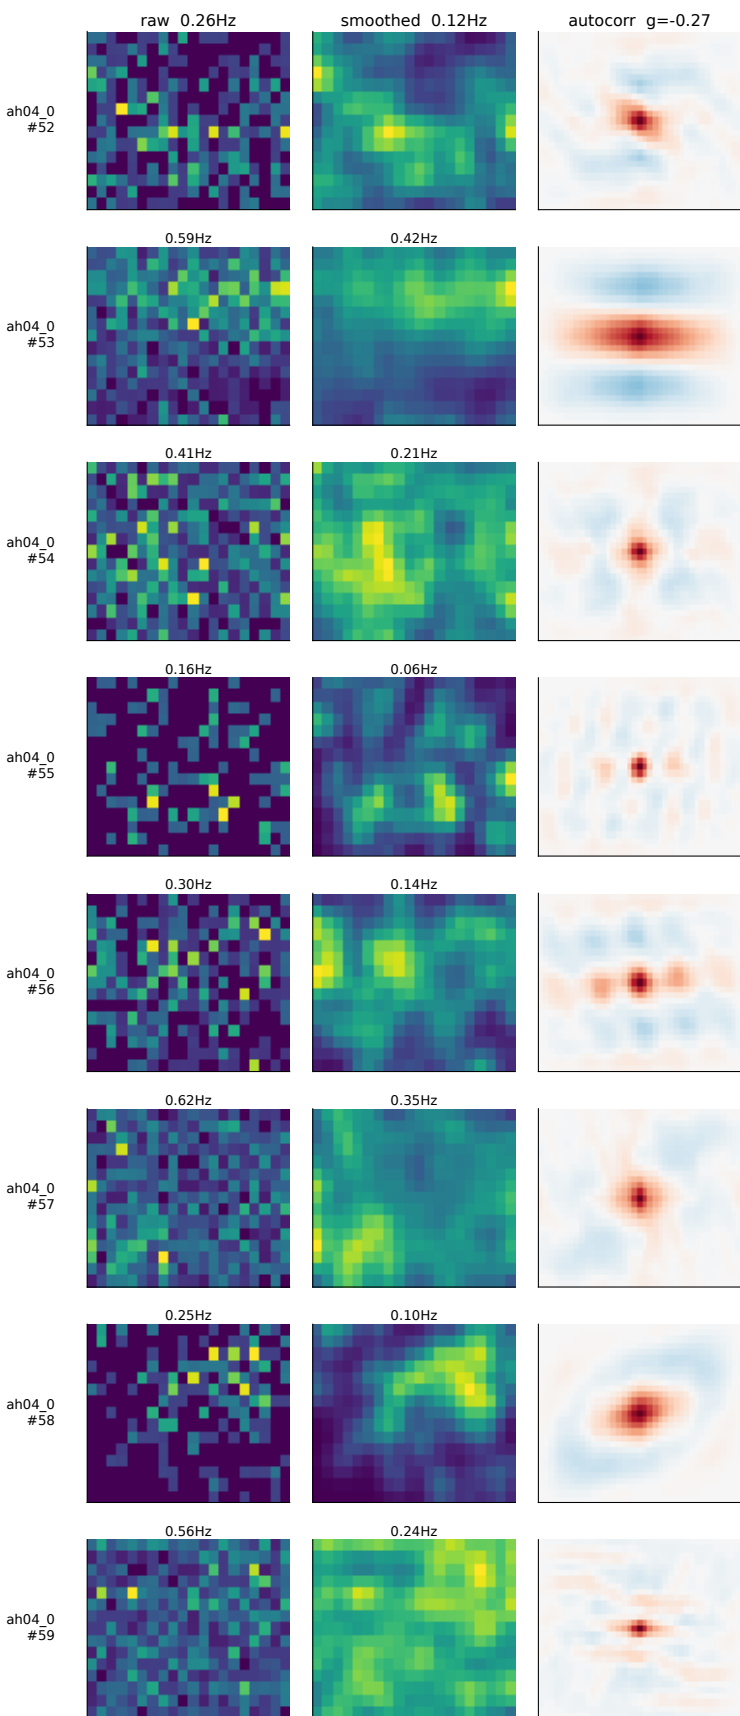


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

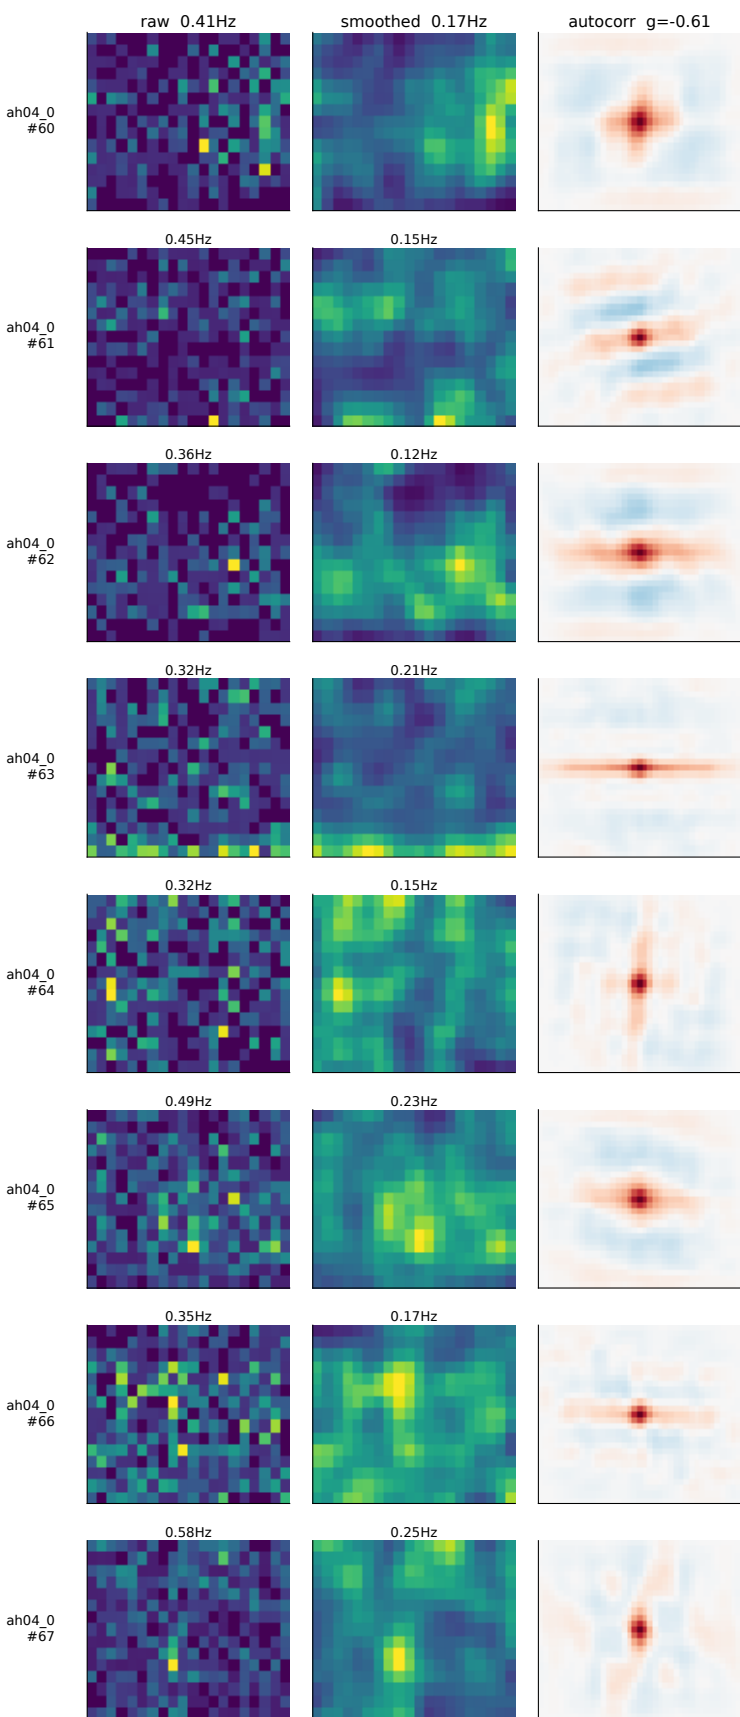


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

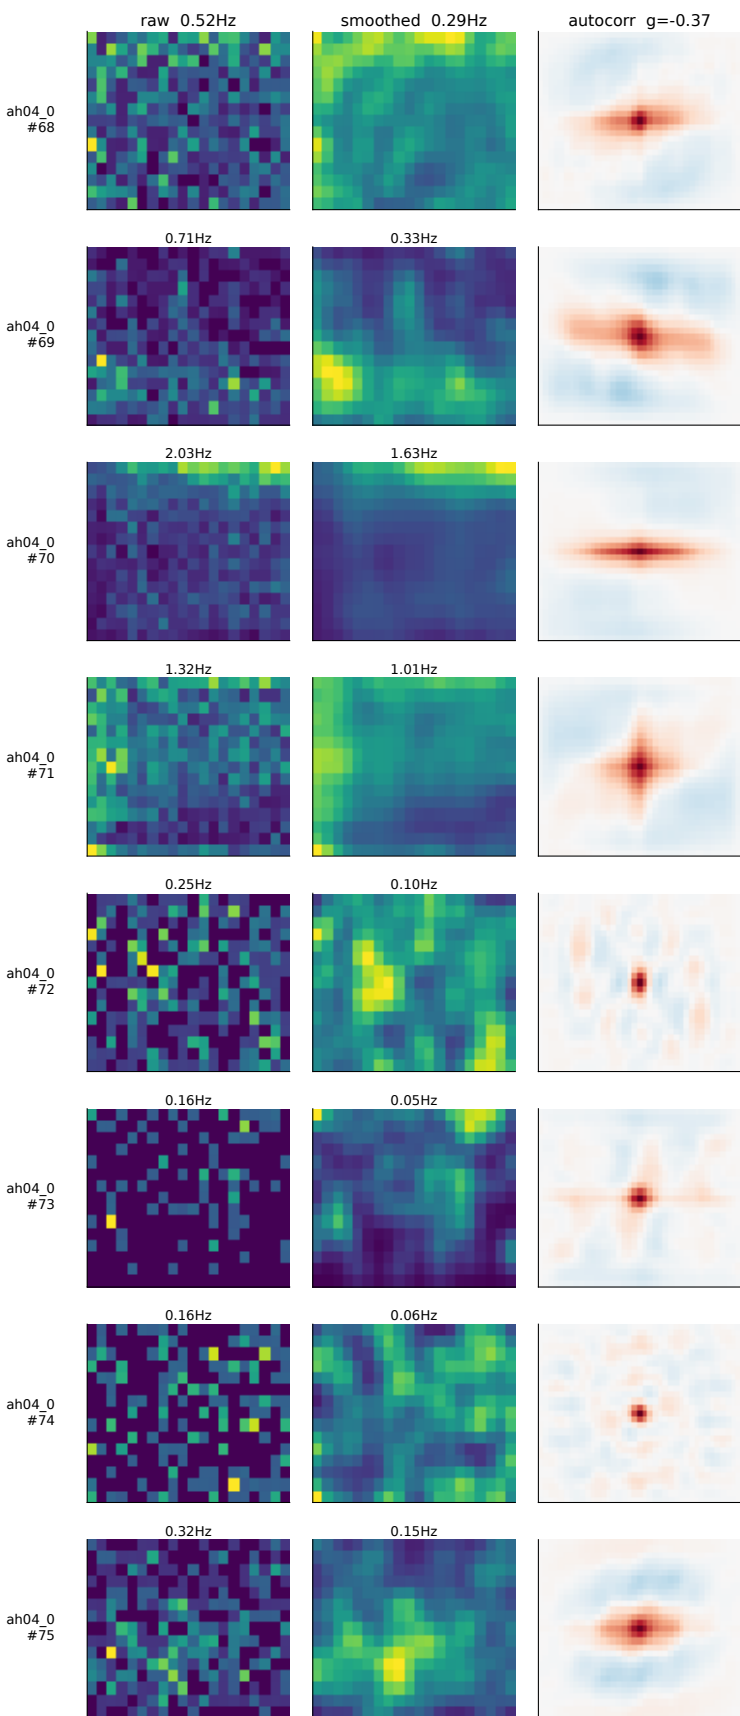


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
own beside smoothed because smoothing can create structure; no reliability measure or null is co

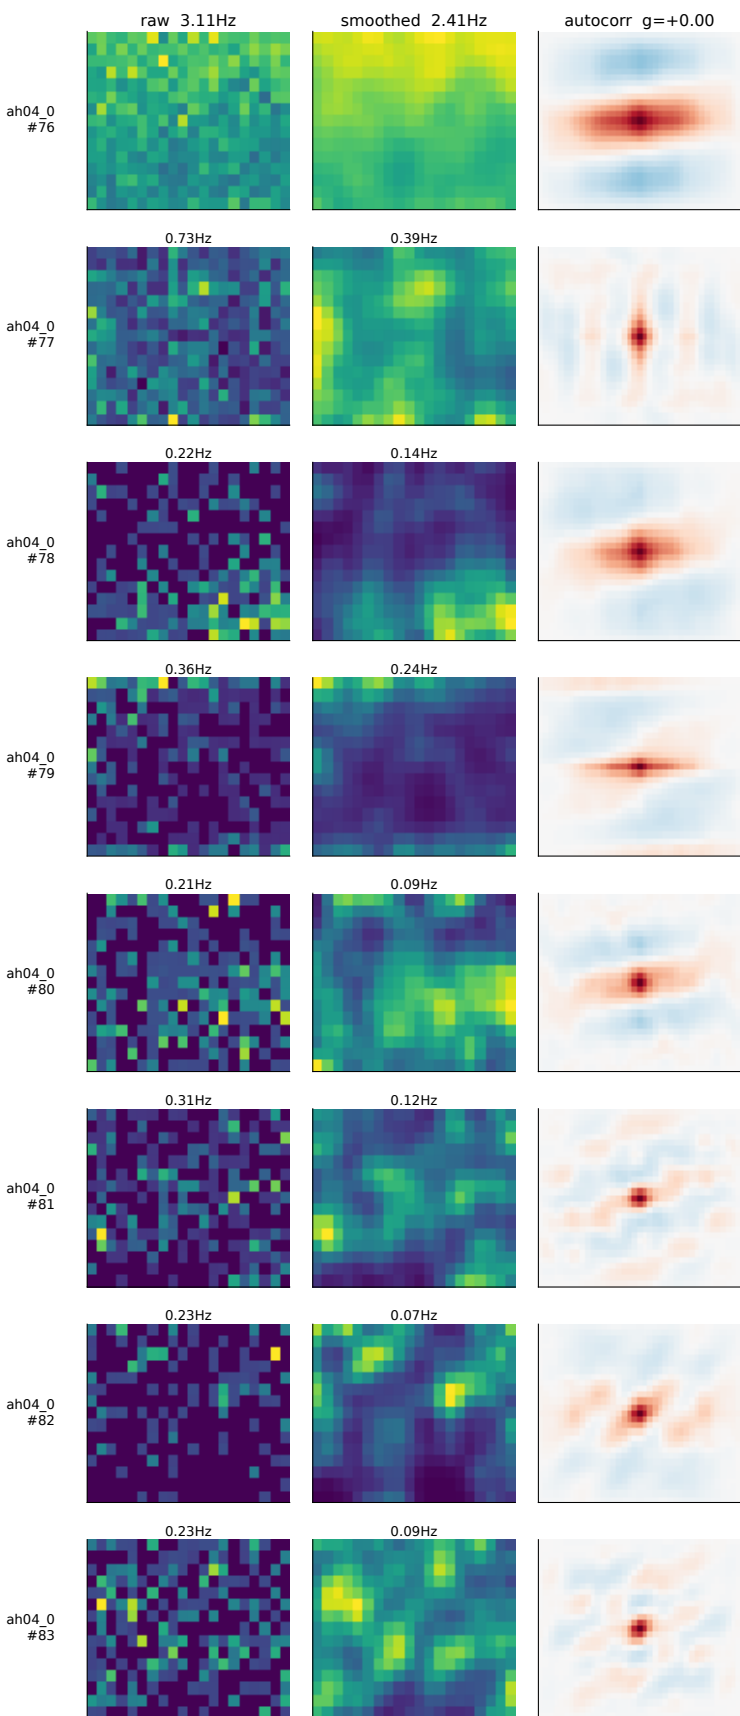


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

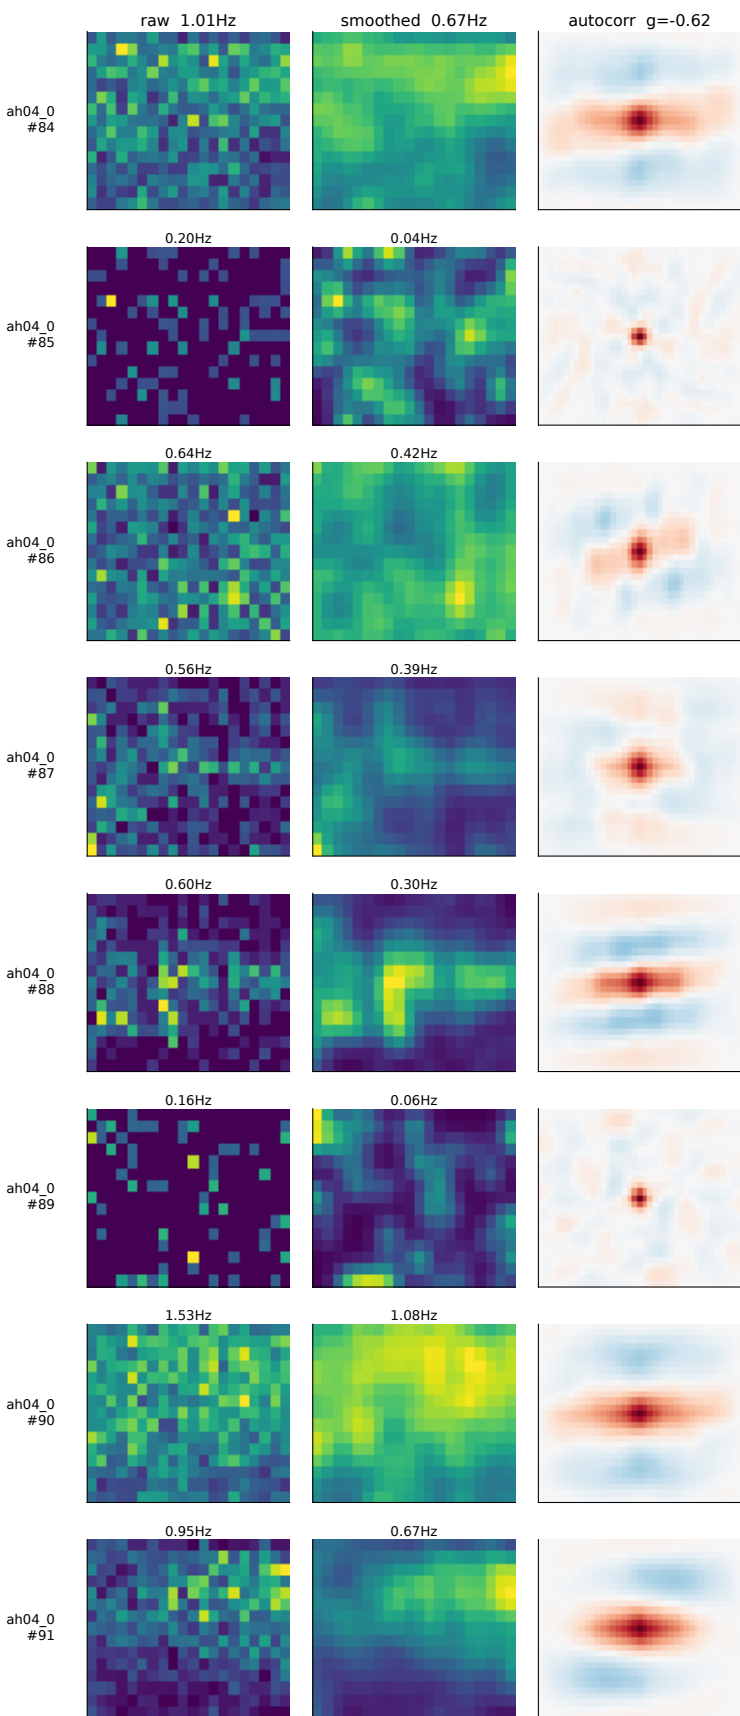


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

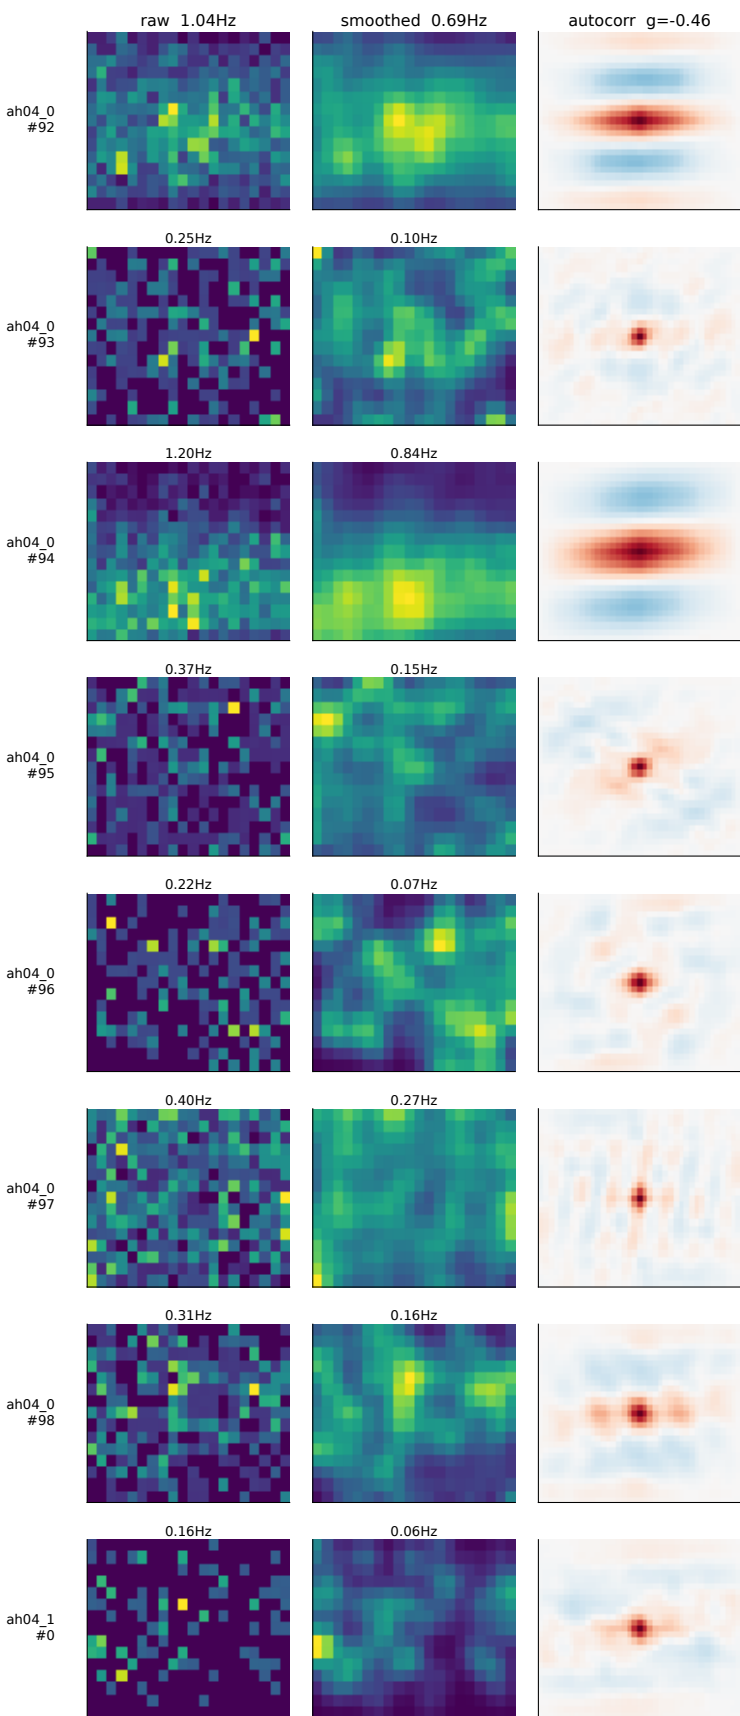


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

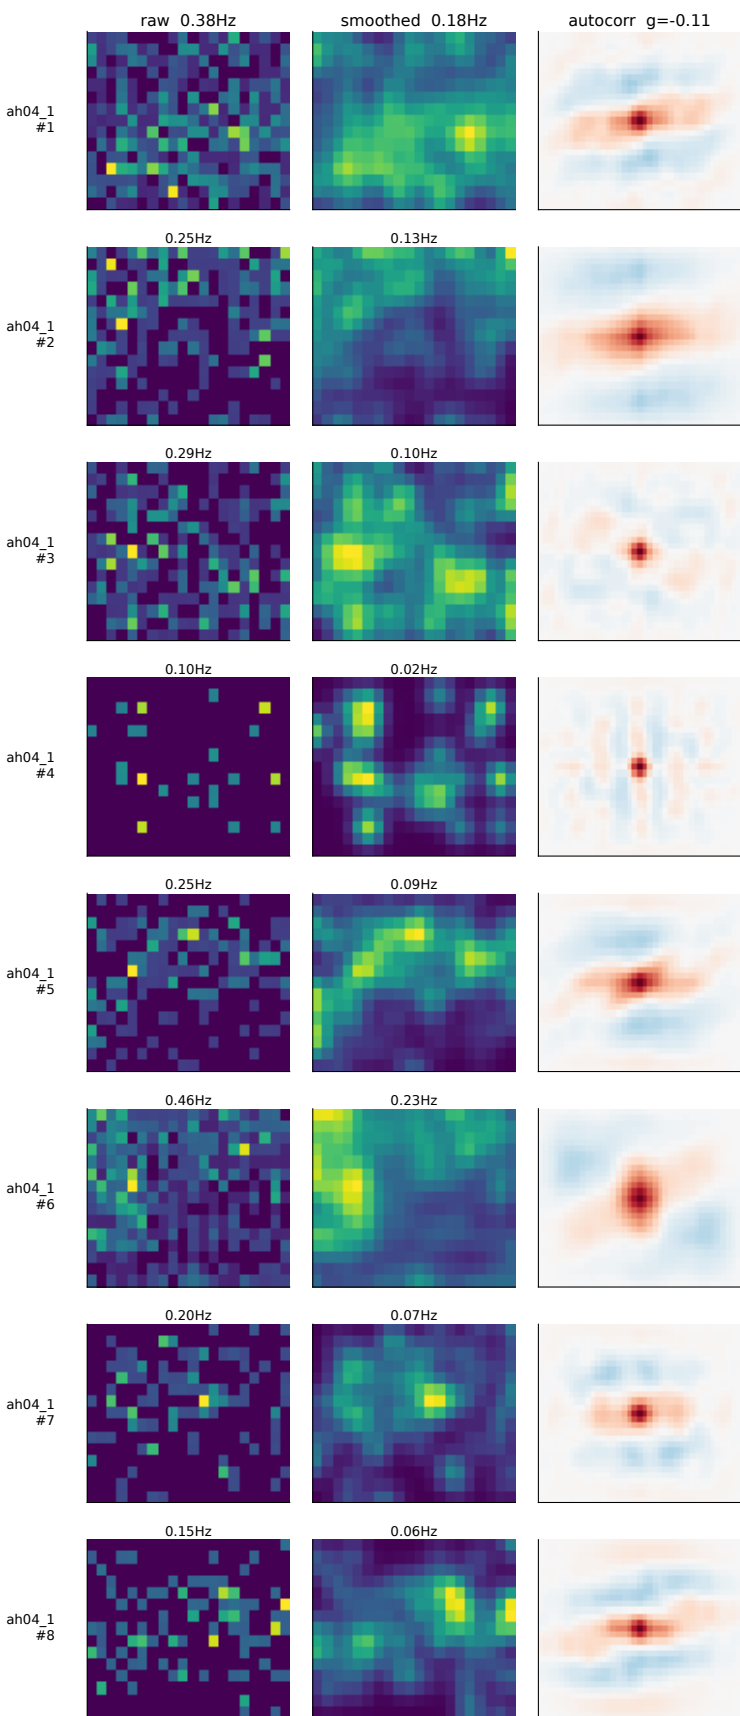


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

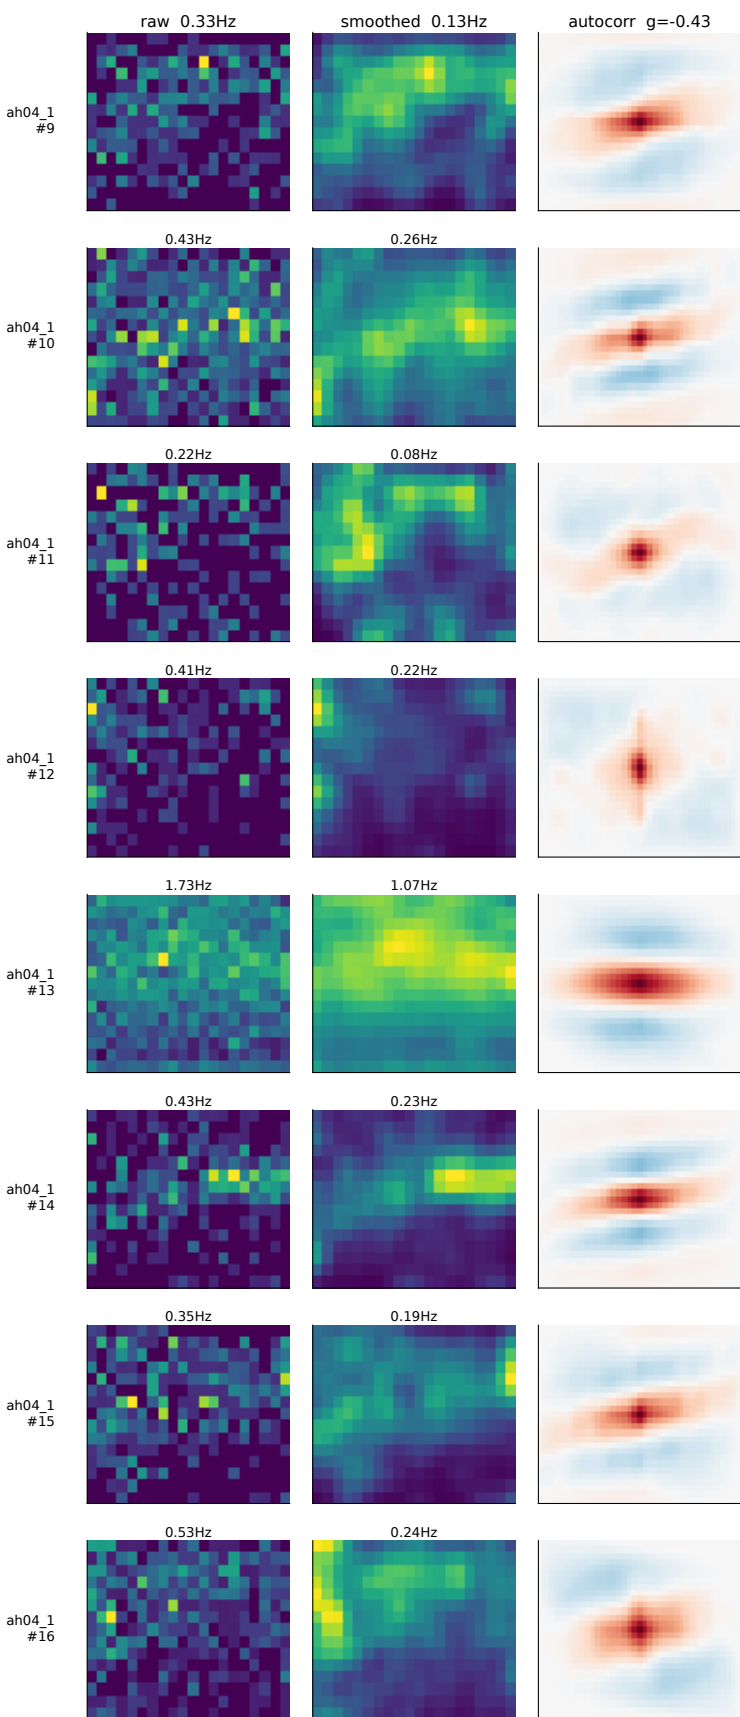


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro: down beside smoothed because smoothing can create structure; no reliability measure or null is co

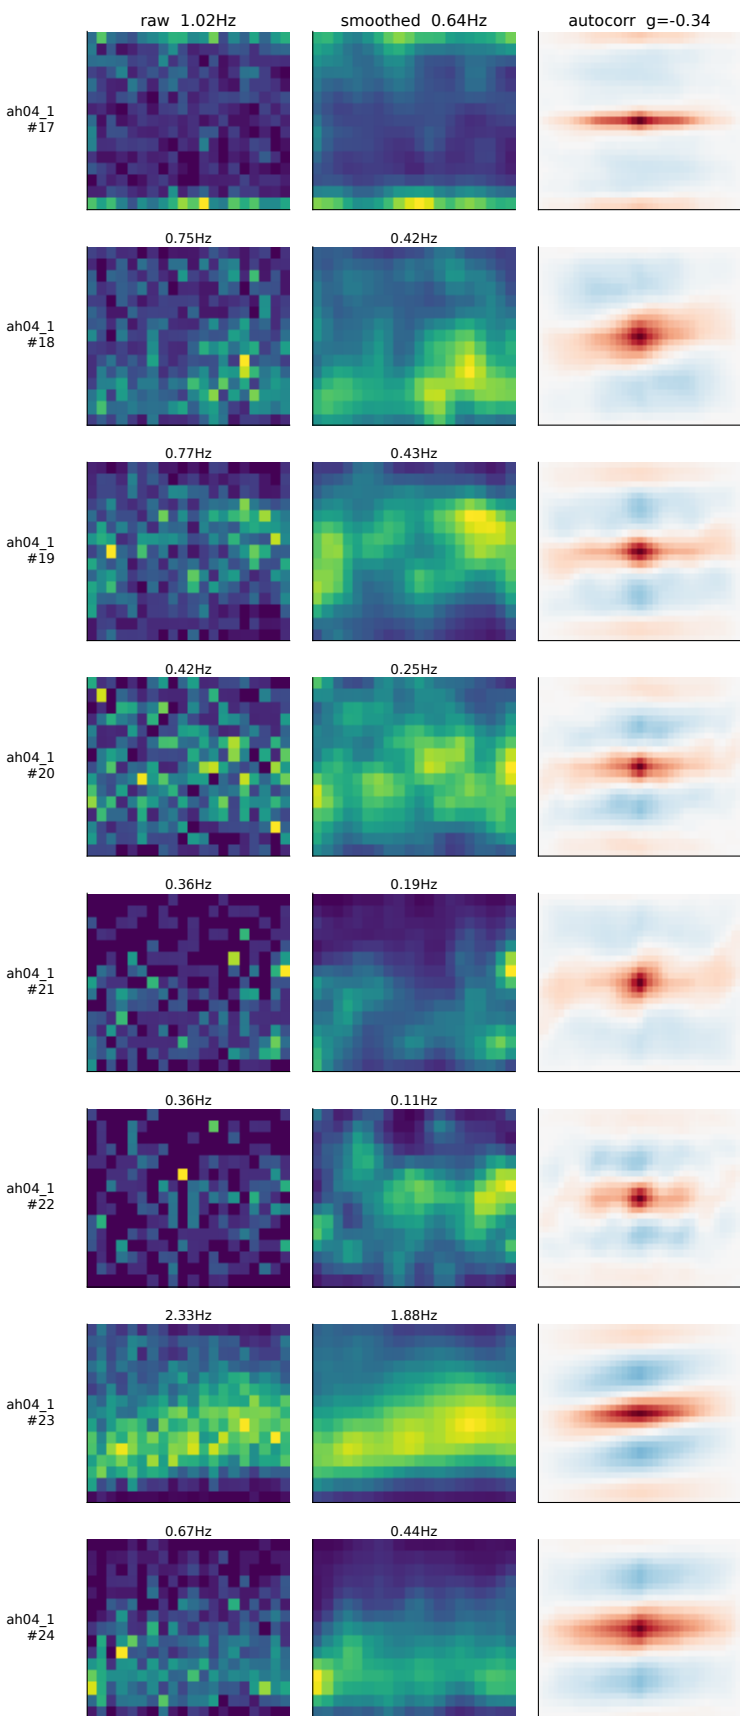


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

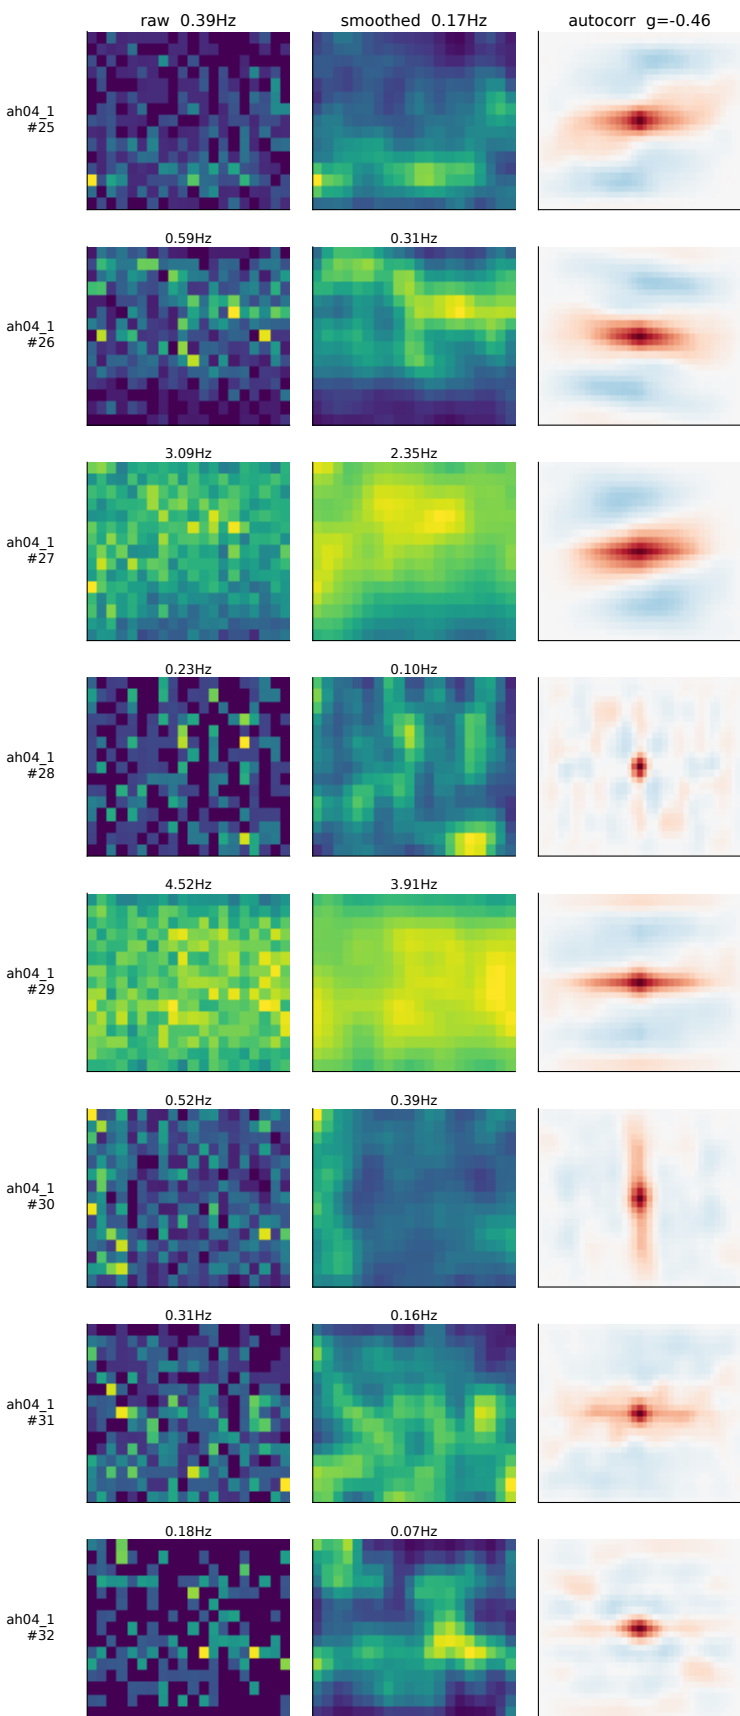


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

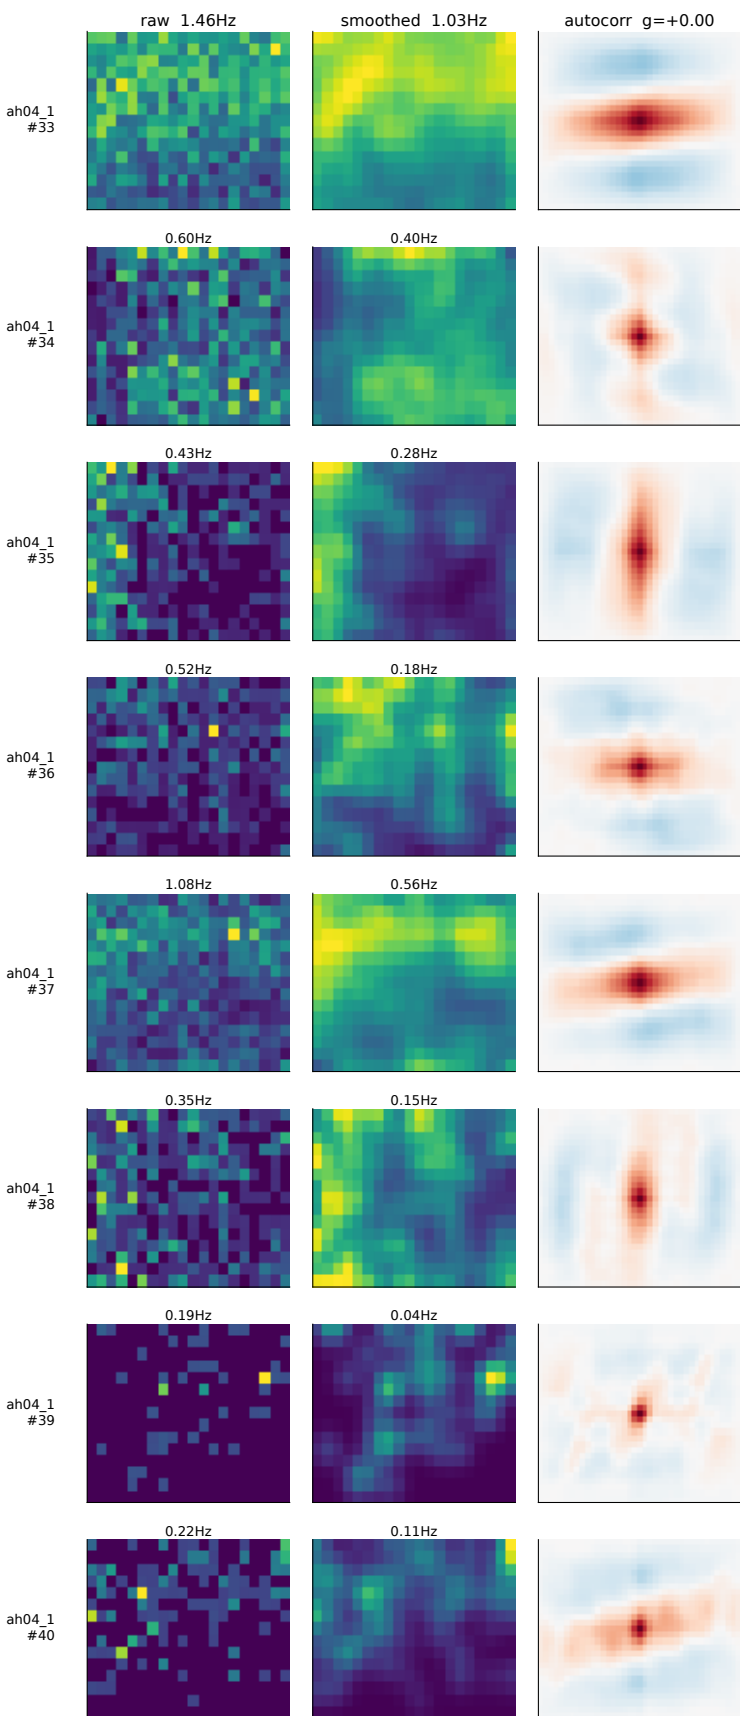


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

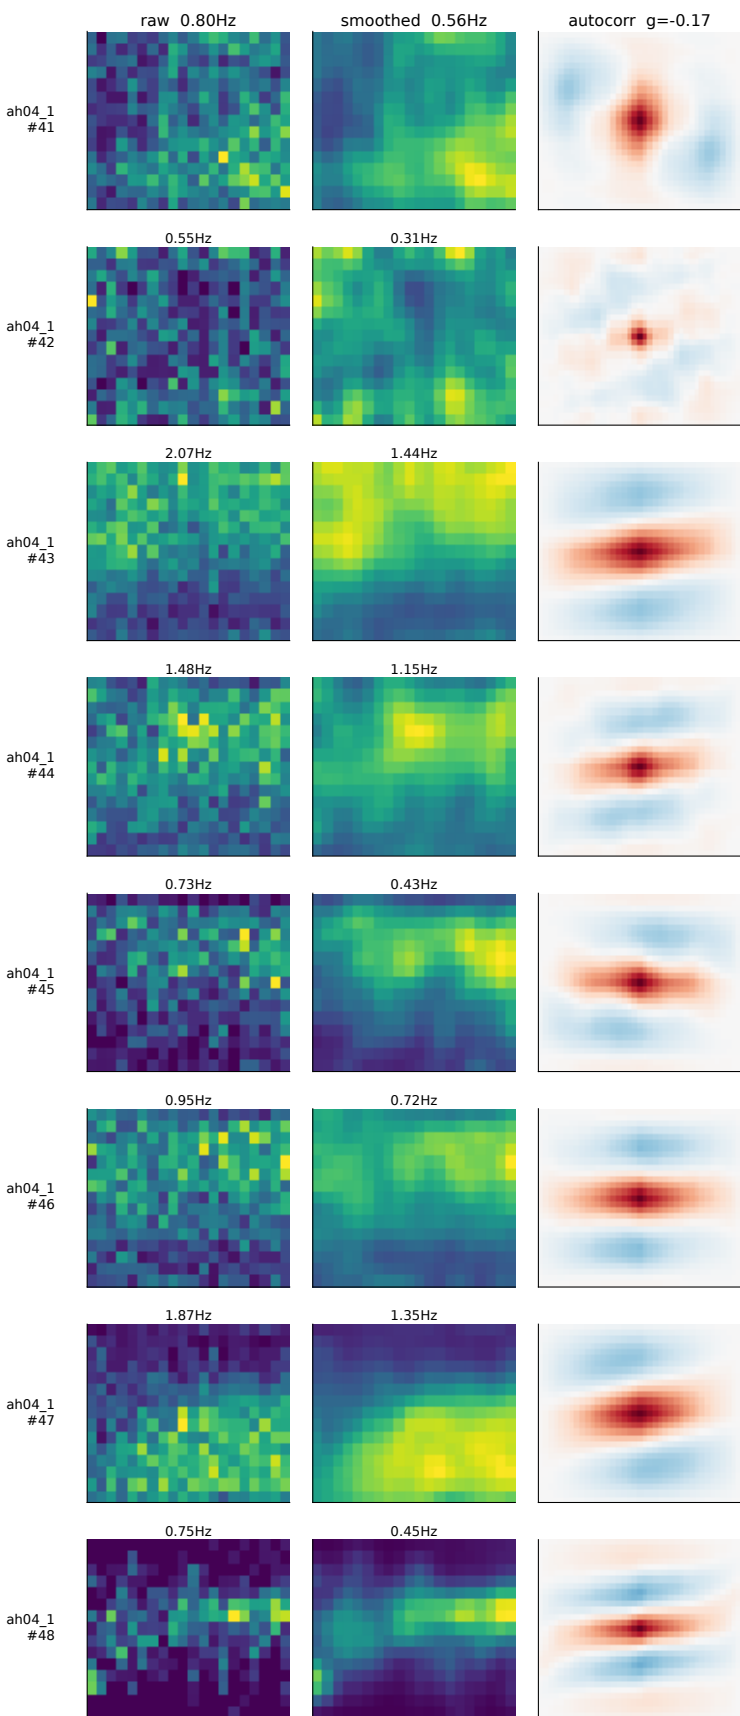


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

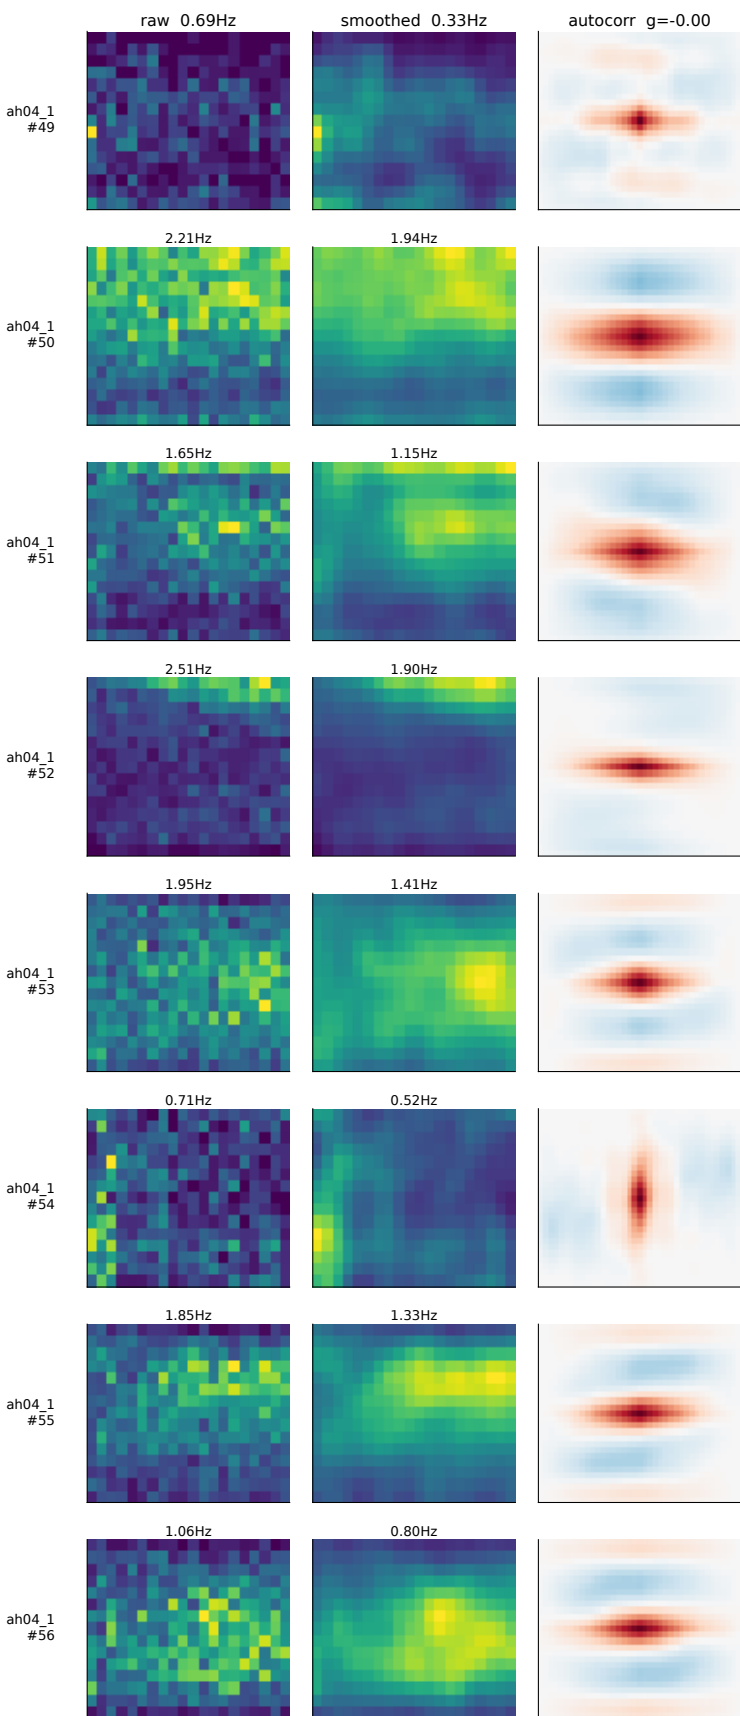


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

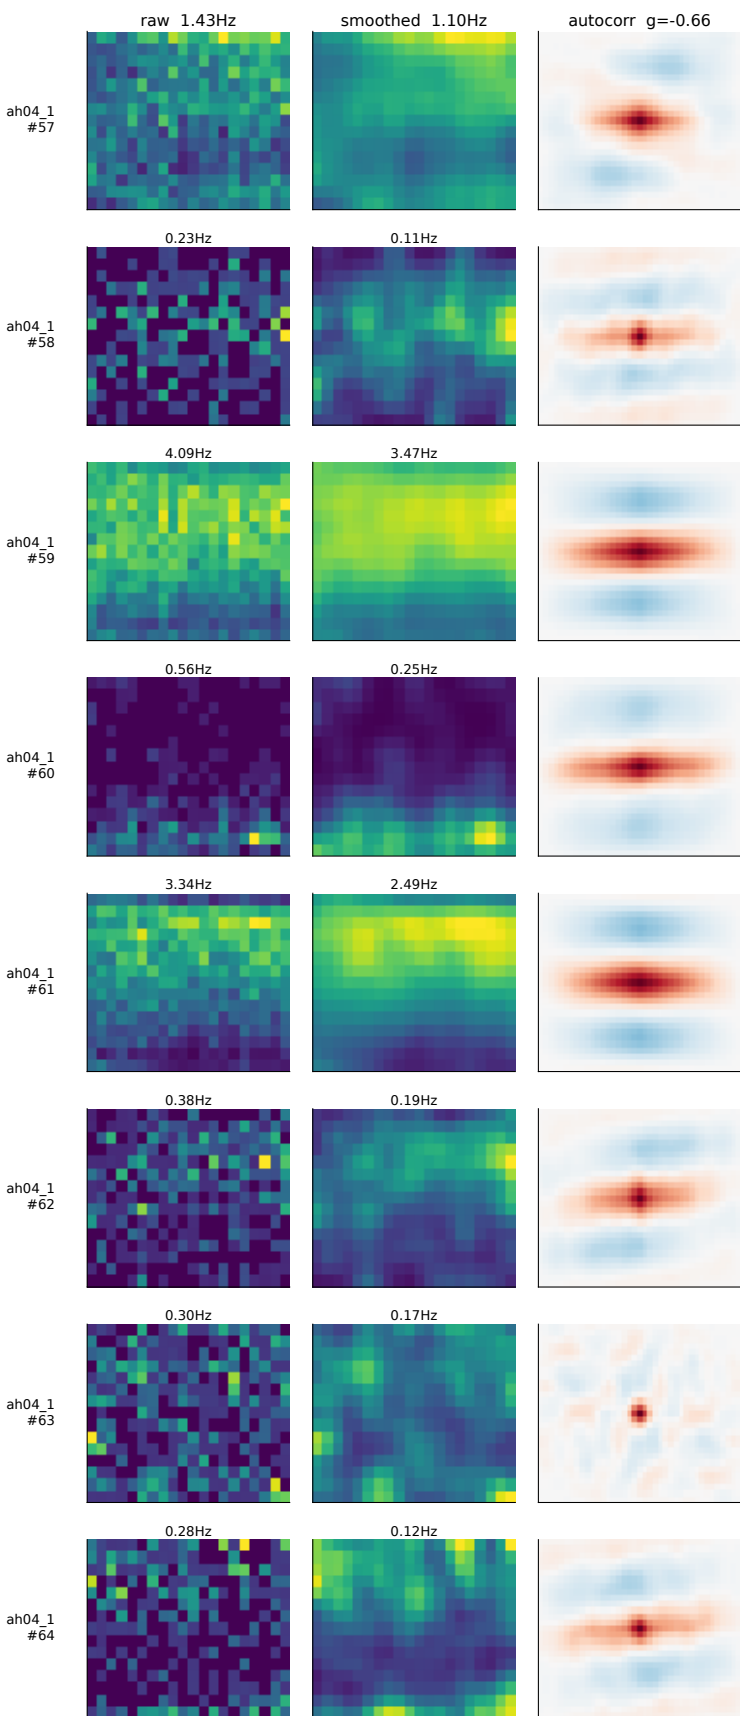


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

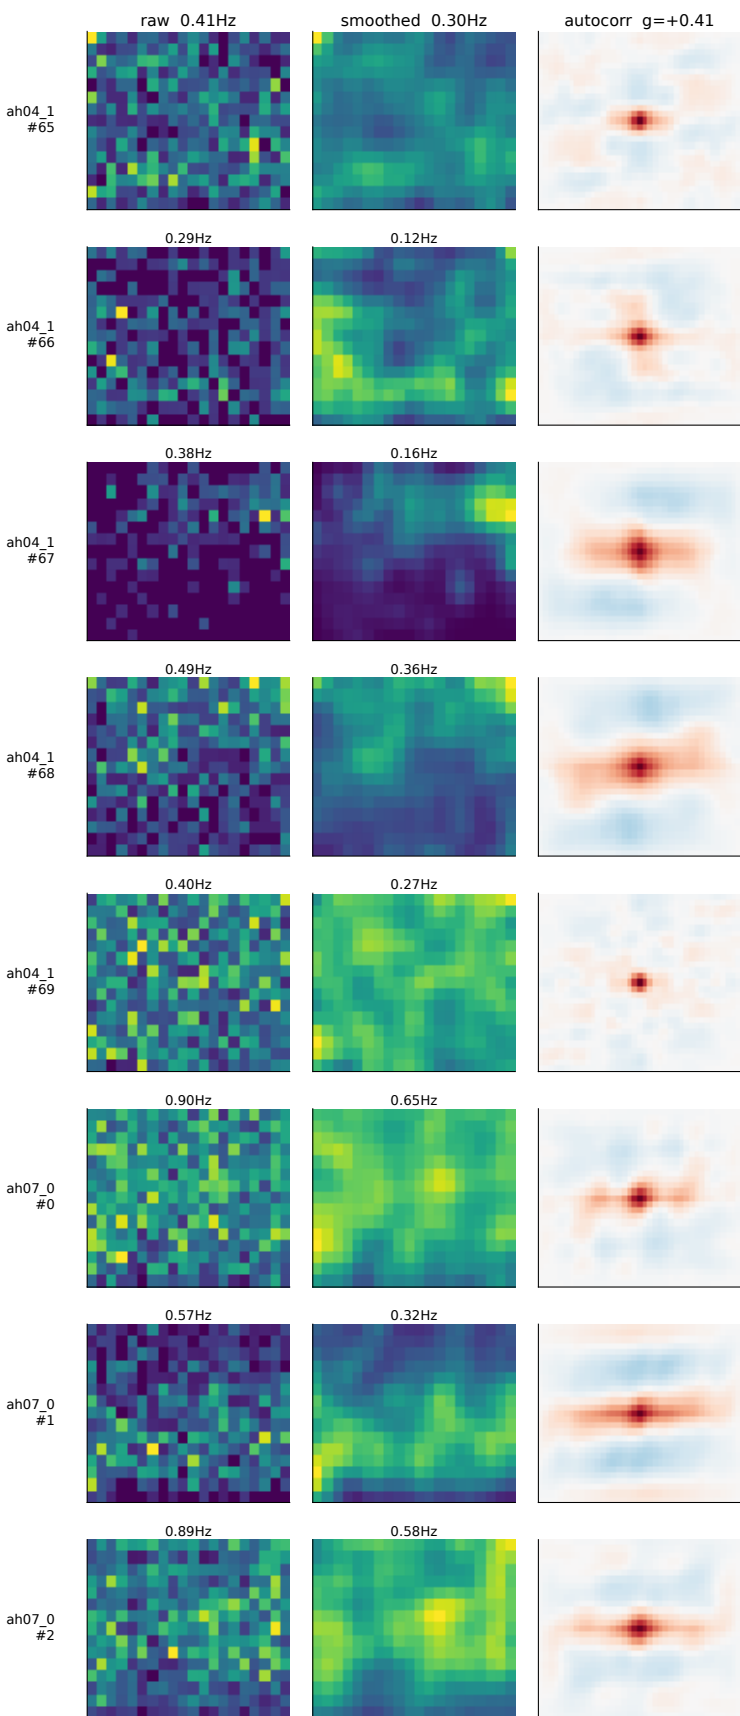


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

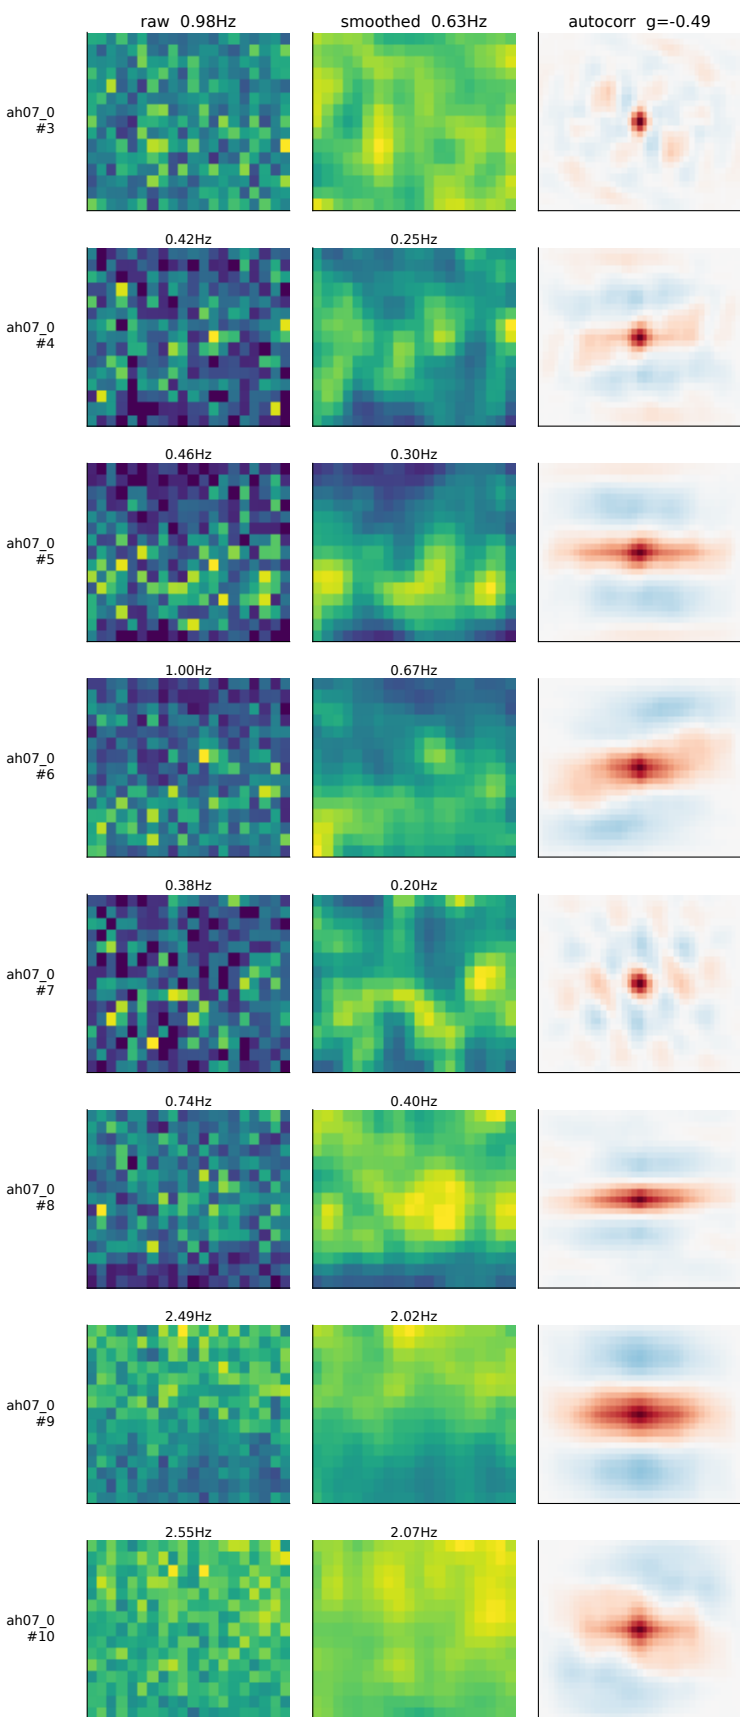


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

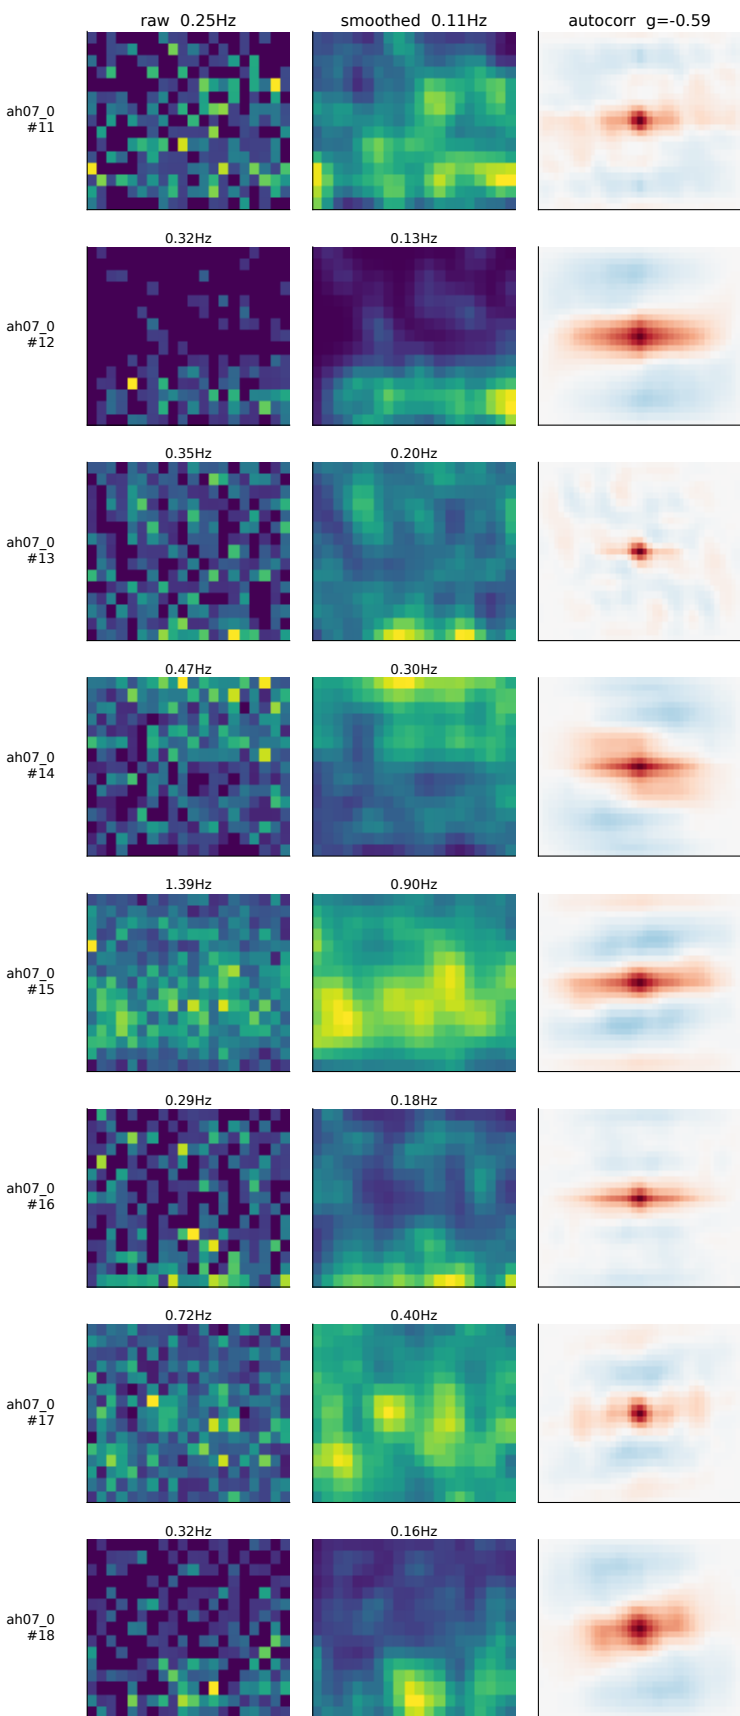


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

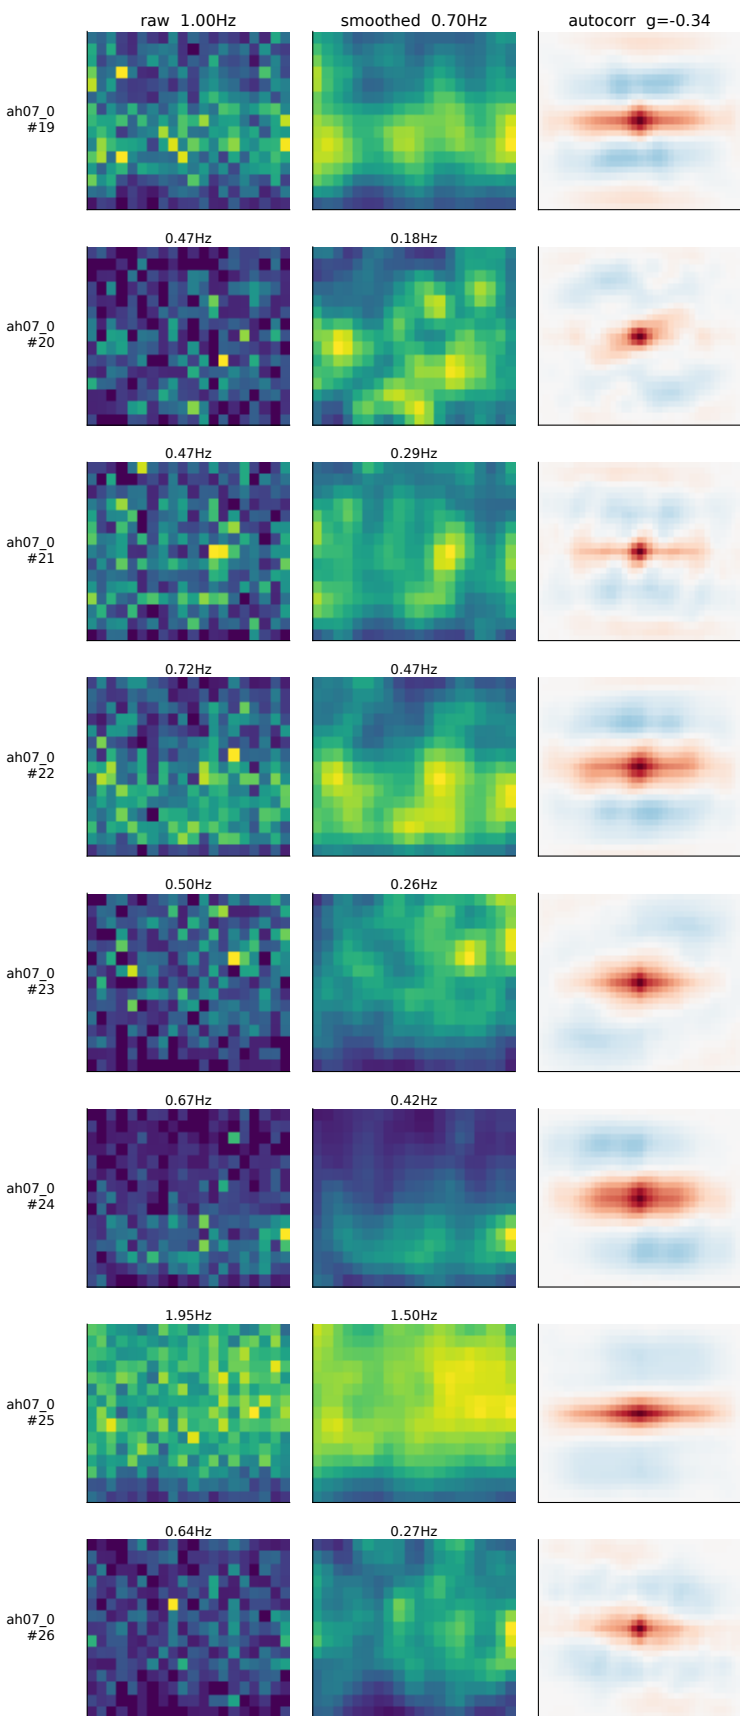


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

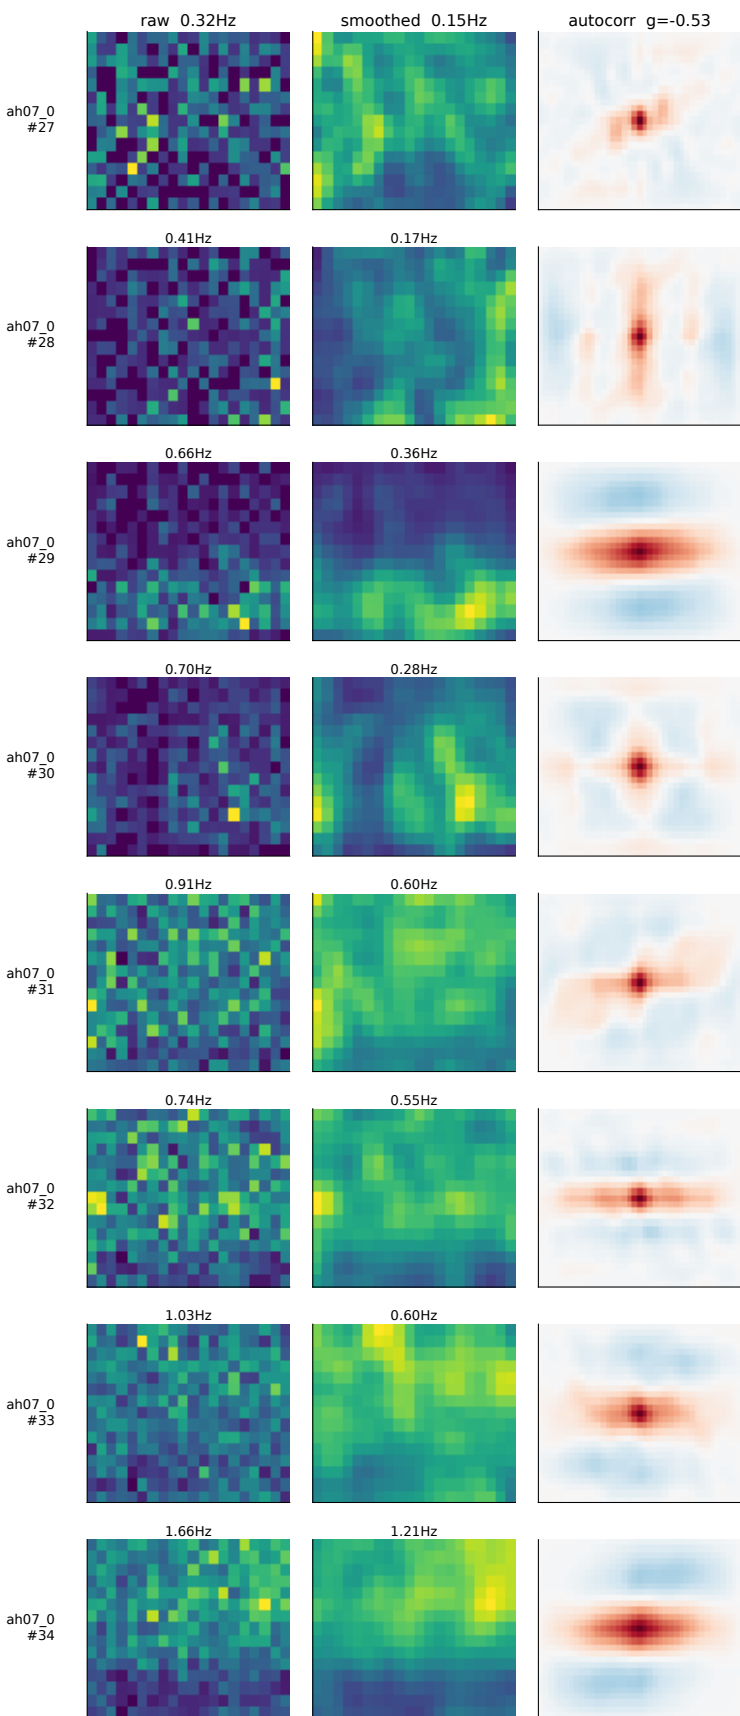


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
own beside smoothed because smoothing can create structure; no reliability measure or null is co

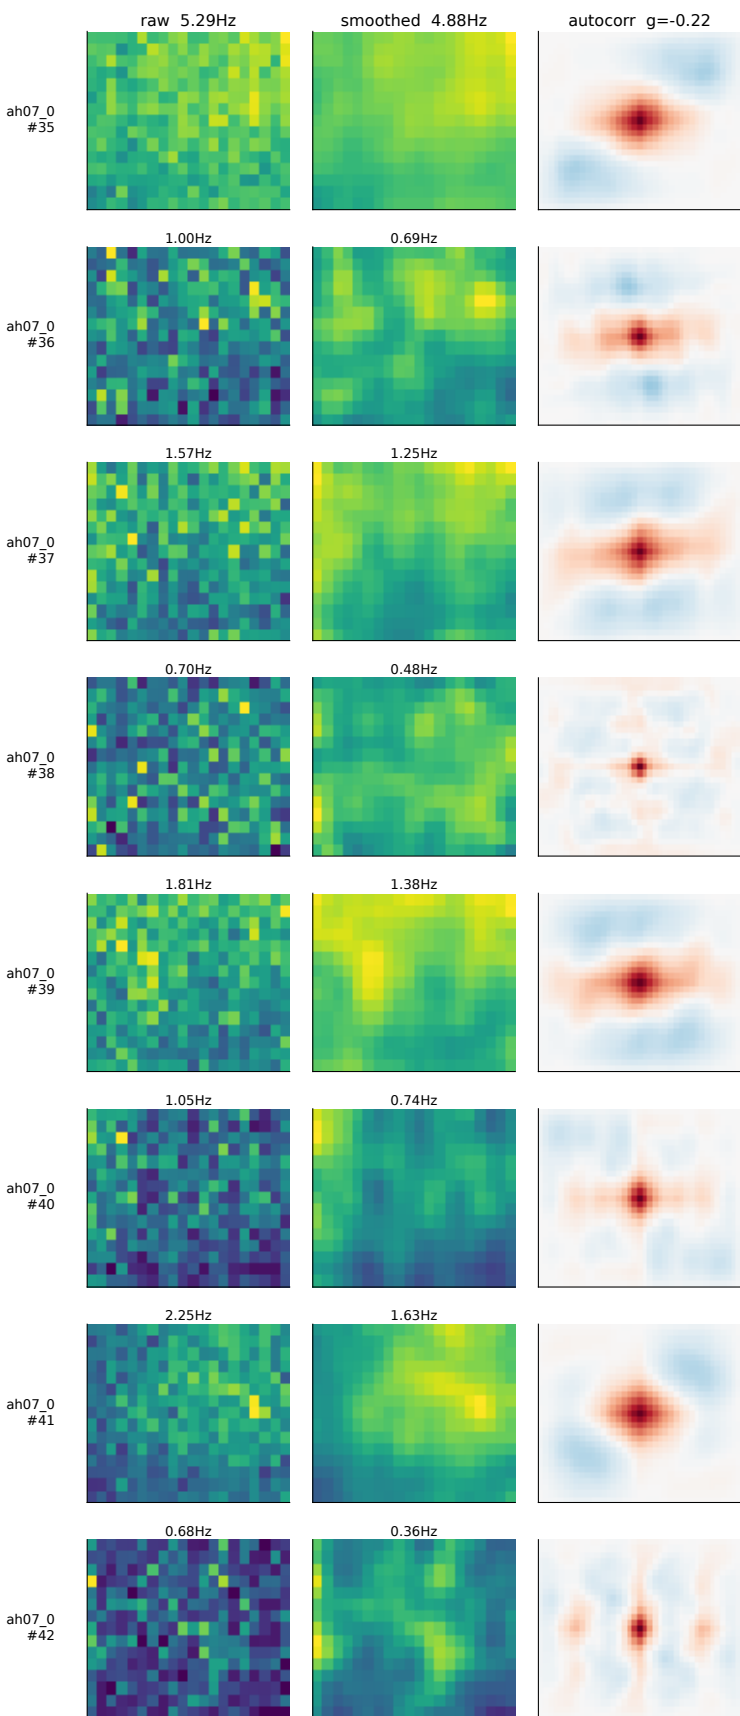


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

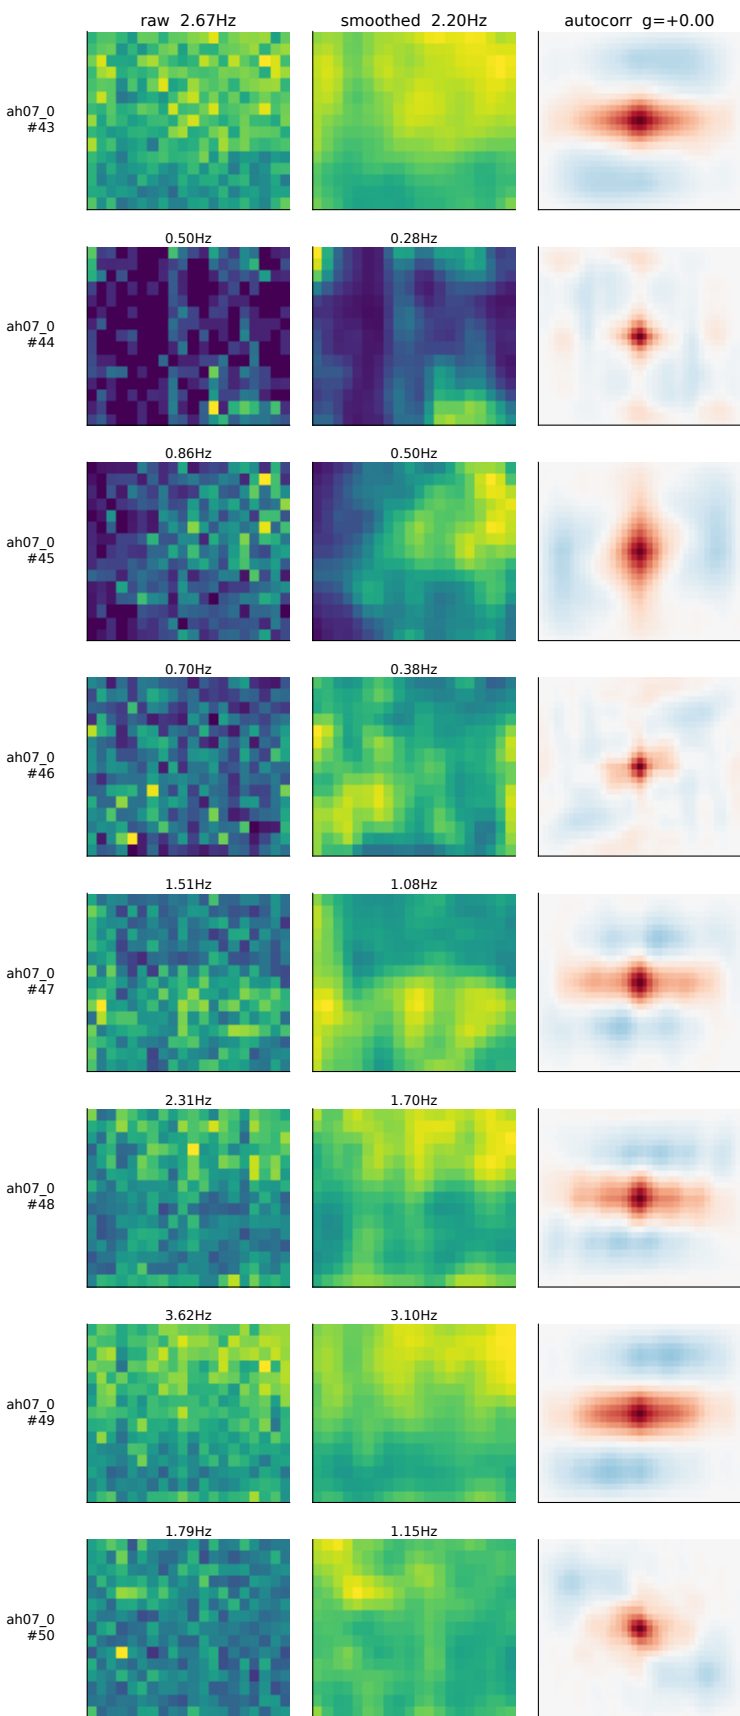


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

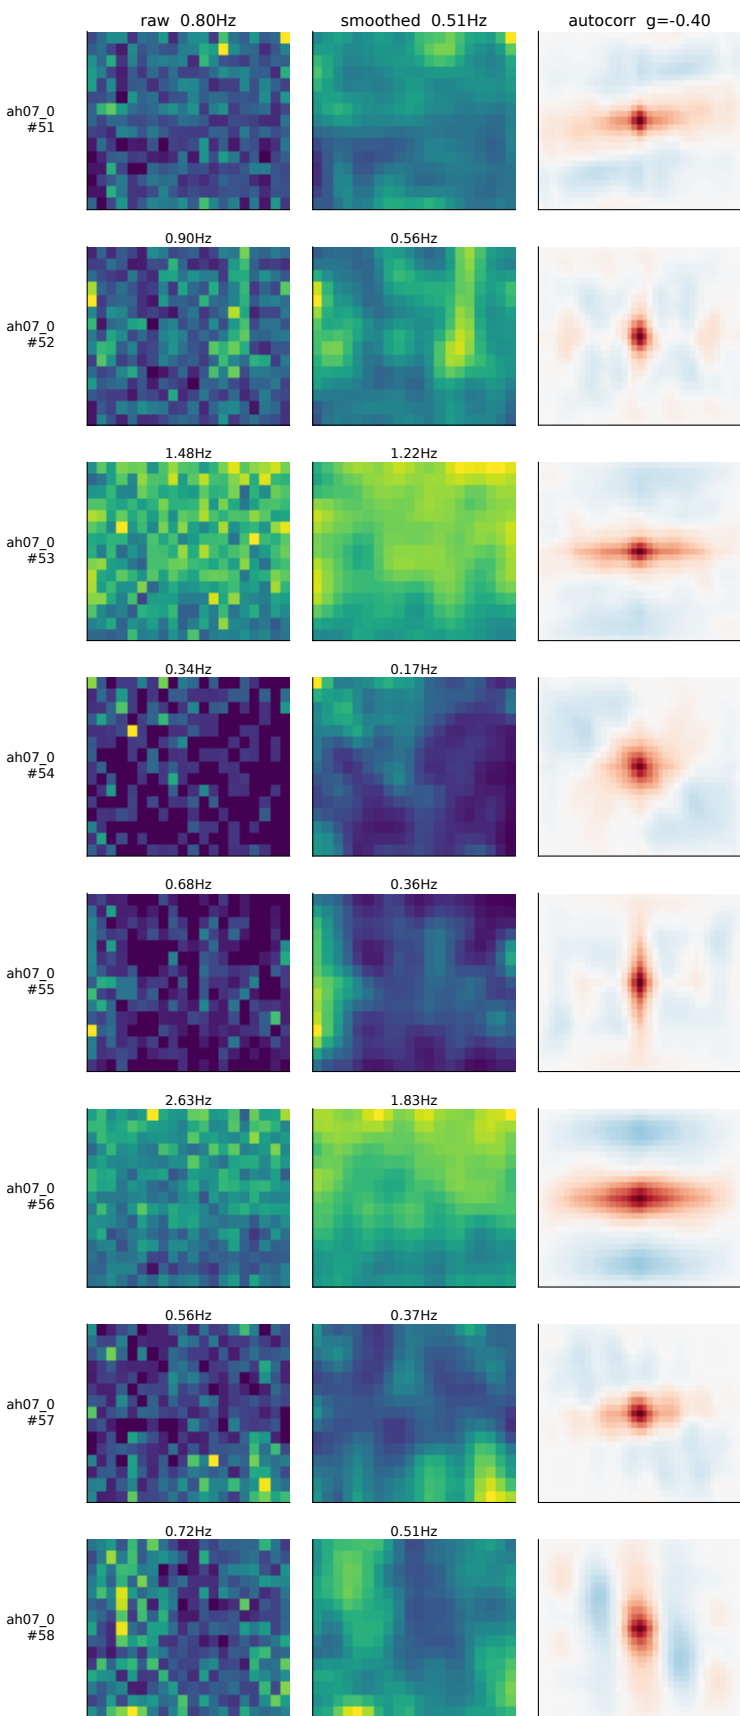


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

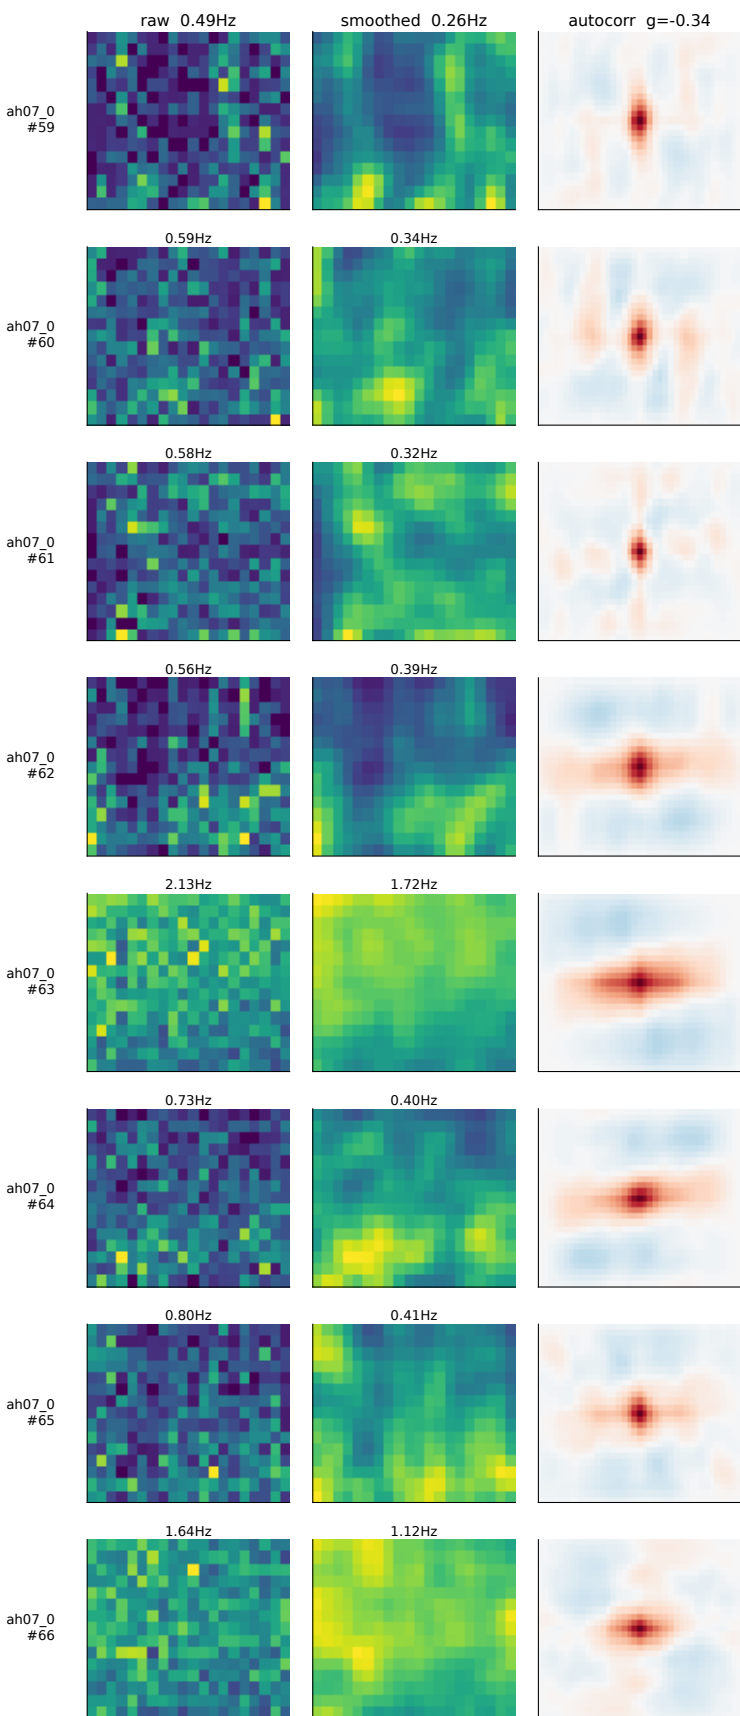


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

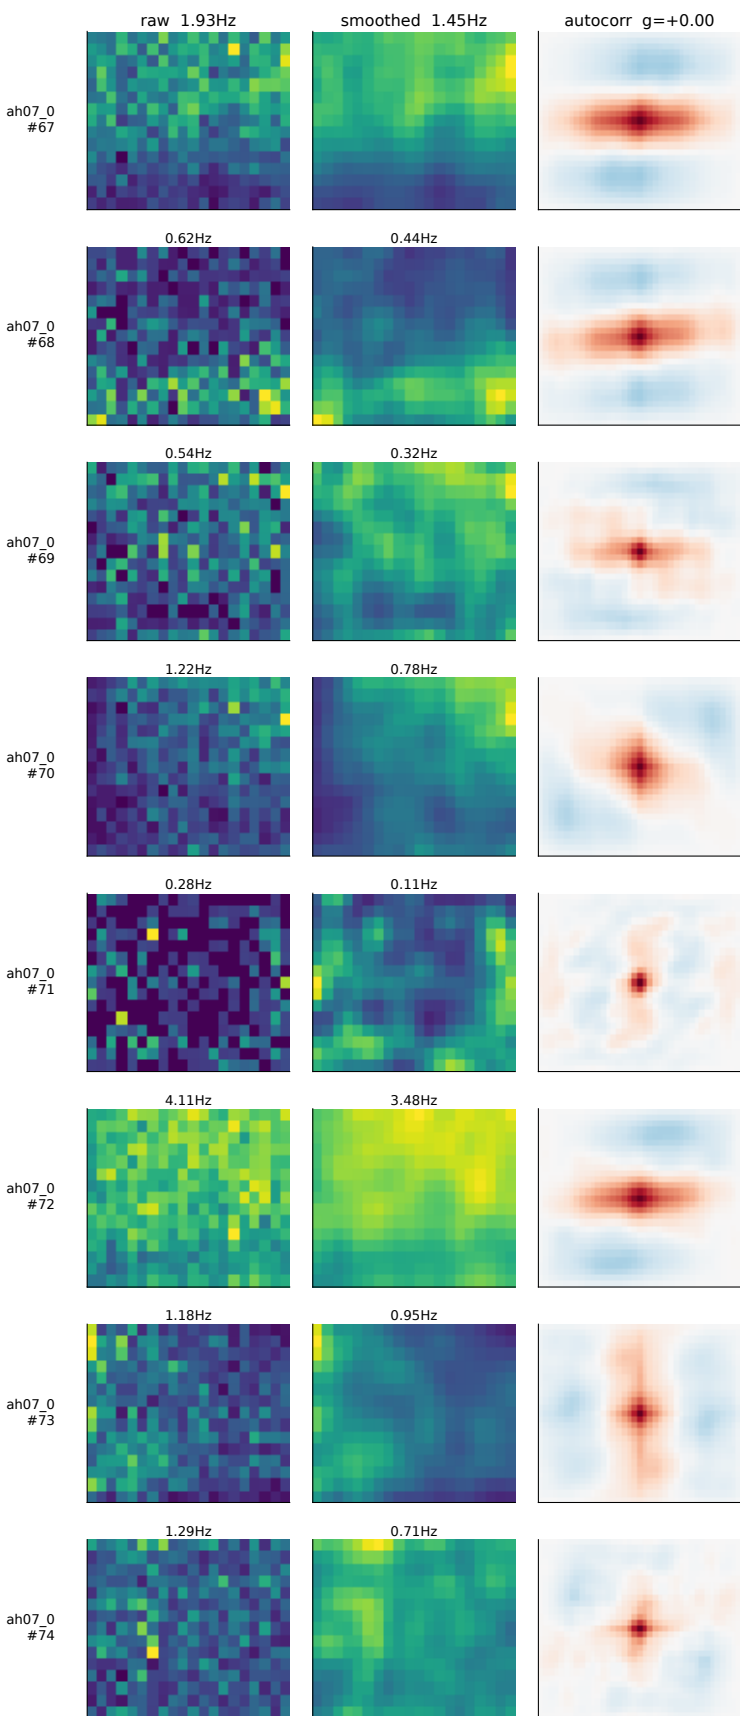


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

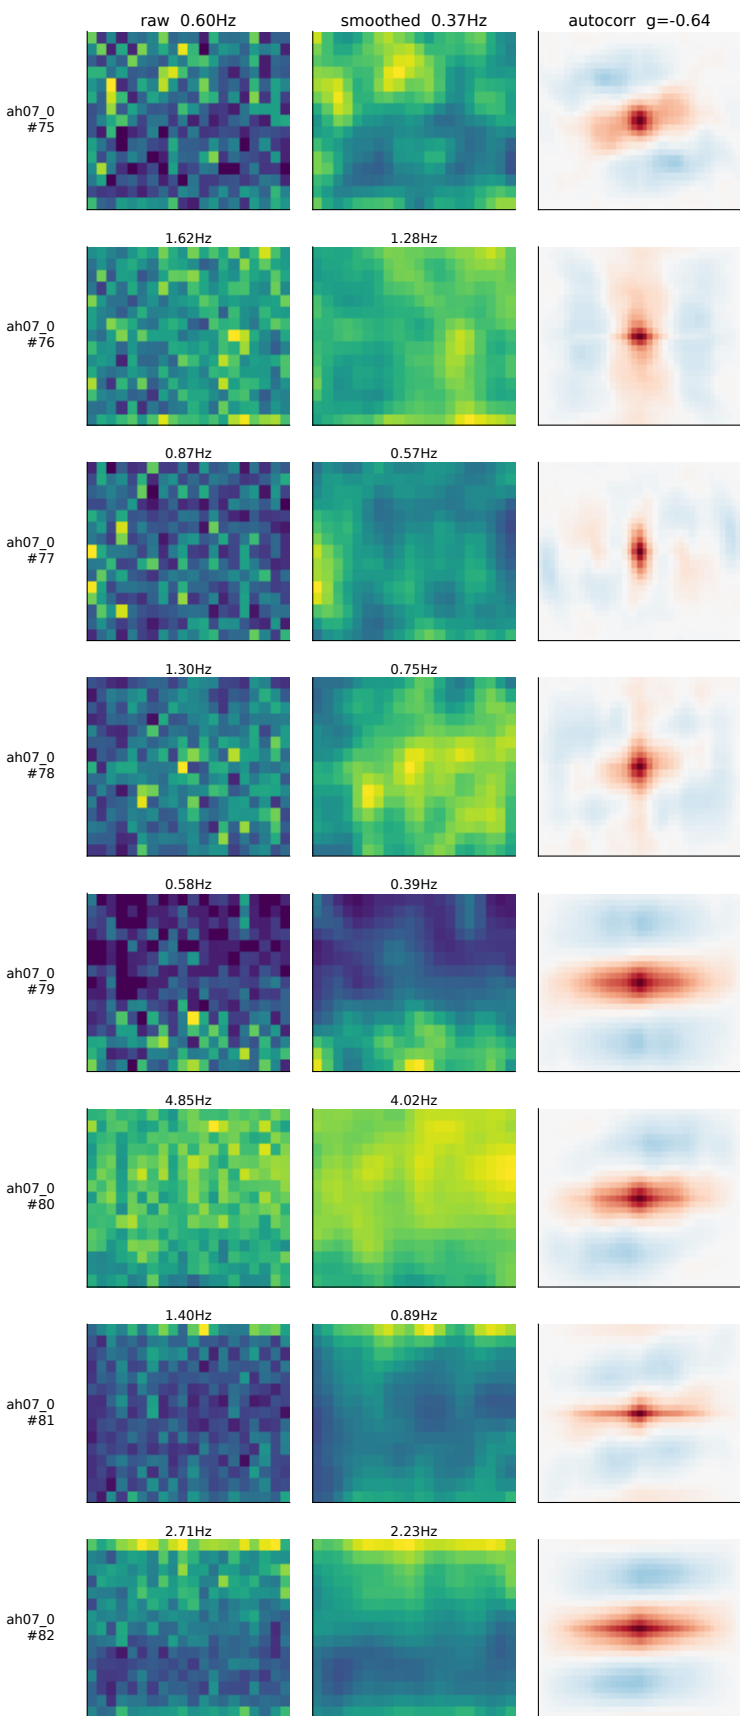


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

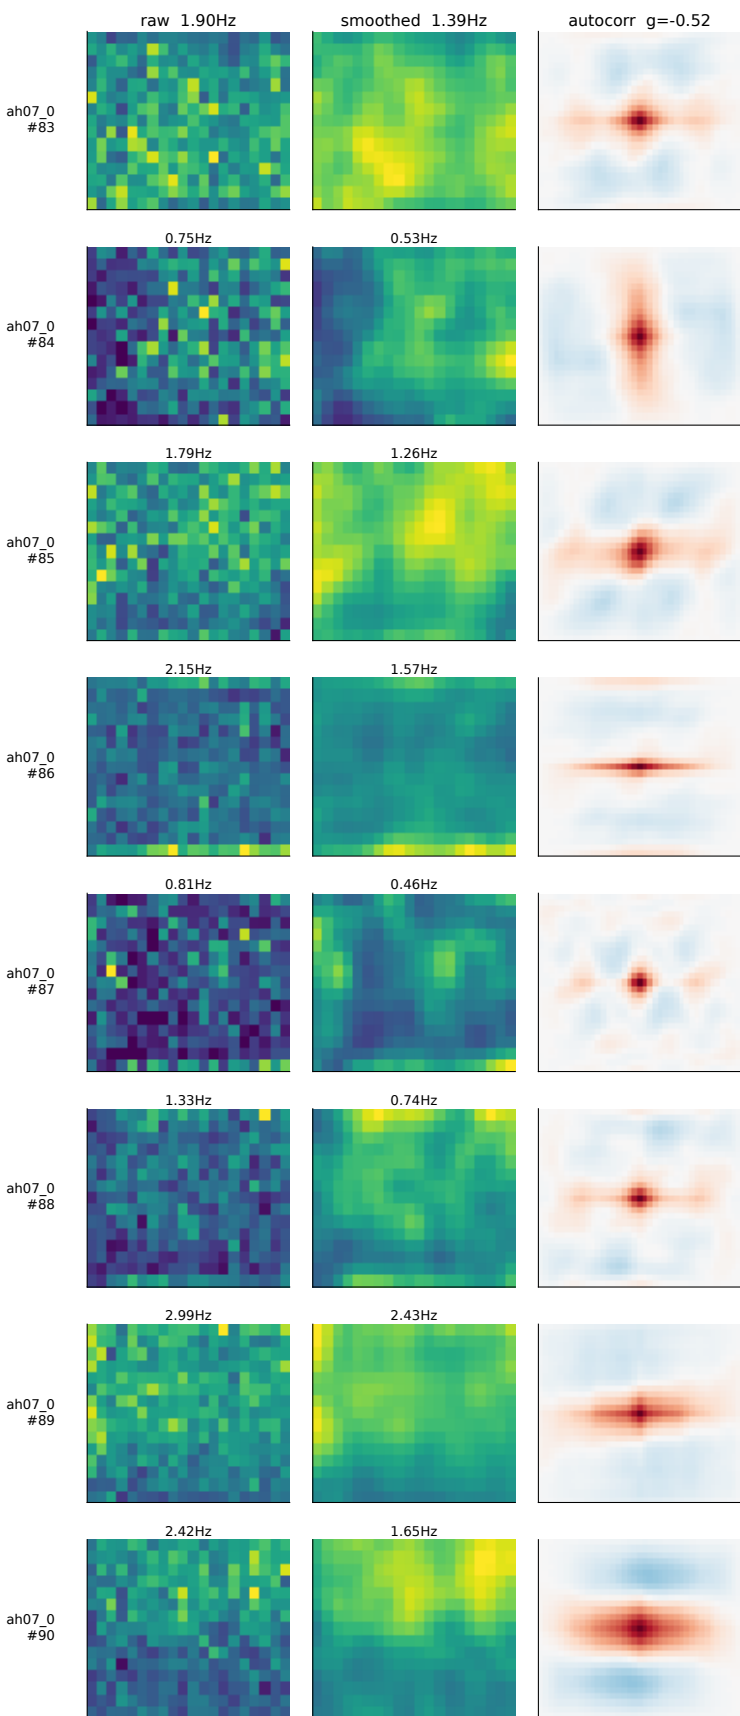


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

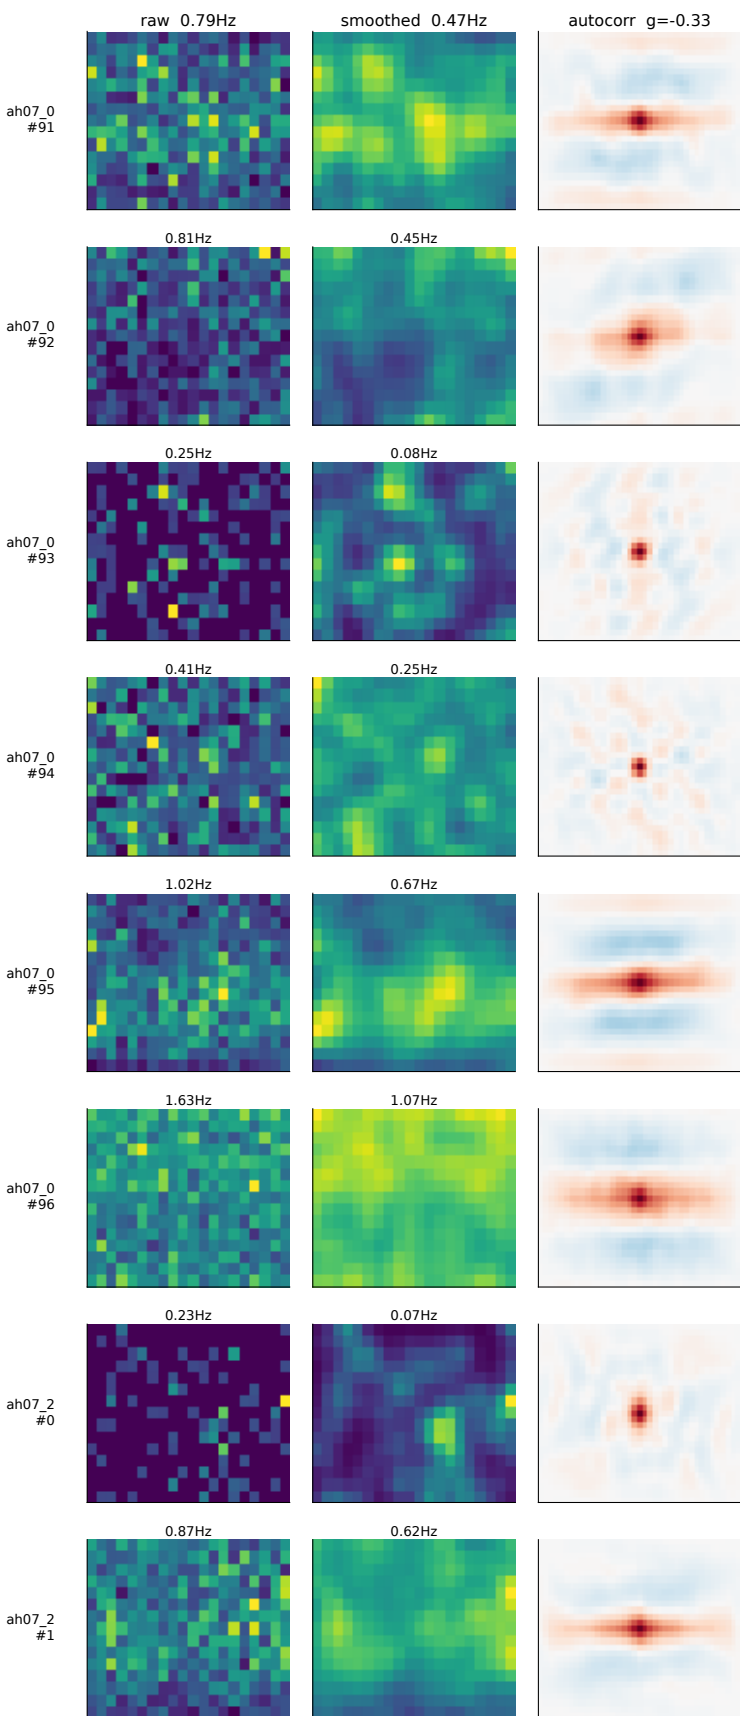


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

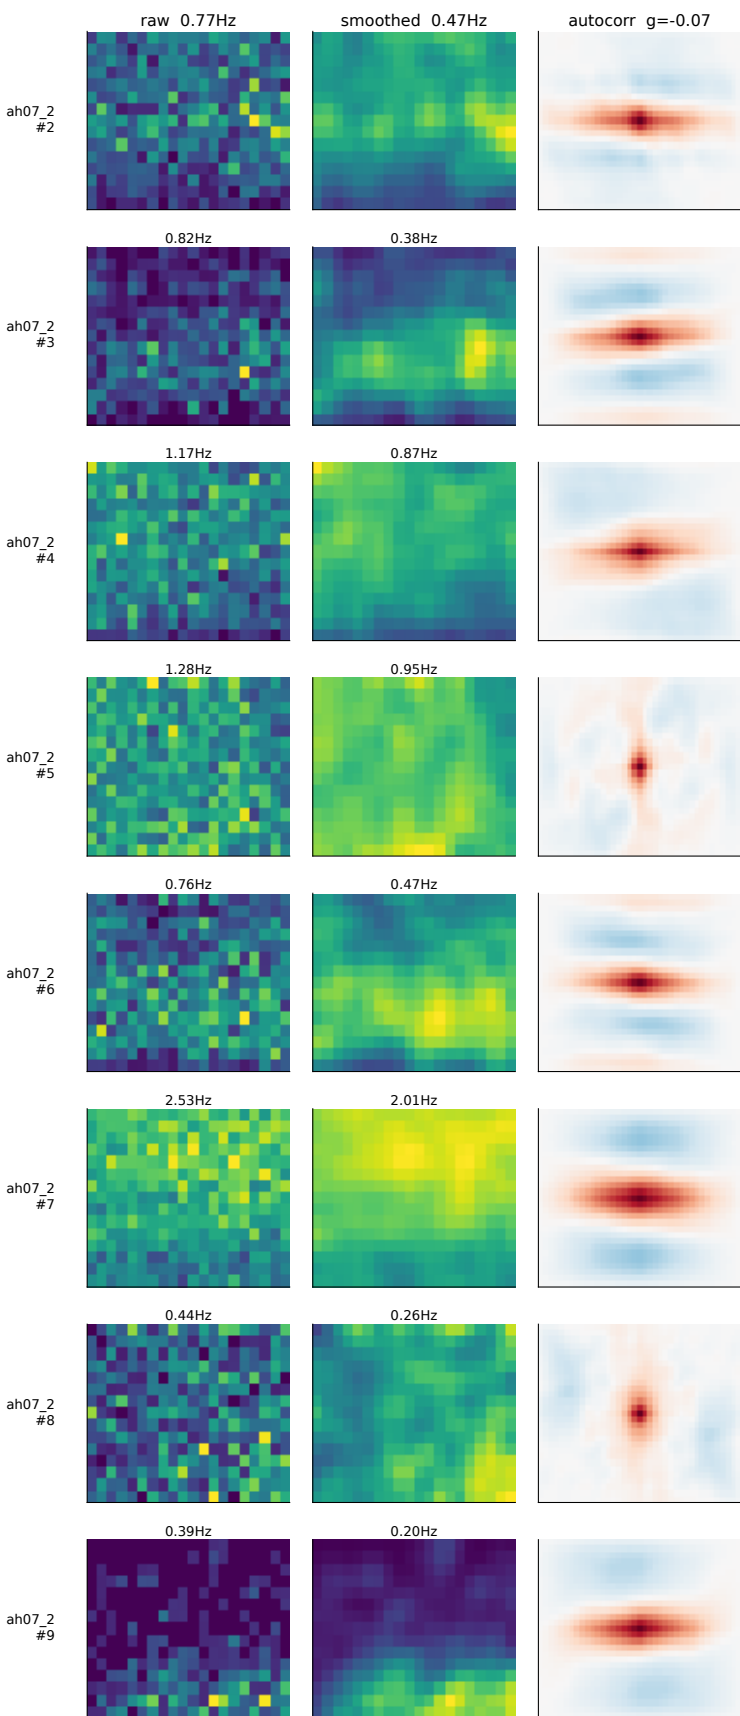


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

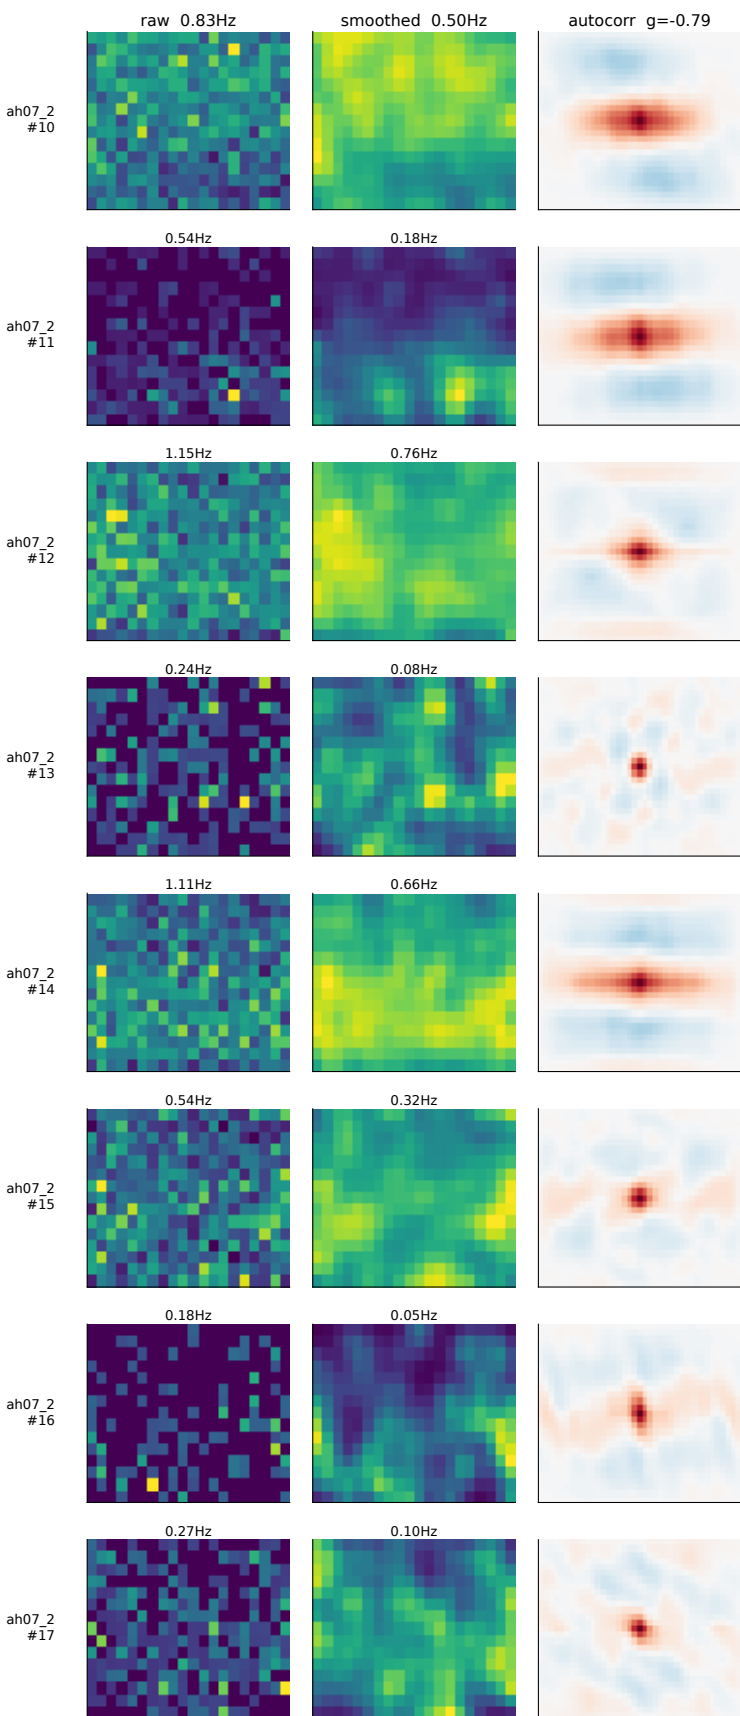


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

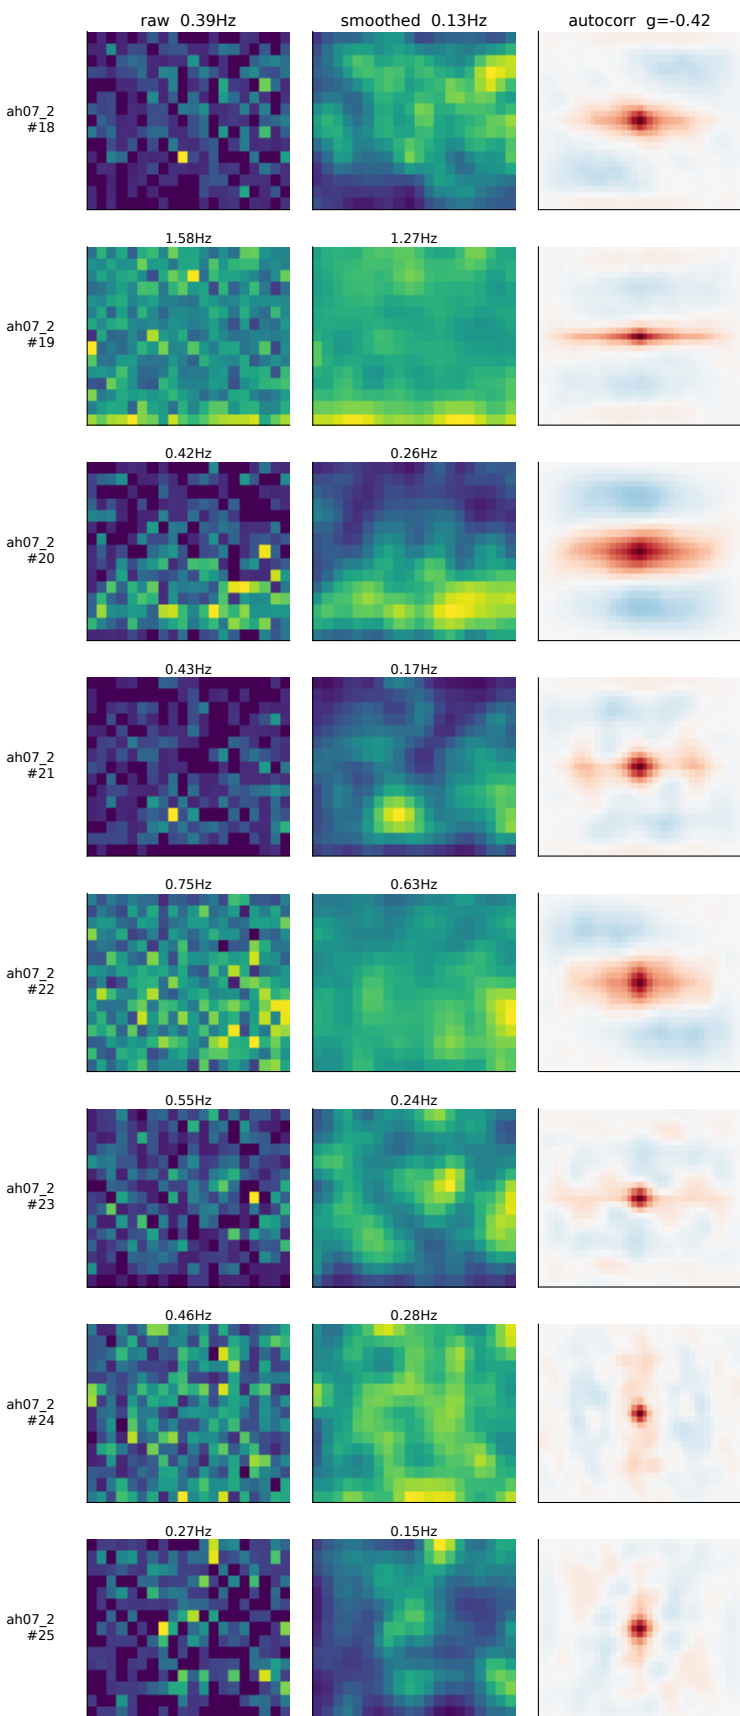


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

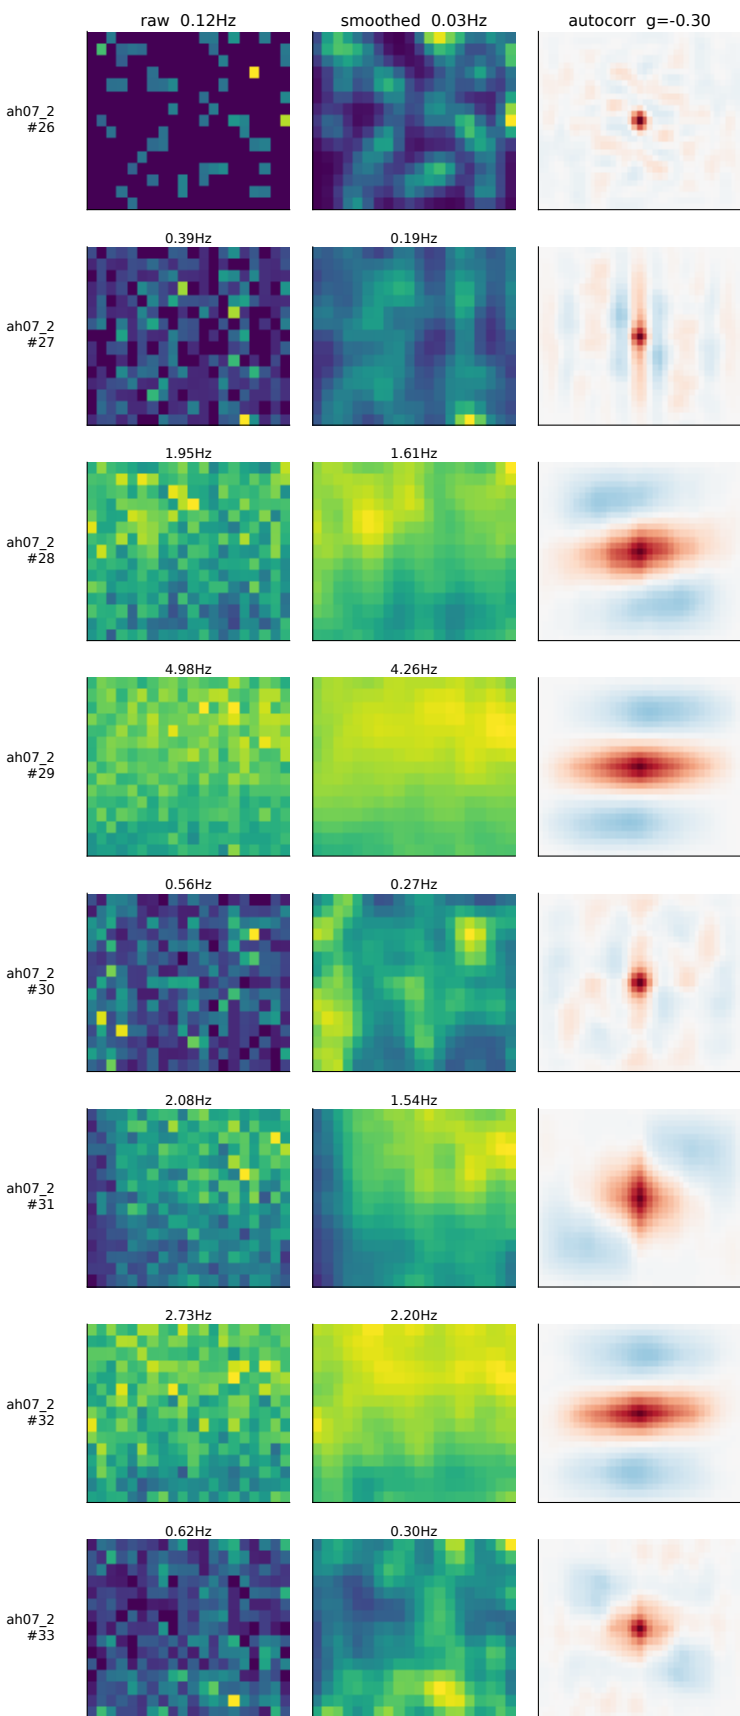


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

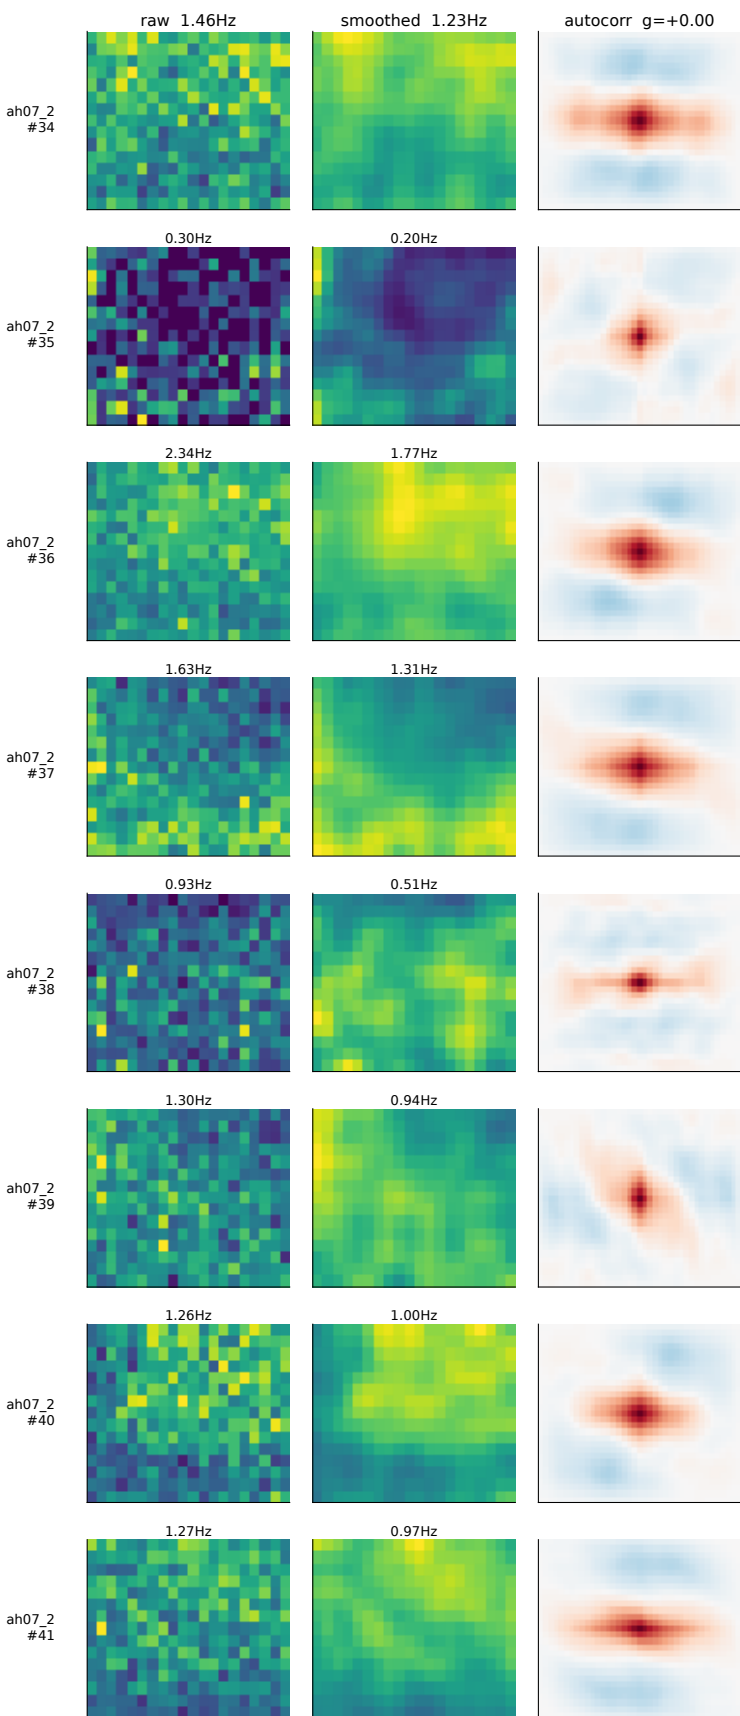


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

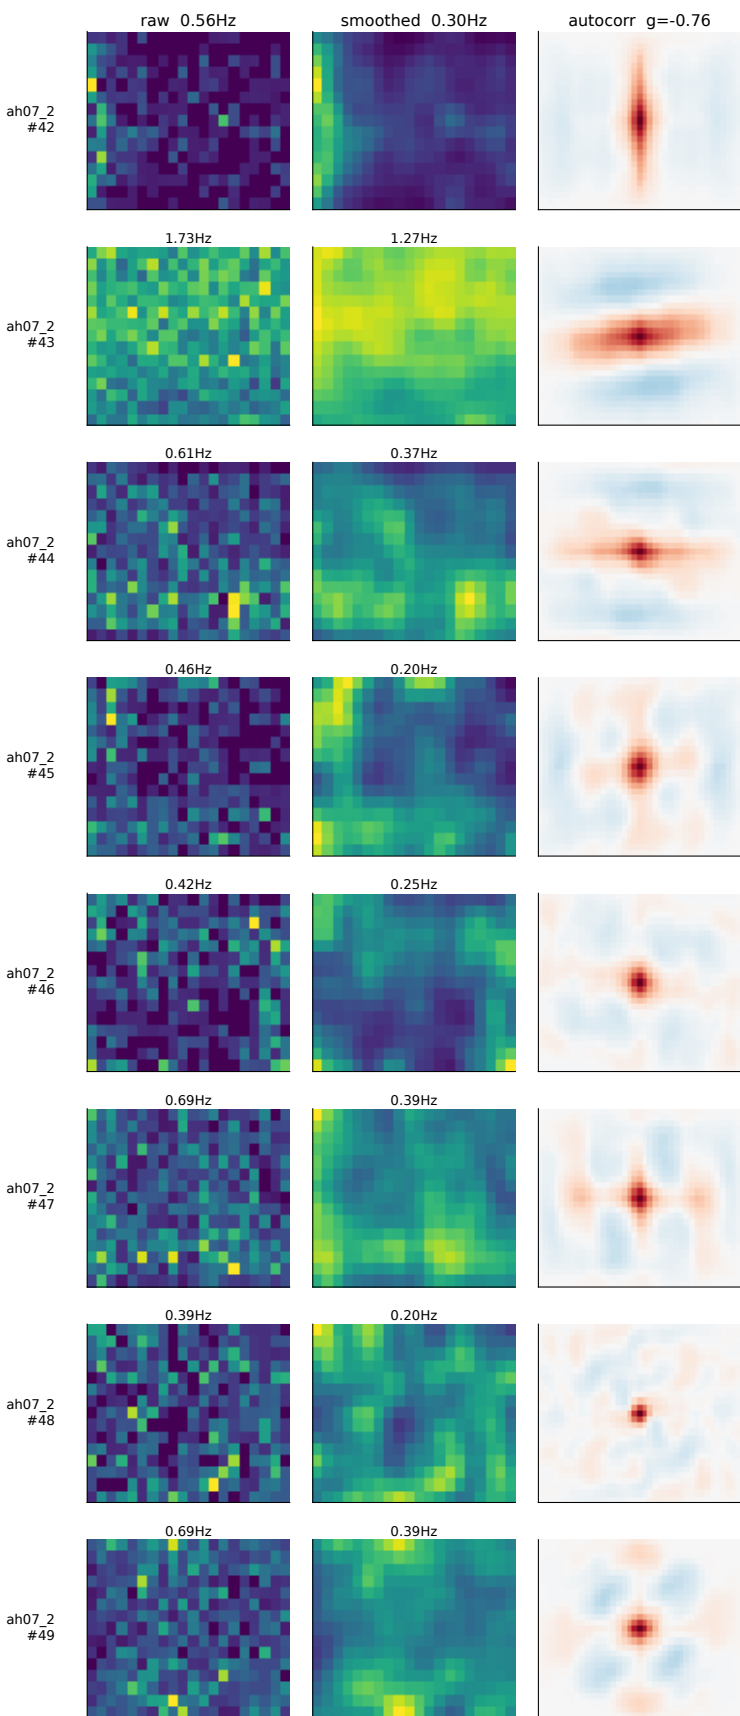


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

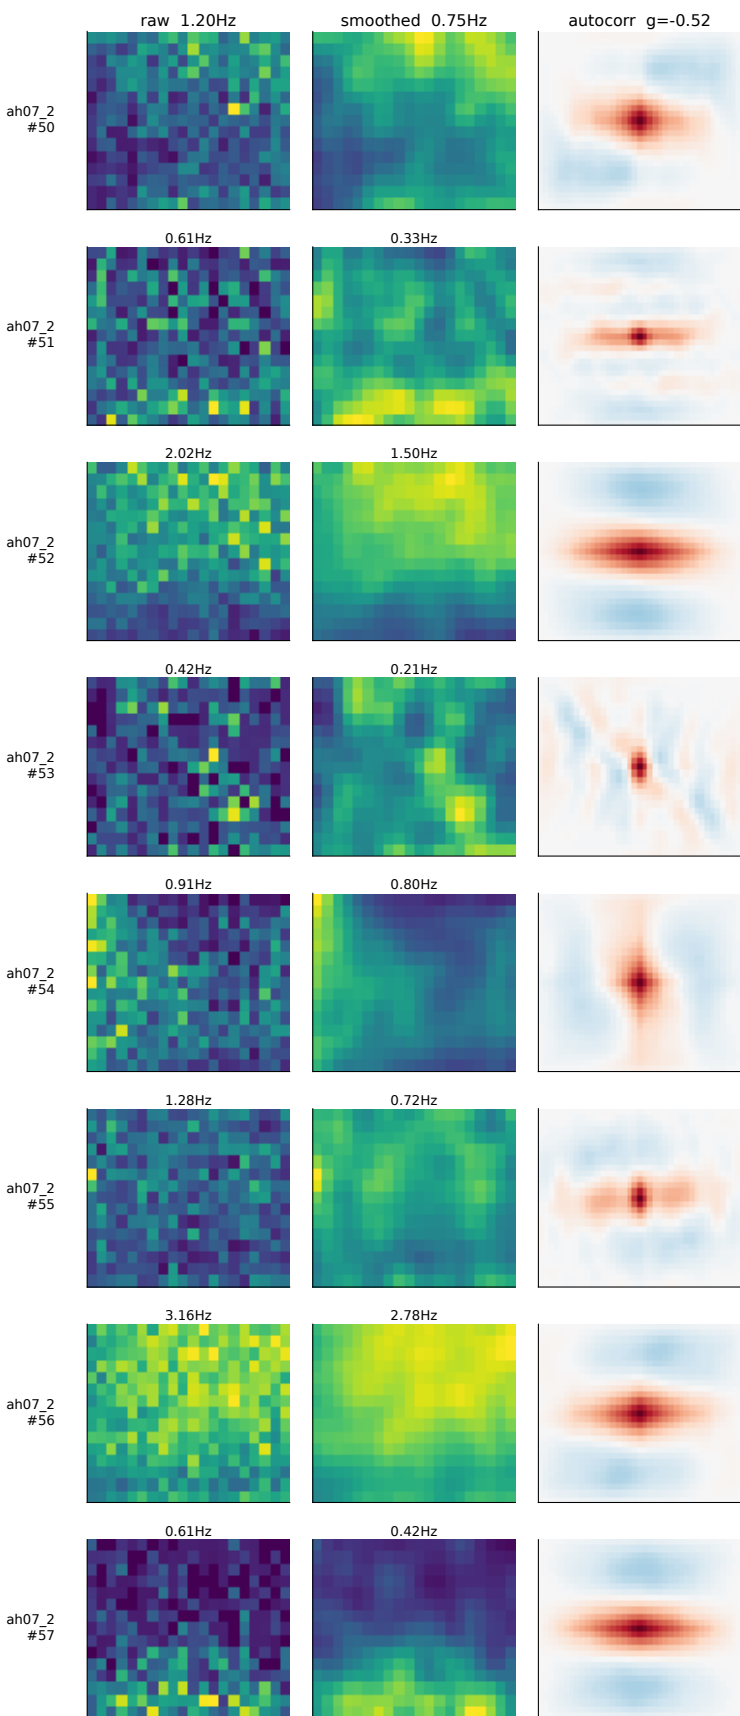


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

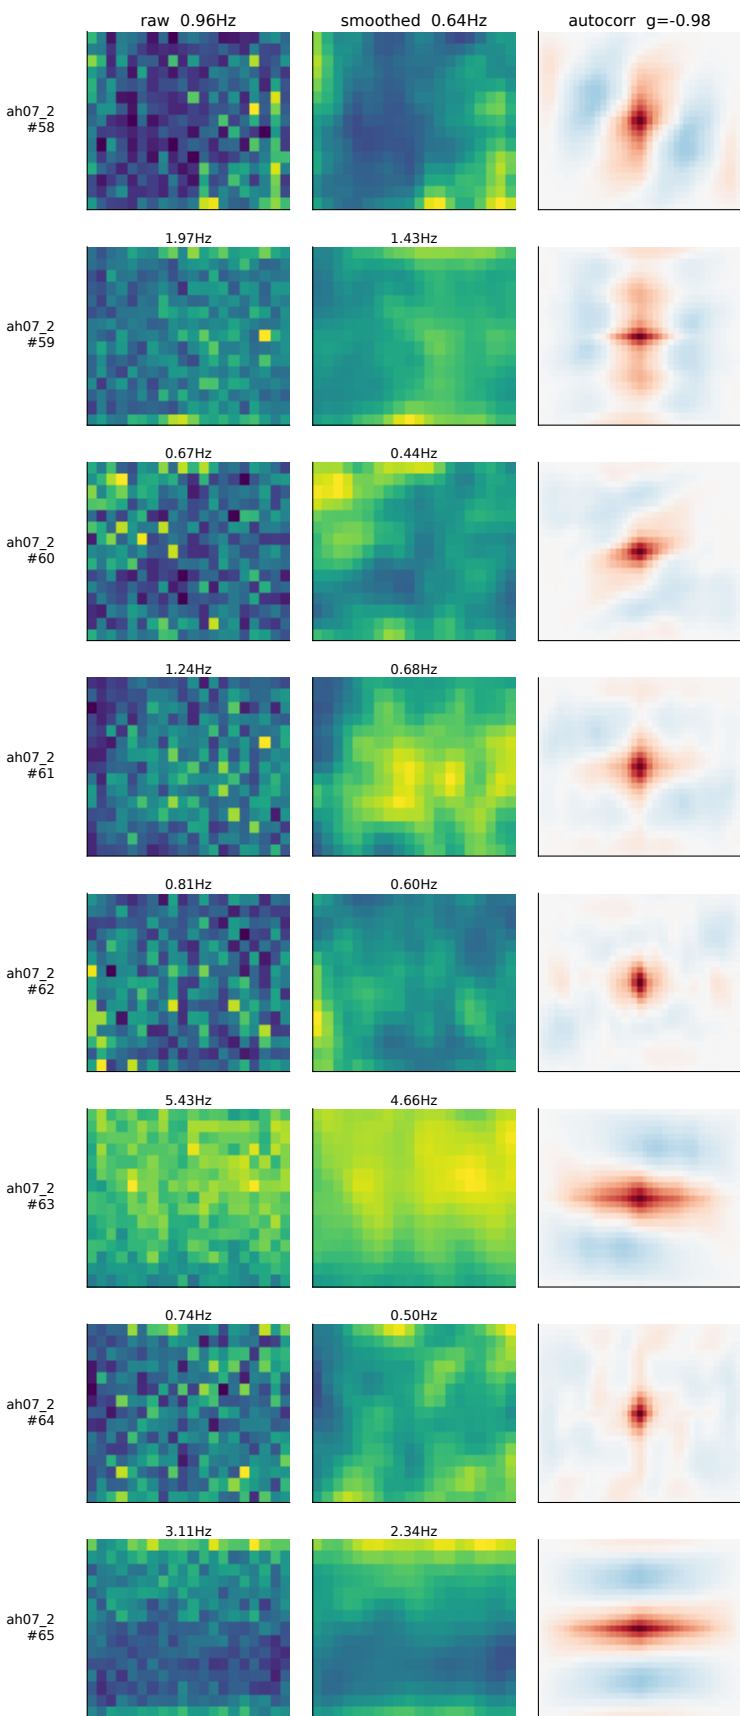


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

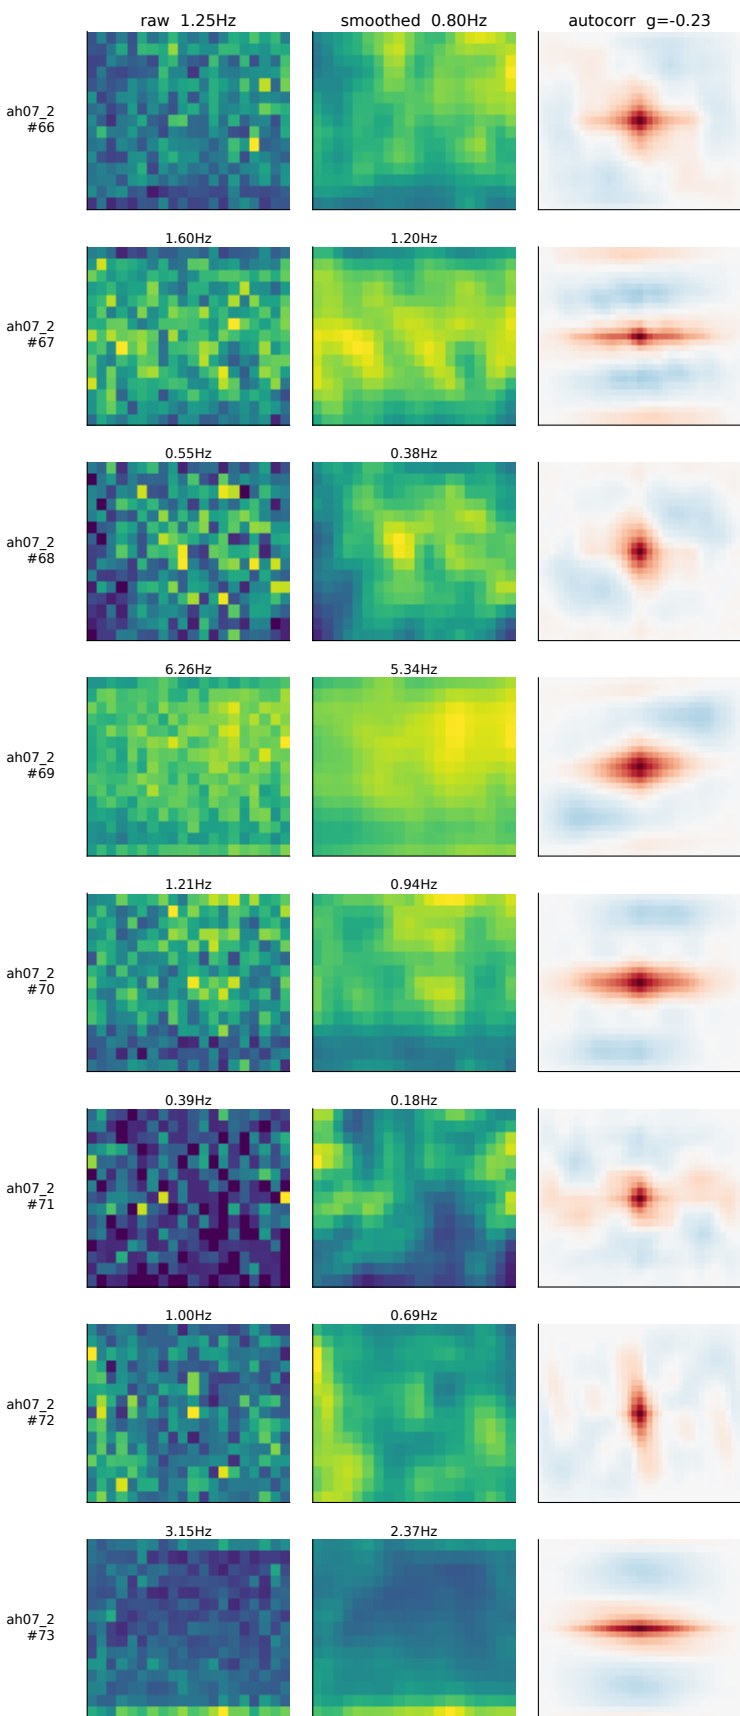


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

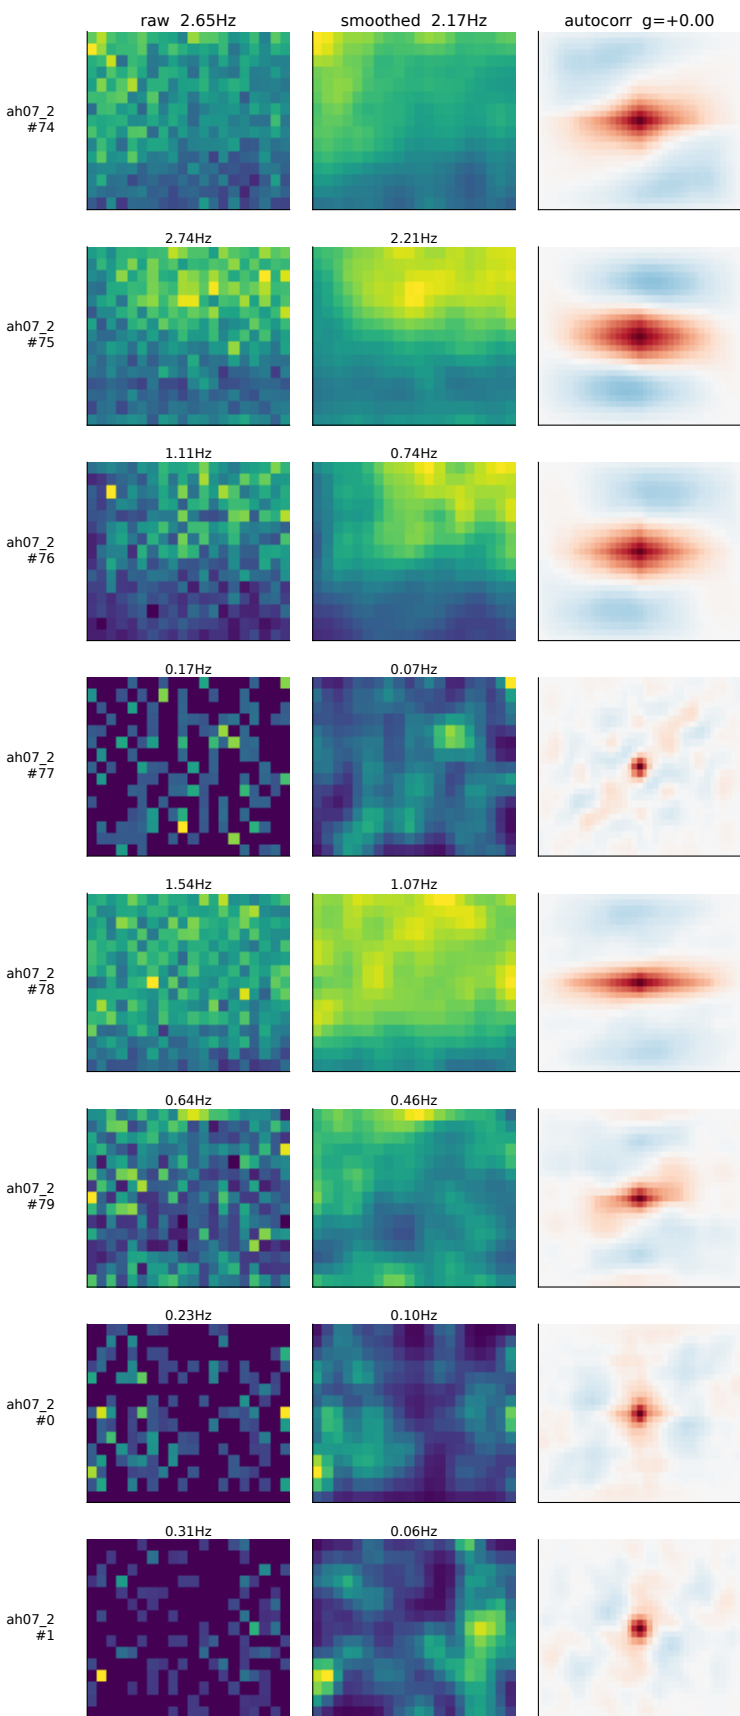


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

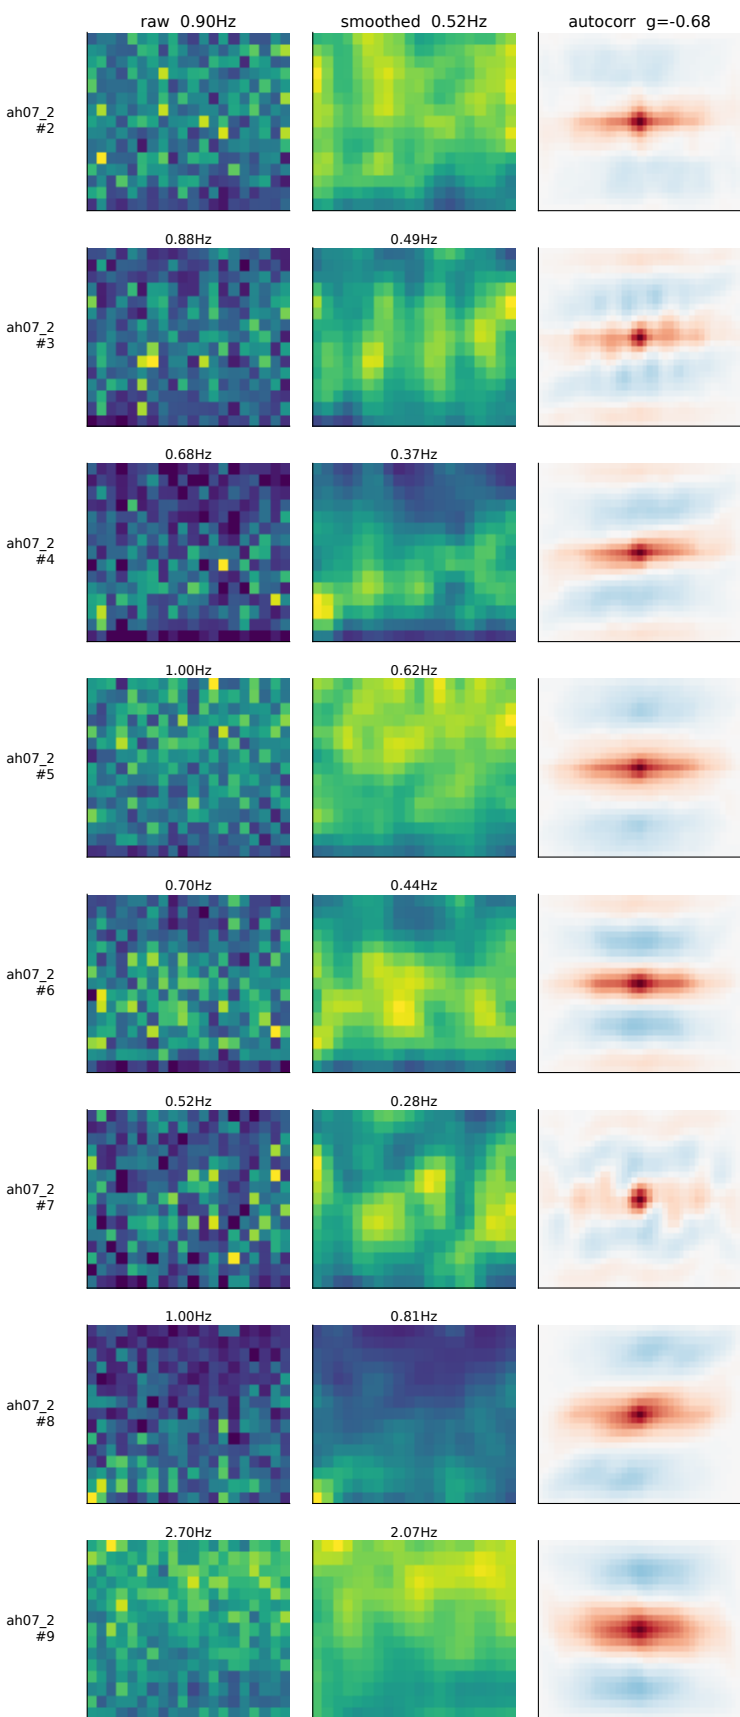


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

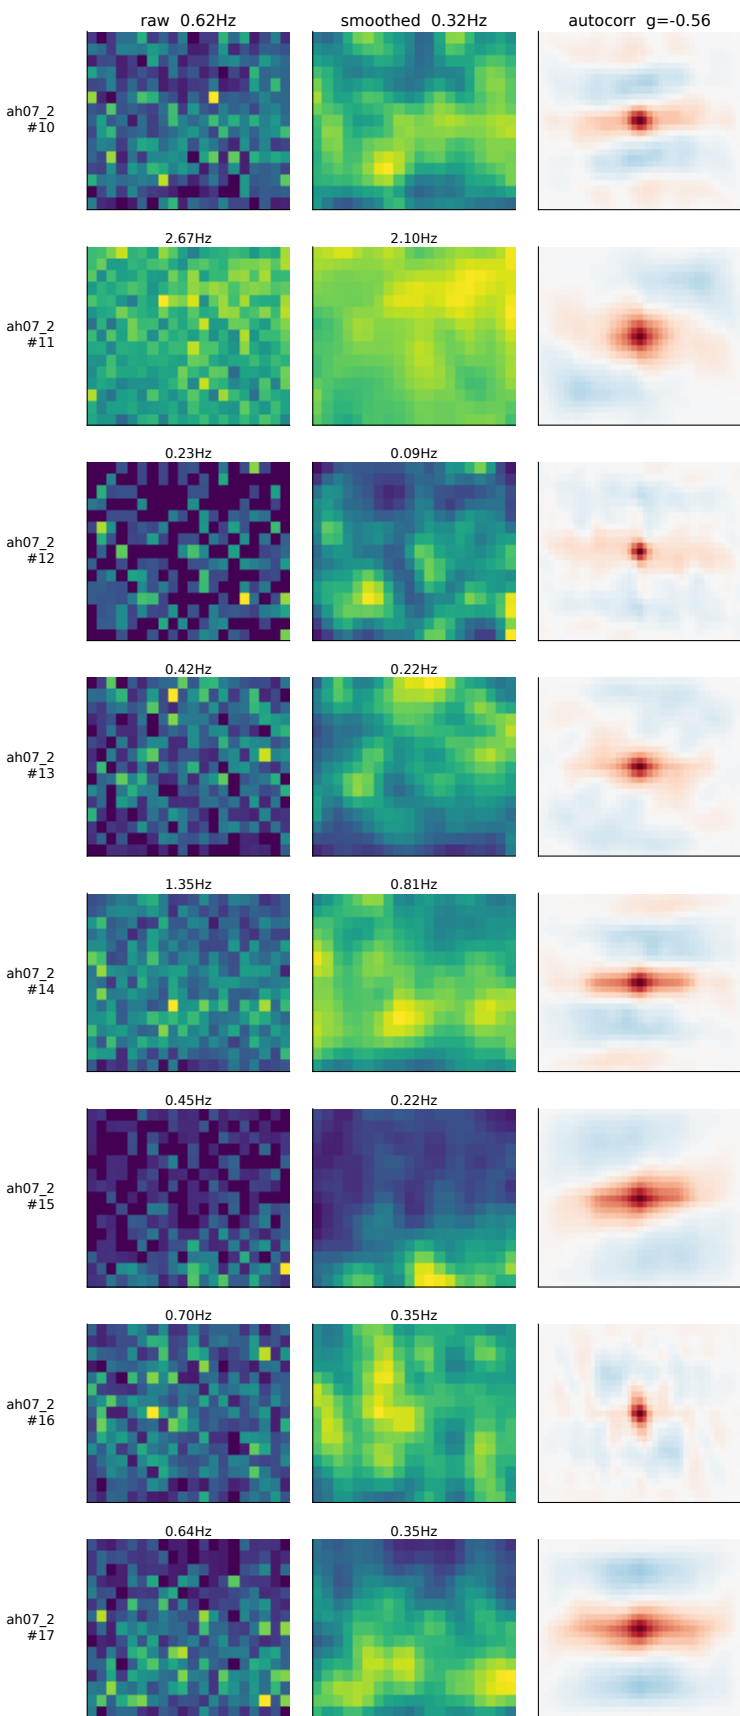


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

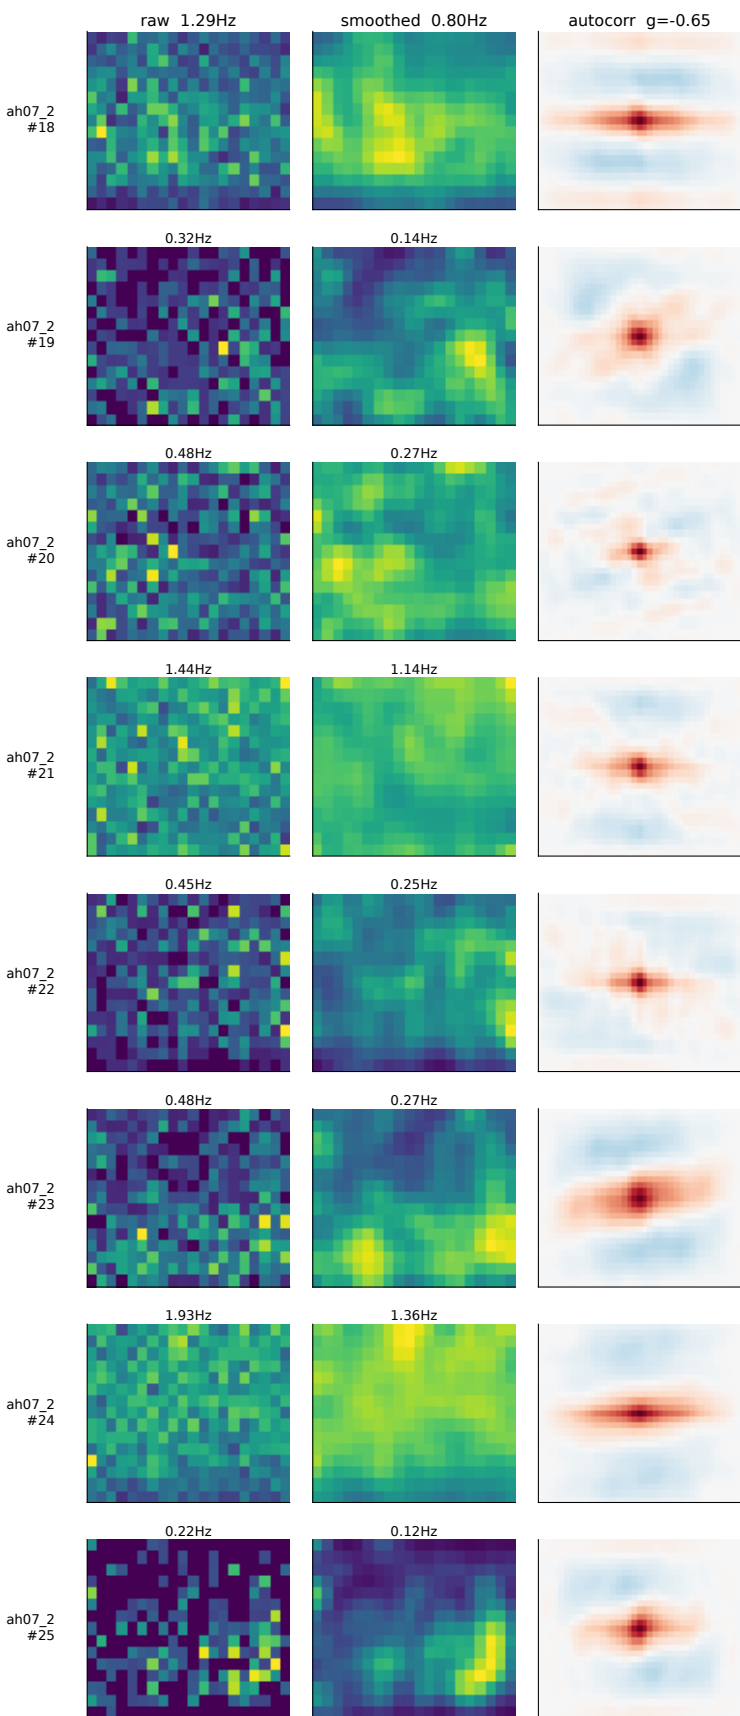


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

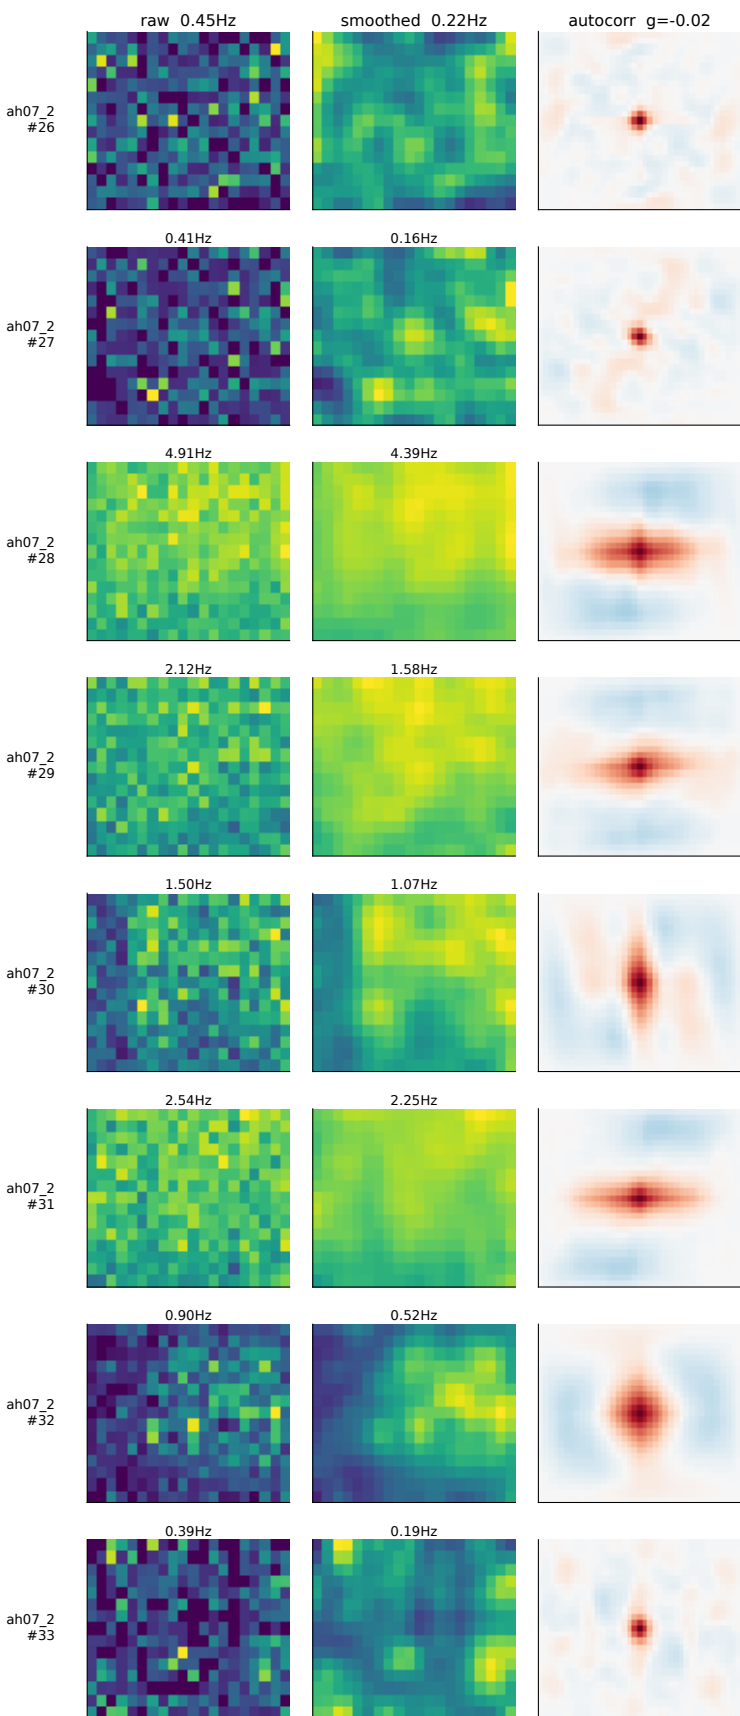


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

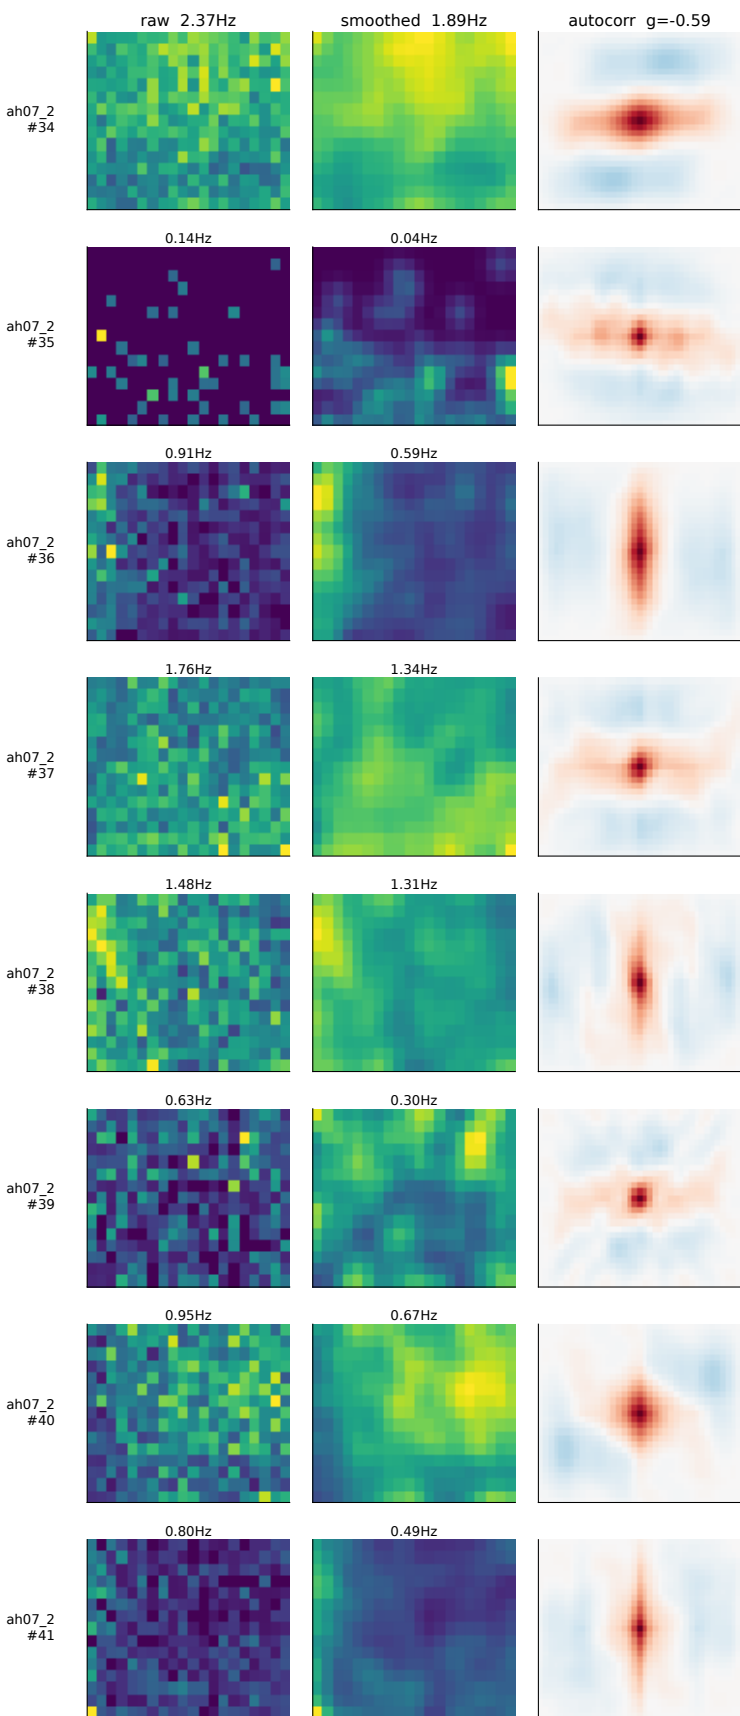


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
own beside smoothed because smoothing can create structure; no reliability measure or null is co

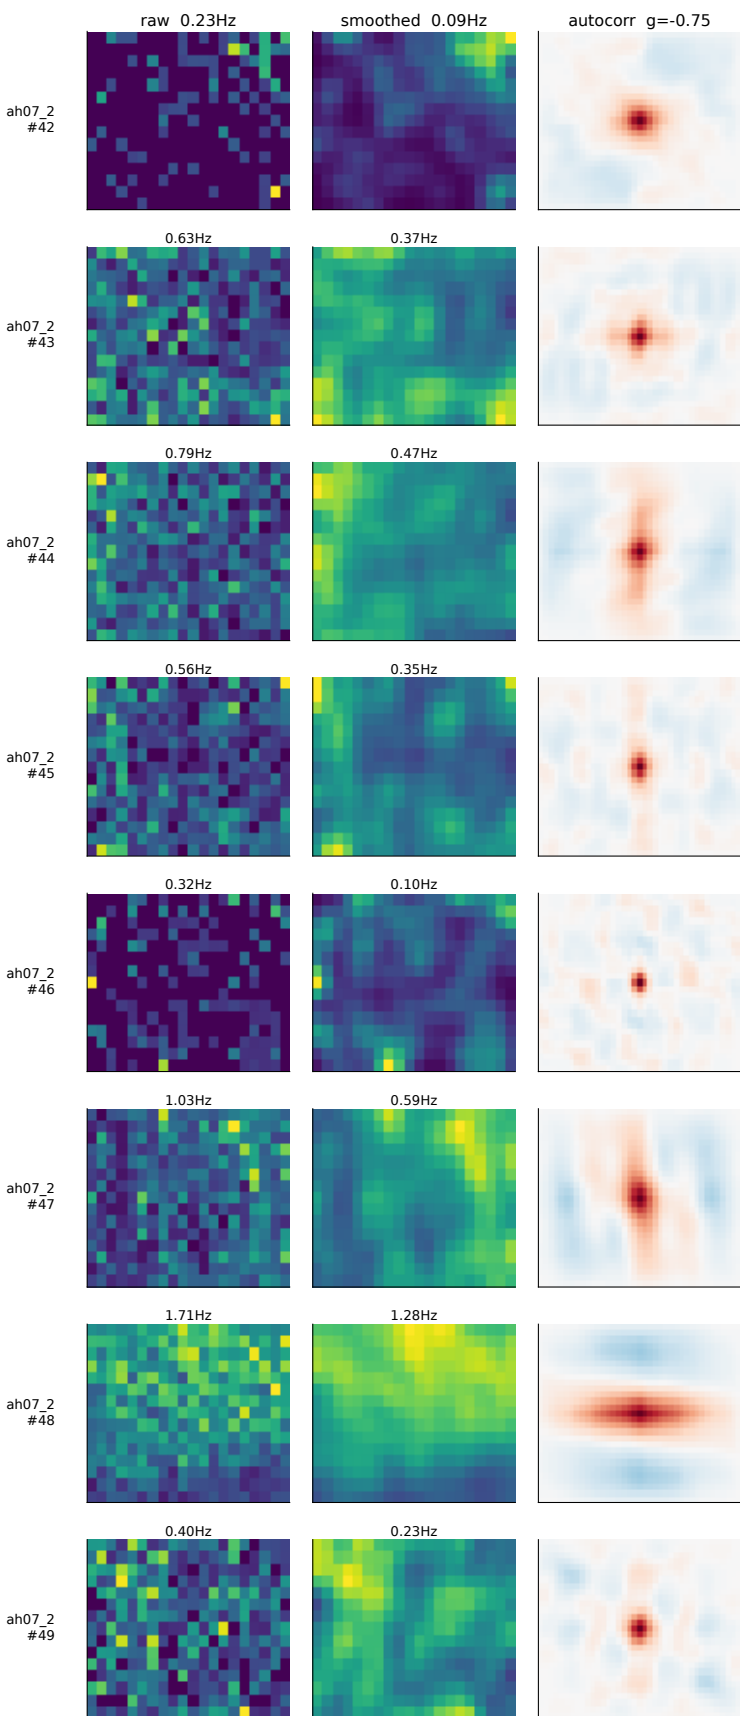


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

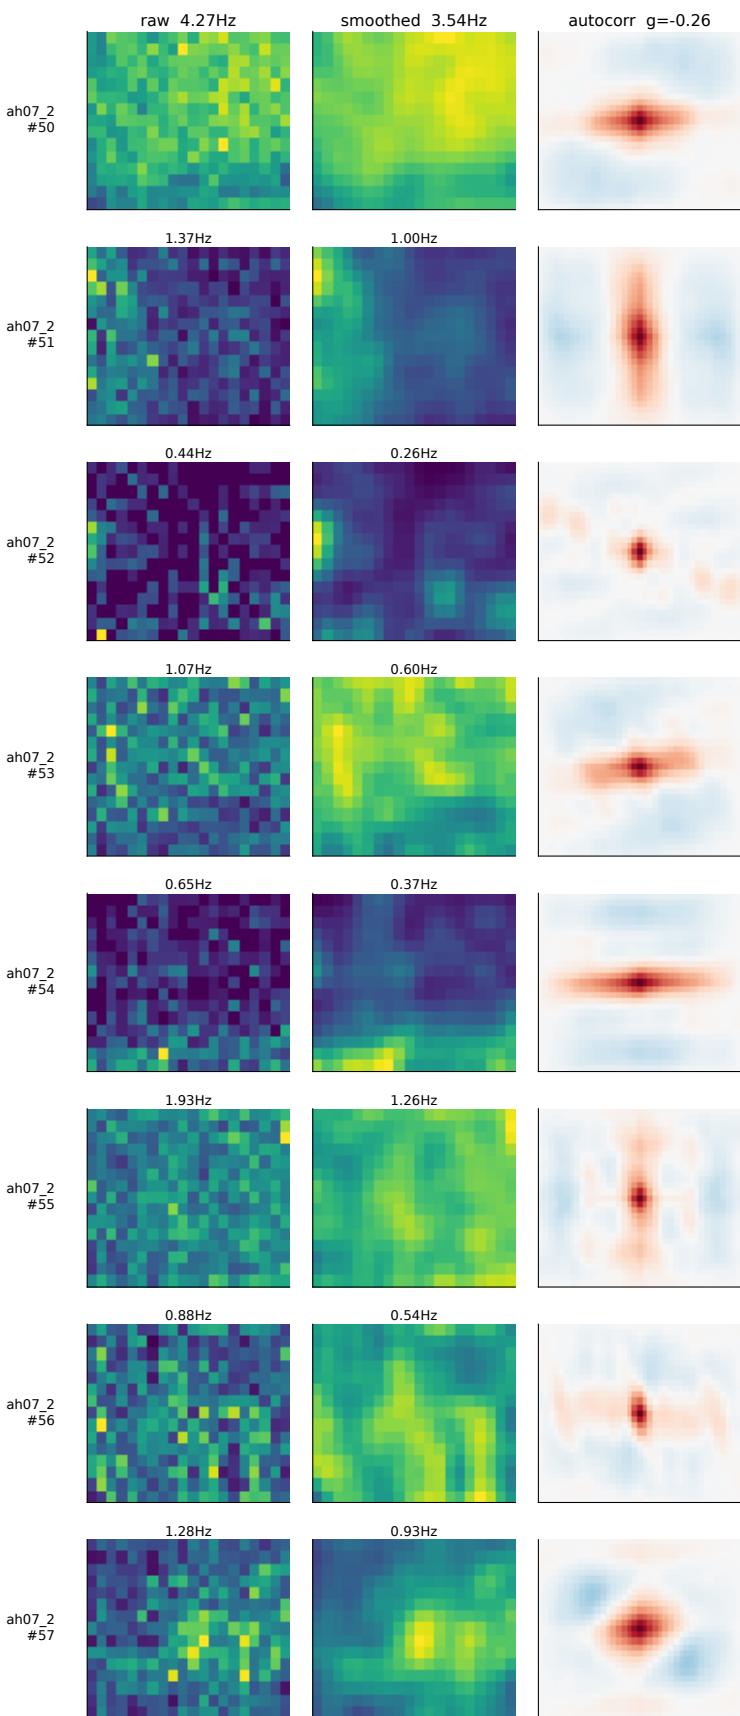


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

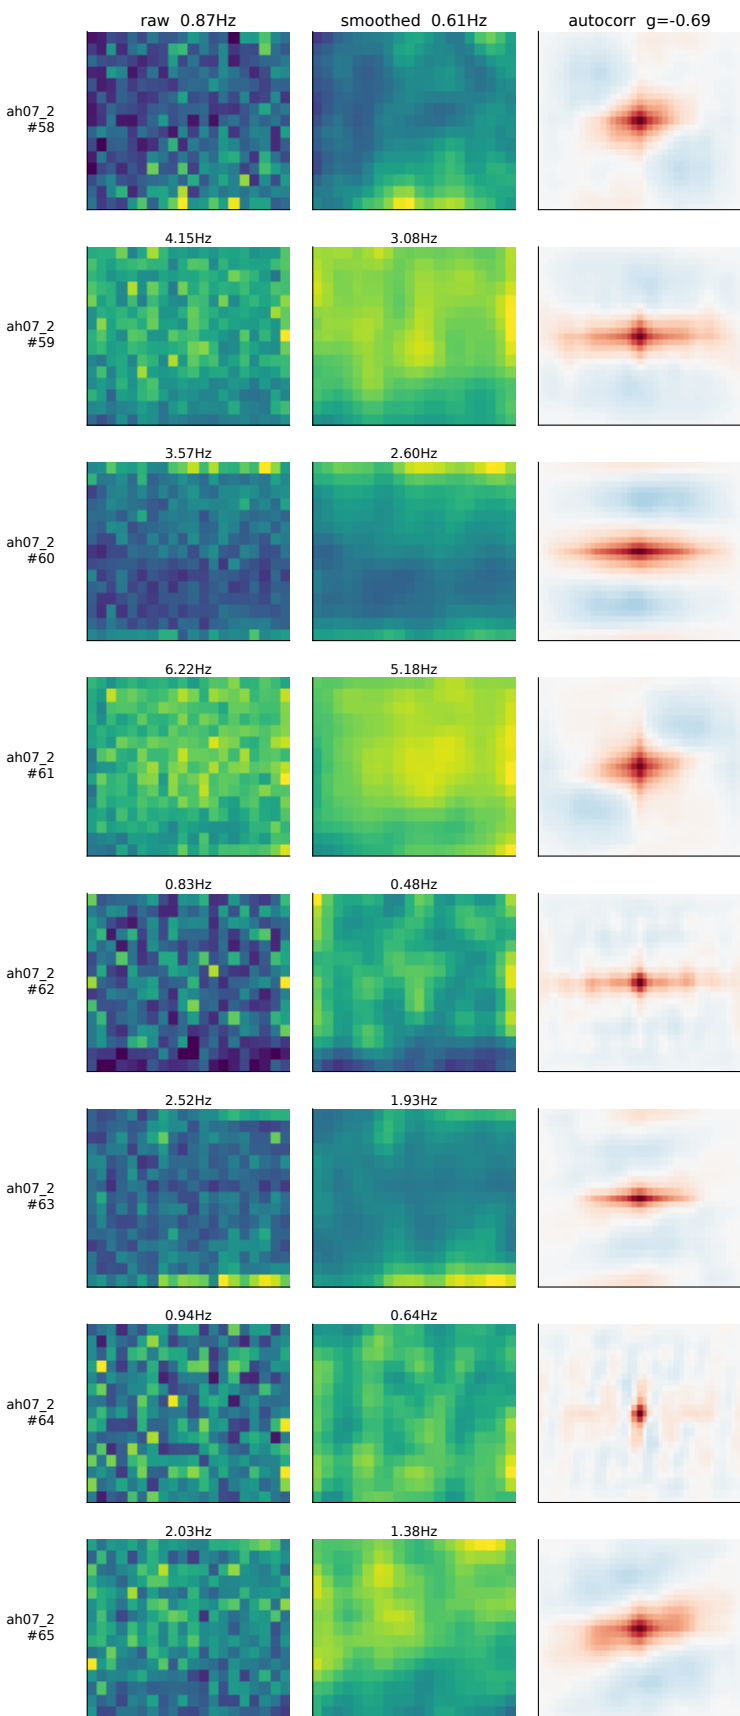


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

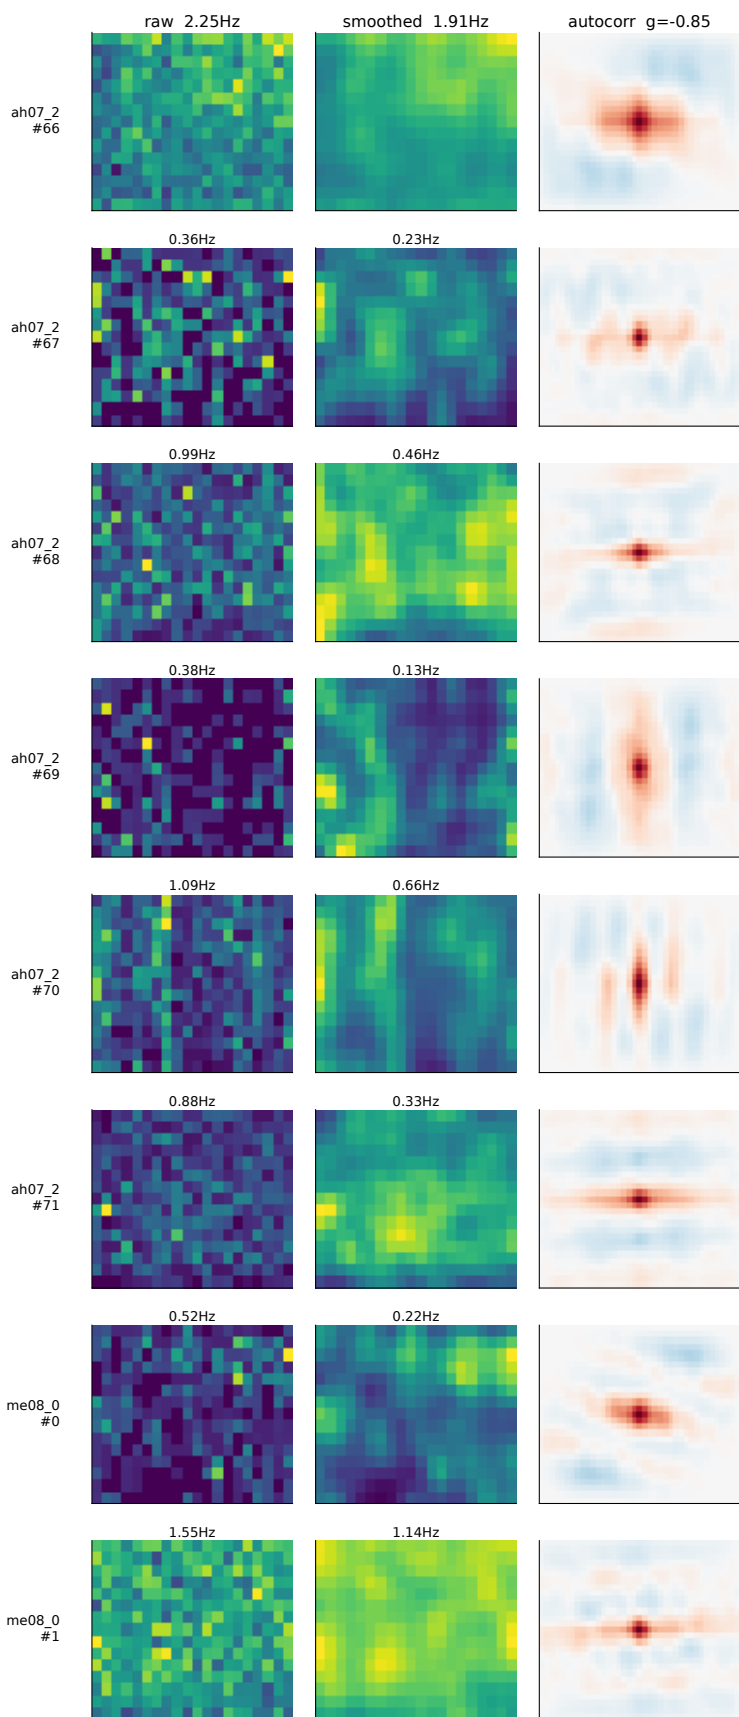


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

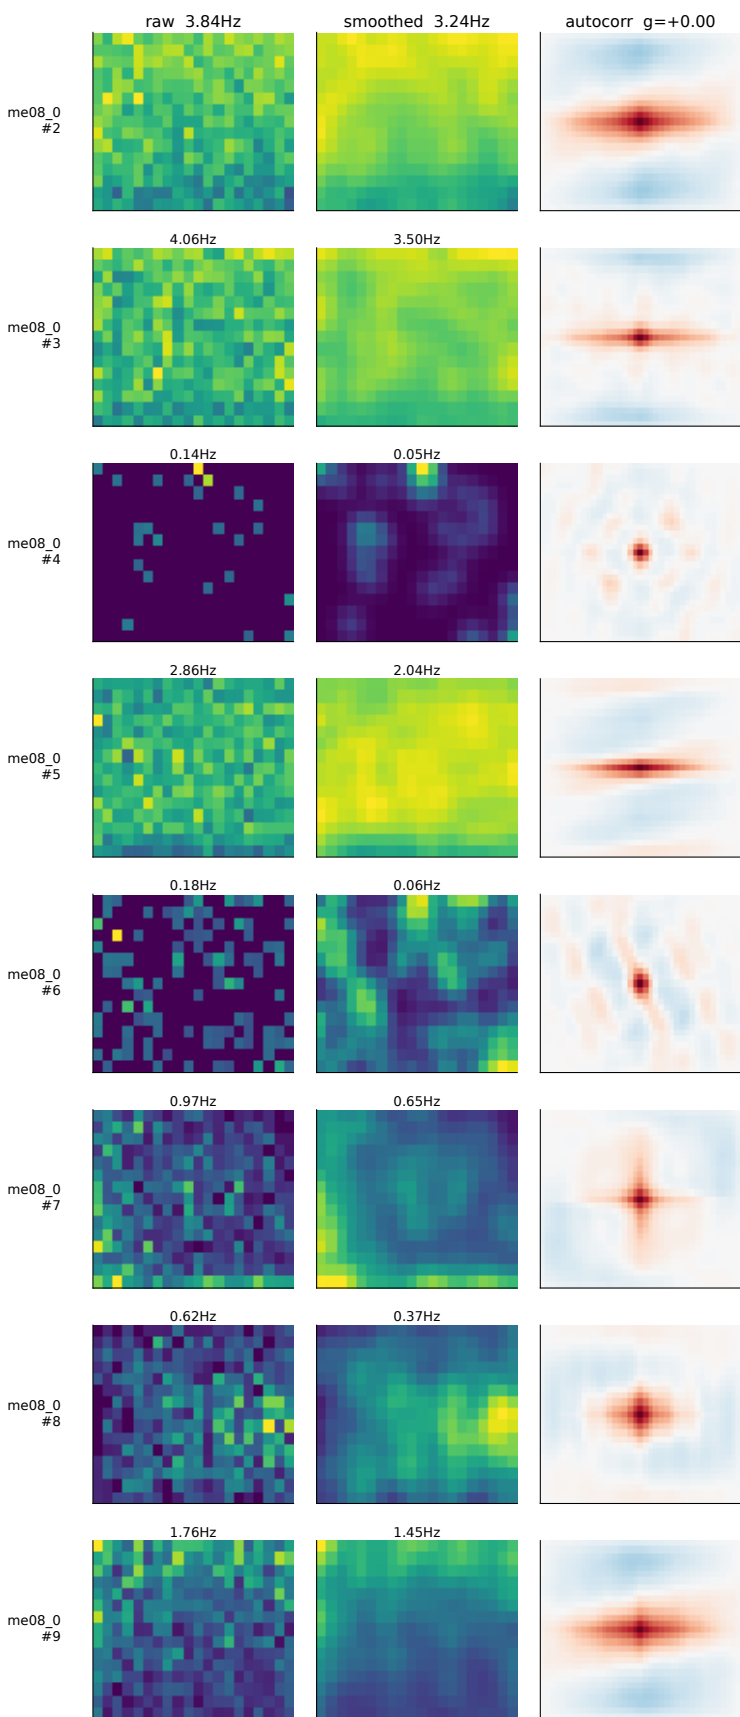


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

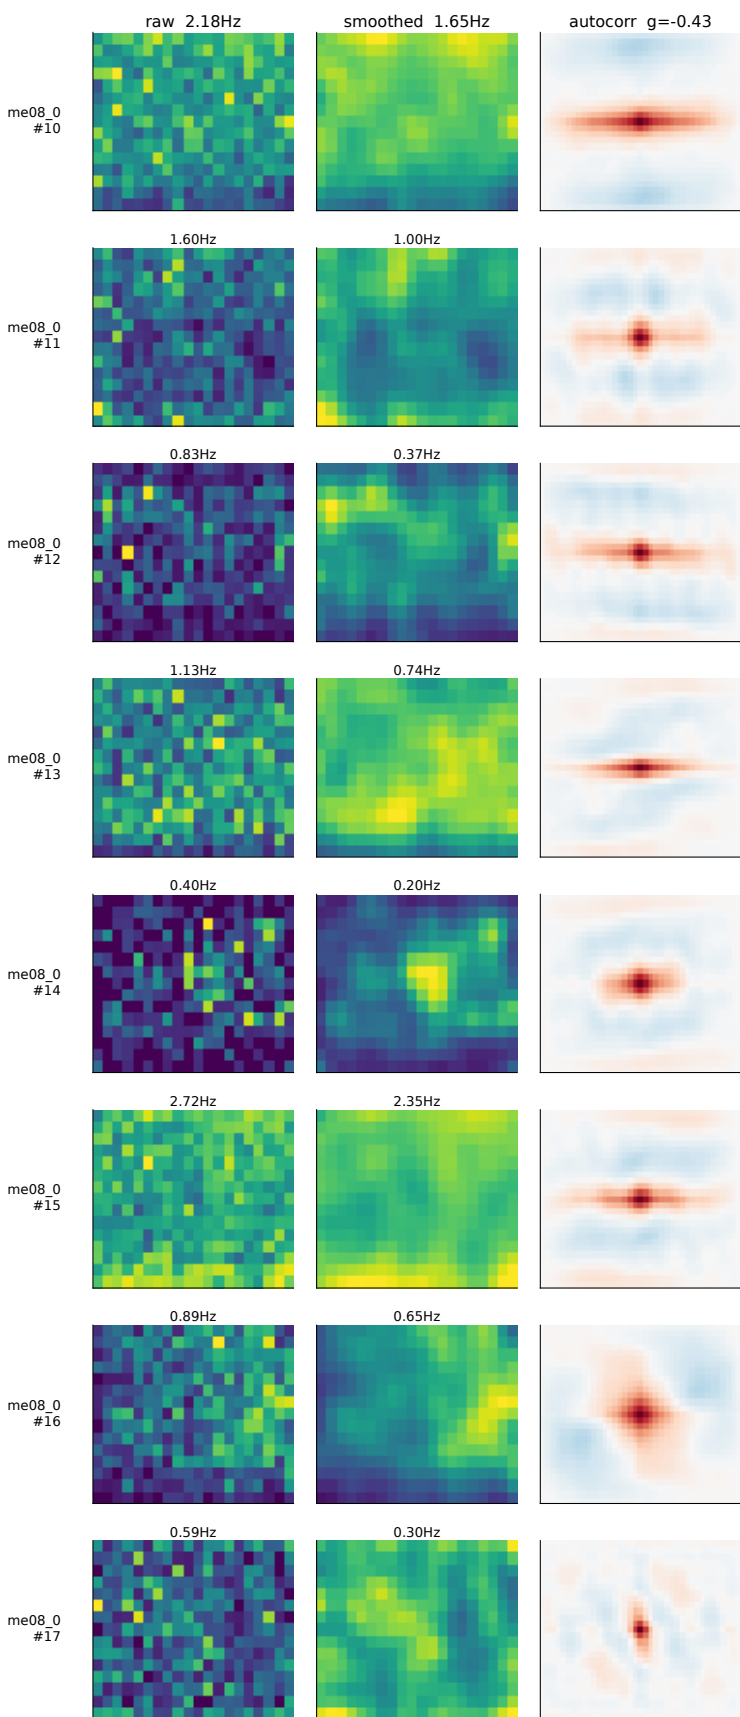


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

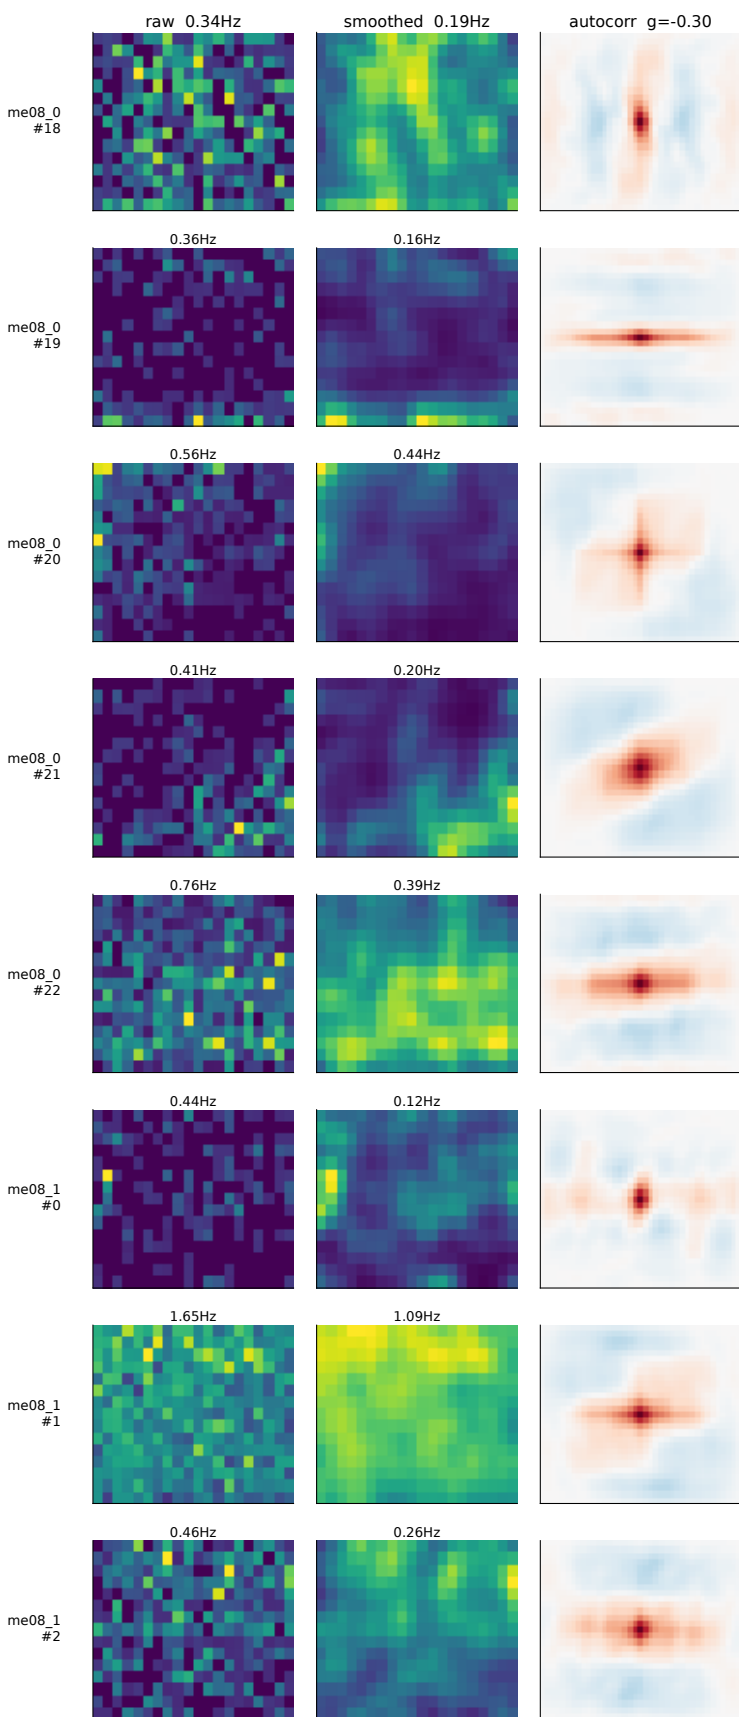


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
own beside smoothed because smoothing can create structure; no reliability measure or null is co

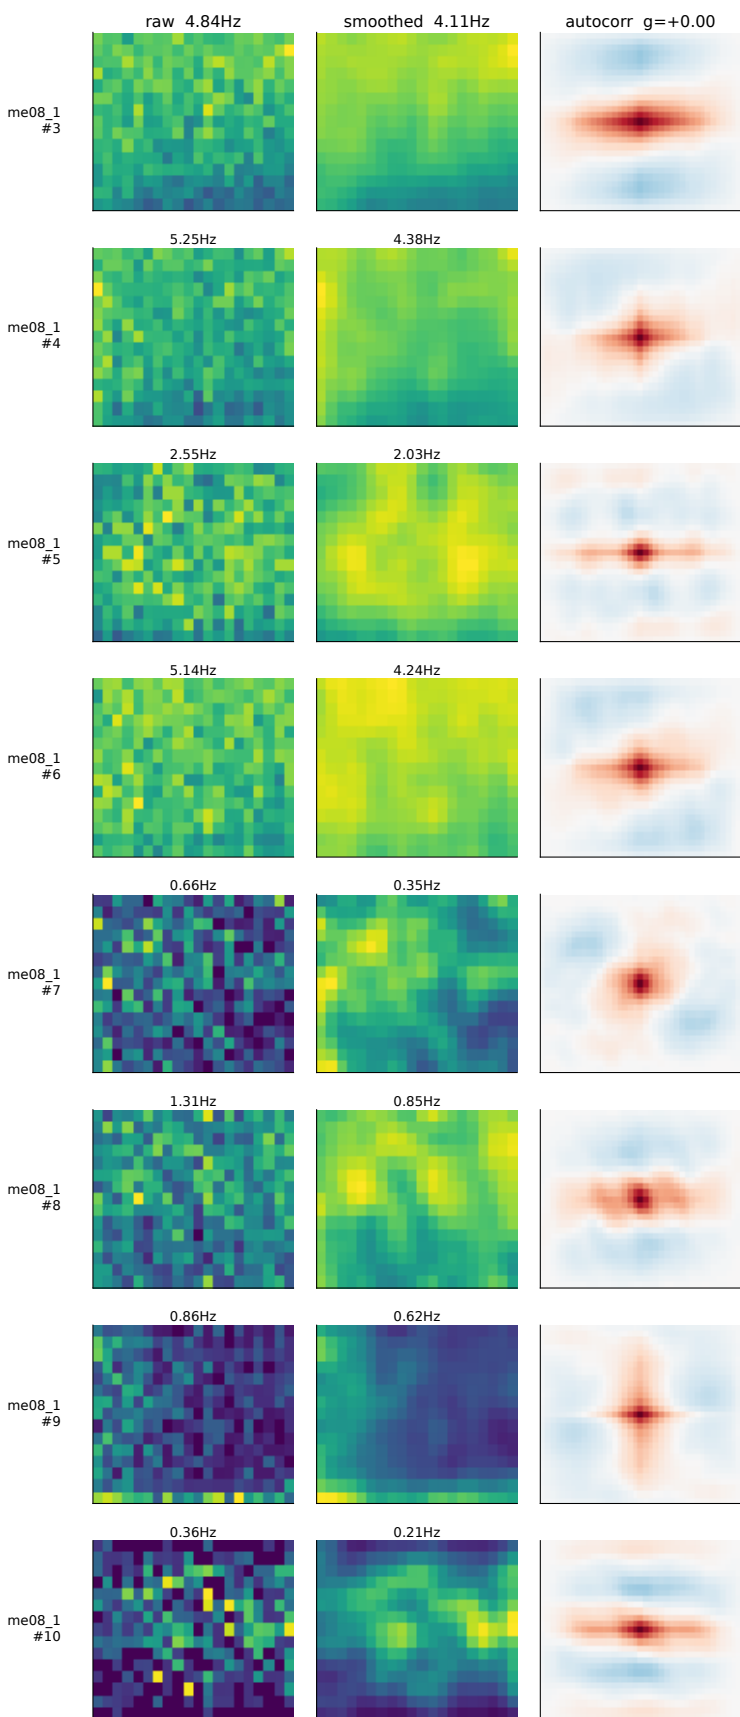


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuro
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

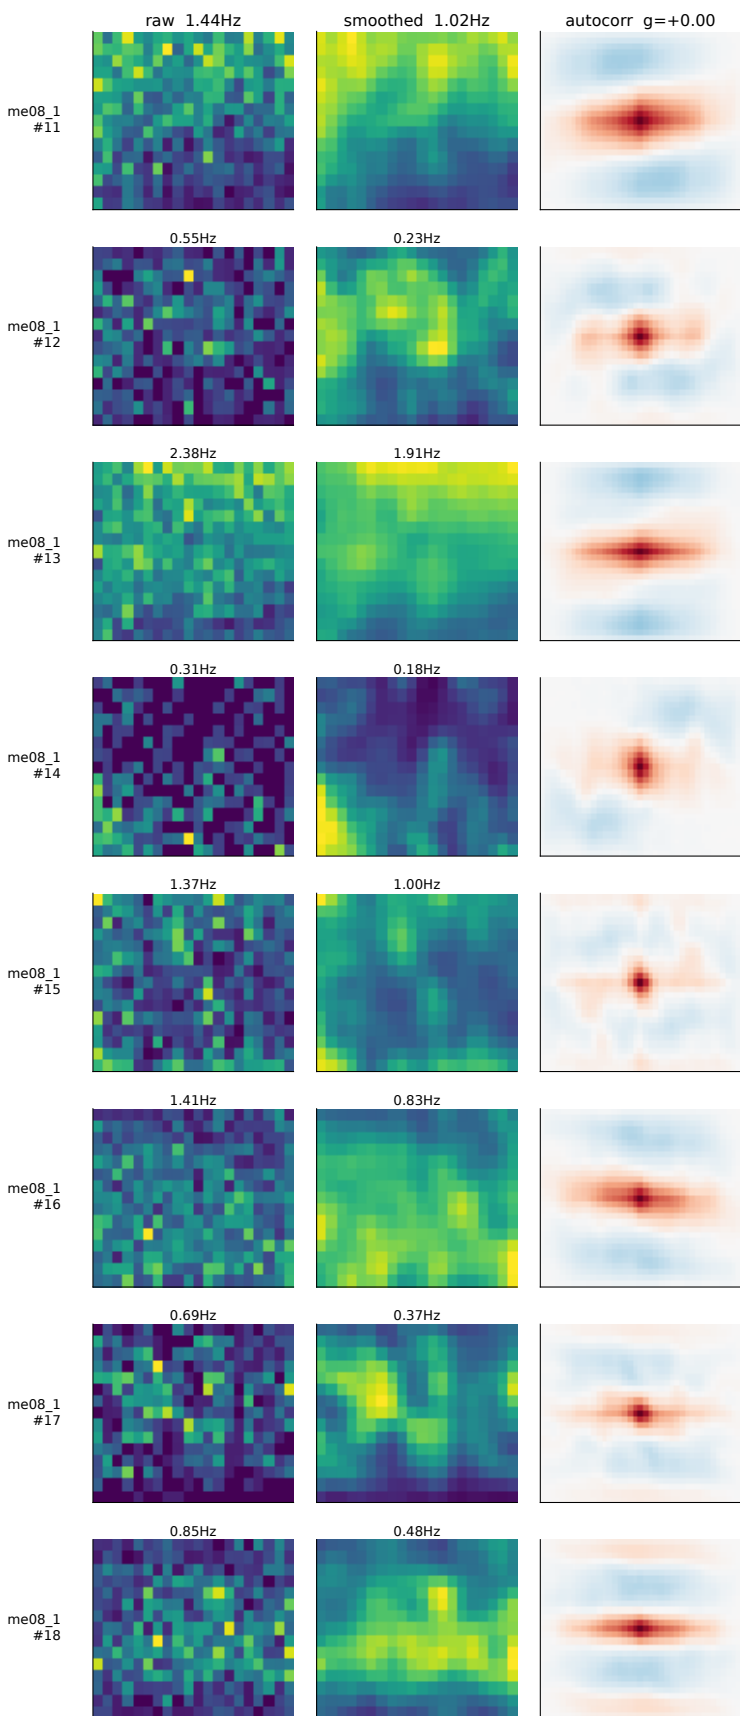


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

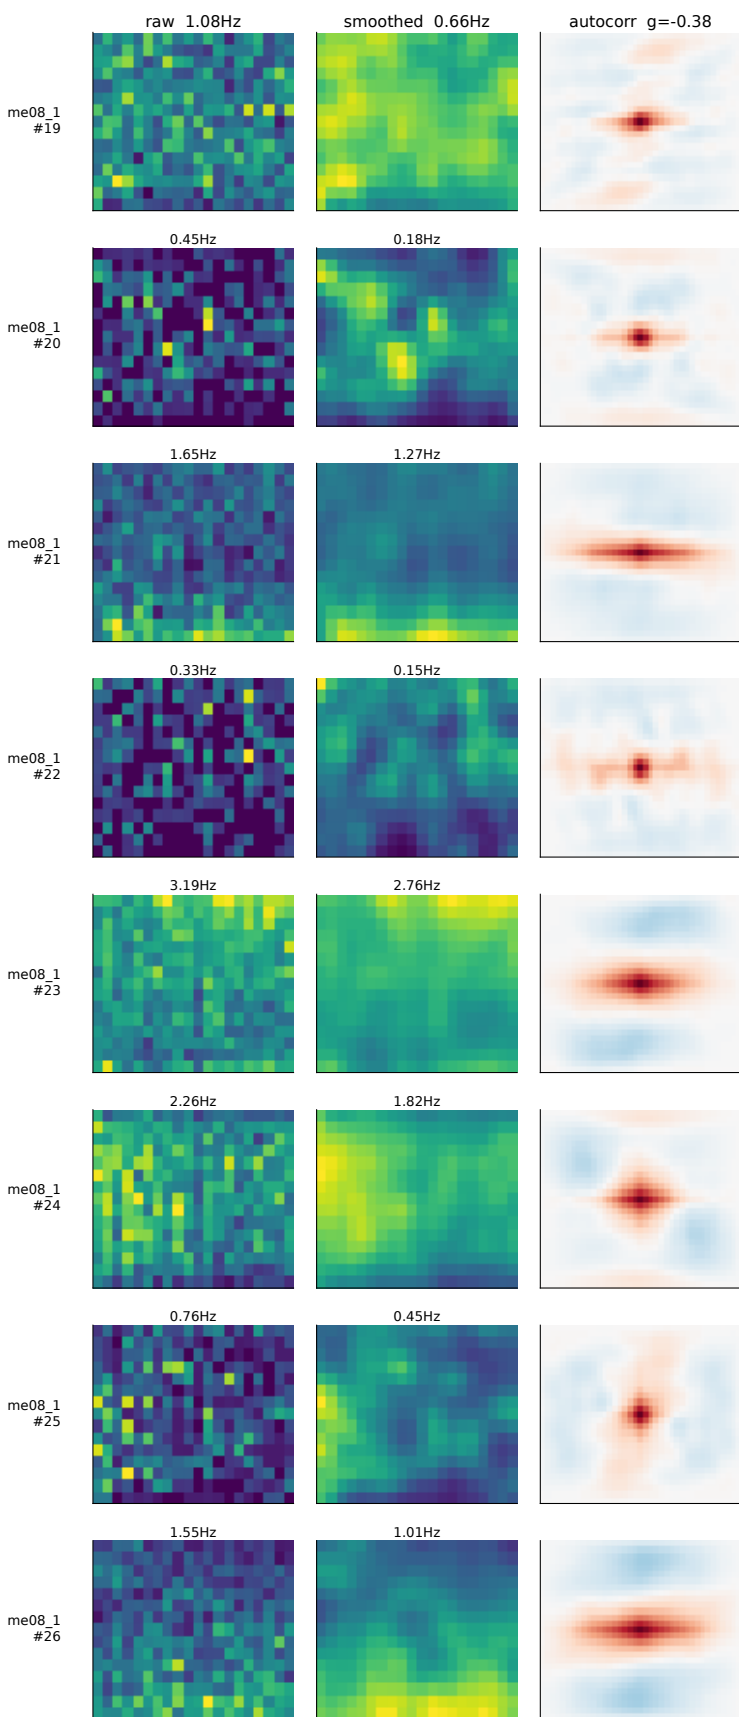


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

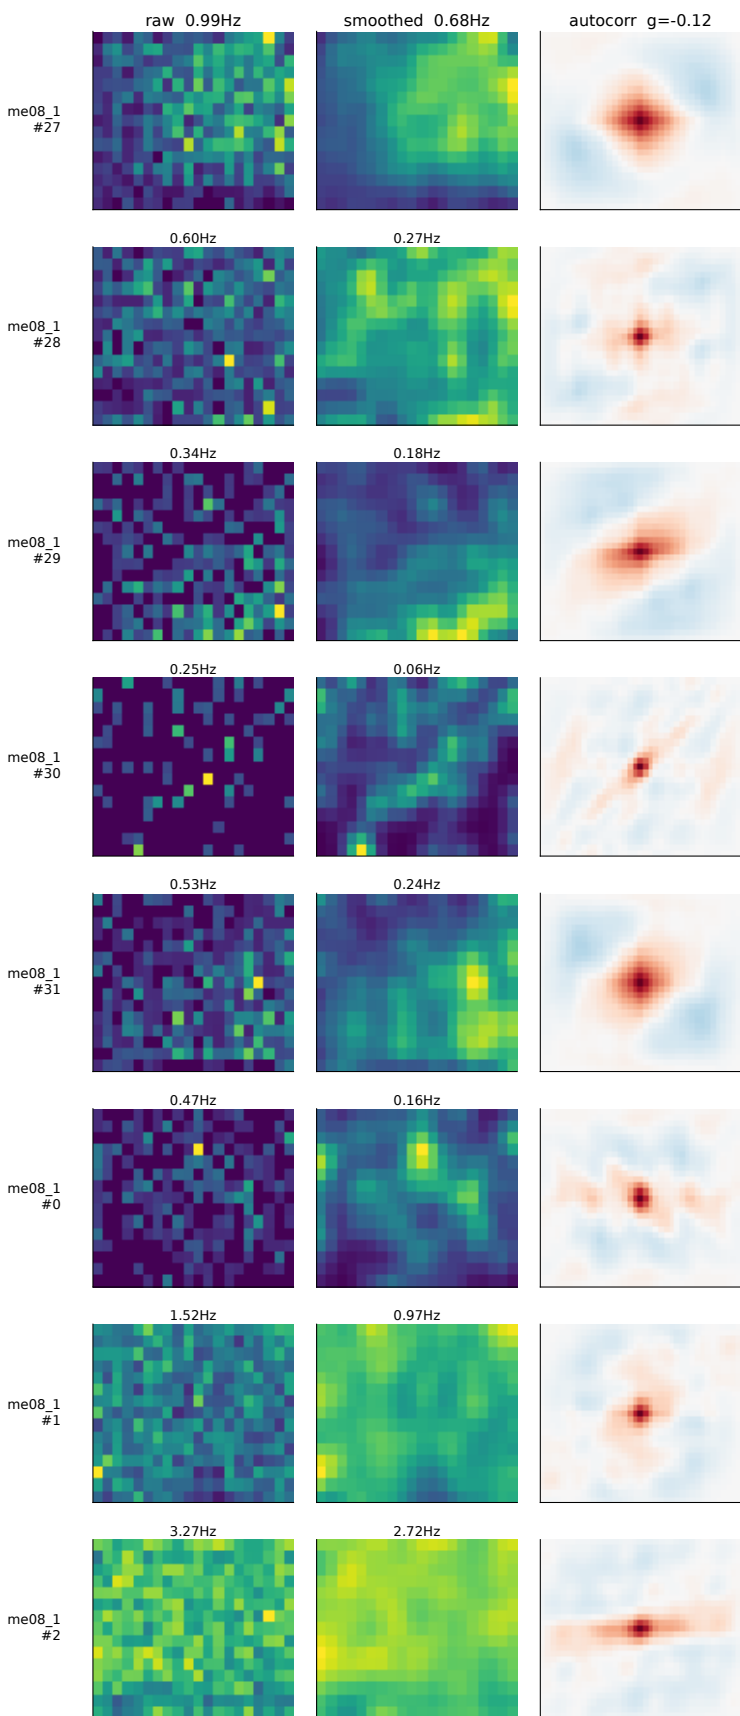


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
own beside smoothed because smoothing can create structure; no reliability measure or null is co

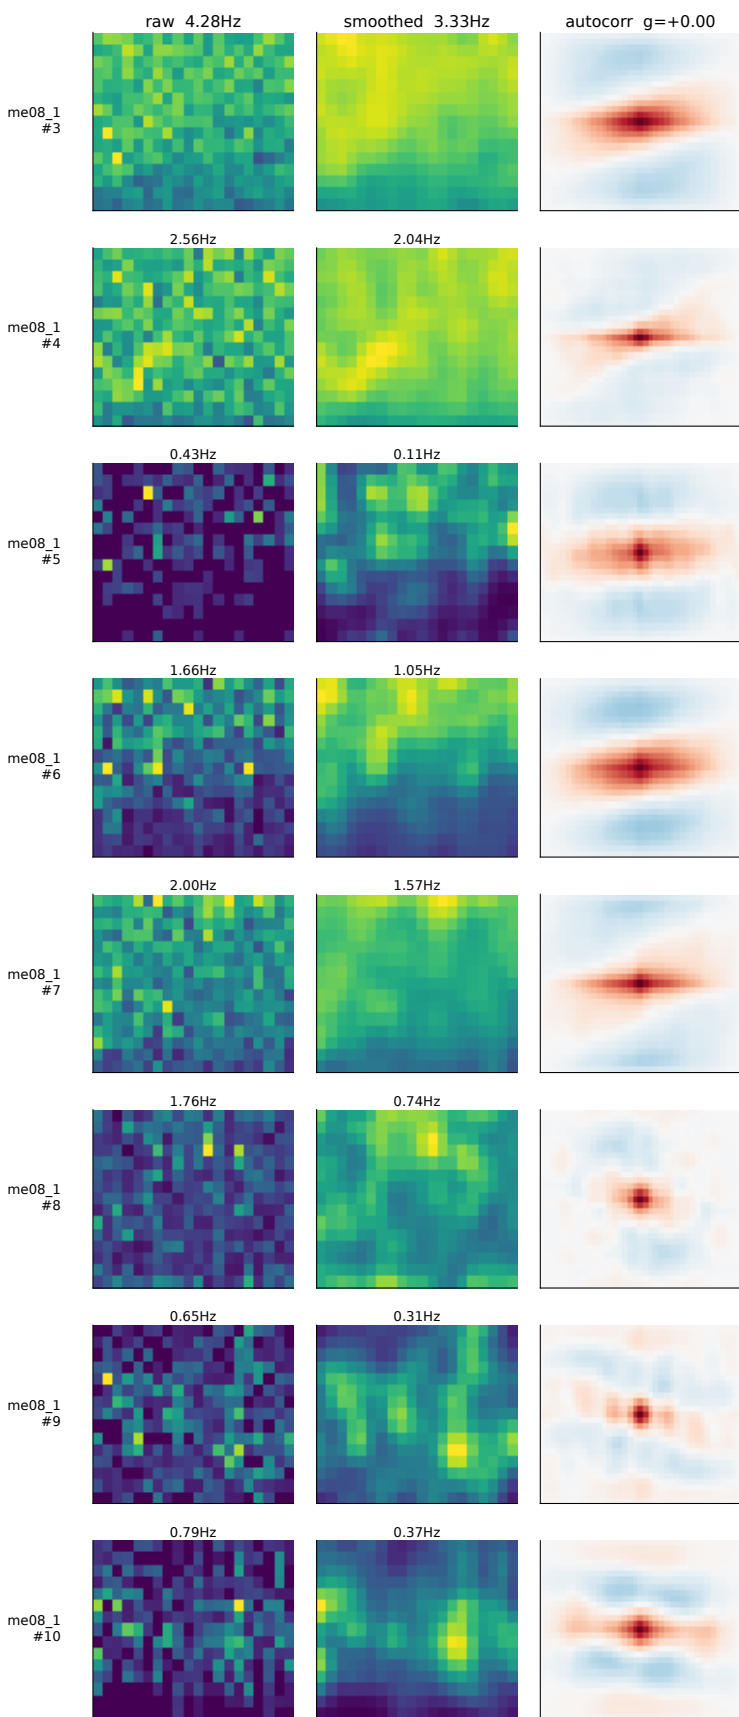


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

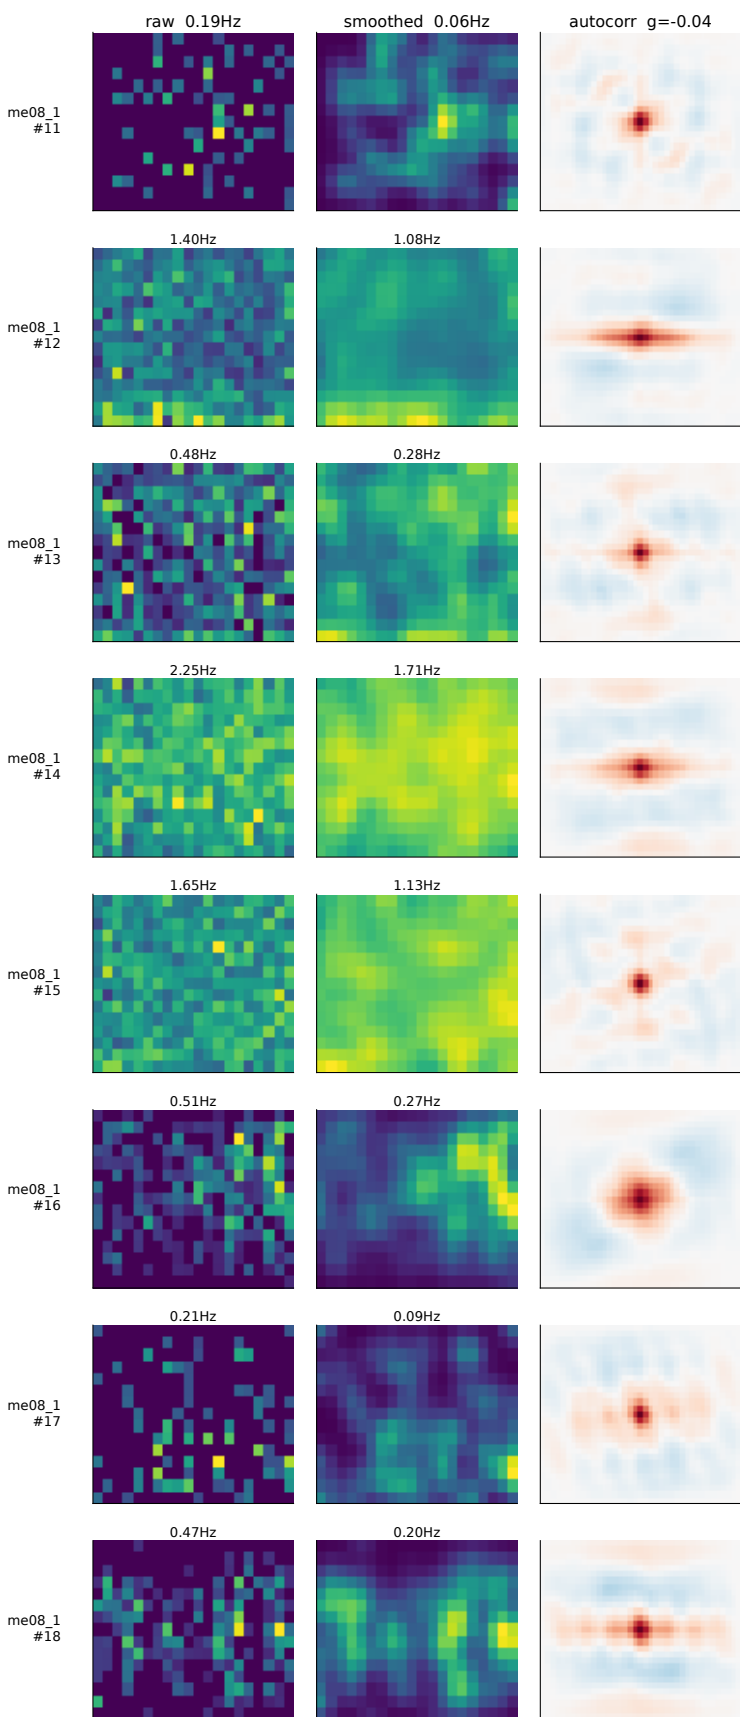


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

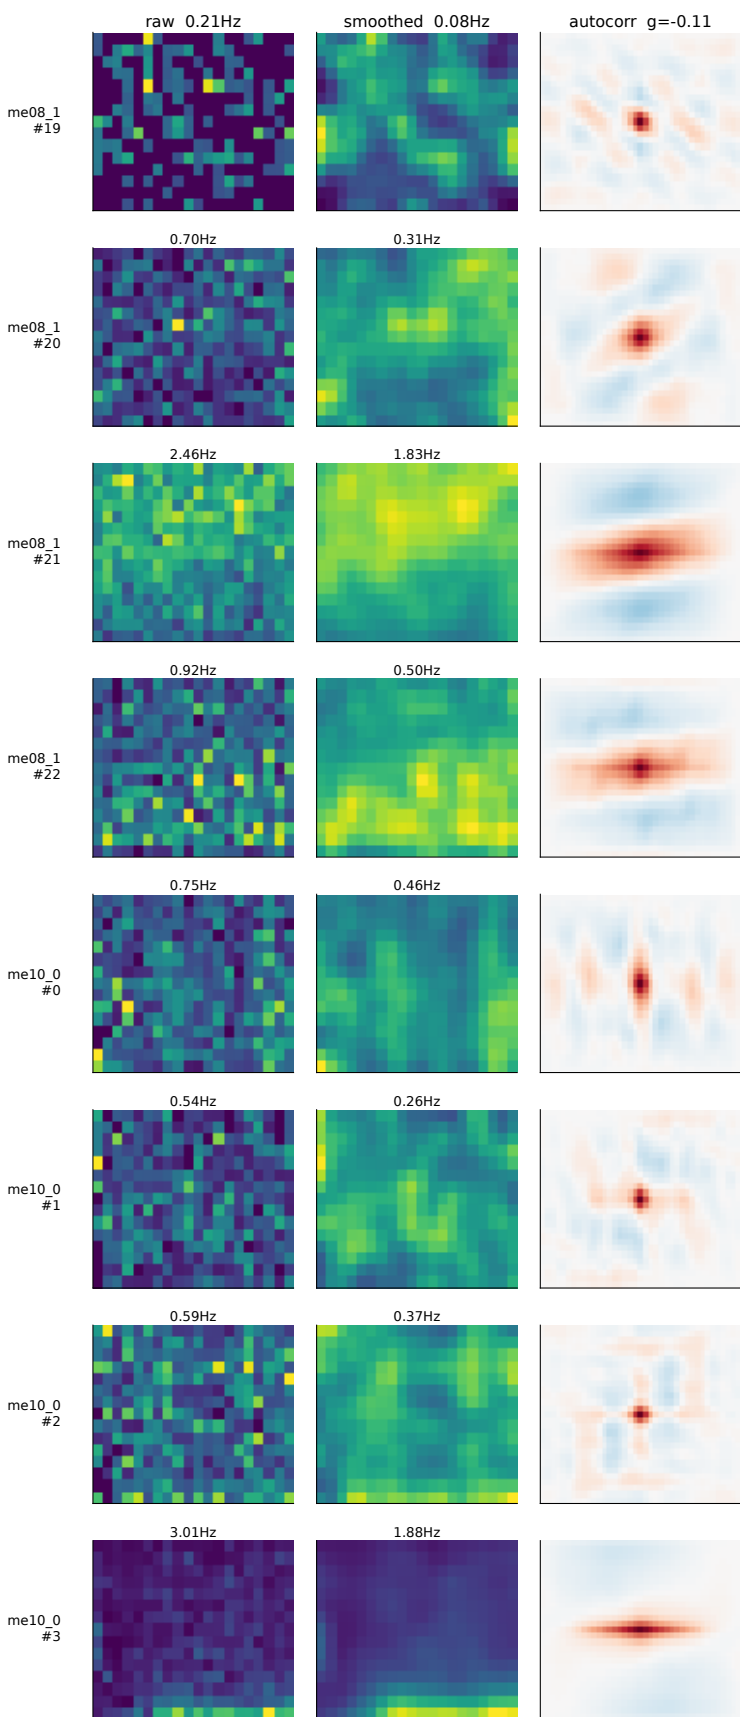


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

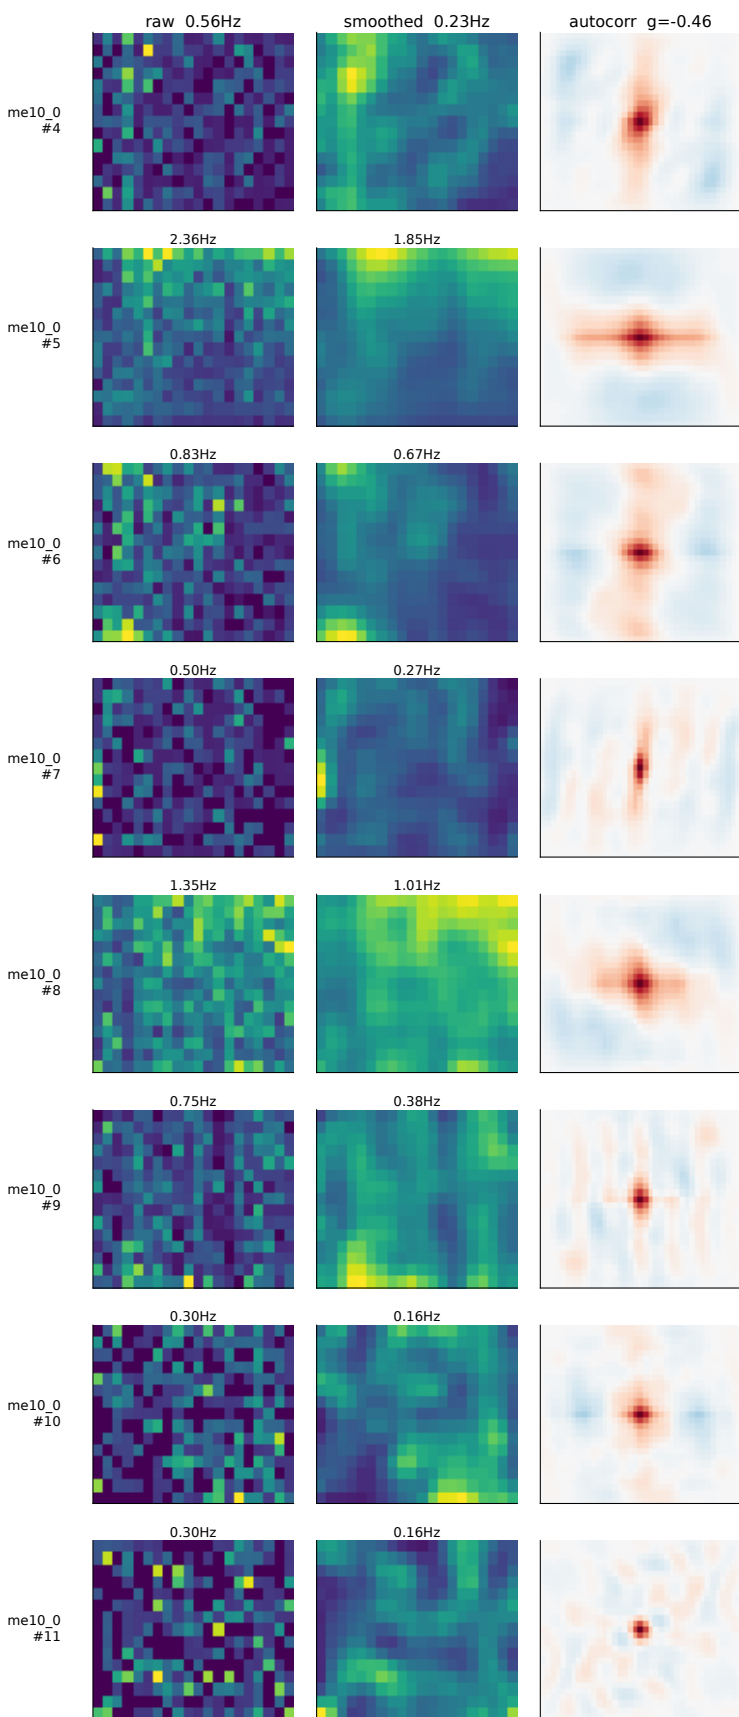


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

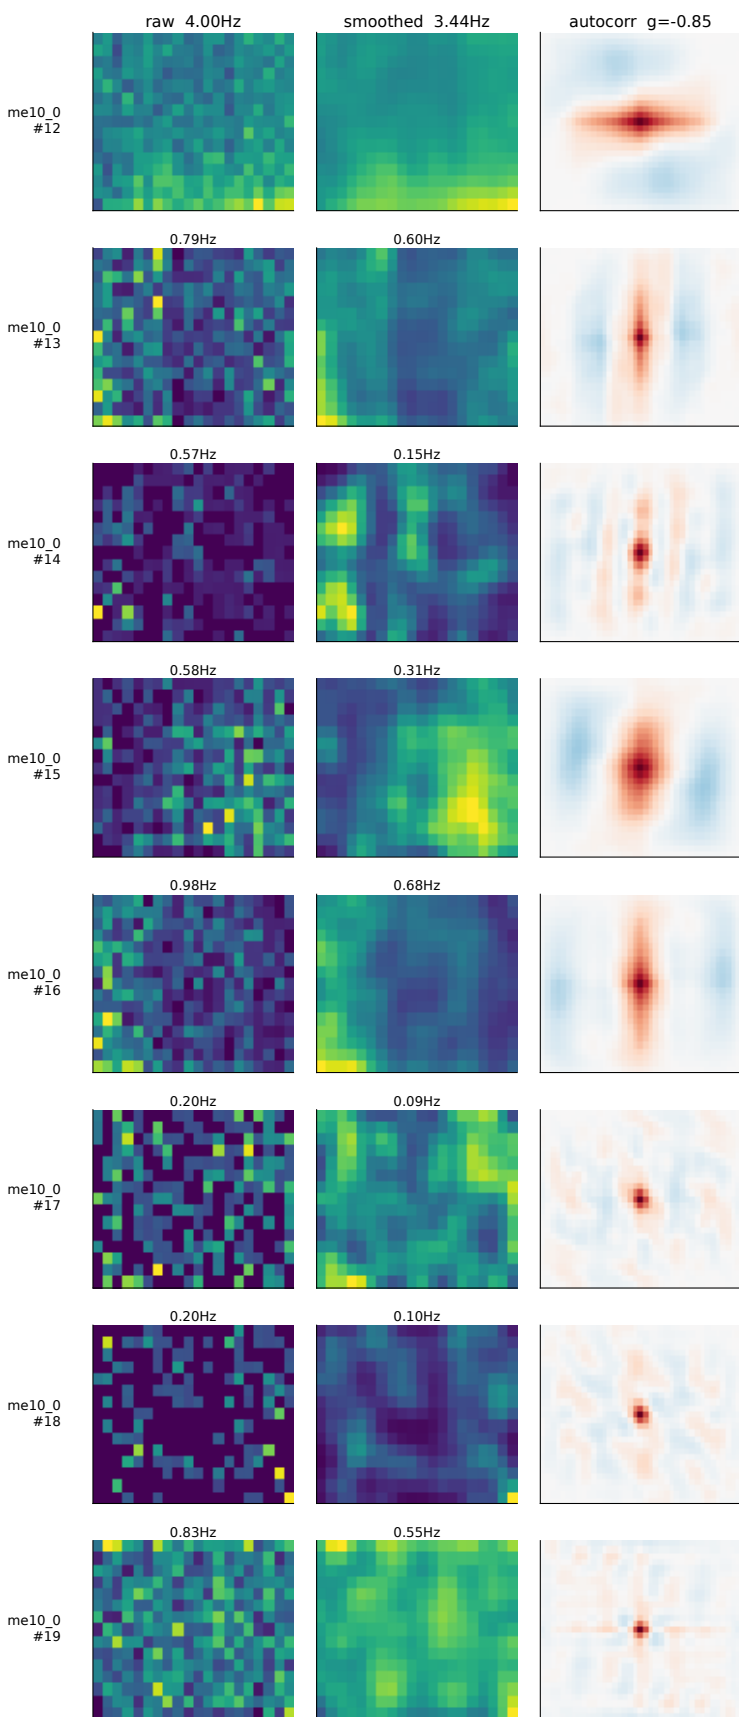


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

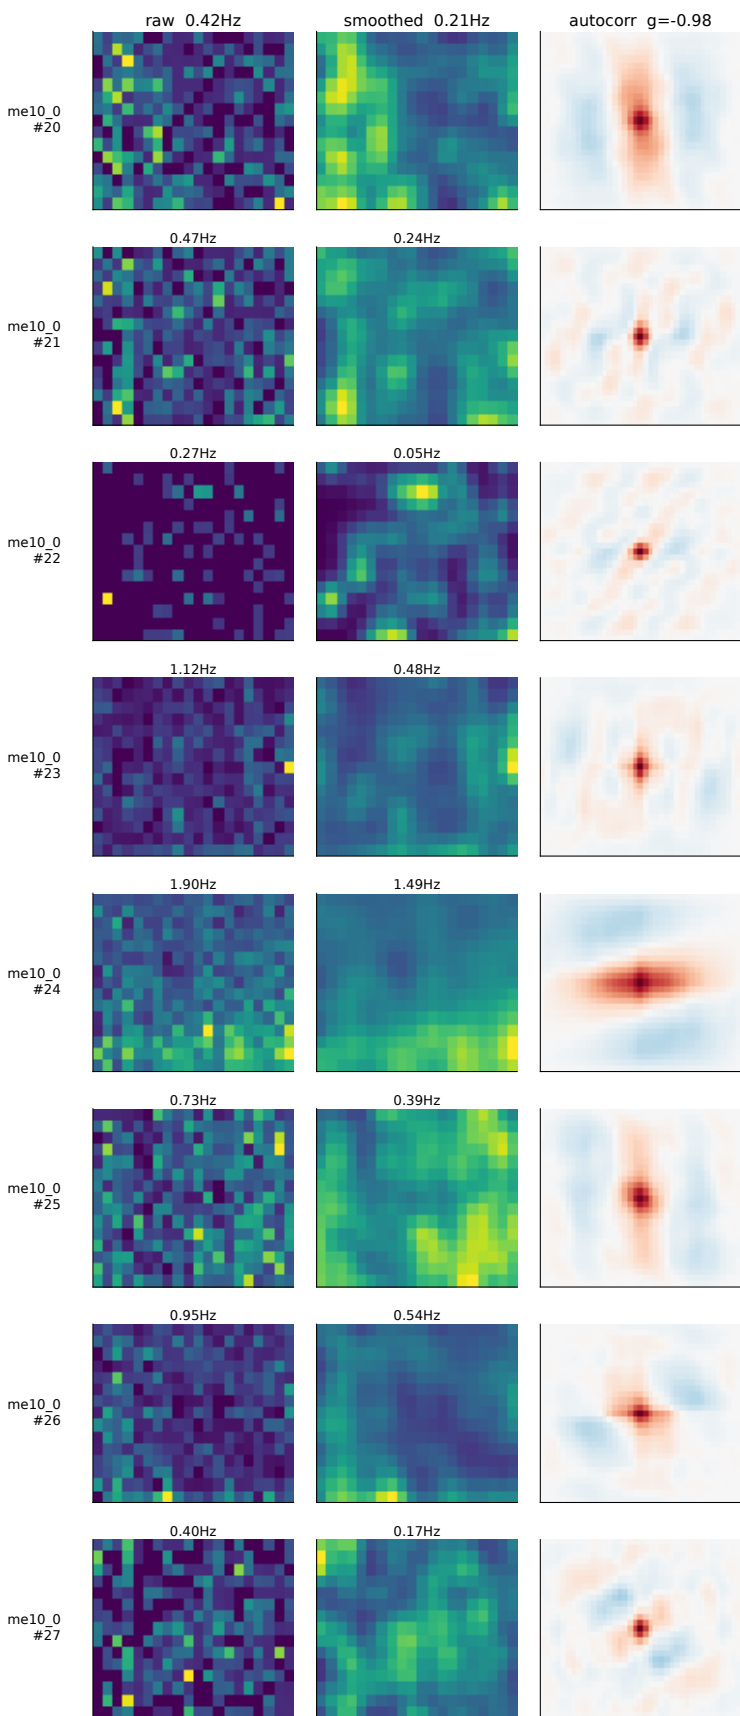


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

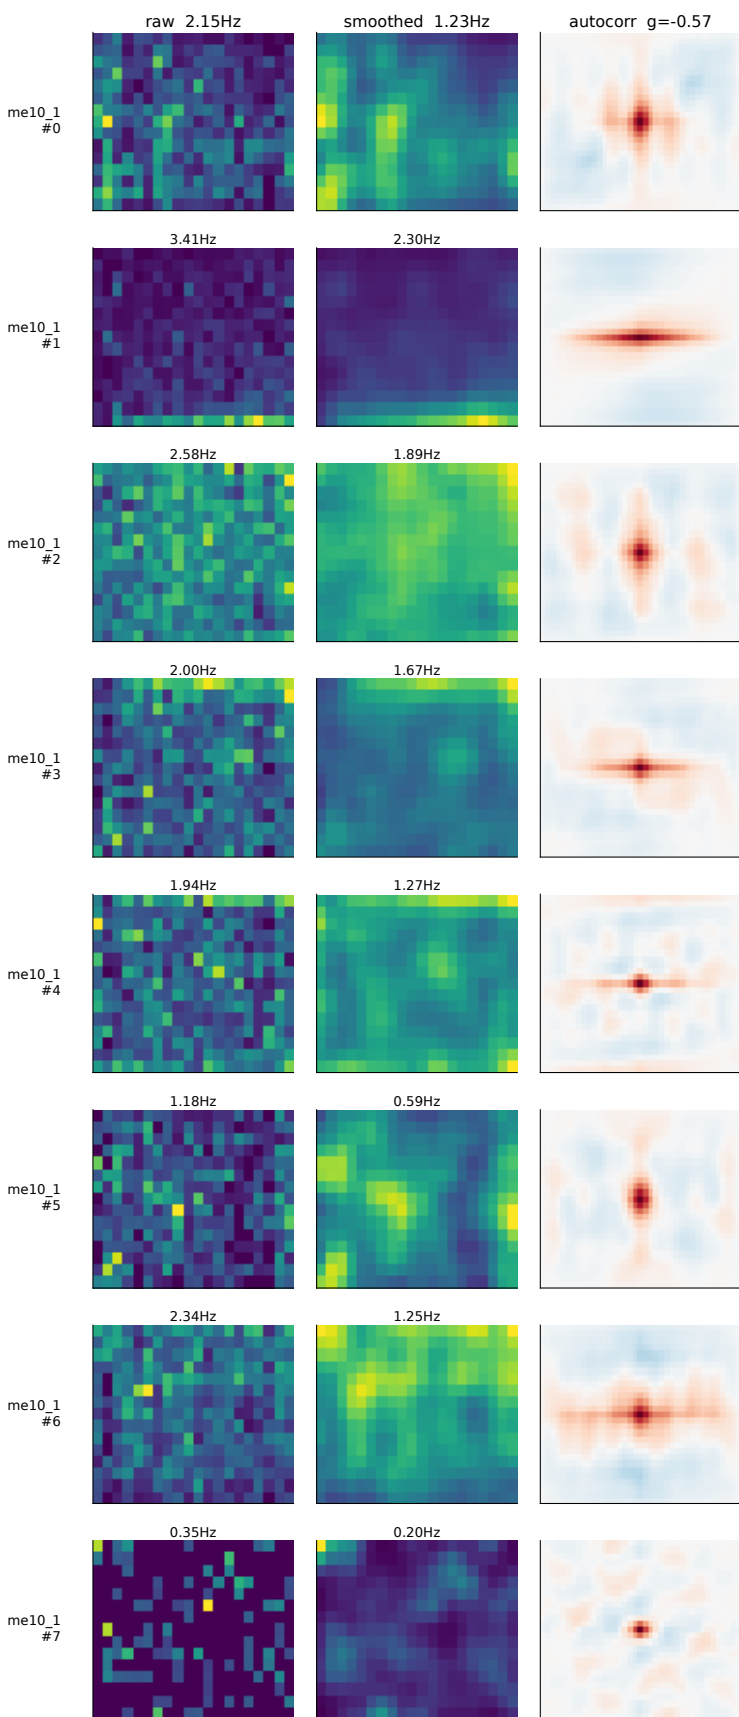


x = fraction of session, y = fraction of goal-transition | autocorr: lag on both axes | neuron
shown beside smoothed because smoothing can create structure; no reliability measure or null is co

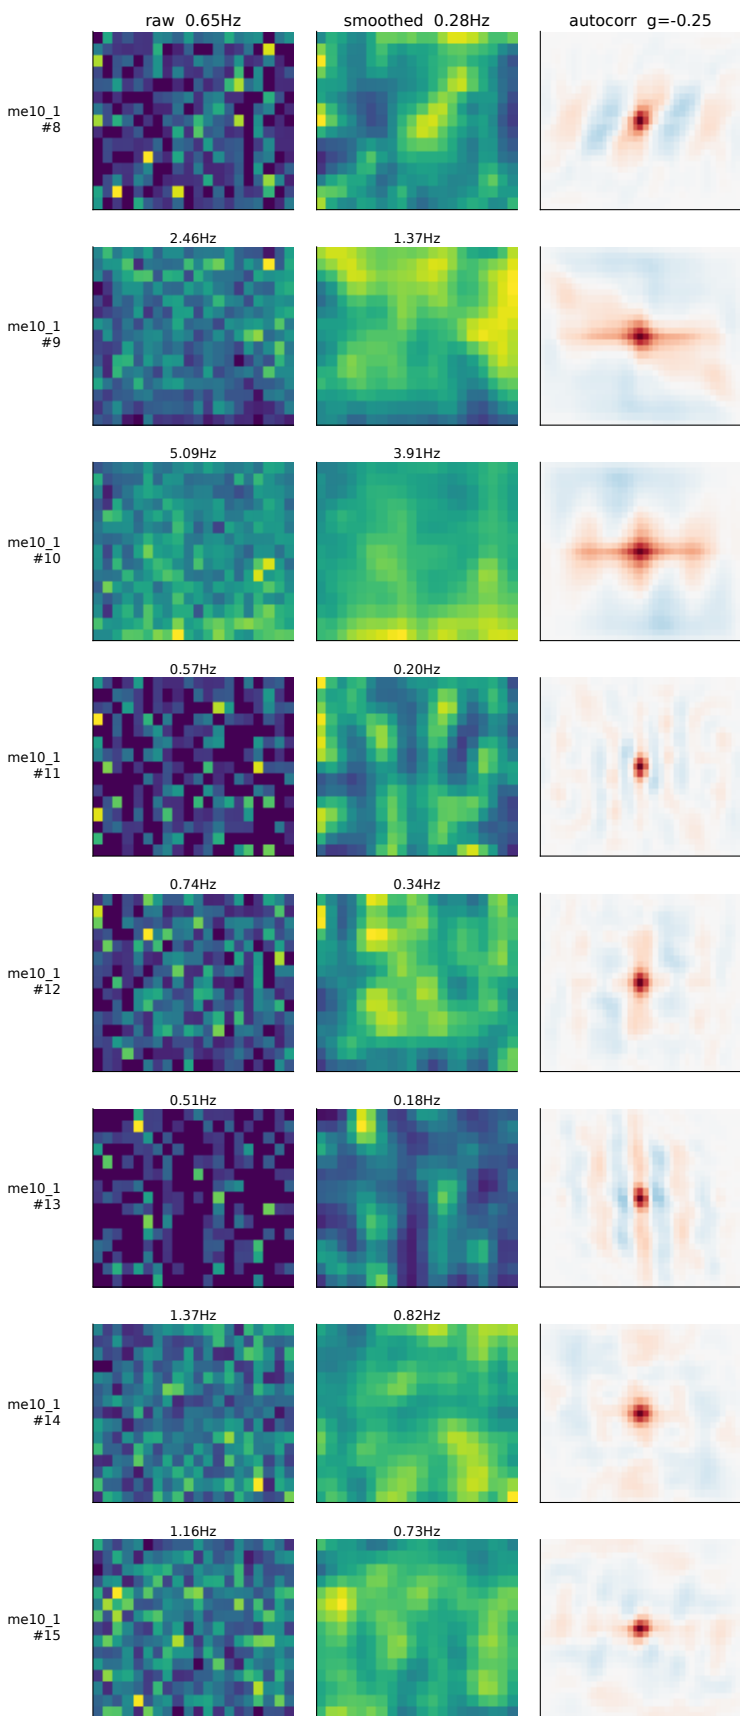


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

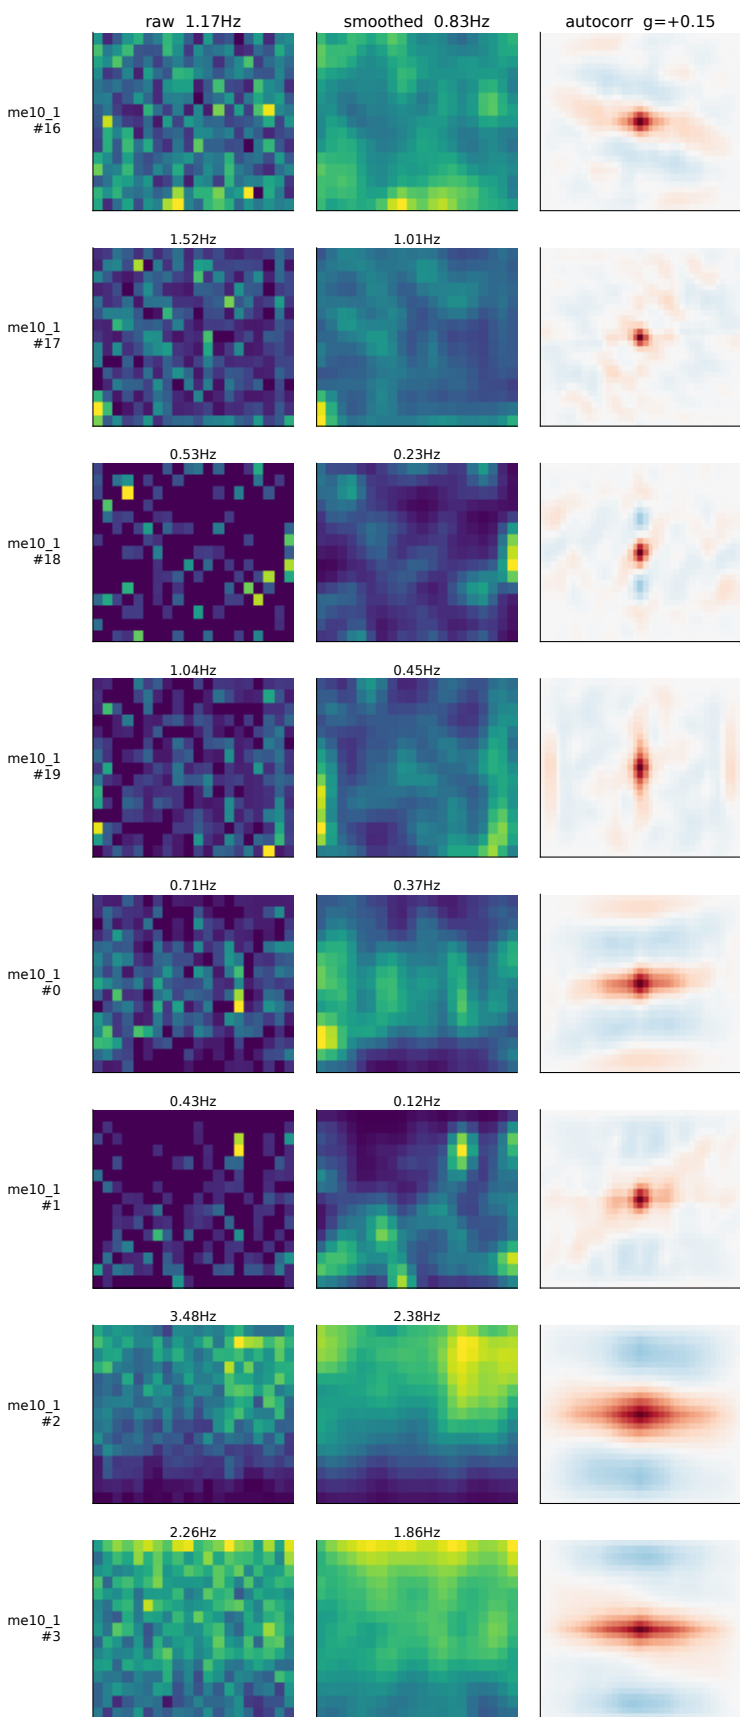


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

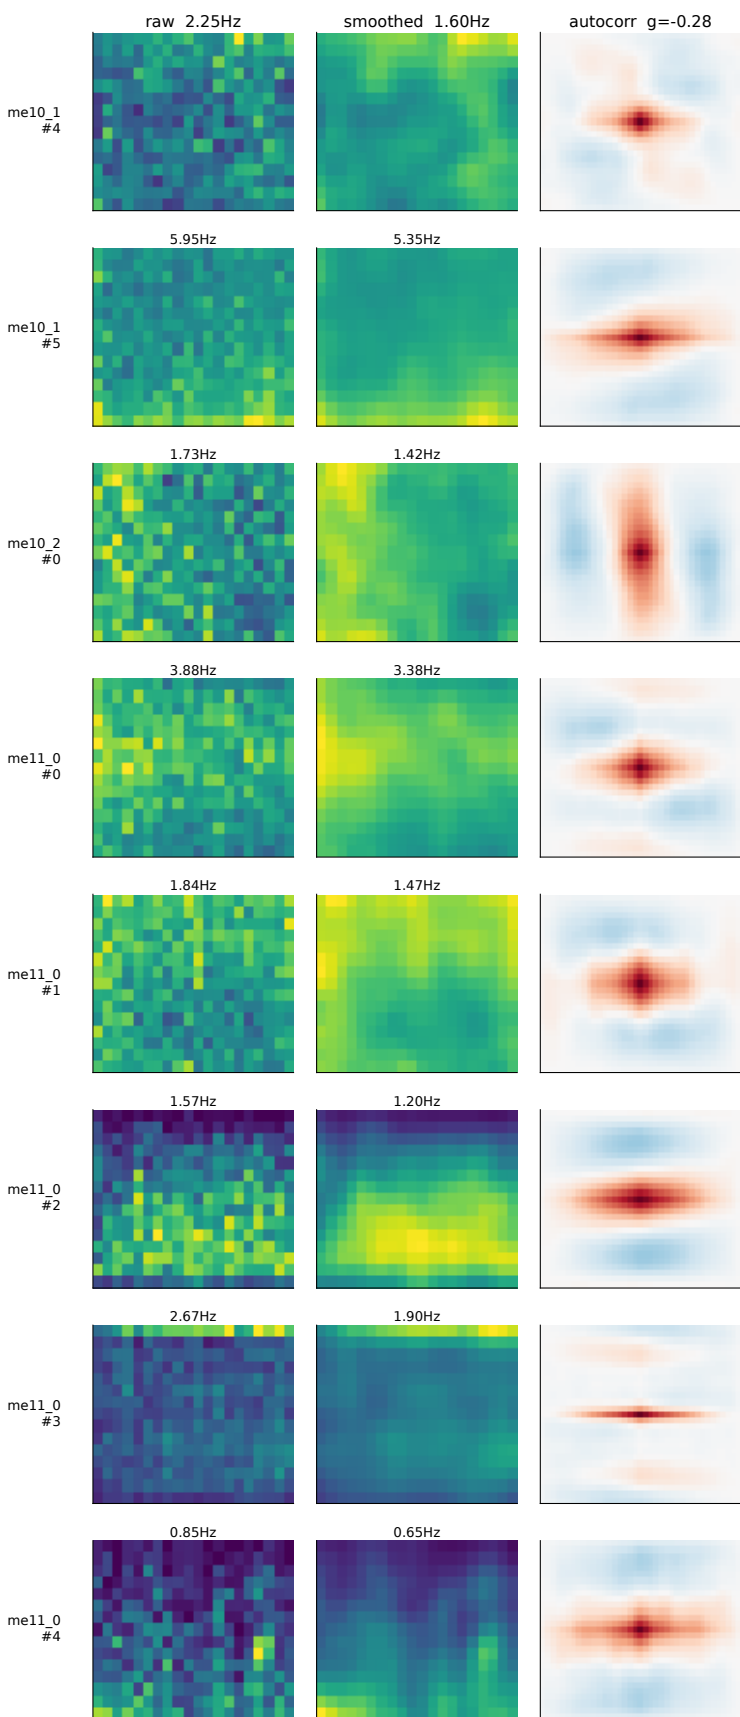


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

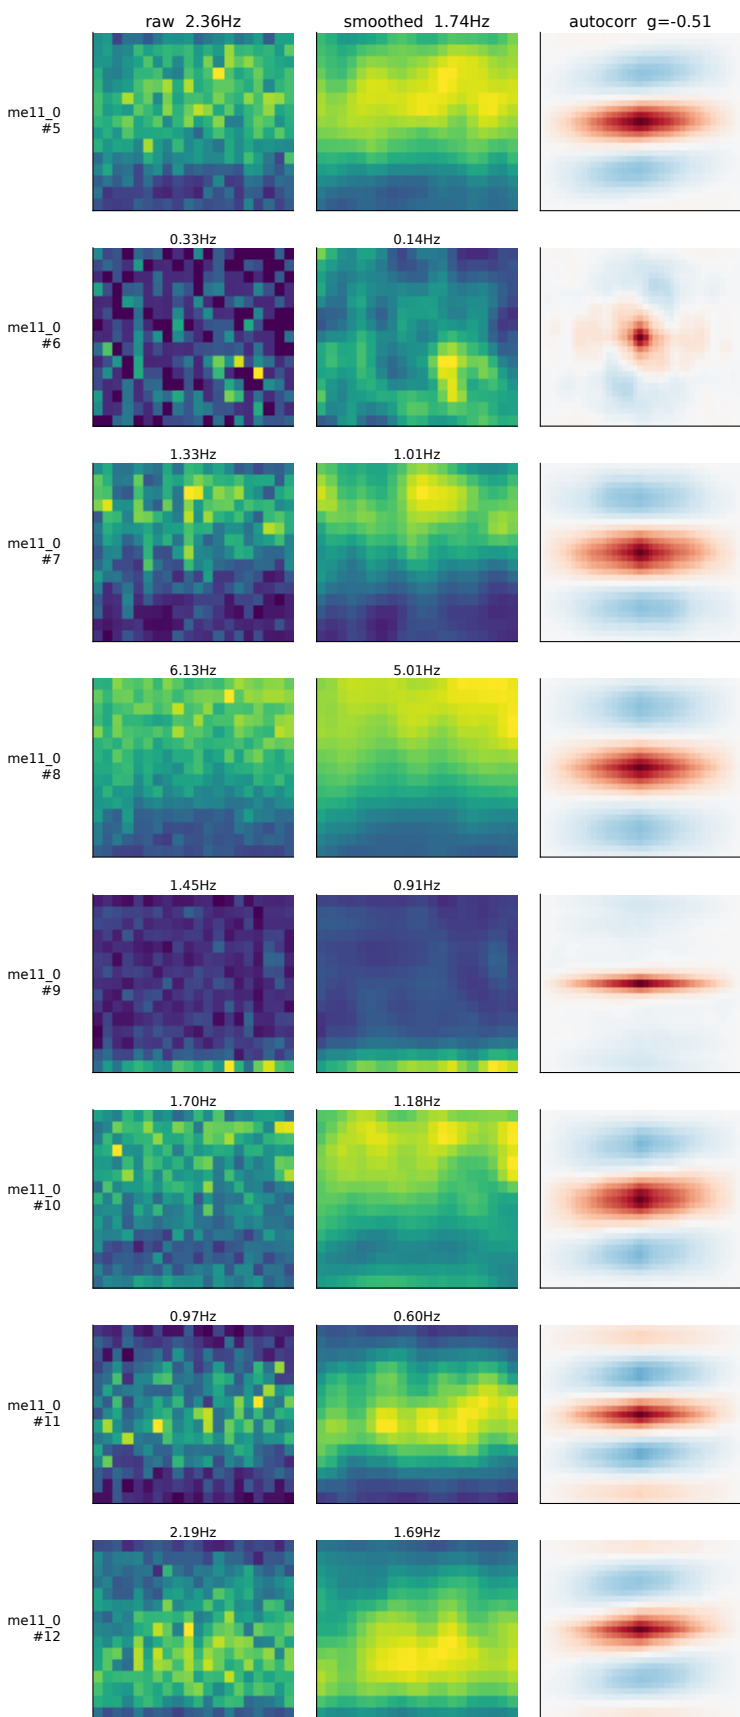


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

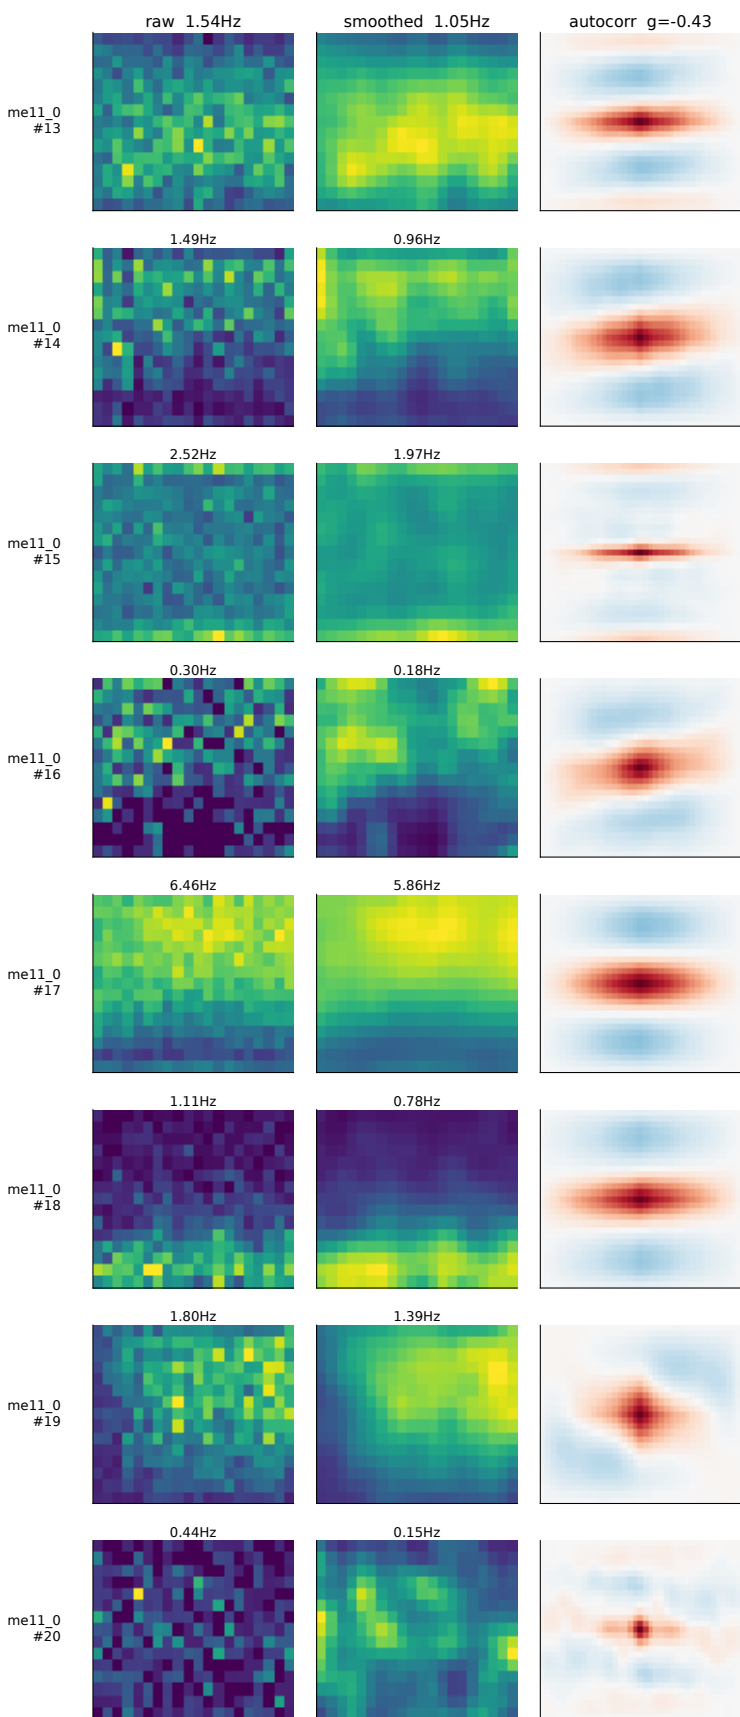


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

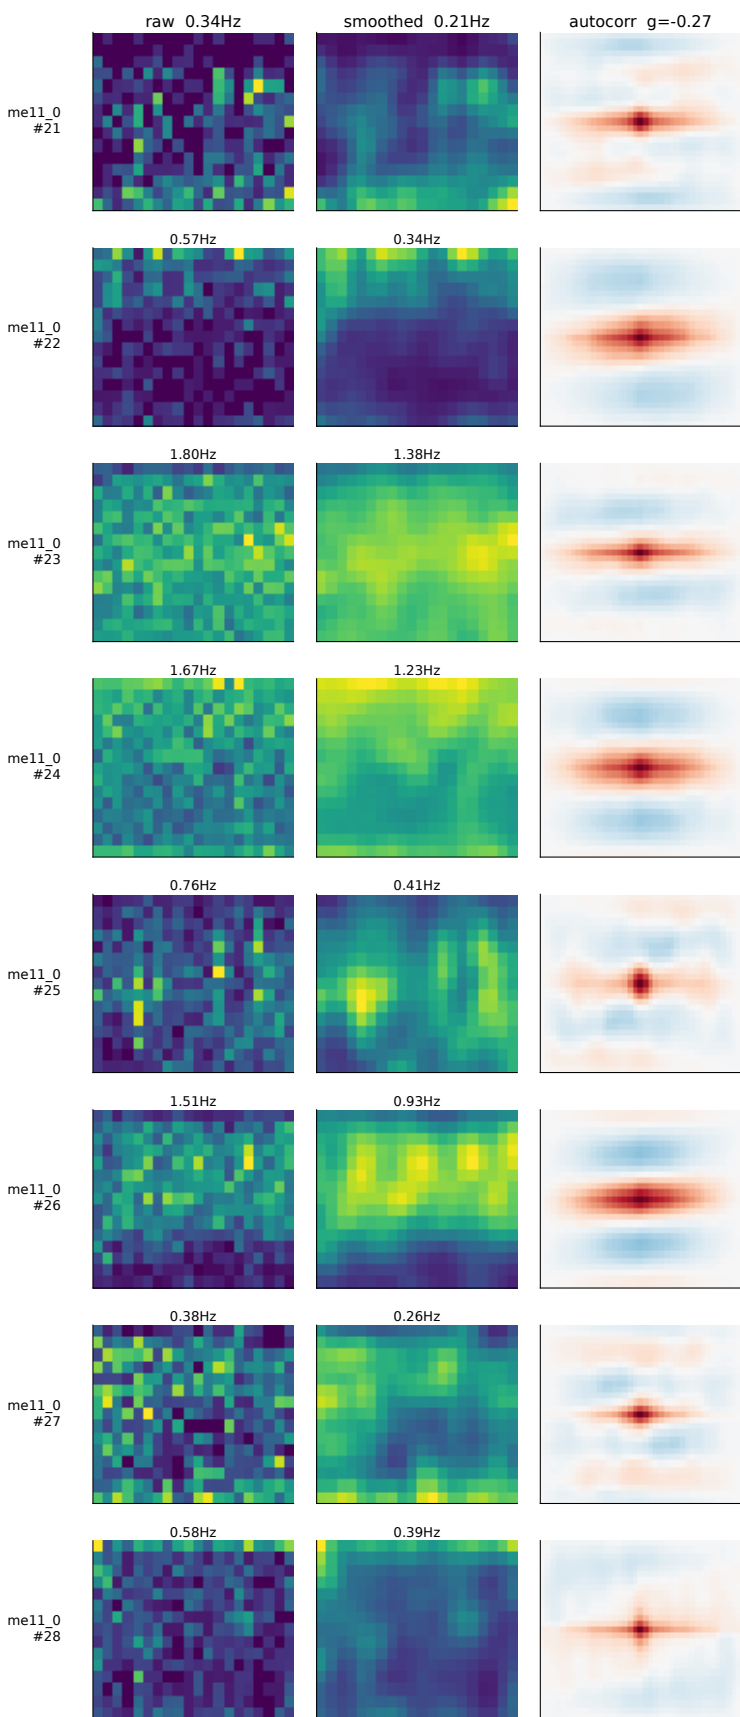


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

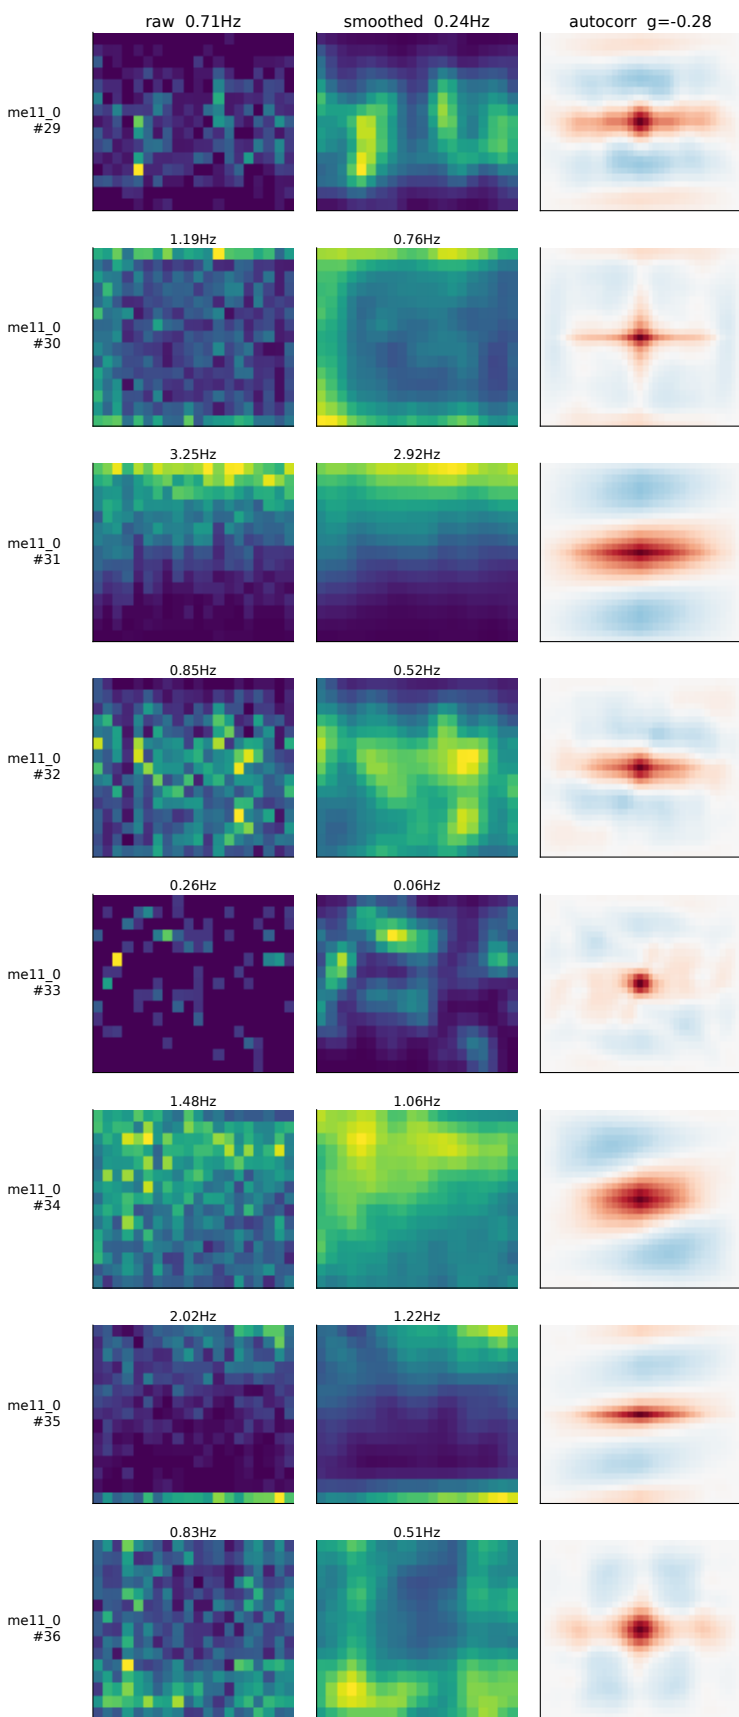


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

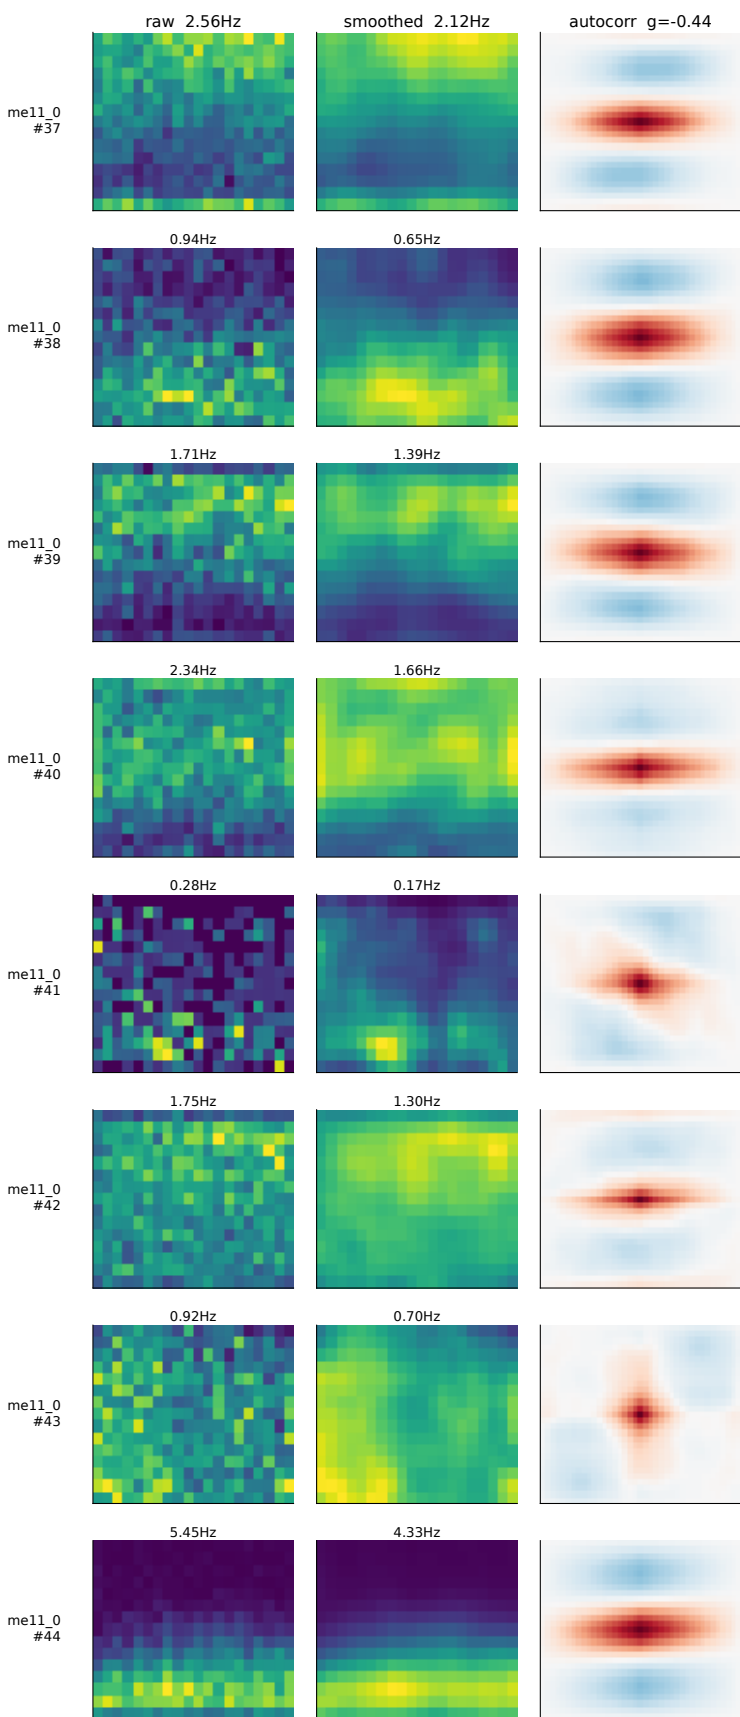


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

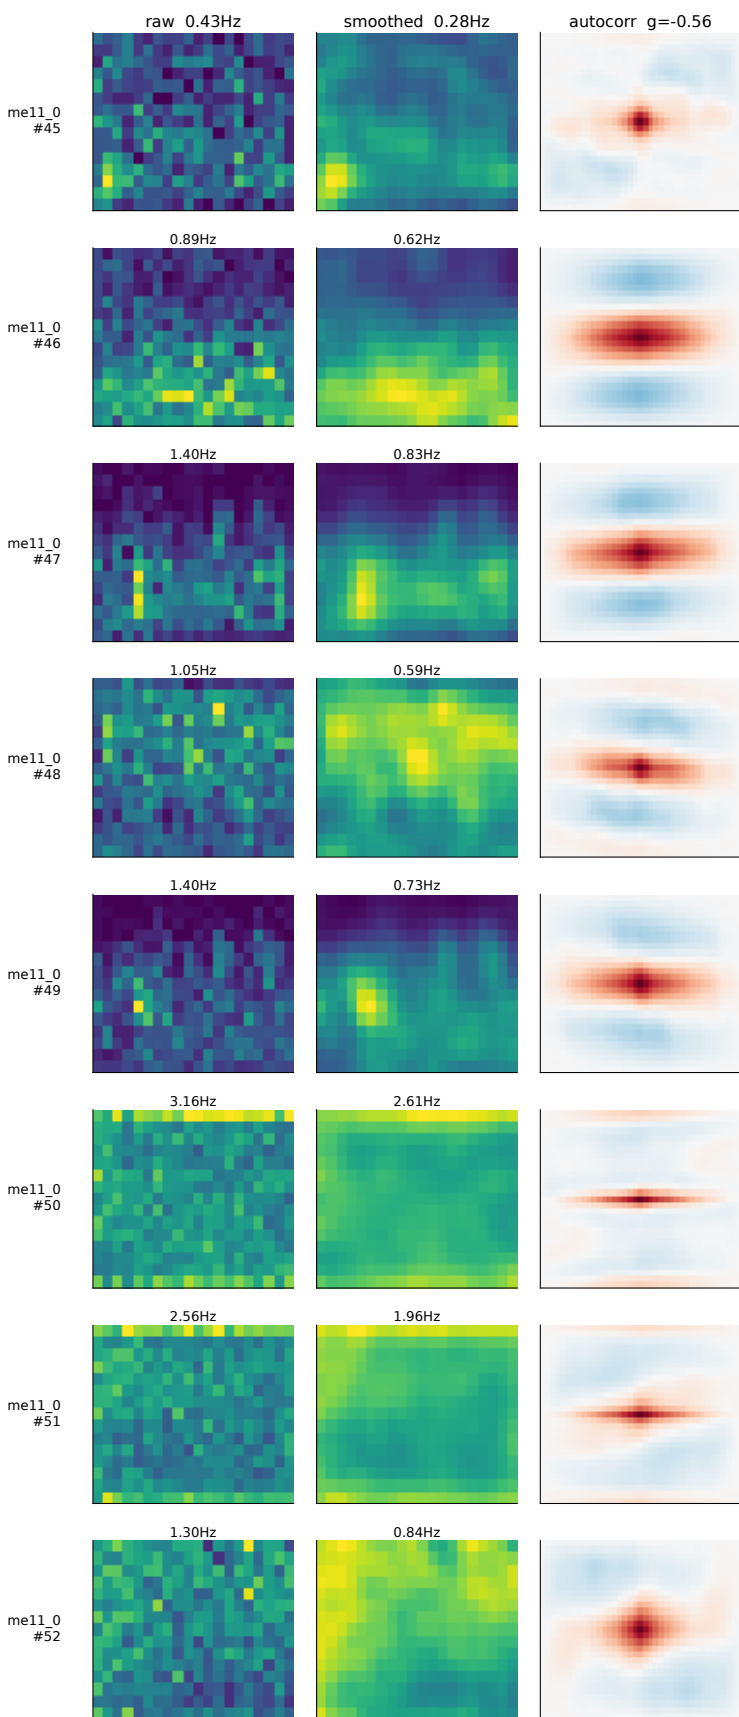


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

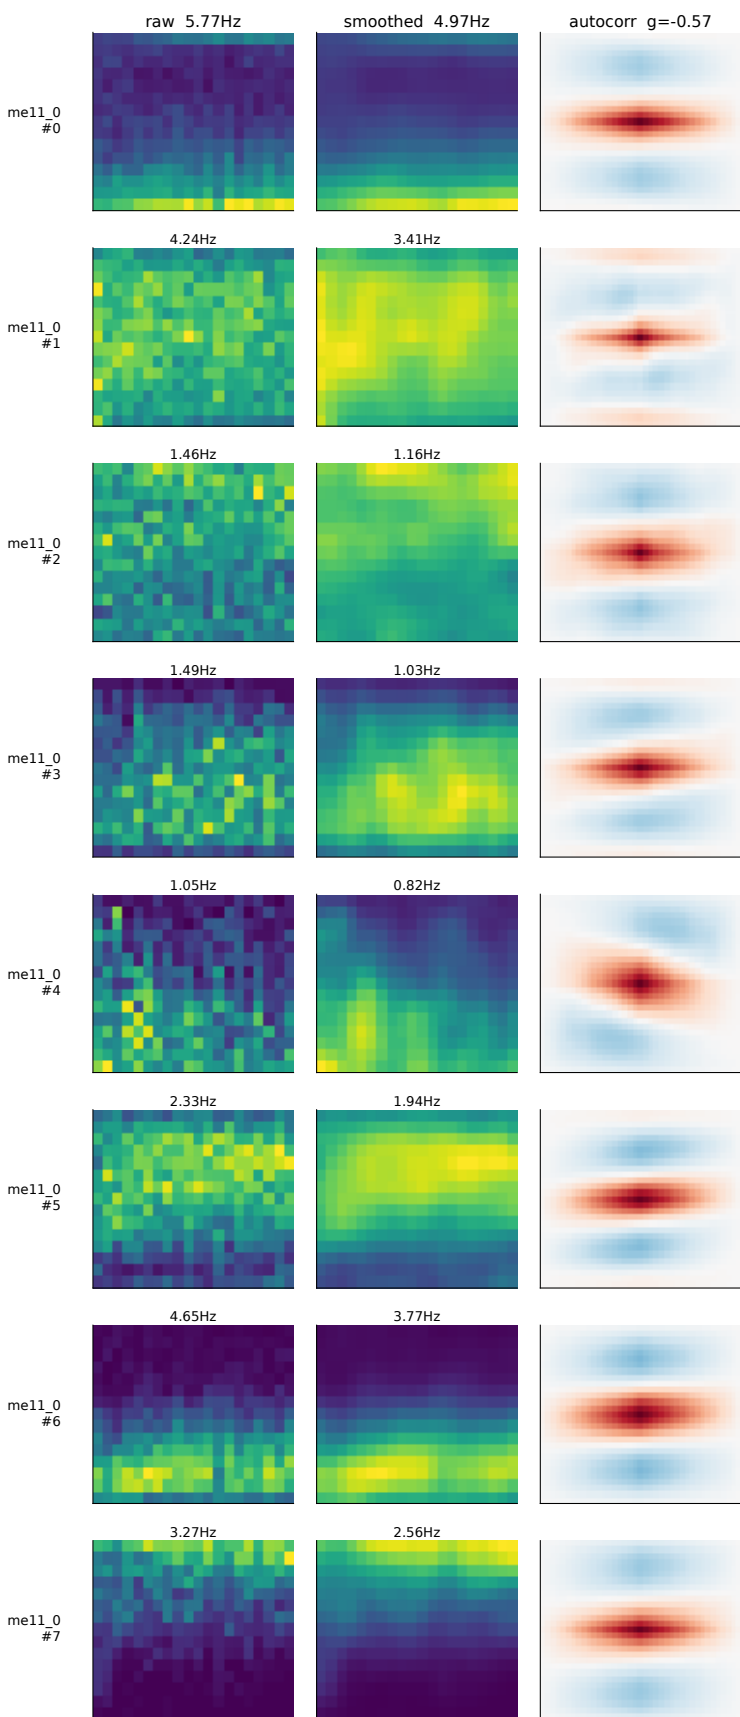


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

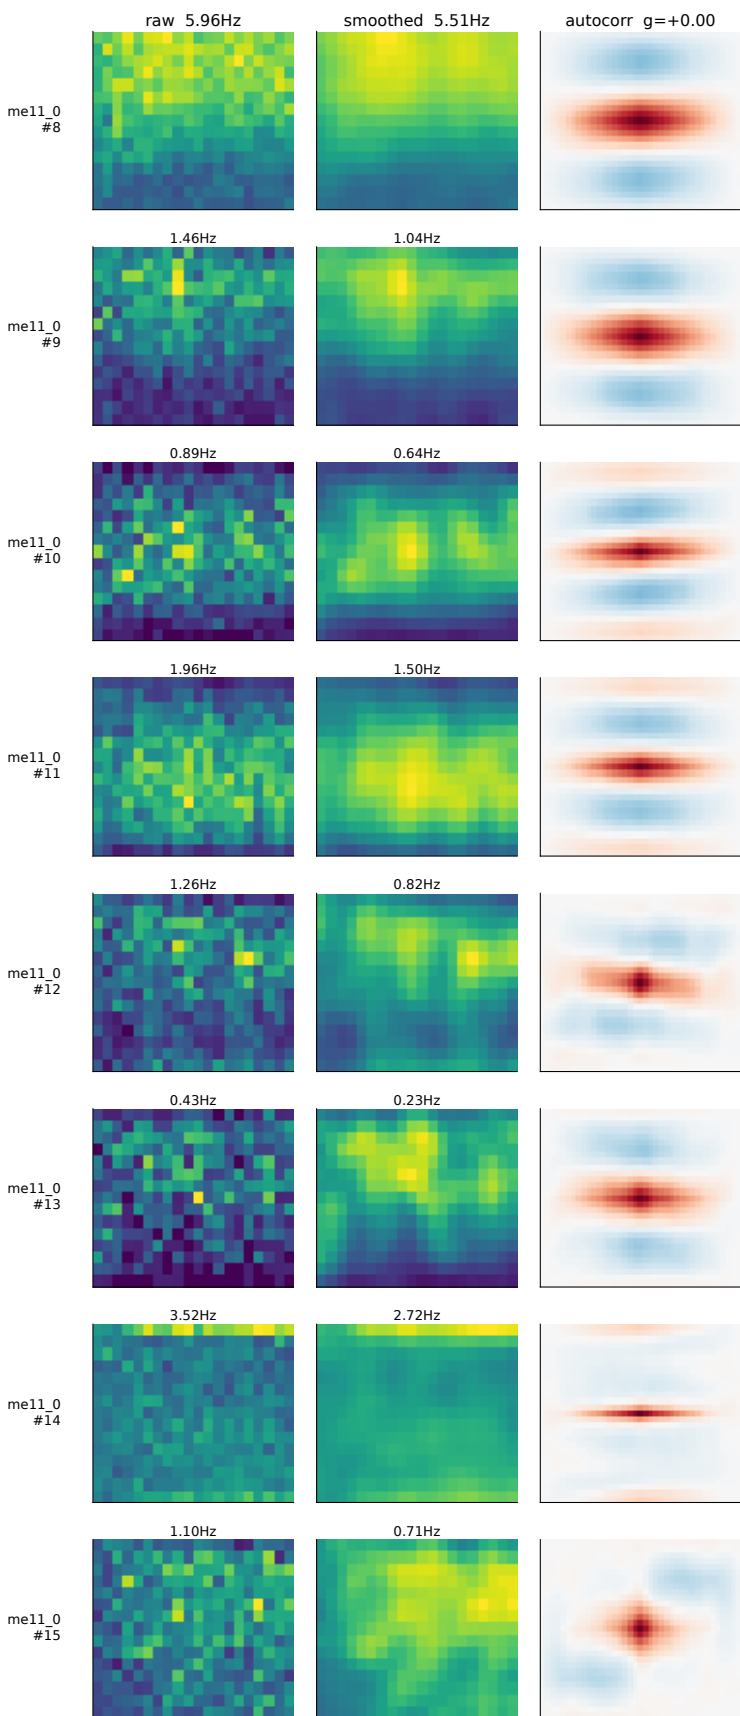


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

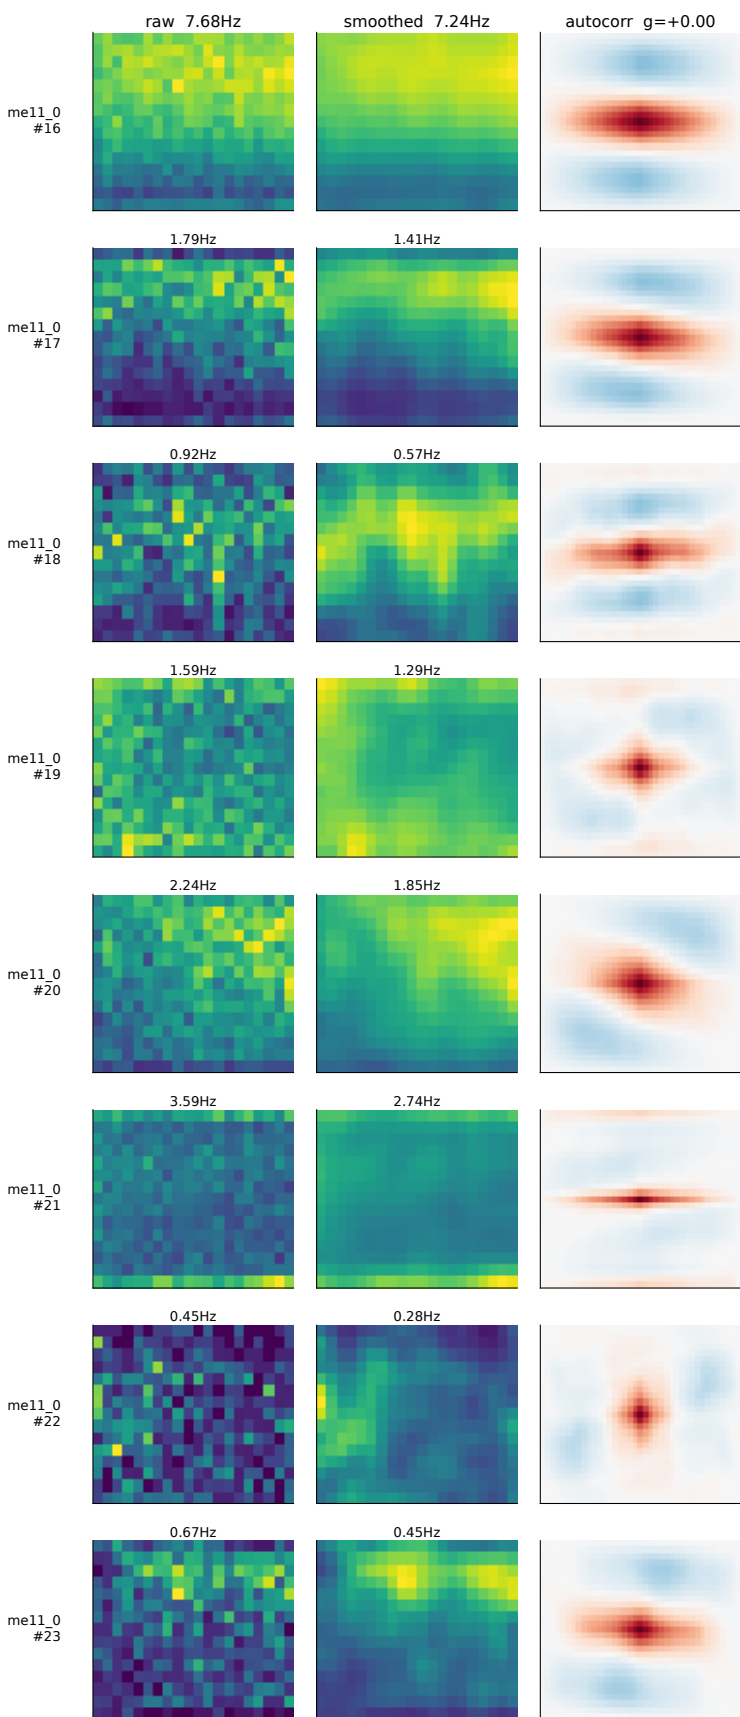


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

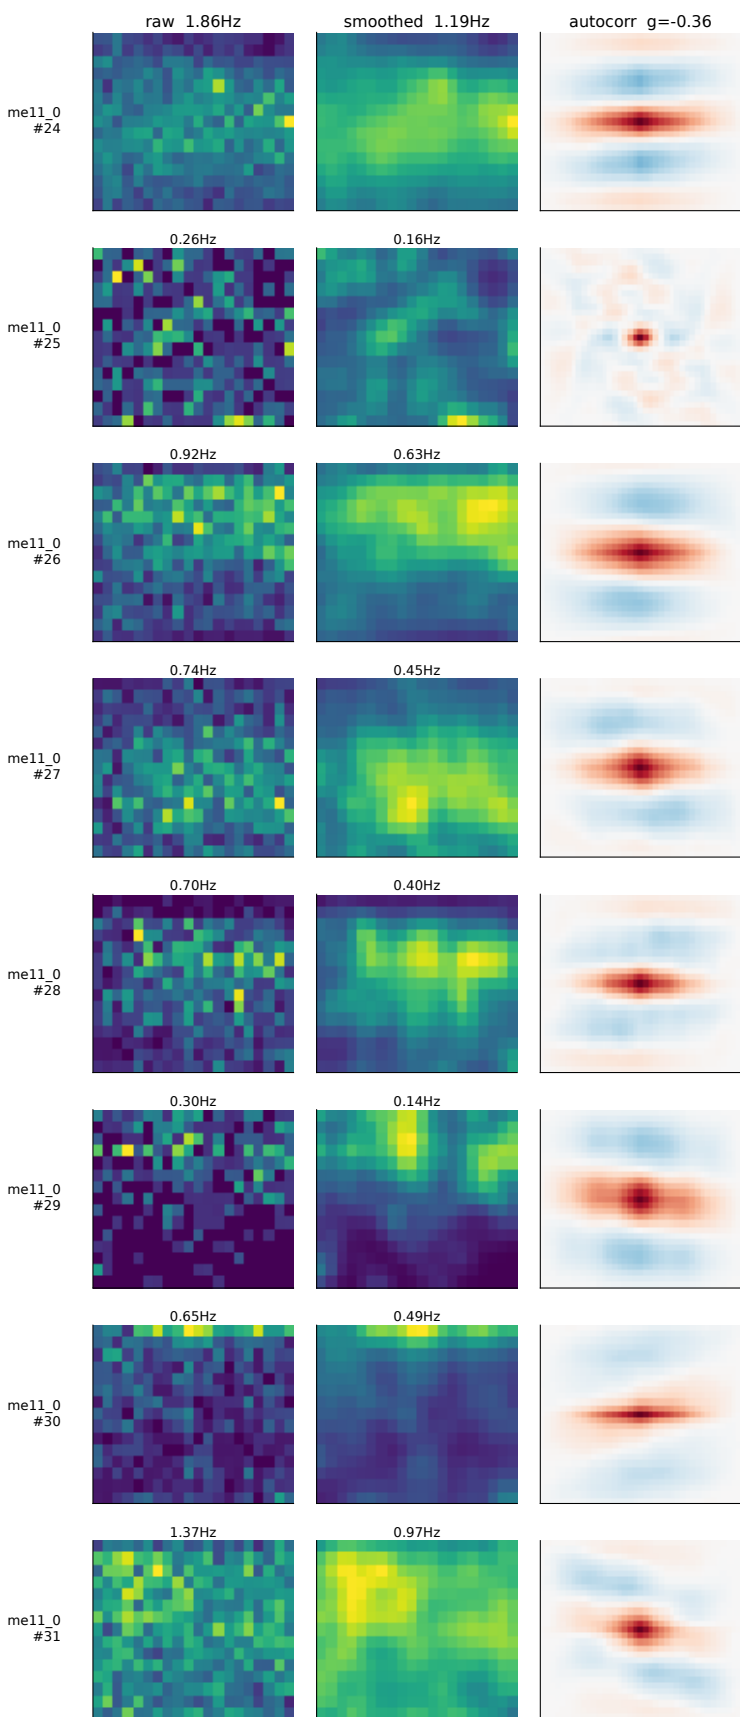


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

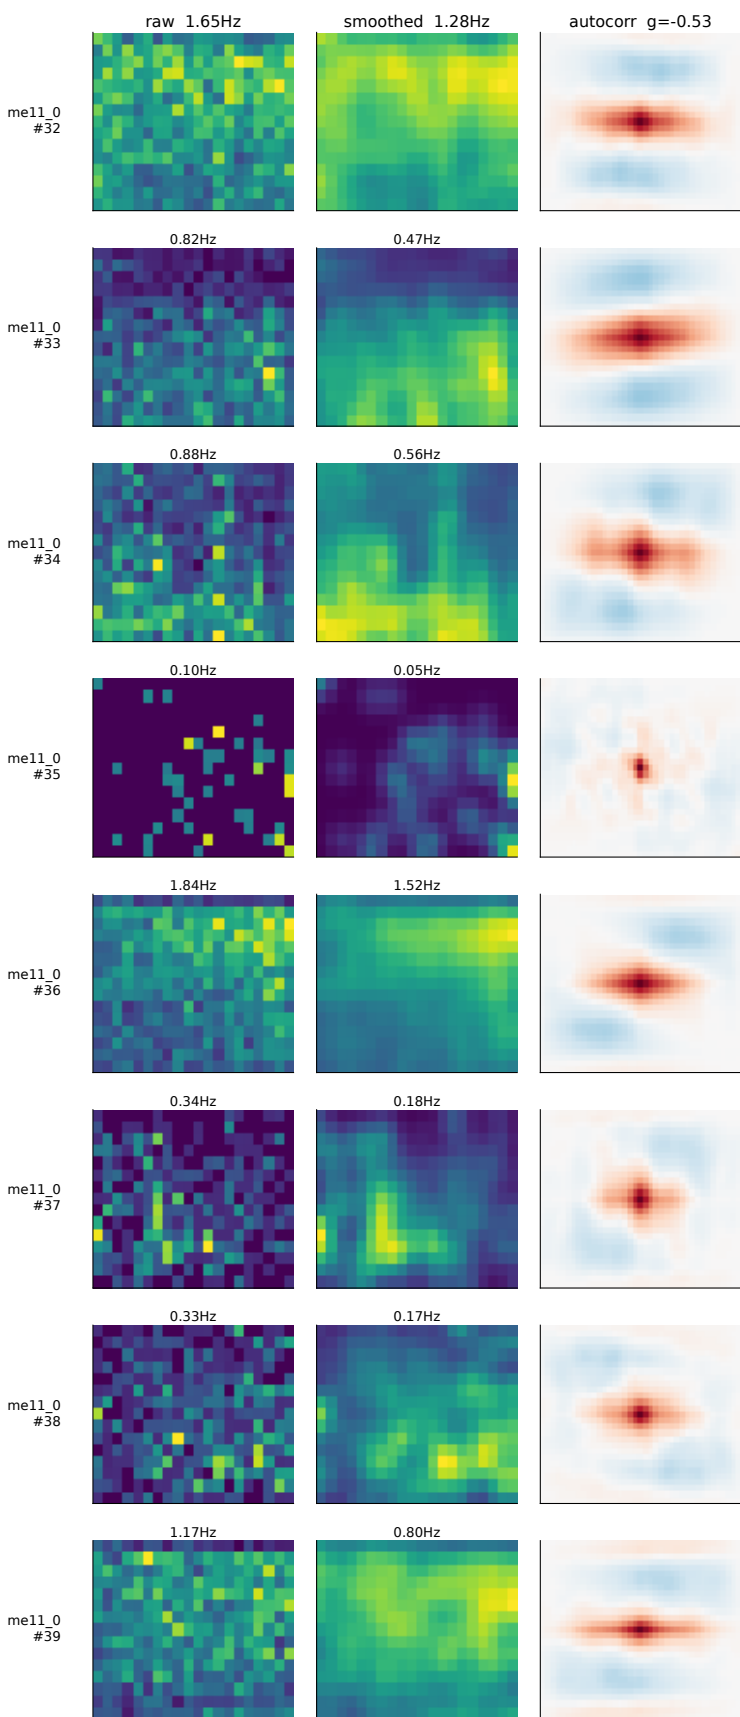


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

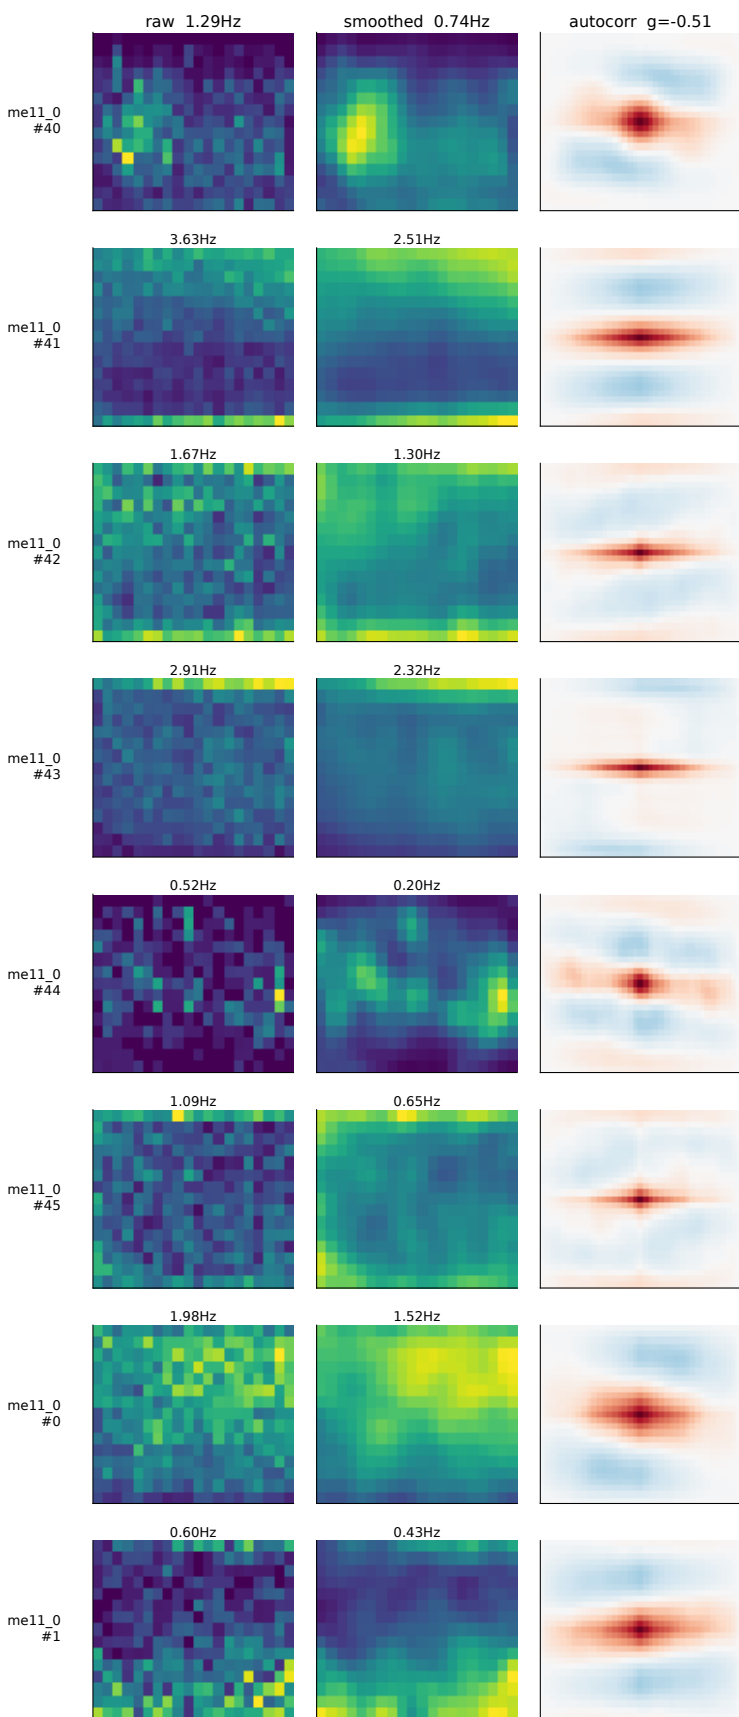


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
own beside smoothed because smoothing can create structure; no reliability measure or null is co

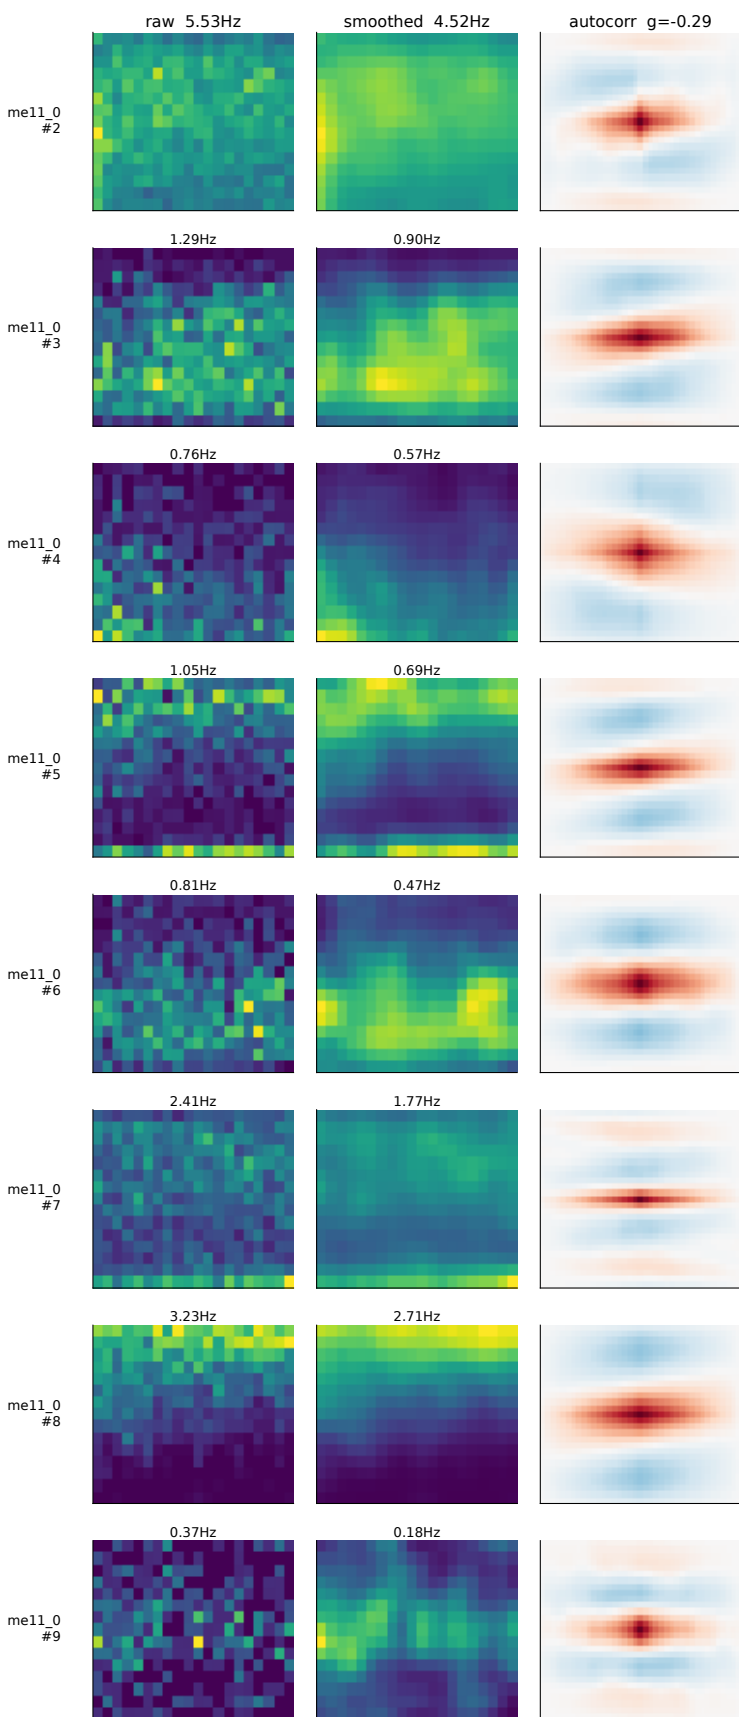


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

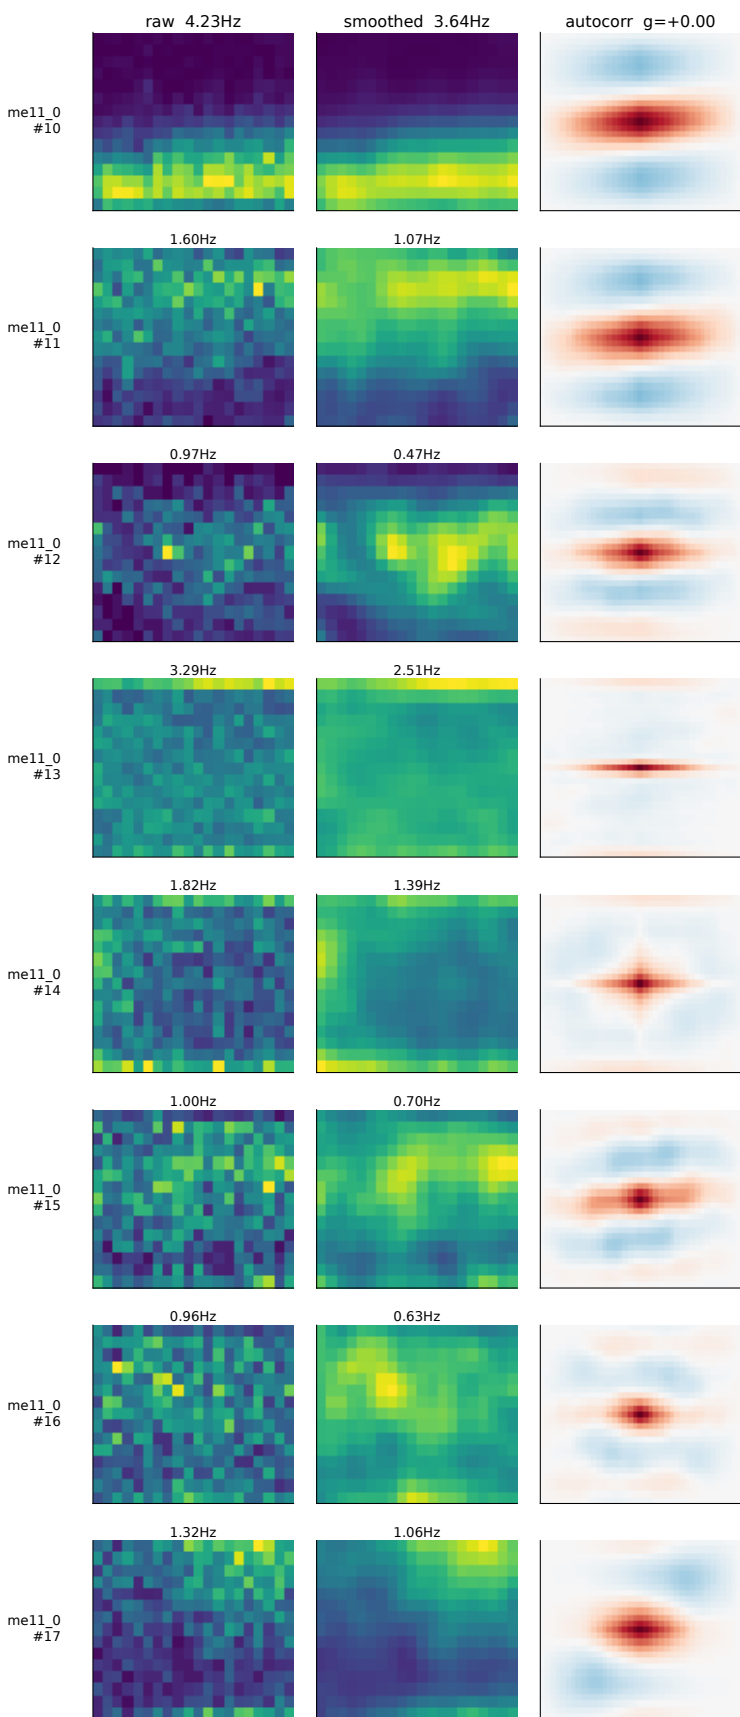


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
 wn beside smoothed because smoothing can create structure; no reliability measure or null is co

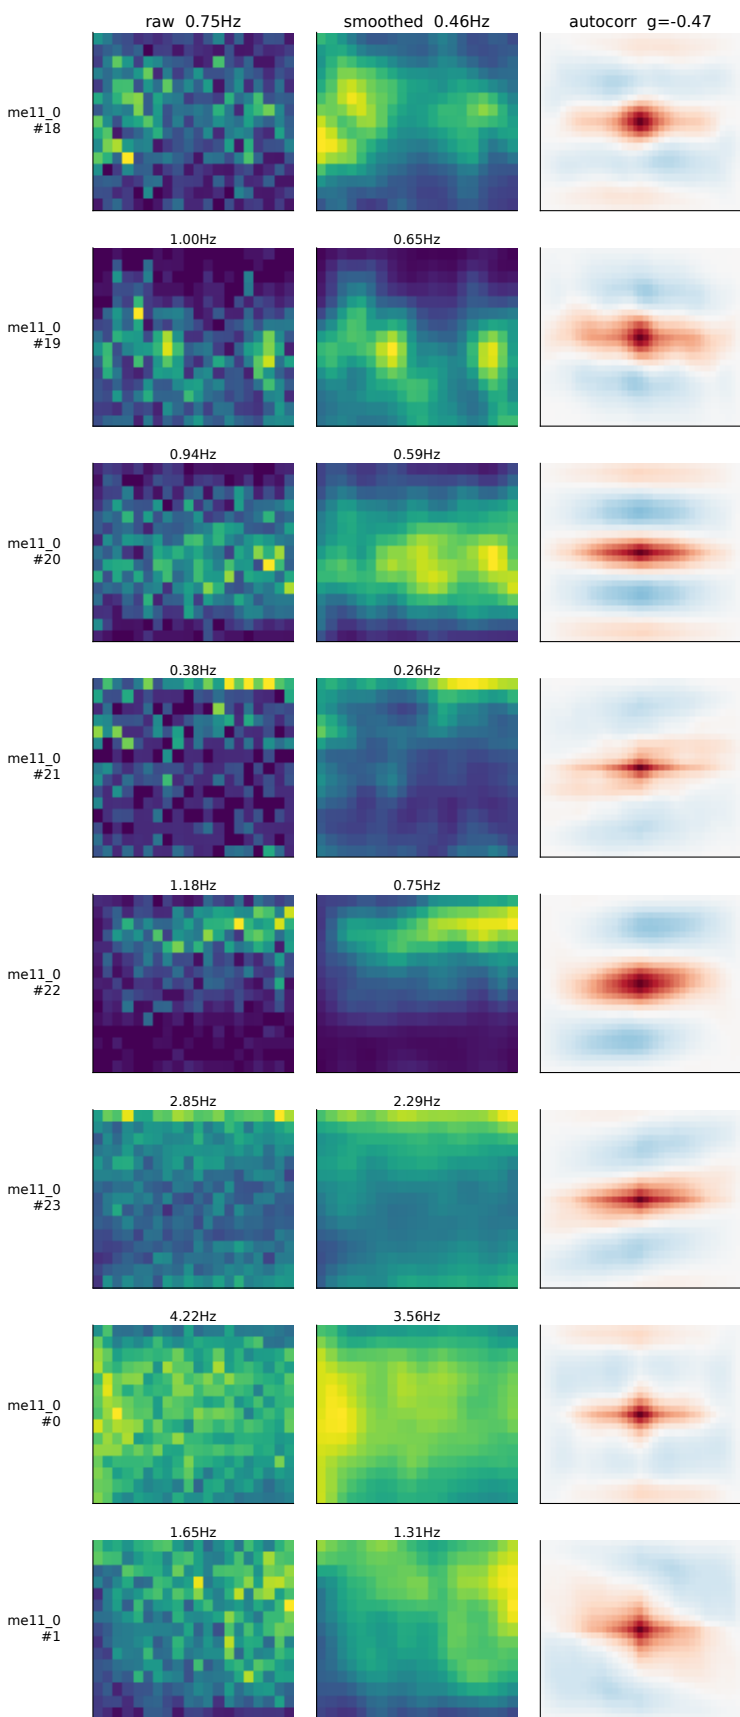


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

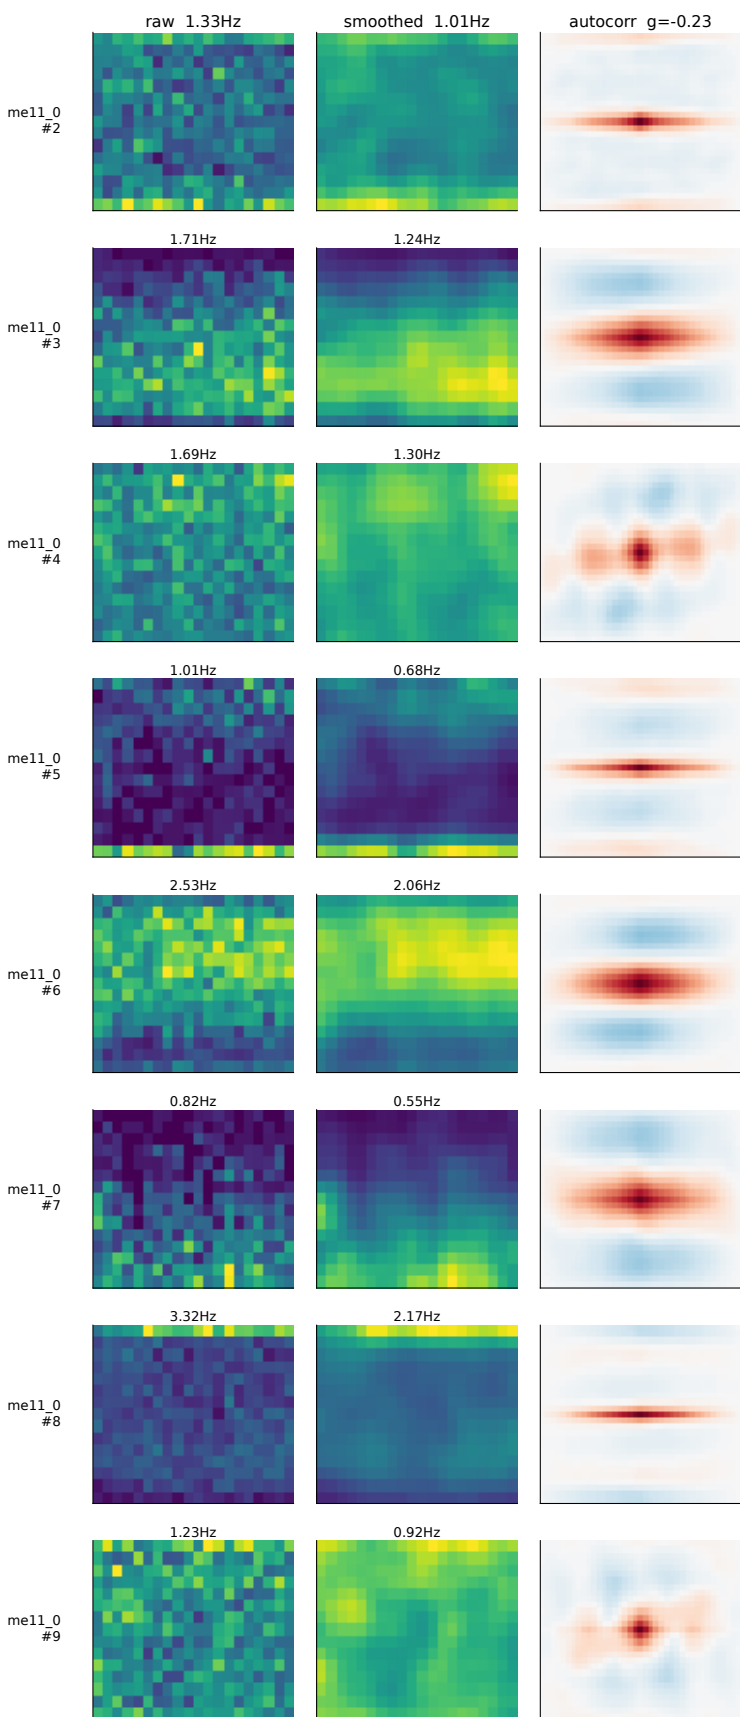


x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

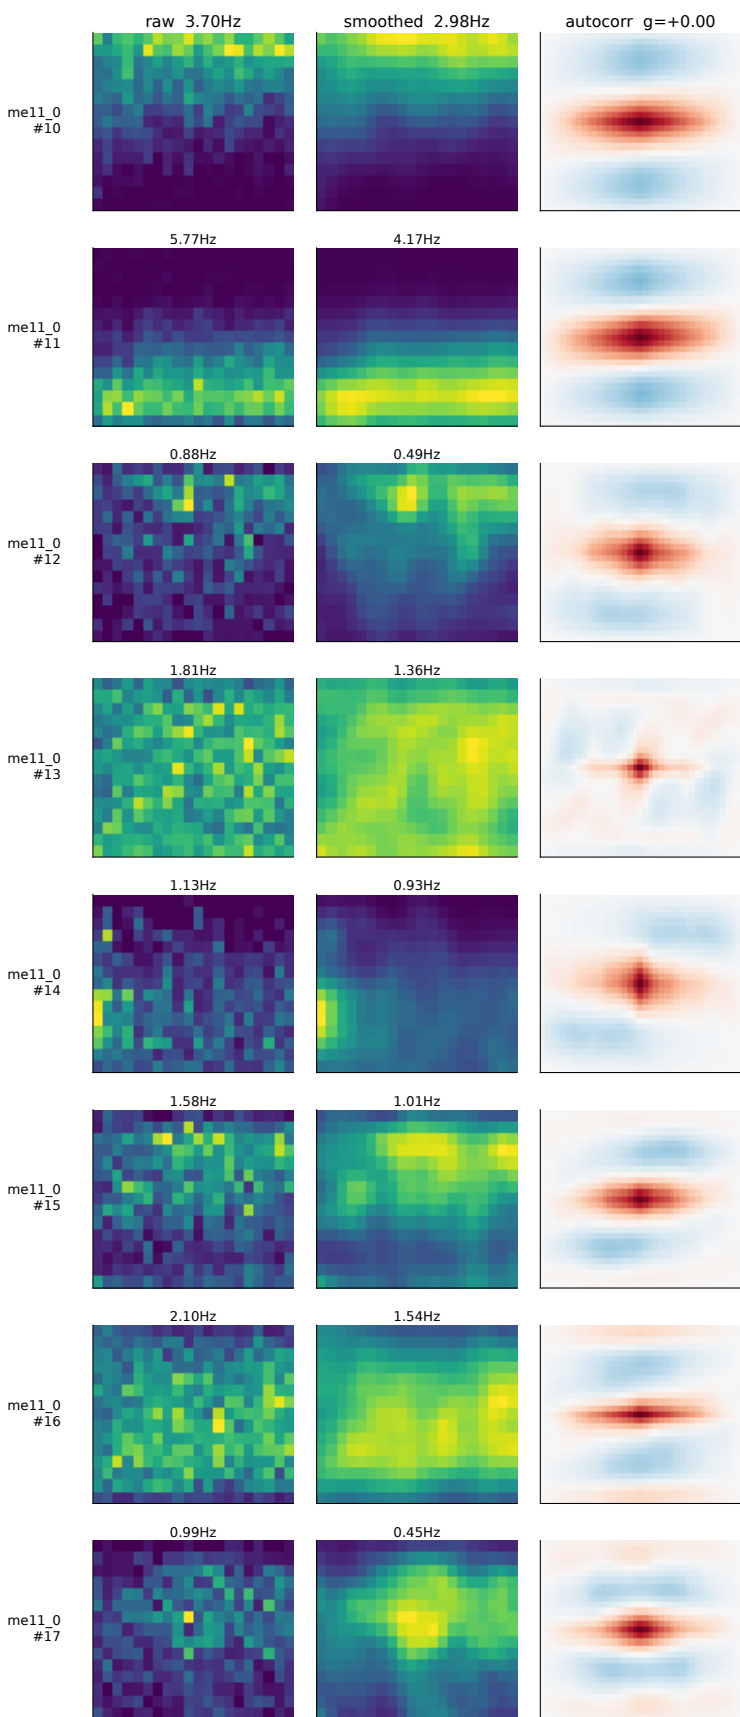

x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

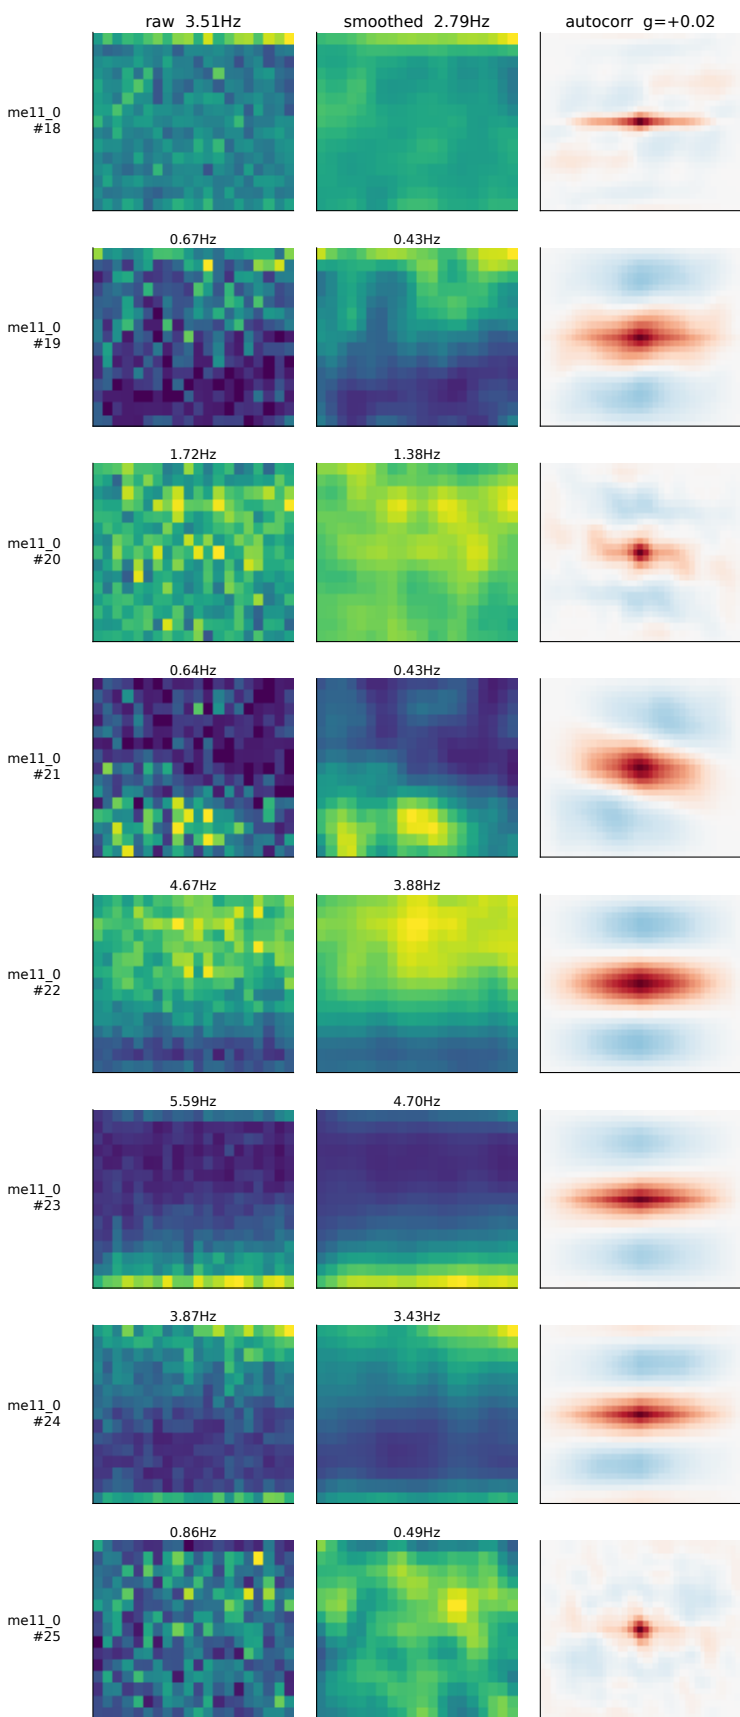

x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neuron
wn beside smoothed because smoothing can create structure; no reliability measure or null is co

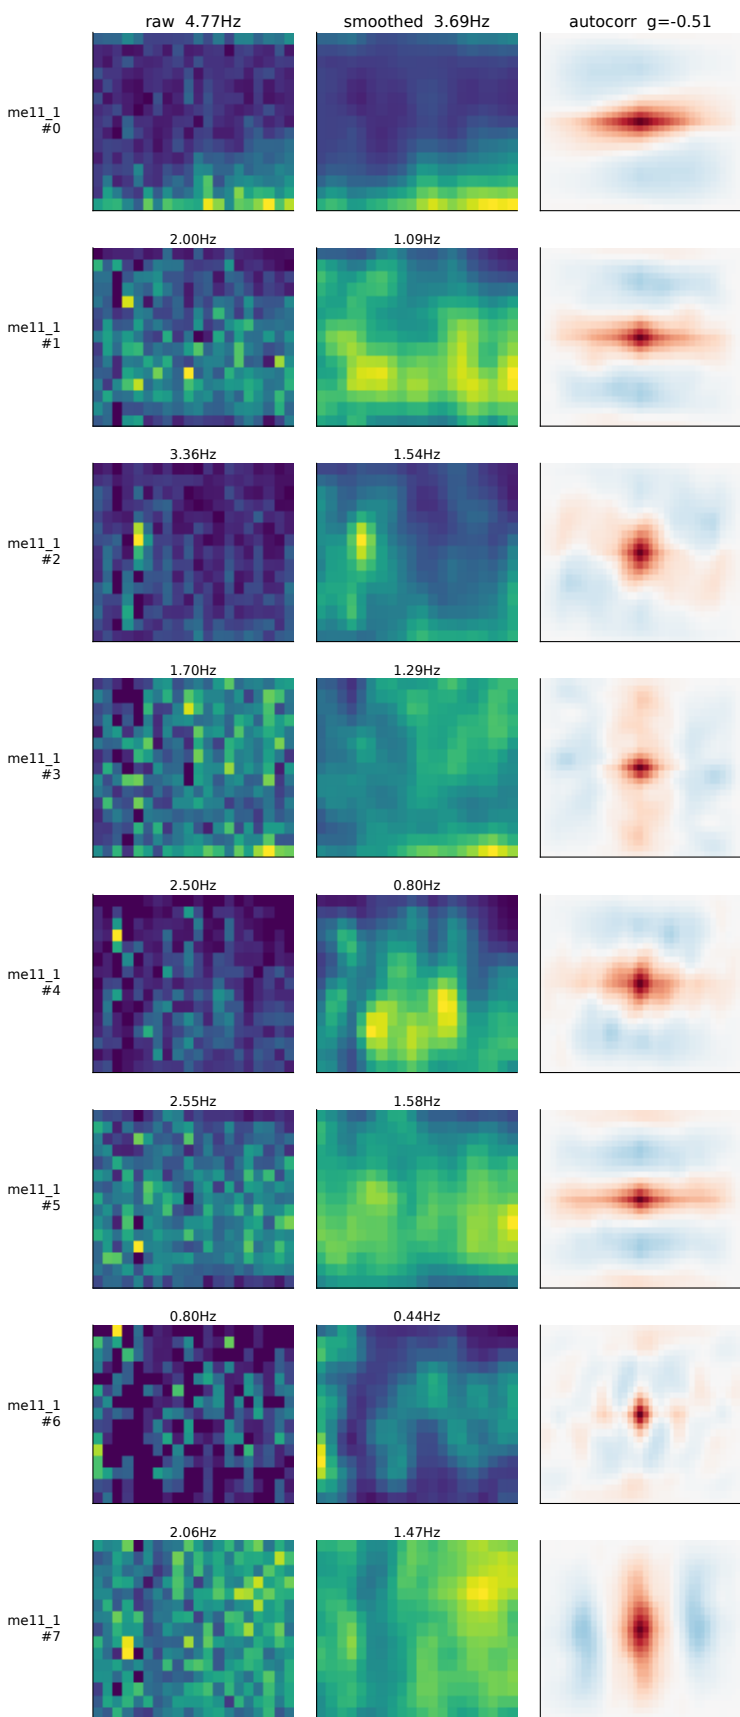

x = fraction of session, y = fraction of goal-goal transition | autocorr: lag on both axes | neurons shown beside smoothed because smoothing can create structure; no reliability measure or null is co

