

Stereotypical Beings

Exploring Hidden Classes of Entities Using
Latent Entity Modelling.

by

Adam Slack

Project report in part fulfilment
of the requirements for the degree of
Bachelor of Science with Honours

in

Computer Science

Nottingham Trent University
School of Computer Science
United Kingdom
25-04-2018

Declaration

I hereby declare that I am the sole author of this report. I authorize the Nottingham Trent University to lend this report to other institutions or individuals for the purpose of scholarly research.

I also authorize the Nottingham Trent University to reproduce this report by photocopying or by other means, in total or in part, at the request of other institutions or individuals for the purpose of scholarly research.

Adam Slack

Acknowledgements

This thesis would not have been possible without the abundance of moral support I received from family and friends. After months of hard work and numerous hours staring at a screen I am pleased to finally be able to give thanks to everyone who has helped this project come to fruition.

Thanks must first be given to Rachael, as caring and understanding as ever you have provided me with a place of refuge that allowed me to take a break from the pressures of study, the value of which cannot be understated.

To Dean, Jay, and the people of DevSoc, i thank you for the hours of interesting and stimulating conversation that kept us distracted from the mundane nature of sitting in the same room day in and day out.

And last but by no means least, i would like to thank Caroline, for the hours of guidance, assistance, and valuable insights into the world of Computer Science and academia, all of which have helped me to progress personally, professionally, and academically.

Thanks and Kindest Regards,

Adam Slack

Abstract

Latent Entities are an abstract representation of a collection of entities within a corpus, by extracting these classifications or stereotypes from a corpus, Latent Entity Modelling can allow interpretative insight into written narratives to be obtained. This thesis outlines the process of transforming a corpus into a set of Topic Models, Entity topic Models, and Latent Entities through the application of various Machine Learning and Natural Language methods. An adaptation to existing methods are also applied to overcome limitations expressed in recent literature. By exploring the results from each stage of analysis, the strengths and weaknesses of proposed methods are critically evaluated, with Latent Entities being shown as providing effective grounds for the interpretation of written literature.

Contents

Declaration	1
Acknowledgements	2
Abstract	3
List of Figures	8
List of Tables	9
1 Introduction	10
1.1 Introduction	10
1.2 Aims and Objectives	12
1.2.1 Project Scope	13
1.3 Motivation	15
2 Literature Review	16
2.1 Introduction	16
2.2 Part-Of-Speech Tagging	17
2.2.1 POS Tagging Techniques and Tools	18
2.2.2 Tag Sets	19
2.3 Named Entity Recognition	21
2.3.1 NER Techniques	21
2.3.2 NER Tools	22
2.4 Co-Occurrence Matrix	23
2.5 Topic Models	24
2.5.1 Latent Semantic Analysis	24
2.5.2 Probabilistic Latent Semantic Indexing	25
2.5.3 Latent Dirichlet Allocation	26
2.5.4 Existing Implementations	29
2.6 Evaluating Topic Models	29
2.6.1 Perplexity	30
2.6.2 Interpretability and Coherence	30
2.6.3 Comparing Models	32
2.7 Entity Topic Modeling	34
3 New Ideas	35
3.1 Introduction	35
3.2 Gaussian Entity-Term Matrix	36
3.2.1 GETM Evaluation	39

3.3	Entity Topic Model	39
3.3.1	Evaluating ETMs	40
3.4	Latent Entities	40
3.4.1	Application of K-Means	42
3.5	Evaluating Latent Entities	42
3.5.1	Intruding Entity	42
3.5.2	Evaluating Consistency	44
3.6	Analysis Pipeline	46
3.7	Topic Model Explorer	47
3.7.1	Interface	47
3.7.2	Visualisations	48
3.8	Project Management	49
3.9	Professional, Social, Ethical, and Legal Issues	50
3.9.1	Professional	50
3.9.2	Social	51
3.9.3	Ethical	51
3.9.4	Legal	52
4	Implementation	53
4.1	Introduction	53
4.2	Architecture Overview	53
4.2.1	API	54
4.2.2	Database	55
4.2.3	Server	57
4.3	Corpus Pre-Processing	58
4.4	NLP Toolkit	60
4.4.1	General NLP	60
4.4.2	POS Tagging	61
4.4.3	Gaussian Entity-Term Matrix	62
4.5	Entity-Topic Model	65
4.6	Latent Entity Clustering	66
4.7	Latent Entity Explorer	67
4.7.1	UI and Navigation Design	68
4.7.2	Book Explorer	69
4.7.3	Topic Explorer	71
4.7.4	Entity Explorer	72

5 Results and Evaluation	75
5.1 Introduction	75
5.2 POS Tagger	76
5.2.1 Results	76
5.3 Evaluation Corpora	77
5.3.1 Harry Potter Corpus Statistics	78
5.3.2 Harry Potter Summary Corpus Statistics	83
5.4 Gaussian Entity-Term Matrix	85
5.4.1 Harry Potter Corpus GETM	86
5.4.2 Comparison To Summary Corpus GETM.	88
5.4.3 GETM Interpretation	89
5.5 Entity Topic-Models	90
5.5.1 Harry Potter Corpus ETMs	91
5.5.2 Summary Corpus ETMs	95
5.6 Latent Entities	97
5.6.1 Harry Potter Corpus Latent Entities	98
5.6.2 Summary Corpus Latent Entities.	102
5.6.3 Cohesion and Interpretation	105
5.7 Explorer Evaluation	107
5.8 Summary of Results	108
6 Conclusion	110
6.1 Introduction	110
6.2 Outcomes	111
6.2.1 Modelling Outcomes	112
6.3 Limitations	113
6.3.1 Implementation Limitations	113
6.3.2 Evaluation Limitations	114
6.4 Future Work	115
Appendices	121
A Additional Latent Entities	122
B Project Planning Document	131

List of Figures

1	Plate Notation for the LDA Method [1].	27
2	Output format of lda implementation in scikit-learn. where t_i is the topic, w_j is the word, and $s_{i,j}$ is the strength of ownership between the topic and the word.	29
3	Bipartite topic conceptual similarity graph. (Middle, Right)	33
4	Document relationships formed by LSA and LDA topic modelling methods	33
5	Structure of Gaussian Entity-Term Matrix With Columns Labelled by entities and Rows Labelled by Words.	37
6	Example Set of Entities for the Intruding Entity Test.	43
7	Example Set of Entities with Set of Associated Terms.	44
8	Analysis Pipeline for the Extraction of Latent Entity Information.	47
9	Adapted PXP Process for the development of this Project and Thesis	50
10	Architecture overview of the Latent Entity Model Analysis and Exploration System.	54
11	Entity Relationship Diagram Showing the Structure of the System's Database.	56
12	Process taken to pre-process a single document in the corpus.	60
13	Full Zoomed-out View of the GETM Heat Map for the Alice's Adventures In Wonderland Novel.	65
14	Restricted View of the GETM Visualisation for the Alice's Adventures in Wonderland Novel.	65
15	Pairwise Matrix of Scatter Plots for Topic of a Collection of Entity Topic Models.	67
16	Structure of the Web Application.	68
17	UI mockup layout.	69
18	Book Selection Component for Navigating the Explorer.	70
19	Book-Topic Distribution Panel for Comparing Topical Makeup of the Corpus.	71
20	Book-Topic distributions for a Selected Book.	72
21	Entity Listings for the Selected book (Alice's Adventures In Wonderland)	73
22	Entity Topic Distributions for Entity Topic Model.	74
23	Top Terms Associated with Entity resulting from GETM.	74
24	Entity Comparison Panel for inspecting Entity Topic Distributions	74
25	Propotional Topic Distributions for the Harry Potter Novels by J. K. Rowling	79
26	Book Topic Distributions for a Large Corpus of Fiction and Non-Fiction Books	81
27	Topic Distributions for Summaries of Each Harry Potter Novel.	84
28	Portion of the Gaussian Entity Term Matrix for the full document of Harry Potter and the Philosopher's Stone (Contrasts adjusted for clarity)	86

29	Significant Entities seen in the GETM for Harry Potter and the Philosopher's Stone. (Contrasts adjusted for clarity)	87
30	Gaussian Entity-Term Matrix for the Summary document of Harry Potter and the Philosopher's Stone.	88
31	Magnification of GETM for 'Harry' and 'Quirrel' in the Summary of Harry Potter and the Philosopher's Stone	88
32	Book Topic Distributions for a Large Corpus of Fiction and Non-Fiction Books .	91
33	ETM Pairwise Scatter Matrix for Entities in the Harry Potter Novels.	92
34	ETM Pairwise Scatter Matrix Zoomed in on A Selection of Topics of the Harry Potter Novels.	93
35	Proportions of Topics Forming Entity Topic Models within the Summary Corpus	95
36	ETM Pairwise Scatter Matrix for Entities in the Harry Potter Novel Summaries.	96
37	Pairwise Scatter Matrix of Entity Topic Model Topic Distributions Coloured According to Latent Entity they are Most Closely Associated With.	99
38	Magnification of Pairwise Scatter Matrix of Entity Topic Model Topic Distributions for Topics 1,2 and 3, against topics 6, 7 and 8.	100
39	Pairwise Scatter Plot Matrix for Summary Corpus Entity Topic Models Coloured According to their Latent Entity Classification	103
40	Pairwise Topic Plots for Entity Topic Models classified into 10 Latent Entity Groups.	123
41	Pairwise Plot of Entity Topic Models when Coloured for 50 Latent Entity Group	130

List of Tables

1	The 12 Tags Forming the Universal Tag Set	20
2	The 36 Tags Forming the Penn-Treebank Tag Set	21
3	Example GETM for entities within text	38
4	Example entity-term associations between three entities	41
5	Example Entity-Topic distributions for entities in Table 4 and the associated Latent Entity.	41
6	Left & Right: Entities Within Clusters Behind Latent Entities.	46
7	Consistencies and Inconsistencies Between Clusters Forming Latent Entities	46
8	Selection of API Endpoints. Text between guillemots represent variables of the URI.	55
9	Select Methods from the DB Repository Layer.	58
10	NLP Ultity Methods	61
11	Key Methods Forming the HMM POS Tagger.	62
12	Expected Format for Entity and Term Data for calculating GETM.	63
13	Methods used in the formatting of data and calculation of GETM.	63
14	Table of POS Tagging Results	77
15	Topic Distributions for the Harry Potter Novels by J. K. Rowling	79
16	Top Ten Words in the Topic-Word Distributions of Calculated Topics for the Harry Potter Corpus	80
17	Proportional Distributions of Topic Models for the Harry Potter Novel Summaries.	83
18	Top Ten Words in the Topic-Word Distributions of Calculated Topics for the Harry Potter Summary Corpus	84
19	Average and Variance of Topic Proportions across Entity Topic Models in the Summary Corpus	95
20	Entity Topic Models most strongly represented by each Entity Topic Model.	101
21	Top 5 Entity Topic Models Forming the Latent Entities for the Harry Potter Summary Corpus.	104
22	Entity Topic Models Most Strongly Represented by Ten Latent Entities.	124
23	Tables of Top Entity Topic Models for 50 Latent Entities extracted from the Harry Potter Novels	129

Chapter 1

Introduction

1.1 Introduction

The Web forms a seemingly ever-expanding resource, with data being generated and information being published at an accelerating rate [2]. As more gain access to the internet, the rate at which new information is made available will only increase. Whether the origins of data be from social media, news outlets, or e-commerce reviews, large proportions of the resources on the web exist in a natural language format. From this data in a natural language format there exists underlying information that can be extracted and utilised in the decision making processes of everyday life. Given the amount of processing required to consume data on an international scale, it is necessary to ensure that there exists computational methods that can accommodate for an individual's or a business' needs to understand data. There exist many methods that are effective at extracting surface level information, however there is room for further understanding of hidden structures within datasets, it is by relating distinct pieces of information or subsets of data, that systems can begin to frame or contextualise a solution to a problem within a wider setting. This thesis aims to explore a novel methods capable of extracting descriptive of a set of documents by framing the corpus in terms of Latent Entities.

When considering Information Retrieval (IR), Machine Learning (ML), and Natural Language Processing (NLP) in conjunction with each other, their principal concerns are with the extraction of information from data in the form of natural language texts. Relating textual data yields information valuable to many different entities, including businesses marketing products, individuals choosing what to read, and even researchers performing analysis on collections of

journal papers. For a business, relating entities extracted from texts, can help identify target groups to aim products at. For an individual, relating entities can assist in decisions on what to read, buy, and watch based on similarities between things that they do and don't like. For researchers, the identification of common themes or prominent authors can be achieved through the relating of entities.

A Latent Entity in this investigation is defined as an abstract form of entity that can be used to describe one or more concrete entities. Thus the term Latent Entity Modelling is defined as a process of transforming a corpus of text into a collection of Latent Entities describing said corpus. Latent Entities represent a layer of abstraction from Entity Topic Modelling, wherein it is possible to describe collections of Entity Topic Models in terms of extracted Latent Entities.

Entity Topics build upon the concept of topic modelling, which in turn is built upon more simple language modelling techniques. This is particularly when regarding the types of topics that would be derived through Latent Dirichlet Allocation. A Topic in this thesis is a probability distribution of words, such that the degree of membership for each word in a topic indicates the probability of that word being an indicator of that topic. By performing clustering on extracted Entity Topic Models, this thesis investigates if it is possible to use computational methods to assist individuals in understanding, visualising, and summarising documents.

Oriented around Latent Dirichlet Allocation, Entity Topic Modelling methods have limitations that result from assumptions made often in literature, this thesis attempts to resolve the need for certain assumptions through an intermediate pre-processing step allowing larger documents to be utilised more effectively. As an abstract technique, the process of calculating topic models is difficult to visualise, it would be an oversimplification to compare LDA to other classic clustering methods, however the resulting topics would be similar in structure.

This thesis begins by surveying the field around Natural Language Processing with emphasis on elements related to the task of topic modelling. By highlighting some standard approaches, their strengths, and weaknesses, it is hoped that the rationale behind the direction of the thesis is clear.

Upon establishing a base of knowledge, new ideas are presented. Major elements include the proposal of adaptations to existing co-occurrence matrix methods, means of deriving Latent Entities through K-Means clustering, as well as metrics for evaluating each of these proposed methods.

Given a set of proposals, the investigation begins by exploring an implementation of a system through which Latent Entity Modelling methods can be explored and evaluated. Such system requires careful consideration of architecture as well effective means of presenting models and data to users.

After discussing the implemented system, a critical evaluation of the modelling methods and general analysis pipeline is presented. Using a mixture of new metrics and traditional ones found in literature.

1.2 Aims and Objectives

The broad goal of this thesis is to investigate the possibility of using and extending topic modelling methods for the purpose of extracting latent entity classifications from natural language documents.

In order to progress towards meeting the overarching goal for the project, there are a series of aims and objectives that provide a general structure and direction for the investigation.

Aim 1: The first aim for this project is to define a process or analysis pipeline through which Latent Entity information can be extracted written narratives and subsequently explored. Objectives for this aim include:

- To survey the fields of Natural Language Processing and Topic Modelling to identify methods valuable for the task of Latent Entity Modelling.
- To define additional topic modelling methods where existing approaches are insufficient.
- To Adapt and extend existing topic modelling methods to overcome limitations that are relevant to the extraction of Latent Entity Information.

By considering the current state of topic modelling as an academic field, it is possible to understand the what is possible and what the limitations are amongst existing methods. A

better understanding of existing approaches means that it is possible to understand how it might be possible or required to use specific methods in order to extract Latent Entity information.

Whilst there are a wide range of topic modelling methods, many have limitations or have assumptions that result in them being insufficient for the task of modelling latent entities in narratives. Entity Topic Modelling Approaches for example produce topical descriptions of entities, but don't consider how these models could be used to identify hidden classes of entities within narratives.

Aim 2: The second aim is to explore latent structures within a corpus of narratives using a derived Latent Entity extraction process.

The exact objectives for this aim are dependent on the defined process for extracting Latent Entity Information. When considering the process of extracting Latent Entities as a series of transformations that are applied to a corpus, the objectives for this aim is to evaluate and interpret the results of each transformation as it is applied.

Aim 3: To implement a minimal viable product that is capable of allowing individuals to explore the results from the defined Latent Entity extraction pipeline.

The development of a system of software resources has the following objects: Objectives for this aim include:

- To design and implement an analysis pipeline that consumes a corpus of text documents and stores results in a persistent manner.
- To design and implement a system architecture to support server side analysis and client side interactions.
- To design and implement a web application that provides a small set of interactive elements allowing topic modelling and Latent Entity modelling results to be explored.

1.2.1 Project Scope

There is legitimate risk of undertaking a project with unreasonable scoping. The aims and objectives for this project apply some upper limit to the scope of the thesis, however there is still room for more discussion on exactly what is and isn't within reason.

Whilst the project aims to consider a range of methods and possible adaptations to them, it

is unreasonable to expect any individual to numerically and critically evaluate every proposed method related to Natural Language Processing. It is however within scope to consult recent academic literature surveys that attempt to summarise the current state of the field. By considering field surveys, it is possible then to gain broad insight into what analysis devices are relevant to the aims of this study and more focused probing can be undertaken.

The development of new methods of analysis often require the development of new methods of evaluating proposed methods. There is then a discussion to be held on the validity of those evaluation metrics, potentially leading development into a lengthy iterative process of producing evaluation metrics to evaluate other evaluation metrics. It is not feasible to ensure that the metrics used to evaluate abstract methods of analysis methods are entirely free of flaws and shortcomings, especially when methods are applied to data that are open to subjective interpretations. Assumptions for the sake of progress would need to be made, however, when assumptions are made, evaluating the effect of those assumptions being incorrect would not be out of scope and remains a valuable exercise to undertake.

The focus of the project is on the implementation of Topic Modelling methods, with the Latent Entity Modelling approach being part of that aspect. The aim of developing a system capable of automatically processing that corpus is almost naturally going to come to fruition as a side effect of formalised design and implementation of an analysis code base. The interface through which results and models can be explored however requires additional development occurring entirely aside from a Topic Modelling and NLP toolkit, and thus requires a defined scoping. With regards to visualisations, it is not feasible to produce a complete set of visualisations encompassing all elements of data processed and extracted. Publications are written frequently with a focus on visualising a tiny aspect of natural language data. A more appropriate expectation is to develop a minimum viable set of visualisations capable of demonstrating one or two key points.

With regards to infrastructure, consideration of viable long term hardware solutions to process entire corpora of texts is out of scope. On personal desktops the analysis of a corpus can take days, and producing a system that could accommodate for multiple users analysing multiple

corpora is definitely out of scope.

Methods of evaluating the interpretability of topic models and related techniques often rely on using surveys of sample groups. To overcome the limitations of using human raters and samples, large groups of individuals are required. It is out of scope for this project to use large samples, there are no resources available through which a large and diverse sample could be surveyed without undue effort. As a result of this, effectively utilising methods proposed in this project that rely on human interaction is out of scope as they cannot be applied in a statistically valid context.

1.3 Motivation

Within social media it has become a seemingly standard practice to profile and analyse individuals on the platform, analytics companies are profiling and classifying individuals for commercial benefit, all whilst the typical user remains completely oblivious. Users are both unaware of the mass social engineering practices that they are subjected to, as well as where they themselves sit within the models developed from their personal information [3]. The data abusing practices of companies and organisations is receiving attention in mainstream media [4], and as the world becomes more data oriented, it is increasingly important that there are ways in which individuals can remain 'data literate'. That is to say, it is crucial to ensure that platforms exist allowing individuals to be aware of the data that surrounds them in everyday life and understand certain aspects of it.

The prevalence of personal data analytics in everyday life is strong motivator to try and produce tools that could help individuals in anyway, many of the methods considered in this paper have applications outside the scope of written narratives, and are used frequently to summarise, relate, and classify a variety of datasets. It is hoped that the proposed Latent Entity Models in this thesis, and the tools for exploring the these models can both allow and encourage individuals to take an interest in the meta-data of their lives.

Chapter 2

Literature Review

2.1 Introduction

Natural Language Processing (NLP) is a vast field of study within Computer Science and Computational Intelligence, the focus of which is the development of intelligent systems capable of handling data in the form of natural language. The task of extracting Latent Entity Models is one that will touch upon many areas of NLP, including Part-of-Speech (POS) tagging, Named Entity Recognition (NER), and Latent Topic Modelling. Given that the focus of this paper is the extraction of a particular descriptive feature, the applications of similar methods of analysis will be considered. Considering the applications of similar features can give potential insight into the value of this thesis.

It is possible to divide NLP into two large schools of thought; One involves the processing of natural language to ensure that machine usable resources are available, the other is concerned with the application of information resulting from processed natural language. Even though the applications of similar modelling methods will be considered, the focus of this chapter will be on methods for producing a machine usable resource. Additionally, whilst many NLP tasks require methods for parsing, understanding, or synthesising spoken words, this paper is only considering written texts. As such, the spoken language aspects of NLP will be overlooked.

Parsing written texts begins with tokenization. This is the division of a single string of characters in to strings representing sentences or words. Often text is tokenized into sentences, and each sentence is then tokenized into words. Once a document is expressed with a basic sentence and word structure it is possible to apply additional processing steps. POS tagging

is the application of tags to sequences of words, each tag and resulting sequence of tags represents the grammatical structure of a sequence of words. NER is the extraction of entities from natural language, where entities are tagged depending on their type. NER is performed after tokenization, however it doesn't necessarily rely on text being POS tagged first.

There are varying degrees of subtleties that need to be considered when a process relies on Tokenization, POS Tagging, and NER Tagging methods, failure to consider some of the challenges associated with each method could result in unexpected results in resulting steps. Tokenization is the most straightforward of the three mention processing steps, so only minimal consideration is given to potential tools. POS and NER Tagging are explored in more depth.

A variety of NLP tasks involve the application of natural language parsing, from Customer relation Chatbots, to Document Summarisation and Relation. Whilst many applications involve the use of parsed text features, many also orient themselves around additional features, For example, tools for relating and summarising distinct documents may utilise topic models and topic modelling techniques.

2.2 Part-Of-Speech Tagging

POS Tagging is a useful task for many NLP problems, it forms a solid platform from which many investigations can be launched. The importance of POS tagging means that the quality of a POS tagger can make or break a study. The role POS tagging plays in this study is to produce a corpus of words that can be filtered by type. When building a model of words associated with entities and deriving topics that describe entities, there are categories of words that provide much information about entities within a corpus, often words such as 'The', 'To' and 'where' are removed by filtering terms classed as 'stop words', however more flexibility and a greater coverage can be reached by filtering terms tagged as determiners, prepositions, or pronouns.

Whilst removing certain classes of words may see an improvement in the quality of any derived models, it adds additional complexity to the prepossessing aspect of the thesis. Not only do potential methods, and tools need to be considered, but potential tag sets need to be evaluated.

There is a range of POS tagging methods to choose from, many the highest performing taggers employ Maximum Entropy (MaxEnt) models or Hidden Markov Models (HMM). However Rule and transformation based taggers often suffice [5–8]. There even exists hybrid models that use probabilistic or stochastic methods in conjunction with rule sets. UCREL CLAWS tagger is an example hybrid model. [9]

As long as the POS tagging tool utilised performs comparably to those in literature, labouring over the type of POS tagger that is used will not overly affect the results of this study. It might be more useful to consider the subjective and situational merits of any POS tagging libraries that already exist.

2.2.1 POS Tagging Techniques and Tools

The Natural Language Toolkit (NLTK) by default utilises a Maximum Entropy POS Tagger using the Penn-Treebank tagset. The main benefit to this POS tagger is its ease of use and accessibility. The performance of the MaxEnt tagger used in NLTK was reported score an accuracy of 96.64% on all words, and 85.56% on unknown words. [10] However, in similar implementations that utilised MaxEnt, certain tags had error rates of 100%, this was likely a result of the absence of certain features necessary to correctly tag specific parts of speech like 'TO' which occurred 14,748 times in a study and was never correctly classified [11]. The failure of certain methods in literature to correctly classify closed sets of POS is of great importance to this study, if POS tagging is to be applied to filter terms that are not going to provide insight into the entities in a text, the identification of POS like 'TO' is essential. By comparison, the CLAWS tagger achieved a reported 96% accuracy, though accuracy fell to 82% when text was not preprocessed to filter spelling variants and shakespearean english words.

The challenges with POS tagging is the variance of sentence structure, as well as ambiguity that can occur within the english language. Fictional narratives like that of Shakespeare frequently contribute to the open classes of words (Adjectives, Nouns, etc), meaning that there is an increased likelihood of unknown or words with variations in spelling. Whilst modern texts are often not as creative with the english language as Shakespeare, it would be naive to assume

the CLAWS tagger would achieve the reported upper bounds for its accuracy. Estimating the performance of the CLAWS tagger on the corpora being used in this investigation makes the performance of both the CLAWS tagger and NLTK’s MaxEnt tagger roughly comparable.

In much of the literature, POS tagging techniques were evaluated using corpora oriented around a specific subject or domain, like news, or personal tweets. Using corpora limited to specific domains means that any given POS tagging method might only perform as reported in literature if the same or similar corpus is used. This project will benefit from a POS tagger that performs well on general purpose text, meaning that considering many of the taggers used in literature as the potential tool of choice opens a potential point of failure. As POS tagging is one of the first steps performed when processing a corpus, errors could be introduced into the system early on should the POS taggers used in literature proved to be inadequate on the chosen corpus for this project. Additionally, the effect of literature tending to focus on domain limited corpora means that studies on the quality of general purpose or cross-domain POS taggers are somewhat unreported.

2.2.2 Tag Sets

When using POS Tagging as a means of filtering certain classes of words, the choice of tag set is arguably the most important decision that needs to be made. By choosing a small tagset, you risk filtering out terms that might actually be important. Alternatively, an excessively expressive tag set will make POS tagging a more difficult task, depending on the approach used to tag a sequence of words. For a HMM POS Tagger, training heavily relies on the frequency at which tags and terms occur, using more tags will require a larger training corpus in order for the model to accurately represent written texts.

One of the more restricted tag sets is the Universal tag set, proposed as a potential set of classifications applicable to all languages. [12] As seen in Table 1, the Universal tag set consists of the most fundamental parts of speech, using one classification where many tag sets would use 5 or 6. The approach taken when developing the tag set was to be pragmatic, and choose tags that cover the most cases, in the most languages. Whether there is a grammar that is

truly universal to humans has been a topic of discussion for over half a century [13].

Tag	Type
VERB	verbs (all tenses and modes)
NOUN	nouns (common and proper)
PRON	pronouns
ADJ	adjectives
ADV	adverbs
ADP	adpositions (prepositions and postpositions)
CONJ	conjunctions
DET	determiners
NUM	cardinal numbers
PRT	particles or other function words
X	other: foreign words, typos, abbreviations
.	punctuation

Table 1: The 12 Tags Forming the Universal Tag Set.

Larger tag sets include that of the Penn-Treebank, and Brown Corpus tag sets, with 36 and 82 tags respectively. Even larger still is are those building upon the Brown Corpus, the London-Lund Corpus of Spoken English uses 197 distinct tags. The larger tag sets are formed with the belief that each distinct tag captures a specific mechanism that can be employed within language. [14]

The Penn-Treebank tag is by no means a large tag set and by reducing the scope of the tag set, it provides fewer opportunities for inconsistencies to arise. a discussion was held around the validity of the brown corpus given that syntactic context is overlooked, with words tagged independently of their syntactic function. [15] When evaluating which tag set to choose, the corpus being used during the training and application of models is an important factor to consider. Often tag sets are developed to effectively tag a single corpus, the brown corpus is a prime example of this. Caution should be taken when selecting a tag set designed for a specific corpus as it may not be as effective when applied to other corpora.

Tag	Description	Tag	Description
CC	Coordinating conjunction	RB	Adverb
CD	Cardinal number	RBR	Adverb, comparative
DT	Determiner	RBS	Adverb, superlative
EX	Existential there	RP	Particle
FW	Foreign word	SYM	Symbol
JJ	Adjective	TO	to
JJR	Adjective, comparative	UH	Interjection
JJS	Adjective, superlative	VB	Verb, base form
LS	List item marker	VBD	Verb, past tense
MD	Modal	VBG	Verb, gerund or present participle
NN	Noun, singular or mass	VBN	Verb, past participle
NNS	Noun, plural	VBP	Verb, non-3rd person singular present
NNP	Proper noun, singular	VBZ	Verb, 3rd person singular present
NNPS	Proper noun, plural	WDT	Wh-determiner
PDT	Predeterminer	WP	Wh-pronoun
POS	Possessive ending	WP\$	Possessive wh-pronoun
PRP	Personal pronoun	WRB	Wh-adverb
PRP\$	Possessive pronoun		
IN	Preposition or subordinating conjunction		

Table 2: The 36 Tags Forming the Penn-Treebank Tag Set

2.3 Named Entity Recognition

The task of extracting a list of entities from text is a similar task to that of POS tagging. It involves parsing natural language and applying entity labels to entity words. A recent survey of the field summarised that Named Entity Recognition (NER) - the task of identifying entities and labelling them as ‘Person’, ‘Organisation’, or ‘Location’ - as being essential to many tasks of computational linguistics [16]. The ambiguity of natural language impacts NER in the same way as POS tagging, meaning that problems investigated in NER don’t necessarily have a simple solution. A key ambiguity relating to entities is that it is not always clear which entity some text may be referring to, especially in situations where an entity is referred to indirectly, or when entities are named in unusual ways [17]. NER techniques are considered for this study as a means of extracting a set of entities from which topic models can be derived and explored.

2.3.1 NER Techniques

NER can be carried out using a range of different statistical methods. HMMs can be used to classify entities as either a name (person, organisation, or location), time, or numerical quantity.

HMM-based Chunk Taggers have a reported accuracy ranging from 87% to 94% depending on the size of the training set [18].

Similarly to POS Tagging, statistical methods based on Maximum Entropy can be applied with comparable levels of accuracy to other methods [19, 20]. Hybrid approach to NER have been investigated, by utilising HMM, MaxEnt and transformation-based learning, error rates were reduced by as much as 15% when used with the english language [21]. Conditional Random Fields (CRFs) are another form of statistical model that is particularly useful for applying labels to sequence data, when applied to POS tagging or NER, CRF systems can attain error rates as low as 5.55% and 15.96% respectively [22, 23].

It is worth noting that the drawbacks that applied to publications regarding POS tagging, also apply to studies on NER. Notably, NER methods typically only concern themselves with labelling words in text, and provide no means of extracting additional information about an identified named entity. Drawbacks common to many of the techniques revolve around the resolution of which entities are actually the same. Entities within books can be referred to directly, or indirectly, and even be addressed with different names. Statistical models also lead way to strange inconsistencies particularly in cases where elements of text are labelled as a type of entity that is clearly wrong to a human. In texts not strictly following the grammatical rules of the language, or creative texts exploring the language, statistical NER techniques or rule based techniques alone may prove inadequate, combinations of the two may be the only approaches that perform well.

2.3.2 NER Tools

Many free NER tools are freely available on the web, including Stanford NER, Illinois NER, OpenCalais NER, and Alias-i LingPipe. In a comparison between the relative performances of these tools to classify entity types (Person, Location, Organisation) the Stanford NER performed strongly overall, achieving the highest recall rates and the second highest precision. [24]. In separate comparison of NER tagging tools, more mixed results were received for the stanford NER tool, however, it performed comparably generalised to NER tools found in the NLTK

and apache OpenNLP toolkits. On specialised datasets, purpose specific NER taggers tuned to the task at hand predictably outperformed un-tuned implementations of the Stanford NER.

The Stanford NER tagger has been shown to be a robust and effective tool, frequently outperforming other freely available tools. The Stanford NER Tagger is an NER tool that utilises conditional random fields (CRF) to identify and classify entities, a Java implementation, the tool exists as part of a larger CoreNLP toolkit created at Stanford University [25]. The self-reported performance of the tool ranges from 92.15% to 85.6% and 92.39% to 85.53% for precision and recall respectively. The upper bounds for possible precision and recall relied on additional processing for handling specific features of text. [26]. Additionally, these results are from tests occurring in 2006. Recent advances in CRFs have been utilised in subsequent versions of the Stanford NER, the effects on the performance of the NER are not visibly published.

2.4 Co-Occurrence Matrix

A co-occurrence matrix is N by N matrix for N words in a corpus, each element of the matrix indicates the number of times two terms have occurred in the same space (often done at a sentence level). A co-occurrence matrix provides a means of quantifying relationships between datapoints and whilst have a range of applications in image processing, they are most useful for this thesis in an NLP context. Many NLP methods utilise and benefit from data represented in a co-occurrence format, including probabilistic latent semantic analysis. [27]

A classical co-occurrence matrix is fundamentally reductionist, they operate over a fixed windows and simply count the number of times a term exists with another term in that window [28, 29]. Fuzzy approaches have attempted to capture the degrees of associativity between two terms in the co-occurrence matrix, and whilst achieving promising results, the domain in which investigations were carried out are largely unrelated to NLP, meaning that there remains space for variations of the model to be investigated [30, 31].

2.5 Topic Models

Topic models are a way of representing a corpus of text in terms of latent or abstract topics.

A topic is defined as the degrees of membership each term in a collection has to a topic. In methods like Latent Dirichlet Allocation, a corpus is expressed as a probability distribution of topics, which in turn are expressed as a probability distribution of words. Describing a specific element of a corpus in terms of topic models requires matching terms in the text to terms in the various topics after the derivation of a set of models. It is possible to conceptually regard Topic Modelling as a clustering method, where terms are grouped into clusters or topics by considering the statistical likelihoods of specific topics generating the terms present in a document.

Deriving topics from a corpus is commonly done through statistical techniques such as Latent Dirichlet Allocation (LDA), Hierarchical LDA, Latent Semantic Indexing (LSI), or Probabilistic LSI (pLSI). Many existing methods are in fact built upon the ideas used in LSA, for example, the valuable LDA method arose out of the shortcomings of the comparatively simple LSI [32]. Many of the challenges around Topic modelling now relate to the human interpretation of developed models. Ensuring that topics are cohesive and can be interpreted is a current topic of research, one approach involves restricting data going into the model so that variability within topics can be reduced. Additionally, ensuring models are interpretable is made more difficult by the fact they are not inherently intended for human use, as machine interpretable models, the reasoning behind why topics are structured in such a way is not necessarily clear as a result of their abstract nature.

2.5.1 Latent Semantic Analysis

Sometimes referred to as Latent Semantic Indexing (LSI), Latent Semantic Analysis (LSA) is a technique that provides vector representations of documents in a corpus. These vector representations allow for quantitative comparisons of different documents. The implementation of the technique is oriented around Single Value Decomposition (SVD). LSA attempts to model terms in a document as being averages of the document extracts in which it occurs [33].

Additionally, for NLP tasks It is possible to view LSA as an extension of the term frequency-inverse document frequency (tf-idf) method, this is due to the method producing a reduced set of the same reduction carried out by tf-idf such that term occurrences with the most variation between documents are retained [34].

The obvious shortcoming of LSA is focused purely on documents at a word level, it bears no notion of topics, themes, or higher level concepts through which documents can be related. The assumption made for the results of LSA is that terms occurring in a document are topically related, and that documents containing the same terms must also topically similar.

LSA is wholly insufficient for the analysis of entities within the documents. There is potential for the method to be used as an intermediate step, or perhaps expanded to take into consideration entities within a document and their entity-term associations. A feature of LSA rendering it as suitable option to investigate is the methods ability to perform well with highly dimensional data, and comparably better than standard vector space models like tf-idf. [35] Given its limited nature, LSA would likely be useful as nothing more Principal Component Analysis style reduction.

2.5.2 Probabilistic Latent Semantic Indexing

Probabilistic LSA (pLSA) is derived as an effort to mathematically formalise the ideas patented by Deerwester et. al. and the proposed LSA method. The formal statistical nature of the method means that the method can be used in conjunction with other models in a more predictable manner. The probabilistic approach changes the meaning of output produced by pLSA, resulting in models which numerically relate terms to some latent variable.

When used in tasks of prediction, pLSA models outperformed models produced by LSA, when comparing the reduced perplexities of either approaches. There is a greater difference in performance on more general purpose information retrieval tasks, than on restricted corpora. [27]. This is likely due to the effect that sparsity has on the ability of each method. Whilst still worse than pLSA, the performance of LSA improved as the sparsity of training data reduced whereas pLSA's performance decreased.

This decreased performance of pLSA as sparsity of data decreases suggest that the mixture models used in pLSA perhaps over-fit as the sparsity of data decreases. As this study is focused on written narratives, any corpora used will be diverse and intrinsically sparse. And as narratives are sparse, the over-fitting problem potentially present in pLSA might not be an issue. However, whilst it does begin to numerically relate variables, there is still no explicit relation between documents expressed within the models meaning that adding additional documents to the corpus would mean the algorithm needs to be re-run. Additionally, there remains no direct means of relating entities or expressing entities in terms of elements within a corpus.

2.5.3 Latent Dirichlet Allocation

Latent Dirichlet Allocation (LDA) uses mixture models to generate a collection of topics which can be used to describe individual documents within a corpus. Each document is viewed not as a collection of words, but as different proportions of topics, with each topic able generate different terms that would produce a document. By representing individual topics as probability distributions of words found within the corpus, additional documents can be expressed as distributions of the topics already derived. This approach overcomes some of the drawbacks of the pLSA method, whilst providing a somewhat human-interpretable representation of the corpus. [32]

A Plate Notation representation of the LDA method can be seen in Figure 1. The variables α and β outside of the plates, represent the document-topic, and word-topic Dirichlet priors respectively. The outer plate represents the document selection across M documents, whilst the inner plate represents the word-topic and word selection across a vocabulary of N words. In the outer plate, θ_m represents the topic distribution for document m . ϕ_k represents the word distribution for topic k , whilst $z_{m,n}$ is the topic for word $w_{m,n}$.

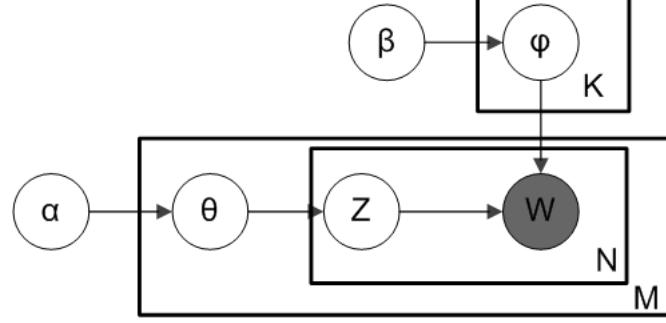


Figure 1: Plate Notation for the LDA Method [1].

In a non-plate notation form, the simplified process for generating an LDA model across M documents is as follows:

1. Choose $N \sim \text{Poisson}(\xi)$
2. Choose $\theta_m \sim \text{Dirichlet}(\alpha)$
3. For each of the N_m words $w_{m,n}$:

 - a) Choose a topic $z_{m,n} \sim \text{Multinomial}(\theta_m)$
 - b) Choose a word $w_{m,n} \sim \text{Multinomial}(\phi_{z_{m,n}})$

Where \underline{W} representing the set of N words across M documents, \underline{Z} is the set of topic assignments for a word in a document, $\underline{\theta}$ is the set topic distributions of each document, and $\underline{\phi}$ is the set of word distributions for each topic.

The total probability of an LDA model is defined as:

$$P(\underline{W}, \underline{Z}, \underline{\theta}, \underline{\phi} | \alpha, \beta) = \prod_{i=1}^K P(\phi_i | \beta) \prod_{j=1}^M P(\theta_j | \alpha) \prod_{t=1}^N P(Z_{j,t} | \theta_j) P(W_{j,t} | \phi_{z_{j,t}})$$

In LDA, the lengths of documents are assumed to be Poisson distributed, and that the set of probabilities generated for each word w_n is a random multinomial dirichlet distribution. There is little reasoning for these assumptions. The use of Poisson distributions in literature seems to be a standard distribution for estimating document lengths. However, given that the lengths of documents are known parameters, the first step in the process is redundant leaving only steps 2 and 3 of the original process.

The versatility of LDA is one of its strongest characteristics. LDA has seen use in a range of different settings, from filtering web spam, to the semantic annotation of satellite images. As a Bayesian statistical process, it is possible to utilise other methods with relative ease given its modular nature.

In web spam filtering, LDA has been combined with tf-idf and expanded to take into consideration links that exist between documents. For spam classification, the use of LDA as a bayesian network performed worse than baseline machine learning methods, however improvements were seen when the method was expanded and combined with other statistical techniques. [36]

For automatic image annotation, additional machine learning and computer vision methods can be applied to images in order transform images into collections of image features. Topics derived from a corpus of these images can be used to annotate new images introduced. Attempts at using LDA in image annotation have seen some success, whilst not all annotations from topics were correct, they were often at least conceptually related. [37, 38]

LDA doesn't relate words semantically. The meanings of words in a topic are not necessarily related in any way, which is demonstrated in studies using LDA to annotate images. This means that derived topics might not provide any meaningful grouping of words. The intuition is that words in books and documents about a specific subject will somewhat relate to other words in the document. LDA might not produce thematically related topics if the documents used to derive topic distributions are varied in content. For this investigation, the potential for thematically unrelated topics is potentially a major drawback. Entities within narratives might be present throughout a whole series of books. Meaning that they may be associated with a wide range of topics. It is unclear at this stage what effect this may have on the quality of derived topics. It might be necessary to regard the same entity across two books to actually be distinct.

As a bag of words method, each unigram is treated as being unrelated to other words. Which is not true in the case of written narratives. Much of the meaning of words and relations between words are lost when used using a 'bag of word' model, the drawback for this study is that relations between terms and entities are required. If topics were directly derived from the documents which entities were extracted from, then there would be no meaningful way of identifying how these topics apply to entities.

2.5.4 Existing Implementations

LDA is a specialised method of analysis, with only a limited number existing implementations ready and available. The popular python scientific computing library scikit-learn contains an implementation based on open source development coming from Princeton. [39, 40]. Genism is an alternative python library that focuses only on topic modelling methods, it is quite comprehensive in the supporting tools it provides. [41]

The scikit-learn implementation of LDA outputs a set of topics each consisting of a set of word-strength pairs. Figure 2 shows the general structure of output from the method, which is the set of word distributions for the set of topics ϕ . Genism provides a more elaborate interface through which the contents of the topics and other information can be retrieved. A key benefit

$$\underline{lda} = \{t_1 = \{(w_1 : s_{1,1}), \dots, (w_j : s_{1,j})\}, \dots, t_i = \{(w_1 : s_{i,1}), \dots, (w_j : s_{i,j})\}\}$$

Figure 2: Output format of lda implementation in scikit-learn. where t_i is the topic, w_j is the word, and $s_{i,j}$ is the strength of ownership between the topic and the word.

to be had from utilising Genism, is the number of options that are available with the library. As well as a base LDA model, there are varying implementations that parallelise the process or utilise proposed hierarchical approaches. Scikit-learn offers a simple method that provides minimal thrills, however, the simple implementation opens it up for extensions and adaptations in ways that Genism does not.

2.6 Evaluating Topic Models

Topic models are machine representations of word groups that have been deemed to be in some way related. The challenge for evaluating topic models is that it depends on the task which they are being applied to. Directly evaluating the accuracy of topic models is tough, as an unsupervised bayesian method, the probabilities are not interpretable, they are what they are and no ground truth exist. Where produced models can be effectively evaluated is on their efficacy at some secondary task, this could be to predict or estimate topics that might be present in documents not present in the sample used to train models.

2.6.1 Perplexity

Perplexity is a commonly used metric across topic modelling literature, and is an estimate of how well a probability distribution or probabilistic model predicts a sample. In the literature for pLSA and LDA, perplexity is one of the main metrics used to evaluate the quality of the methods. [27, 32]

Perplexity can be calculated by subsampling a corpus into training and testing sets. By using the test set as unlabeled data the perplexity of a model is measured as its ability to estimate the probability density of the M documents in the test set.

For LDA, the perplexity is defined as:

$$\text{perplexity}(D_{\text{test}}) = \exp\left\{-\frac{\sum_{d=1}^M \log(p(w_d))}{\sum_{d=1}^M N_d}\right\}$$

The probability of a word w_d is seemingly glossed over in many papers, however some methods for estimating the value have been proposed. The harmonic mean is often used as an estimator due to its relative simplicity and computational efficiency, however it has been subject to criticism regarding its suitability for use in perplexity calculation. Other methods including 'left-to-right', and a chib-style estimator have been shown to be more effective estimators of $p(w_d)$. [42–45]

The use of perplexity as a metric for evaluating topic models does not necessarily mean that the model is correct or accurate, but rather that the model is capable of predicting a sample. If a topic model assigned equal probabilities across all words in a vocabulary, then the perplexity would be high, indicating that the topic model provides no insight into the relationships between documents.

2.6.2 Interpretability and Coherence

For human interpretable topic models, it is necessary that the terms within each topic be semantically related, or that it is clear why words in a topic co-exist. Whilst attempts have been made to utilise machine learning methods in the production of coherent topic models, the evaluation of them is somewhat lax. Whilst on the surface, models appear to be more

coherent with the inclusion of methods like Markov Random Fields, the coherence is often done subjectively using the opinions of human judges. [46] Even though the use of human judges may be an imprecise method of evaluating coherence, it does provide insight into the interpretability of derived models. For tools that aim to provide users with insight into large corpora of data, interpretability of the results is a key aspect that can define the success of the tool. With topics of low coherence and thus low levels of interpretability, effectively communicating any extracted information becomes increasingly difficult.

Assessing the interpretability and coherence of topic models has been somewhat formalised through the proposal of a ‘word intrusion’ and ‘topic intrusion’ tests. The word intrusion test assesses the coherence of a topic by introducing words that don’t belong in a topic and asking humans to identify the misplaced word. A Topic Intrusion test is performed by introducing an incorrect topic and asking humans to identify the misplaced topic. It was found that in cases where topics are incoherent or difficult to interpret, that humans would tend to choose a word seemingly at random. [47]. This method has been extended by asking humans to select two intruder words, where only one of them is actually an intrusion. The idea is that in well defined topics not only will the correct intruding word be selected, but also there will be no means for individuals to distinguish between the strength of belonging for the remaining words. If participants can’t decide on what is an intruding word, then there should be a seemingly randomised selection. [48] Both approaches result in different assessments of any derived topics, there is no indication however as to which metric is a better estimate of the coherence of topics.

The precision metrics defined for word and topic intrusion tests may be of value when evaluating the quality of Latent Entity Models, though they rely heavily on human evaluation of topics. Use of judges is time consuming and potentially unreliable. A more formal method of evaluating coherence was proposed by comparing word vectors formed in a semantic space built from wikipedia articles. By considering the distributional similarity of word vectors formed by pairs of words in topics, the semantic cohesion of topics can be estimated using one of a few different metrics. When considering the inter-rater agreement between computed coherence and human raters, the spearmann rank correllation values had an average of $\bar{x} = 0.77$ and a standard

deviation of, $\sigma = 0.04$. The relative agreement between each method of evaluation suggests that any of them could serve as valuable means of evaluating the coherence of topics or that at least the semantic space approach is an acceptable substitute to human participants.. [49]

In general, when given a topic $T = w_1, \dots, w_n$, the coherence of that topic is defined as the mean similarity of each possible word pairing $Sim(w_i, w_j)$ where $w_i, w_j \in T$. The similarity of two words could be one of many measures, including the cosine of the word vectors, or the jaccard coefficient. [50]

$$Coherence_{sim}(T) = \frac{\sum_{\substack{1 < i < n-1 \\ i+1 < j < n}} Sim(w_i, w_j)}{\binom{n}{2}}$$

2.6.3 Comparing Models

When evaluating topic models, it is often done from the perspective selecting the best topic model. This could be done through the use of interpretability and coherence tests, or it could be done through a models performance at some secondary task. Visual means of comparison can also be used to explore the differences between models and methods.

When regarding topics as a $k - dimensional$ model, visualising the topic space can be challenging. One approach to comparing topic models is to look at the similarities between each topic in a pair of models. In the form of a bipartite graph, it is clear which topics in two models are conceptually similar. The bipartite graph in Figure 3 shows that even though two methods do have different conceptual topics, there are some topics in both that are somewhat similar. The similarities and differences between the two models are seen further if relationships between documents are plotted. The noticeable difference between the two topic modelling methods made visible in the visualisation is that LDA appears to form relations between the document clusters that LSA kept distinct. [51]

Degrees of similarity can be determined by considering the differences in word distributions between two sets of topics, simply matching words from one topic to words in another topic can give you a simple measure of similarity, considering the probability of a word generating a given topic can enhance measures of similarity.

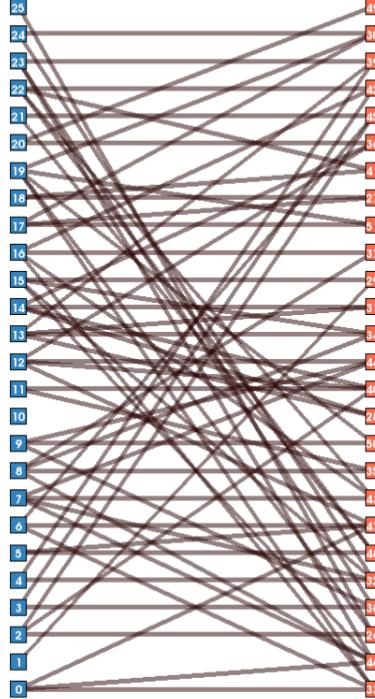


Figure 3: Bipartite topic conceptual similarity graph. (Middle, Right)

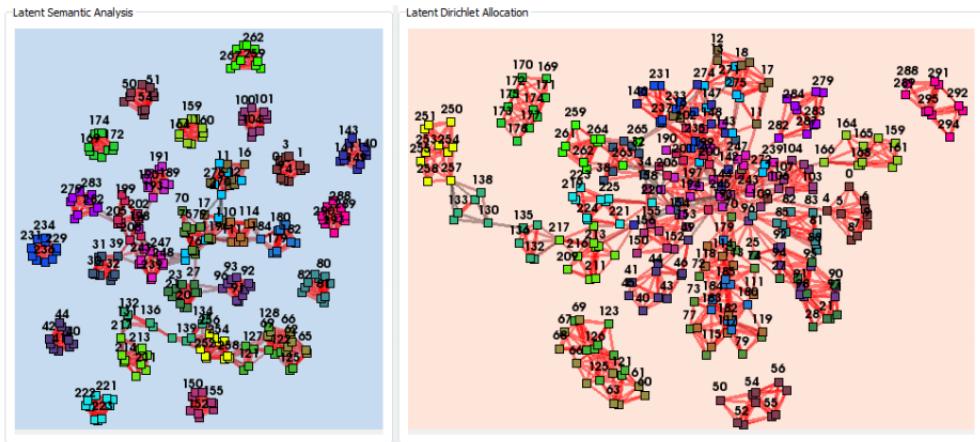


Figure 4: Document relationships formed by LSA and LDA topic modelling methods

Visualisations might be effective at explaining why a particular model performs in a certain way at some secondary task, or it might be useful for identifying traits of models that are valuable for particular tasks. However, the visualisations don't provide any quantitative insight into how one model may perform when compared to another. The mapping of document relationships seen in Figure 4 also suggest that further classifications can be performed on the documents, whilst LDA provides more interconnections between clusters, there are still clusters which can be used to perhaps classify future documents.

2.7 Entity Topic Modeling

Entity Modelling exists as a small field of study aside from topic modelling and could be regarded as an extention of the NER domain. It relates to the extraction of entity descriptions, as well as the linking of distinct entities. Many of the challenges in this field stem from the high levels of ambiguity present in natural language. Attempts have been made to utilise Topic Models in the task of entity resolution as well as forming links and relationships between entities within a document, Whilst semantic resources have been investigated as tools for the automatic tagging of extracted entities. Entity Topic Modelling is often considered for the purpose of Entity linking, which is the task identifying how entities in a corpus relate to each other, It involves the resolution of entity mentions that refer to the same entity in order to perform optimally.

Topic models have been utilised in the task of entity linking through the application and development of specialised Entity-Topic Models. One such investigation involved finding mentions of concrete entities, such as '*iPod*', '*SteveJobs*', and *iPhone* and forming a unifying '*Apple Inc*' topic. [52] The approach added an additional step to the generative LDA algorithm which sampled topic, and entity assignments for each entity. The focus of the paper was to utilise the topical context within which each entity was mentioned, to try and resolve entities with multiple mentions through relationships that may form between entities in the model.

The Entity-Topic Models suggested in the paper are statistically sound, and perform well in predictive tasks oriented around wikipedia information. The key drawback for this study is the use of short documents to train, test, and evaluate derived models. Models were trained dataset of news articles from the TAC 2009 dataset [53], which being short in length often benefit the assumption made in the study regarding how entities relate to the topics within the document. For longer texts and particularly narratives, this assumption is not necessarily valid; wide ranges of topics may be present, with entities only being expressed in the context of some of these topics. The limitation of this entity-topic modelling method could come from the base LDA method. As a bag-of-words approach,

Chapter 3

New Ideas

3.1 Introduction

Many different methods of topic modelling and analysis have been considered, only those specifically discussing the generation of entity-topic models beginning to progress towards meeting the aims that this project has. Of any methods considered, each Entity-Topic Modelling approach had underlying assumptions that rendered them ineffective unless utilised under specific conditions. Additionally, no method directly addressed any need for, or the concept of, a Latent Entity.

The primary contribution of this investigation is a pipeline through which Latent Entity models can be explored. Conceptually, Latent Entity models provide a novel means of summarising, relating, and understanding written narratives. The pipeline proposed utilises a combination of new and existing approaches, with the Latent Entities being extracted using simple clustering methods. As an abstraction of underlying layers of entity topic models, it is necessary to ensure that assumptions made in literature are addressed, else flaws in any developed system maybe further amplified.

In order to address a fundamental flaw in many aspects of literature on Entity topic models, this investigation proposes the use of an entity-term association weighting metric that allows entities to have associations with terms in a document quantified. The Gaussian Entity-Term Matrix outlined in this chapter allows the assumption that entities in a document are equally associated to terms and topics in the same document to be removed.

Evaluating topic modelling methods is a process that requires careful and considerate attention.

It has been shown to be possible to evaluate topic models from a variety of perspectives, including the ability to reduce perplexity, as well as their interpretability. As an abstraction from Entity Topic-Models, typical methods for evaluation may not be applicable, alternatives are proposed in this chapter.

It becomes increasingly difficult to visualise and interpret statistical models as their complexity increases, with the meaning of models becoming obfuscated by the variability of data being analysed. Topic models are no exception to the effect that variability has on levels of obfuscation, and as methods increase in complexity, the need for exploratory tools also increases. In addition to proposing a pipeline for extracting latent entities, a system for the visualisation and comparison of topic models is outlined.

3.2 Gaussian Entity-Term Matrix

The Gaussian Entity-term matrix (GETM) is a means of segmenting a given document into entities and associated terms. The matrix for a given document consists of strengths of associations between entity-word pairings. It operates under an assumption that the more separation there is between two words in a document, the weaker the association is between those two words. By modelling documents not as a bag of words, but as sequences it is possible to capture some of the relationships between different words prior to applying additional statistical methods.

Given a set of entities $\underline{E} = \{\underline{e}_0, \dots, \underline{e}_i\}$ where $\underline{e}_i = \{e_{i,0}, \dots, e_{i,m}\}$ and $e_{i,m}$ is the index of a mention of an entity e_i in a document, and a set of words $\underline{W} = \{\underline{w}_0, \dots, \underline{w}_j\}$ where $\underline{w}_j = \{w_{j,0}, \dots, w_{j,n}\}$ and $w_{j,n}$ is the index of a word w_j in a document, then a matrix D when indexed by i, j can be defined as:

$$D_{i,j} = \sum_{m=0}^{|e_i|} \sum_{n=0}^{|w_j|} \sqrt{\frac{a}{\pi}} \cdot e^{-a \cdot (e_{i,m} - w_{j,n})}$$

This method makes use of the assumption that the more distance there is between two words, or the more words there are separating two words, the less associated the two words are with

$$D = \begin{pmatrix} & e_0 & e_1 & \dots & e_i \\ w_0 & D_{0,0} & D_{0,1} & \dots & D_{0,i} \\ w_1 & D_{1,0} & D_{1,1} & \dots & D_{1,i} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ w_j & D_{j,0} & D_{j,1} & \dots & D_{j,i} \end{pmatrix}$$

Figure 5: Structure of Gaussian Entity-Term Matrix With Columns Labelled by entities and Rows Labelled by Words.

each other. There are benefits and downsides to this simplification of the structure of written language. One down side to the assumption made is that, as associations between terms might exactly follow a gaussian distribution, it is possible that the associations between some terms may be exaggerated, whilst others are understated. Additionally, the additive approach to handling terms occuring multiple times means that there is potentially a need to normalise strengths off associations, this results in additional processing steps that could mitigated by considering alternative methods of handling multiple occurrences.

	Harry	Hermione	Ron	neville
Gryffindor	0.6	0.3	0.4	0.2
white	0.05	0.06	0.05	0.7
shock	0.04	0.05	0.05	0.6
yell	0.2	0.22	0.21	0.3
from	0.3	0.2	0.24	0.11
harry	1.0	0.9	0.95	0.6
neville	0.5	0.6	0.55	1.0

“Someone standing outside the Great Hall might well have thought some sort of explosion had taken place, so loud was the noise that erupted from the Gryffindor table. Harry, Ron, and Hermione stood up to yell and cheer as Neville, white with shock, disappeared under a pile of people hugging him.” – J. K. Rowling

Table 3: Example GETM for entities within text

As figure 3 demonstrates, the GETM results in associations between terms that are not necessarily meaningful, the association of Harry to other associations of Harry is not of value, similarly, the association of Harry to words such like ‘as’ and ‘on’ is also misleading. As the GETM is only preserving the notion of words having previously held structure and meaning, it is possible to remove particular parts of speech that don’t provide useful insights into the relationships entities have with words. Removing an entity’s association to itself is not so straight forward, it requires resolving entity mentions, and in cases where entities are either referred to by different names, or two entities share the same name, that is a difficult task. One solution is to ignore entity-entity associations in the GETM, this is perhaps the best approach given the purpose of the GETM. By removing entity-entity associations from the GETM, Latent Entity Models and Entity Topic Models will describe classes of entities, and are less likely to orient themselves around the relationships between entities.

By modelling associations using a Gaussian distribution, it is then possible to adjust the hyperparameter α to increase or decrease the rate at which strengths of association decline as

the number of separating words increase. It is also possible to remove the gaussian aspect of a GETM, instead utilising different weighting functions. In some texts it might be known that words surrounding entities are associated with strengths following different distributions, thus it is possible to substitute the Gaussian for a more representative distribution.

3.2.1 GETM Evaluation

Evaluating the GETM can be done both subjectively and analytically by inspecting the terms determined to be most associated with a specific entity. Manually written descriptions of entities in a novel to can be used to form a 'ground truth data set' which models can be compared too and evaluated against. A standard confusion matrix would provide insight into the words that were accurately deemed associated, words that were missed as being associated, and words that actually have no relation to the entity in quest. A key challenge with comparing terms extracted from two different corpora is relating terms and descriptions that are actually synonymous. It might be necessary to consider the use of some form of semantic word space as is sometimes done to evaluate cohesion

For this thesis, the evaluation of the GETM has to be carried out by considering the effect that the GETM has on calculating Entity Topic models. the effects of changing the weighting functions used in the calculation of the GETM can be observed through any changes in resulting Entity Topic Models. If no changes are observed, then the emphasis on word-term and word-topic associations changing throughout a document is perhaps misplaced.

3.3 Entity Topic Model

By using a GETM prior to deriving topic models words are already associated with entities, this makes extending LDA topic models a more simple task. As LDA is a bag-of-words method, each entity and its associated terms within the GETM could be regarded as a distinct document. Using GETMs add an additional set of pre-processing steps to the standard LDA algorithm, each set of terms can be provided to a vanilla LDA algorithm.

The proportional topic distributions in an Entity Topic Model using the GETM can be calculated

by multiplying the strength of association between an entity and a given word, with the word-topic probabilities calculated in an LDA model.

$$T_{k,e} = \sum^w \phi_{k,w} \cdot D_{e,w}$$

Where $T_{k,e}$ is the Entity Topic for topic k and entity e , $D_{e,w}$ is the strength of association between entity e and word w , and $\phi_{k,w}$ is the topic-word probability for topic k and word w .

You may wish to normalise each topic score in an entity topic, bringing values into the $[0, 1]$ range. In which case the value for each $T_{k,e}$ where \underline{T}_e is the set of topics for entity e , becomes:

$$T_{k,e} = \frac{\sum^w (\phi_{k,w} \cdot D_{e,w}) - \max(\underline{T}_e)}{\max(\underline{T}_e) - \min(\underline{T}_e)}$$

3.3.1 Evaluating ETMs

For this thesis, ETMs are used as a means of obtaining Latent Entities, and should be evaluated from that perspective. Given that the process for deriving entity topic models is so similar to calculating LDA topic models, there is little need for drastically different methods of evaluating ETMs. Measuring the perplexity of ETMs for a given corpus can give you insight into the quality of the models in relation to the corpus. Alternatively, use of 'intruding topic' and 'intruding term' tests could provide insight into the interpretability of calculated models.

3.4 Latent Entities

A Latent Entity is an abstract statistical model that approximately describes some entities within a corpus. Identifying Latent Entities is possible through clustering entity topic models extracted from a corpus. In the case of k-means clustering, each entity in a GETM matrix is expressed as distributions of entity topics and turned into an Entity-Topic Model. Each Entity-Topic Model can then be clustered in n-dimensional space (n being the number of topics in a model) on topic distributions. The center of each cluster extracted through k-means can then be labelled as a Latent Entity which abstractly represents entities within that cluster.

As each latent entity remains a probability distribution of entity topics, it is possible to state

how similar a given entity is to a latent entity. Each similarity metric of entity to latent entity can then be used to express the entity in terms of similarities to latent entities.

Harry		Hermione		Ron	
Term	Strength	Term	Strength	Term	Strength
Scar	0.1	Magic	0.11	Drooble	0.07
Magic	0.09	Wand	0.09	Magic	0.06
Muggles	0.09	Superiority	0.04	Snigger	0.05
Expelliarmus	0.05	Unkempt	0.04	Sherbert	0.03

Table 4: Example entity-term associations between three entities

Topics	Harry	Hermione	Ron	Latent Entity
Topic 1	0.6	0.5	0.4	0.5
Topic 2	0.1	0.2	0.1	0.13
Topic 3	0.1	0.2	0.2	0.17
Topic 4	0.2	0.1	0.3	0.2

Table 5: Example Entity-Topic distributions for entities in Table 4 and the associated Latent Entity.

Given a set of entities (like Harry, Ron, and Hermione), a Latent Entity for this set could be derived by computing the average entity topic model. Conceptually this latent entity could describe entities that can be classified as 'wizards' or 'students'. The exact interpretation of what the latent entity represents is subjective, in a similar way to how the topic expressed in a topic model is open to interpretation.

Latent Entities in this form could even be used as a means of assisting in the interpretation of large groups of entity topic models. A summary of ETM clusters can be given allowing for higher level overviews of latent structures within a corpus, or elements of a corpus.

3.4.1 Application of K-Means

K-Means clustering is just one approach that can be taken with regards to extracting latent entities from a collection of entity topic models. It is entirely appropriate to utilise other clustering methods, including techniques such as Fuzzy C-Means, Gaussian Mixture Models, or hierarchical style clustering. As a simple method, K-Means provides a straightforward approach to finding Latent Entities.

K-Means is a method for minimising variance between clusters and as such can be described as

$$\underset{S}{\operatorname{argmin}} \sum_{i=1}^k \sum_{x \in S_i} \|x - \mu\|^2$$


3.5 Evaluating Latent Entities

The evaluation of topic models is a challenging task, many techniques commonly used are inherently flawed or difficult to carry out. Many of the flaws present in topic modelling evaluation methods may be made even more pronounced if used to evaluate Entity Topic Models, and Latent Entities. An adaptation of the intruding word test applicable to ETMs proposed here is the intruding Entity Test. Some evaluation metrics are proposed as means of evaluating the quality of latent entities.

3.5.1 Intruding Entity

The intruding entity test involves asking human participants to identify the entity that doesn't belong in a set of entities supposedly represented by a latent entity. The set of entities can be formed by choosing some amount of entities most strongly represented by a Latent Entity, then selecting and adding to the set an entity least likely to be represented by the same latent entity.

Similarly to the intruding word test, the intruding entity test is proposed as a means of evaluating the cohesiveness of the latent entity. Should the set of entities actually be made of those conceptually related, then the odd entity should be identified with a high success rate across all participants.

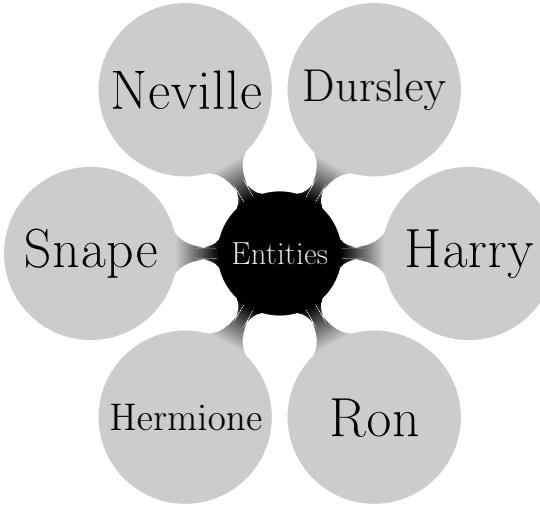

Select the entity that does not belong to the set: _____

Figure 6: Example Set of Entities for the Intruding Entity Test.

In figure 6 you can see an example of how a question in the test may look, the names of entities being presented in some format, with participants requested to select the entity that does not belong. There are a range of influencing factors that could invalidate the results of any test of this format, most notable of which is the familiarity of the participants to the reference material. In cases where individuals are unfamiliar with the narratives from which entities are drawn from, then there would be increased difficulty when selecting the conceptually unrelated entity. For the example in figure 6, the intruding entity would be 'Dursley' as the only non-wizard in the set of entities.

Admittedly, there is a range of investigations that can be carried out to evaluate the efficacy of this method of evaluation. It might be necessary to provide participants with additional information about the set in order to allow them to make informed decisions. As the entities within the set are themselves represented by topic models, it is possible to then provide information regarding the words associated with those entities that resulted in the set of entities represented by the calculated Latent Entity.

For participants that are unfamiliar with the material from which the entities in the set are from, presenting the terms most strongly associated with the entities might resolve the impact that this could have on their ability to select the correct entity. Of course, with the addition of

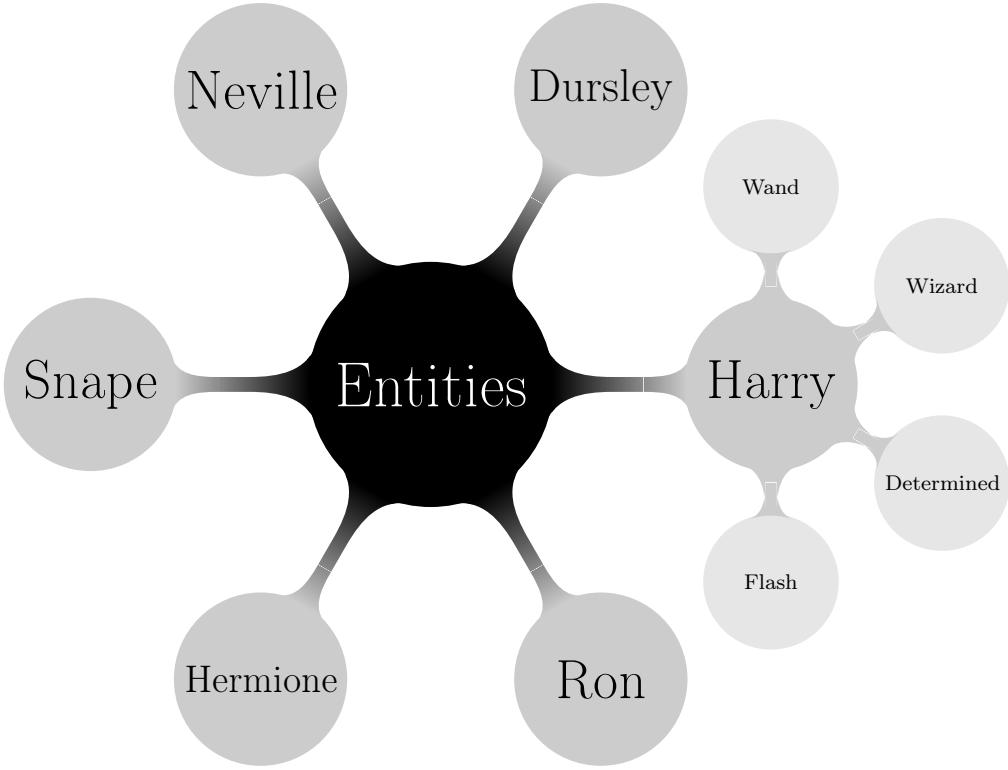


Figure 7: Example Set of Entities with Set of Associated Terms.

more information the question becomes more complex to answer, there becomes more factors to consider when determining which entity is the unrelated one.

3.5.2 Evaluating Consistency

Evaluating the consistency of Latent Entity models can be determined by comparing the results of the process for two corpora of different documents on the same subject. The assumptions for this method of evaluation is that the contents of books on the same subject are likely to be similar, whilst this may not be true for narratives, factual books on the same subject should hold true.

The consistency check can be used to evaluate different stages of the analysis pipeline. The GETM aspect of the system is a prime candidate for this form of evaluation. Similarly, entities within the GETM should be associated with the same or synonymous terms if assumptions regarding the similarity of two corpora are true. Using corpora that are known to be similar in content would remove the potentially dangerous assumption. However, the corpora are not the

same, and thus there still remains the chance that any difference in compared models would be a result of the differences in documents between each corpora.

3.5.2.1 Latent Entity Consistency

For latent entities, it is necessary to consider entities that are present in both corpora that have been clustered differently, and the number of entities absent from one or the other document.

Considering common entities, consistency is calculated using the number of consistencies or true positives (TP), and inconsistencies or false positives (FP) for entity pairings within each Latent Entity clusters. TP is the number of entity pairings in a Latent Entity cluster present in both sets of Latent Entities, FP is the opposite of that, the number of entity pairings within clusters not the same across both sets of latent entities.

Where N is the number of Latent entities clusters, and n_i is the number of entities within the latent entity cluster indexed by i , consistency is defined as:

$$Consistency = \frac{TP - FP}{\sum_{i=1}^N \binom{n_i}{2}}$$

The defined consistency metric ranges from -1.0 to 1.0 . Values approaching 1.0 mean the two sets are increasingly correlated.

An example of the consistencies and inconsistencies between two sets of latent entities seen in Table 6 can be seen in Table 7. With the total number of pairings, $\sum_{i=1}^N \binom{n_i}{2} = 16$, the total number of consistent pairs, $TP = 4$ and the total number of inconsistent pairs $FP = 12$ the consistency of these two sets of latent entities is $\frac{4-12}{16} = -0.5$. A negative value implies the latent entities are entirely different compositions, and are somewhat inconsistent.

Cluster 1	Cluster 2	Cluster 3	Cluster 1	Cluster 2	Cluster 3
a	1	x	a	d	x
b	2	y	1	2	b
c	3	z	c	y	3
d	4	w	2	4	w

Table 6: Left & Right: Entities Within Clusters Behind Latent Entities.

Constencies	(a, c)	(1, 2)	(x, w)	(4, 2)
Inconsistencies	(a, 1)	(a, 2)	(c, 1)	(c, 2)
	(d, 2)	(d, 4)	(y, 2)	(y, 4)
	(x, b)	(x, 3)	(w, b)	(w, 3)

Table 7: Consistencies and Inconsistencies Between Clusters Forming Latent Entities

3.6 Analysis Pipeline

The Analysis Pipeline is a series of steps necessary for the task of extracting Latent Entities from a Corpus. Each step can be viewed as a transformation of a corpus which can be applied to the results of the previous transformation.

The pipeline is essential to the implementation of a system which can be used to extract Latent Entity information. Without consideration of what the process would be, their is potential value of any developed system could be severely diminished.

Starting with raw documents, the start of the process is the tokenization of each document in the corpus. The extraction of POS tag information and Entities within the corpus can be carried out in parallel, it is necessary that both tasks are performed prior to the calculation of the Gaussian Entity-Term Matrix. From the GETM, Entity-Topics and subsequently Latent Entities can be extracted.

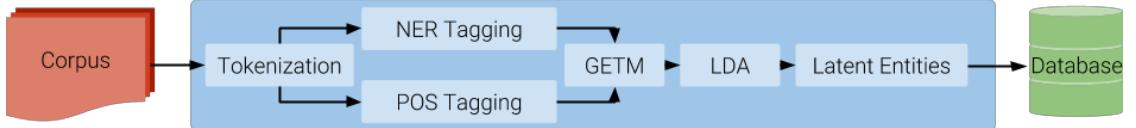


Figure 8: Analysis Pipeline for the Extraction of Latent Entity Information.

3.7 Topic Model Explorer

As machine representations of words related topically and probabilistically, topic models are not always easy to interpret. Presenting only a set of terms within a topic might not provide the best insight into what that topic represents in a corpus. The challenges of interpretation are further compounded as layers of abstractions are added to a topic model. Entity Topic Models and subsequently Latent Entities would be easier to interpret when presented alongside other derived models. As such, a topic model explorer is proposed as a tool allowing the comparison and exploration of topic models, entity topic models, and latent entities.

Humans often try to understand a topic by applying a single word or small phrase as a title of any given topic. Latent Entities are abstractions of multiple Entity Topic Models, with each entity topic model being varying distributions of topics and words. In order to accommodate for the human need to label models, the Topic Model Explorer can accommodate for this by demonstrating how different clusters of entity topic models are similar, extracting words most significant across members of the cluster.

By allowing visual comparisons of entity topic models and other topic models that have been extracted from a corpus, the explorer application can provide a means to allow an individual to assess the quality of models used to describe a corpus, and also use the insights provided from the models as a means of interpreting documents within the corpus.

3.7.1 Interface

The interface for the Topic Model Explorer is a key aspect in allowing individuals to understand the machine models extracted from a corpus. With a poor interface the system is ultimately of no use, users would struggle to use the system and thus struggle to gain an understanding of

presented topic models.

The proposed structure of this interface is one that allows users to systematically progress from written text, to information about entities, and then to Latent Entity information. There is essentially four aspects of a corpus that the interface is required to demonstrate for the user to receive a complete picture of the models proposed in this thesis. Book level topic information, corpus level topic information, entity level topic information and corpus level entity topic information.

3.7.2 Visualisations

In a single narrative there can be hundreds of entities, in a large corpus the number of entities is magnitudes higher. The highly dimensional and verbose data sets that are extracted from a corpus require presenting to the user in simple and easy to digest formats. For some aspects of the interface, tabular data is perhaps more valuable and more clear, but for information that relates groups of entities or documents in a corpus there is more need for visualisations.

For the Gaussian entity term matrix, a form of heat map can be used to visually identify key terms for entities within a document. Words of significance for multiple entities can then be compared across entities.

For Latent Entities, Entity Topic Models and book level Topic Models, a matrix of pairwise scatter plots for each topic could effectively show any relationships that may exist within derived and associated topics. positive and negative correlations that may be shown through the pairwise plots could indicate some semantic relationships between terms in a topic, either that some terms are not likely to occur together, or that if one term is present, then so must another. The pairwise plots can also be used to show clusters of Entity Topic Models, pairwise plots can also be coloured according to which Latent Entity an Entity Topic Model most closely associates with.

For exploring relationships, network visualisations maybe of value, presenting clusters of entity topic models as a node in a graph could show how Entity Topic Models and Latent Entity

Models relate to each other within a document. Topic Distributions for Entity Topic Models and book topic distributions can be shown in a stacked bar chart, where the proportions of the bar represent the proportion of that topic present in an entity or book. Stacked bar charts can be used to compare individual books, Entity Topic Models, or Latent Entities much easier than with a pairwise plot.

3.8 Project Management

The project began with investigating high level research area, from which an iterative process of refinement took place. From an original aim of 'Analysing Narratives', general NLP topics were considered, with a focus on understanding the general state of the field. From looking at automatic scene generation, to understanding that even the most fundamental task of NLP (POS and NER Tagging) are still open topics of research, the project was able to focus on a specific aspect of the field that is an active area of research.

After narrowing the field down to current topics in research, the iterative process underpinned the remaining investigation and development process of the project. Agile development methodologies typically denote how small teams should conduct themselves throughout a software development life cycle, however many of the standard operating procedures of approaches like Scrum or Extreme Programming can be applied to an project undertaken independently.

In a form of personal autonomy, it is necessary to structure development in such a way that focus and direction is not lost, Personal Extreme Programming (PXP) is one such approach. First and foremost, PXP requires discipline and a willingness to learn and adapt, the principals of the methodology are oriented around these two points [54]. Figure 9 shows the adapted PXP process that was applied to the development in this project.

The approach can be adapted to suite a research project of this kind, where requirements and planning are bolstered with an additional 'research' process that accommodates for the investigation into research areas around the topic of the thesis. Additionally, where the methodology contains a continuous process of logging, this investigation instead substitutes logging for doc-

umenting. By documenting throughout the development process, the production of the actual thesis is a more attainable task.

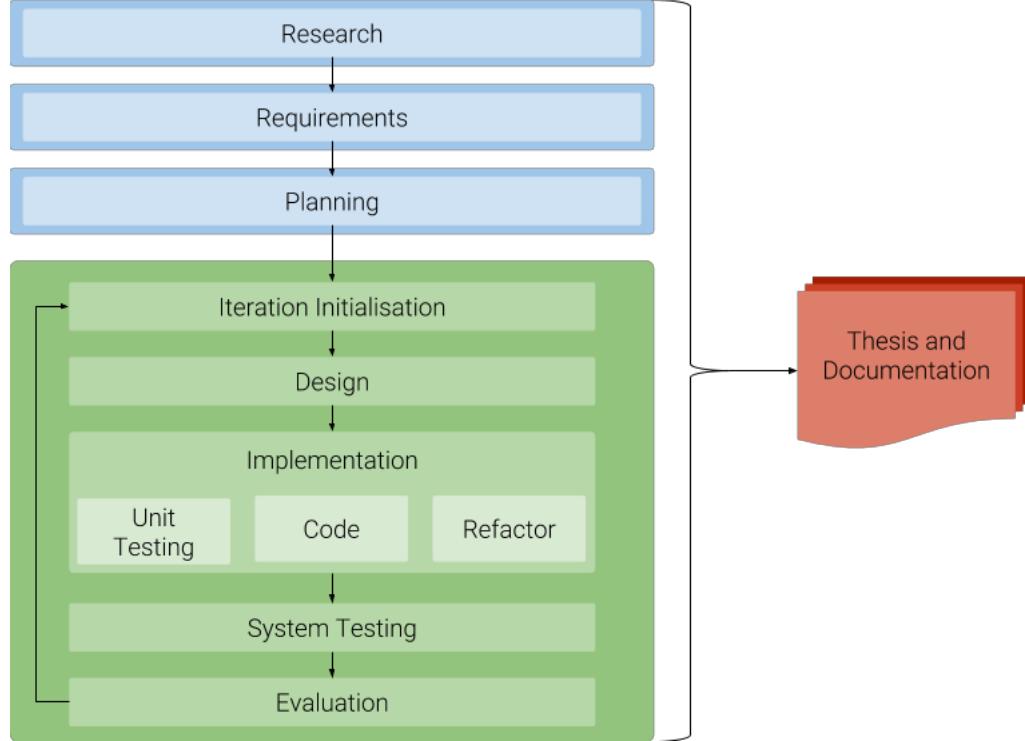


Figure 9: Adapted PXP Process for the development of this Project and Thesis

3.9 Professional, Social, Ethical, and Legal Issues

With the proposal of methods and tools for the analysis and exploration of data, it is necessary to consider the professional, social, ethical, and legal issues that may be associated with the project as it comes to fruition. Ethical and legal issues are perhaps the most relevant to this project, with potential questions orienting themselves around the morality of encouraging individuals to analyse data. Copyright is the primary legal concern that this project has.

3.9.1 Professional

The development of software aiming to assist an individual in performing a task could have some unintended professional side effects. By reducing the level of skill required for an individual to carry out analytics task, the barriers to entering certain jobs and industries are also reduced. In critical scenarios like health care and security, having skilled and trained individuals is necessary

to ensure that recipients of care and those under the protection of others are not harmed in any way, be it through negligence or by accident, the reduction of skills in a workforce could impact general business operations.

An alternative view of the reduction of required entry levels to positions is that it enables others to perform better in a workplace generally, either a result of more time being made available to complete tasks, or through the provision of assistive technologies to speed up processes.

3.9.2 Social

The social implications of the project relate to those raised in the professional section. By providing means by which an individual can effectively analyse and understand a literary landscape, it allows a wider population to engage in writing with an understanding of what others enjoy and find interesting, opening the doors to new writers of literature could bring numerous benefits to society.

The potential flaw with increasing the rate at which literature is produced is that it becomes more challenging for individuals to find literature that they want and enjoy. It allows the inexperienced and novice writers to structure their documents in such a way that they are automatically flagged as being relevant to others.

By stroke of the same brush, improving tools for analysis can also assist in distinguishing between subjective qualities of narratives, such that works that aren't very good could perhaps be more easily filtered.

3.9.3 Ethical

Ethically, the principal issue of this project relates to making available tools that could potentially be used to group, relate, and classify entities based on personal data. As the title suggests, Latent Entities could be regarded as a form of stereotype, or an underlying classification that can be applied to groups of entities. If applied to personal data, then large groups of individuals could be automatically analysed and processed, with labels being applied to them without the individual ever realising. This could result in groups of people being excluded from

certain social settings as a result of their classification.

With respect to the analysis of literature, this project could be used to filter and effectively censor literary works, preventing people from ever coming across certain documents should they not match preferences expressed through a corpus that has been analysed.

3.9.4 Legal

The primary legal concerns of this project relate to copyright and related UK legislation and laws. There is discussions to be had as to what use of an individuals work constitutes as fair usage, even within an academic context it is easy to stray across the line and violate copyright.

For machine analysis, UK Law states that it is considered fair use as long as the project is for an academic, non-profit, and non-commercial reasons. However additional requirements are placed on this in the form of requiring legal access to resources protected under copyright. Fortunately, large collections of texts that are now in the public domain are available through project Gutenberg, an online resource invaluable to academics requiring a large and legal corpus of text.

An additional legal question arises when considering the results of analysis of literature. If results of analysis form summaries, or can be used to describe a document, then there is potentially a case to be made about how distributing results of analysis illegal distribution of work protected under copyright.

Chapter 4

Implementation

4.1 Introduction

For an investigation to be carried out into the usefulness and efficacy of latent entities, it is necessary to begin with the implementation of a framework through which a study can be carried out. As such implementation for this project involves the development of 3 key elements:

- Analysis Toolkit
- Web Server Architecture
- Latent Entity Explorer

The Analysis Toolkit involves the derivation and implementation of methods necessary to process and analyse corpora. Web Server Architecture involves the design and implementation of a database, Server, and API capable of allowing access to processed data and results from analysis. The Latent Entity Explorer entails the creation of a set of visualisations and tools allowing for the exploration of Entity Topic Models and Latent Entities.

Once the base framework is in place, implementation turned towards the task of programmatically evaluating the proposed process for extracting latent entities, as well as refining implementations.

4.2 Architecture Overview

The system follows a 3 layer approach to web-server architecture, requiring a database (DB), web server and API, and a client application. This implementation uses PostgreSQL as its DB of choice, as well as following RESTful practices in the API design. The web server is implemented

in python, with a DB repository layer accompanying the server and API implementation. The client application (Latent Entity Explorer) is implemented using TypeScript and the Angular 5 framework. Alongside the server is a set of Analysis Tools that were developed as distinct methods with utility in their own right.

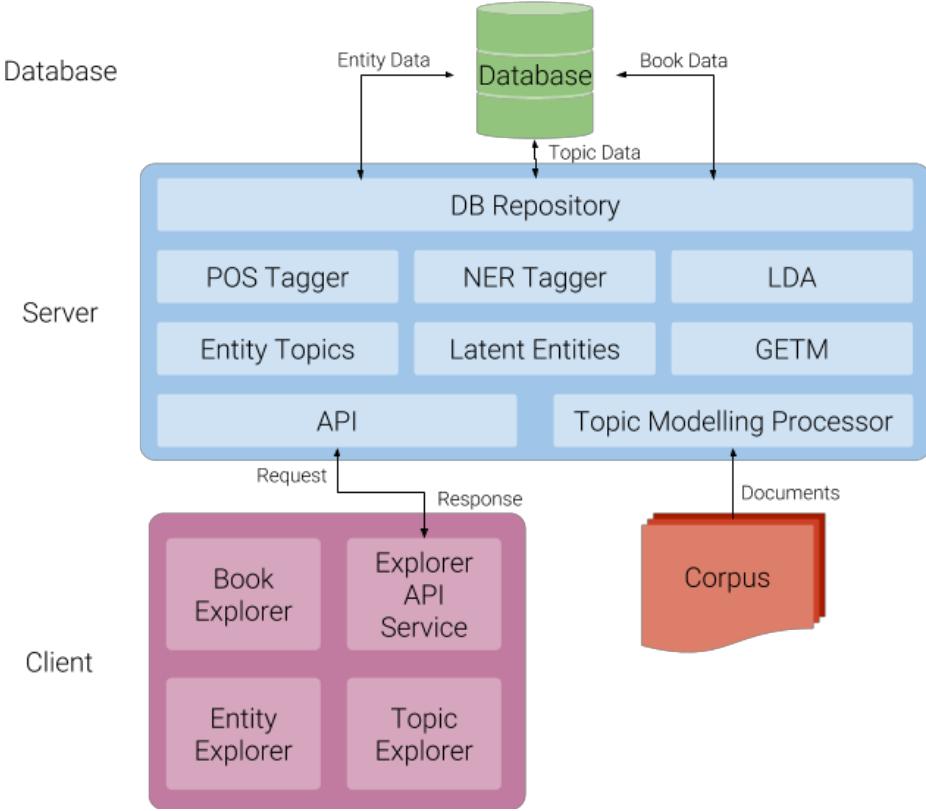


Figure 10: Architecture overview of the Latent Entity Model Analysis and Exploration System.

4.2.1 API

The focus of the API is to allow clients to interact with data resulting from the analysis pipeline. Data that is to be made available will primarily consist of book meta-data, and extracted information relating to topic models, entity topic models, and Latent Entities.

Given the defined purpose of the API, and the process through which narratives can be analysed, the design of endpoints is a relatively straightforward task. The API will consist of a series of GET request endpoints for book data, as well as a small set of endpoints allowing additional narratives to be added to the system and analysed.

A Subset of the endpoints in the api for requesting data from the system can be seen in Table 8,

each of which are GET requests. There are additional endpoints that allow for other aspects of collected and extracted data to be requested, as well as POST endpoints that allow for additional documents to be added to the system.

Endpoint	URI
Book Titles	/api/ books
Book Topics	/api/books/«book title»/topics
Book Entities	/api/books/«book title»/entities
Book Topics terms	/api/topics/«topic id»
Entity Topics	/api/books/«book title»/entities/«Entity Name»/topics
Entity Topic Terms	/api/books/«book title»/entities/«Entity Name»/topics/«topic id »
Latent Entities	/api/latent
Latent Entity Topics	/api/latent/«Latent Entity ID»

Table 8: Selection of API Endpoints. Text between guillemots represent variables of the URI.

From Table 8 it is clear how most of the endpoints are oriented around a book title, however, it would not make sense to follow this structure for latent entities. As latent entities are representative of a collection of entities, they are not part of any singular book, and thus are not accessed in the same means as other aspects of the API.

4.2.2 Database

The database is implemented using PostgreSQL, primarily due to familiarity that is held with the DB and library interfaces for various languages (including Python and JavaScript). Additionally, PostgreSQL is an Open Source database implementation, meaning that it is a morally justifiable choice of software.

The database is a key element of the overall system, it is required to provide a persistent means of storing and accessing large amounts of data. There can be vast amounts of data extracted from a corpus, and the amount of time that a process can take to perform the task would mean days are spent waiting for a request to be completed should extracted data not be stored upon completion of analysis.

4.2.2.1 DB Structure

The Database design was to be oriented around two key concepts: Book Entities, and Topics. Building the DB around these concepts allows for some reflective structure to be maintained between the way that data is stored, and the way that users can access it through the API. The benefit to this is to a developer implementing aspects of software between the database and API, resulting in easier implementation of system logic and analysis tools that access data through the repository layer. Figure 11 shows the relational structure of tables in the database.

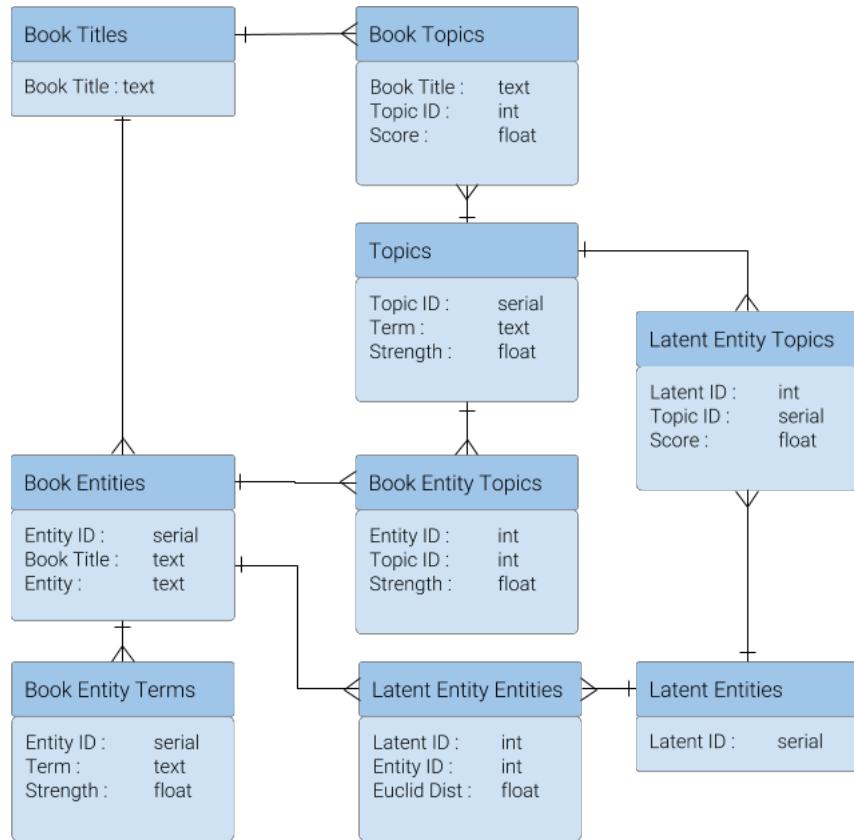


Figure 11: Entity Relationship Diagram Showing the Structure of the System's Database.

A significant table to the system is the 'Book Entity Terms' table, which is a relational database form of a GETM extracted from a corpus. Principally, the table allows for the calculation of Entity Topic Models and Latent Entities to be carried out at a later time, whilst also allowing an investigation into how the GETM influences resulting Models.

The tables, 'Latent Entities' and 'Latent Entity Entities' are an important pair for the system,

they handle the numerical descriptions of Topics forming each Latent Entity, as well as how each entity in the corpus influenced the structure of each latent Entity.

4.2.3 Server

The Server for this system holds both the API and various distinct processing units forming the system logic. Implemented in Python, the server integrates well with existing libraries for processing natural language and interacting with databases, it allows for the fast development of a REST API, as well as having a convenient PostgreSQL Library.

The top layer of the server, as shown in Figure 10 is the repository layer. The Repository layer handles all interactions with the database. Below the Repository layer are two layers of processing units with each providing different elements of functionality to the system, from performing POS tagging, to clustering Entity Topic Models.

Below the system logic layers sit two potential interface elements. The first, being the API allows web clients to query and interface with the system, the second is a command line interface element that allows processing of corpora to be initiated and carried out locally within the server.

4.2.3.1 Repository

Using a repository pattern approach for separating the responsibility of interfacing with the database means that a clear structure for inserting, updating, and retrieving data can be defined. In this system, the repository is utilised by both the API and the various processing units and system logic shown in Figure 10.

The methods in the Repository are similar to the endpoints present in the API, meaning that for many of the API endpoints, there is a matching repository method for querying the DB. Table 9 shows a selection of the frequently invoked methods.

Aside from a single method allowing connections to the DB to be formed, the remaining methods

Method	Purpose
connect_to_db(host, db_name, usr_name, pswd)	Allows for a connection to the DB to be formed using the provided user details
select_book_titles(db)	Selects book titles from the database using a given <i>DB</i> connection object.
select_book_entities(db, book_title, full_details=false)	Selects entity names in a book specified by book title, selects entity terms if <i>fullDetails = true</i>
insert_topic_terms(db, topic_id, term, strength)	a Term and associated strength for a specified topic, as determined using LDA.

Table 9: Select Methods from the DB Repository Layer.

follow a similar pattern as those specified in Table 9. As a result of the purpose of the system, as well as the design of the API, each method orients itself around Entities and Topics.

4.2.3.2 System Logic Layers

The collection of system logic layers consist primarily of methods for carrying out distinct tasks. Many of which satisfy requirements placed on the system by the proposed pipeline diagrammed in Figure 8. Each element of the System Logic Layer explored in further detail when discussing the NLP Toolkit.

Much of the functionality made available to the system is made available at the command line, locally on the server. This is due to the computationally intensive nature of the system, many of the tasks can take days of processing if given a large corpora. A corpus of 7 books could take approximately 3 hours to calculate a GETM for.

4.3 Corpus Pre-Processing

Corpus Pre-Processing involves applying a set of transformations necessary to begin the analysis and creation of descriptive models. It is assumed that the corpus provided to the system will contain only the text that is intended to be processed. In many documents there is additional preamble, publishing information, and other elements that can be considered 'noise'. This system will not concern itself with the removal of this noise within the corpus before pre-

processing as many elements of it will be removed coincidentally through other steps.

Tokenization is the first transformation to be applied to the corpus. NLTK provides a suite of tools capable of kickstarting any NLP project, including methods for tokenizing documents. With the option to tokenize a document into sentences, and then words, there are different approaches that can be taken to tokenization. This project uses the 'PunktSentenceTokenizer' methods of NLTK, which is an implementation of an highly effective tokenization method. [55] It is important that the documents are tokenized into sentences, and then each sentence is tokenized into words, as this structure allows for more effective POS tagging.

Once each document in the corpus has sentences and words tokenized, the next stage in the processes is the application of POS tagging methods to determine the grammatical structure of each sentence. A Viterbi Decoded Hidden Markov Model (HMM) POS tagger was implemented in python, utilising the NLP toolkit developed for this project. POS Tagging this document means that it is possible to apply filters to the corpus before deriving topic models from the GETM. By removing certain words tagged as certain POS (like determiners, or prepositions) it is possible to derive topics using only descriptive words, which may provide more cohesive and interpretable models.

The defined pre-processing process forms a large section of the overall pipeline, each aspect of the pipeline and preprocessing is implemented as distinct elements. In order to tie each separate element into a coherent process, two scripts were developed. One to apply pre-processing at a per-document level, and one at a corpus level.

Figure 12 shows the process taken by the system to apply pre-processing methods to an individual document in the corpus. beginning with tokenization, and ending with the calculation of a GETM for that document. The process of assimilating an entire corpus of documents involves repeating the steps for including one document for a corpus provided to the document. The methods developed for the purpose of implementing this process form part of the NLP Toolkit which will be discussed in more depth.

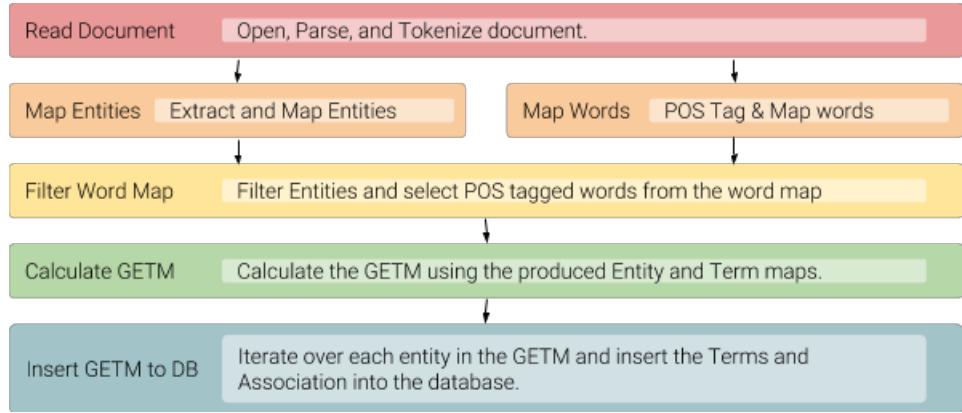


Figure 12: Process taken to pre-process a single document in the corpus.

4.4 NLP Toolkit

As is common with many NLP oriented projects, pre-processing was carried out on the collections of documents intending to be analysed. As this investigation aims to also serve as a tool from which multiple corpora can be analysed, the pre-processing steps taken need to be reproducible. The NLP Toolkit developed for this system is essentially a collection of tools that allow each document in the corpus to be pre-processed ready for the extraction of topic models and latent entities. A somewhat functional approach was used, with each method applying some transformation to a single document, or a corpus as a whole. The Analysis Pipeline defined in chapter 3 involves tasks starting with the Tokenization of plain text, and ending with the use of clustering methods to extract Latent Entities.

The toolkit can be viewed as a combination of both simple and complex NLP methods, that allow basic NLP tasks like tokenization and POS tagging to be carried out, as well as more complex GETM and topic modelling techniques.

4.4.1 General NLP

Tokenizing, POS Tagging, NER, an other pre-processing tasks are required as defined in the proposed analysis pipeline. A collection of NLP Utilities allow these tasks to be carried out within the system being developed. Table 10 shows some of the methods developed, as well as their purpose within the system.

Method	Purpose
<i>sent_tokenize(document)</i>	Returns an array of string tokens representing sentences within the provided document
<i>word_tokenize(sent_tokens)</i>	Returns a mapping of sentence tokens to arrays of word tokens
² <i>tag_document(word_tokens)</i>	Returns an array of POS tag sequences for each sentence of word tokens
<i>tag_entities(word_tokes)</i>	Returns an array of tagged entity tuples using NER tagger
<i>cherry_entity_tuples(entities)</i>	Returns a mapping of entity names from set of entity-type tuples

Table 10: NLP Ultity Methods

It is clear that some of the methods defined in Table 10 are relatively straightforward, the method for tokenizing sentences for example, is an important yet relatively self-contained process. In contrast, the methods for applying POS tags and extracting entities are somewhat more involved, with more going on behind the scenes.

Unlike the POS tagger implemented for this system, the NER tooling is not a process purpose built for this project unlike the POS tagger, the commonly used Stanford NER tagger was used to identify entities within text. As explored in Chapter 2, the difference in performance for top NER taggers are somewhat negligible. With the Stanford Tagger performing well in literature, and NLTK supporting its use in Python, it was an obvious choice of tooling.

4.4.2 POS Tagging

A Viterbi Decoded Hidden Markov Model was implemented to perform the task of POS Tagging. The Viterbi tagger acted as a baseline from which existing taggers could be compared against. Most notably, the NLTK POS Tagger was selected as a potential POS tagging tool, this was a result of how easy the tagger is to use, and how simply it integrates with other libraries.

A dynamic programming algorithm, the Viterbi algorithm provides a comparatively computationally efficient way of decoding Markov processes, or in this case, find the most probable sequence of POS tags for a given sequence of words. This implementation followed the process

described by Jurafsky [56]. The implemented HMM has methods for building a map of transition probabilities between states, calculating the emission probabilities for a given sequence, and calculating the starting probabilities for each possible starting state. Key methods for the tagger are outlined in Table 11.

Method	Purpose
<i>calcStartStateProbs</i> (<i>taggedCorpus, states</i>)	Returns a set of probabilities for the likelihood of a sequence starting with a given state, calculated from a tagged training corpus.
<i>calcTransitionProbs</i> (<i>taggedCorpus, states</i>)	Returns a set of probabilities for the likelihood of a sequence moving from one state to another, calculated from a tagged training corpus.
<i>calcEmissionProbs</i> (<i>taggedCorpus, states, obs</i>)	Returns a set of probabilities for the likelihood of a given state emitting a given observation.
<i>viterbi</i> (<i>obs, states, startP, transP, emitP</i>)	Given a set of Starting, Transition and Emission probabilities, returns the most likely sequence of states for a given sequence of observations.

Table 11: Key Methods Forming the HMM POS Tagger.

The POS Tagging model formed is essentially composed of the probabilities calculated from a corpus of pre-tagged data. It is possible to regard the methods for calculating the probabilities as being part of a training stage, where the implemented viterbi decoding is only using the model to calculate an answer. By viewing it in this way, there is potential to reduce the processing done by the system by only calculating starting state probabilities, and transition probabilities once. Unless the corpus used to train the POS tagger changes, then the probabilities behind the system won't change. The only time probabilities will need to be re-calculated, will be when determining the emission probabilities for the model. However this is really due to a flaw in the design of the tagger, instead of calculating emission probabilities for a observation sequence, the emission probabilities for all states across the whole training set could be pre-calculated.

4.4.3 Gaussian Entity-Term Matrix

At the core of the process of calculating a GETM for a document, is the weighting equation applied to determine the association between two terms in the corpus. Calculating the matrix involves going through all instances of an entity in a document, and summing the result of the

weighting metric using distance between each entity instance and each term in a document.

The process requires a corpus to be separated into two sets, one set of positions for each mention of an entity, and another set for terms. The structure of data expected for the implemented is shown in Figure 12 methods noted in Table 13 require data to be in that structure. There are additional methods allowing data to be put into this standard format.

Entity Occurrence Set	$\{e_0 : \{e_{0,0}, \dots, e_{0,j}\}, \dots, e_i : \{e_{i,0}, \dots, e_{i,j}\}\}$
Term Occurrence Set	$\{w_0 : \{w_{0,0}, \dots, w_{0,j}\}, \dots, w_i : \{w_{i,0}, \dots, w_{i,j}\}\}$

Table 12: Expected Format for Entity and Term Data for calculating GETM.

Method	Parameters	Purpose
Map Entity Occurrence	Entity Array	returns a python dict of entity names and associated position in a document.
Map Word Occurrence	Document	returns a python dict of terms in a document and the associated positions in the document.
Calculate GETM	Entity Map, Term Map, Weighting Function	returns a GETM object calculated from the Entity and Term maps, using the gaussian function as the default weighting function.

Table 13: Methods used in the formatting of data and calculation of GETM.

It is worth noting the format which the collection of entities are in once extracted from a document using the NER Tagger. Stanford’s NER tagger produces an array of entities, where each entity consists of three elements, The Name of the entity in plain text, the type of entity that was extracted (person, location, or organisation), and the position of that entity in the document.

4.4.3.1 GETM Objects

A titled-matrix class was implemented allowing matrix calculations to be performed at row or column level using column and row headings. Many of the calculations that would be performed with the GETM occur on a per-row or per-column level on values for terms and entities, and instead of keeping track of the indexes for each entity and term in the matrix this structure

allows entity names and terms to be used as keys for each column and row. The ordered map and numpy matrix data structures underpin the structure of this class, with column and row keys in the ordered map linking operations to rows and columns in the matrix.

The index operator for the class allows for cells to be selected by passing either passing the index for the desired entity and term or by passing the string values of both. Additional get and set methods are implemented to accompany the index operator.

4.4.3.2 GETM Visualisation

When implementing the GETM method, a simple visualisation was implemented to allow significant terms associated with an entity to be highlighted. As the GETM was implemented in Python, Matplotlib, a python graph plotting library was used in order to make the task as straightforward as possible.

The implemented graphic is a heat map of the calculated matrix, where a coloured cell indicates the strength of association between entity and term. The darker the cell, the weaker the association. Given the number entity-term combinations occurring in a corpus, and that a GETM can be calculated for a single document at a time, the process for producing the visualisation only considered a single document at a time.

An example of the visualisation can be seen in Figure 13. Even on a single document, there are too many terms and entities for the visualisation to be effective, a general comparison of entities is still possible, with main characters being associated with many more terms. The implementation allows users zoom in and restrict what is shown, increasing effectiveness. Figure 14 shows a closer inspection on some entities and significant terms.

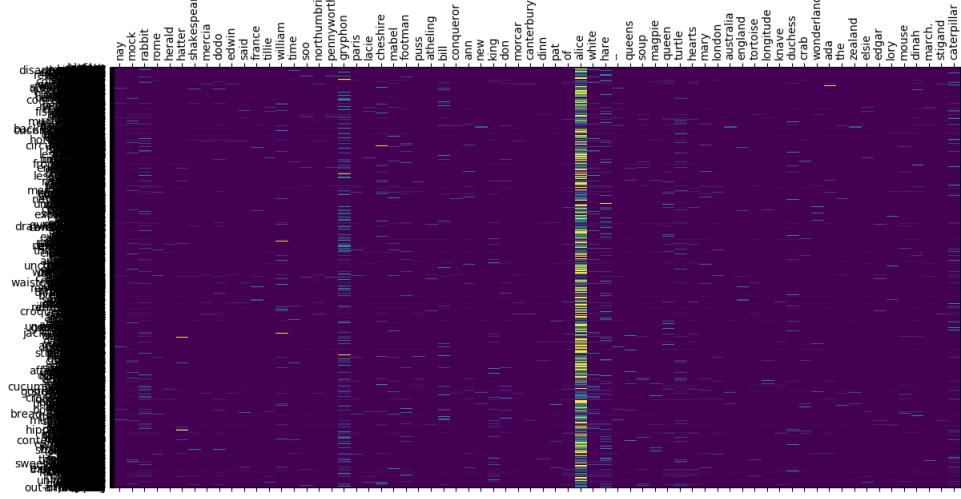


Figure 13: Full Zoomed-out View of the GETM Heat Map for the Alice's Adventures In Wonderland Novel.

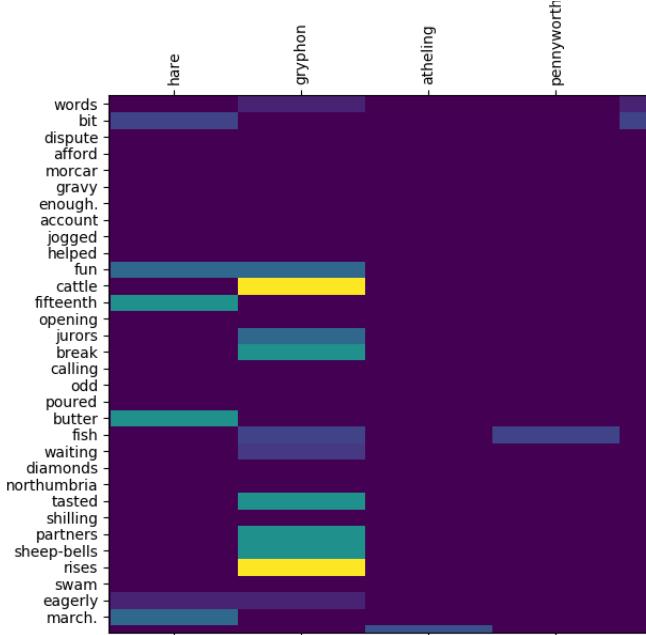


Figure 14: Restricted View of the GETM Visualisation for the Alice's Adventures in Wonderland Novel.

4.5 Entity-Topic Model

Entity Topic models are calculated after the calculation of the GETM. The process is similar to that of calculating topic models for a corpus of documents. Each collection of entity terms is treated as a document which is then fed into the scikit learn implemented LDA algorithm. Like other aspects of the pipeline, this element is also developed in python.

The scikit learn implementation produces word distributions for each topic, in this imple-

mentation, the resulting topics can be used to produce entity topic models by looking at the proportional distributions of terms in the GETM for an entity, and the score associated with that word across the topics. Topic scores for an entity are normalised in order to allow consistent comparisons across entities. Large numbers of Entity Topic Models can be produced in this approach, from which Latent Entities can be calculated.

4.6 Latent Entity Clustering

Clustering was proposed as a potential means of extracting Latent Entities from a collection of Entity Topic Models, specifically the k-means method. The scikit-learn library contains a range of clustering implementations, including a simple k-means algorithm that produces a k-means classifier object.

With Entity Topic Models stored in the system's DB, the process of calculating Latent Entities begins by querying for the model of each entity. After formatting the results of the query using the Numpy library the K-Means clustering process can take place.

The result of the clustering process is a set of center clusters, each of which represent a Latent Entity Model in a format mirroring the structure of the input. Once the Latent Entity Topic Proportions are determined through clustering, a mapping of Entity Topic Models to Latent entities can begin. The Euclidean distance in Topic Space between an Entity Topic Model and Latent Entity Model indicate the degree to which an entity is represented by a Latent Entity.

Figure 15 shows a scatter plots for 648 Entity Topic Models. When presented in this format it is somewhat visible that there are some potential clusters or underlying structures. Significant topics in this form for entities extracted from 3 narratives are Topics 3, 4, and 8.

With only 3 narratives there is the potential for the diversity of topics derived from the GETM to be too low to be of practical use, the lack of diversity manifests itself in the similarity of each Entity Topic Model in Topics 0, 1, 2, 5, 6, 7, and 9. An alternative interpretation is that there is going to be some degree of similarity between entities, and there could conceivably be a minimum set of similarities that exist between all entities in a corpus. The consequences of this

in the implementation is seen when selecting numbers of Latent Entities as well as the number of topics to calculate in other stages.

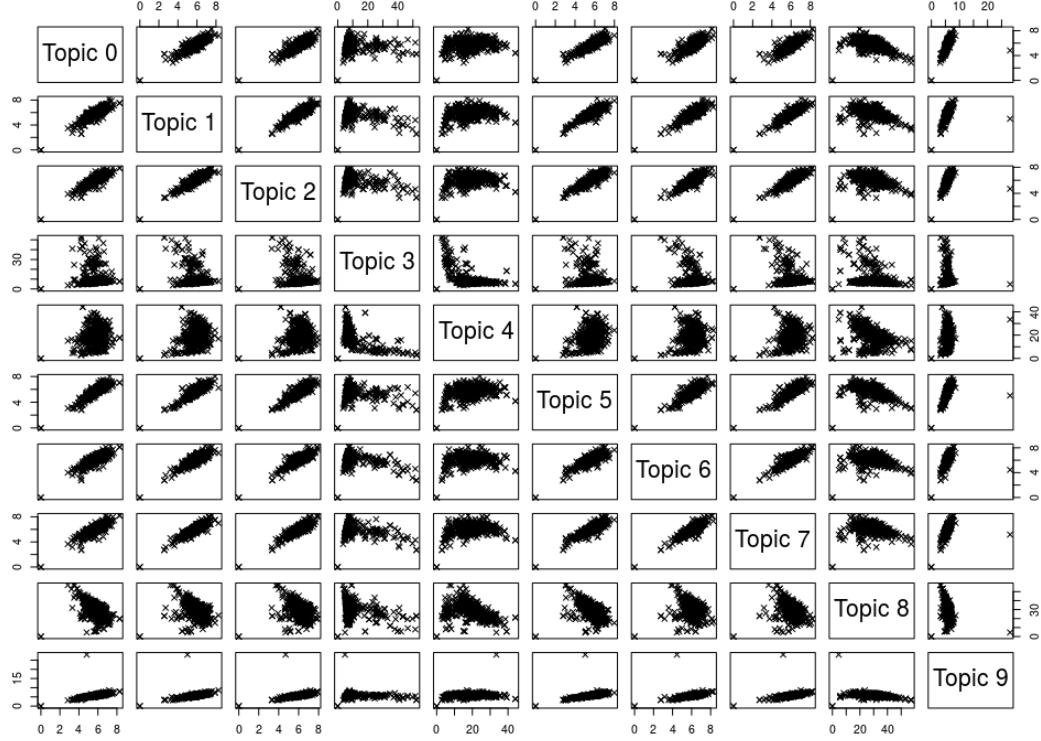


Figure 15: Pairwise Matrix of Scatter Plots for Topic of a Collection of Entity Topic Models.

4.7 Latent Entity Explorer

The interface for the exploring Latent Entities was designed from a personal perspective as a result of its use in supporting the development of other aspects of the system. Implemented using TypeScript and the Angular 5 web framework, the application allows for system to be designed in terms of components, which correspond effectively to the stages seen during the development of the analysis pipeline.

The implemented structure of the application can be seen in Figure 16, the application interacts with the server entirely through a simple Angular 5 service. The Explorer API Service is essentially a singleton class which each other component has access to, it makes available methods necessary for issuing requests and receiving responses and does so using an Observer/Subscriber approach.

There are 4 main components for the application, three of which are controllers involved in allowing users to explore books, topics, and entities. The fourth Controller is a higher level component that co-ordinates across all elements of the application. In addition to each controller is an equivalent view that allows the user to interact with that aspect of the system. The Explorer View is composed of the other views of the application, when users interact with UI elements, it is through the Explorer View.

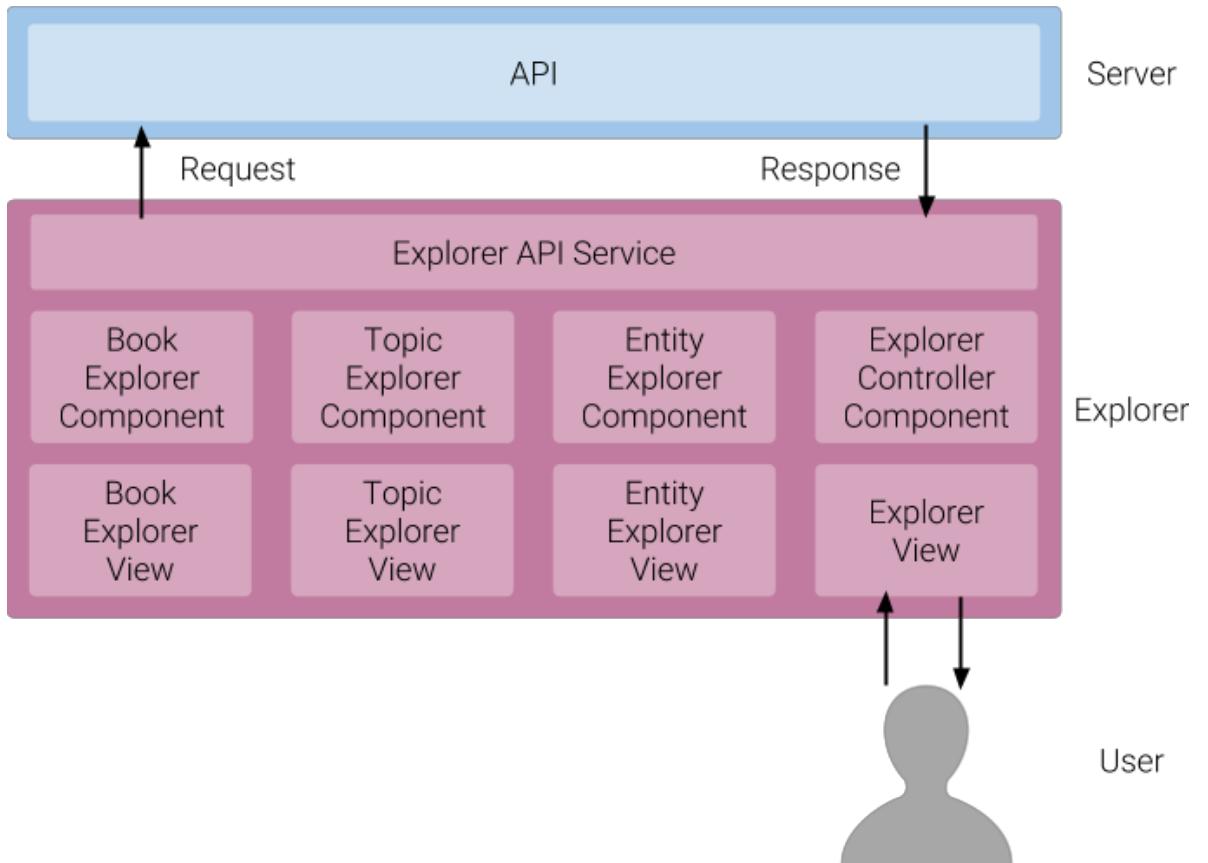


Figure 16: Structure of the Web Application.

4.7.1 UI and Navigation Design

In order to provide a succinct and mobile friendly interface, each element of the system is thought of in terms of components and panels. Each panel provides access to a distinct feature, be it a visualisation of topic distributions in the corpus, or the comparison of entity topic models. Each panel is associated with a component that acts as a controller for that UI element. Though this thesis is not a study of effective UI design, having a usable interface assists in communicating the results of analyses.

Figure 17 shows initial layout and structure intended to guide the UI of the application. Each panel is of a fixed size, and shows information about a specific aspect of the corpus. Listings of book titles, entities, and topic terms will all be held within separate components. The interface read from left to right, top to bottom, and as progressing though the application, different elements are required to be selected so that more information can be displayed.

Latent Entities are models describing the entire corpus, so wouldn't require the user to specify any information. In order to view Topic Models and information about individual entities in a book, the user would be required to first select a book, and then select an entity to view information about that entity.

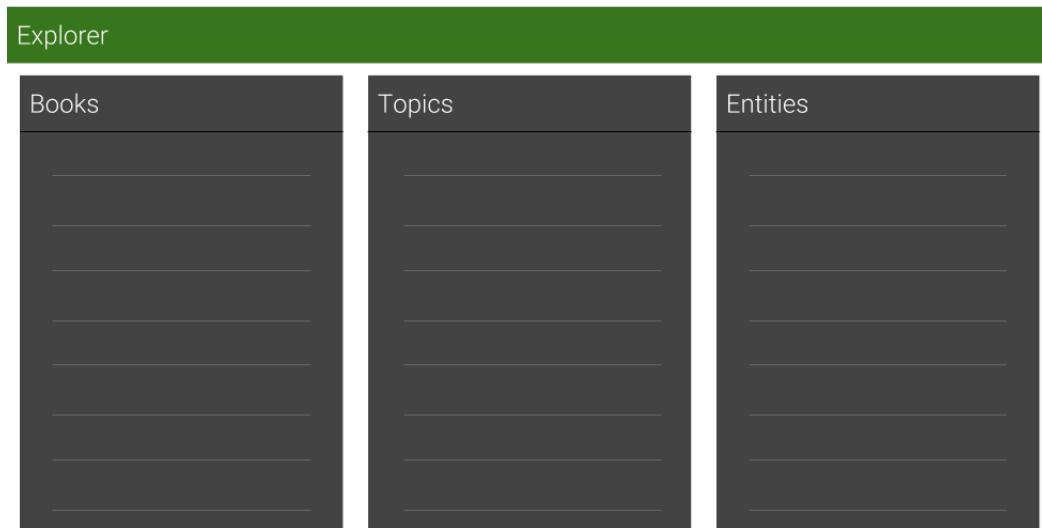


Figure 17: UI mockup layout.

4.7.2 Book Explorer

The Book explorer provides an interface for searching and selecting books analysed in the system, so that data and extracted information resulting from the analysis pipeline can be viewed. Split into two elements, the controller for this part of the application allows users to search for books that have been analysed, as well as initiate requests for book information through the API Service when users select a book. The view elements of the Book Explorer follows the panelled style outlined when discussing the UI and Navigation Design.

Delving into details of the corpus begins with the Book Explorer, for users to view entities and

thus information about entities, they must first select a book from the listing of analysed books. Upon selection, the Book Explorer component emits the title of the book that was selected, which is received handled by the accompanying Topic and Entity Explorer components. In addition to emitting events to other component, the Book Explorer invokes method of the API Service for making requests to the server.

Visualising information at a book level is not of particular interest to this investigation, as such the only visualisations associated with each book is actually of the topic distributions and is handled in the Topic Model Explorer component. It is however through the book explorer component that user can signal to other components which entity and topic information it is they wish to view.

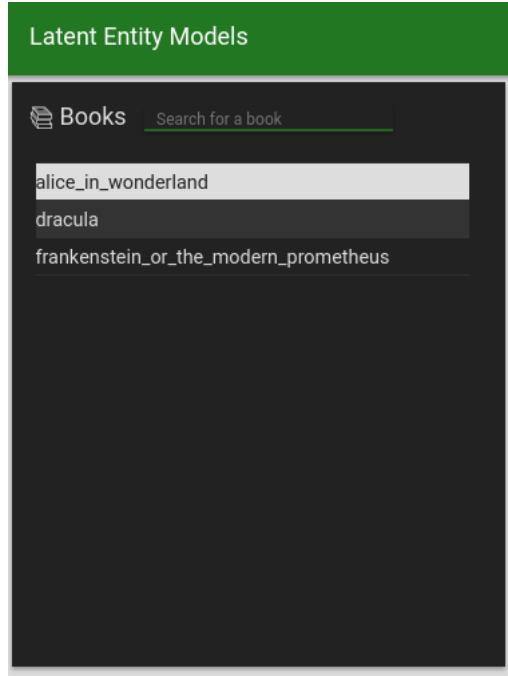


Figure 18: Book Selection Component for Navigating the Explorer.

Figure 18 shows the panel for selecting books, once the user selects a book, a collection of entities and the numerical topic distribution for the selected book is requested from the server. The search operates by making a request through the API Service for book titles containing the entered string.

4.7.3 Topic Explorer

The Topic Explorer is a key component of the application as it provides book level topic information extracted from a corpus, some information about the topics extracted using LDA, as well as the topic distributions for a document selected in the book explorer. Additionally, there is an exploratory visualisation for comparing the topic distributions of each document in the corpus.

The book-topic distributions are presented in the form of a stacked bar chart, where each block on the stack represents the proportion of the document that a topic represents the document. Each colour in the stack represents a different topic, with the same colour representing the same topic across each stack for each document, the panel in the application for this visualisation is shown in Figure 19.

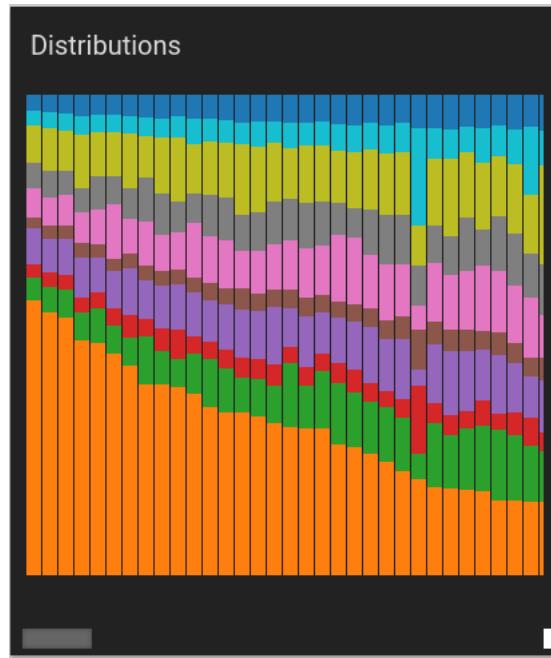


Figure 19: Book-Topic Distribution Panel for Comparing Topical Makeup of the Corpus.

The construction of the chart is done dynamically, making a request for the topic distributions of analysed books in the system. For larger corpora, the application would be issuing requests and producing the figure for 100,000's of documents, however for this prototype and with complete control over the size of the corpus, this is not an issue that would be encountered. As the

visualisation is data-driven using the d3.js library, it is possible to interact and inspect elements of the figure. Users can sort the graph from highest to lowest on topic distribution. Meaning that users can see which book is most represented by each topic. Presenting topics in this way allows for quick visual comparison of documents and topics, as well as providing insight into how a documents topic structure may have an effect on the Entity Topic Models topical make up.

When a document is selected from the Book Explorer, this component uses the emitted book title and the API Service to make a request for the numerical topic distribution of the chosen book. The percentage proportions of topics in the document are shown in a panel in a listings format, and allow individuals to compare Entity Topic proportions to the Document the entity resides in. Figure 20 shows what the user would be presented with.

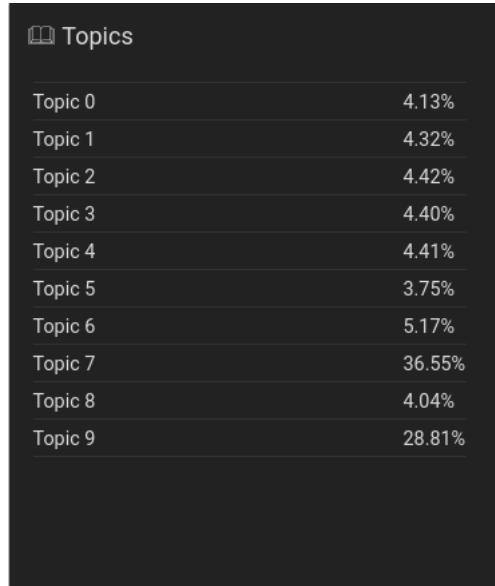


Figure 20: Book-Topic distributions for a Selected Book.

4.7.4 Entity Explorer

The Entity Explorer Component handles each panel associated with Entity information. Including the selection of entities for further inspection and comparison with other entities, as well as any visualisations for an entity.

When an entity is selected in the Book Explorer component, the Entity Explorer component

is signalled that the user has made a request for more information, the component then makes a request through the API Service to the server, requesting entity information for the selected book. Figure 21 shows a view of all entities extracted from the selected book, users can click on an entity to view the Entity Topic Model of that entity, or press the green addition box to add it to a entity comparison panel. Similarly to the book listing panel in the Book Explorer component, users can search for entities using text to filter entities not containing the query string.

When selecting an entity to be added to the comparison view, the entity is not removed from the listing, and can still be selected for a more detailed inspection if desired. The entity cannot however, be added to the entity comparison panel if it is already present. The Entity Explorer component maintains an array of Entity JSON Objects to allow the tracking of inspected entities.

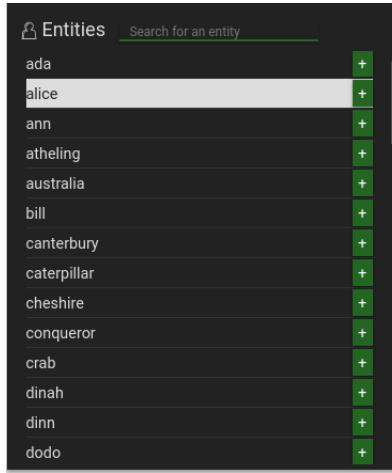


Figure 21: Entity Listings for the Selected book (Alice’s Adventures In Wonderland)

When an entity is selected for further inspection, users are presented with a breakdown of the Entity Topic model and GETM results for that entity. Figure 22 shows the topic distributions for the selected entity 'Alice' from Alice's Adventures Into Wonderland, the significant topics for this distribution are Topics two and seven. A visualisation of this distribution, would not be so informative given the position of the panel in relation to the other panels. Users can compare the percentage proportion of a topic in this panel to the percentage proportion of the topic in other components.

alice topic Distributions	
Topic 0	5.95%
Topic 1	5.96%
Topic 2	22.55%
Topic 3	7.98%
Topic 4	5.51%
Topic 5	6.04%
Topic 6	5.81%
Topic 7	28.40%
Topic 8	5.84%
Topic 9	5.97%

Figure 22: Entity Topic Distributions for Entity Topic Model.

wonderland	
believed	0.5
slate-pencil	0.5
choking	0.5
rippling	0.5
sheep-bells	0.5
reality	0.5
miserable	0.5
tinkling	0.5
cries	0.5
rustling	0.5
crashed	0.3333333333333333
rattling	0.3333333333333333
suppressed	0.3333333333333333
distant	0.3333333333333333

Figure 23: Top Terms Associated with Entity resulting from GETM.

In order to provide some user insight into terms associated with an entity that contribute to an entity’s topic model, a panel was formed listing the terms and their strength. Figure 23 shows the most prominent terms for the entity ‘Wonderland’ in Alice’s Adventers in Wonderland. As entity terms were filtered when calculating the GETM, the term ‘wonderland’ associated with the Entity ‘Wonderland’ are not actually referring to the same thing.

The panel for comparing entity topics is shown in figure 24, which is the primary interface through which users of the system can begin to compare the topic models that represent an entity. Where entities were added using the ‘+’ in a green box on the entity listing panel, entities can be removed from the comparison panel by pressing the ‘-’ in a red box.

Entity Comparisons											
Entity	Topic 0	Topic 1	Topic 2	Topic 3	Topic 4	Topic 5	Topic 6	Topic 7	Topic 8	Topic 9	
queen	4.69	4.47	37.59	6.10	3.97	4.49	4.52	25.63	4.27	4.26	-
alice	5.95	5.96	22.55	7.98	5.51	6.04	5.81	28.40	5.84	5.97	-
dracula	4.97	5.43	7.16	15.69	4.85	5.67	4.84	40.82	5.19	5.38	-
frankenstein	5.41	5.92	6.43	29.55	5.65	5.78	5.71	23.92	5.72	5.91	-
victor	5.35	5.82	6.23	27.84	5.46	5.76	5.48	26.65	5.58	5.83	-

Figure 24: Entity Comparison Panel for inspecting Entity Topic Distributions

Chapter 5

Results and Evaluation

5.1 Introduction

This chapter serves as an opportunity to numerically explore and evaluate the methods and models that have been implemented and discussed in previous chapters. Each aspect of the system is to be evaluated from the perspective of their effectiveness at extracting meaningful information from a corpus. Four key aspects to the system will be quantitatively and qualitatively assessed, including the implemented POS tagger, Gaussian Entity-Term Matrix, GETM Entity Topic Models, and Latent Entity Models.

In order to evaluate many of the defined methods, a corpus must be constructed. As such, this evaluation also explores the structure of the corpora intending to be used to evaluate the whole pipeline. The selected corpus will be also be compared to a larger corpus of documents, this will provide an estimate as to whether the chosen corpus is an appropriate for the task of evaluating the system.

By exploring the results of the implemented methods on the chosen corpus, it is possible to gain insight into the value and worth that the models may have to individuals looking to understand corpora of data that surrounds them.

5.2 POS Tagger

Being a key part of the pre-processing aspect of this investigation, it is necessary to consider the impact that the choice of POS tagger may have on the system. If the implemented POS tagger was not as performant as seen in literature, then it could be used to explain drawbacks within the system.

Unlike Topic Modelling, evaluating the performance of a POS tagger is a more straightforward task. The implemented tagger was evaluated on the Brown corpus, using a randomly sampled 80:20 division of the corpus into training and test samples. Across both subsets, the corpus contained a total of 57,340 sentences and 1,161,192 words, forming a sizable dataset from which a model can be trained.

5.2.1 Results

An overall accuracy of 73% was achieved for the method, which is a significantly higher score than randomly applying tags would score, however it is still noticeably lower than scores seen in literature. As the purpose of POS tagging in this thesis is for the filtering of specific types of tags, it is necessary to consider the effectiveness of the tagger on different POS tags.

The tagger classified almost all Verbs in the test set, however when it missclassified parts of speech, they were often missclassified as verbs, which naturally increases the number of successful tags. Notably, the tagger never tagged something that wasn't punctuation, as punctuation, however it failed to correctly label all punctuation in the test set, missing approximately 30%. Table 14 shows a breakdown of the performance of the POS tagger for each possible POS class, it shows the number of times a tag was correctly, and incorrectly applied to a word, as well as the actual number of words with that class in the test set. Finally, Table 14 also shows the percentage of correctly classified words for each pos tag, as well as the percentage of words that were incorrectly labeled as that tag.

It is concerning to see that 85% of the terms tagged as 'NUM' were actually something else

as it is one of the classes that would be filtered from the GETM. For almost all cases of misclassification, terms were incorrectly labelled as being a Verb.

One possible explanation of the missclassification is a result of the basic nature of the tagger, when the system has not encountered a word before, it is unsure of what to tag it as. It turns out that in the implementation, the tagger's default classification is a Verb. An interesting feature of the brown corpus is that roughly half of the vocabulary are hapax legomena, leading to a high likelihood that the test set would contain terms unseen to the model.

POS Tag	Correct (n)	Wrong (n)	Actual (n)	Correct Class	Misclassified
NUM	364	2087	487	0.75	0.85
ADV	3747	442	5357	0.70	0.11
PRON	6097	185	7353	0.83	0.03
ADP	6337	420	9630	0.66	0.06
DET	7191	53	10113	0.71	0.01
X	5	6	124	0.04	0.55
NOUN	10606	365	17692	0.60	0.03
ADJ	3378	301	5492	0.62	0.08
PRT	2438	282	3446	0.71	0.10
.	10870	0	15505	0.70	0.00
CONJ	2258	16	3326	0.68	0.01
VERB	16585	21409	16917	0.98	0.56
Total	69876	25566	95442	0.73	0.27
\bar{x}	5823.00	2130.50	7953.50	0.66	0.20
σ	4903.48	6097.28	6117.22	0.22	0.29

Table 14: Table of POS Tagging Results

5.3 Evaluation Corpora

Before starting any evaluation involving natural language text, it is important to consider corpora that may be suitable for use in analysis. This thesis considers a pairing of corpora where one consists of a series of novels, and the other consists of summaries of the opposing novels. The same corpora will be used in the evaluation of both the GETM, and Latent Entity models. By comparing summaries of novels to the full books, there is potential for insight to be gained regarding the consistency and ability of the models when used in a document summary context. In order to comply with UK Copyright law, books could only be considered

as candidates if they were legally available to the author of this thesis.

Whilst only forming a relatively small corpus, the Harry Potter series by J. K. Rowling were selected as the narratives through which the evaluation of the thesis could be carried out. This is for numerous reasons, firstly, it is known that there are characters present throughout the series, as well as some that aren't. By having entities that aren't ubiquitous it is possible to gain insight into why there may be differences in any consistency tests. Another important factor in the use of these documents, is that they are familiar to the author, and thus a qualitative insight can be provided when evaluating the interpretability and cohesion of the models.

5.3.1 Harry Potter Corpus Statistics

The Harry Potter corpus contains 1,414,420 words ($\bar{x} = 202060$), with a total of 3275 entities extracted from all documents. Topic distributions of the Harry Potter novels are shown in table 15, knowing these distributions will show if there is potential for differences in entity topic models describing entities common through the series. Figure 25 visually shows some of the differences between the documents in the corpus.

Notably, there is only significant variance in three out of the ten topics across the novels. which manifests itself through the changing distributions shown across the stacked bar chart. whilst the other topics do see noticeable changes in proportions, none are quite as significant as topics 1, 3, and 8. Which on a corpus of related documents, should not be overly surprising. For comparison, figure 26 shows topic distributions for a corpus of over 300 narratives, including the Harry Potter novels which are highlighted by the black rectangle. The variation between the novels is even less when viewed in the context of a wider corpus.

One of the factors influencing the distinct similarity between narratives in the larger corpus is the inclusion of entities as terms when calculating the LDA topic models, for the reduced corpus of Harry Potter novels, the entities have been removed. When entities were left in as terms for calculating topics, the method distinguished between novels based on the characters, as opposed to any differences in writing style. With entities left within the calculations, Harry Potter and The Prisoner of Azkaban as well as Harry Potter and the Order of the Phoenix

Book	Topic (%)									
	0	1	2	3	4	5	6	7	8	9
Philosopher's Stone	5.16	19.62	5.45	22.29	4.94	5.09	7.04	5.31	20.15	4.96
Chamber of Secrets	4.77	19.73	4.83	15.51	4.54	4.91	10.80	5.02	25.06	4.82
Prisoner of Azkaban	4.33	33.30	4.27	14.21	4.01	4.40	5.50	4.22	21.61	4.16
Goblet of Fire	4.68	19.82	4.67	16.09	4.31	4.69	5.94	4.71	30.60	4.48
Order of the Phoenix	4.66	25.97	4.54	16.07	4.40	4.68	6.22	4.72	24.08	4.67
Half-Blood Prince	4.77	20.05	4.58	17.20	4.35	4.69	6.04	4.78	28.92	4.62
Deathly Hallows	4.88	18.61	4.58	23.68	4.47	4.82	6.27	4.80	23.27	4.62
\bar{x}	4.75	22.44	4.70	17.86	4.43	4.75	6.83	4.79	24.81	4.62
σ	0.25	5.37	0.37	3.63	0.28	0.22	1.81	0.33	3.77	0.25

Table 15: Topic Distributions for the Harry Potter Novels by J. K. Rowling

Topic Distributions for the Harry Potter Series by J. K. Rowling

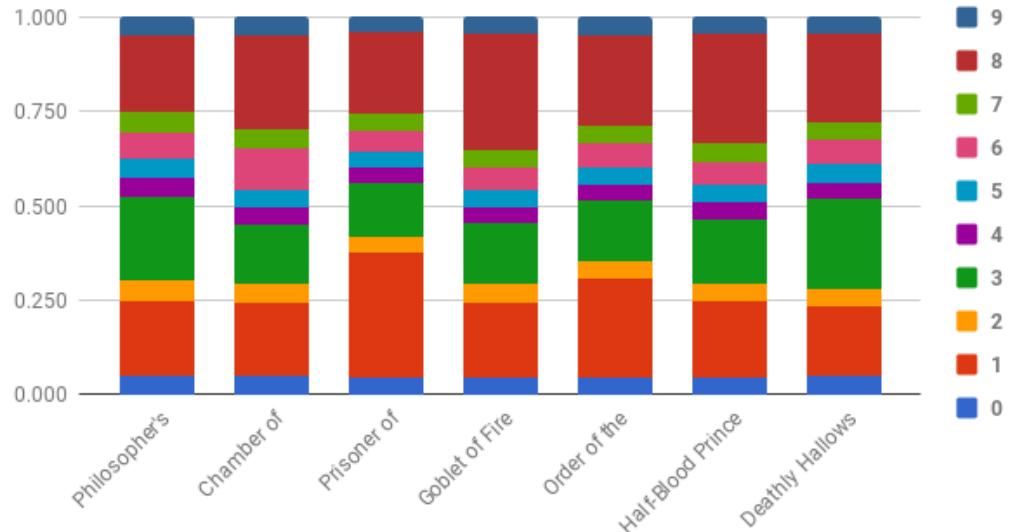


Figure 25: Proportional Topic Distributions for the Harry Potter Novels by J. K. Rowling

were indicated as being very similar documents. When inspecting the topic word distributions, the topics most strongly representing these documents were made up of terms like 'sirius' and 'black', which are referring to an entity prominent in both documents.

Without considering entities within the documents, the distributions are much more similar, however there are still differences between them. Some degree of similarity within documents is expected, given that they are from the same series, and oriented around the same sort of stories.

Key terms in the word-topic distributions can be seen in table 16, considering the terms that

form the topics might provide some insight into why some documents in the corpus deemed so topically similar. However with topics-word of 1000 terms, viewing a small portion might not provide accurate insights.

Many of the topics are actually very similar with regards to the terms which they contain. The term 'elf' is ranked within the top ten for all topics. Whilst the term 'Ought' occurs as a top ten in eight topics. This not only highlights the significance of many of the terms, but also suggests a lack of diversity in the vocabulary for each document. Some terms however are not present through each novel, but still remain present across multiple topics, including 'triwizard' which is prominent only in 'Goblet of Fire'.

With regards to the coherence of the topics there is little semantic relations between the terms of topics, however within the context of the novels some relationships can be identified, for example, in topic 2 the terms 'goblins', 'vault', 'locket', and 'horcruxes' are all related within the novels. Within the Harry Potter universe, the banking vaults are managed and guarded by goblins, whilst a significant item often simply referred to as the 'locket' was a horcrux. Additionally, a horcrux was also stored within a vault guarded by goblins.

0	1	2	3	4	5	6	7	8	9
diary	elf	tent	dementors	elf	elf	tent	elf	elf	dementors
heir	apparently	elf	elf	tournament	map	dementors	lesson	task	firebolt
elf	dementors	locket	remained	map	remained	elf	surface	tournament	lesson
prefect	homework	goblins	hastily	task	tent	ought	task	prime	dementor
attacks	ought	horcruxes	apparently	dementors	task	lesson	ought	lesson	homework
clicking	position	ought	triwizard	apparently	locket	prime	gazing	apparently	map
toilet	lesson	dementors	highly	ought	ought	task	elves	hastily	gazing
petrified	tone	vault	tent	triwizard	dementors	apparently	map	map	elf
camera	thoughts	apparently	thoughts	troll	lesson	locket	dementors	triwizard	ought
wife	ropes	remained	ought	lesson	conversation	thoughts	prime	remained	rat

Table 16: Top Ten Words in the Topic-Word Distributions of Calculated Topics for the Harry Potter Corpus

5.3.1.1 Large Corpus Topic Distributions

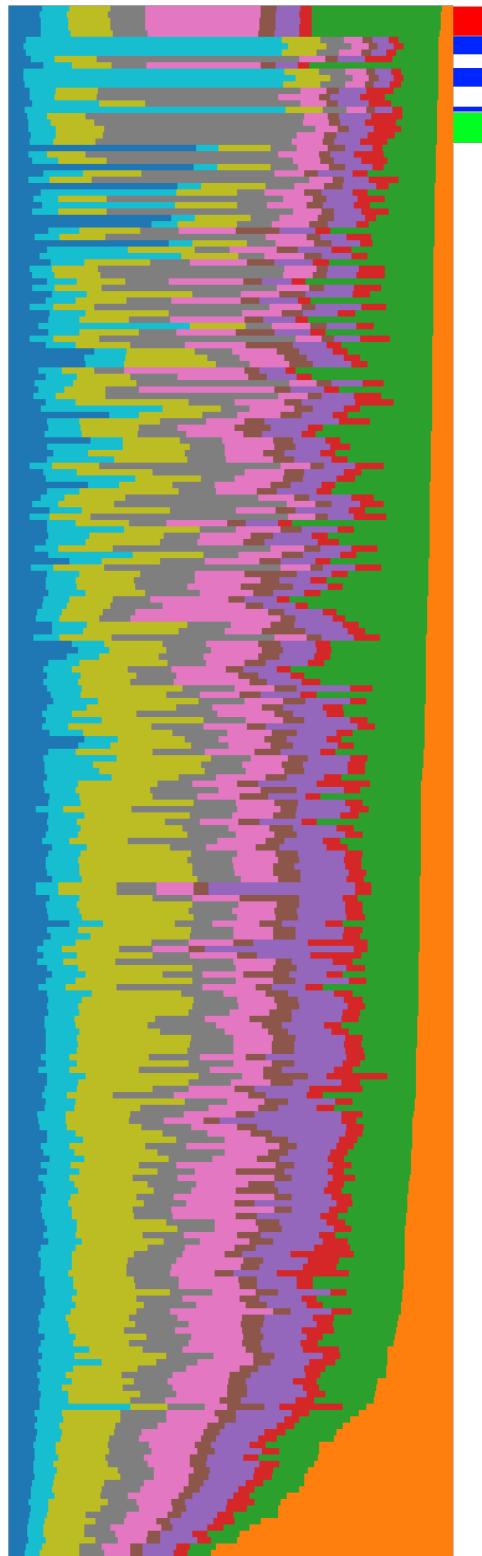


Figure 26: Book Topic Distributions for a Large Corpus of Fiction and Non-Fiction Books

When you consider the topical structures of large corpus of documents, you can see how there are groups of documents have distinctly similar topic distributions, particularly when ordered by the contribution that a topic makes to a documents distributions. Three document groupings are highlighted in figure 26, where each colour represents a topic and each line represents a document. Larger blocks of colour indicated a larger contribution that a topic has to a given document distributions.

The set of rows indicated by the red tab to the right of the image are books written by the author G. R. R. Martin, and include the novels behind the popular TV show 'A Game of Thrones'. The the rows indicated by blue tab are the Harry Potter novels that are used to evaluate other aspects of the project, the rows indicated by the green tab are narratives written by Agatha Christie.

It turns out that for this large and diverse corpus, the topics that have been extracted are oriented around narratives that exist as part of a larger series, or books that are similar in subject matter. Whilst Topics 5 (pink), 6 (grey),

and 8 (cyan), are essentially topics describing books written by G. R. R. Martin,

Agatha Christie, and J. K. Rowling respectively, other topics are strongly indicative of writings by other authors.

Topic 3 (red) is a relatively small portion of all narratives, however the books that this topic represents the most are all novels by Dan Brown. In contrast, topic 0 (orange), which represents a large proportion of many narratives which are largely factual or physics related documents, with the books most represented by the topic being authored by Richard Feynmann.

Whilst the focus of this investigation is not necessarily on the book level topic models of narratives, it is interesting to see how topic models can represent differences in an authors writing. It suggests that they are are distinct differences between some authors, whilst there remain major similarities between others.

One concern is that in large series of narratives, entities are often present throughout each document, and can result in any given topic's word distribution consisting primarily of entities from a series. When looking closer at the terms that form the topics, there are some topics that almost entirely consist of entities, whilst others are general terms relating to a specific subject.

The top terms for topic 8 are: 'Harry', 'Ron', 'Hermione', 'Percy', and 'Annabeth'. With 'Harry' being scored as twice as representative as 'Ron', which was labelled as the second most prominent entity. When considering the makeup of Topic 8, it is then clear why the Harry Potter novels feature such a high proportion of the topic.

The top terms for topic 0 are: 'Energy', 'Field', 'Example', 'Species', and 'data'. When looking at these terms, it is unsurprising to see that non-fictional and scientific documents receive a high proportion of the topic.

Agatha Christie novels are strongly represented by topic 6, the top terms of which are: 'Poirot', 'Mr', 'Miss', 'Mrs', and 'Sir'. When looking in one Agatha Christie novel, 'The Mysterious Affair at Styles' There are 419, 180, 125, 234, and 113 mentions of each term respectively which clarifies why these documents are associated with this topic.

The primary take away from this figure, is that the topic modelling applied to the whole corpus

has been able to produce groupings of related documents without any information other than the terms within them. Whilst this is not a new finding when considering other literature, it serves as indication that the use of novels as a basis for corpora does allow topic modelling methods and to perform effectively. As the book level topic distributions across the Harry Potter corpus are somewhat similar, there is potential for entity topic models to vary for reasons aside from the novel they are in. Additionally, when considering the impact that entities have on the calculation of topic models, it justifies the removal of them when calculating Entity Topic Models using the Gaussian Entity-Term Matrix.

5.3.2 Harry Potter Summary Corpus Statistics

A second corpus is formed of summary documents for each of the Harry Potter novels by J. K. Rowling. The summaries are scraped from free online literature summary site 'SparkNotes' which compiles summaries of documents written by university graduates specialising in the subject being summarised. [57] The purpose of this corpus is to allow contrasts and comparisons to be made to the corpus of full Harry Potter novels, and to also serve as a corpus to consider the consistency of the Latent Entity Modelling approach across corpora.

The summary corpus consists of 7 documents, with a total of 11,621 words ($\bar{x} = 1660$) and a total of 317 entities ($\bar{x} = 45$). The book level topic distributions are shown in figure 27, whilst this corpus is not expect to provide as many interesting insights into any hidden relations between entities of a narrative, it can serve as a means of evaluating elements seen as significant in the corpus of full Harry Potter ovels.

Books	Topic (%)									
	0	1	2	3	4	5	6	7	8	9
Sorcerer's Stone	12.38	8.35	12.56	8.39	8.18	8.70	8.43	8.08	16.42	8.51
Chamber of Secrets	9.54	8.52	10.80	9.25	8.27	8.64	8.89	8.30	19.34	8.44
Prisoner of Azkaban	9.60	8.03	15.71	8.35	8.06	8.50	8.48	8.02	16.77	8.48
Goblet of Fire	9.27	8.15	11.94	8.58	8.20	8.78	8.31	8.23	20.14	8.41
Order of the Phoenix	9.35	8.15	10.84	8.51	8.23	8.75	8.47	8.43	20.69	8.60
Half-Blood Prince	9.17	8.15	10.51	8.42	8.25	9.75	8.41	8.23	20.79	8.33
Deathly Hallows	9.28	8.03	10.59	8.38	8.01	8.68	8.07	7.90	22.91	8.15
\bar{x}	9.80	8.20	11.85	8.55	8.17	8.83	8.44	8.17	19.58	8.42
σ	1.15	0.18	1.87	0.32	0.10	0.42	0.24	0.18	2.31	0.15

Table 17: Proportional Distributions of Topic Models for the Harry Potter Novel Summaries.

The significant topics for the summary corpus are topics 8 and 2, with most other topics having a roughly equal distribution throughout each document. The most amount of variance is also seen in topics 8 and 2, with topic 1 also seeing some noticeable differences between the Sorcerer's stone and the rest of the corpus.

In a similar way to the full corpus of novels, the top terms forming extracted topics are difficult to interpret. There is loose semantic and context appropriate meaning between some terms in certain topics, for example topic 3 contains the terms 'known', 'information', 'news', 'teaches' and 'knows', all terms that could be described as related conceptually.

Topic Distributions for the Harry Potter Summary Documents.

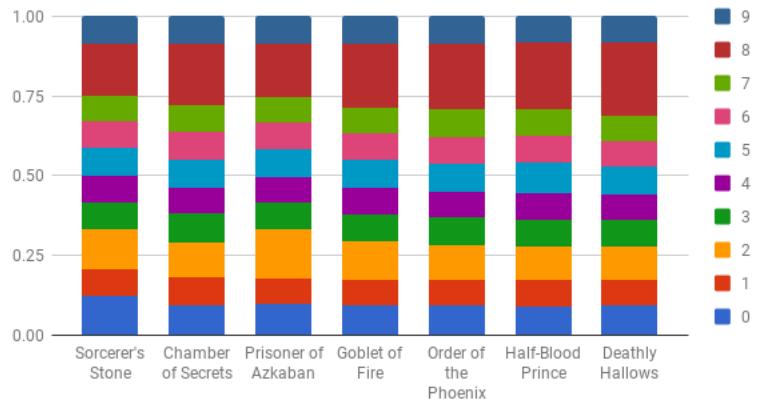


Figure 27: Topic Distributions for Summaries of Each Harry Potter Novel.

0	1	2	3	4	5	6	7	8	9
professor	turns	flying	known	locket	locket	stone	outside	stone	elf
dog	winning	including	information	teaching	wand	sleep	forbidden	face	boys
dementors	realizes	wands	meet	way	night	following	takes	later	girl
night	ability	says	news	tower	friends	takes	day	tells	giant
large	soul	demanding	members	mr	mr	frustrated	announces	sees	left
later	magical	triwizard	teaches	named	eaters	hospital	informs	gets	cat
broomstick	mysterious	giant	knows	room	killed	moving	hoping	train	awful
game	away	padfoot	forest	wand	horcrux	brings	arrives	wizardry	night
parents	attack	divided	wakes	horcruxes	order	bathroom	godfather	dog	killed
time	game	voice	heart	members	new	street	corridor	named	return

Table 18: Top Ten Words in the Topic-Word Distributions of Calculated Topics for the Harry Potter Summary Corpus

5.4 Gaussian Entity-Term Matrix

Whilst the Gaussian Entity-Term Matrix (GETM) was defined only as a means overcome particular prior assumptions in literature it is necessary to evaluate the quality of associations formed within the matrix. Should the quality of underlying associations be poor, then the Entity-Topic models and Latent Entity Models will never be able to accurately capture entity structures within narratives. Whilst the reason for evaluating the GETM is similar to the rational behind evaluating the POS tagger used, the method for doing so is very different.

Without a pre-existing model or any testing dataset, evaluating the GETM can be done by considering the impact that using the GETM has on the performance of Entity Topic Models, or Latent Entities. Additionally, the consistency of the model across similar corpora can give insight into potential benefits and drawbacks of the method. There is potential for a consistency metric to be considered for comparing two sets of GETMs, however a quick and approximate evaluation can be carried out by visually comparing and inspecting the terms and entities identified as being significant.

The GETM is capable of identifying main entities in a novel as they would be strongly associated with a large number of terms in a narrative. This would result in large bands of colour being shown when the models are viewed visually in a heat map visualisation.

The exploration of the GETMs for both corpora of novels will provide insight into the quality of the method, as well as provide some insight into why some topics, terms and latent entity models may be extracted.

5.4.1 Harry Potter Corpus GETM

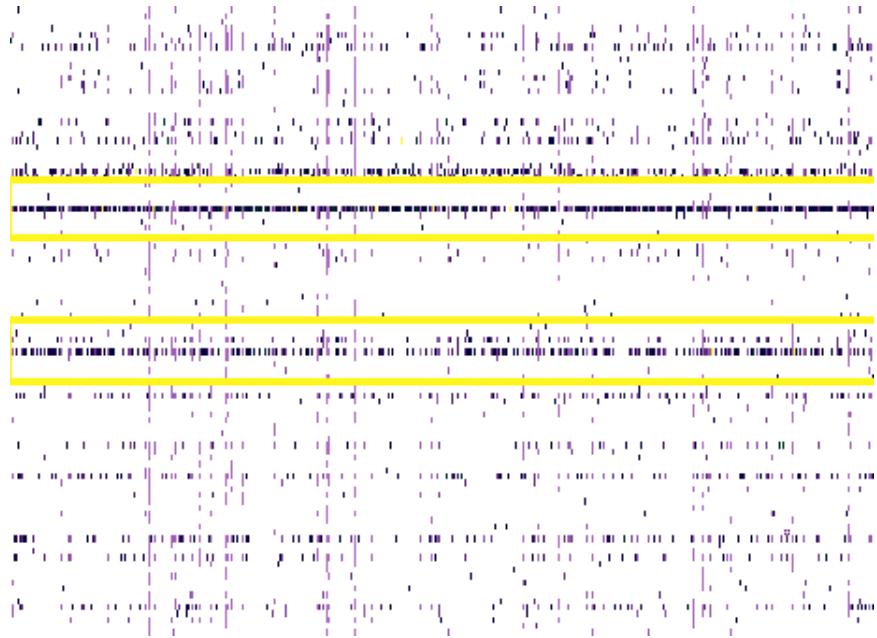


Figure 28: Portion of the Gaussian Entity Term Matrix for the full document of Harry Potter and the Philosopher’s Stone (Contrasts adjusted for clarity)

Displaying the GETM for a novel in a heat map form as shown in figure 28 really highlights the sparsity of associations between entities and terms, the darker coloured marks indicate an association between entities and terms. Only a select few entities really have some form of association with most terms throughout the corpus, with the majority of entities only having some degree of association with snippets of terms. In the context of a novel, this is a seemingly obvious observation, characters are frequently only present for specific scenes and portions of a book, and the Harry Potter novels distinctly follow this structure, with entities like ‘Katie Bell’ being present in numerous books of the series, but mainly occurs in scenes oriented around the fictional sport of ‘Quidditch’.

The significant Entities visible from the GETM are those forming dark coloured bands across the darker purple, the most distinct bands are highlighted for clarity by the yellow boxes. The highlighted bands for this portion of the GETM in figure 28 are ‘Harry’, and ‘Ron’. In the full GETM, entities ‘Hermione’ and ‘Hagrid’ are also significant bands. Notably, each highlighted entity are characters of great significance to the story.

With respect to the rationale behind development of the method, the GETM does successfully apply a limit to the degree of association between entities and terms. Further exploration is required to evaluate the effects of the GETM on the calculation of entity topic models and latent entities.

The most significant entities in the philosophers stone according to the GETM are showed together in figure 29. The Term Matrix also encodes the significance that a term has to one entity in relation to its significance to other entities. Whilst there are light bands that show association between entities and terms, there are only a limited number of terms that significant to other entities..

Scaling from white to dark purple, as a term reaches the darker end of the spectrum, the stronger the association there is between the entity and the term. In order for terms to reach the dark end of the spectrum they must be associated strongly with an entity, whilst not being associated with other entities.

The top band in figure 29 shows the entity-term associations or the entity of 'Harry', some of the most significant terms include 'bloodcurdling', 'interesting-looking', and 'unbroken'. The consequences of these term associations would be seen when deriving Entity Topic Models, when calculating the topic models any word distributions for topics that place emphasis on these terms will form larger proportions of the Entity Topic Model for that entity, this will then have a knock on effect when calculating Latent Entities.

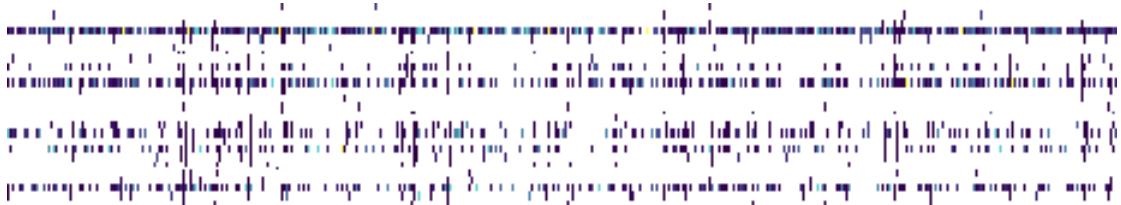


Figure 29: Significant Entities seen in the GETM for Harry Potter and the Philosopher's Stone. (Contrasts adjusted for clarity)

5.4.2 Comparison To Summary Corpus GETM.

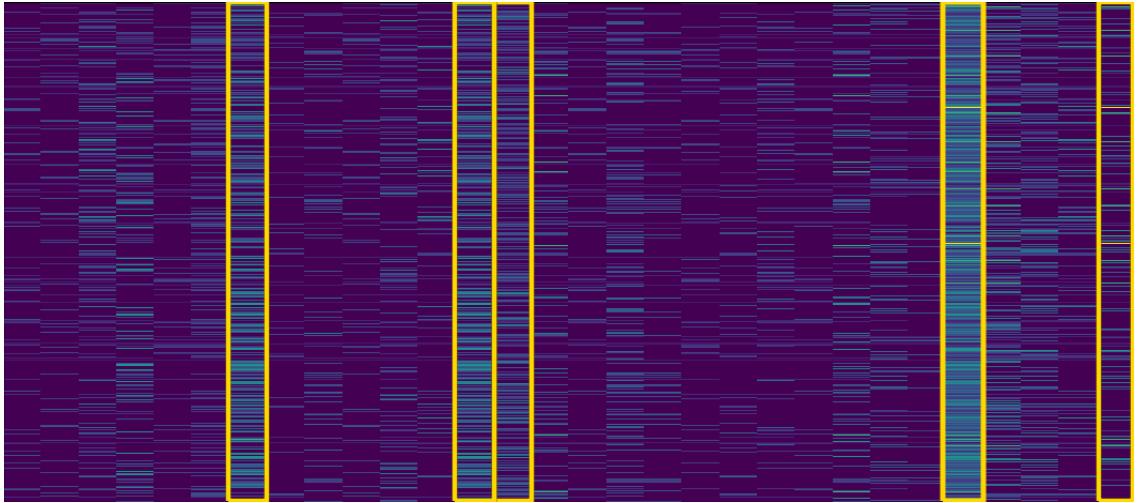


Figure 30: Gaussian Entity-Term Matrix for the Summary document of Harry Potter and the Philosopher's Stone.

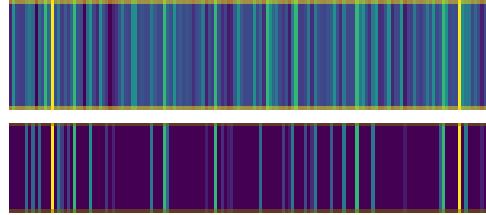


Figure 31: Magnification of GETM for 'Harry' and 'Quirrel' in the Summary of Harry Potter and the Philosopher's Stone

The corpus of Harry Potter summaries results in GETMs that are visually less sparse, each entity within it has a set of terms which they are associated with, with extensive overlap between many of the entities. Across each GETMS for the summary corpus, the major entities are 'Hagrid', 'Hermione', 'Ron', and 'Harry', which are highlighted by the first 4 yellow box from left to the right of figure 30, these entities have strong associations with all with almost all terms in the document as well as with terms accross the corpus, for this GETM describing the summary document for Harry Potter and the Philosophers Stone. Lighter colours in figure 30 and figure 31 indicate an association between an entity and term.

A notable quirk of the model is that the entities 'Quirrel' and 'Harry' strongly associate to common terms that other entities do not, perhaps suggesting an underlying relationship between those entities. Additionally, despite the relatively short length of the document there still remains terms that remain significant to some entities whilst remaining disassociated with others, this suggests that even accross shorter documents, assumptions made in literature regarding

the relationships that entities have to terms are fundamentally flawed.

Between the summary corpus and the corpus of full novels, the GETMs actually highlighted the same entities as being significant. Given that the summary corpus were written by academics with in depth knowledge about the Harry Potter novels, the fact that the GETM was able to highlight entities of actual importance is a somewhat positive result.

5.4.3 GETM Interpretation

The GETM was applied to numerous narratives, and whilst successfully identifying key entities of each document, some of the associations between entities and terms were explored. The GETM visualisation could serve as an additional utility that can assist academics in the interpretation of written narratives. When applying the method to Alice's Adventures in Wonderland, associations between terms and entities produced some interesting results that could be used in the interpretation of latent meanings in narratives.

Considering the novel Alice's Adventures in Wonderland, Figure 23 highlights the top terms associated with the entity 'Wonderland'. Whilst requiring a human interpretation (and some degree of artistic license), the GETM could be interpreted as describing 'Wonderland' as being nothing more than a 'Believed wonderland' and is in reality a 'suppressed misery'. Whilst interpretations such as these are subjective and often personal reflections of their experience with a narrative, it is notable to consider that it was a numerical device that assisted in the task of exploring the meaning of wonderland within the Alice's Adventures in Wonderland..

5.5 Entity Topic-Models

The use of a GETM was proposed as a means removing an assumption made in literature regarding the relationships which entities have with the topics within a document. It is therefore necessary to consider how the adapted approach affects the production of ETMs.

Replicating the assumption than an entity is related to all topics in a document can be attained by substituting the GETM weighting function with a function returning a constant value. This constant value places equal equal importance to terms in a document, as well as equal associations between entities and terms.

The resulting structure of Entity Topic Models would then be equivalent topic distributions for the whole document, which is acceptable when considering the relationships of Entity Topic Models within a single document as a single distinct group, it does not consider how entities within a document may actually vary and relate individually to other entities across a corpus.

Generally, the GETM has resulted in Entity Topic Models with topic distributions that are similar to book-level topic distributions. Whilst each Entity Topic Model is similar to the topic models of the document it resides in, the GETM does allow for variability between Entity Topic Models. The results of the entity topic modelling method implemented are explored in the corpus of full Harry Potter narratives as well as the summary documents.

5.5.1 Harry Potter Corpus ETMs

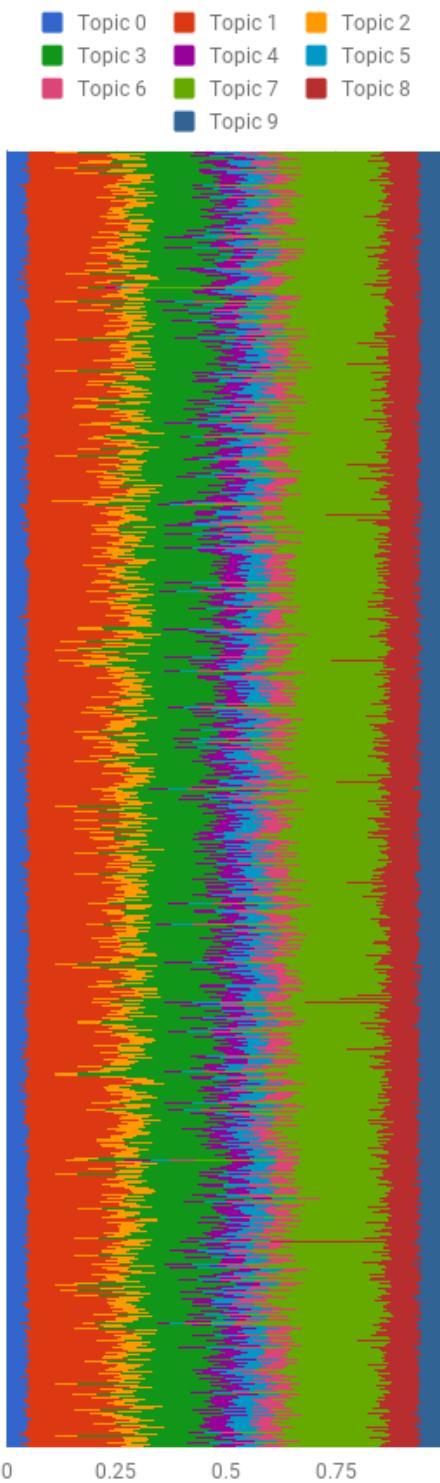


Figure 32: Book Topic Distributions for a Large Corpus of Fiction and Non-Fiction Books

The proportional distributions for all Entity Topic Models for the Corpus of Harry Potter novels are shown in figure 32. Entity Topic Models are grouped according to the origins of the entity that the Entity Topic Model describes. The top portion of entities represent those found in Harry Potter and the Philosopher's Stone. Distinct divisions of the novels are left out of the figure for clarity.

The general structure across Entity Topic Models is that topics 1, 3, and 7 are the most significant to all characters. This is somewhat different to the significant topics at a corpus level, which saw Topic 8 being one of the most significant. There are Entity Topic Models that are strongly represented by topic 8, however they do contrast the larger population.

As well as being significant proportions of all entity topic models, topics 1, 3, and 7 also have the most variation, with topic 8 being the next most varying topic. By observing the variability of specific topics, some predictions can be made regarding which topics will influence the calculation of latent entities. When using K-Means clustering for calculating Latent Entities, it is likely that the topics of variance will form the basis for latent entities.

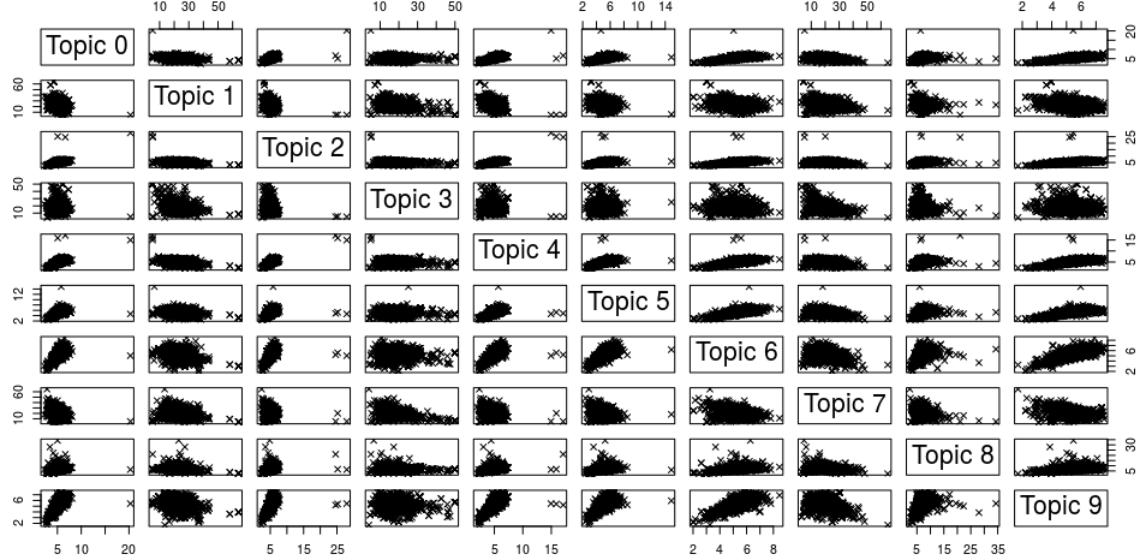


Figure 33: ETM Pairwise Scatter Matrix for Entities in the Harry Potter Novels.

A pairwise matrix scatter plot of entity topic model topic proportions can show some insight into the variance and distributions of topics across corpus of entities. Figure 33 confirms the significance of topics 1, 3, and 7 with regards to differentiating between entity topic models. The figure also highlights small but distinct groupings of entity topic models in Topics 0, 2, and 4, where the small groups consist of entity topic models feature significantly higher proportions of that topic when compared to the corpus at large. Certain comparisons for topic 3 also show some separation of Entity Topic Models.

For many of the topics, there are no obvious groupings of entity topic models, only what seems to be a linear distribution with a slight correlation between the topics plotted together. Topic 9 is one such topic that seems to have a proportional relationship with some topics. The observed relationship suggests that for some entities, as the proportion of one topic increases, so does the proportion for topic 9. For this positive correlation of topics take place, Entity Topic Models must strongly associated with terms that are shared across multiple topic's word distributions, the shared terms however cannot be present across all word distributions for topics, otherwise the proportional topic distributions for Entity Topic Models would not change.

The significance of observed relationships is that it suggests the entity topic modelling approach taken is capable of capturing some of the underlying semantics of words, which aligns with claims

made in literature that certain modelling methods like latent semantic analysis are capable of doing such tasks.

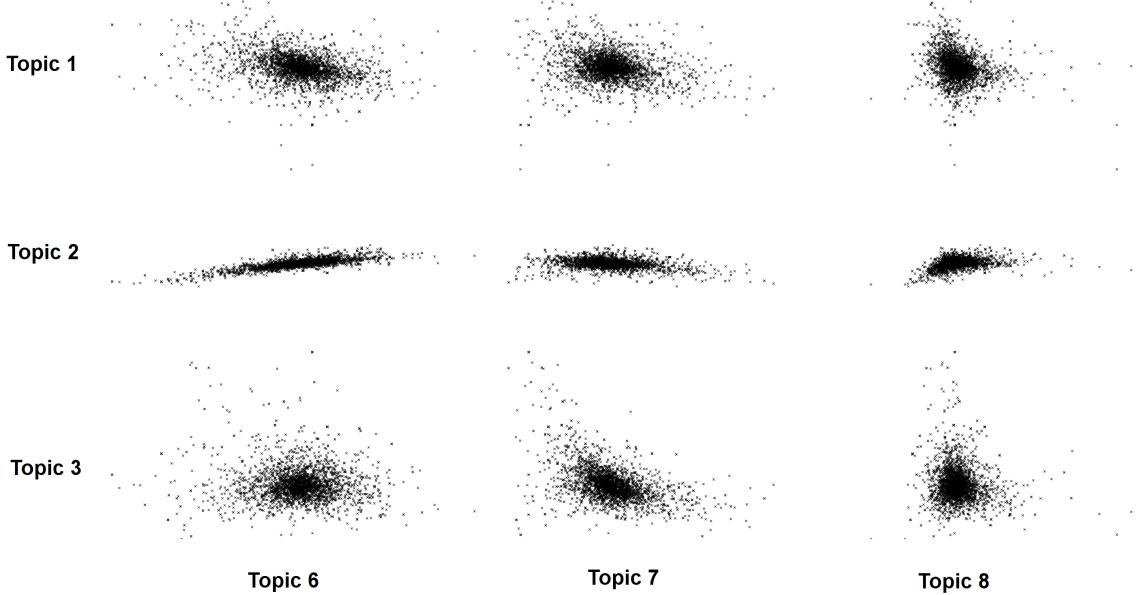


Figure 34: ETM Pairwise Scatter Matrix Zoomed in on A Selection of Topics of the Harry Potter Novels.

Topics with a positive correlation must contain words that occur frequently together within text extracts or the topics must share common terms. In topics forming negative correlations, there must be opposing terms or different terms in the topics. To some extent the terms in the topics can indicate why some topics are correlated. Topics 5 and 9 form a distinct positive correlation, and share 5 of their top ten terms, 38 of their top 100 terms, and 90 of their top 200. For contrast, topics 3 and 7 don't form a similar relationship, these topics share 3 of their top ten terms, 35 of their top 100 terms, and 73 of their top 200. The difference and commonalities between topics have more of an impact when the terms being compared are higher ranking. For most of the top 10 terms to be matching, there is no surprise that Entity Topic Models increase in multiple topics at the same time.

The relationships between topics across entity topic models can be seen a little more clearly when magnified. Figure 34 shows a closer look at pairwise scatter charts for topics 1, 2, and 3 against topics 6, 7, and 8. For topic 2, there is a positive correlation between topics 2 and 7 whilst there is a negative correlation between topic 2 and 7. When considering the ability of topic

modelling methods abilities to capture some of the semantics of words, then the correlations would be explained if the topics were formed of opposing or oxymoronic words, or if the topics are formed of terms that grammatically would not make sense if used close proximity.

Some subtle groupings can be identified in topics 3 against 7, in which there is a solid core of entity topic models, with 3 branches reaching roughly north, east and south west of the central core. This suggests that some of the relationships that may exist between terms, topics and entity topic models may be dependant on the entity involved.

5.5.2 Summary Corpus ETMs

For the corpus of full Harry Potter novels, the Topic proportions for each Entity Topic Model roughly reflected the book level topic distributions. As a significantly shorter corpus, the summary documents see even less deviation from the book level topic distributions. The key difference between the Entity Topic models and the book level topic distributions is which topics are significant in distinguishing between elements. The summaries varied the most between topics 2 and 8, however the entity topic models see wider variance between topics 4, and 5.

When considering the Entity Topic Models for the full novel corpus, it was also observed that the topics of difference between novels were not the same as the topics of difference between latent entities. It was originally assumed that the assumptions made in literature regarding entities and their relations to topics in a document were valid for smaller documents, however this consistency between the small and large corpus suggests that there is perhaps an argument to be made that irrespective of size, entities may have different degrees of association with different elements of a document.

	Topic 0	Topic 1	Topic 2	Topic 3	Topic 4	Topic 5	Topic 6	Topic 7	Topic 8	Topic 9
\bar{x}	8.44	9.75	8.68	8.44	8.47	8.96	18.38	8.74	8.64	11.50
σ	0.25	0.71	0.32	0.22	0.25	0.35	1.66	0.24	0.22	1.24

Table 19: Average and Variance of Topic Proportions across Entity Topic Models in the Summary Corpus

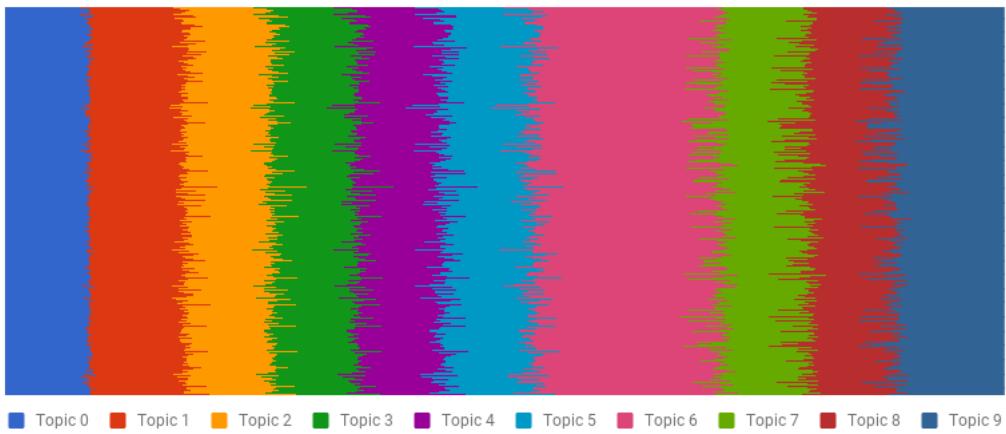


Figure 35: Proportions of Topics Forming Entity Topic Models within the Summary Corpus

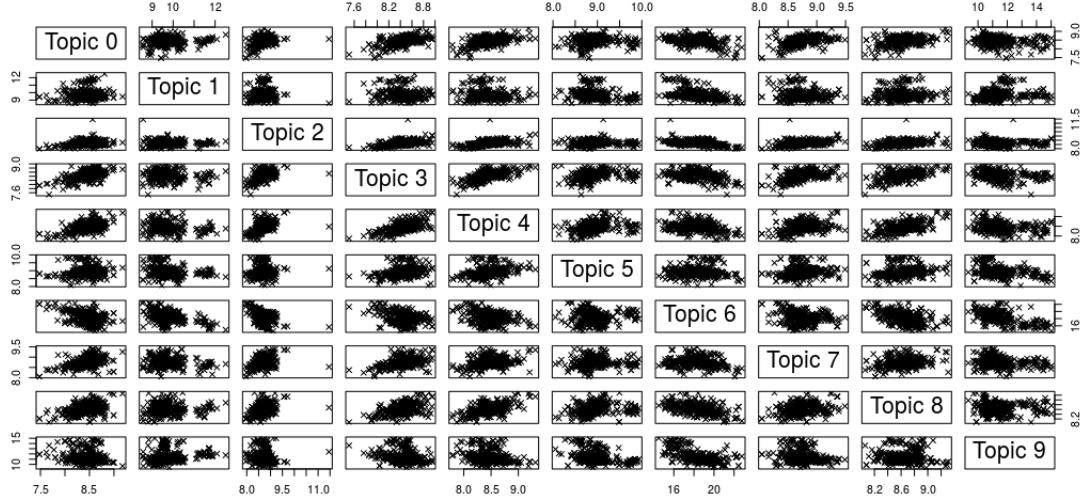


Figure 36: ETM Pairwise Scatter Matrix for Entities in the Harry Potter Novel Summaries.

In figure 35 you can see distinct spikes across some entity topic models in topic 9, topic 1 and to some extent, topic 6. Some of these spikes can be seen in the form of distinct groupings of entities within figure 35. The pairwise scatter plots for topic 1 show a completely separated group of entity topic models, and whilst not entirely separated, topic 9 can also be seen to have two groups, particularly when topic 9 is compared to topics 1, 3, 4, or 8. These groups could suggest a potential classification that can be applied to Entity Topic models in the form of a Latent Entity.

When you compare the pairwise plot of the Entity Topic Model Topics for the summary corpus, to the plot for the full corpus you can see that there are some similar structures formed. For the full corpus, there were topics that had a correlated relationship, where for some topic pairs, as the proportion of one topic in an entity topic model increased, the proportion of the other topic would decrease. There were also topic pairs that had the a positive correlative relationship, such that as the proportion of one topic increased, so did the other. With these similar formations observed across both corpora it continues suggests that the ETM approach used is capable of capturing some of the semantic structures within a corpus, or that the two processed corpora are similar in contents, meaning that the ETM method used has captured some of the semantic similarities between the two corpora.

For the corpus of summary documents, there are some terms that could be labelled as 'opposing'

which can explain the negative correlations seen between some topics. For topics 3 and 6, some potentially opposing terms would be 'sleep'₆ and 'wakes'₃. It would be unusual to find entities that are simultaneously asleep yet awakening. similarly, entities that are associated with a 'hospital'₆, or 'bathroom'₃ would not be expected to be found in the 'forest'₃. In fact, the entity myrtle is only found in the bathroom, and is strongly associated with that term.

A possible criticism of these interpretations is that it is only possible to make them with knowledge of the narratives, which defeats the purpose of the models given that they are not necessarily going to assist in the interpretation of written narratives.

5.6 Latent Entities

The evaluation of Latent Entities is a challenging task for two reasons. The first challenge is the lack of labelled data sets which a models performance can be evaluated on, the second difficulty is the subjective nature of the context for which the methods have been developed. Given meanings and interpretations of narratives and literary works are frequently debated and discussed within an academic setting, with interpretations varying from individual to individual, it raises the question of whether there ever could be a data set through which Latent Entity Models can be effectively evaluated.

There have been two metrics for Latent Entities that this thesis proposed as a means of evaluating the quality and value of produced models. Consistency is a proposed metric for evaluating the similarity of models trained on different corpora, and is of value for both Latent Entity models, as well as the previously discussed GETM. The second metric is a measure how well an individual can interpret a model which indicates how cohesive a latent entity model is. With no scope in the project for conducting meaningful surveys with a large sample size, a more general evaluation and interpretation of the Latent Entities will be provided.

The full set of Harry Potter novels will be explored before moving onto the corpus of summary documents. Exploration of the summary documents will be carried out by comparing and contrasting the calculated models to the full corpus of novels. The comparison aims to provide

insight into any strengths and limitations of the Latent Entity models.

5.6.1 Harry Potter Corpus Latent Entities

To show some visual insight into potential entity classifications, entity topic models were plotted in a pairwise matrix of scatter charts, where each element in the matrix is the comparison of one topic against another, with each Entity Topic Model coloured according to the Latent Entity that the Entity Topic Model was most similar to. Figure 37 shows the make up of five latent entity classifications that were extracted from Harry Potter corpus.

As with the book level topic distributions, there are some topics that offer little variability between entities. Topic 0 appears to provide minimal insight regardless of the topics it is compared to. In contrast, topic 7 indicates a distinct divide between entities, however this also appears to be independent of other topics.

It is important to notice the different scales that are used across the pairwise plots of figure 37. Whilst topic 6 indicates a wide spread of entities, the range is actually more condensed than the ranges of other topics. Should the scale for topic 6 be applied to seemingly dense topic plots seen for topics 0, 2, and others, it might be visually more clear how the latent entity clusters are formed in those topics.

In all plots that show a tight grouping of entity topic models, there are also extreme outliers. These entities have not been clustered as a distinct classification in their own right, and perhaps raise a question as to whether they should be, however there is no consistent classification across the outliers for each pairwise plot, which suggests that the entity topic models forming outliers in some topics, are more closely related to other entities in other topics.

There appears to be a threshold for some topics that would result in an entity topic model being classified as a latent entity, for example, topic 1 sees all entities represented strongly by that topic classed as the green latent entity, topic 3 is the same but with the latent entity shown by black crosses, and topic 7 with the red coloured latent entity, this further suggests that certain topics play no role in forming a class of entity topic model whilst others are essential.

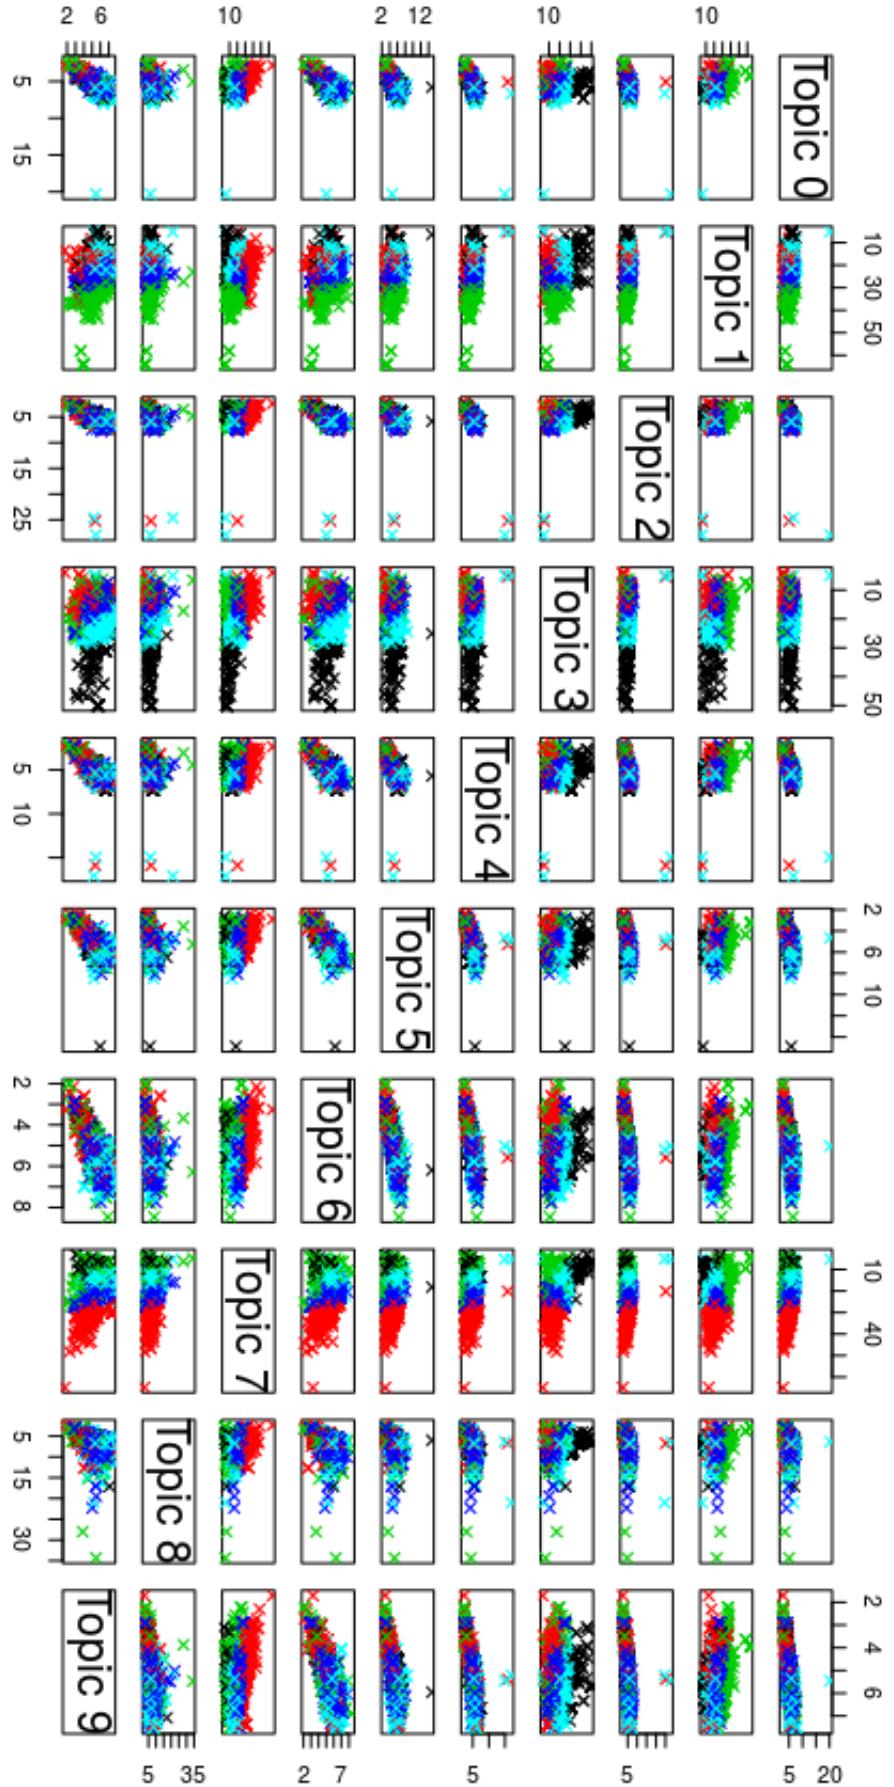


Figure 37: Pairwise Scatter Matrix of Entity Topic Model Topic Distributions Coloured According to Latent Entity they are Most Closely Associated With.

The density of the plots in figure 37 makes it difficult to see the significance of some classes within each plot. Expanding the view for a few topics, figure 38 shows more insight into pairwise plots of topics 6,7, and 8 against topics 2, 3, and 4. When viewed this way an estimate of the dominant classifications can be viewed a little more clearly. Across the plots for topic 3 the significance of some of the latent entities can be seen a little more accurately, the latent entity marked by black points is formed by such a small proportion of entities when compared to the latent entity marked by blue.

Topic 3 when inspected on a larger scale shows a much more varied spread of the entities that originally appeared to form a distinct classification, however some structure can still be seen when comparing distributions of topic 3 to topics 7, and 8..

The magnification also indicates the dominant latent entity the corpus a little more clearly, the latent entity indicated by blue is an approximation for far more entity topic models than the other potential classifications.

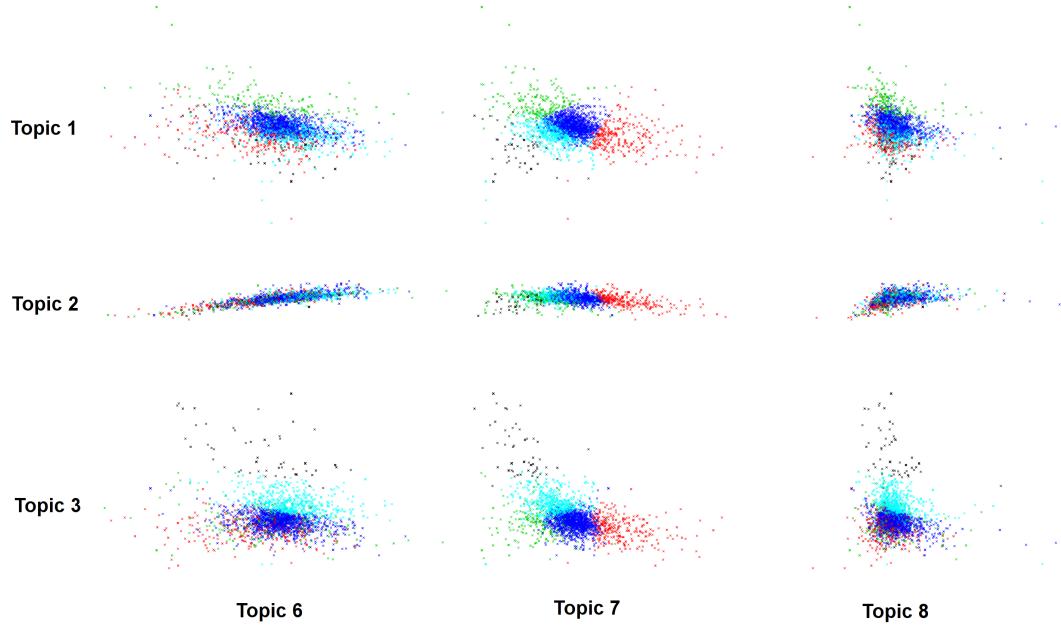


Figure 38: Magnification of Pairwise Scatter Matrix of Entity Topic Model Topic Distributions for Topics 1,2 and 3, against topics 6, 7 and 8.

5.6.1.1 Latent Entity Composition.

Latent Entity 0			Latent Entity 1			Latent Entity 2		
Entity	Distance	Origins	Entity	Distance	Origins	Entity	Distance	Origins
gorgovitch	2.67	Deathly Hallows	theodore	1.44	Order of the Phoenix	auror	1.51	Half-Blood Prince
georgie	3.90	Deathly Hallows	parvati	1.76	Half-Blood Prince	savage	1.51	Half-Blood Prince
miranda	4.14	Goblet of Fire	johson	1.86	Prisoner of Azkaban	proudfoot	1.51	Half-Blood Prince
goshawk	4.14	Goblet of Fire	cho	2.05	Prisoner of Azkaban	blinky	1.61	Goblet of Fire
levine	5.09	Philosopher's Stone	maxime	2.14	Order of the Phoenix	krum	1.74	Deathly Hallows
Latent Entity 3			Latent Entity 4					
Entity	Distance	Origins	Entity	Distance	Origins			
katie	0.39	Half-BloodPrince	beedle	0.70	Deathly Hallows			
malfoy	0.46	Goblet of Fire	flamel	0.91	Sorcerer's Stone			
pansy	0.56	Goblet of Fire	hagrid	1.01	Sorcerer's Stone			
uncle	0.61	Goblet of Fire	petunia	1.14	Half-Blood Prince			
karkaroff	0.66	Goblet of Fire	bellatrix	1.17	Deathly Hallows			

Table 20: Entity Topic Models most strongly represented by each Entity Topic Model.

Entities are deemed most closely associated with, best represented by or most stereotypical of a Latent Entity by calculating the euclidean distance between the topics of an Entity Topic Model and the topics of a Latent Entity. The shorter the distance, the better representation the Latent Entity is for that Entity Topic Model.

For the full corpus of Harry Potter novels, the five entities best represented by or most stereotypical of each Latent Entity is shown in table 20. Notably, there is a diverse mix of characters in each latent entity with regards to the narrative which they are from, with four out of the five Latent Entities' top five entities being composed of Entity Topic Models from three different narratives. When looking at more Entity Topic Models for each latent entity, the diversity continues at the same rate.

There is only one novel not contributing to the top 5 entity topic models for any of the latent entities, however entity topic models from the Chamber of Secrets are represented in the top 150 entities for each latent entity. This could have implications regarding the nature of characters within the novels, either from the descriptions of them or the context which they are found, entities in the Chamber of Secrets might distinctly different to different the rest of the series. If the characters are distinctly different, then the failure to calculate a Latent Entity for the models suggests that more Latent Entities should be calculated. Alternatively it could be that there is nothing distinct about entities from those novels, It should be noted however, that entity topic models forming the top 150 entities for a latent entity form only 4.5% of all entities

5.6.2 Summary Corpus Latent Entities.

Despite having fewer numbers in the corpus, the same number of latent entities were extracted for the corpus of summary documents. Figure 39 shows the topic proportions of each Entity Topic Model, with each point on figure coloured according to which Latent Entity the associated entity topic model was classified as.

Even though there are significantly less entities in the summary corpus when compared to the corpus of full novels, there are similar spreads of Entity Topic Models in terms of the range of topic distributions seen in both the summary corpus and the full novel corpus, this is particularly true in the topics that have the most variation in them. What is even more striking is the similar patterns of clustering, there is degree of similarity visually. There isn't an exact mapping between Latent Entity clusters, but there remains the impression that only a select number of topics are actually key to extracting Latent Entities.

For the full corpus, topics 1, 3 and 7 gave a clear indication of a threshold which was being used in grouping entity topic models, for the summary corpus, there is again 3 topics (1, 6 and 9) that provide a clear separation in groups of latent entities. Topic 1 shows a clear separation between the cyan latent entity class and the others, and topic 9 does the same for the green Latent Entity class. Topic 6 shows 3 distinct bands for red, blue, and black latent entity classes. Whilst the colours don't map to the full corpus, the same patterns occurred within its Latent Entity clustering.

Whilst visually promising, there is still further investigation required in order to evaluate the quality of the Latent Entity Modelling method. Consideration of the contents of each Latent Entity should be evaluated before conclusions can start to be drawn.

Given the sparsity of the pairwise plot for the summary corpus, a magnified view provides little additional insight, so was omitted from this thesis.

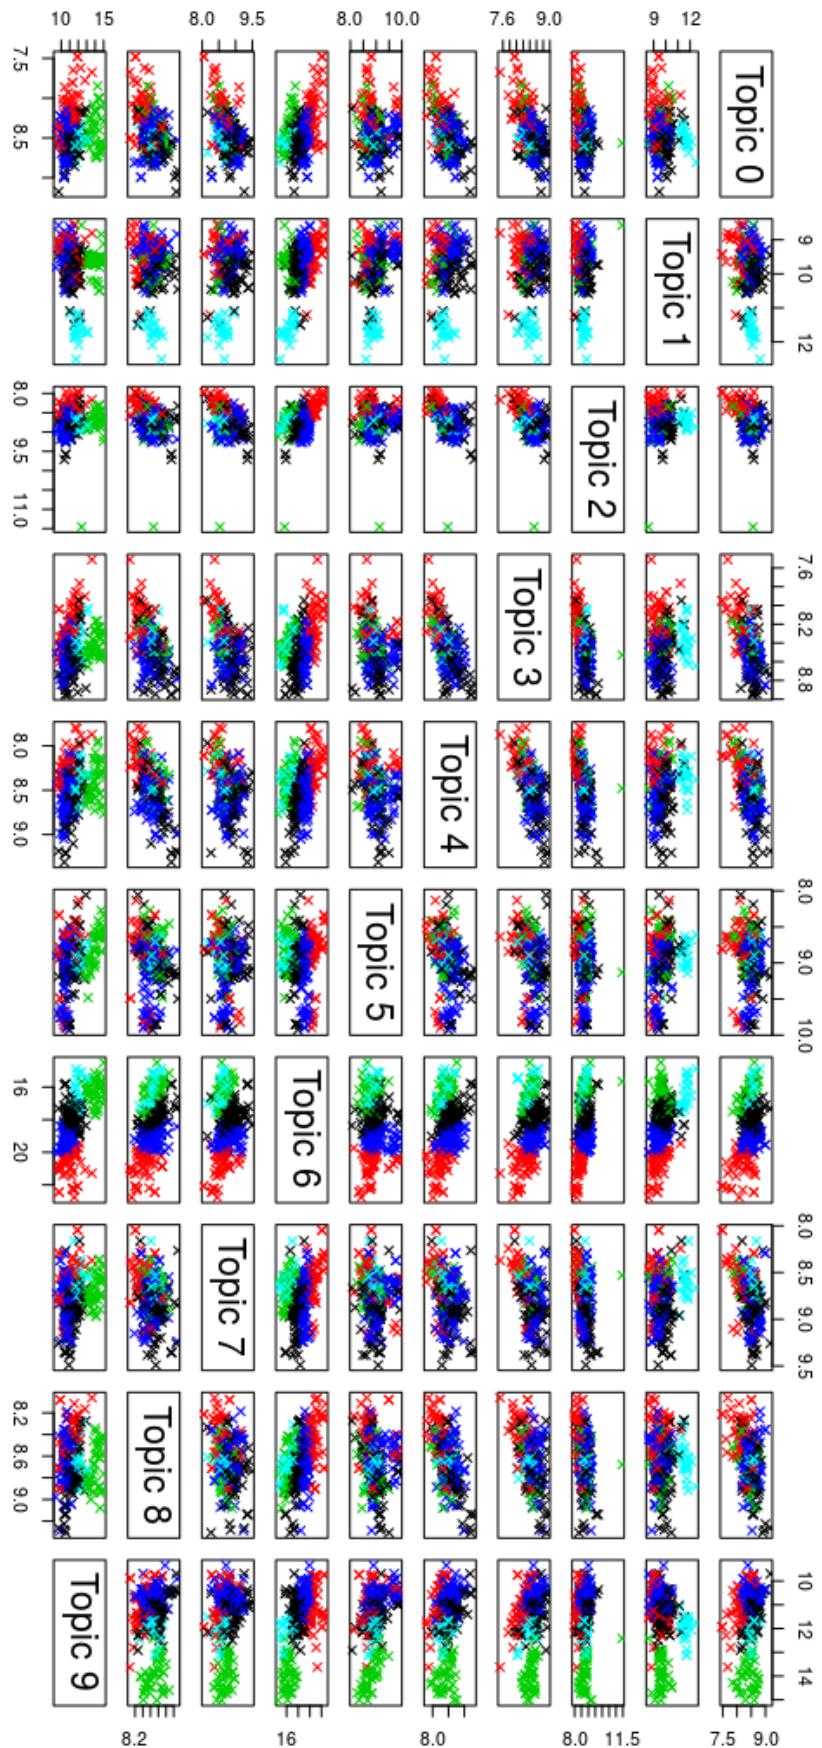


Figure 39: Pairwise Scatter Plot Matrix for Summary Corpus Entity Topic Models Coloured According to their Latent Entity Classification

5.6.2.1 Latent Entity Composition

Latent Entity 0		Latent Entity 1		Latent Entity 2				
Entity	Distance	Origins	Entity	Distance	Origins	Entity	Distance	Origins
krum	0.46	Goblet of Fire	school	0.32	Order of the Phoenix	hagrid	0.32	Prisoner of Azkaban
viktor	0.48	Goblet of Fire	witchcraft	0.39	Order of the Phoenix	voldemort	0.33	Prisoner of Azkaban
cedric	0.48	Goblet of Fire	moody	0.62	Deathly Hallows	malfoy	0.53	Prisoner of Azkaban
hagrid	0.54	Goblet of Fire	nagini	0.70	Deathly Hallows	mcgonagall	0.70	Goblet of Fire
weasley	0.58	Chamber of Secrets	dolores	0.73	Order of the Phoenix	dumbledore	0.72	Prisoner of Azkaban

Latent Entity 3		Latent Entity 4			
Entity	Distance	Origins	Entity	Distance	Origins
hermione	0.26	Order of the Phoenix	hagrid	0.48	Philosopher's Stone
harry	0.34	Order of the Phoenix	harry	0.55	Philosopher's Stone
neville	0.43	Deathly Hallows	dursley	0.57	Philosopher's Stone
sirius	0.43	Order of the Phoenix	voldemort	0.61	Philosopher's Stone
voldemort	0.49	Order of the Phoenix	hermione	0.62	Philosopher's Stone

Table 21: Top 5 Entity Topic Models Forming the Latent Entities for the Harry Potter Summary Corpus.

Considering the reduced set of Entity Topic Models that Latent Entities can be calculated from, it is not surprising to see entirely different entities forming the core of each Latent Entity. There are a few similarities between the sets of latent entities, particularly when the origins of the entity are ignored. The entities 'krum', 'malfoy' and 'hagrid' are common to Latent Entities extracted from both corpora. Whilst there are multiple 'hagrid' entities in the top 5, the occurrence of note is the 'hagrid' originating from the 'Philosopher's Stone', which matches the occurrence in the Latent Entities Extracted from the full novel corpus.

5.6.2.2 Consistency

Cherry picking entities is not necessarily the best way of evaluating the similarities of the two sets of latent entities. As a k-means clustering approach was taken, it is possible re-use the classifier of the summary set of entities on the entity topic models from the full corpus. By measuring the numbers of entities classified together from both classifiers, you can get some estimate as to whether the latent entities extracted from either corpus are the same. Additionally, using the previously defined consistency metric can provide more insight into the similarities of both sets of Latent Entities.

The consistency metric defined previously involved treating one set of latent entity compositions as being the *de facto* set of entities, and then checking if each entity pairing in the other corpus

is present in the *de facto* corpus.

With matching entity topic model pairings being counted as true positive (TP) and non matching pairings being counted as false positives (FP) the consistency metric is defined as:

$$Consistency = \frac{TP - FP}{\sum_{i=1}^N \binom{n_i}{2}}$$

Where N is the number of Latent entities clusters, and n_i is the number of entities within the latent entity cluster indexed by i .

As the number of entities is drastically different between the two corpora used in this thesis, only entities present in both will be considered. Only using common entities ensures that the metric has an emphasis on similarities as opposed to the differences.

The consistency scores for the Latent Entities extracted from the full corpus and the summary corpus are as follows:

$$TP = 3,815, \quad FP = 8,549, \quad \sum_{i=1}^N \binom{n_i}{2} = 12,364$$

$$consistency = -0.38$$

Whilst this score is negative, implying that the Latent Entities are largely inconsistent between the two corpora, a score greater than -0.5 means that there is still a significant amount of Entity Topic Models being represented by in the same Latent Entities.

It should be noted that this metric punishes inconsistencies greatly, a single difference across a latent entity will result in the FP being increased by the size of the cluster the entity was misplaced in. Additionally, if a single latent entity encompassed all entity topic models present in an opposing corpus, then a perfect consistency score would be given, even though there is really no consistency.

5.6.3 Cohesion and Interpretation

To effectively evaluate the cohesion and interpretation using the proposed intruding entity metric requires a large sample of participants as well as an extensive suite of questions is required. Without a large sample, the validity and reliability of any conclusions is always going

to be in doubt. It was determined early in development that attempting to survey a large sample would be entirely out of scope for the project, and as such accurately evaluating the cohesion and interpretation of the models is difficult to do.

In order to provide some estimate of the cohesion and interpretability of the models, a personal evaluation on the models is given, it is acknowledged that this is not sufficient for real conclusions to be drawn, but any insight could be used as a basis for further study.

When considering the Latent Entities extracted from the full corpus of Harry Potter novels, A particularly interesting Latent Entity is Latent Entity 1. Aside from Theodore (who is mentioned only once in the whole narrative) the entities are all love interests or romantically involved with major characters. Cho Chang and Parvati Patil both have romantic links to Harry Potter, Madame Maxime is romantically involved with Hagrid, and Angelina Johnson marries George Weasley, the older brother to Ron Weasley.

Latent entity 3 from the corpus of full novels also seems to have highlighted some interesting similarities between characters. The entities 'malfoy', 'pansy', 'uncle', and 'Karkaroff' are all regarded as negative characters. Draco Malfoy is essentially the antagonist to Harry Potter in Hogwarts, and in turn Pansy Parkinson's only role in the story is to antagonise Hermione Granger. Uncle (Dursley) is also portrayed as a negative character, along with Karkaroff who was portrayed primarily as a supporter of Voldemort, archvillain of the story. 'Katie' is perhaps the only entity in this grouping that is not actually negative or evil, however in the Half-Blood Prince Katie Bell was actually cursed to try and assassinate headmaster of the school, which is an inherently evil task and explains the relation that this version of Katie has to other entities in the Latent Entity.

Across the Latent Entities, there does seem to be some degree of cohesion with interpretations able to be formed. Based on entity names alone, it requires some knowledge about the corpus in order to form those interpretations, however this does not necessarily invalidate the positive results of the models.

For the smaller corpus of Latent entities, interpretation was much more difficult to do, the

smaller number of entities and the less diversity seen in the topic models results in somewhat poor Latent Entities when compared to those extracted from the corpus of full narratives.

5.7 Explorer Evaluation

Evaluating the implemented Explorer web application and associated system requires consideration of the rationale behind why the system was developed. The quality of the implemented system can be assessed aside from any strengths or weaknesses of the models that the system supports.

With regards to usability of the system, there are two aspects to the system, the command line interface, and the web application interface. The command line interface is simple and requires providing the directory of the corpus files which are to be analysed, there are no other settings for configuration. The limited interface somewhat reduces the flexibility of the analysis pipeline, built with the implemented NLP toolkit. The NLP toolkit is implemented with some flexibility with regards to some of the hyper parameters of implemented models, including the choice of weighting function, as the number of topics, the number of terms to include within each topic, and the number of latent entities which the system should derive. As a result of excluding these parameters from command line arguments, the pipeline requires manually configuring from within the code base, reducing the accessibility and usability as a whole.

The Explorer Web Application however is a much more accessible tool when compared to the command line interface of the pipeline. It adheres to principals outlined in the Google Material Design specification providing bold and contrasting colours to provide a clear interface. The incompleteness of the interface is its largest drawback. For the interpretation of simple topic information the program is an effective window into the corpus. However the lack of simple visualisations reduce the scope of any investigation that an individual wishes conduct through the interface.

There are some aspects of accessibility where the system is somewhat effective. Primarily it is in the way the system segments data about the corpus into logical sections (Book Data, Topic

Data, and Entity Data). By segmenting information in this way, there is less risk of users being overloaded with numerical data. There is still room for improvement however, instead of presenting a panel of numerical comparisons of entity topic models, a dynamic figure could be implemented that allows for visual and interactive comparisons to be conducted.

Considering the amount of data that can be extracted from a large corpus, the each request for lists of Books, entities, and topic information took on average $455ms$ for the application to receive after issuing the request. For a general indication as to whether these times are good or bad, Nottingham Trent University's Online Workspace (NOW), took over 10 seconds to load aspects of the page ($\bar{x} = 7.42seconds, \sigma = 0.72seconds$). The significantly longer loading times NOW suggest that the loading times of the Explorer application are somewhat acceptable.

It should be noted that the assessment of load times is only against one website that has numerous users and transfers images as well as text information. The comparison is only to state that if 10 seconds of waiting for resources is acceptable, then 455ms is also acceptable.

5.8 Summary of Results

A Range of models have been explored in this chapter, from the LDA derived book level topic models, to the Latent Entity Models extracted from sets of Entity Topic Models. Whilst the Quantitative analysis of each methods is lacking, the subjective exploration provides a detailed insight into what the strengths and weaknesses of each approach may be.

The implemented Gaussian Entity-Term Matrix has been shown as an effective tool to produce entity-term relationships, with an additional ability to identify main characters of narratives being demonstrated. For corpora large and small, the GETM is a valuable pre-processing step that can preserve some of the relationships between words that are often lost with 'bag-of-words' models.

Using the GETM as a means of calculating Entity Topic Models was successful, the approach produced sets of topic distributions for entities that highlight nuanced differences between different entities across a corpus. There was also a potential indication that the approach was

able to encode semantic information about words in a narrative, with some positively correlated topics suggesting that topics contain terms that are likely to occur together, whilst some negatively correlated topics suggesting that terms in those topics are unlikely to occur together, either as they are oxymoronic or would grammatically be nonsensical. Further investigation is required in order to confirm this, as there is potential for some of the correlations to be a result of topics that contain the same terms.

Latent Entity Modelling has shown to be a possible additional step that can produce conceptually related and interpretable groups of entity topic models, with example interpretations of a 'love interest' and 'antagonist' Latent Entities being explored. Whilst the consistency of the Latent Entities calculated for two corpora was less than positive, it did indicate that some consistencies could be identified. Additionally, the comparison identified some of the flaws with the consistency metric drastically penalising models with inconsistent Entity Topic Model pairings

Chapter 6

Conclusion

6.1 Introduction

This thesis has presented, explored, and evaluated the concept of Latent Entities, a form of Topic Modelling that sits as a layer of abstraction on top of a collection of Entity Topic Models. The calculation of a set of Latent Entities for a corpus depends on numerous pre-processing steps including the extraction of entities and the calculation of Entity Topic Models. Classical approaches to Entity Topic Modelling fail to take into consideration the associations that entities within a narrative has with other terms in a document, and as such this thesis also explored the possibility of using an adapted co-occurrence matrix as a means of incorporating these features of narratives in the calculations of Entity Topic Models.

Given the abstract nature of topic modelling methods, alternative methods of evaluation have been considered. Visually exploring the results from two sets of related corpora provided some insight into the value of the methods as well as their shortcomings. A consistency metric was proposed and applied two related corpora to investigate the consistency of the resulting latent entities.

To facilitate the exploration of Latent Entities a small system was implemented, the system was composed of an analysis pipeline, server architecture, and web application. Whilst only a secondary objective, the system was essential as a means of ensuring robust software methods for analysis were implemented.

To support the exploration of Latent Entities the results from numerous other elements of the implemented analysis pipeline were explored, including the associated set of Entity Topic

Models, sets of Gaussian Entity-Term Matrices, and book level Topic Models.

6.2 Outcomes

This thesis was successful in meeting its aims and objectives. An analysis pipeline, exploration interface, and consideration of novel methods of analysis were investigated and implemented. With regards to tangible outcomes, this thesis has now made available an Open Source suite of tools that others can use to explore and investigate Latent Entity Modelling.

The implemented pipeline provides an extensive and robust code base that is ideal for future investigatory work. Despite the completeness of the suite, there are still drawbacks with regards to deployment as well as the interface through which the pipeline can be used. There are no tangible means of deploying the pipeline besides downloading and including the code base inside whatever project is being worked upon.

A second tangible result of the thesis is an extensible API and Server system. By providing access to results from analysis, further investigatory and exploratory work on the Latent Entity Models can be carried out. As an Open Source implementation, it is easy for other developers to expand the API should there be required aspects that are unimplemented. The primary downside to the system is similar to the implemented pipeline, with no real means of deployment included with the system, individuals wishing to utilise it for personal projects are required to manually set up and configure each distinct element, including configuration files and database administration.

The implemented interface is the weakest element of this thesis, it provides the minimum set of tools necessary for an individual to begin exploring the topical structure of entities and documents within a corpus. Whilst the visualisations maybe lacking in the explorer interface, the web application stayed within the bounds of the project scoping and satisfied the purpose for which it was developed.

An additional outcome involved the implementation of a Viterbi decoded Hidden Markov Model POS tagger. A valuable tool to have when undertaking NLP oriented projects, the tagger

performed somewhat better than expected. For closed classes of words the tagger performed comparably to taggers in literature, it was on open classes of words where hapax legomena were common that the implemented tagger had room for improvement.

6.2.1 Modelling Outcomes

As the focus of this thesis, the methods of analysis that were implemented are the strongest outcomes for the project, as three novel approaches to topic modelling were proposed, defined, and implemented.

The Gaussian Entity-Term Matrix provided a means of preserving and expressing entity-term relationships that may be present within a document. As an approach, it is an adaptation of a standard co-occurrence matrix and can be utilised in statistical modelling methods like Latent Semantic analysis. Exploration of the resulting matrices showed that the method was capable of identifying terms of significance to entities within a document, as well as highlighting entities that are of significance to a document.

An alternative approach to Entity Topic Modelling was then explored through the use of Latent Dirichlet Allocation in conjunction with the Gaussian Entity-Term Matrix. The outcomes of the new approach to entity topic modelling is one that shows a potential to capture the semantic meanings and relationships of terms and entities within a document, as well as the semantic differences between terms and entities between documents in a corpus.

With an approach to Entity Topic Modelling that incorporated varying entity-term and entity-topic relationships across a corpus, Latent Entity Modelling was shown to be able to form approximate classifications for groups of Entity Topic Models. The exploration and comparison of two corpora showed that the approach was capable of consistently identifying structures formed by entity topic models across a pair of related corpora. The resulting weakness of the approach is seen in the consistency of entity classifications, the inter-Latent Entity consistency between corpora was weaker than was hoped.

6.3 Limitations

From the extent of exploration and evaluation of implemented models, to the limited breadth of visualisations implemented in the exploration web interface, there are numerous limitations to the work presented in this thesis. Consideration of implementation limitations are discussed first, followed by the limitations from the evaluation and exploration aspect of the thesis.

6.3.1 Implementation Limitations

Whilst the Web interface provides a starting point for encouraging individuals to explore and learn about data analysis, natural language processing, and topic modelling, nothing more than surface level understanding can be obtained in its current form. The interface relies on users being numerate and does not accommodate users that are not comfortable with reading and interpreting figures and listings. A key oversight for the interface is that there is no explanation of any of the components presented to the user, and no explanation of how the user interacts. Whilst some elements are clear, that cannot be said for the application as a whole. This ultimately limits the usability of the application to users already familiar with topic modelling as a field.

With no methods of deployment, easy means of configuration, and a requirement to manually configure large aspects of the pipeline, the reach that the system can have with regards to others using it for personal projects is severely limited. It also means that any expansion of the pipeline is a more challenging task. Whilst it is a successfully working prototype, there is a lot of refinement and formalisation that is required of the system before it could ever be considered a viable system for other researchers, businesses, or individuals to use.

As a method of preserving entity-term relationships, the Gaussian Entity-Term Matrix is somewhat successful, as a fast and efficient processing tool, the implemented algorithm is a drastic failure. A result of limited processing resources the model implementation requires entity data to be written to disk frequently, either to a file or to a database, the process of calculating the Gaussian Entity-Term Matrix for a large corpus can take weeks of processing.

As a result of pushing the results of the Gaussian Entity-Term Matrix to a database, the implementation of the proposed method of calculating Entity Topic Models relies on the database before any analysis can be done. As all results from the Gaussian Entity-Term matrix are required for the Entity Topic Models to be calculated, a hardware limitation is enforced. If there is not enough memory available in hardware, then it is impossible for this implementation to be completed. Whilst Topic Modelling approaches exist that allow for batches of processing to be carried out, this thesis does not implement or use any. Additionally the Entity Topic Modelling approach implemented requires the user to specify how many topics to build as well as how many terms are to form each topic, this could result in users having to run the full analysis pipeline numerous times before adequate parameters are found.

The Latent Entity Modelling method draws most of its limitations from the k-means algorithm. Similarly to the entity topic modelling method, calculating Latent Entities requires users to specify how many latent entities are to be calculated. The chosen number of latent entities can have drastic effects on the quality of resulting models. When considered in conjunction with the other parameters that users have to choose for themselves, the large number of possible configurations that a user must try before finding results is a severe limitation of this project.

Whilst the tagging of entities that actually aren't entities is not a severe problem to this implementation, there are still some false entities that make it throughout the pipeline. Additionally, there are some entities that might receive only one mention in a corpus, but could still be hailed as significant in Latent Entity Models. The failure to consider the number of occurrences that an entity may have is a limitation of this project.

6.3.2 Evaluation Limitations

Whilst this thesis explored a range of different methods of analysis, the depth to which each method was investigated is a large limitation. Each stage of the pipeline consists of configurable aspects that could feasibly alter the results of later stages of the pipeline. This project was limited in its investigation of what effect each configuration would have on the resulting methods, which limits the validity of any conclusions and insights that may have been gained.

Another key limitation of the project is the size and range of corpora that were used to evaluate the models. Whilst the corpora used provided a range of entities and did appear to be a valid option for analysis, without more corpora to compare the results to, there is insufficient evidence for any claims regarding each model's abilities to be validated. Using a range of corpora configurations, would provide more evidence towards the pipelines ability to identify latent information and latent classes of entities.

Without a viable option for surveying a large population, the interpretability and thus usability of Latent Entity models cannot be effectively concluded. Whilst personal reflections are given on various interpretations of the latent classes that have been extracted, without knowing how other individuals interpret results then claims about their usefulness are somewhat invalid.

6.4 Future Work

Future work for this project is oriented around 3 key aspects, Exploration, Evaluation, and Interpretation. Whilst the thesis has demonstrated that Latent Entity Modelling may be a valuable addition to the field, it has too many limitations that need to be addressed before the exact value of Latent Entity Modelling can be known.

As abstract representation of documents, interpreting and exploring topic models is not straightforward. It requires individuals to be both numerate and somewhat familiar with the field to really grasp the meaning to the models. There is potential for a project to focus around the visualisation of Latent Entities, with the aim of determining the most effective ways of communicating the meaning of the models as well as the most effective ways of enabling individuals to explore and interpret each Latent entity.

As a new concept, Latent Entities required new metrics for evaluation. Further investigation is required to determine exactly how Latent Entity Models should be evaluated. The proposed metric of consistency is not nearly enough, especially given how much variation there can be between two corpora. The intruding entity test proposed in this project may be an effective way of evaluating Latent Entities and a full investigation of this would be interesting to see.

Not necessarily a research project, further development can be carried out to formalise and improve the quality of the implemented system, including the implemented pipeline and web application. The development of a wider range of visualisations for the prototype web application could then provide a solid framework for an investigation into effective visualisations of Topic models and Latent Entity Models.

References

- [1] bkkbrad and Wikipedia contributors. Latent dirichlet allocation. https://en.wikipedia.org/w/index.php?title=Latent_Dirichlet_allocation&oldid=835569966, April 2018. Accessed: 2018-4-15.
- [2] Web server survey | netcraft. <https://news.netcraft.com/archives/category/web-server-survey/>. Accessed: 2017-10-16.
- [3] Max Van Kleek, Reuben Binns, Jun Zhao, Adam Slack, Sauyon Lee, Dean Ottewell, and Nigel Shadbolt. X-Ray refine: Supporting the exploration and refinement of information exposure resulting from smartphone apps. In *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems*, CHI '18, pages 393:1–393:13, New York, NY, USA, 2018. ACM.
- [4] Tony Romm and Tony Romm. Facebook's zuckerberg just survived 10 hours of questioning by congress. *The Washington Post*, April 2018.
- [5] Eric Brill. Transformation-based error-driven learning and natural language processing: A case study in part-of-speech tagging. *Comput. Linguist.*, 21(4):543–565, December 1995.
- [6] Eric Brill. A simple rule-based part of speech tagger. In *Proceedings of the Workshop on Speech and Natural Language*, HLT '91, pages 112–116, Stroudsburg, PA, USA, 1992. Association for Computational Linguistics.
- [7] H Huang and X Zhang. Part-of-speech tagger based on maximum entropy model. In *2009 2nd IEEE International Conference on Computer Science and Information Technology*, pages 26–29, August 2009.
- [8] Doug Cutting, Julian Kupiec, Jan Pedersen, and Penelope Sibun. A practical part-of-speech tagger. In *Proceedings of the Third Conference on Applied Natural Language Processing*, ANLC '92, pages 133–140, Stroudsburg, PA, USA, 1992. Association for Computational Linguistics.
- [9] Geoffrey Leech, Roger Garside, and Michael Bryant. CLAWS4: The tagging of the british national corpus. In *Proceedings of the 15th Conference on Computational Linguistics - Volume 1*, COLING '94, pages 622–628, Stroudsburg, PA, USA, 1994. Association for Computational Linguistics.
- [10] A Ratnaparkhi. A maximum entropy model for part-of-speech tagging. *of the conference on empirical methods in ...*, 1996.
- [11] G Malecha and I Smith. Maximum entropy part-of-speech tagging in NLTK. *unpublished course-related report*, 2010.
- [12] Slav Petrov, Dipanjan Das, and Ryan T. McDonald. A universal part-of-speech tagset. *CoRR*, abs/1104.2086, 2011.
- [13] Ewa Dąbrowska. What exactly is universal grammar, and has anyone seen it? *Front. Psychol.*, 6:852, June 2015.
- [14] Roger Garside. *The computational analysis of English: A corpus-based approach*, volume 57. 1988.
- [15] Mitchell P Marcus, Mary Ann Marcinkiewicz, and Beatrice Santorini. Building a large annotated corpus of english: The penn treebank. *Comput. Linguist.*, 19(2):313–330, June 1993.
- [16] David Nadeau and Satoshi Sekine. A survey of named entity recognition and classification. *Lingvisticae Investigationes*, 30(1):3–26, January 2007.

- [17] Lev Ratinov and Dan Roth. Design challenges and misconceptions in named entity recognition. In *Proceedings of the Thirteenth Conference on Computational Natural Language Learning*, CoNLL '09, pages 147–155, Stroudsburg, PA, USA, 2009. Association for Computational Linguistics.
- [18] Guodong Zhou and Jian Su. Named entity recognition using an HMM-based chunk tagger. In *Proceedings of the 40th Annual Meeting on Association for Computational Linguistics*, ACL '02, pages 473–480, Stroudsburg, PA, USA, 2002. Association for Computational Linguistics.
- [19] A Borthwick and R Grishman. A maximum entropy approach to named entity recognition. 1999.
- [20] Oliver Bender, Franz Josef Och, and Hermann Ney. Maximum entropy models for named entity recognition. In *Proceedings of the Seventh Conference on Natural Language Learning at HLT-NAACL 2003 - Volume 4*, CONLL '03, pages 148–151, Stroudsburg, PA, USA, 2003. Association for Computational Linguistics.
- [21] Erik Tjong Kim and Fien De Meulder. Introduction to the CoNLL-2003 shared task: Language-Independent named entity recognition. June 2003.
- [22] John D Lafferty, Andrew McCallum, and Fernando C N Pereira. Conditional random fields: Probabilistic models for segmenting and labeling sequence data. In *Proceedings of the Eighteenth International Conference on Machine Learning*, pages 282–289. Morgan Kaufmann Publishers Inc., June 2001.
- [23] Andrew McCallum and Wei Li. Early results for named entity recognition with conditional random fields, feature induction and web-enhanced lexicons. In *Proceedings of the Seventh Conference on Natural Language Learning at HLT-NAACL 2003 - Volume 4*, CONLL '03, pages 188–191, Stroudsburg, PA, USA, 2003. Association for Computational Linguistics.
- [24] Samet Atdag and Vincent Labatut. A comparison of named entity recognition tools applied to biographical texts. August 2013.
- [25] J R Finkel, T Grenager, and C Manning. Incorporating non-local information into information extraction systems by gibbs sampling. *Proceedings of the 43rd Annual Meeting of the Association for Computational Linguistics (ACL 2005)*, pages 363–370, 2005.
- [26] The stanford natural language processing group. <https://nlp.stanford.edu/projects/project-ner.shtml>. Accessed: 2018-1-10.
- [27] Thomas Hofmann. Probabilistic latent semantic indexing. In *Proceedings of the 22Nd Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*, SIGIR '99, pages 50–57, New York, NY, USA, 1999. ACM.
- [28] Jimmy Lin. Scalable language processing algorithms for the masses: A case study in computing word co-occurrence matrices with MapReduce. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing*, EMNLP '08, pages 419–428, Stroudsburg, PA, USA, 2008. Association for Computational Linguistics.
- [29] Chris Biemann. Chinese whispers: An efficient graph clustering algorithm and its application to natural language processing problems. In *Proceedings of the First Workshop on Graph Based Methods for Natural Language Processing*, TextGraphs-1, pages 73–80, Stroudsburg, PA, USA, 2006. Association for Computational Linguistics.
- [30] Pradipta Maji, Malay K Kundu, and Bhabatosh Chanda. Second order fuzzy measure and weighted co-occurrence matrix for segmentation of brain MR images. *Fund. Inform.*, 88(1-2):161–176, 2008.
- [31] Yutthana Munklang, Sansanee Auephanwiriyakul, and Nipon Theera-Umporn. A novel fuzzy co-occurrence matrix for texture feature extraction. In *Computational Science and Its Applications – ICCSA 2013*, pages 246–257. Springer Berlin Heidelberg, 2013.

- [32] David M Blei, Andrew Y Ng, and Michael I Jordan. Latent dirichlet allocation. *J. Mach. Learn. Res.*, 3(Jan):993–1022, 2003.
- [33] Scott C Deerwester, Susan T Dumais, George W Furnas, Richard A Harshman, Thomas K Landauer, Karen E Lochbaum, and Lynn A Streeter. Computer information retrieval using latent semantic structure, June 1989.
- [34] Thomas K Landauer, Peter W Foltz, and Darrell Laham. An introduction to latent semantic analysis. *Discourse Process.*, 25(2-3):259–284, January 1998.
- [35] Cherukuri Aswani Kumar and Suripeddi Srinivas. On the performance of latent semantic indexing-based information retrieval. *CIT. Journal of Computing and Information Technology*, 17(3):259–264, October 2004.
- [36] István Bíró, Jácint Szabó, and András A Benczúr. Latent dirichlet allocation in web spam filtering. In *Proceedings of the 4th International Workshop on Adversarial Information Retrieval on the Web*, AIRWeb '08, pages 29–32, New York, NY, USA, 2008. ACM.
- [37] Yansong Feng and Mirella Lapata. Topic models for image annotation and text illustration. In *Human Language Technologies: The 2010 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, HLT '10, pages 831–839, Stroudsburg, PA, USA, 2010. Association for Computational Linguistics.
- [38] Tong Zhang, Zhe-Ming Lu, Kap Luk Chan, and Zhen Li. Automatic image annotation and retrieval using the latent dirichlet allocation model. *IJCSES International Journal of Computer Sciences and Engineering Systems*, 5(1), 2011.
- [39] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830, 2011.
- [40] Matthew D Hoffman. Online variational bayes for latent dirichlet allocation. <https://github.com/blei-lab/onlineldavb>. Accessed: 2018-4-15.
- [41] Radim Řehůřek and Petr Sojka. Software Framework for Topic Modelling with Large Corpora. In *Proceedings of the LREC 2010 Workshop on New Challenges for NLP Frameworks*, pages 45–50, Valletta, Malta, May 2010. ELRA. <http://is.muni.cz/publication/884893/en>.
- [42] Michael A Newton and Adrian E Raftery. Approximate bayesian inference with the weighted likelihood bootstrap. *J. R. Stat. Soc. Series B Stat. Methodol.*, 56(1):3–48, 1994.
- [43] Hanna Megan Wallach. *Structured topic models for language*. PhD thesis, University of Cambridge, 2008.
- [44] Siddhartha Chib. Marginal likelihood from the gibbs output. *J. Am. Stat. Assoc.*, 90(432):1313–1321, 1995.
- [45] Hanna M Wallach, Iain Murray, Ruslan Salakhutdinov, and David Mimno. Evaluation methods for topic models. In *Proceedings of the 26th Annual International Conference on Machine Learning*, ICML '09, pages 1105–1112, New York, NY, USA, 2009. ACM.
- [46] Pengtao Xie, Diyi Yang, and Eric Xing. Incorporating word correlation knowledge into topic modeling. In *Proceedings of the 2015 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 725–734, 2015.
- [47] Jonathan Chang, Sean Gerrish, Chong Wang, Jordan L Boyd-graber, and David M Blei. Reading tea leaves: How humans interpret topic models. In Y Bengio, D Schuurmans, J D Lafferty, C K I Williams, and A Culotta, editors, *Advances in Neural Information Processing Systems 22*, pages 288–296. Curran Associates, Inc., 2009.

- [48] Fred Morstatter and Huan Liu. A novel measure for coherence in statistical topic models. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, volume 2, pages 543–548, 2016.
- [49] Nikolaos Aletras and Mark Stevenson. Evaluating topic coherence using distributional semantics. In *Proceedings of the 10th International Conference on Computational Semantics (IWCS 2013)–Long Papers*, pages 13–22. aclweb.org, 2013.
- [50] David Newman, Jey Han Lau, Karl Grieser, and Timothy Baldwin. Automatic evaluation of topic coherence. In *Human Language Technologies: The 2010 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, HLT ’10, pages 100–108, Stroudsburg, PA, USA, 2010. Association for Computational Linguistics.
- [51] P J Crossno, A T Wilson, T M Shead, and D M Dunlavy. TopicView: Visually comparing topic models of text collections. In *2011 IEEE 23rd International Conference on Tools with Artificial Intelligence*, pages 936–943, November 2011.
- [52] Xianpei Han and Le Sun. An entity-topic model for entity linking. In *Proceedings of the 2012 Joint Conference on Empirical Methods in Natural Language Processing and Computational Natural Language Learning*, EMNLP-CoNLL ’12, pages 105–115, Stroudsburg, PA, USA, 2012. Association for Computational Linguistics.
- [53] Paul Mcnamee and Hoa T Dang. Overview of the tac 2009 knowledge base population track, 01 2009.
- [54] Yani Dzhurov, Iva Krasteva, and Sylvia Ilieva. Personal extreme Programming—An agile process for autonomous developers. January 2009.
- [55] Tibor Kiss and Jan Strunk. Unsupervised multilingual sentence boundary detection. *Comput. Linguist.*, 32(4):485–525, November 2006.
- [56] D Jurafsky and J H Martin. Speech and language processing. 2014.
- [57] SparkNotes: Today’s most popular study guides. <http://www.sparknotes.com/>. Accessed: 2018-4-21.

Appendices

Appendix A

Additional Latent Entities

For clarity, 5 Latent Entities were extracted and discussed in chapter 5. This appendix outlines some of the top Entity Topic Models that form when extracting more Latent Entities. For some of the Latent Entities, there are identical entities forming the top 5. The Entity Topic Models for krum, hogwarts, voldemort, dumbledore, and hagrid appear to be quite representative of many other entities, and as so many Latent Entities formed from these entities there may be a need to investigate means of introducing more variability within entities. Increasing the number of Latent Entities further does appear to produce more varied Latent Entities, however there is still lots of similarities between each Latent Entity. Table 23 shows the top entities for 50 extracted Latent Entity Models.

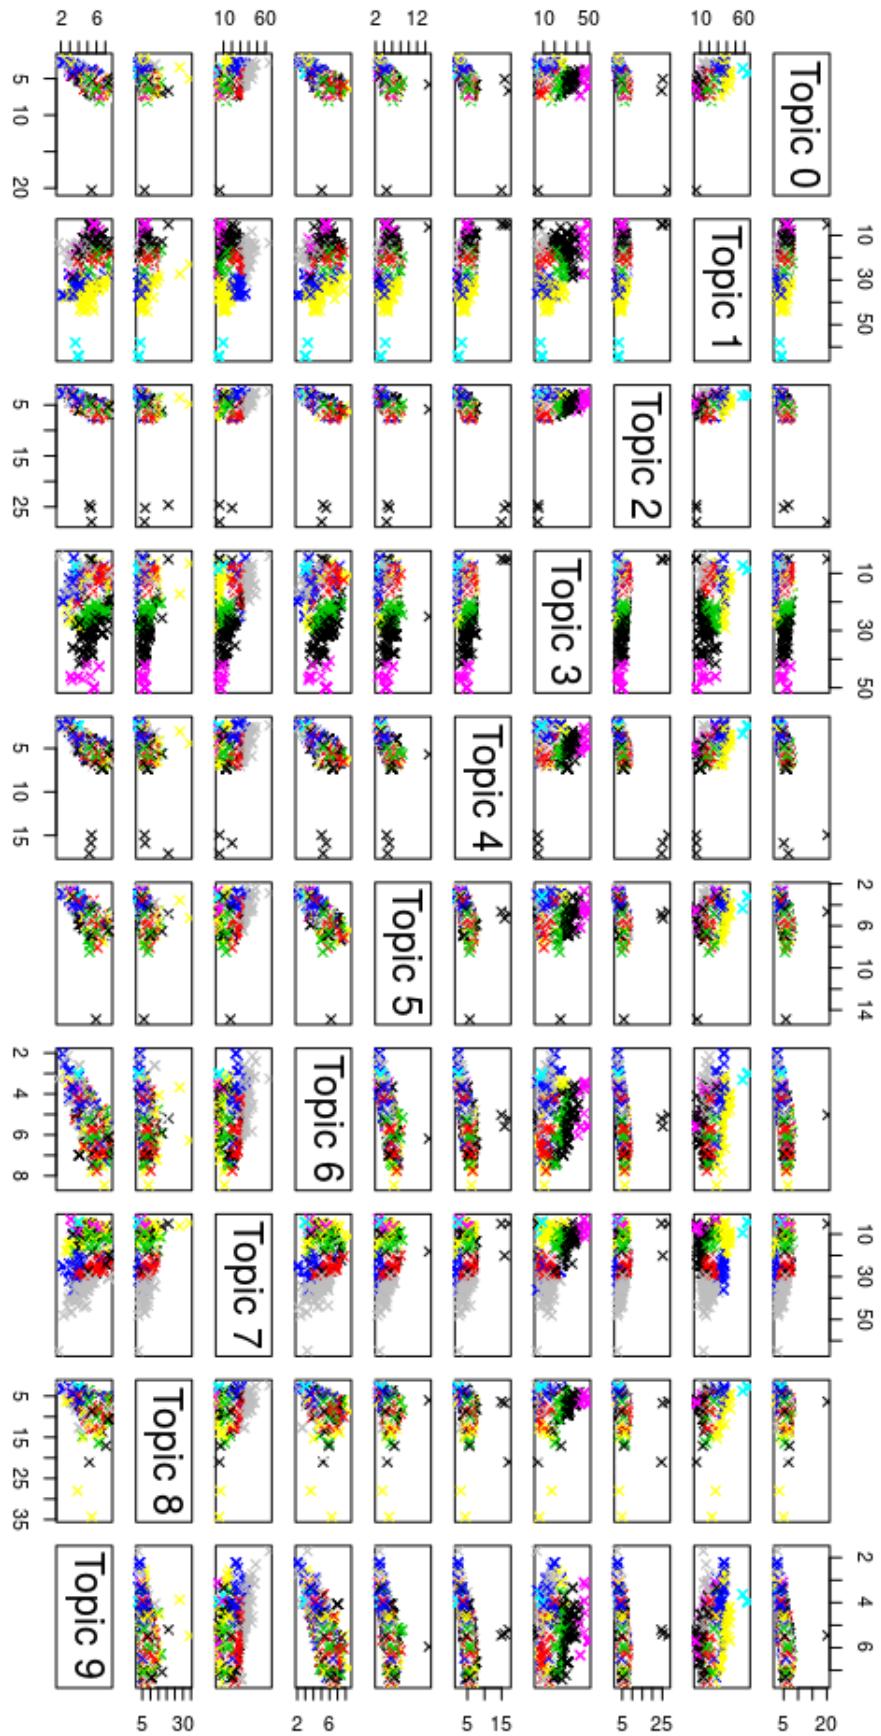


Figure 40: Pairwise Topic Plots for Entity Topic Models classified into 10 Latent Entity Groups.

Latent Entity 0			Latent Entity 1		
Entity	Distance	Origins	Entity	Distance	Origins
krum	0.35	Goblet of Fire	portkey	1.02	Goblet of Fire
voldemort	0.44	Half-Blood Prince	fudge	0.78	Prisoner of Azkaban
hogwarts	0.44	Half-Blood Prince	chris	0.75	Prisoner of Azkaban
burkes	0.51	Deathly Hallows	burkes	0.61	Deathly Hallows
borgin	0.51	Deathly Hallows	borgin	0.61	Deathly Hallows
Latent Entity 2			Latent Entity 3		
Entity	Distance	Origins	Entity	Distance	Origins
voldemort	0.31	Half-Blood Prince	patil	0.80	Order of the Phoenix
vernon	0.35	Goblet of Fire	firenze	0.72	Order of the Phoenix
hogwarts	0.46	Half-Blood Prince	crabbe	0.71	Prisoner of Azkaban
ministry	0.48	Deathly Hallows	trelawney	0.69	Goblet of Fire
gringotts	0.48	Order of the Phoenix	chris	0.56	Prisoner of Azkaban
Latent Entity 4			Latent Entity 5		
Entity	Distance	Origins	Entity	Distance	Origins
fudge	0.83	Prisoner of Azkaban	patil	0.41	Order of the Phoenix
longbottom	0.90	Half-Blood Prince	ministry	0.48	Deathly Hallows
angelina	1.03	Chamber of Secrets	tonks	0.50	Order of the Phoenix
johson	1.03	Chamber of Secrets	krum	0.53	Goblet of Fire
bell	1.03	Chamber of Secrets	gringotts	0.55	Order of the Phoenix
Latent Entity 6			Latent Entity 7		
Entity	Distance	Origins	Entity	Distance	Origins
krum	0.43	Goblet of Fire	chris	0.74	Prisoner of Azkaban
dumbledore	0.56	Goblet of Fire	tom	1.12	Order of the Phoenix
voldemort	0.57	Half-Blood Prince	warrington	1.23	Prisoner of Azkaban
hogwarts	0.59	Half-Blood Prince	tom	1.30	Order of the Phoenix
hagrid	0.59	Goblet of Fire	oliver	1.32	Philosopher's Stone
Latent Entity 8			Latent Entity 9		
Entity	Distance	Origins	Entity	Distance	Origins
voldemort	0.38	Half-Blood Prince	krum	0.38	Goblet of Fire
krum	0.45	Goblet of Fire	hogwarts	0.49	Half-Blood Prince
hogwarts	0.46	Half-Blood Prince	voldemort	0.52	Half-Blood Prince
gringotts	0.51	Order of the Phoenix	dumbledore	0.60	Goblet of Fire
ministry	0.53	Deathly Hallows	hagrid	0.61	Goblet of Fire

Table 22: Entity Topic Models Most Strongly Represented by Ten Latent Entities.

Latent Entity 0			Latent Entity 1		
Entity	Distance	Origins	Entity	Distance	Origins
derrick	0.94	Order of the Phoenix	congress	1.81	Half-Blood Prince
bole	0.94	Order of the Phoenix	number	1.81	Half-Blood Prince
coote	0.97	Half-Blood Prince	york	1.81	Half-Blood Prince
lynch	0.98	Goblet of Fire	broadway	1.81	Half-Blood Prince
flitwick	1.17	Order of the Phoenix	permissions	1.81	Half-Blood Prince
Latent Entity 2			Latent Entity 3		
Entity	Distance	Origins	Entity	Distance	Origins
draco	1.27	Philosopher's Stone	group	1.07	Deathly Hallows
katie	1.90	Philosopher's Stone	penguin	1.07	Deathly Hallows
weasleys	1.99	Chamber of Secrets	usa	1.07	Deathly Hallows
finch-fletchley	10.0	Goblet of Fire	fagles	1.07	Deathly Hallows
justin	10.0	Goblet of Fire	viking	1.07	Deathly Hallows
Latent Entity 4			Latent Entity 5		
Entity	Distance	Origins	Entity	Distance	Origins
ireland	1.83	Order of the Phoenix	polkiss	10.0	Philosopher's Stone
aunt	1.83	Half-Blood Prince	potter.	10.2	Prisoner of Azkaban
teams	1.83	Order of the Phoenix	restriction	10.2	Prisoner of Azkaban
sickles	1.88	Order of the Phoenix	underage	10.2	Prisoner of Azkaban
zacharias	10.0	Order of the Phoenix	padfoot	10.3	Order of the Phoenix
Latent Entity 6			Latent Entity 7		
Entity	Distance	Origins	Entity	Distance	Origins
life	1.66	Philosopher's Stone	london	10.0	Philosopher's Stone
elixir	1.66	Philosopher's Stone	caractacus	10.0	Half-Blood Prince
narcissa	1.94	Order of the Phoenix	spect	10.1	Chamber of Secrets
lumos	10.0	Half-Blood Prince	prophet	10.1	Goblet of Fire
malfoy.	10.0	Order of the Phoenix	filius	10.1	Half-Blood Prince
Latent Entity 8			Latent Entity 9		
Entity	Distance	Origins	Entity	Distance	Origins
gorgovitch	11.2	Deathly Hallows	1719	2.12	11.7432278998498
arkie	11.4	Half-Blood Prince	725	2.38	3.97775499591011
philpott	11.4	Half-Blood Prince	2669	2.50	17.3213707911799
wilkes	11.5	Goblet of Fire	1429	2.52	22.5742789952042
vanishing	11.8	Deathly Hallows	2028	2.57	17.1897138188635
Latent Entity 10			Latent Entity 11		
Entity	Distance	Origins	Entity	Distance	Origins
moaning	1.63	Half-Blood Prince	straightaway	10.1	Deathly Hallows
pensieve	1.92	Goblet of Fire	marvolo	10.2	Chamber of Secrets
filch	1.96	Prisoner of Azkaban	portkeys	11.1	Half-Blood Prince
neville	10.0	Chamber of Secrets	head	12.3	Chamber of Secrets
peru	10.0	Half-Blood Prince	boy	12.3	Chamber of Secrets

Latent Entity 12					
Entity	Distance	Origins	Entity	Distance	Origins
marvolo	0.90	Half-Blood Prince	mcgonagall	0.25	Order of the Phoenix
hufflepuffs	0.97	Deathly Hallows	slughorn	0.35	Half-Blood Prince
fawcett	1.02	Goblet of Fire	george	0.36	Goblet of Fire
headless	1.11	Half-Blood Prince	lupin	0.42	Half-Blood Prince
spinnet	1.30	Chamber of Secrets	dursleys	0.45	Order of the Phoenix
Latent Entity 14					
Entity	Distance	Origins	Entity	Distance	Origins
catchpole	0.85	Deathly Hallows	sweden	1.13	Order of the Phoenix
ottery	0.85	Deathly Hallows	rita	1.33	Half-Blood Prince
caps	1.18	Prisoner of Azkaban	skeeter	1.33	Half-Blood Prince
red	1.18	Prisoner of Azkaban	choo	1.44	Prisoner of Azkaban
borgin	1.31	Deathly Hallows	crescent	1.81	Order of the Phoenix
Latent Entity 16					
Entity	Distance	Origins	Entity	Distance	Origins
james	0.53	Order of the Phoenix	broadway	1.62	Order of the Phoenix
vernon	0.78	Philosopher's Stone	york	1.62	Order of the Phoenix
lupin	0.80	Prisoner of Azkaban	new	1.62	Order of the Phoenix
egypt	0.81	Prisoner of Azkaban	data	1.62	Order of the Phoenix
great	0.84	Philosopher's Stone	congress	1.62	Order of the Phoenix
Latent Entity 18					
Entity	Distance	Origins	Entity	Distance	Origins
tibbies	1.32	Philosopher's Stone	spinnet	0.80	Philosopher's Stone
cleansweep	1.32	Half-Blood Prince	oliver	0.86	Order of the Phoenix
eleven	1.32	Half-Blood Prince	quill	1.12	Order of the Phoenix
paws	1.32	Philosopher's Stone	arts	1.25	Goblet of Fire
road	1.32	Half-Blood Prince	broomsticks	1.30	Deathly Hallows
Latent Entity 20					
Entity	Distance	Origins	Entity	Distance	Origins
grandpré	0.95	Deathly Hallows	gwenog	10.0	Half-Blood Prince
illustrations	0.95	Deathly Hallows	jones	10.0	Half-Blood Prince
publishing	0.95	Deathly Hallows	prewett	10.0	Deathly Hallows
press	0.95	Deathly Hallows	quidditch	10.2	Philosopher's Stone
j.	0.95	Deathly Hallows	florence	10.2	Goblet of Fire
Latent Entity 22					
Entity	Distance	Origins	Entity	Distance	Origins
vernon	11.7	Deathly Hallows	portree	1.62	Order of the Phoenix
school	12.1	Goblet of Fire	puddlemere	1.62	Order of the Phoenix
dean	12.3	Half-Blood Prince	thomas	10.0	Philosopher's Stone
chudley	27.8	Chamber of Secrets	hannah	10.0	Chamber of Secrets
cannon	27.8	Chamber of Secrets	marcus	10.0	Half-Blood Prince

Latent Entity 24			Latent Entity 25		
Entity	Distance	Origins	Entity	Distance	Origins
fudge	10.0	Half-Blood Prince	seamus	0.40	Half-Blood Prince
against	10.0	Deathly Hallows	padfoot	0.76	Prisoner of Azkaban
defense	10.0	Deathly Hallows	madame	0.78	Order of the Phoenix
hooch	10.0	Half-Blood Prince	hogsmeade	1.17	Prisoner of Azkaban
madame	10.0	Deathly Hallows	pluto	1.18	Goblet of Fire
Latent Entity 26			Latent Entity 27		
Entity	Distance	Origins	Entity	Distance	Origins
crookshanks	0.76	Prisoner of Azkaban	emmeline	1.46	Half-Blood Prince
gaunt	0.76	Half-Blood Prince	bone	1.59	Goblet of Fire
pensieve	0.82	Order of the Phoenix	montgomery	1.68	Half-Blood Prince
filch	0.95	Philosopher's Stone	quidditch	1.70	Philosopher's Stone
magical	1.06	Goblet of Fire	borage	1.80	Half-Blood Prince
Latent Entity 28			Latent Entity 29		
Entity	Distance	Origins	Entity	Distance	Origins
gellert	0.72	Deathly Hallows	yaxley	10.4	Half-Blood Prince
potter	1.14	Philosopher's Stone	avery	10.4	Half-Blood Prince
james	1.16	Philosopher's Stone	k.	10.5	Half-Blood Prince
dursleys	1.20	Philosopher's Stone	a.	10.5	Half-Blood Prince
rowena	1.24	Deathly Hallows	levine	10.5	Half-Blood Prince
Latent Entity 30			Latent Entity 31		
Entity	Distance	Origins	Entity	Distance	Origins
pillsworth	1.37	Deathly Hallows	muggle	1.57	Chamber of Secrets
bernie	1.37	Deathly Hallows	house-elf	1.59	Goblet of Fire
barty	10.0	Goblet of Fire	blinky	1.59	Goblet of Fire
spinnet	10.0	Philosopher's Stone	proudfoot	1.74	Half-Blood Prince
grammatica	10.0	Deathly Hallows	savage	1.74	Half-Blood Prince
Latent Entity 32			Latent Entity 33		
Entity	Distance	Origins	Entity	Distance	Origins
flint	0.85	Philosopher's Stone	ariana	0.56	Deathly Hallows
shunpike	0.95	Deathly Hallows	xenophilius	0.63	Deathly Hallows
fabian	1.00	Order of the Phoenix	spell	0.64	Deathly Hallows
petunia	1.06	Philosopher's Stone	crouch	0.70	Goblet of Fire
odo	1.37	Half-Blood Prince	hallow	0.70	Deathly Hallows
Latent Entity 34			Latent Entity 35		
Entity	Distance	Origins	Entity	Distance	Origins
parkinson	10.0	Prisoner of Azkaban	mark	1.81	Half-Blood Prince
clearwater	10.0	Prisoner of Azkaban	forbidden	1.90	Goblet of Fire
penny	10.0	Prisoner of Azkaban	quidditch	10.0	Philosopher's Stone
law	10.0	Prisoner of Azkaban	chaser	10.0	Order of the Phoenix
magical	10.0	Prisoner of Azkaban	ladislaw	10.0	Order of the Phoenix

Latent Entity 36			Latent Entity 37		
Entity	Distance	Origins	Entity	Distance	Origins
hall	0.56	Prisoner of Azkaban	antigone	1.35	Half-Blood Prince
great	0.56	Prisoner of Azkaban	rosalind	1.35	Half-Blood Prince
drive	0.57	Goblet of Fire	bungs	1.35	Half-Blood Prince
privet	0.57	Goblet of Fire	three	1.46	Goblet of Fire
hogsmeade	0.60	Half-Blood Prince	broomsticks	1.46	Goblet of Fire
Latent Entity 38			Latent Entity 39		
Entity	Distance	Origins	Entity	Distance	Origins
arcus	1.57	Deathly Hallows	express	1.76	Philosopher's Stone
cross	1.75	Philosopher's Stone	algie	1.90	Order of the Phoenix
loxias	1.78	Deathly Hallows	assyria	1.90	Order of the Phoenix
cadogan	1.79	Deathly Hallows	wistful	10.0	Order of the Phoenix
stanley	1.95	Deathly Hallows	wilfred	10.0	Order of the Phoenix
Latent Entity 40			Latent Entity 41		
Entity	Distance	Origins	Entity	Distance	Origins
jorkins	0.68	Goblet of Fire	wales	1.01	Goblet of Fire
galatea	1.45	Half-Blood Prince	davey	21.2	Prisoner of Azkaban
minerva	1.49	Goblet of Fire	gudgeon	21.2	Prisoner of Azkaban
salmon	1.54	Deathly Hallows	lockhart	21.5	Half-Blood Prince
marsh	1.60	Prisoner of Azkaban	howler	21.9	Order of the Phoenix
Latent Entity 42			Latent Entity 43		
Entity	Distance	Origins	Entity	Distance	Origins
blotts	1.23	Half-Blood Prince	k.	0.84	Philosopher's Stone
express	1.87	Deathly Hallows	department	0.84	Philosopher's Stone
road.	1.88	Deathly Hallows	data	0.84	Philosopher's Stone
dean	10.0	Order of the Phoenix	ny	0.84	Philosopher's Stone
jordan	10.0	Half-Blood Prince	mary	0.84	Philosopher's Stone
Latent Entity 44			Latent Entity 45		
Entity	Distance	Origins	Entity	Distance	Origins
patricia	1.43	Order of the Phoenix	weasleys	1.60	Goblet of Fire
stimpson	1.43	Order of the Phoenix	bill	10.0	Half-Blood Prince
drive	1.81	Deathly Hallows	bogrod	10.0	Deathly Hallows
privet	1.81	Deathly Hallows	gryffindor	10.0	Deathly Hallows
chris	1.92	Prisoner of Azkaban	sixty	10.0	Half-Blood Prince
Latent Entity 46			Latent Entity 47		
Entity	Distance	Origins	Entity	Distance	Origins
committee	10.1	Goblet of Fire	patronuses	0.51	Deathly Hallows
harkiss	10.1	Half-Blood Prince	dursley	0.88	Deathly Hallows
dawlish	10.2	Half-Blood Prince	magorian	0.90	Order of the Phoenix
ottery	10.2	Goblet of Fire	privet	0.91	Half-Blood Prince
catchpole	10.2	Goblet of Fire	drive	0.91	Half-Blood Prince

Latent Entity 48			Latent Entity 49		
Entity	Distance	Origins	Entity	Distance	Origins
parvati	0.74	Prisoner of Azkaban	england	1.21	Chamber of Secrets
dedalus	0.82	Deathly Hallows	minerva	1.27	Deathly Hallows
johson	1.03	Prisoner of Azkaban	wilhelmina	1.50	Order of the Phoenix
karkaroff	1.22	Half-Blood Prince	millicent	1.59	Chamber of Secrets
amelia	1.31	Order of the Phoenix	bulstrode	1.59	Chamber of Secrets

Latent Entity 50		
Entity	Distance	Origins
damocles	1.37	Half-Blood Prince
witch	1.42	Goblet of Fire
weekly	1.42	Goblet of Fire
halloween	1.61	Prisoner of Azkaban
diagon	10.0	Goblet of Fire

Table 23: Tables of Top Entity Topic Models for 50 Latent Entities extracted from the Harry Potter Novels

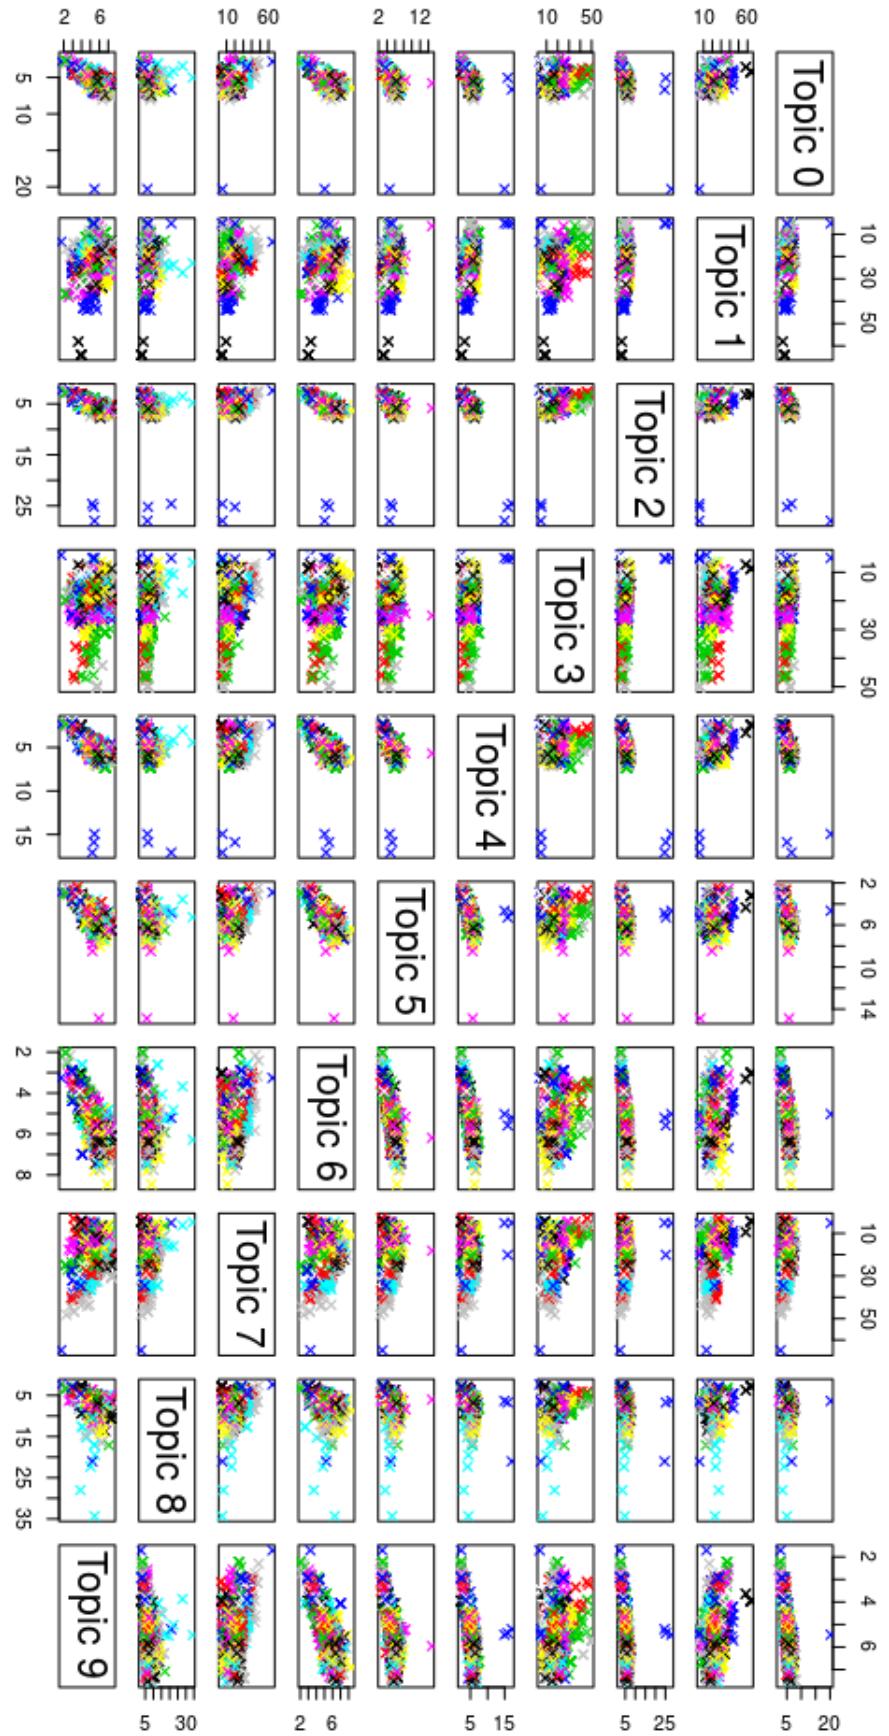


Figure 41: Pairwise Plot of Entity Topic Models when Coloured for 50 Latent Entity Group

Appendix B

Project Planning Document

The following pages form the project planning document that initiated the investigation for this thesis. It outlines preliminary aims and objectives whilst also evaluating some of the risks that may be associated with the project going forward.



College of Science and Technology
School of Science and Technology

Analysing Narratives: Automatic Descriptive Feature Extraction Through Latent Entity modelling

Adam Slack
N0499528

Introduction

The web is a seemingly ever-expanding resource [1], providing access to news, games, research, films, social media, books, and many forms of entertainment. Given the amount of information available to an individual, it becomes necessary to filter and reduce what is available, producing a set of data that is both relevant and in alignment with our personal interests. Without such a reduction in volume a reader would spend an increasing amount of time evaluating the suitability of documents before dedicating any time to reading them.

Analysis of narratives provides an opportunity to utilise or develop novel methods for the field of Natural Language Processing (NLP) that also fall within the wider field of Information Retrieval (IR) [2]. A driving focus of the study will be the use or modification of statistical techniques essential to the identification, relation, and resolution of inter-document entities. The identification of latent abstract entities common to numerous documents, may allow the automatic generation of summaries or comparisons of distinct narratives. Techniques relating to the extraction of latent information and topic modelling, such as Latent Dirichlet Allocation (LDA) [3] or Non-Negative Matrix Factorisation (NMF) [4] may prove useful when attempting to model distributions of entities and descriptive features.

This research aims to determine the viability of a system for the identification and automatic extraction of features present within narratives; The purpose of which is to provide insight into a set of documents without the need to manually extract information. It shall consider attributes deemed potentially useful for the extraction of abstract entities. This could include features specific to individual texts as well as those that frame a document in relation to the larger corpus. The practical applications of such features will also be considered as well as an evaluation of the efficacy of each narrative attribute when summarising a document. Such information could also provide useful insights into an individual's personal preferences, additionally It could help identify methods that can be utilised by authors to write books that are more appealing to their target audiences.

Topic modelling is a subset of Machine Learning (ML) and NLP. Primarily the focus of which is to identify and extract information about abstract topics and concepts within texts. It is also an area of

research that closely relates to the aim of this project. Related literature could potentially be adapted to provide insight into entities present within documents. Research in topic modelling also extends to temporal information, with consideration to the changing prevalence of topics over time [5]. It is possible that similar techniques could be applied to observe the changing pervasiveness of abstract entities across documents.

Automatic summarisation of documents also relates to this investigation. Often the task of producing summaries focuses on the extraction of keywords or salient sentences as well as other features of a document [6,7]. Techniques for producing summaries can apply to both single and multi-document problem spaces [8]. A challenge frequently faced when summarising document is evaluating the outputs of specific abstraction and extraction based methods, It is likely that the methods resulting from this study will encounter the same challenges. Methods for evaluating related techniques do exist [9,10], and this investigation will consider the suitability of these methods when evaluating any novel techniques that are proposed going forward.

Aims and Objectives

The overall aim of this study, is to develop methods for the extraction of information relating to abstract entities present across a corpus. This can be broken down into 3 aims and objectives that will direct the progression of the study.

A01: *To Identify features of narratives that are effective for the task of document summarization.*

By identifying abstract entities within narratives, it would be possible to describe a corpus in terms of those entities, thus providing a summary. Modelling entity distributions across narratives may require input from various features of a document first. As a result, one objective of this study is to determine exactly which features of narratives are required and the extent of their use.

A02: *To determine the efficacy of selected existing analytical methods when used individually and in conjunction with each other.*

With topic modelling already being an established field of study within NLP, there exists a suite of analytical methods that provide a decent place to start an investigation of this kind. To avoid

reiterating what numerous academics have previously undertaken it is necessary to consider the efficacy of many of the existing methods with regards to the identification a corpus' latent abstract entities. The evaluation of methods can be carried out through direct comparisons and benchmarking. It is possible that improved performance can be attained through various combinations of statistical and grammatical based methods, so hybrid models will also be considered.

A03: *To define an extensible pipeline process for the automated analysis of narratives.*

An underlying objective of the investigation will be to produce a pipeline from which data (in the form of narratives) can be provided to a system, and extracted information will be provided as an output. The satisfaction of this method can be measured through the efficiency of such a pipeline as well as through the amount of human interaction that is required by any resulting system. The need for such a system stems from the rate at which new data is generated, using machines to assist in the production of information from data will make the whole process more manageable.

Project Scope and Deliverables

The scope of the project is deliberately flexible. It contains a number of opportunities for refinement, either reducing or increasing the scope as appropriate. As outlined in the Aims and Objectives the project is oriented around identifying specific features of narratives. There are tasks that need to be carried out prior to identifying features as well as after they have been extracted. As a result the project can be described as a series of deliverables..

D1: *Obtain Narratives - identify suitable types and sources of narratives*

In order to begin analysing narratives, it is necessary to determine what types of narratives should be obtained as well as a source for them. The repository of narratives needs to be large enough in scale so that suitably complex analysis can be investigated.

D2: *investigate methods of analysis*

NLP is a large field that is utilised in many other areas of computer science. As a result of this there is plenty of literature available. By reading and evaluating previous related investigations progress with this investigation can be made without repeating mistakes made by others, whilst also identifying potentially effective and novel methods. Given the amount of existing related research, a limit on the

amount of time and resources dedicated to this deliverable must be placed. This ensures that progress on the project can be made.

D3: Analysis Implementation - testing and evaluating efficacy of methods

Once methods of analysis have been identified, they need to be investigated. In order to fully determine whether they are of any use and also the extent at which they can be utilised. It is also necessary to compare and contrast different techniques. Benchmarks can be formed by using standard methods to establish a baseline level of performance.

D4: Review Point One and Two

Review points are positioned throughout the duration of the project to ensure that progress is being made at an acceptable rate and that any arisen issues can be circumnavigated. Review point one is scheduled for the end of teaching week 4, at this stage this project planning document is to be submitted for review. Review point 2 is to take place during teaching week 15, where additional documents will be completed.

D4: Project Report

As the project is being undertaken for the completion of a Bachelors of Science in Computer Science, a formal document reporting the study is to be written. This document will detail all parts of the investigation, including a review of current literature relating to the project, an evaluation of any implementation, and a discussion of any results from the project. A deadline for the report has been set for Wednesday of teaching week 24.

D5: Project Demonstration

Scheduled for the end of teaching week 25, a demonstration of what has been completed during the project is expected. This will provide an opportunity to present any findings from the study whilst also satisfying requirements placed by the NTU for the attainment of a BSc (Hons) Computer Science. It is expected that no further work will be required for the project by this point. The only remaining tasks will be preparation for the demonstration.

Project Scope

The flexible nature of the project doesn't prevent certain tasks from being out of scope from the

outset. Producing a system that assimilates a corpus in its entirety would be completely out of scope. Likewise, in depth analysis of numerous features of a corpus is also out of scope, there is however a distinction that needs to be made between features of a corpus and features of an individual narrative. It isn't necessarily out of scope that a select amount of features present in narratives be investigated. This is because they may be essential to achieving the ultimate aim of analysing an individual aspect of the corpus.

The development of a fully autonomous system for the processing of documents is on the fringe of being out of scope of the project. The task of accumulating documents and integrating them into the system would likely prove to be as big a task as the investigation of common abstract entities. It wouldn't be out of scope however to define the behaviour, or to implement a basic prototype of such a system. Such a system would likely require a human to build a corpus prior to analysis. Whilst development may take time to carry out, it would assist in evaluation of any devised methods, ultimately easing other tasks.

Sources of Information

Existing literature is an essential resource. It offers insight into what researchers have previously worked on. The search engine, Google [11], provides search methods for finding prior and related research. The levels of accessibility that Google provides to locations where journal and conference papers are available, means that to not use such a tool would be a hindrance to the project.

Similarly Wikipedia [12] is also a valuable source of information. In such an active area of research, wikipedia is frequently updated with new information. Whilst the reliability of wikipedia is commonly questioned, and the depth at which topics are discussed is not necessarily as detailed as required [12,13] It does however succeed at being a source for finding related work on a topic. Specifically wikipedia provides collections of sources for what is discussed earlier on the page. It is this list of references that make wikipedia a valuable tool.

Subject experts will also be useful sources of information. A number of Academics at Nottingham Trent University (NTU) have extensive experience with a variety of NLP, ML and Computational

Intelligence topics. Through discussions about the field it is hoped that new ideas can be generated and guidance on specific topics can be given.

Required Resources

The Gutenberg project [14] is a valuable resource for project involving natural language. Featuring over 54,000 freely available narratives, the site can be scraped with relative ease. Such a resource will prove useful to this project for numerous reasons. Primarily it makes enough data available that meaningful analysis can be performed on inter-document descriptive features, whilst making other ML methods an option should early investigations prove useless. Additionally should the resource be used as part of an automated pipeline, there are enough instances that meaningful consideration can be given to the efficiency of such a pipeline.

From obtaining large corpuses of text, to performing complex analysis, some of the tasks required by this project may take hours, or even days to complete. For that reason access to a machine that can be left running 24 hours a day is required. This will mean that processes can be executed continuously overnight and even over a couple of days. An example scenario where such a resource would be of use is seen in the obtaining of books from Project Gutenberg. It is estimated that it would take approximately 48 hours to download and unzip all available texts. NTU have kindly offered an appropriately specced Virtual Machine (VM) on a University owned server for academic purposes. This VM will be able to provide much of the throughput required by the project.

Project Risks

There are a number of risks to the project that would be detrimental to its success. Anything from failing to obtain any or enough narratives for analysis, to not having access to computational resources that allow analysis to be performed. This section will outline some of the more likely and impactful risks to this project.

R1: Failure to Obtain any or enough Narratives

As the project relies on having data to analyse, one of the obvious risks is that suitable data cannot be obtained. The most likely reason for this is legal issues, given that work in the UK is subject to

copyright laws, it is possible that common public collections of narrative work is not legally available in the UK. The impact this would have on the project should this occur would be detrimental. As discussed later, only work that can be accessed in a legal manner can be used in textual analysis. Should UK copyright law prohibit the use of works featured in Project Gutenberg, then it would mean purchasing access to narratives or finding alternative means of obtaining them. It is possible however that the impact can be mitigated by the fact that British libraries can provide a means of legally accessing work, even in eBook form [15,16].

Whilst access to libraries can mitigate some of the impact of having no narratives to analyse, it is possible that obtaining enough narratives to perform in-depth analysis would still be difficult. Many methods rely on having dense networks being formed between elements, such collaborative methods suffer from what is referred to as the sparsity problem [17]. Should there be a lack of narratives available, then it is likely that this study also falls foul to the sparsity problem and other features of narratives will need to be investigated.

R2: Failure to successfully analyse any narratives

The severity of this problem essentially means that the project would be rendered useless. There are many different methods of analysis that can be investigated, however the overall aim of the project is to investigate the extraction of common latent abstract entities and the composition of narratives featuring them. Should this prove to be too challenging a task then there are other aspects that would have to take precedence. In order to mitigate the risk of failing the primary aim of the project, the comparison of analysis methods and implementation of an automated pipeline would become the new focus of the project. This would still provide enough substance that a project could be structured around them.

The challenge of mitigating this risk is identifying a suitable time to stop. It might not be clear that the task is unachievable until it is too late. To combat this, regular reviews of the current state of the project will be carried out. This will take the form of personal progress reviews, as well as weekly meetings with a project supervisor.

R3: Can't carry out analysis for long enough

Working on the assumption that a large corpus can be built, extended periods of time may need to be allocated for a system to assimilate such a corpus. Statistical methods that require iterating over the contents of a corpus will take increasing amounts of time to complete for every additional narrative. To limit the effect of time constraints associated with this project, the size of the corpus will be adapted according to the methods used as well as increased incrementally. Controlling this risk is essentially an optimisation problem, what amount of books provides the most amount of insight, whilst also taking a reasonable amount of time to analyse. Whilst mathematically modelling this as a function and finding optimal input parameters is an option, it may be easier to incrementally increase the size of a corpus, limiting its size when only marginal gains are made with results from analysis, or when the amount of time required to carry out a process begins to prevent progress.

Evaluation of Professional, Social, Ethical and Legal issues.

Many narratives exist in the form of books, and given that this study will focus on the analysis of narratives present in books, it is prudent that consideration of the legal issues surrounding the analysis of published works be considered. Many books are subject to copyright and local laws, many countries have different rules and regulations regarding the use of published works and intellectual property. The World Intellectual Property Organisation (WIPO) is a United Nations (UN) agency concerning itself with the protection of property rights across the world, some of the tasks involved with this include standardising law across UN member states. [18]


The UK Gov't summarises that copyright protects work from being: copied, distributed, rented or loaned, performed or displayed publically, and adapted. [19] Section 29 of Copyright, Designs and Patents Act 1988 outlines the conditions of copyright for research and private study [20], section 29(1) specifically states that use of protected work is considered fair dealing if protected work is used "*for the purposes of research for a non-commercial purpose [...] provided that it is accompanied by a sufficient acknowledgement.*" Text and Data Mining is also outlined as an exception to UK copyright laws. [21] The UK Gov't summaries the legislation as meaning textual analysis of protected work is allowed if there is lawful access to the work in question. [22]

There are limited direct ethical issues with the proposed project, however there are still points for

discussion. Informed consent is frequently raised as a point for discussion in research projects involving people. Whilst there will be no direct involvement of individuals, there will be extensive use of work produced by others. This raises the question of whether consent to use their work should be requested. Analysis of narratives could be used to provide insights into an author, and thus could be considered secondary data. Arguably the use of such data should be held to the same ethical standards as clinical data. Additionally should abstract entities be identified across narratives, there would then exist information that could be used to compare distinct narratives, if two works contain the same abstract entities then it could raise the question of whether one work is derivative of the other. This raises moral issues both socially and professionally, given that the integrity of an author could then be brought into question. Whilst the legality of such analysis is lawful, socially and professionally there are still questions. However given that it is common practice to review books and other products, the ethical implications can be lessened as authors open themselves to criticism with each publication.

Timeline

This project deadline for all tasks of this project is the end of teaching week 25 (2018-04-01) however practical development work on the project should be completed much earlier than that (2018-02-01) leaving only documentation and experimentation to report on.

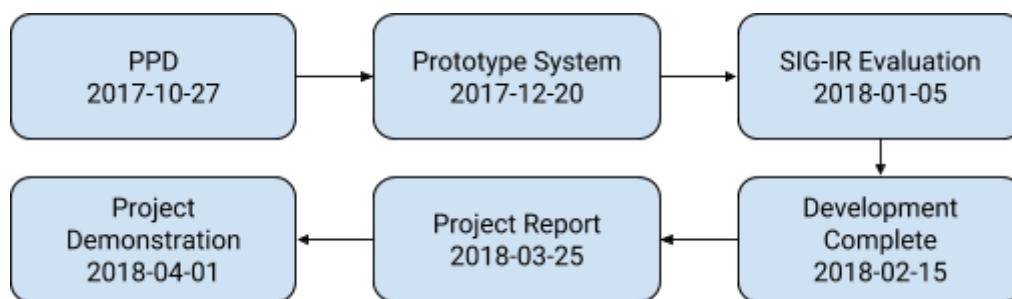

References

1. Web Server Survey | Netcraft Available at:
<https://news.netcraft.com/archives/category/web-server-survey/> [Accessed October 16, 2017].
2. Smeaton, A.F. (1999). Using NLP or NLP Resources for Information Retrieval Tasks. In Natural Language Information Retrieval Text, Speech and Language Technology. (Springer, Dordrecht), pp. 99–111.
3. Blei, D.M., Ng, A.Y., and Jordan, M.I. (2003). Latent Dirichlet Allocation. *J. Mach. Learn. Res.* 3, 993–1022.
4. Lee, D.D., and Seung, H.S. (2001). Algorithms for Non-negative Matrix Factorization. In Advances in Neural Information Processing Systems 13, T. K. Leen, T. G. Dietterich, and V. Tresp, eds. (MIT Press), pp. 556–562.
5. Newman, D.J., and Block, S. (2006). Probabilistic topic decomposition of an eighteenth-century American newspaper. *J. Am. Soc. Inf. Sci.* 57, 753–767.
6. Erkan, G., Radev - Journal of Artificial Intelligence Research, D.R., and 2004 (2004). Lexrank: Graph-based lexical centrality as salience in text summarization. *jair.org*. Available at:
<http://www.jair.org/papers/paper1523.html>.
7. Goldstein, J., Kantrowitz, M., Mittal, V., and Carbonell, J. (1999). Summarizing Text Documents: Sentence Selection and Evaluation Metrics. In Proceedings of the 22Nd Annual International ACM SIGIR Conference on Research and Development in Information Retrieval SIGIR '99. (New York, NY, USA: ACM), pp. 121–128.
8. Goldstein, J., and Kantrowitzt, M. Multi-Document Summarization By Sentence Extraction. Available at:
http://delivery.acm.org/10.1145/1120000/1117580/p40-goldstein.pdf?ip=152.71.207.142&id=1117580&acc=OPEN&key=4D4702B0C3E38B35%2E4D4702B0C3E38B35%2E4D4702B0C3E38B35%2E6D218144511F3437&CFID=997908537&CFTOKEN=73239202&_acm_=1508768857_e68037103a20e32986729d89a20842fc
9. Wallach, H.M., Murray, I., Salakhutdinov, R., and Mimno, D. (2009). Evaluation Methods for Topic Models. In Proceedings of the 26th Annual International Conference on Machine Learning ICML '09. (New York, NY, USA: ACM), pp. 1105–1112.
10. Lin, C.-Y. (2004). ROUGE: A Package for Automatic Evaluation of Summaries. In Text Summarization Branches Out: Proceedings of the ACL-04 Workshop, S. S. Marie-Francine Moens, ed. (Barcelona, Spain: Association for Computational Linguistics), pp. 74–81.
11. Google Available at:
https://www.google.co.uk/?gfe_rd=cr&dcr=0&ei=06LpWfKTEKfS8AeZyJKICA [Accessed October 20, 2017].
12. Wikipedia contributors (2017). Main Page. Wikipedia, The Free Encyclopedia. Available at:
https://en.wikipedia.org/w/index.php?title=Main_Page&oldid=798174323 [Accessed October 20, 2017].
13. Azer, S.A. (2014). Evaluation of gastroenterology and hepatology articles on Wikipedia: Are they suitable as learning resources for medical students? *Eur. J. Gastroenterol. Hepatol.* 26, 155.
14. Project Gutenberg Project Gutenberg. Available at: <http://www.gutenberg.org/> [Accessed October 19, 2017].
15. Nottingham City Council Borrow E-books and E-magazines. Nottingham City Council. Available at:
<http://www.nottinghamcity.gov.uk/libraries/borrow-e-books-and-e-magazines/> [Accessed

October 20, 2017].

16. e-books and e-audio Available at:
<http://libraries.essex.gov.uk/e-books-e-audio-e-magazines-and-book-groups/e-books-and-e-audio/> [Accessed October 20, 2017].
17. Grčar, M., Mladenič, D., Fortuna, B., and Grobelnik, M. (2006). Data Sparsity Issues in the Collaborative Filtering Framework. In Lecture Notes in Computer Science, pp. 58–76.
18. Inside WIPO Available at: <http://www.wipo.int/about-wipo/en/> [Accessed October 22, 2017].
19. Intellectual property: Copyright - GOV.UK Available at:
<https://www.gov.uk/topic/intellectual-property/copyright> [Accessed October 20, 2017].
20. Participation, E. (1988). Copyright, Designs and Patents Act 1988. Available at:
<https://www.legislation.gov.uk/ukpga/1988/48/section/29> [Accessed October 20, 2017].
21. Exceptions to copyright Available at:
https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/375954/Research.pdf.
22. Exceptions to copyright - GOV.UK Available at:
<https://www.gov.uk/guidance/exceptions-to-copyright> [Accessed October 20, 2017].