Preface

This Cross-Border Payment Reporting plus (CBPR+) User Handbook is intended to document and explain a variety of ISO 20022 payment related topics, as well as provide practical use cases to ensure a common understanding and adoption of ISO 20022 within the payment industry.

The SWIFT FINplus service will support CBPR+ messages on the SWIFT network traditionally associated with correspondent banking (many-to-many). These messages may be exchanged either between Agents in the same country or between Agents in different countries.

The use cases focus on a core topics where other relevant messages may also be referred to within the use case, it may also be necessary to consider other documented use cases, in order to capture a wider variation of scenarios.

Note:

This document jointly developed with the CBPR+ group continues to evolve inline with the Standards Release as:

- CBPR+ continue to develop market practice guidelines for additional message.
- Inaccuracies are identified and corrected.
- Further use cases and/or explanation needs are identified

Change log (since last iteration)

Page 2	Updated – note
Page 5	Updated – new messages added to index
Page 6	Updated – new messages added to index
Page 11	Updated – correction of Intermediary code
Page 33	Updated – new messages and Usage Ids added
Page 40	Updated – new pain message added to index
Page 45	Updated – recognition of Payment Initiation relay rulebook
Page 107	Updated – recognition of Payment Initiation relay rulebook
Page 122	Updated – additional use cases in the index
Page 126	New –use case
Page 134	New – use case
Page 135-182	New – pain.008 message section
Page 184	Update – new messages added to index
Page 204	Update – removed refer to Wait For Settlement Market Practice
Page 351	New – new high level message flow
Page 371	Updated – new messages added to index
Page 379-380	New – pacs.003 use cases
Page 400	Updated – additional guidance on ultimate parties on the return
Page 423	Updated – correct to Agent description in Step 7
Page 458-488	New – pacs.010 Margin Collection section
Page 489-529	New – pacs.003 Customer Direct Debit section
Page 530	Updated – new message added to index
Page 674	Updated – removed reference to SR 2023
Page 682	Updated – moved reference to multiple notification, now at an *Item* level
Page 691	Updated – reference to multiple notification item Rule
Page 698-716	New – camt.058 Notice to Received Cancellation section
Page 743	Updated - new message added to index
Page 764	Updated - use case id correction
Page 774-795	New – Customer Cancellation Request section
Page 823-883	New – Cheque message sections
Page 880	Updated - use case id correction

The following icons dignify changes to slide from the previous itineration. Updates to text on a slide are captured in **gold**.

New slide since last iteration

Slide updated since last iteration

Legend

- Message type and direction
- Optional Message type and direction
- Focal Message type and direction
- pacs Debtor
- pacs Creditor
- pacs.008 Ultimate Debtor
- pacs.008 Ultimate Creditor
- Initiating party on behalf of the Debtor
- Agent
- Agent processing legacy format during a coexistence period
- Market Infrastructure
- Exceptional circumstance
- Exception & Investigation Case Assigner
- Exception & Investigation Case Assignee
- Statement Account Owner
- Statement Account Servicer
- Statement Authorised Party
- Shortcut to other part of document
- Extra attention is needed
- Legacy FIN MT message
- gpi Tracker
- Use Case variation
- Payment Initiation (pain)
- Payment Clearing and Settlement (pacs)
- Cash Management Reporting (camt)
- Cash Management Exception & Investigations (camt)
- Focus message
- Element Hierarchy Path
- Nested Element
- Element Choice
- Nested Element involving a choice
- New slide since last iteration
- Slide updated since last iteration
- Best practice

Table of contents

1. Introduction to ISO 20022
2. Business Application Header
3. Payment Initiation (pain)
   - pain.001 - Interbank Customer Credit Transfer Initiation
   - pain.002 - Interbank Customer Payment Status Report
   - pain.008 – Customer Direct Debit Initiation new for SR2023
4. Payment, Clearing and Settlement (pacs) messages
   - pacs.002 – Financial Institution to Financial Institution Payment Status Report
   - pacs.004 – Payment Return
   - pacs.003 – Financial Institution to Financial Institution Customer Direct Debit new for SR2023
   - pacs.008 - Financial Institution to Financial Institution Customer Credit Transfer
   - pacs.009 (core) - Financial Institution Credit Transfer
   - pacs.009 (cov) - Financial Institution 'Cover' Credit Transfer
   - pacs.009 (adv) – Financial Institution 'Advice' Credit Transfer
   - pacs.010 – Financial Institution Direct Debit
   - pacs.010 – Financial Institution Direct Debit – Margin Collection new for SR2023

Table of contents (continued)

5. Cash Management Reporting (camt) messages

camt.052 - Bank to Customer Account Report

camt.053 - Bank to Customer Statement

camt.054 - Bank to Customer Debit Credit Notification

camt.057 – Notification to Receive

camt.058 – Notification to Receive Cancelation Advice new for SR2023

6. Cash Management Exception & Investigation (camt) messages

camt.029 - Resolution of Investigation

camt.055 – Customer Payment Cancelation Request new for SR2023

camt.056 - FI to FI Cancellation Request

7. Cheques

camt.107 – Cheque Presentment Notification new for SR2023

camt.108 – Cheque Cancellation or Stop Notification new for SR2023

camt.109 – Cheque Cancellation or Stop Report new for SR2023

Introduction to ISO 20022

Introduction to ISO 20022

ISO 20022 introduces a fundamental change to the traditional language used by the payments industry for several decades. It also describes participants (i.e., parties) to a business transaction differently based upon the business domain (area) being described, in a similar way you may describe a person as a colleague, parent or sibling depending upon the context you wish to describe them. This section is designed to capture and explain some of the differences.

Introduction to ISO 20022 – Business Domains

Domains

Payment and Cash Management
Securities
Trade Services
Foreign Exchange
Card Payment

Message Definitions

acmt	Account Management
auth	Authorities
camt	Cash Management
pacs	Payment Clearing and Settlement
pain	Payment Initiation
remt	Payment Remittance Advice

Message Sets

camt.052 Bank to Customer Account Report
camt.053 Bank to Customer Statement
camt.054 Bank to Customer Debit Credit Notification
camt.056 FI to FI Payment Cancellation Request
camt.057 Notification to Receive

pacs.002 FI to FI Payment Status Report
pacs.004 Payment Return
pacs.008 FI to FI Customer Credit Transfer
pacs.009 Financial Institution Credit Transfer

pain.001 Customer Credit Transfer initiation
pain.002 Customer Payment Status Report
pain.012 Creditor Payment Activation Request

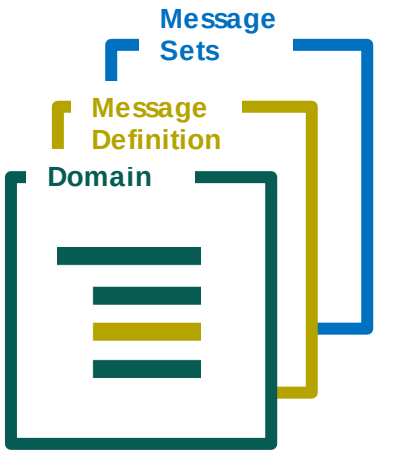

ISO 20022 catalogue messages hierarchically beginning with a Business Domain, contain a various sets of Message Definitions, which in turn contain a variety of Message Sets.

for example:

- Payment and Cash Management
  - Payments Clearing and Settlement
    - FI to FI Customer Credit Transfer (pacs.008)

Introduction to ISO 20022 - Message Identifier

4!a . 3!c . 3!n . 2!n

- 4!a → Business area
- 3!c → Message identifier/functionality
- 3!n → Variant
- 2!n → Version

Example

pacs.008.001.08

- pacs → Payments Clearing and Settlement
- 008 → FI To FI Customer Credit Transfer
- 001 → Variant 1
- 08 → Version 8

What is changing? Party Identifiers

Legend:

ISO 20022

New parties introduced in ISO 20022

:XX FIN MT format equivalent

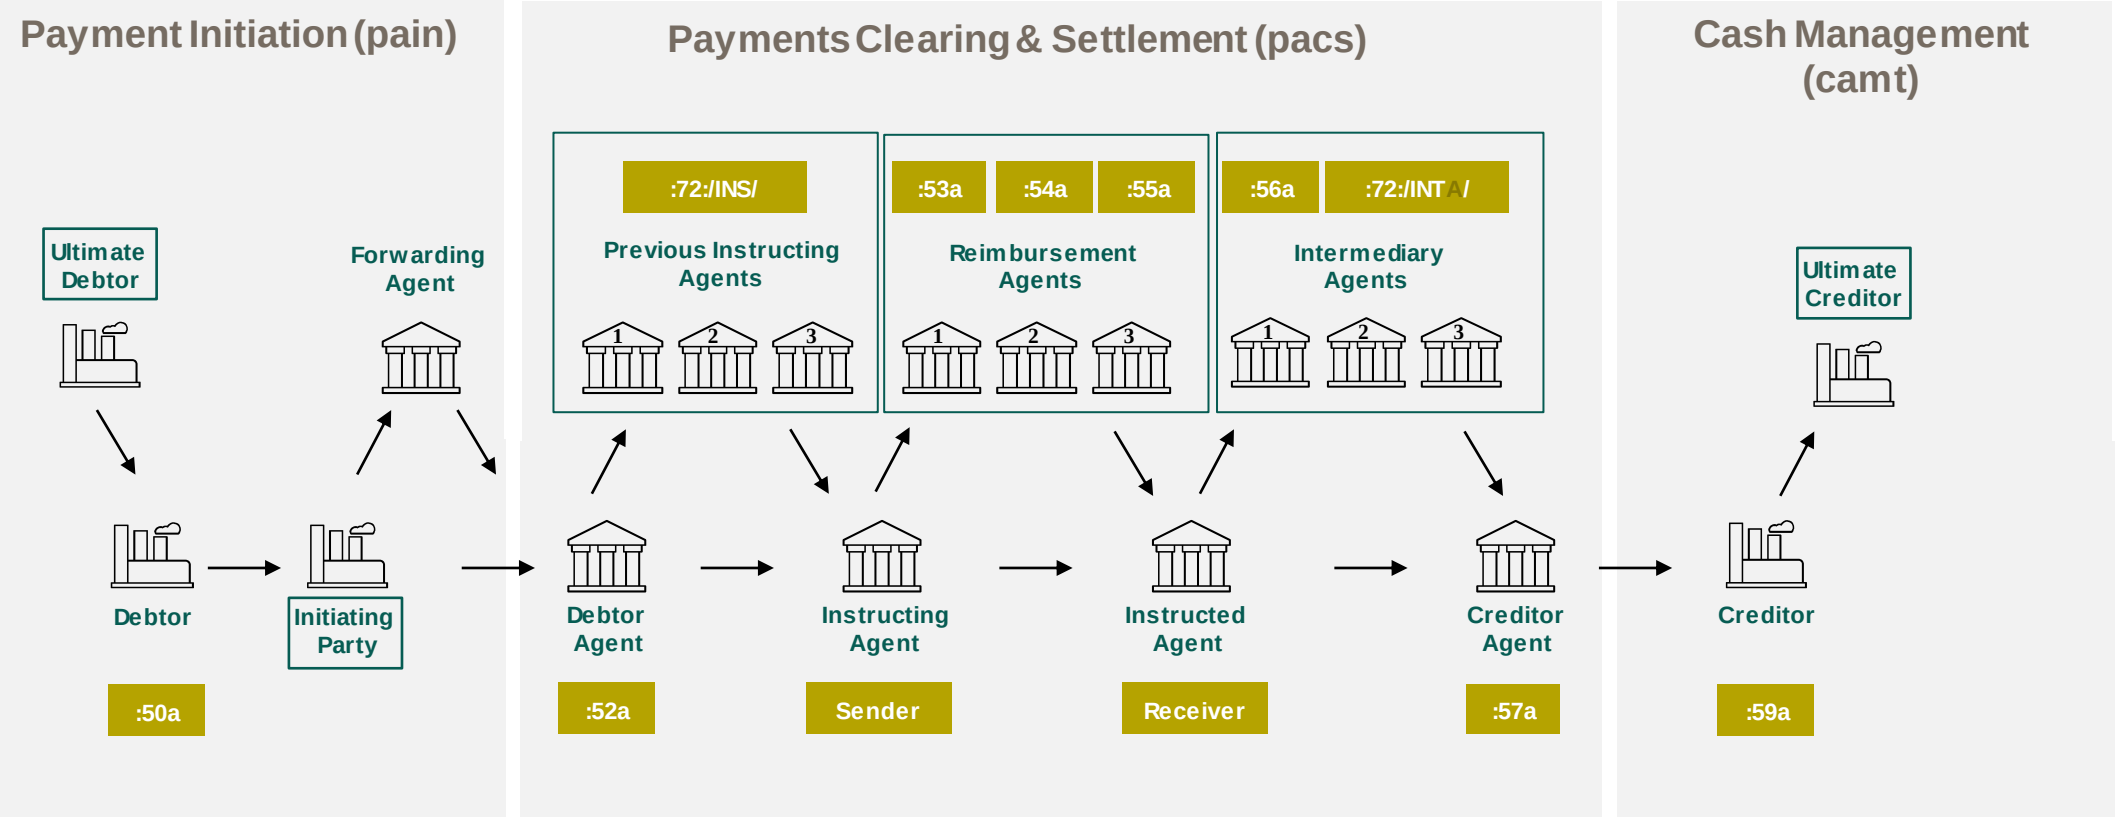

SWIFT FINplus Message structure

The diagram attempts to explain the construct of an ISO 20022 message sent across the SWIFT network using the **FINplus** service (which is designated to support various ISO 20022 business domains on SWIFT Interact)

Within the CBPR+ User Handbook the predominant focus is on the **Request Payload,** as this is where the business information is contained. However, it is worth noting that a network provider will have additional containers around the Request Payload to perform functionality on its network. This diagram presents the additional containers on the SWIFT network such as the Request Header often referred to as the Technical Header of the message.

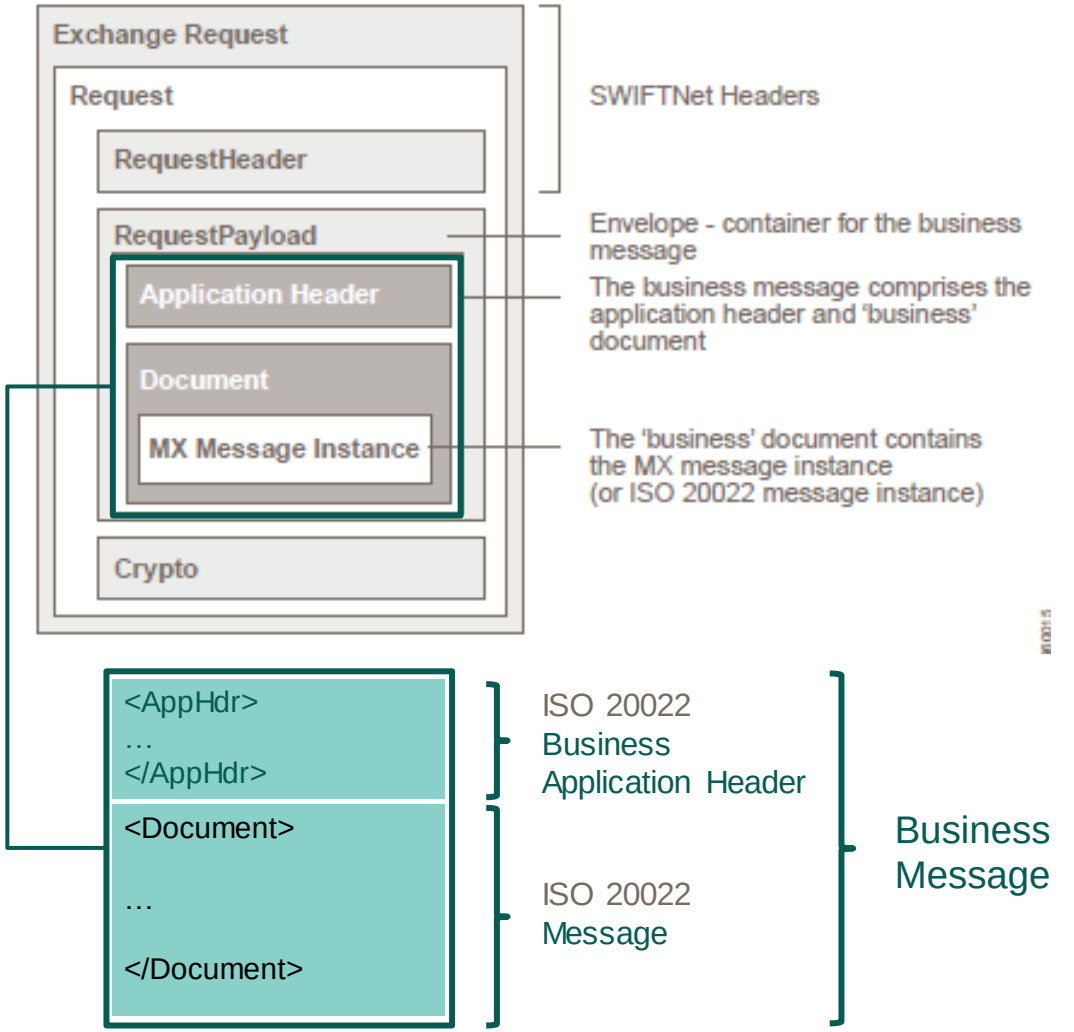

XML Elements

XML Elements

An XML instance or document contains data in elements and nested elements (elements which contain other elements) corresponding to the hierarchy imposed by the XML schema. In the CBPR+ Usage Guidelines we often refer to the element hierarchy by levels (to understand the nested relationship) whereby a Level 2 element effectively is a sub-element or child of another element. For example in a pacs.008 Customer Credit Transfer the *Interbank Settlement Date* is a sub-element (Level 2) of the *Credit Transfer Transaction Information* element (Level 1).

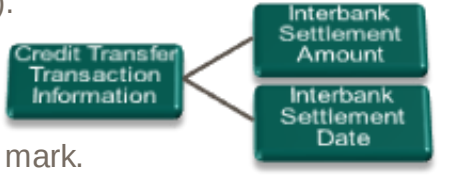

Naming conventions

An XML element is named according to the following rules:

- The name can contain letters, numbers, and other characters, but must not start with a number or punctuation mark.
- The name must not start with XML, xml, or Xml.
- The name must not contain any spaces.

MX naming conventions

There are some generic naming rules that apply to most items in the database.

- The names of all items in the database use the upper CamelCase convention, as follows:
  - Each word starts with a capital letter.
  - There are no white spaces between words.
- A name may be made up of multiple words, each consisting of alphanumeric characters.
- Words use British English vocabulary.
- All names must start with an alphabetic character.
- All characters that follow the first characters must be letters or numbers.

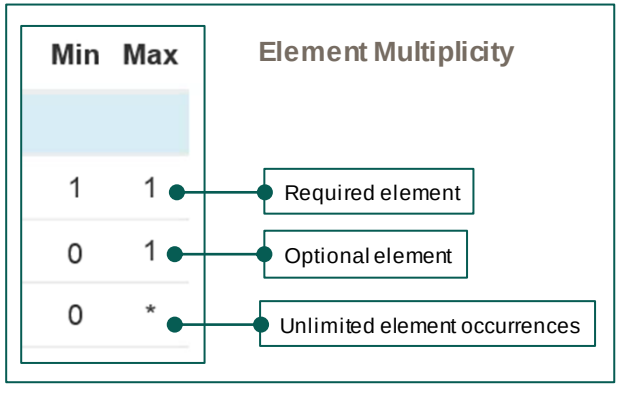

Example of a Street Name element: <StrtNm>Oxford Street</StrtNm>

MX message element multiplicity (occurrences)

An MX message element specifies its cardinality (number of elements in a set) using minimum (min) & maximum (max) to describe the occurrences.

XML Elements (continued)

Empty XML Elements

An empty XML element is an element that contains no data content and therefore is described as empty. Although this makes little business sense, this is a known feature of XML. It typically only occurs where a nested element beneath a parent element allows for various element options but does not either enforce the use of an element with a minimum of 1 occurrence or does not have a rule defining the presence of at this one of the nested element.

A common example of this is in payment message is Financial Institution.

Financial Institution Identification	1	1
BICFI	0	1
Clearing System Member Identification	0	1
LEI	0	1
Name	0	1
Postal Address	0	1

Whereby technically it is possible to provide just Financial Institution without BICFI, or Name and Postal Address as an example i.e., <FinInstnId></FinInstnId>

In the **FINplus** service Message Validation (MVal) will validate the messages to ensure empty XML elements are not provided. i.e., ensure where business data should be provided within a nested element, it is provided.

XML Elements within CBPR+ User Hand Book

MyStandards describes the element's context by its path whereby each element is divided by a forward slash (/) For example the pacs.008 Town Name within the Debtor Postal Address is described as /Document/FIToFICstmrCdtTrf/CdtTrfTxInf/Dbtr/PstlAdr/TwnNm

Within the CBPR+ a similar Path principal is often used to visualize an element being explained, where the name is expanded rather than describing the element in an XML naming convention.
For example to describe the pacs.008 Payment Identification, the following is displayed on the bottom right hand side of the page to explain Payment Identification is an element below Credit Transfer Transaction Information.

Credit Transfer Transaction Info > *Payment Identification*

In this way the CBPR+ User Hand Book uses three main icon to explain the relationships between element, by display the icon after the element name.

To visualise an element which has nested elements beneath it

To visualise an element which has a choice associated with it i.e., a Code where a choice of which code can be determined

To visualise an element which is nested and has a choice associated with it. For example, an Identification where a choice must be made between an Organisation Identification and a Private Identification element which is nested, but where both cannot be used together.

The CBPR+ group has published all its usage guidelines in MyStandards

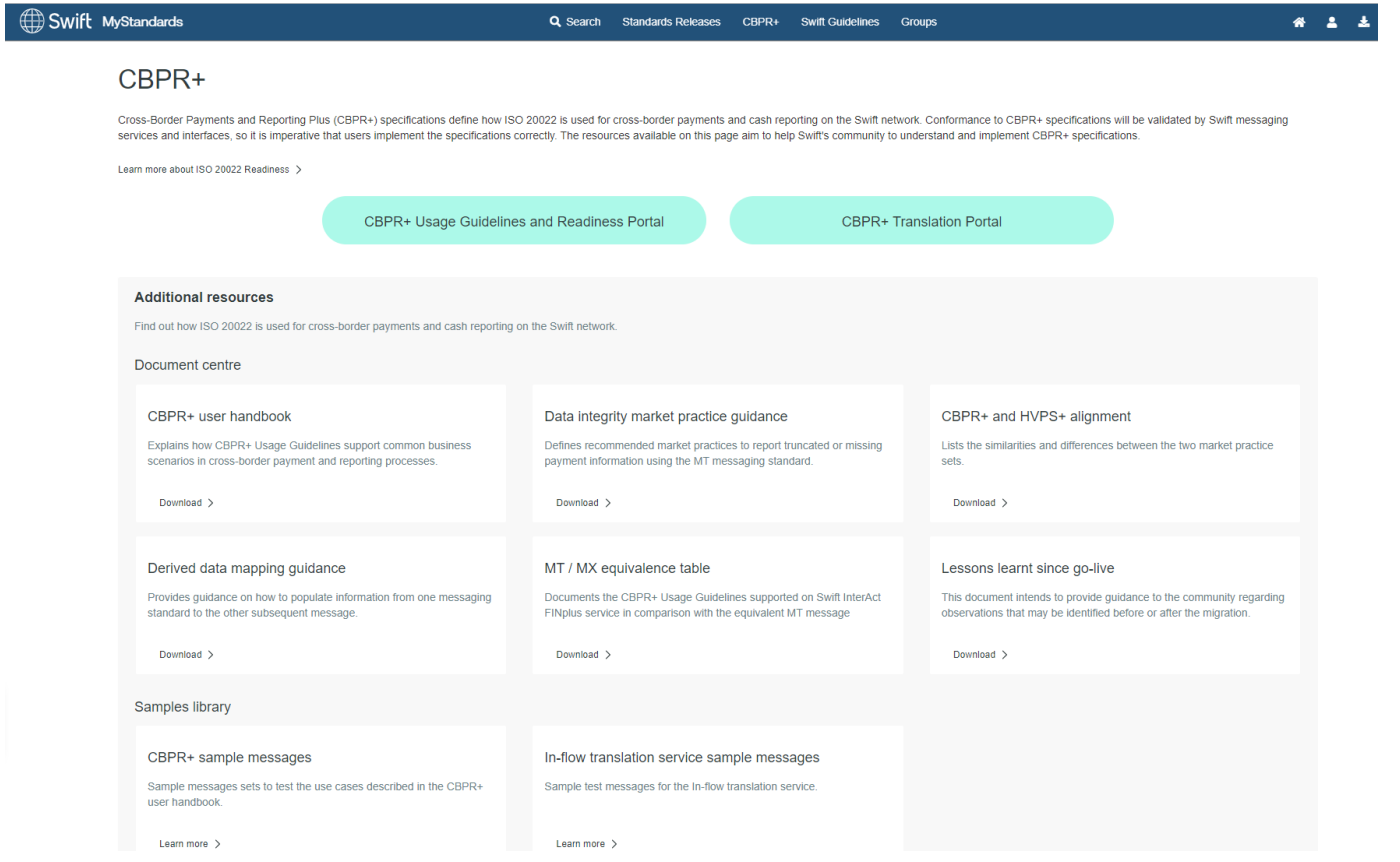

https://www2.swift.com/mystandards/#/c/cbpr/landing

Message Usage Guideline – Additional Information and principals

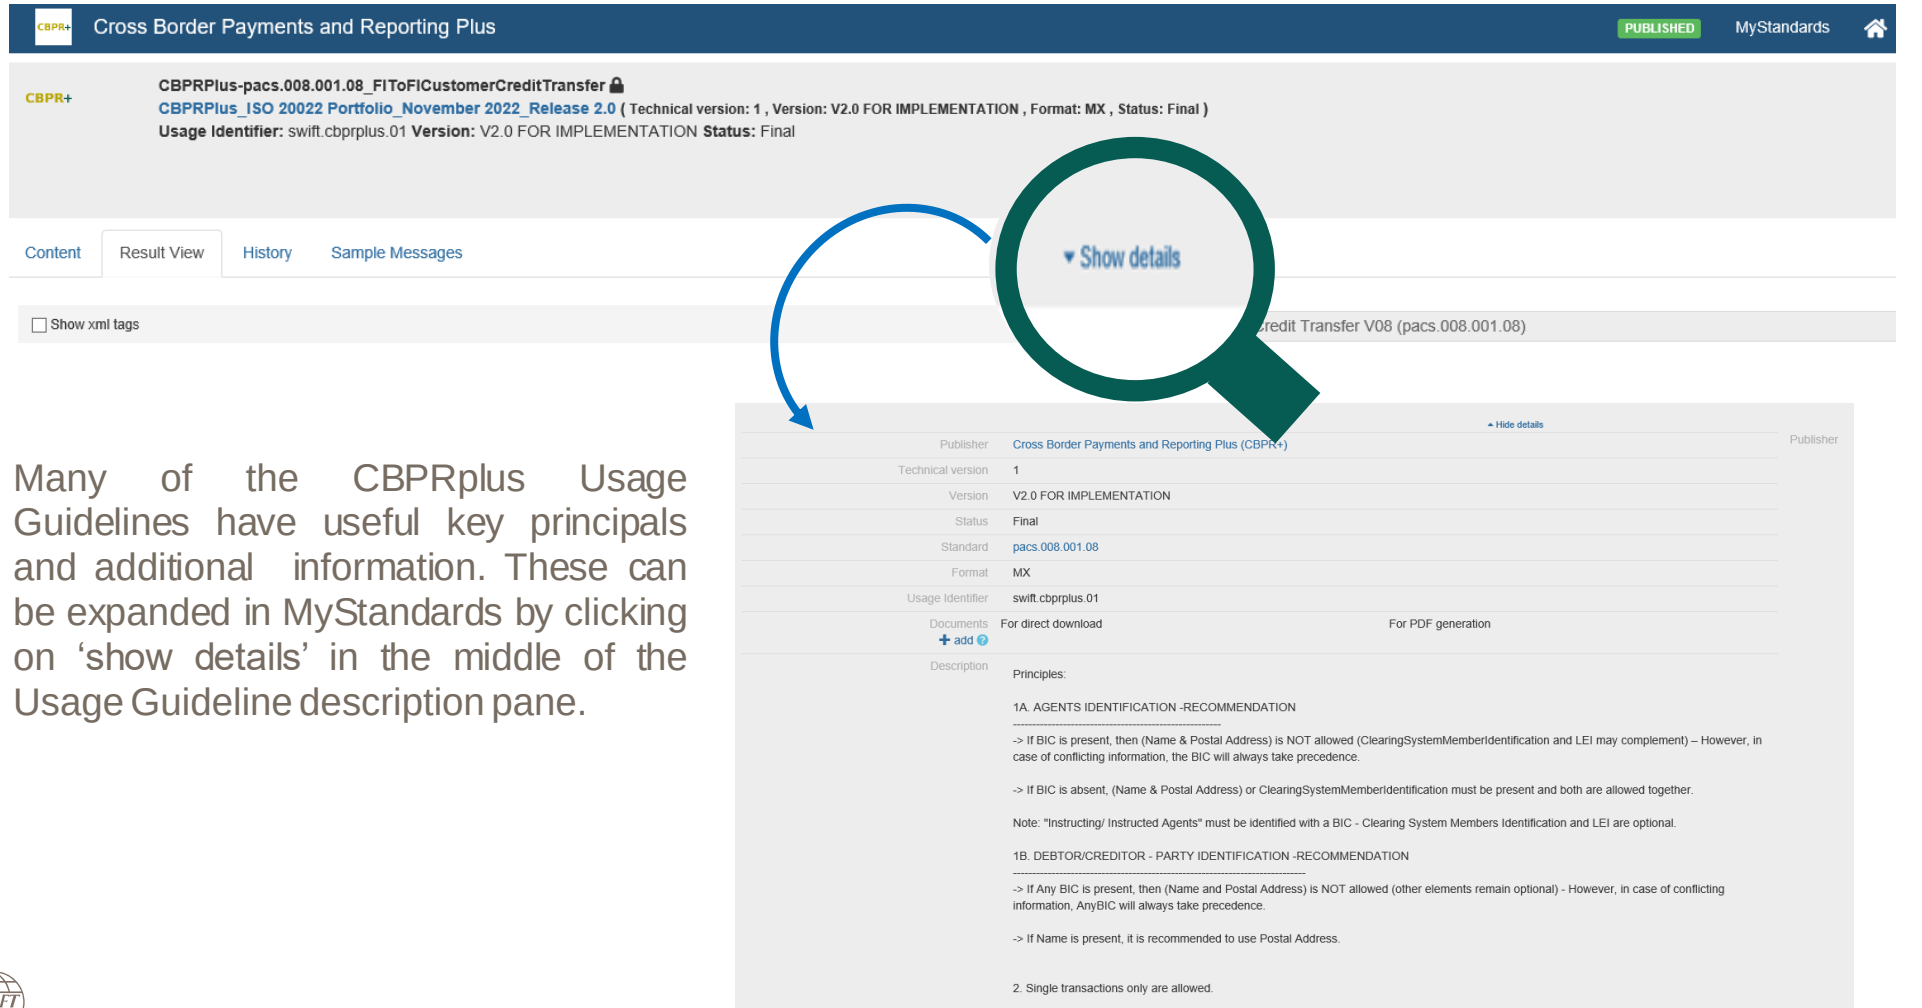

Many of the CBPRplus Usage Guidelines have useful key principals and additional information. These can be expanded in MyStandards by clicking on 'show details' in the middle of the Usage Guideline description pane.

Rules

Traditionally in the Legacy FIN standard rules related to a message were described as either ***Network Validation Rules*** – those validated by the network, or ***Usage rules*** – rules not validated by the network. FIN also has the concept of ***Usage Guidelines*** – guideline to recommend a best practice.

In ISO 20022 there are similar rules (described in a different way) within a baseline message, and potentially within a dedicated Usage Guideline (e.g. CBPR plus)

Within CBPR+ Usage Guideline specification the rules dedicate to CBPR+ are often described as:

Formal Rules which are validated on the network, these are identified by the word **Rule** appended to the rule description. For example: ***Rule "CBPR_Party_Name_Any_BIC_FormalRule"***

Textual Rules which are not validated on the network, these are identified by with the word **TextualRule** appended to the rule description. For example: ***Rule "CBPR_Agent_Option_1_TextualRule"***

Guideline Rules which provide recommended best practice, these are identified by the word **Guideline** appended to the rule description. For example: ***Rule "CBPR_Purpose_Guideline"***

Rules inherited from the baseline message and validated on the SWIFT network are referred to in the Usage Guidelines as a **CrossElementSimpleRule** and a **CrossElementComplexRule**

Usage Identifier – Format

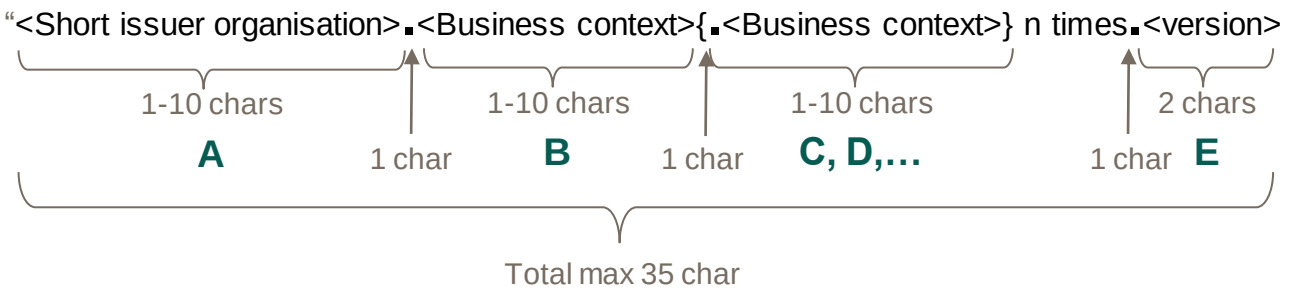

- Type: **String**
- Max allowed size: **35 characters**
- Structure:
  - Must contain minimum **A & B**, **optionally followed by 1 or more additional business context elements (C, D, …).**
  - Always **ends** with **version element E** (format "nn", e.g., "01")
  - Each element is separated by a period "."
  - Length of **each** text element **can vary** up to **max 10** characters. Total length, including periods, cannot exceed 35 chars.
  - Consistency enforced by lightweight SWIFT review/registration: E.g., "ecb" to represent the ECB, not "eucb"
  - **Lowercase** alphanumerical characters only

In CBPR+ the Usage Identifier is captured within the *Business Application Header*, ***Business Service*** element. More detail can be found in the dedicated Business Application Header chapter of this document,

ISO 20022 External Code Lists

Many ISO 20022 message use data elements represented by codes. Such codes are often externalised from the message itself, enabling maintenance of the code list on a quarterly basis without requiring a new message version.
Some data element may also be embedded in the message.

example of Charge Bearer in pacs.008 v8 which uses embedded codes

Charge Bearer	1	1
Borne By Debtor [DEBT]		
Borne By Creditor [CRED]		
Shared [SHAR]		
Following Service Level [SLEV]		

example of Return Reason Information in pacs.004 v9 which uses externalised codes

Return Reason Information	0	*
Originator	0	1
Reason	0	1
Code	1	1
Proprietary	1	1

Type

ExternalReturnReason1Code (based on string)
- minLength: 1
- maxLength: 4

Definition

Reason for the return, as an external reason code li

ExternalReturnReason1Code	DT01	InvalidDate
ExternalReturnReason1Code	DT02	ChequeExpired
ExternalReturnReason1Code	ED01	CorrespondentI
ExternalReturnReason1Code	ED03	BalanceInfoRe
ExternalReturnReason1Code	ED05	SettlementFail
ExternalReturnReason1Code	EMVL	EMVLiabilitySh
ExternalReturnReason1Code	ERIN	ERIOptionNotS
ExternalReturnReason1Code	FF05	InvalidLocalInst
ExternalReturnReason1Code	FOCR	FollowingCanc
ExternalReturnReason1Code	FR01	Fraud

Intro&History | AllCodeSets | UsageInMsgs | CodeSetsDefinition

XLSX format is readable in MS Excel

Proprietary Codes may also be available for certain data elements. These are typically inherited from legacy formats and require definitions in user documentation as these are not captured in the baseline ISO 20022 standards

https://www.iso20022.org/catalogue-messages/additional-content-messages/external-code-sets