
world (CallControl - Inbound Call - SIP)  World MCE						1		
phone	_		App Ser		CL	EventHelix.com/EventStudio 2.0		
phone	provid	er	tel Ma		I	app	MMS MMS	13-Oct-04 10:19 (Page 1)
phone	provid		ter ivia	<u>''</u> !	ļ	шрр	1411415	
								LEG: SIP
	VITE							
txAddr, ren	noteMediaCaps							
		Incomi	ingCall					
		cal	llId					
				Incomi				
				cal	lId			
			abilities					
	callId, t	xAddr, re	emoteMediaCa	ps				
						/lediaCaps	<b>&gt;</b>	MMS provider uses the app partition ID to
					app	PartitionId		locate the preferred codec for this media resource group and arranges the localMediaC
								accordingly
				Get	tMedi:	aCaps_Succ	ress	When telMan receives a populated
			•			MediaCaps	-	GotCapabilities, it does one of the following:
								- If there is a media server associated with thi
								session (i.e. clusterConnections=true), drop at remoteMediaCaps which it does not support.
								From that list, select the first codec in our prioritized list
								- Choose the first media server in the list which supports any codec in remoteMediaCaps
		Chassa	media server a	nd aadaa	. to comd	_		supports any codec in remotewiedia-caps
	Į l			na codec	to send			
	<b>◄</b>		Media txCodec					
	Sa		_Success					
	36		llId					
				Answe	erCall			
			ca	llId, wait		dia		
		Acce	ptCall					
	•		llId					
RIN	IGING							
•		centCa	ll_Success					
			llId					
					Rese	erveMedia		
						mmsId	<b></b>	
				Re	eserveN	Media_Succ	ess	
				con	nection	Id, mmsId, rx	Addr	
	_		<b>1</b> edia					
			rxAddr					
	Se		a_Success					
			llId					
	4		erCall					
	OV	cal	llId					and a second second
	OK r, txCodec							rxCodec = txCodec
	CK							
	<b></b>	~	11. 0					
	Ans		ll_Success					
		cal	llId		11 C	2266		If weitForMedia falsa
			Ans	werCal		cess →		If waitForMedia=false
	N A	Iodio E -	toblished	call	iiu			
			xCodec, txCode	ec				
	camu, t	Araul, E	ACOUCE, IXCOU		Cranto	Connection	,	
						Addr, rxCodec		
			,	, Jimeetil	JIIIU, 1A	, incouct	, acouce	

CreateConnection\_Success

World MCE			EventHelix.com/EventStudio 2.0		
phone phone	provider	App Server tel Man	app	MMS MMS	13-Oct-04 10:19 (Page 2)
	Provider	Star	tTx	17117155	1
		callId, connectionI	d, txAddr, txCodec		
		AnswerCa	ll_Success d, txAddr, txCodec		If waitForMedia=true (default)
		Star	tRx		
		callId, connect	ionId, rxCodec		

World			EventHelix.com/EventStudio 2.0			
phone	App Server			MMS		
phone	provider	tel Man	app	MMS	13-Oct-04 10:19 (Page 3)	
					LEG: H323	
SET	UP _					
	Incon	ningCall				
		allId				
		Inco	omingCall			
			callId			
			swerCall waitForMedia			
	Acc	eptCall				
		allId				
ALER	ΓING					
		all_Success				
	С	allId				
			GetMediaCaps appPartitionId	<b></b>	MMS provider uses the app partition ID to locate the preferred codec for this media	
			appraritionid		resource group and arranges the localMedia	
					accordingly	
		•	GetMediaCaps_Suc	cess		
	Cat	Madia	localMediaCaps			
		Media alMediaCaps				
		ia_Success				
		allId				
		verCall				
govn		allId				
CONN						
		all_Success				
			Call_Success		If waitForMedia=false	
		Aliswei	callId		ii watti olivicula–laisc	
TERMO	CAPS					
remoteMe	-					
TERM						
localMed	-	nahilitias				
		pabilities oteMediaCaps				
		e media server and co	odec to send		Uses the same rules as the SIP scenario	
			ReserveMedia			
			mmsId			
		-	ReserveMedia_Succ	cess		
	Sat	Media	connectionId, mmsId, rx.	Addr		
		ddr, txCodec				
OL		,,				
rxControlAdo						
		a_Success				
OT C		allId				
OLC	ACK ontrolAddr					
in iddi, in Ci		stablished				
		r, txControlAddr				
			CreateConnection			
			onId, txAddr, rxCodec = 1			
		<b>▼</b> C	CreateConnection_Su	iccess		
			connectionId			

Inbound Call (CallControl - Inbound Call - H323)							
World		M		EventHelix.com/EventStudio 2.0			
phone		App Server		MMS	2,0002100000000000000000000000000000000		
phone	provider	tel Man	app	MMS	13-Oct-04 10:19 (Page 4)		
			rtTx d, txAddr, txCodec				

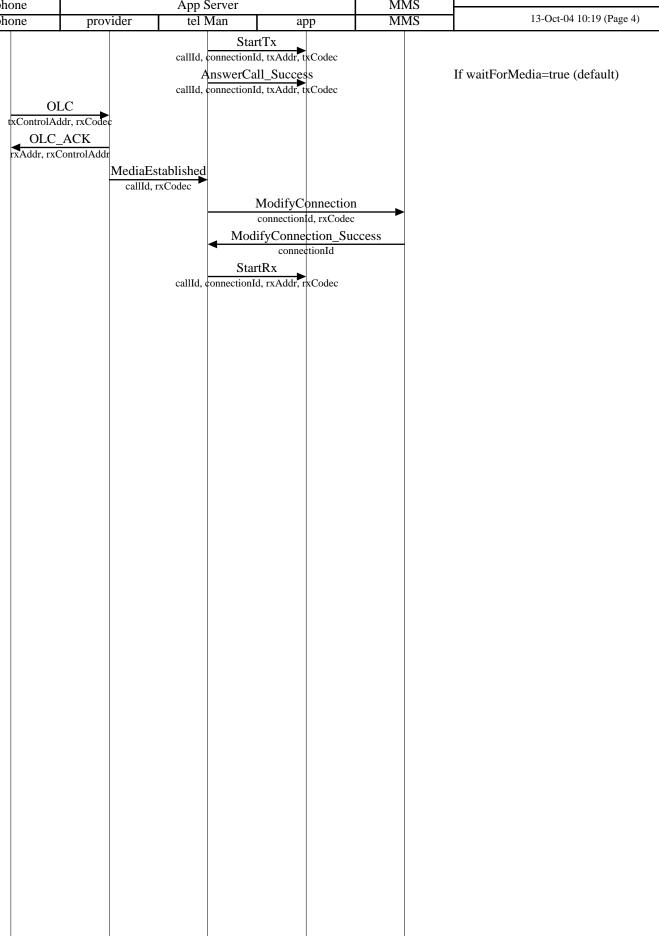

Vorld			ICE		EventHelix.com/EventStudio 2.0	
hone	App Server			MMS		
hone	provider	tel Man	app	MMS	13-Oct-04 10:19 (Page 5)	
					LEG: SIP-LateMedia	
INV	/ITE					
	Incon	ningCall				
	С	allId				
			ningCall allId			
			verCall			
			aitForMedia			
		eptCall				
DIM		allId				
▼ RINO	GING	11. 0				
		all_Success				
			GetMediaCaps		MMS provider uses the app partition ID to	
			appPartitionId	<b></b>	locate the preferred codec for this media	
					resource group and arranges the localMediaC accordingly	
		, G	etMediaCaps_Succ	cess		
		•	localMediaCaps			
		Media alMediaCaps				
		ia_Success				
	c	allId				
	GotCa	pabilities			When telMan receives an empty	
					GotCapabilities, it does one of the following:	
					<ul> <li>Chooses the media server associated with thapp session</li> </ul>	
					- Chooses the first media server in the	
					localMediaCaps list	
	Ch le	oose media server and ocalMediaCaps accordi	prune ngly			
			ReserveMedia			
			mmsId	<b></b>		
			eserveMedia_Succ			
	Set	Media	onnectionId, mmsId, rxA	Addr		
		nedLocalMediaCaps				
		ia_Success				
		allId				
		werCall allId				
, o	oK					
Addr, prunedl	LocalMediaCaps					
		all_Success				
	C	allId	all_Success		If waitForMedia=false	
			allId		ii wani olivicula–laise	
A	CK				rxCodec = txCodec	
txAddr,	rxCodec					
		stablished rxCodec, txCodec				
	caniu, txAudi,	incouce, incouce	CreateConnection	1		
		connec	tionId, txAddr, rxCodec			
		Cre	eateConnection_Su	ccess		
			connectionId			
	I	Sta	artTx .	1		

Inbound Call (CallControl - Inbound Call - SIP - Late Media)								
World		Mo	EventHelix.com/EventStudio 2.0					
phone		App Server		MMS				
phone	provider	tel Man	app	MMS	13-Oct-04 10:19 (Page 6)			

F	 	1 11	Г	
		nswerCall Succes	s	If waitForMedia=true (default)
	billes	nswerCall_SuccestonnectionId, txAddr, t	xCodec	in the control of the control
	Caind,	a. B	n couce	
		StartRx Id, connectionId, rxCo		
	cal	IId, connectionId, rxCo	dec	
	I	l	l	