


# Machine Learning - Supervised

Content from [Classification](#)

Last updated on 2023-08-11 | [Edit this page](#) 

[Download Chapter notebook \(ipynb\)](#)

[Mandatory Lesson Feedback Survey](#)

## SUBMISSIONS

- [Lesson Assignment](#)
- [Lesson Forum](#)

## OVERVIEW

### Questions

- How to prepare data for classification?
- Why do we need to train a model?
- What does a state space plot represent?
- How to obtain prediction probabilities?
- What are the important features?

### Objectives

- Understanding the classification challenge.
- Training a classifier model.
- Understanding the state space plot of model predictions.
- Obtaining prediction probabilities.
- Finding important features.

## PREREQ

- [Data Handling](#)
- [Numpy arrays \(see accompanying tutorial\)](#)
- [Basic Matplotlib plotting](#)



## Import functions

PYTHON < >

```
from pandas import read_csv

from numpy import arange, asarray, linspace, c_, meshgrid, zeros, ones

from numpy.random import uniform, seed

from matplotlib.pyplot import subplots, scatter, xlabel, ylabel, xticks, show
```

## Example: Visual Classification

Import the 'patients\_data' toy dataset and scatter the data for Height and Weight.

PYTHON < >

```
# Please adjust your path to the file
df = read_csv('data/patients_data.csv')

print(df.shape)

# Convert inches to cm and pounds to kg:
df['Height'] = 2.540*df['Height']
df['Weight'] = 0.454*df['Weight']

df.head(10)
```

OUTPUT < >

```
(100, 7)
   Age  Height  Weight  Systolic  Diastolic  Smoker  Gender
0   38  180.34  79.904      124         93        1    Male
1   43  175.26  74.002      109         77        0    Male
2   38  162.56  59.474      125         83        0  Female
3   40  170.18  60.382      117         75        0  Female
4   49  162.56  54.026      122         80        0  Female
5   46  172.72  64.468      121         70        0  Female
6   33  162.56  64.468      130         88        1  Female
7   40  172.72  81.720      115         82        0    Male
8   28  172.72  83.082      115         78        0    Male
9   31  167.64  59.928      118         86        0  Female
```

Note that data in the first five columns are either integers (age) or real numbers (floating point). The classes (categorical data) in the last two columns come as binary (0/1) for 'smokers/non-smokers' and as strings for 'male/female'. Both can be used for classification.

## THE CLASSIFICATION CHALLENGE

I am given a set of data from a single subject and feed them to a computational model. The model then predicts to what (predefined) *class* this subject belongs. Example: given height and weight data, the model might try to predict whether the subject is a smoker or a non-smoker. A naive model will, of course, not be able to predict reasonably. The *supervised* approach in machine learning is to provide the model with a set of data where the class has been verified beforehand and the model can test its (initially random) predictions against the provided class. An optimisation algorithm is then run to adjust the (internal) model setting such that the predictions improve as much as possible. When no further improvement is achieved, the algorithm stops. The model is then *trained* and ready to predict.

The act of classification is to assign labels to unlabelled data after model exposure to previously labelled data (e.g. based on medical knowledge in the case of disease data).

In contrast, in *unsupervised machine learning* the assignment is done based on exposure to unlabelled data following a search for distinctive features or 'structure' in the data.

We can first check if we are able to distinguish classes visually. For this, we scatter the data of two columns of a dataframe using the column names. That is, we look at the distribution of points in a plane. Then we use the class **label** to color each point in the plane according to the class it belongs to. String labels like 'male' / 'female' first need to be converted to Boolean (binary). 0/1 labels as in the 'smokers/non-smokers' column can be used directly.

Let us plot the height-weight data and label them for both cases.

PYTHON < >


```
fig, ax = subplots(figsize=(12,6),ncols=2,nrows=1)

gender_boolean = df['Gender'] == 'Female'

ax[0].scatter(df['Height'], df['Weight'], c=gender_boolean, cmap='bwr')
ax[0].set_xlabel('Height', fontsize=14)
ax[0].set_ylabel('Weight', fontsize=14)
ax[0].set_title('Female (red), Male (blue)', fontsize=16)

ax[1].scatter(df['Height'], df['Weight'], c=df['Smoker'], cmap='bwr')
ax[1].set_xlabel('Height', fontsize=16)
ax[1].set_ylabel('Weight', fontsize=16)
ax[1].set_title('Smoker (red), Non-Smoker (blue)', fontsize=16);

show()
```

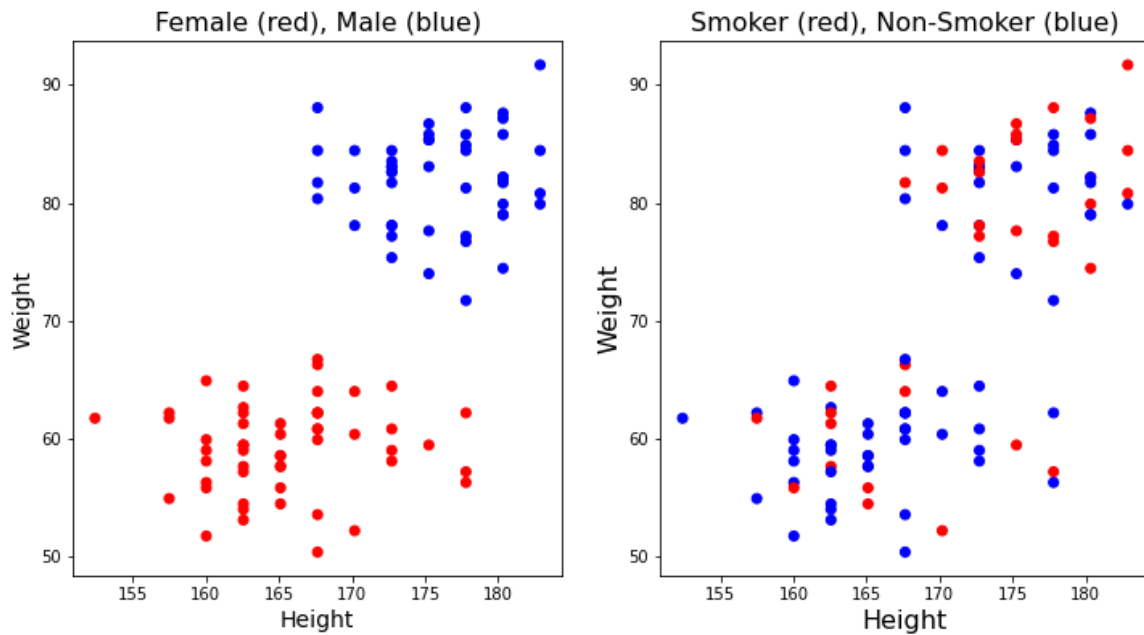

It appears from these graphs that based on height and weight data it is possible to distinguish male and female. Based on visual inspection one could conclude that everybody with a weight lower than 70kg is female and everybody with a weight above 70kg is male. That would be a classification based on the weight alone. It also appears that the data points classified as 'male' are taller on average, so it might be helpful to have the height recorded as well. E.g it could improve the prediction of gender for new subjects with a weight around 70 kg. But it would not be the best choice if only a single quantity was used. Thus, a second conclusion is that based on these data the weight is more important for the classification than the height.

On the other hand, based on the smoker / non-smoker data it will not be possible to distinguish smokers from non-smokers. Red dots and blue dots are scattered throughout the graph. The conclusion is that height and weight cannot be used to predict whether a subject is a smoker.

## Supervised Learning: Training a Model

This lesson deals with labelled data. Labelled data are numerical data with an extra column of a **label** for each sample. A sample can consist of any number of individual observations but must be at least two.

Examples of labels include 'control group / test group'; 'male / female'; 'healthy / diseased'; 'before treatment / after treatment'.

The task in Supervised Machine Learning is to fit (train) a model to distinguish between the groups by 'learning' from so-called training data. After training, the optimised model automatically labels incoming (unlabeled) data. The better the model, the better the labelling (prediction).

The model itself is a black box. It has set default parameters to start with and thus performs badly in the beginning. Essentially, it starts by predicting a label at random. The process of training consists in repeatedly changing the model parameters such that the performance improves. After the training, the model parameters are supposed to be optimal. Of course, the model cannot be expected to reveal anything about the mechanism or cause that underlies the distinction between the labels.

The performance of the model is tested by splitting a dataset with labels into:

- the **train data**, those that will be used for model fitting, and
- the **test data**, those that will be used to check how well the model predicts.

The result of the model fitting is then assessed by checking how many of the (withheld) labels in the test data were correctly predicted by the trained model. We can also retrieve the confidence of the model prediction, i.e. the probability that the assigned label is correct.

As an additional result, the procedure will generate the so-called feature importances: similar to how we concluded above that weight is more important than height for gender prediction, the feature importance informs to which degree each of the data columns actually

contributes to the predictions.

## Scikit Learn

---

We will import our machine learning functionality from the [SciKit Learn library](#).

### SCIKIT LEARN

SciKit Learn is a renowned open source application programming interface (API) for machine learning. It enjoys a vibrant community and is well maintained. It is always beneficial to use the official documentations for every API. SciKit Learn provides an exceptional documentation with detailed explanations and examples at every level.

The implementation of algorithms in SciKit Learn follows a very specific protocol. First and foremost, it uses a programming paradigm known as object-oriented programming (OOP). Thanks to Python, this does not mean that you as the user are also forced to use OOP. But you need to follow a specific protocol to use the tools that are provided by SciKit Learn.

Unlike functions that perform a specific task and return the results, in OOP, we use *classes* to encapsulate interconnected components and functionalities. In accordance with the convention of best practices for Python programming (also known as PEP8), classes are implemented with camel-case characters; e.g. `RandomForestClassifier`. In contrast, functions should be implemented using lower-case characters only; e.g. `min` or `round`.

## Classification

---

### Prepare data with labels

The terminology that is widely used in Machine Learning (including Scikit Learn) refers to data points as **samples**, and the different types of recordings(columns in our case) are referred to as **features**. In `Numpy` notation, samples are organised in rows, features in columns.

We can use the function `uniform` from `numpy.random` to generate uniformly distributed random data. Here we create 100 samples of two features (as in the visualisation above). We decide to have values distributed between 0 and 100.

The convention in machine learning is to call the training data 'X'. This array must be **two dimensional**, where rows are the samples and columns are the features.

PYTHON < >

```
low = 0
high = 100

n_samples, m_features = 100, 2

RANDOM_SEED = 1234

seed(RANDOM_SEED)

random_numbers = uniform(low=low, high=high, size=(n_samples, m_features))

X = random_numbers.round(3)

print('Dimensions of training data')
print('')
print('Number of samples: ', X.shape[0])
print('Number of features: ', X.shape[1])
print('')
```

OUTPUT < >

```
Dimensions of training data

Number of samples:  100
Number of features:  2
```

### NOTE

This code uses a **random number generator**. The output of a random number generator is different each time it is run. On the one hand, this is good because it allows us to create many realisations of samples drawn from a fixed distribution. On the other hand, when testing and sharing code this prevents exact reproduction of results. We therefore use the **seed** function to reset the generator such that with a given number for the seed (the parameter called **RANDOM\_SEED**) the same numbers are produced.


Let us check the histograms of both features:

PYTHON < >

```
fig, ax = subplots()

ax.hist(X, bins=10);

show()
```

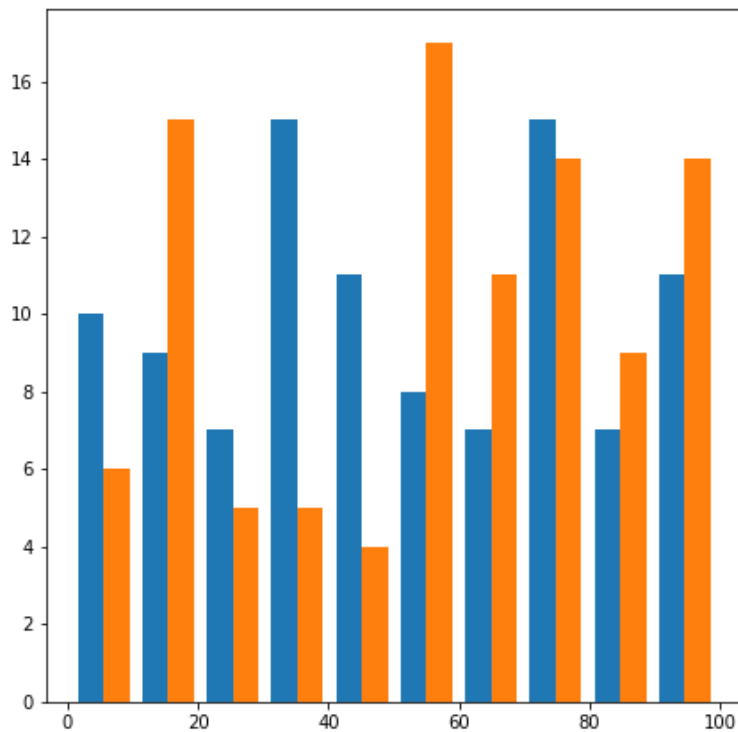

We find that both features are distributed over the selected range of values. Due to the small number of samples, the distribution is not very even.

The categorical data used to distinguish between different classes are called **labels**. Let us create an artificial set of labels for our first classification task.

We pick an arbitrary threshold and call all values **True** if the values in both the first and the second feature are above the threshold. The resulting labels **True** and **False** can be viewed as 0/1 using the method **astype** with argument **int**.

PYTHON < >

```
threshold = 50

y = (X[:,0] > threshold) & (X[:,1] > threshold)

y.astype(int)
```

OUTPUT < >

```
array([0, 0, 0, 0, 1, 0, 1, 0, 0, 1, 0, 0, 1, 0, 0, 0, 0, 1, 0, 0, 0, 0,
       1, 0, 0, 0, 0, 1, 1, 1, 0, 0, 0, 0, 0, 1, 0, 0, 0, 0, 0, 1, 0, 1,
       0, 0, 1, 0, 1, 0, 1, 1, 0, 0, 0, 0, 0, 0, 0, 1, 1, 1, 0, 0, 0, 0,
       0, 0, 0, 0, 0, 1, 0, 0, 0, 1, 0, 1, 1, 1, 0, 1, 1, 0, 1, 0, 0, 0,
       0, 1, 0, 1, 0, 0, 0, 0, 0, 0, 0, 1])
```

If both features (columns) were risk factors, this might be interpreted as: only if both risk factors are above the threshold, a subject is classified as 'at risk', meaning it gets label 'True' or '1'.

Labels must be **one-dimensional**. You can check this by printing the **shape**. The output should be a single number:



[PYTHON < >](#)

```
print('Number of labels:', y.shape)
```

[OUTPUT < >](#)

```
Number of labels: (100,)
```

## The Random Forest Classifier

To start with our learning algorithm, we import one of the many classifiers from Scikit Learn: it is called Random Forest.

[PYTHON < >](#)

```
from sklearn.ensemble import RandomForestClassifier
```

The Random Forest is a member of the ensemble learning family, whose objective is to combine the predictions of several optimisations to improve their performance, generalisability, and robustness.

Ensemble methods are often divided into two different categories:

1. Averaging methods: Build several estimators independently, and average their predictions. In general, the combined estimator tends to perform better than any single estimator due to the reduction in variance. Examples: Random Forest and Decision Tree.
2. Boosting methods: Build the estimators sequentially, and attempt to reduce the bias of the combined estimator. Although the performance of individual estimators may be weak, upon combination, they amount to a powerful ensemble. Examples: Gradient Boosting and AdaBoost.

We now train a model using the Python class for the Random Forest classifier. Unlike a function (which we can use out of the box) a class needs to be *instantiated* before it can be used. In Python, we instantiate a class as follows:

[PYTHON < >](#)

```
clf = RandomForestClassifier(random_state=RANDOM_SEED)
```

where `clf` now represents an *instance* of class `RandomForestClassifier`. Note that we have set the keyword argument `random_state` to a number. This is to assure reproducibility of the results. (It does not have to be the same as above, pick any integer).

The instance of a class is typically referred to as an object, whose type is the class that it represents:

[PYTHON < >](#)

```
print('Type of clf:', type(clf))  
print('')
```

[OUTPUT < >](#)

```
Type of clf: <class 'sklearn.ensemble._forest.RandomForestClassifier'>
```

Once instantiated, we can use this object, `clf`, to access the methods that are associated with that class. Methods are essentially functions that are encapsulated inside a class.

In SciKit Learn all classes have a `.fit()` method. Its function is to receive the training data and perform the training of the model.

## Train a model

To train a model, we apply the fit method to the training data, labelled 'X', given the corresponding labels 'y':

```
clf.fit(X, y)
```

▼ RandomForestClassifier

```
RandomForestClassifier(random_state=1234)
```

And that's it. All the machine learning magic done. `clf` is now a trained model with optimised parameters which we can use to predict new data.

## Predict Test Data

### Categorical Prediction

We start by creating a number of test data in the same way as we created the training data. Note that the number of test samples is arbitrary. You can create any number of samples. However, you must provide the same number of features (columns) used in the training of the classifier. In our case that is 2.

```
RANDOM_SEED_2 = 123

seed(RANDOM_SEED_2)

new_samples = 10

features = X.shape[1]

new_data = uniform(low=low, high=high, size=(10, 2))

print('Shape of new data', new_data.shape)
print('')
print(new_data)
```

```
Shape of new data (10, 2)

[[69.64691856 28.6139335 ]
 [22.68514536 55.13147691]
 [71.94689698 42.31064601]
 [98.07641984 68.48297386]
 [48.09319015 39.21175182]
 [34.31780162 72.90497074]
 [43.85722447  5.96778966]
 [39.80442553 73.79954057]
 [18.24917305 17.54517561]
 [53.15513738 53.18275871]]
```

There are 10 randomly created pairs of numbers in the same range as the training data. They represent 'unlabelled' incoming data which we offer to the trained model.

The method `.predict()` helps us to find out what the model claims these data to be:

PYTHON < >

```
predictions = clf.predict(new_data)

print('Predictions: ', predictions)
```

OUTPUT < >

```
Predictions: [False False False  True False False False False False  True]
```

They can also be viewed as zeros and ones:

PYTHON < >

```
predictions.astype(int)
```

OUTPUT < >

```
array([0, 0, 0, 1, 0, 0, 0, 0, 0, 1])
```

According to the model, data points with indices 3, and 9 are in class **True** (or **1**).

Predicting individual samples is fine, but does not tell us whether the classifier was able to create a good model of the class distinction. To check the training result systematically, we create a state space grid over the state space. This is the same as creating a coordinate system of data points (as in a scatter plot), in our case with values from 0 to 100 in each feature.

Here we use a resolution of 100, ie. we create a 100 by 100 grid:

PYTHON < >

```
resolution = 100

vec_a = linspace(low, high, resolution)
vec_b = vec_a

grid_a, grid_b = meshgrid(vec_a, vec_b)

grid_a_flat = grid_a.ravel()
grid_b_flat = grid_b.ravel()

XY_statespace = c_[grid_a_flat, grid_b_flat]

print(XY_statespace.shape)
```

OUTPUT < >

```
(10000, 2)
```

Now we can offer the grid of the X-Y state space as 'new data' to the classifier and obtain the predictions. We can then plot the grid points and colour them according to the labels assigned by the trained model.

PYTHON &lt; &gt;

```
predictions = clf.predict(XY_statespace)

predictions.shape
```

OUTPUT &lt; &gt;

```
(10000,)
```

We obtain 10,000 predictions, one for each point on the grid.

To compare the data with the original thresholds and the model predictions we can use plots of the state space:

PYTHON &lt; &gt;

```
feature_1, feature_2 = 0, 1

fig, ax = subplots(ncols=2, nrows=1, figsize=(10, 5))


ax[0].scatter(X[:, feature_1], X[:, feature_2], c=y, s=4, cmap='bwr');
ax[1].scatter(XY_statespace[:, feature_1], XY_statespace[:, feature_2], c=predictions, s=1, cmap='bwr');

p1, p2 = [threshold, threshold], [100, threshold]
p3, p4 = [threshold, 100], [threshold, threshold]

ax[0].plot(p1, p2, c='k')
ax[0].plot(p3, p4, c='k')

ax[0].set_xlabel('Feature 1', fontsize=16)
ax[0].set_ylabel('Feature 2', fontsize=16);
ax[1].set_xlabel('Feature 1', fontsize=16);

show()
```

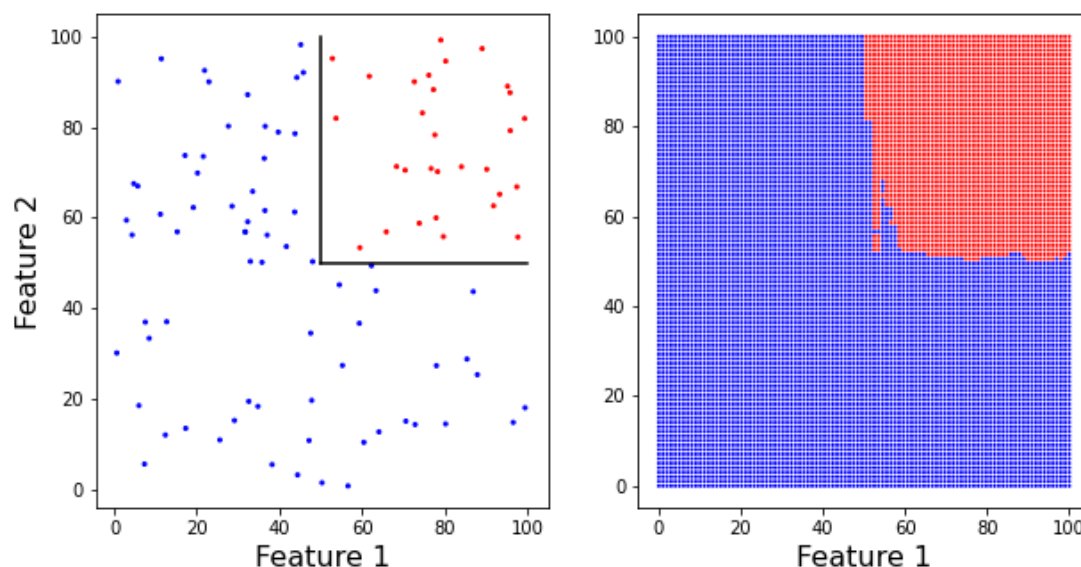

Left is a scatter plot of the data points used for training. They are coloured according to their labels. The black lines indicate the threshold boundaries that we introduced to distinguish the two classes. On the right hand side are the predictions for the coordinate grid. Label 0 is

blue, label 1 is red.

Based on the training samples (left), a good classification can be achieved with the model (right). But some problems persist. In particular, the boundaries are not sharp.

## Probability Prediction

Let us pick a sample near the boundary. We can get its predicted label. In addition, using `.predict_proba()` we can get the probability of this prediction. This reflects the confidence in the prediction. 50% probability means, the prediction is at chance level, i.e. equivalent to a coin toss.

PYTHON < >

```
pos = 55

test_sample = [[pos, pos]]

test_sample_label = clf.predict(test_sample)

test_sample_proba = clf.predict_proba(test_sample)

print('Prediction:', test_sample_label)
print(clf.classes_, test_sample_proba)
```

OUTPUT < >

```
Prediction: [False]
[False  True] [[0.57 0.43]]
```


PYTHON < >

```
bins = arange(test_sample_proba.shape[1])

fig, ax = subplots()

ax.bar(bins, test_sample_proba[0,:], color=('b', 'r'))
ax.set_ylabel('Probability', fontsize=16)
xticks(bins, ('Label 0', 'Label 1'), fontsize=16);

show()
```

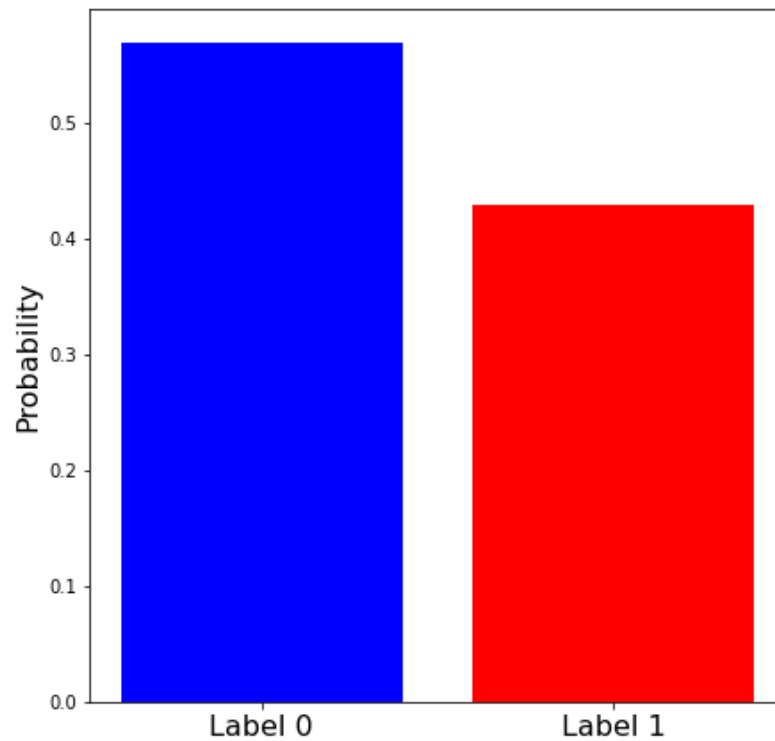

Even though the sample is from the region that (according to the creation of the data) is in the 'True' region, it is labelled as false. The reason is that there were few or no training data points in that specific region.

Here is a plot of the probability for the state space. White represents False and Black represents True, the values in between are gray coded. Note that the probability values are complementary. We only need the probabilities for one of our classes.

PYTHON < >

```
state_space_proba = clf.predict_proba(XY_statespace)

grid_shape = grid_a.shape

proba_grid = state_space_proba[:, 1].reshape(grid_shape)

contour_levels = linspace(0, 1, 6)


fig, ax = subplots(figsize=(6, 5))

cax = ax.contourf(grid_a, grid_b, proba_grid, cmap='Greys', levels=contour_levels)
fig.colorbar(cax)
ax.scatter(test_sample[0][0], test_sample[0][1], c='r', marker='o', s=100)

ax.plot(p1, p2, p3, p4, c='r')

ax.set_xlabel('Feature 1', fontsize=16)
ax.set_ylabel('Feature 2', fontsize=16);

show()
```

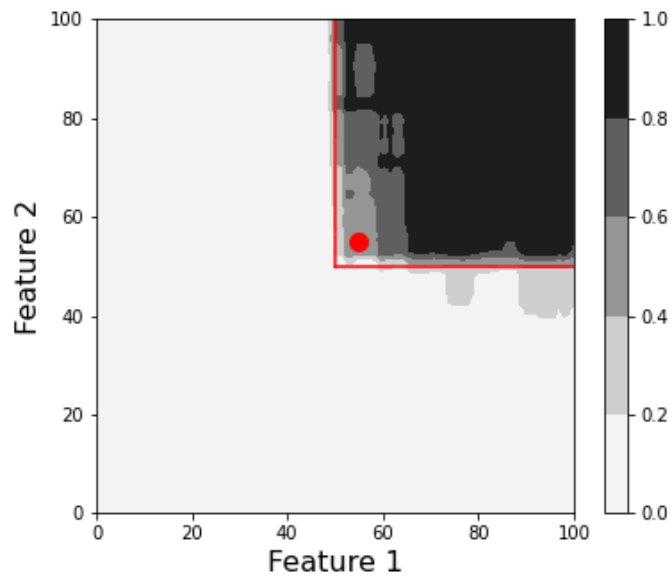

The single red dot marks the individual data point we used to illustrate the prediction probability above.

## Feature Importances


We can check the contribution of each feature for the success of the classification. The feature importance is given as the fraction contribution of each feature to the prediction.

[PYTHON < >](#)

```
importances = clf.feature_importances_  
  
print('Relative importance:')  
  
template = 'Feature 1: {:.1f}%; Feature 2: {:.1f}%'  
  
print(template.format(importances[0]*100, importances[1]*100))  
  
bins = arange(importances.shape[0])  
  
fig, ax = subplots()  
  
ax.bar(bins, importances, color=('g', 'm'));  
ax.set_ylabel('Feature Importance', fontsize=16)  
  
xticks(bins, ('Feature 1', 'Feature 2'), fontsize=16);  
  
show()
```

[OUTPUT < >](#)

```
Relative importance:  
Feature 1: 61.6%; Feature 2: 38.4%
```

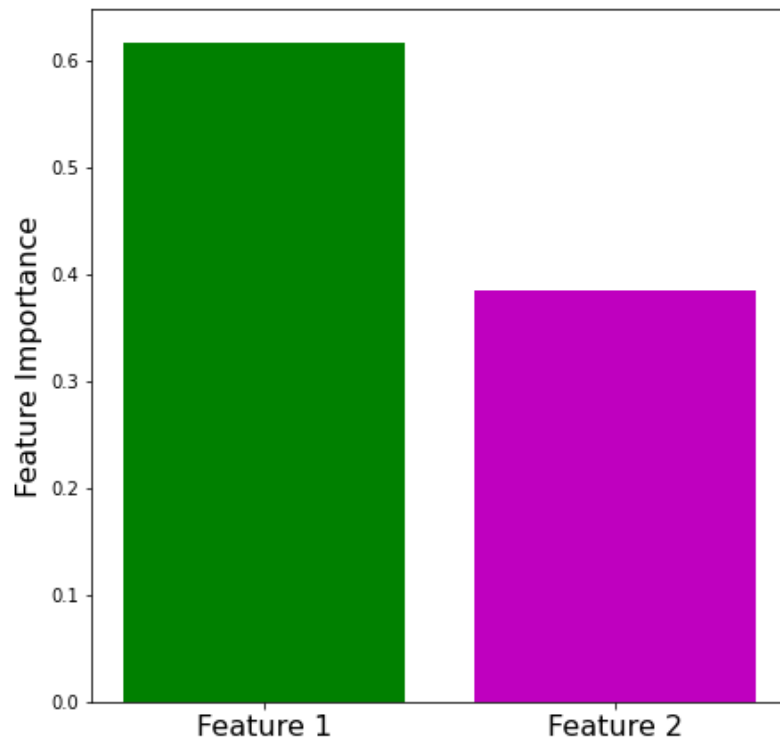

In this case, the predictions are based on a 61% contribution from feature 1 and a 38% contribution from feature 2.

## Application

Now we pick the 'Height' and 'Weight' columns from the patients data to predict the gender labels. We use a split of 4/5 of the data for training and 1/5 for testing.

PYTHON < >

```
df = read_csv('data/patients_data.csv')

print(df.shape)

# Convert pounds to kg and inches to cm:
df['Weight'] = 0.454*df['Weight']
df['Height'] = 2.540*df['Height']

df.head(10)
```



OUTPUT < >

```
(100, 7)
   Age  Height  Weight  Systolic  Diastolic  Smoker  Gender
0   38  180.34  79.904      124        93        1    Male
1   43  175.26  74.002      109        77        0    Male
2   38  162.56  59.474      125        83        0  Female
3   40  170.18  60.382      117        75        0  Female
4   49  162.56  54.026      122        80        0  Female
5   46  172.72  64.468      121        70        0  Female
6   33  162.56  64.468      130        88        1  Female
7   40  172.72  81.720      115        82        0    Male
8   28  172.72  83.082      115        78        0    Male
9   31  167.64  59.928      118        86        0  Female
```

## Prepare training data and labels

PYTHON < >

```
# Extract data as numpy array
df_np = df.to_numpy()

# Pick a fraction of height and weight data as training data
samples = 80

X = df_np[:samples, [1, 2]]

print(X.shape)
```

OUTPUT < >

```
(80, 2)
```

For the labels of the training data we convert the 'Male' and 'Female' strings to categorical values.

PYTHON < >

```
gender_boolean = df['Gender'] == 'Female'

y = gender_boolean[:80]

# printed as 0 and 1:

y.astype('int')
```

OUTPUT < >

```
0      0
1      0
2      1
3      1
4      1
..
75     0
76     1
77     0
78     0
79     1
Name: Gender, Length: 80, dtype: int64
```

## Train classifier and predict

PYTHON < >

```
from sklearn.ensemble import RandomForestClassifier

seed(RANDOM_SEED)

clf = RandomForestClassifier(random_state=RANDOM_SEED)

clf.fit(X, y)
```

▼ RandomForestClassifier

```
RandomForestClassifier(random_state=1234)
```

We now take the remaining fifth of the data to predict.

PYTHON < >

```
X_test = df.loc[80:, ['Height', 'Weight']]

X_test = X_test.values

predict_test = clf.predict(X_test)

probab_test = clf.predict_proba(X_test)

print('Predictions: ', predict_test, '\n', 'Probabilities: ', '\n', probab_test)
```

```

Predictions: [False False False  True  True False  True  True  True  True False False
              True False  True False False False False]
Probabilities:
[[1.  0. ]
 [1.  0. ]
 [1.  0. ]
 [0.  1. ]
 [0.  1. ]
 [1.  0. ]
 [0.  1. ]
 [0.  1. ]
 [0.  1. ]
 [0.  1. ]
 [1.  0. ]
 [1.  0. ]
 [0.02 0.98]
 [1.  0. ]
 [0.  1. ]
 [1.  0. ]
 [1.  0. ]
 [1.  0. ]
 [1.  0. ]
 [1.  0. ]
 [0.97 0.03]]

```

As in the example above, we create a state space grid to visualise the outcome for the two features.

```

X1_min, X1_max = min(X[:, 0]), max(X[:, 0])
X2_min, X2_max = min(X[:, 1]), max(X[:, 1])

resolution = 100

vec_a = linspace(X1_min, X1_max, resolution)
vec_b = linspace(X2_min, X2_max, resolution)

grid_a, grid_b = meshgrid(vec_a, vec_b)

grid_a_flat = grid_a.ravel()
grid_b_flat = grid_b.ravel()

X_statespace = c_[grid_a_flat, grid_b_flat]

```

We can now obtain the categorical and probability predictions from the trained classifier for all points of the grid.

```

predict = clf.predict(X_statespace)
probabs = clf.predict_proba(X_statespace)

```

Here is the plot of the state space and the predicted probabilities:

```

feature_1, feature_2 = 0, 1

fig, ax = subplots(ncols=3, nrows=1, figsize=(15, 5))

ax[0].scatter(X[:, feature_1], X[:, feature_2], c=y, s=40, cmap='bwr');
ax[0].set_xlim(X1_min, X1_max);
ax[0].set_ylim(X2_min, X2_max);
ax[0].set_xlabel('Feature 1', fontsize=16);
ax[0].set_ylabel('Feature 2', fontsize=16);

cax1 = ax[1].scatter(X_statespace[:, feature_1], X_statespace[:, feature_2], c=predict, s=1, cmap='bwr');
ax[1].scatter(X_test[:, feature_1], X_test[:, feature_2], c=predict_test, s=40, cmap='Greys');
ax[1].set_xlabel('Feature 1', fontsize=16);
ax[1].set_xlim(X1_min, X1_max);
ax[1].set_ylim(X2_min, X2_max);
fig.colorbar(cax1, ax=ax[1]);

grid_shape = grid_a.shape

probab_grid = probabs[:, 1].reshape(grid_shape)

# Subject with 170cm and 70 kg
pos1, pos2 = 170, 70

test_sample = [pos1, pos2]


contour_levels = linspace(0, 1, 10)

cax2 = ax[2].contourf(grid_a, grid_b, probab_grid, cmap='Greys', levels=contour_levels);
fig.colorbar(cax2, ax=ax[2]);

ax[2].scatter(test_sample[0], test_sample[1], c='r', marker='o', s=100);
ax[2].set_xlabel('Feature 1', fontsize=16);
ax[2].set_xlim(X1_min, X1_max);
ax[2].set_ylim(X2_min, X2_max);

show()

```

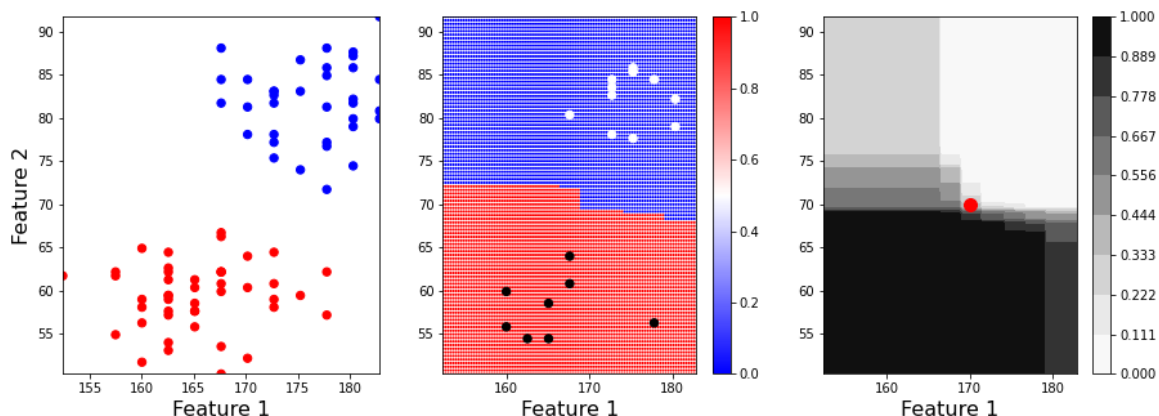

The left panel shows the original data with labels as colours, i.e. the training data. Central panel shows the classified state space with the test samples as black dots in predicted category 'Female' and white dots in predicted category 'Male'. Right panel shows the state space with prediction probabilities with black for 'Female' and white for 'Male'. The red dot represents the simulated subject with 170cm and 70 kg (see below).

## Probability of a single observation

Let us pick that subject and obtain its predicted label and probability. Note the use of double brackets to create a sample that is a two-dimensional array.

[PYTHON < >](#)

```
test_sample = [[pos1, pos2]]

test_predict = clf.predict(test_sample)
test_proba = clf.predict_proba(test_sample)

print('Predicted class:', test_predict, 'Female')
print('Probability:', test_proba[0, 0])
print('')

bins = arange(test_proba.shape[1])


fig, ax = subplots()

ax.bar(bins, test_proba[0,:], color=('r', 'b'));
xticks(bins, ('Female', 'Male'), fontsize=16);
ax.set_ylabel('Probability', fontsize=16);

show()
```

[OUTPUT < >](#)

```
Predicted class: [False] Female
Probability: 0.66
```

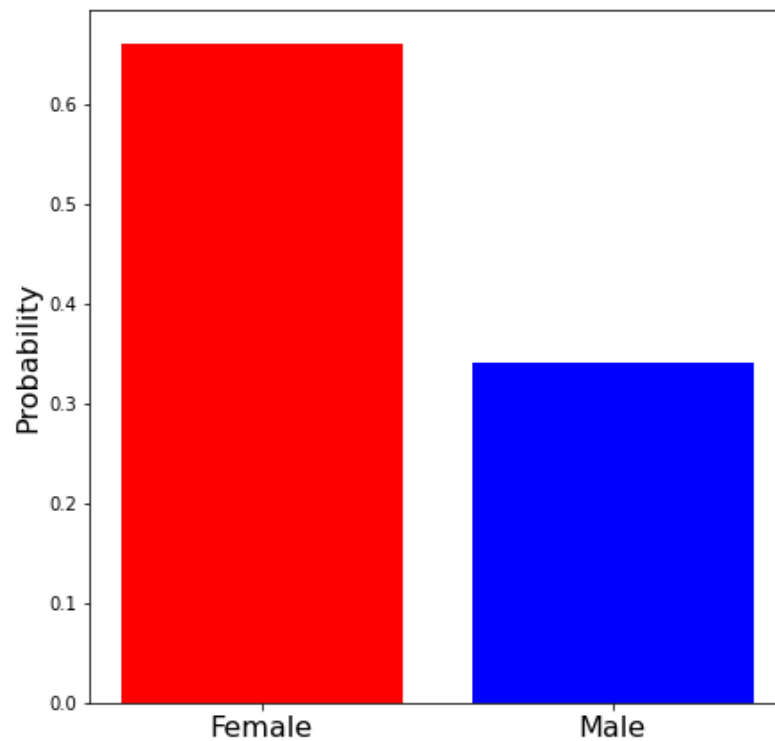

This shows that the predicted label is female but the probability is less than 70 % and, e.g. if a clinical decision was to be taken based on the outcome of the classification, it might suggest looking for additional evidence before the decision is made.


## Feature Importances

[PYTHON < >](#)

```
importances = clf.feature_importances_  
  
print('Features importances:')  
template = 'Feature 1: {:.1f}%; Feature 2: {:.1f}%'  
print(template.format(importances[0]*100, importances[1]*100))  
print('')  
  
bins = arange(importances.shape[0])  
  
fig, ax = subplots()  
  
ax.bar(bins, importances, color=('m', 'g'));  
xticks(bins, ('Feature 1', 'Feature 2'), fontsize=16);  
ax.set_ylabel('Feature Importance', fontsize=16);  
  
show()
```

[OUTPUT < >](#)

```
Features importances:  
Feature 1: 31.7%; Feature 2: 68.3%
```

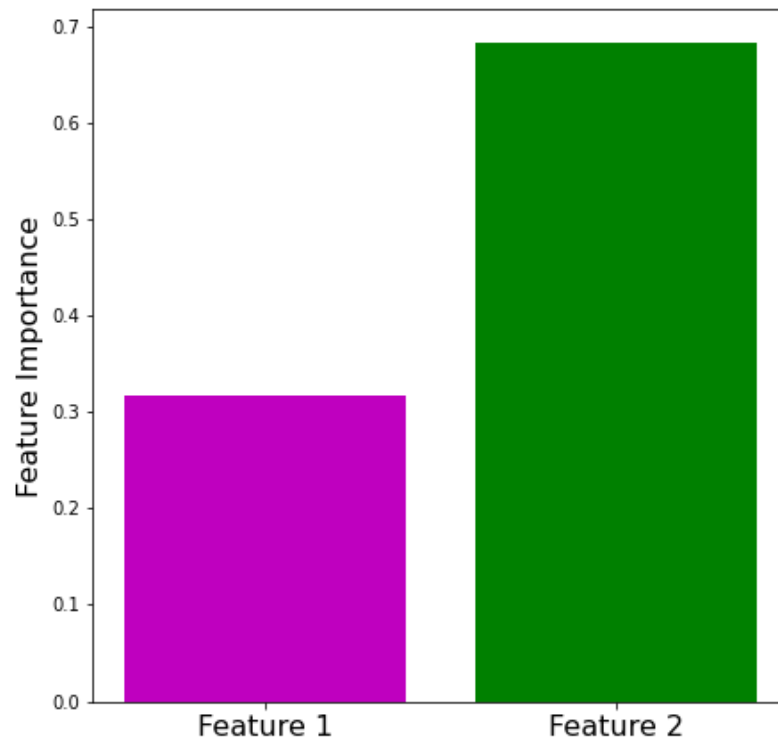

Feature Height contributes about one third and feature Weight about two thirds to the decisions.

Feature importances can be used in data sets with many features, e.g. to reduce the number of features used for classification. Some features might not contribute to the classification and could therefore be left out of the process.

In the next lesson, we are going to test multiple classifiers and quantify their performance to improve the outcome of the classification.

## Lesson Assignment (Tutorial Video)

---

The assignment for this lesson consists of the questions shown below in the next section and can be accessed via GitHub classroom.

- For **L2D online cohort**, please click this link: [GitHub classroom assignment link](#)

### NOTE

1. You will need to login to your GitHub account.
2. Choose your name from the list of students.
3. Accept the assignment.
4. Refresh the page.

By doing these steps, you will be able to access the assignment repository at GitHub. Instructions for completing the assignment are displayed beneath the file browser containing all the files you will need. These instructions are contained in the [README.md](#) file.

### ASSIGNMENT QUESTIONS

Repeat the training and prediction workflow as above for two other features in the data, namely: Systole and Diastole values. Use 70 training and 30 testing samples where the labels are assigned according to the condition: 0 if 'non-smoker', 1 if 'smoker'.

Use the above code to:

1. Train the random forest classifier.
2. Create state space plots with scatter plot, categorical colouring, and probability contour plot.
3. Compare the predicted and actual labels to check how well the trained model performed: how many of the 30 test data points are correctly predicted?
4. Plot the feature importance to check how much the systolic and diastolic values contributed to the predictions.

## Q1

[PYTHON < >](#)

```
from pandas import read_csv

from numpy import arange, asarray, linspace, c_, meshgrid, zeros, ones
from numpy.random import uniform, seed

from matplotlib.pyplot import subplots, scatter, xlabel, ylabel, xticks

from sklearn.ensemble import RandomForestClassifier
```

[PYTHON < >](#)

```
df = read_csv("data/patients_data.csv")

train_samples = 70

df_np = df.to_numpy()

X = df_np[:train_samples, [3, 4]]

label_boolean = df['Smoker'] == 1

y = label_boolean[:train_samples]

print(X.shape, y.shape)
```

[OUTPUT < >](#)

```
(70, 2) (70,)
```

[PYTHON < >](#)

```
RANDOM_SEED = 123

clf = RandomForestClassifier(random_state=RANDOM_SEED)

clf.fit(X, y)

X_new = df_np[train_samples:, [3, 4]]

predict_new = clf.predict(X_new)

probab_new = clf.predict_proba(X_new)

print('Predictions: ', predict_new)
print('')
print('Probabilities: ', probab_new)
print('')
```



RandomForestClassifier

RandomForestClassifier(random\_state=123)

OUTPUT < >

Predictions: [False False False False False False False False False False False False  
True True False True True True False False True False True False  
False True True False True False]

Probabilities: [[0.98333333 0.01666667]

[0.7	0.3	]
[1.	0.	]
[0.93	0.07	]
[0.92	0.08	]
[0.675	0.325	]
[1.	0.	]
[0.93	0.07	]
[1.	0.	]
[1.	0.	]
[1.	0.	]
[0.9525	0.0475	]
[0.08	0.92	]
[0.46	0.54	]
[1.	0.	]
[0.14	0.86	]
[0.01	0.99	]
[0.	1.	]
[0.89	0.11	]
[1.	0.	]
[0.	1.	]
[0.715	0.285	]
[0.	1.	]
[0.60016667	0.39983333]	
[0.53666667	0.46333333]	
[0.	1.	]
[0.11	0.89	]
[1.	0.	]
[0.	1.	]
[1.	0.	]]

```

X1_min, X1_max = min(X[:, 0]), max(X[:, 0])
X2_min, X2_max = min(X[:, 1]), max(X[:, 1])

resolution = 100

vec_a = linspace(X1_min, X1_max, resolution)
vec_b = linspace(X2_min, X2_max, resolution)

grid_a, grid_b = meshgrid(vec_a, vec_b)

grid_a_flat = grid_a.ravel()
grid_b_flat = grid_b.ravel()

X_statespace = c_[grid_a_flat, grid_b_flat]

predict = clf.predict(X_statespace)
probabs = clf.predict_proba(X_statespace)

feature_1, feature_2 = 0, 1

fig, ax = subplots(ncols=3, nrows=1, figsize=(15, 5))

ax[0].scatter(X[:, feature_1], X[:, feature_2], c=y, s=40, cmap='bwr');
ax[0].set_xlim(X1_min, X1_max)
ax[0].set_ylim(X2_min, X2_max)
ax[0].set_xlabel('Diastole', fontsize=16)
ax[0].set_ylabel('Systole', fontsize=16);

cax1 = ax[1].scatter(X_statespace[:, feature_1], X_statespace[:, feature_2], c=predict, s=1, cmap='bwr')
ax[1].scatter(X_new[:, feature_1], X_new[:, feature_2], c=predict_new, s=40, cmap='Greys');
ax[1].set_xlabel('Diastole', fontsize=16);
ax[1].set_xlim(X1_min, X1_max)
ax[1].set_ylim(X2_min, X2_max)
fig.colorbar(cax1, ax=ax[1]);

grid_shape = grid_a.shape

probab_grid = probabs[:, 1].reshape(grid_shape)

# Subject with systole 130 and diastole 85

sys, dia = 130, 85

test_sample = [sys, dia]

contour_levels = linspace(0, 1, 10)

cax2 = ax[2].contourf(grid_a, grid_b, probab_grid, cmap='Greys', levels=contour_levels);
fig.colorbar(cax2, ax=ax[2]);

ax[2].scatter(test_sample[0], test_sample[1], c='r', marker='o', s=100)
ax[2].set_xlabel('Diastole', fontsize=16)
ax[2].set_xlim(X1_min, X1_max)
ax[2].set_ylim(X2_min, X2_max);


fig.tight_layout()

```

```
show()
```

[OUTPUT < >](#)

```
(109.0, 138.0)
(68.0, 96.0)
(109.0, 138.0)
(68.0, 96.0)
(109.0, 138.0)
```

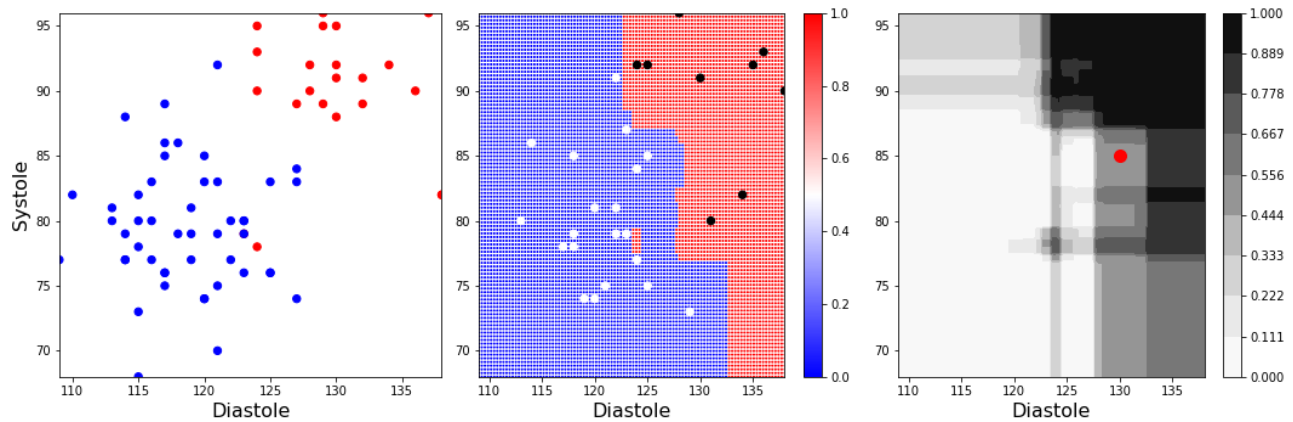

We can see how a single outlier (at [123, 78], left panel) can lead to fragmentation of the label predictions (red island in the blue section, middle panel).

Q3

[PYTHON < >](#)

```
test_sample = [[sys, dia]]

proba = clf.predict_proba(test_sample)

print(clf.classes_, proba)

bins = arange(proba.shape[1])


fig, ax = subplots()

ax.bar(bins, proba[0,:], color=('r', 'b'));
xticks(bins, ('Non-smoker', 'Smoker'), fontsize=16);

show()
```

[OUTPUT < >](#)

```
[False  True] [[0.48 0.52]]
```

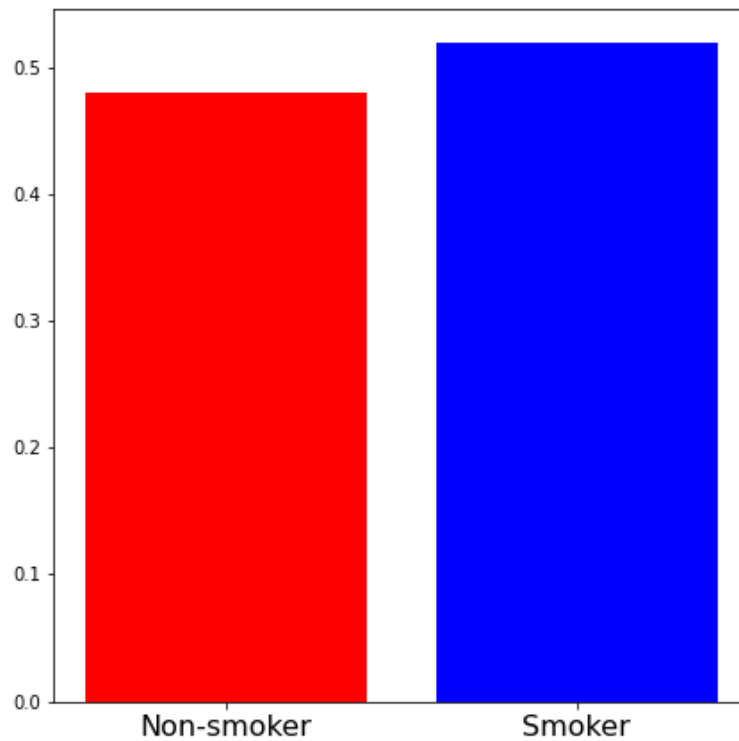

While there is a decision for the label 'Smoker', the (simulated) subject is essentially classified at chance level.


Q4

[PYTHON < >](#)

```
importances = clf.feature_importances_  
  
print('Features importances:')  
  
template = 'Feature 1: {:.1f}%; Feature 2: {:.1f}%'  
  
print(template.format(importances[0]*100, importances[1]*100))  
  
bins = arange(importances.shape[0])  
  
fig, ax = subplots()  
  
ax.bar(bins, importances, color=('m', 'g'));  
xticks(bins, ('Systolic', 'Diastolic'), fontsize=16);  
  
show()
```

[OUTPUT < >](#)

```
Features importances:  
Feature 1: 57.3%; Feature 2: 42.7%
```

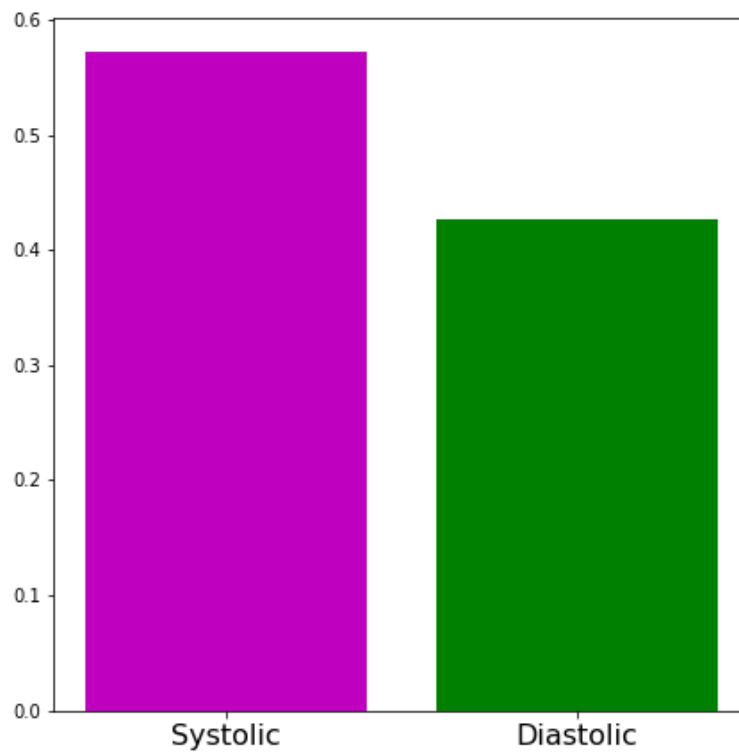

Based on the training data, more weight is given to the systolic blood pressure. However, we have to keep in mind that the training set had only 70 samples and is thus small.

## FURTHER PRACTICE: IRIS DATA

You can try to use the Random Forest classifier on the [Iris data](#):

The Iris data are a collection of five features (sepal length, sepal width, petal length, petal width and species) from 3 species of Iris (Iris setosa, Iris virginica and Iris versicolor). The species name is used for training in classification.

Import the data from [scikit-learn](#) as:

```
from sklearn import datasets

# Import Iris data
iris = datasets.load_iris()

# Get first two features and labels
X = iris.data[:, :2]
y = iris.target

print(X.shape, y.shape)
```

PYTHON < >

```
(150, 2) (150,)
```

OUTPUT < >

## Forum for Questions ([Tutorial Video](#))

Any questions related to this lesson, code or assignment can be posted at our [forum](#) on GitHub.


### NOTE

The forum can only be accessed via your GitHub account once you have accepted the invitation to be included in the team.

## KEYPOINTS

- Classification is to assign labels to unlabeled data.
- **SciKit Learn** is an open source application programming interface (API) for machine learning.
- `.fit()` function is used to receive the training data and perform the training of the model.
- `.predict()` function helps to find out what the model claims these data to be.
- `.predict_proba()` function predicts the probability of any predictions.

Content from [Improvement](#)

Last updated on 2023-08-11 | [Edit this page](#) 

[Download Chapter notebook \(ipynb\)](#)

[Mandatory Lesson Feedback Survey](#)

## SUBMISSIONS

- [Lesson Assignment](#)
- [Lesson Forum](#)

## OVERVIEW

### Questions

- How to deal with complex classification problems?
- Why is it important to use different classification algorithms?
- What is the best way to find the optimal classifier?
- How can we avoid over-fitting of data?
- How do we evaluate the performance of classifiers?

### Objectives

- Understanding complex training and testing data.
- Comparison of different model classes.
- Explaining the stratified shuffle split.

- Evaluation of classification - the ROC and AUC curves.







### REMARKS

1. From now on the code will become more complex. When copied, the code should run without errors with the given data sets. (Please report any errors thrown when running the code without modifications).
2. Make a copy of the notebook and start experimenting by modifying part of the code and comparing the outcome. Modifying existing code is one of the successful strategies when learning to programme as a non-programmer.
3. The first resource to consult when facing bugs are the official documentations, be it Python, Numpy, SciKit Learn or other.
4. If you formulate a problem adequately, often there may be good answers on [Stack Overflow](#).
5. Sometimes, simply copying and pasting an error message into the search engine can point you to the solution.

## Import functions

PYTHON < >

```
from numpy import mgrid, linspace, c_, arange, mean, array
from numpy.random import uniform, seed

from mpl_toolkits import mplot3d
from matplotlib.pyplot import subplots, axes, scatter, xticks, show

from sklearn.datasets import make_circles
```

## CHALLENGE

We would like to test several machine learning models' ability to deal with a complicated task. A complicated task is one where the topology of the labelled data is not trivially separable into classes by (hyper)planes, e.g. by a straight line in a scatter plot.

Our example is one class of data organised in a doughnut shape and the other class contained within the first doughnut forming a doughnut-within-a-doughnut.

Here is the function code to create these data, followed by a function call to produce a figure.

```

def make_torus_3D(n_samples=100, shuffle=True, noise=None, random_state=None,
                  factor=.8):
    """Make a large torus containing a smaller torus in 3d.

    A toy dataset to visualize clustering and classification
    algorithms.

    Read more in the :ref:`User Guide <sample_generators>`.

    Parameters
    -----
    n_samples : int, optional (default=100)
        The total number of points generated. If odd, the inner circle will
        have one point more than the outer circle.

    shuffle : bool, optional (default=True)
        Whether to shuffle the samples.

    noise : double or None (default=None)
        Standard deviation of Gaussian noise added to the data.

    random_state : int, RandomState instance or None (default)
        Determines random number generation for dataset shuffling and noise.
        Pass an int for reproducible output across multiple function calls.
        See :term:`Glossary <random_state>`.

    factor : 0 < double < 1 (default=.8)
        Scale factor between inner and outer circle.

    Returns
    -----
    X : array of shape [n_samples, 2]
        The generated samples.

    y : array of shape [n_samples]
        The integer labels (0 or 1) for class membership of each sample.
    """
    from numpy import pi, linspace, cos, sin, append, ones, zeros, hstack, vstack, intp
    from sklearn.utils import check_random_state, shuffle

    if factor >= 1 or factor < 0:
        raise ValueError("'factor' has to be between 0 and 1.")

    n_samples_out = n_samples // 2
    n_samples_in = n_samples - n_samples_out

    co, ao, ci, ai = 3, 1, 3.6, 0.2
    generator = check_random_state(random_state)
    # to not have the first point = last point, we set endpoint=False
    linspace_out = linspace(0, 2 * pi, n_samples_out, endpoint=False)
    linspace_in = linspace(0, 2 * pi, n_samples_in, endpoint=False)
    outer_circ_x = (co+ao*cos(linspace_out)) * cos(linspace_out*61.1)
    outer_circ_y = (co+ao*cos(linspace_out)) * sin(linspace_out*61.1)
    outer_circ_z = ao*sin(linspace_out)

    inner_circ_x = (ci+ai*cos(linspace_in)) * cos(linspace_in*61.1) * factor
    inner_circ_y = (ci+ai*cos(linspace_in)) * sin(linspace_in*61.1) * factor
    inner_circ_z = ai*sin(linspace_in) * factor

```

```

X = vstack([append(outer_circ_x, inner_circ_x),
            append(outer_circ_y, inner_circ_y),
            append(outer_circ_z, inner_circ_z)]).T

y = hstack([zeros(n_samples_out, dtype=intp),
            ones(n_samples_in, dtype=intp)])

if shuffle:
    X, y = shuffle(X, y, random_state=generator)

if noise is not None:
    X += generator.normal(scale=noise, size=X.shape)

return X, y

```

PYTHON < >

```

RANDOM_STATE = 12345
seed(RANDOM_STATE)

X, y = make_torus_3D(n_samples=2000, factor=.9, noise=.001, random_state=RANDOM_STATE)

feature_1, feature_2, feature_3 = 0, 1, 2
ft_min, ft_max = X.min(), X.max()

fig, ax = subplots(figsize=(12, 9))

ax = axes(projection="3d")


im = ax.scatter3D(X[:, feature_1], X[:, feature_2], X[:, feature_3], marker='o', s=20, c=y, cmap='bwr');

ax.set_xlabel('Feature 1')
ax.set_ylabel('Feature 2')
ax.set_zlabel('Feature 3')

# Angles to pick the perspective
ax.view_init(30, 50);

show()

```

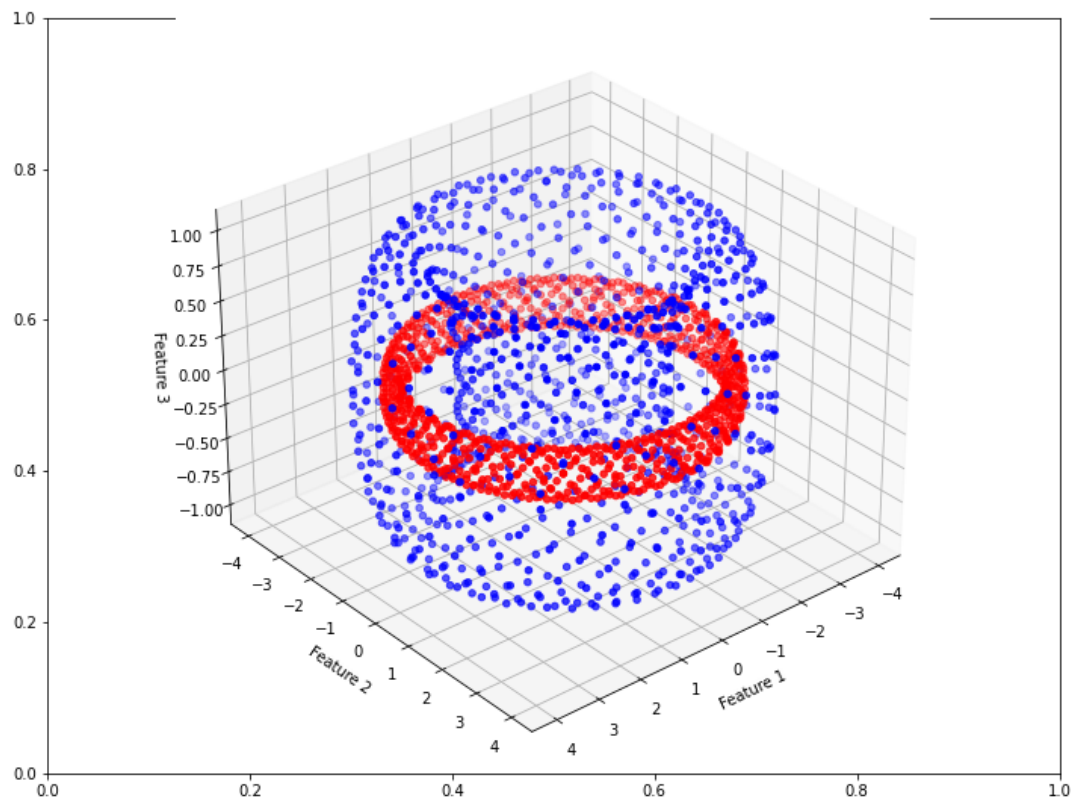

The challenge here is that the only way to separate the data of the two labels from each other is to find a separating border that lies between the blue and the red doughnut (mathematically: torus) and itself is a torus, i.e. a complex topology. Similarly, one can test to separate one class of data that lie on the surface of a sphere and then have data on another sphere embedded within it. Typically, it is unknown what type of high-dimensional topologies is present in biological data. As such it is not clear at the outset which classification strategy will work best. Let us start with a simpler example.

## Training a variety of machine learning models

**SciKit Learn** provides the means to generate practice datasets with specific qualities. In this section, we will use the `make_circles` function. (see the [documentations](#)):

## Circular Test Data

[PYTHON < >](#)

```
RANDOM_STATE = 1234
seed(RANDOM_STATE)

X, y = make_circles(n_samples=500, factor=0.3, noise=.05, random_state=RANDOM_STATE)

feature_1, feature_2 = 0, 1
ft_min, ft_max = X.min(), X.max()

print('Shape of X:', X.shape)
```


[OUTPUT < >](#)

```
Shape of X: (500, 2)
```

[PYTHON < >](#)

```
fig, ax = subplots(figsize=(10, 5), nrows=1, ncols=2)
ax[0].scatter(X[:, feature_1], X[:, feature_2], c=y, s=4, cmap='bwr');
ax[1].hist(X);

show()
```

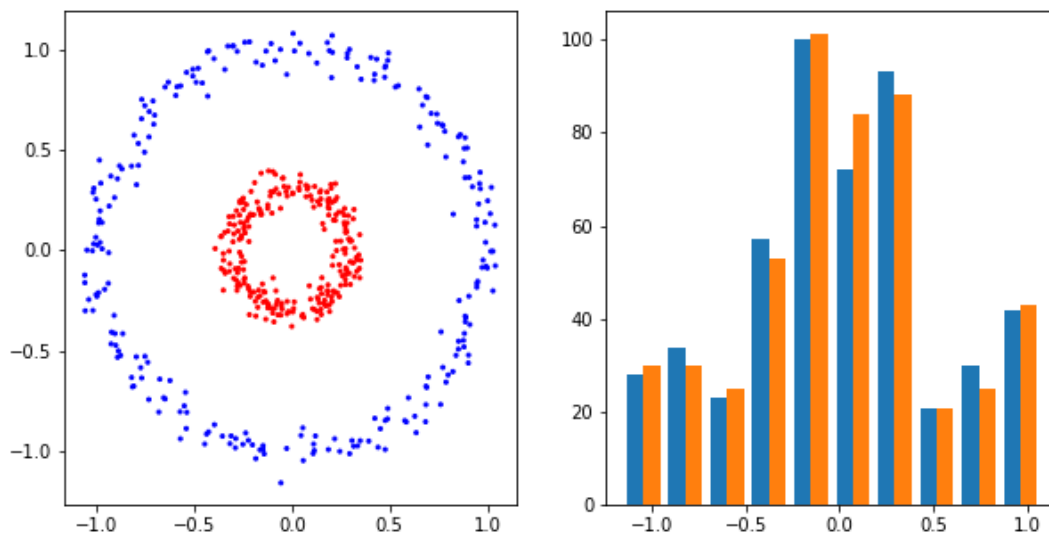

The function yields only two features. The reason is that with two features we can visualise the complete state space in a two-dimensional scatter plot. The data of both labels are organised along a ring. There is a certain amount of randomness added to create data distributed normally around the ring.

The tricky thing about such a data distribution is that in a standard view of the data, the histogram, the clear state space organisation is not visible. There are e.g. no two distinct mean values of the distributions. Also, while the two features are clearly dependent on each other (as seen in the scatter plot), it is not possible to regress one with the other by means of fits of the type  $y = f(x)$ .

We will now use different classes of machine learning models to fit to these labelled data.

# Classification Algorithms

Different classification algorithms approach problems differently. Let us name the algorithms in **SciKit Learn**.

**SciKit Learn** provides the following algorithms for classification problems:

- Ensemble: Averaging:
  - Random Forest
  - Extra Tree
  - Isolation Forest
  - Bagging
  - Voting
- Boosting:
  - Gradient Boosting
  - AdaBoost
- Decision Trees:
  - Decision Tree
  - Extra Tree
- Nearest Neighbour:
  - K Nearest Neighbour
  - Radius Neighbours
  - Nearest Centroid
- Support Vector Machine:
  - with non-linear kernel:
    - Radial Basis Function (RBF) Polynomial
    - Sigmoid
  - with linear kernel:
    - Linear kernel
  - parametrised with non-linear kernel:
    - Nu-Support Vector Classification
- Neural Networks:
  - Multi-layer Perceptron
  - Gaussian:
    - Gaussian Process
  - Linear Models:
    - Logistic Regression
    - Passive Aggressive
    - Ridge
    - Linear classifiers with Stochastic Gradient Descent
- Bayesian:
  - Bernoulli
  - Multinomial
  - Complement

Some of these algorithms require a more in-depth understanding of how they work. To that end, we only review the performance of those that are easier to implement and adjust.

## AdaBoost

The AdaBoost algorithm is special in that it does not work on its own; instead, it complements another ensemble algorithm (e.g. Random Forest) and *boosts* its performance by weighing the training data through a boosting algorithm. Note that boosting the performance does not necessarily translate into a better fit. This is because boosting algorithms are generally robust against over-fitting, meaning that they always try to produce generalisable models.

## Seeding

Most machine learning algorithms rely on random number generation to produce results. Therefore, one simple, but important adjustment is to **seed** the number generator, and thereby making our comparisons more consistent; i.e. ensure that all models use the same set of random numbers. Almost all SciKit Learn models take an argument called **random\_state**, which takes an integer number to seed the random number generator.

## Training and Testing

Here is code to import a number of classifiers from SciKit Learn, fit them to the training data and predict the (complete) state space. The result is plotted below.

PYTHON &lt; &gt;

```

from sklearn.ensemble import RandomForestClassifier, ExtraTreesClassifier, GradientBoostingClassifier, AdaBoostClassifier
from sklearn.tree import DecisionTreeClassifier
from sklearn.svm import SVC, LinearSVC
from sklearn.neural_network import MLPClassifier
from sklearn.neighbors import KNeighborsClassifier

classifiers = {
    'Random Forest': RandomForestClassifier(random_state=RANDOM_STATE),
    'AdaBoost (Random Forest)': AdaBoostClassifier(RandomForestClassifier(random_state=RANDOM_STATE)),
    'Extra Trees': ExtraTreesClassifier(random_state=RANDOM_STATE),
    'AdaBoost (Extra Tree)': AdaBoostClassifier(ExtraTreesClassifier(random_state=RANDOM_STATE)),
    'Decision Tree': DecisionTreeClassifier(random_state=RANDOM_STATE),
    'SVC (RBF)': SVC(random_state=RANDOM_STATE),
    'SVC (Linear)': LinearSVC(random_state=RANDOM_STATE),
    'Multi-layer Perceptron': MLPClassifier(max_iter=5000, random_state=RANDOM_STATE)
}

```

PYTHON &lt; &gt;

```

ft_min, ft_max = -1.5, 1.5

# Constructing (2 grids x 300 rows x 300 cols):
grid_1, grid_2 = mgrid[ft_min:ft_max:.01, ft_min:ft_max:.01]

# We need only the shape for one of the grids (i.e. 300 x 300):
grid_shape = grid_1.shape

# state space grid for testing
new_obs = c_[grid_1.ravel(), grid_2.ravel()]

```

PYTHON &lt; &gt;

```

contour_levels = linspace(0, 1, 6)

fig, all_axes = subplots(figsize=[15, 5], ncols=4, nrows=2, sharey=True, sharex=True)


for ax, (name, clf) in zip(all_axes.ravel(), classifiers.items()):
    clf.fit(X, y)
    y_pred = clf.predict(new_obs)
    y_pred_grid = y_pred.reshape(grid_shape)

    ax.scatter(X[:, feature_1], X[:, feature_2], c=y, s=1, cmap='bwr_r')
    ax.contourf(grid_1, grid_2, y_pred_grid, cmap='gray_r', alpha=.2, levels=contour_levels)
    ax.set_ylim(ft_min, ft_max)
    ax.set_xlim(ft_min, ft_max)
    ax.set_yticks([-1.5, 0, 1.5])
    ax.set_xticks([-1.5, 0, 1.5])
    ax.set_title(name, fontsize=10);

show()

```



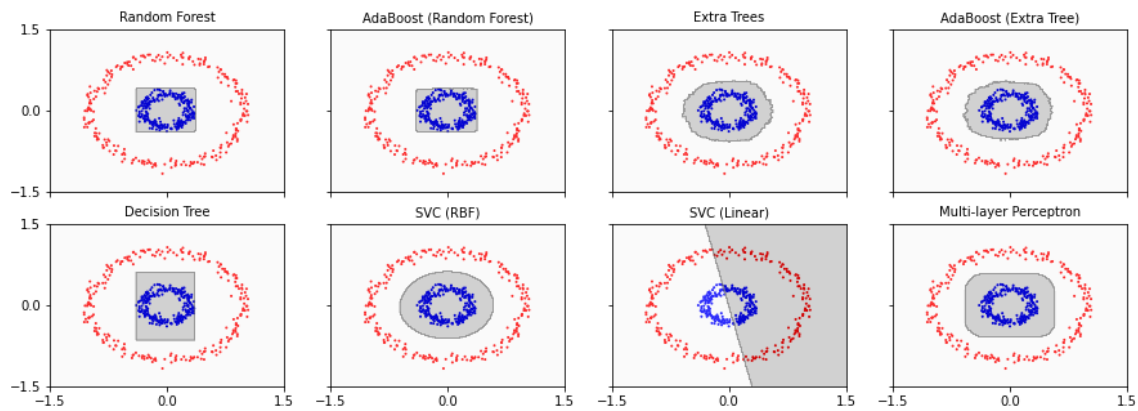

Seven of the eight classifiers were able to separate the inner data set from the outer data set successfully. The main difference is that some algorithms ended up with a more rectangular shape of the boundary whereas the others found a more circular form which reflects the original data distribution more closely. One classifier simply fails: the support vector classifier (SVC) with linear basis functions: it tries to fit a straight line to separate the classes which in this case is impossible.

## The Train-Test Split

We will now modify our workflow to avoid the need to create separate testing data (the typical situation when dealing with recorded data). For this we start with a data set of  $n$  labelled samples. Of these  $n$  samples, a certain percentage is used for training (using the provided labels) and the rest for testing (withholding the labels). The testing data then do not need to be prepared separately.

The function we use is `train_test_split` from SciKit Learn. A nice feature of this function is that it tries to preserve the ratio of labels in the split. E.g. if the data contain 70% of `True` and 30 % of `False` labels, the algorithm tries to preserve this ratio in the split as good as possible: around 70% of the training data and of the testing data will have the `True` label.

PYTHON < >

```
from sklearn.model_selection import train_test_split

X, y = make_circles(n_samples=1000, factor=0.3, noise=.05, random_state=RANDOM_STATE)

X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=.3, random_state=RANDOM_STATE, shuffle=1)

print(X_train.shape, X_test.shape)
```

OUTPUT < >

```
(700, 2) (300, 2)
```

Here is an illustration of the two sets of data. The splitting into testing and training data is done randomly. Picking test data randomly is particularly important for real data as it helps to reduce potential bias in the recording order.

```

fig, ax = subplots(figsize=(7, 6), ncols=2, nrows=2, sharex=True)


ax[0, 0].scatter(X_train[:, feature_1], X_train[:, feature_2], c=y_train, s=4, cmap='bwr')
ax[0, 1].scatter(X_test[:, feature_1], X_test[:, feature_2], c=y_test, s=4, cmap='bwr')

ax[1, 0].hist(X_train)
ax[1, 1].hist(X_test)
ax[0, 0].set_title('Training data')
ax[0, 1].set_title('Test data')

ax[0, 0].set_ylim(ft_min, ft_max)
ax[0, 1].set_ylim(ft_min, ft_max)
ax[1, 0].set_ylim(0, 100)
ax[1, 1].set_ylim(0, 100);

show()

```

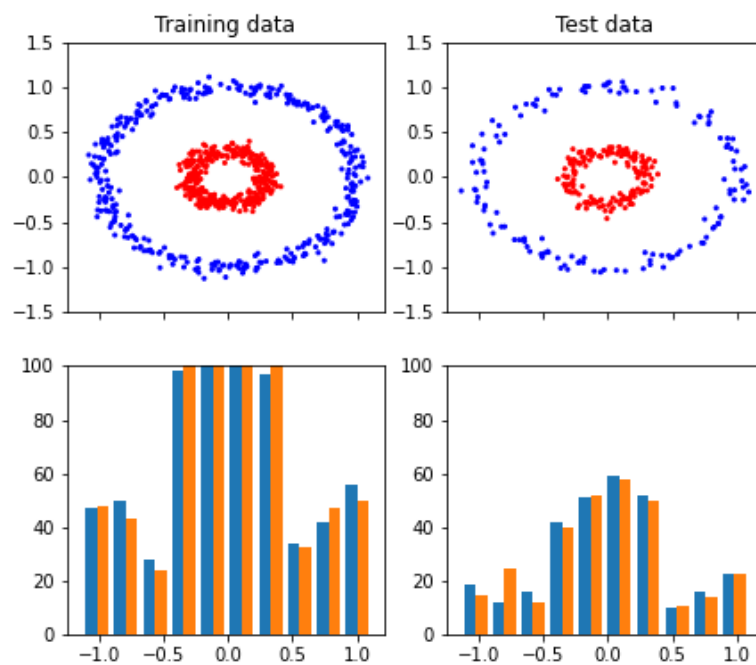

Now we can repeat the training with this split dataset using eight types of models as above.

To compare the model performances, we use **scoring**: the method `.score` takes as input arguments the testing samples and their true labels. It then uses the model predictions to calculate the fraction of labels in the testing data that were predicted correctly.

There are different techniques to evaluate the performance, but the `.score` method provides a quick, simple, and handy way to assess a model. As far as classification algorithms in SciKit Learn are concerned, the method usually produces the **mean accuracy**, which is between 0 and 1; and the higher the score, the better the fit.

```

fig, all_axes = subplots(figsize=[15, 5], ncols=4, nrows=2, sharey=True, sharex=True)

for ax, (name, clf) in zip(all_axes.ravel(), classifiers.items()):
    # Training the model using training data:
    clf.fit(X_train, y_train)

    y_pred = clf.predict(new_obs)
    y_pred_grid = y_pred.reshape(grid_shape)

    # Evaluating the score using test data:
    score = clf.score(X_test, y_test)

    # Scattering the test data only:
    ax.scatter(X_test[:, feature_1], X_test[:, feature_2], c=y_test, s=4, cmap='bwr', marker='.')


    ax.contourf(grid_1, grid_2, y_pred_grid, cmap='gray_r', alpha=.2, levels=contour_levels)
    # ax.contourf(grid[0], grid[1], y_pred_grid, cmap='gray_r', alpha=.2, levels=contour_levels)

    ax.set_ylim(ft_min, ft_max)
    ax.set_xlim(ft_min, ft_max)
    ax.set_yticks([-1.5, 0, 1.5])
    ax.set_xticks([-1.5, 0, 1.5])

    label = '{} - Score: {:.2f}'.format(name, score)
    ax.set_title(label, fontsize=10);

show()

```

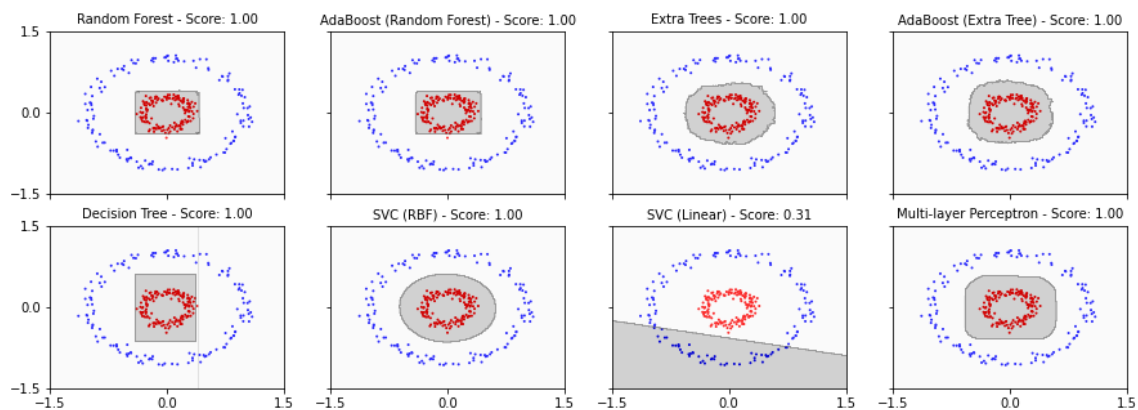

Here, we only plotted the test data, those that were classified based on the trained model. The gray area shows the result of the classification: within the gray area the prediction is 1 (the red samples) and outside it is 0 (the blue samples). The result is that testing data are classified correctly in all but one of the classifiers, so their performance is 1, or 100 %. This is excellent because it demonstrates that most classifiers are able to deal with embedded topologies.

Let us now repeat the procedure with a higher level of noise to make the task more complicated.

```

X, y = make_circles(n_samples=1000, factor=.5, noise=.3, random_state=RANDOM_STATE)

X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=.3, random_state=RANDOM_STATE, shuffle=1)

fig, ax = subplots(figsize=(7, 6), ncols=2, nrows=2, sharex=True)


ax[0, 0].scatter(X_train[:, feature_1], X_train[:, feature_2], c=y_train, s=4, cmap='bwr')
ax[0, 1].scatter(X_test[:, feature_1], X_test[:, feature_2], c=y_test, s=4, cmap='bwr')

ax[1, 0].hist(X_train)
ax[1, 1].hist(X_test)
ax[0, 0].set_title('Training data')
ax[0, 1].set_title('Test data')

ax[0, 0].set_ylim(-3, 3)
ax[0, 1].set_ylim(-3, 3)
ax[1, 0].set_ylim(0, 200)
ax[1, 1].set_ylim(0, 200);

show()

```

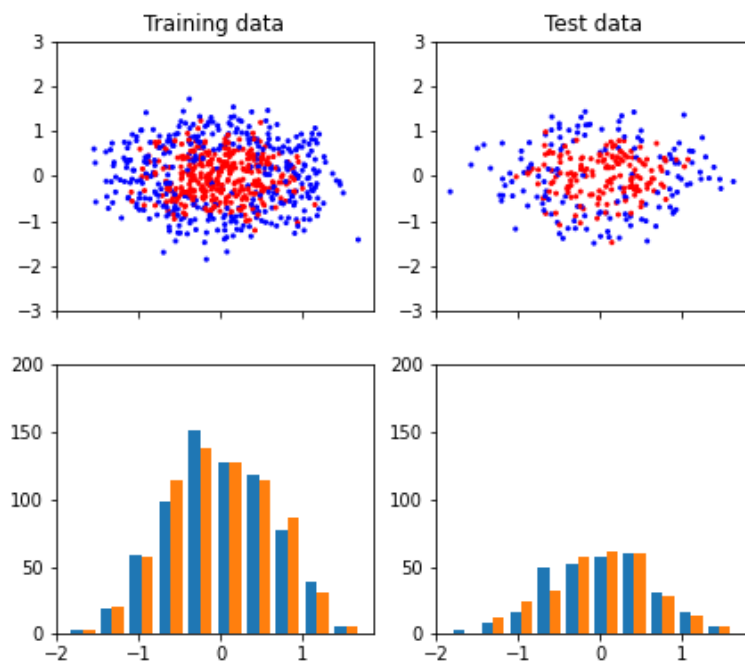

```

fig, all_axes = subplots(figsize=[15, 5], ncols=4, nrows=2, sharey=True, sharex=True)

for ax, (name, clf) in zip(all_axes.ravel(), classifiers.items()):
    # Training the model using training data:
    clf.fit(X_train, y_train)

    y_pred = clf.predict(new_obs)
    y_pred_grid = y_pred.reshape(grid_shape)

    # Evaluating the score using test data:
    score = clf.score(X_test, y_test)

    # Scattering the test data only:
    ax.scatter(X_test[:, feature_1], X_test[:, feature_2], c=y_test, s=4, cmap='bwr', marker='.')


    ax.contourf(grid_1, grid_2, y_pred_grid, cmap='gray_r', alpha=.2, levels=contour_levels)

    ax.set_ylim(ft_min, ft_max)
    ax.set_xlim(ft_min, ft_max)
    ax.set_yticks([-1.5, 0, 1.5])
    ax.set_xticks([-1.5, 0, 1.5])

    label = '{} - Score: {:.2f}'.format(name, score)
    ax.set_title(label, fontsize=10);

show()

```

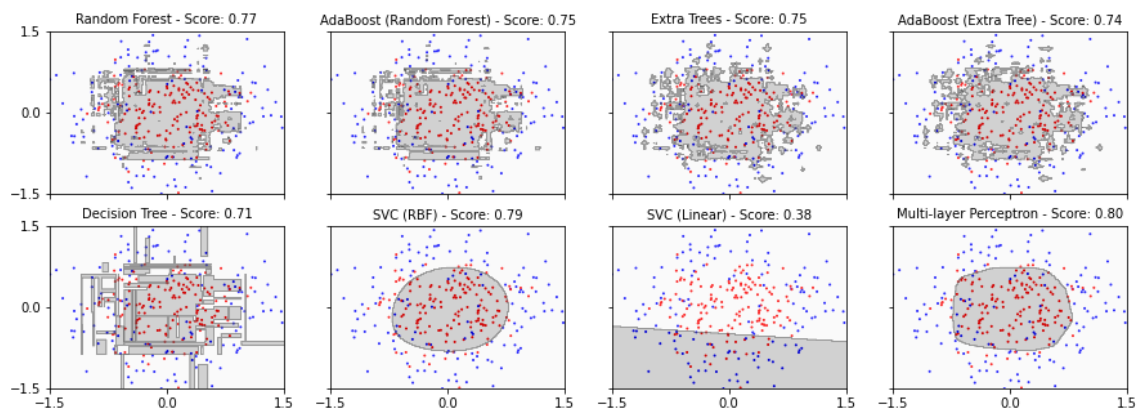

Now the data are mixed in the plane and there is no simple way to separate the two classes. We can see in the plots how the algorithms try to cope with their different strategies. One thing that is immediately obvious is that the fitting patterns are different. Particularly, we can see the fragmented outcome of the *decision tree* classifier and the smooth elliptic area found by the *support vector classifier (SVC)* with radial basis functions (RBF) and the neural network (MLP). On a closer look, you may also notice that with ensemble methods in the upper row, the patterns are somewhat disorganised. This is due to the way ensemble methods work: they sample the data randomly and then class them into different categories based on their labels.

If the prediction was made by chance (throwing a dice), one would expect a 50 % score. Thus, the example also shows that the performance depends on the type of problem and that this testing helps to find an optimal classifier.

## NEVER EXPOSE THE TEST DATA

Testing a model on data that is used in training is a methodological mistake. It is therefore vital that the test data is **never, ever** used for training a model at any stage. This is one of the most fundamental principles of machine learning, and its importance cannot be exaggerated. There are numerous examples of people making this mistake one way or another, especially where multiple classification algorithms are used to address a problem.

## The Stratified Shuffle Split

One potential bias arises when we try to improve the performance of our models through the change of the so-called **hyperparameters** (instead of using the default parameters as we did so far). We will always receive the optimal output given **the specific test data chosen**. This may lead to overfitting the model on the chosen training and testing data. This can be avoided by choosing different splits into testing and training data and repeating the fit procedure. Doing different splits while preserving the fraction of labels of each class in the original data, the method is called the **stratified shuffle split**.

We first need to import and instantiate the splitter. We set key word argument `n_splits` to determine the number of different splits. `test_size` lets us determine what fraction of samples is used for the testing data.

```
from sklearn.model_selection import StratifiedShuffleSplit

sss = StratifiedShuffleSplit(random_state=RANDOM_STATE, n_splits=10, test_size=0.3)
```

PYTHON < >

Let us look at the different splits obtained:

```

fig, ax = subplots(figsize=[10, 5])

n_splits = sss.n_splits
split_data_indices = sss.split(X=X, y=y)

for index, (tr, tt) in enumerate(split_data_indices):
    indices = X[:, feature_1].copy()
    indices[tt] = 1
    indices[tr] = 0

    # Visualize the results
    x_axis = arange(indices.size)
    y_axis = [index + .5] * indices.size
    ax.scatter(x_axis, y_axis, c=indices, marker='_', lw=10, cmap='coolwarm', vmin=-.2, vmax=1.2)


# Plot the data classes and groups at the end
class_y = [index + 1.5] * indices.size
ax.scatter(x_axis, class_y, c=y, marker='_', lw=10, cmap='coolwarm')

# Formatting
ylabels = list(range(n_splits))
ylabels.extend(['Data'])

ax.set_yticks(arange(n_splits + 1) + .5)
ax.set_yticklabels(ylabels)
ax.set_xlabel('Sample index')
ax.set_ylabel('SSS iteration');

show()

```

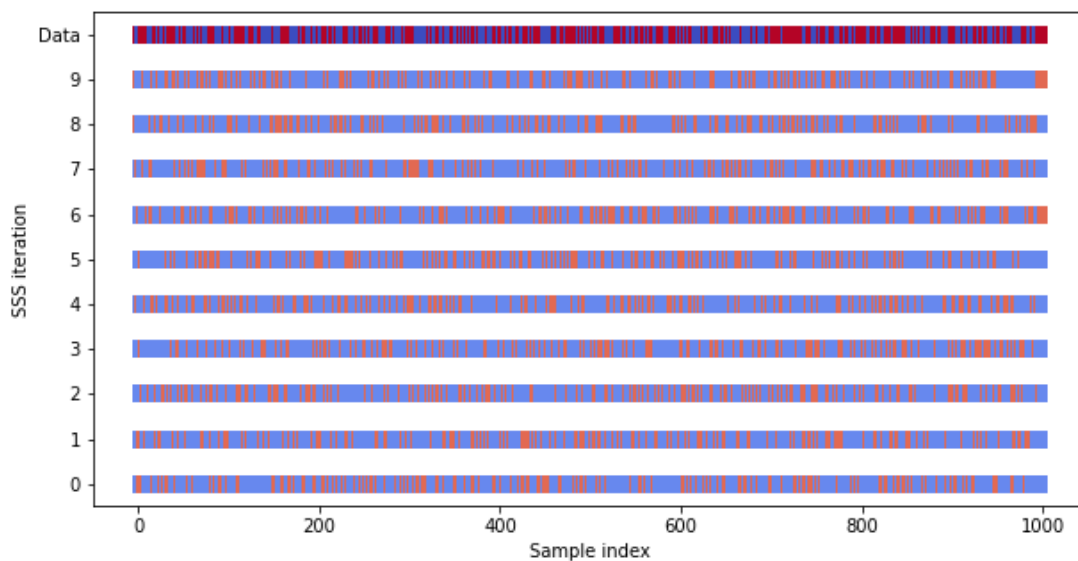


By choosing `n_splits=10`, we obtained ten different splits that have similarly distributed train and test data subsets from the original data. The fraction of the data set aside for testing is 30 %. The different splits cover the whole data set evenly. As such, using them for training and testing will lead to a fairly unbiased average performance.

Let us look at the data in state space to check that the classification task is now a real challenge.

```
fig, ax = subplots(figsize=(8, 8))

for train_index, test_index in sss.split(X, y):
    ax.scatter(X[train_index, 0], X[train_index, 1], c=y[train_index], cmap='Set1', s=30, marker='^', alpha=
    ax.scatter(X[test_index, 0], X[test_index, 1], c=y[test_index], cmap='cool', s=30, alpha=.5, marker='*',
show()
```

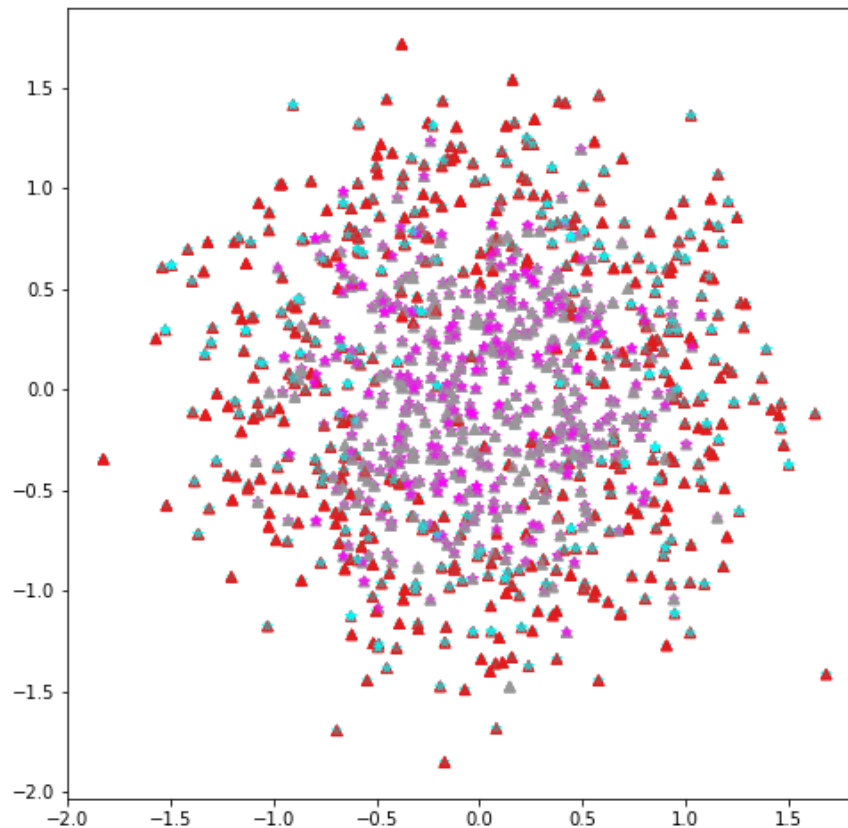


These are the scatter plots of the training (magenta) and testing (blue) data. Here are their distributions:

```
fig, ax = subplots(figsize=(8, 8))

for train_index, test_index in sss.split(X, y):
    ax.hist(X[train_index], color=['magenta', 'red'], alpha=.5, histtype='step')
    ax.hist(X[test_index], color=['cyan', 'blue'], alpha=.4, histtype='step');

show()
```



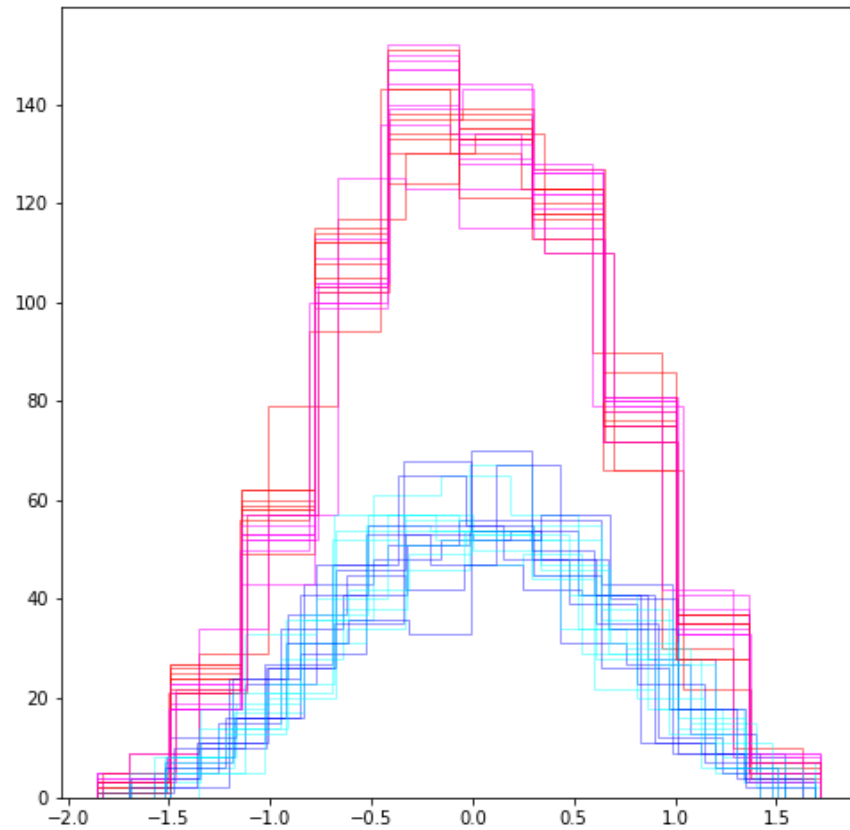

The distributions differ in height because less data are in the testing test. Otherwise they are similarly centred and spread. Using a number of realisations (instead of just one) we expect to obtain a more accurate and robust result of the training.

We now train our classifiers on these different splits and obtain the respective scores. They will give a robust measure of the classifier's performance given the data and avoid potential bias due to the selection of specific test data.

```
X, y = make_circles(n_samples=1000, factor=.3, noise=.4, random_state=RANDOM_STATE)

split_data_indices = sss.split(X=X, y=y)

score = list()

for train_index, test_index in sss.split(X, y):
    X_s, y_s = X[train_index, :], y[train_index]
    new_obs_s, y_test_s = X[test_index, :], y[test_index]

    score_clf = list()

    for name, clf in classifiers.items():

        clf.fit(X_s, y_s)
        y_pred = clf.predict(new_obs_s)
        score_clf.append(clf.score(new_obs_s, y_test_s))

    score.append(score_clf)

score_mean = mean(score, axis=0)

bins = arange(len(score_mean))

fig, ax = subplots()


ax.bar(bins, score_mean);
ax.set_xticks(arange(0,8)+0.4)
ax.set_xticklabels(classifiers.keys(), rotation=-70);

show()

print(classifiers.keys())
print('Average scores: ')
print(["{0:0.2f}".format(ind) for ind in score_mean])
```

▼ MLPClassifier

```
MLPClassifier(max_iter=5000, random_state=1234)
```

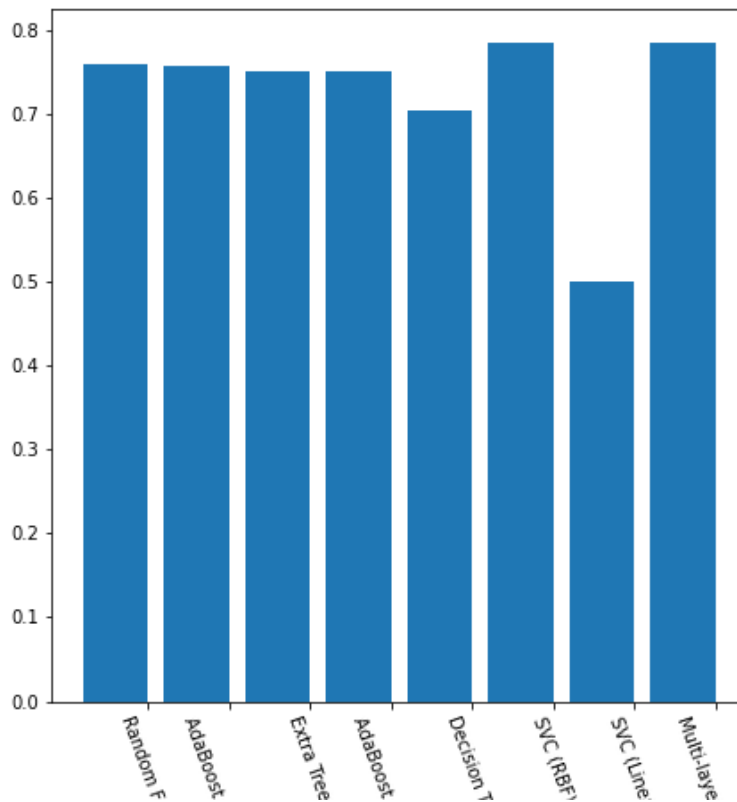

OUTPUT < >

```
dict_keys(['Random Forest', 'AdaBoost (Random Forest)', 'Extra Trees', 'AdaBoost (Extra Tree)', 'Decision Tr
Average scores:
['0.76', '0.76', '0.75', '0.75', '0.70', '0.79', '0.50', '0.78']
```

The result is the average score for the ten splits performed. All results for the noise-contaminated data are now in the seventies.

This is still good given the quality of the data. It appears that the *decision tree* classifier gives the lowest result for this kind of problem, *SVC (RBF)* scores highest. We have to keep in mind, however, that we are using the classifiers with their default settings. We will later use variation of the so-called hyperparameters to further improve the classification score.

Here we have used a for loop to train and test on each of the different splits of the data. SciKit Learn also contains functions that take the stratified shuffle split as an argument, e.g. `permutation_test_score`. In that case, the splits do not need to be done separately.

We have now reached a point where we can trust to have a robust and unbiased outcome of the training. Let us now look at more refined ways to quantify the result.

## Evaluation: ROC and AUC

There are various measures that may be used to evaluate the performance of a machine learning model. Such measures look at different characteristics, including the goodness of fit and generalisability of a model. Evaluation measures used with regards to classification models include, but are not limited to:

- Receiver Operation Characteristic (ROC) and Area Under the Curve (AUC) - for binary classifiers.
- Accuracy
- Precision
- Recall

There are many other metrics that, depending on the problem, we may use to evaluate a machine learning model. Please see [the official documentations](#) for additional information on these measures and their implementation in SciKit Learn.

The quantities we are going to look at are the **Receiver Operation Characteristic (ROC)** and the **Area Under the Curve (AUC)**.

A receiver operation characteristic, often referred to as the **ROC curve**, is a visualisation of the discrimination threshold in a binary classification model. It illustrates the rate of true positives (TPR) against the rate of false positives (FPR) at different thresholds. The aforementioned rates are essentially defined as:

- True Positive Rate (TPR): the sensitivity of the model
- False Positive Rate (FPR): one minus the specificity of the model

This makes ROC a measure of sensitivity versus specificity.

The area under the ROC curve, often referred to as AUC, reduces the information contained within a ROC curve down to a value between 0 and 1, with 1 being a perfect fit. An AUC value of 0.5 represents any random guess, and values below demonstrate a performance that's even worse than a lucky guess!

## DISCUSSION

SciKit Learn includes specialist functions called `roc_curve` and `roc_auc_score` to obtain ROC (FPR and TPR values for visualisation) and AUC respectively. Both functions receive as input arguments the test labels (i.e. `y_test`) and the score (probability) associated with each prediction. We obtain the latter measure using one of the following two techniques:

- Decision function: where classification models have a `.decision_function` method that provides us with score associated with each label.
- Probability: where classification models have a `.predict_proba` method that provides us with the probability associated with each prediction (we used it in the Classification Introduction lesson). In this case, however, the results are provided in the form of a two-dimensional array where columns represent different labels (as defined in property). Given that we will plot ROC curves for binary problems (two labels), we only pick one of these columns. Usually, the second column (the feature representing `True` or `1`) is the one to choose. However, if you notice that the results are unexpectedly bad, you may try the other column just be sure.

We can see that our classifiers now reach different degrees of prediction. The degree can be quantified by the **Area Under the Curve (AUC)**. It refers to the area between the blue ROC curve and the orange diagonal. The area under the ROC curve, often referred to as AUC, reduces the information contained within a ROC curve down to a value between 0 and 1, with 1 being a perfect fit. An AUC value of 0.5 represents a random guess, and values below the diagonal demonstrate a performance that's even worse than a guess!

SciKit Learn includes specialist functions called `roc_curve` and `roc_auc_score` to obtain ROC (FPR and TPR values for visualisation) and AUC respectively. Both function receive as input arguments the test labels (i.e. `y_score`) and the score (probability) associated with each prediction. We obtain the latter measure using one of the following two techniques:

- Decision function: where classification models have a `.decision_function` method that provides us with a score associated with each label.
- Probability: where classification models have a `predict_proba` method that provides us with the probability associated with each prediction. In this case, however, the results are provided in the form of a two-dimensional array where columns represents different labels (as defined in `.classes` property). Given that we only plot ROC curves for binary problems, we should only use one of these columns. Usually, the second column (the feature representing `True` or `1`) is the one to choose. However, if you notice that the results are unexpectedly bad, you may try the other column just be sure.

```
from sklearn.metrics import roc_curve, roc_auc_score

fig, all_axes = subplots(figsize=[15, 10], ncols=4, nrows=2, sharey=True, sharex=True)

for ax, (name, clf) in zip(all_axes.ravel(), classifiers.items()):
    clf.fit(X_train, y_train)

    # Checking whether or not the object has `decision_function`:
    if hasattr(clf, 'decision_function'):
        # If it does:
        y_score = clf.decision_function(X_test)
    else:
        # Otherwise:
        y_score = clf.predict_proba(X_test)[:, feature_2] # We only need one column.

    # Obtaining the x- and y-axis values for the ROC curve:
    fpr, tpr, thresh = roc_curve(y_test, y_score)


    # Obtaining the AUC value:
    roc_auc = roc_auc_score(y_test, y_score)

    ax.plot(fpr, tpr, lw=2)
    ax.plot([0, 1], [0, 1], lw=1, linestyle='--')

    ax.set_xlabel('False Positive Rate')
    ax.set_ylabel('True Positive Rate')

    label = '{} - AUC: {:.2f}'.format(name, roc_auc)
    ax.set_title(label, fontsize=10)

show()
```

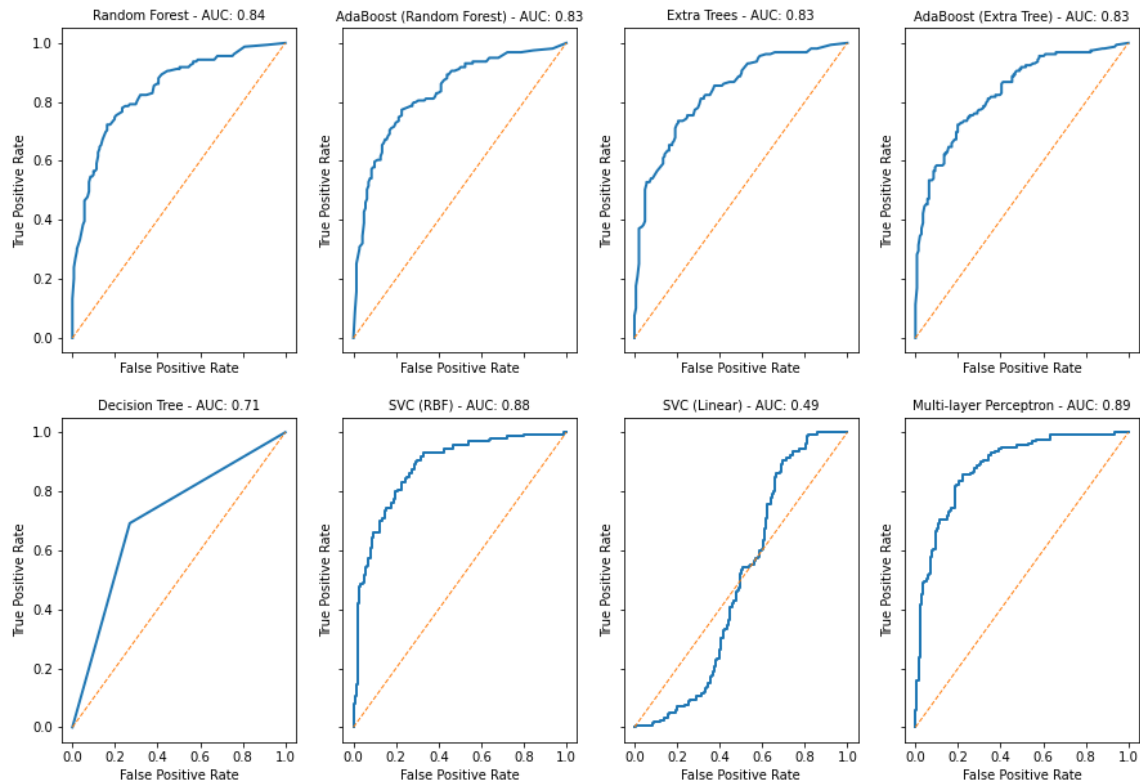

The (orange) diagonal represents predictions of the two labels by a coin toss. To be of value the classifier must reach a ROC curve above the diagonal.

This concludes our first steps into classification with SciKit Learn. There are many more aspects of classification. From a practical point of view, [data normalisation](#) and [permutation test score](#) as well as the workflow report are important. These will be the topics of our next lesson.

## Lesson Assignment [\(Tutorial Video\)](#)

The assignment for this lesson consists of the questions shown below in the next section and can be accessed via GitHub classroom.

- For **L2D online cohort**, please click this link: [GitHub classroom assignment link](#)

### NOTE

1. You will need to login to your GitHub account.
2. Choose your name from the list of students.
3. Accept the assignment.
4. Refresh the page.

By doing these steps, you will be able to access the assignment repository at GitHub. Instructions for completing the assignment are displayed beneath the file browser containing all the files you will need. These instructions are contained in the [README.md](#) file.

## ASSIGNMENT QUESTIONS

Take the torus-within-a-torus data generator from the **Challenge** above.

1. Create data with three features and a noise level of 0.3.
2. Create a pseudo-3D scatter plot of one of the test data sets to judge the difficulty of the task.
3. Train the above introduced classifiers using the stratified shuffle split to generate 10 sets of testing and training data and obtain the average score for each classifier.
4. Plot the feature importances obtained from the Random Forest classifier to see the contributions of each feature to the outcome.

Note that with 3 or more features it is no longer possible to see the full state space in a plane.

5. Optional: Check how the outcome varies depending on
  - Choice of seed for random number generator
  - Number of data splits
  - Percentage of data withheld for testing

## RECOMMENDATION

Pick any of the provided (or other) data sets with labels to repeat the above. Feel free to try and do any testing or plotting that you find important. This is not an assignment to get the correct answer. Rather at this stage, we practise to use functionality from SciKit-learn to search for structure in the data that helps to achieve the best predictions possible.

```
from numpy import mgrid, linspace, arange, mean, array
from numpy.random import uniform, seed

from matplotlib.ticker import LinearLocator, FormatStrFormatter
from mpl_toolkits import mplot3d
from matplotlib.pyplot import subplots, axes, scatter, xticks, show
```



```

def make_torus_3D(n_samples=100, shuffle=True, noise=None, random_state=None,
                  factor=.8):
    """Make a large torus containing a smaller torus in 3d.

    A toy dataset to visualize clustering and classification
    algorithms.

    Read more in the :ref:`User Guide <sample_generators>`.

    Parameters
    -----
    n_samples : int, optional (default=100)
        The total number of points generated. If odd, the inner circle will
        have one point more than the outer circle.

    shuffle : bool, optional (default=True)
        Whether to shuffle the samples.

    noise : double or None (default=None)
        Standard deviation of Gaussian noise added to the data.

    random_state : int, RandomState instance or None (default)
        Determines random number generation for dataset shuffling and noise.
        Pass an int for reproducible output across multiple function calls.
        See :term:`Glossary <random_state>`.

    factor : 0 < double < 1 (default=.8)
        Scale factor between inner and outer circle.

    Returns
    -----
    X : array of shape [n_samples, 2]
        The generated samples.

    y : array of shape [n_samples]
        The integer labels (0 or 1) for class membership of each sample.
    """
    from numpy import pi, linspace, cos, sin, append, ones, zeros, hstack, vstack, intp
    from sklearn.utils import check_random_state, shuffle

    if factor >= 1 or factor < 0:
        raise ValueError("'factor' has to be between 0 and 1.")

    n_samples_out = n_samples // 2
    n_samples_in = n_samples - n_samples_out

    co, ao, ci, ai = 3, 1, 3.6, 0.2
    generator = check_random_state(random_state)
    # to not have the first point = last point, we set endpoint=False
    linspace_out = linspace(0, 2 * pi, n_samples_out, endpoint=False)
    linspace_in = linspace(0, 2 * pi, n_samples_in, endpoint=False)
    outer_circ_x = (co+ao*cos(linspace_out)) * cos(linspace_out*61.1)
    outer_circ_y = (co+ao*cos(linspace_out)) * sin(linspace_out*61.1)
    outer_circ_z = ao*sin(linspace_out)

    inner_circ_x = (ci+ai*cos(linspace_in)) * cos(linspace_in*61.1) * factor
    inner_circ_y = (ci+ai*cos(linspace_in)) * sin(linspace_in*61.1) * factor
    inner_circ_z = ai*sin(linspace_in) * factor

```

```

X = vstack([append(outer_circ_x, inner_circ_x),
            append(outer_circ_y, inner_circ_y),
            append(outer_circ_z, inner_circ_z)]).T

y = hstack([zeros(n_samples_out, dtype=intp),
            ones(n_samples_in, dtype=intp)])

if shuffle:
    X, y = shuffle(X, y, random_state=generator)

if noise is not None:
    X += generator.normal(scale=noise, size=X.shape)

return X, y

```

PYTHON < >

```

from sklearn.ensemble import RandomForestClassifier, ExtraTreesClassifier, GradientBoostingClassifier, /
from sklearn.tree import DecisionTreeClassifier
from sklearn.svm import SVC, LinearSVC
from sklearn.neural_network import MLPClassifier
from sklearn.neighbors import KNeighborsClassifier
from sklearn.model_selection import train_test_split
from sklearn.model_selection import StratifiedShuffleSplit
from sklearn.metrics import roc_curve, roc_auc_score

RANDOM_STATE = 123

classifiers = {
    'Random Forest': RandomForestClassifier(random_state=RANDOM_STATE),
    'AdaBoost (Random Forest)': AdaBoostClassifier(RandomForestClassifier(random_state=RANDOM_STATE)),
    'Extra Trees': ExtraTreesClassifier(random_state=RANDOM_STATE),
    'AdaBoost (Extra Tree)': AdaBoostClassifier(ExtraTreesClassifier(random_state=RANDOM_STATE)),
    'Decision Tree': DecisionTreeClassifier(random_state=RANDOM_STATE),
    'SVC (RBF)': SVC(random_state=RANDOM_STATE),
    'SVC (Linear)': LinearSVC(random_state=RANDOM_STATE),
    'Multi-layer Perceptron': MLPClassifier(max_iter=5000, random_state=RANDOM_STATE)
}

```

## Q1 and Q2

PYTHON < >

```
seed(RANDOM_STATE)

X, y = make_torus_3D(n_samples=2000, factor=.5, noise=.3, random_state=RANDOM_STATE)

feature_1, feature_2, feature_3 = 0, 1, 2

fig, ax = subplots(figsize=(12, 9))
ax.set_visible(False)


ax = axes(projection="3d")

im = ax.scatter3D(X[:, feature_1], X[:, feature_2], X[:, feature_3],
                  marker='o', s=20, c=y, cmap='bwr');

ax.set_xlabel('Feature A')
ax.set_ylabel('Feature B')
ax.set_zlabel('Feature C')

ax.view_init(30, 50);

show()
```

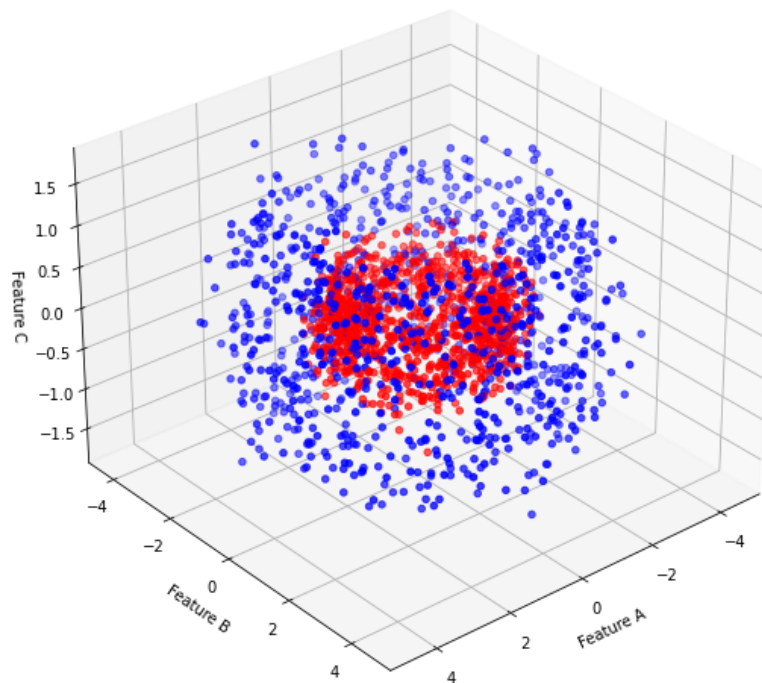

```

sss = StratifiedShuffleSplit(random_state=RANDOM_STATE, n_splits=10, test_size=0.3)

split_data_indices = sss.split(X=X, y=y)

score = list()

for train_index, test_index in sss.split(X, y):
    X_s, y_s = X[train_index, :], y[train_index]
    new_obs_s, y_test_s = X[test_index, :], y[test_index]

    score_clf = list()

    for name, clf in classifiers.items():

        clf.fit(X_s, y_s)
        y_pred = clf.predict(new_obs_s)
        score_clf.append(clf.score(new_obs_s, y_test_s))

    score.append(score_clf)

score_mean = mean(score, axis=0)

bins = arange(len(score_mean))

fig, ax = subplots()

ax.bar(bins, score_mean);


show()

print(classifiers.keys())
print('Average scores: ')
print(["{0:0.2f}".format(ind) for ind in score_mean])

```

▼ MLPClassifier

```
MLPClassifier(max_iter=5000, random_state=123)
```

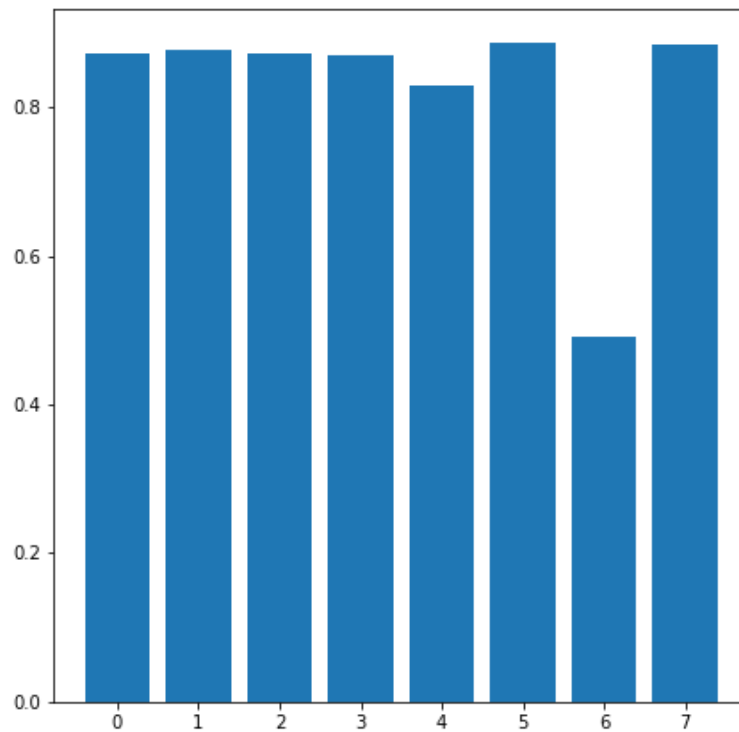

OUTPUT < >

```
dict_keys(['Random Forest', 'AdaBoost (Random Forest)', 'Extra Trees', 'AdaBoost (Extra Tree)', 'Decision Tree'])
Average scores:
['0.87', '0.88', '0.87', '0.87', '0.83', '0.89', '0.49', '0.88']
```

PYTHON < >

```
clf_RF = RandomForestClassifier(random_state=RANDOM_STATE)

clf_RF.fit(X_s, y_s)

y_pred = clf_RF.predict(new_obs_s)

score_RF = clf_RF.score(new_obs_s, y_test_s)

print('Random Forest score:', score_RF)
```

▼ RandomForestClassifier

```
RandomForestClassifier(random_state=123)
```

OUTPUT < >

```
Random Forest score: 0.88
```


## Q4

PYTHON &lt; &gt;

```
importances = clf_RF.feature_importances_  
  
template = 'Feature 1: {:.1f}%; Feature 2: {:.1f}%; Feature 3: {:.1f}%'  
  
print(template.format(importances[0]*100, importances[1]*100, importances[2]*100))  
  
bins = arange(importances.shape[0])  
  
fig, ax = subplots()  
  
ax.bar(bins, importances, color=('g', 'm', 'b'));  
ax.set_ylabel('Feature Importance', fontsize=16)  
  
xticks(bins, ('Feature 1', 'Feature 2', 'Feature 3'), fontsize=16);  
  
show()
```

OUTPUT &lt; &gt;

Feature 1: 31.4%; Feature 2: 33.9%; Feature 3: 34.7%

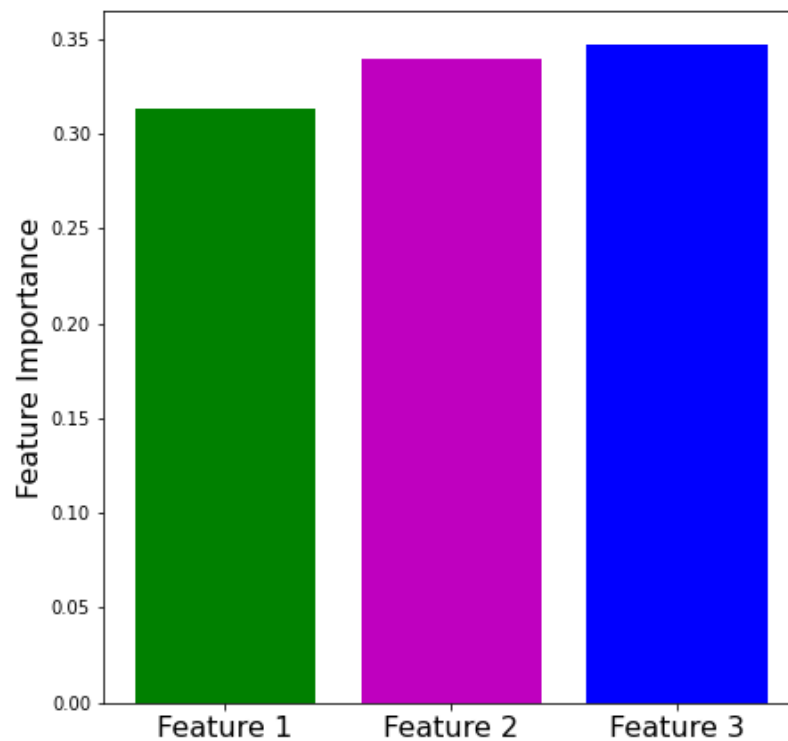

The three features contribute similarly to the outcome.

## Forum for Questions (Tutorial Video)

---

Any questions related to this lesson, code or assignment can be posted at our [forum](#) on GitHub.

### NOTE

The forum can only be accessed via your GitHub account once you have accepted the invitation to be included in the team.

### KEYPOINTS

- Different classification algorithms approach problems differently.
- `train_test_split` function tries to preserve the ratio of labels in the split
- Increasing the level of noise in the data makes the task more complicated.
- The potential bias due to splitting could be avoid using stratified shuffle split.
- `StratifiedShuffleSplit` is a method that uses `n_splits` and `test_size` parameters.