


Quick Start Guide for the Janrain Engage Sample Site

The latest version of the Janrain sample code can be obtained at the following URL.

<https://github.com/janrain/Janrain-Sample-Code>

Click the Downloads button at the top right.

You will get a full set of the samples. We are just interested in one folder from the resulting folders when you extract the zip or tar.gz

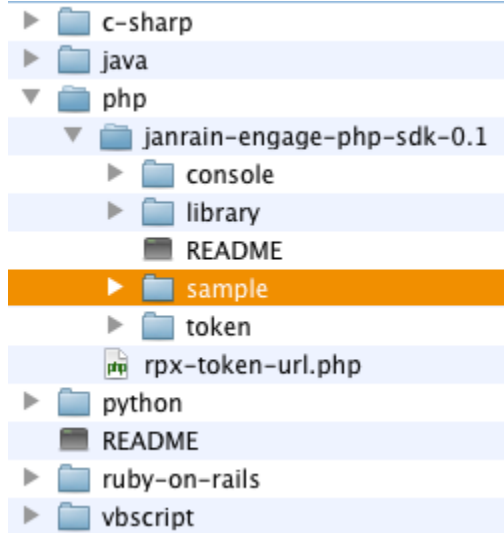

janrain-Janrain-Sample-Code
|_php
 |_janrain-engage-php-sdk-0.1
 |_sample

This folder should be placed or uploaded into a directory serving PHP5 with cURL-SSL and SQLite3. The demo will work with limited results without SQLite3.

Once you have the folder in a PHP5 served location you will need to edit the conf.php file (shown on the right) found inside the folder.

All three variables you need to enter in here are found on your Engage dashboard (rpxnow.com). Look at the bottom right of the dashboard home for your application. (see below)

```
<?php
ob_start();
/**
 * Copyright 2011
 * Janrain Inc.
 * All rights reserved.
 */
/**
 * These are available on your Engage
 * dashboard on rpxnow.com
 */
$application_domain = '';
$app_id = '';
$api_key = '';
/**
 * Set $engage_pro to false for this demo.
 */
$engage_pro = false;
ob_end_clean();
?>
```

Application Info

Application Domain

App ID

API Key (Secret)

Just copy and paste these variables.

If you have SQLite3 you will need the sample folder to be writable by the web-server.