-- Retrieve the total number of orders placed.

MySQL Workbench

Local instance MySQL80

File Edit View Query Database Server Tools Scripting Help

Navigator

SCHEMAS

Filter objects

- pizzahut
  - Tables
    - order_details
    - orders
    - pizza_types
    - pizzas
  - Views
  - Stored Procedures

Administration Schemas

Information

No object selected

SSL* SQL File 3* SQL File 4* SQL File 5* SQL File 6* SQ

Limit to 1000 rows

```
1   --  Retrieve the total number of orders placed.
2
3   select count(order_id) as total_orders FROM orders;
```

Result Grid Filter Rows: Export: Wrap Cell Conten

total_orders
21350



-- Calculate the total revenue generated from pizza sales.

```sql
-- Calculate the total revenue generated from pizza sales.

SELECT
    ROUND(SUM(order_details.quantity * pizzas.price),
            2) AS total_sales
FROM
    order_details
        JOIN
    pizzas ON pizzas.pizza_id = order_details.pizza_id;
```

Result Grid

	total_sales
▶	817860.05



-- Identify the highest-priced pizza.



```sql
-- Identify the highest-priced pizza.

SHOW DATABASES;
USE pizzahut;
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

Result Grid | Filter Rows:

name	price
The Greek Pizza	35.95

-- Identify the most common pizza size ordered.



```sql
-- Identify the most common pizza size ordered

USE pizzahut;

SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    pizzas
        JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

Result Grid | Filter Rows:

size	order_count
L	18526
M	15385
S	14137
XL	544
XXL	28

-- List the top 5 most ordered pizza types
-- along with their quantities.



```sql
-- List the top 5 most ordered pizza types
-- along with their quantities.

USE pizzahut;

SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
```

Result Grid | Filter Rows:

name	quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

-- Join the necessary tables to find the
-- total quantity of each pizza category ordered.




```sql
USE pizzahut;
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```

Result Grid | Filter

category	quantity
Classic	14888
Supreme	11987
Veggie	11649
Chicken	11050

-- Determine the distribution of the orders by hour of the day

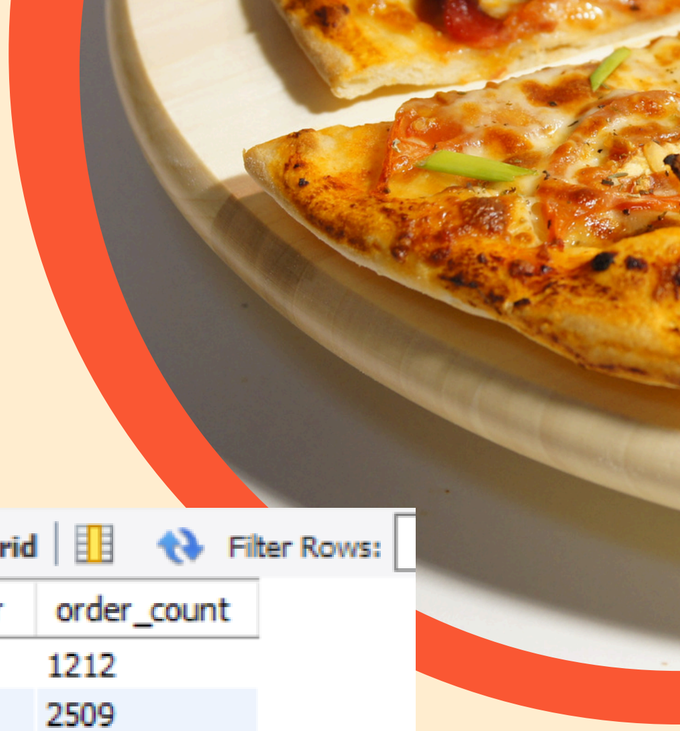

```sql
-- Determine the distribution of the orders by hour of the day

SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time);
```

Result Grid | Filter Rows:

hour	order_count
11	1212
12	2509
13	2455
14	1502
15	1445
16	1893
17	2390
18	2385
19	2054
20	1632
21	1162
22	671
23	30
10	9
9	1

-- Joint relevant tables to find the
-- category-wise distribution of pizzas,



```sql
-- Joint relevant tables to find the
-- category-wise distribution of pizzas,

USE pizzahut;

SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS total_pizzas_ordered
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizza_types.category
ORDER BY total_pizzas_ordered DESC;
```

Result Grid | Filter Rows:

category	total_pizzas_ordered
Classic	14888
Supreme	11987
Veggie	11649
Chicken	11050

-- Group the orders by date and calculate the average
-- number of pizzas ordered per day.



```sql
-- Group the orders by date and calculate the average
-- number of pizzas ordered per day.

USE pizzahut;

SELECT
    ROUND(AVG(daily_quantity), 0) AS avg_pizzas_per_day
FROM (
    SELECT
        orders.order_date,
        SUM(order_details.quantity) AS daily_quantity
    FROM orders
    JOIN order_details
        ON orders.order_id = order_details.order_id
    GROUP BY orders.order_date
) AS order_quantity;
```

avg_pizzas_per_day
138

-- Determine the top 3 most ordered pizza types based on revenue



```sql
-- Determine the top 3 most ordered pizza types based on revenue

USE pizzahut;

SELECT
    pizza_types.name,
    SUM(order_details.quantity * pizzas.price) AS revenue
FROM pizza_types
JOIN pizzas
    ON pizzas.pizza_type_id = pizza_types.pizza_type_id
JOIN order_details
    ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

-- Calculate the percentage contribution of each
-- pizza type to total revenue



```sql
-- Calculate the percentage contribution of each
-- pizza type to total revenue


USE pizzahut;

SELECT
    pizza_types.category,
    ROUND(
        SUM(order_details.quantity * pizzas.price) /
        (SELECT SUM(od.quantity * p.price)
         FROM order_details od
         JOIN pizzas p ON p.pizza_id = od.pizza_id) * 100,
        2
    ) AS revenue_percentage
FROM pizza_types
JOIN pizzas
    ON pizza_types.pizza_type_id = pizzas.pizza_type_id
JOIN order_details
    ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue_percentage DESC;
```

Result Grid | Filter Rows:

category	revenue_percentage
Classic	26.91
Supreme	25.46
Chicken	23.96
Veggie	23.68

-- Analyze the cumulative revenue generated over time.

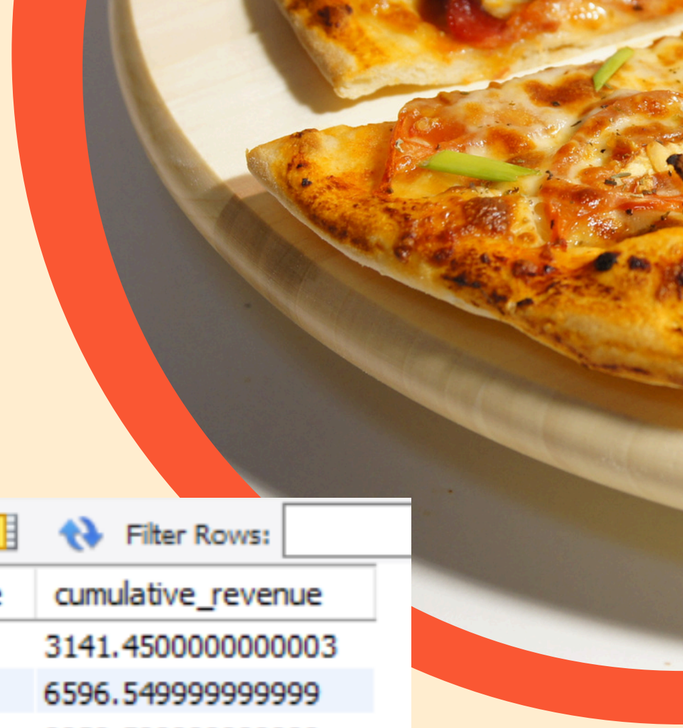

```sql
-- Analyze the cumulative revenue generated over time.


USE pizzahut;

SELECT
    order_date,
    SUM(revenue) OVER (ORDER BY order_date) AS cumulative_revenue
FROM (
    SELECT
        orders.order_date,
        SUM(order_details.quantity * pizzas.price) AS revenue
    FROM orders
    JOIN order_details
        ON orders.order_id = order_details.order_id
    JOIN pizzas
        ON order_details.pizza_id = pizzas.pizza_id
    GROUP BY orders.order_date
) AS sales;
```

Result Grid | Filter Rows:

order_date	cumulative_revenue
2015-01-01	3141.4500000000003
2015-01-02	6596.549999999999
2015-01-03	9939.599999999999
2015-01-04	11951.3
2015-01-05	14453.25
2015-01-06	17160.4
2015-01-07	19698.75
2015-01-08	22647.1
2015-01-09	25449.899999999998
2015-01-10	28601.499999999996
2015-01-11	30981.149999999998
2015-01-12	33605.1
2015-01-13	36421.85
2015-01-14	39183
2015-01-15	41523.3
2015-01-16	44331.4

-- Determine the top 3 pizza most ordered pizza types
-- based on revenue for each pizza category

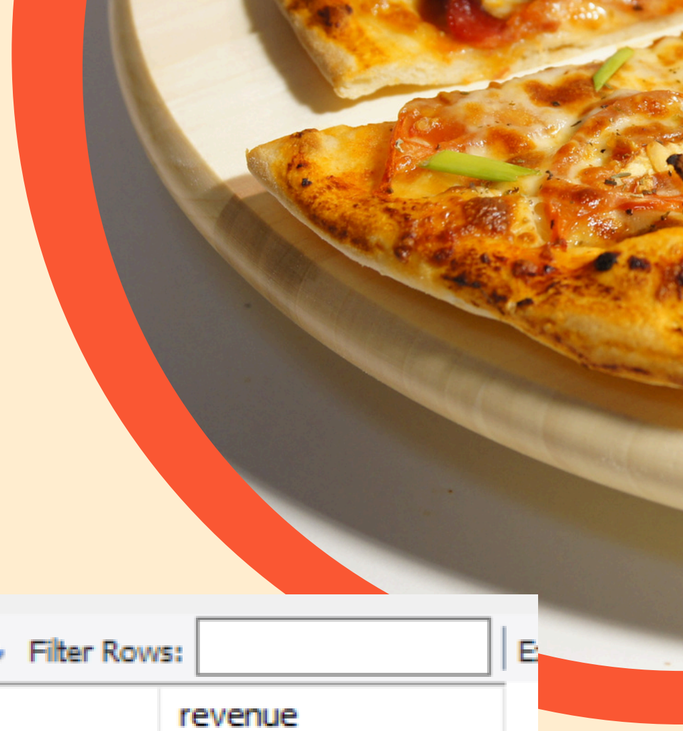

```sql
-- Determine the top 3 pizza most ordered pizza types
-- based on revenue for each pizza category

USE pizzahut;

SELECT name, revenue
FROM (
    SELECT category, name, revenue,
    RANK() OVER(PARTITION BY category ORDER BY revenue DESC) AS rn
    FROM (
        SELECT pizza_types.category, pizza_types.name,
        SUM(order_details.quantity * pizzas.price) AS revenue
        FROM pizza_types
        JOIN pizzas ON pizza_types.pizza_type_id =
        pizzas.pizza_type_id
        JOIN order_details ON order_details.pizza_id = pizzas.pizza_id
        GROUP BY pizza_types.category, pizza_types.name
    ) AS a
) AS b
WHERE rn <= 3;
```

Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5
The Classic Deluxe Pizza	38180.5
The Hawaiian Pizza	32273.25
The Pepperoni Pizza	30161.75
The Spicy Italian Pizza	34831.25
The Italian Supreme Pizza	33476.75
The Sicilian Pizza	30940.5
The Four Cheese Pizza	32265.70000000065
The Mexicana Pizza	26780.75
The Five Cheese Pizza	26066.5


THANK YOU