


How To Setup an MFP for Remote-Only Server Access

- 1) Start by connecting to the printer by IP with a web browser.




- 2) Click on **Login** at the top right-hand corner of the window. Enter your credentials, then click the **Login** button.

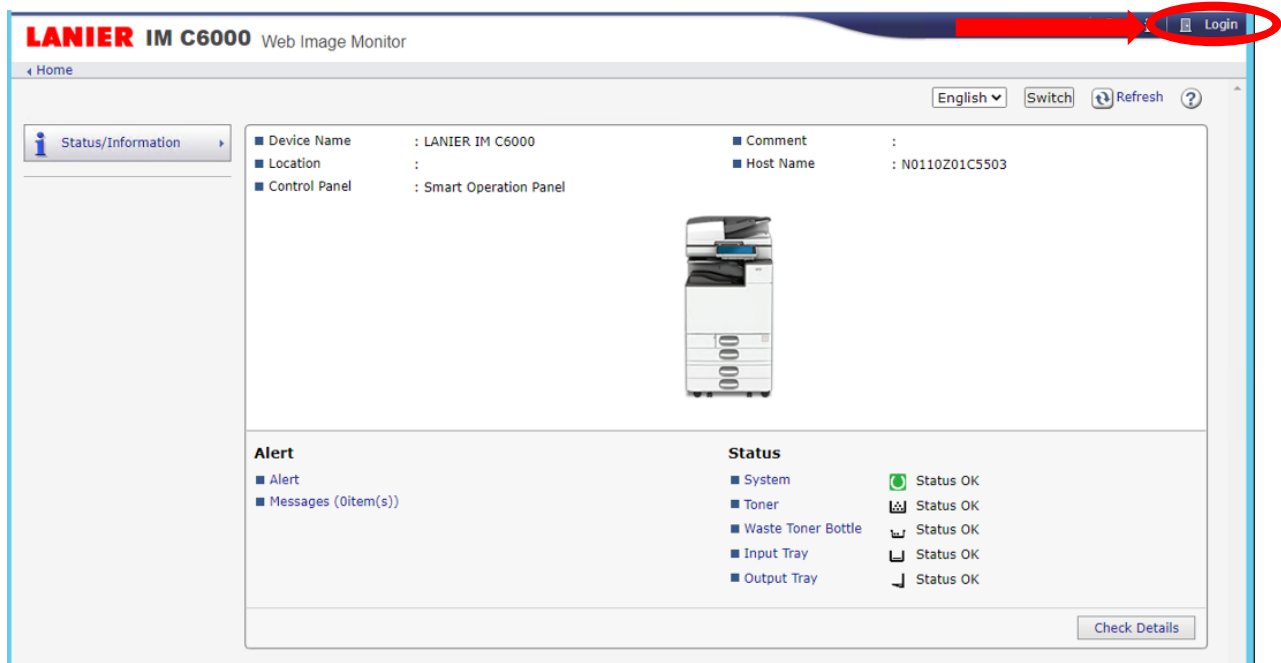


How To Setup an MFP for Remote-Only Server Access

- 3) Click on the **Device Management** button on the left-hand side of the home screen, then click on **Configuration**.

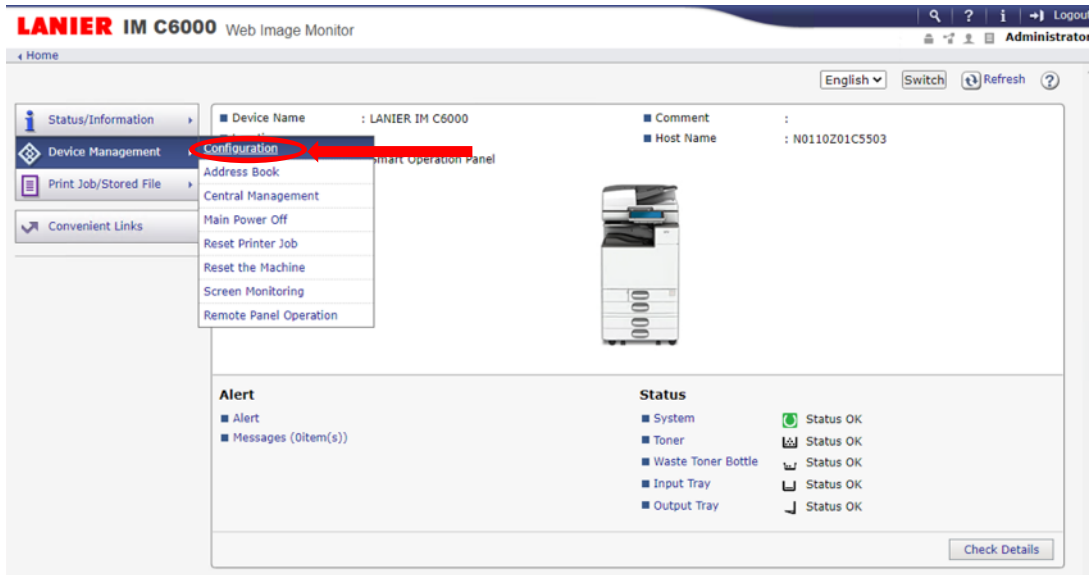

- 4) Under **Security** on the right-hand side of the lists, click on **Access Control**.

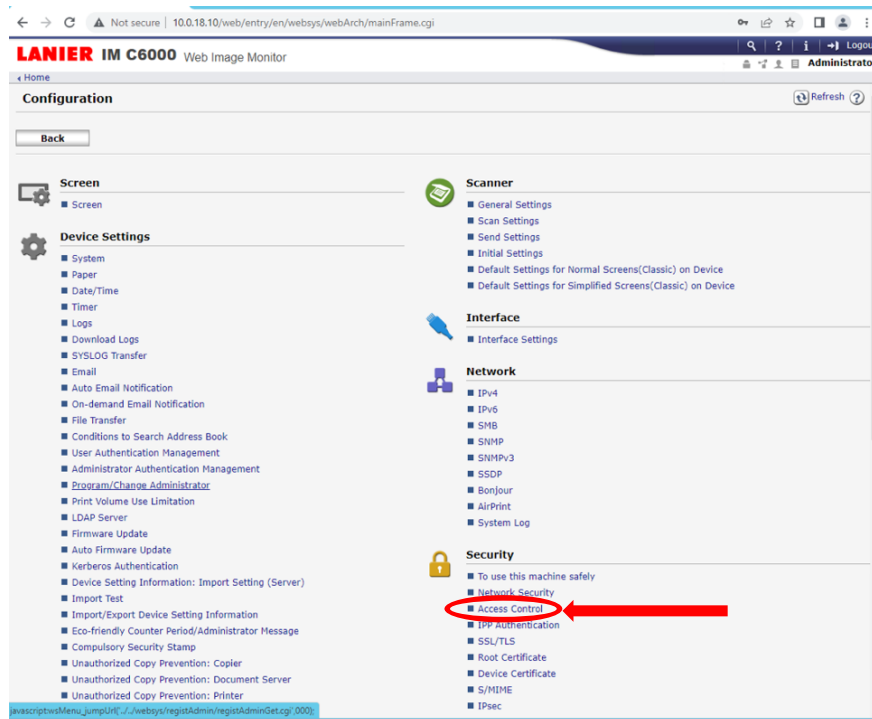

How To Setup an MFP for Remote-Only Server Access

5) Under the **IPv4** banner fill in the **Access Control Range 1** and **2** as follows:

Range 1 - **172.16.45.110** in both boxes.

Range 2 - **172.16.45.178** in both boxes.

← → ↻ ⚠ Not secure | 10.0.18.10/web/entry/en/websys/webArch/mainFrame.cgi

LANIER IM C6000 Web Image Monitor

Home

Access Control

OK Cancel

Access Control : ☒ Active ☐ Inactive

IPv4

Access Control Range 1 :	<input type="text" value="172.16.45.110"/>	-	<input type="text" value="172.16.45.110"/>
Access Control Range 2 :	<input type="text" value="172.16.45.178"/>	-	<input type="text" value="172.16.45.178"/>
Access Control Range 3 :	<input type="text" value="0.0.0.0"/>	-	<input type="text" value="0.0.0.0"/>
Access Control Range 4 :	<input type="text" value="0.0.0.0"/>	-	<input type="text" value="0.0.0.0"/>
Access Control Range 5 :	<input type="text" value="0.0.0.0"/>	-	<input type="text" value="0.0.0.0"/>

IPv6

Access Control Range 1 : ☒ Range -

☐ Mask Mask Length

Access Control Range 2 : ☒ Range -

6) Click **the Home** button to return to the home screen.

LANIER IM C6000 Web Image Monitor

Home

Access Control

OK Cancel


Access Control : ☒ Active ☐ Inactive

IPv4

Access Control Range 1 :	<input type="text" value="172.16.45.110"/>	-	<input type="text" value="172.16.45.110"/>
Access Control Range 2 :	<input type="text" value="172.16.45.178"/>	-	<input type="text" value="172.16.45.178"/>
Access Control Range 3 :	<input type="text" value="0.0.0.0"/>	-	<input type="text" value="0.0.0.0"/>

How To Setup an MFP for Remote-Only Server Access

- 7) Back at the home screen, click **Device Management** again, but this time choose **Reset the Machine**.

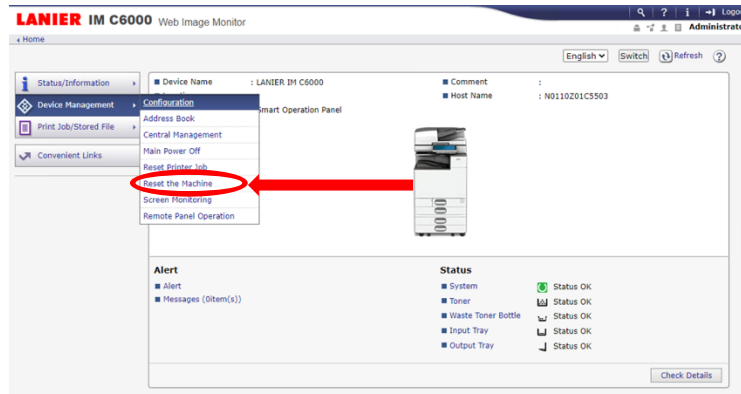

This will reboot the MFP, stopping any printing and logging you off. If you need to do any more work you will need to wait until the MFP resets and you login again. Also, after this you will only be able to access the printer from the Printer Server itself.