

array
 => int age;

int a; int a, b, c, d, e, f;

int b; int a, b, c, d, e, f, --- z, aa, ab;

int c;

int d;

int e;

Search @hmaracollege on telegram

array:

()

=> treated as an Object

=> Heap area


=> Students :-

int[] ar = new int[5];
 ^ ^


int ar[] = new int[5];

ar[0] = 10; ar[2] = 20;

S.o.p(ar[2]); 20;

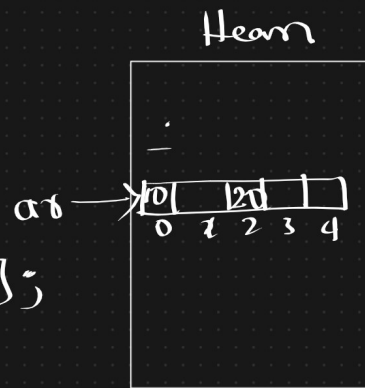


{
 int[] a = new int[5];
 a[0] = 10;
 a[1] = 20;
 a[2] = 30;
 a[3] = 40
 }
 ()
 int[] a = { 10, 20, 30, 40 };



5 student in 3 diff classrooms.

classes	students
0	=> 5
1	=> 5
2	=> 5

`int [][] ar = new int[3][5];`

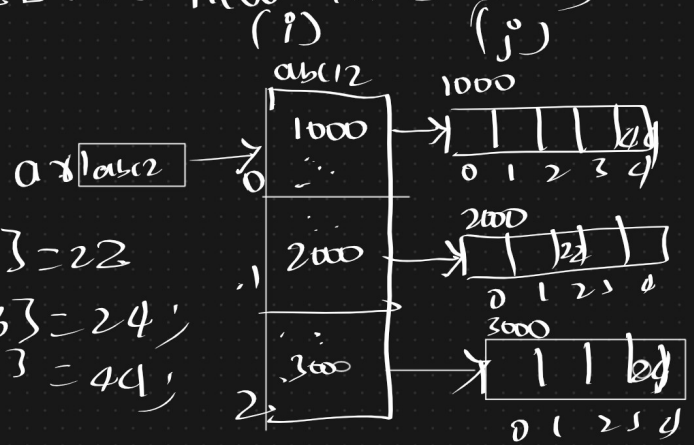

`ar[1][2] = 22;`

`ar[2][3] = 24;`

`ar[0][4] = 44;`

=> 2D Regular array

`ar.length` => 3

`ar[0].length` => 5

`ar[1].length` => 5

classes	Student
0	4
1	5
2	3

`int[] [] ar = new int[3][];`

`ar[0] = new int[4];`


`ar[1] = new int[5];`

`ar[2] = new int[3];`

`ar[0][2] = 100;`

`ar[2][3] = 10;`

2 Jagged array
`ar[i].length`

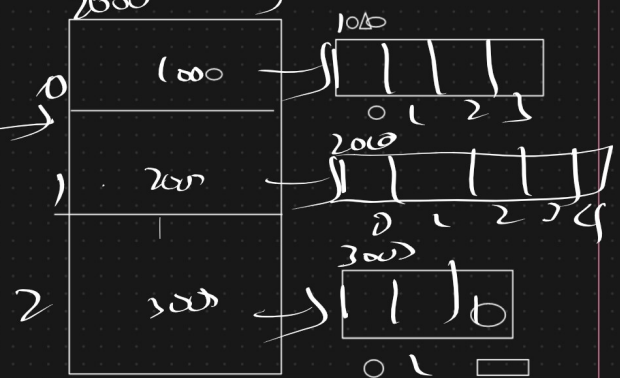

school	class	student
0	0	4
	1	4
	2	4
1	0	4
	1	4
	2	4

`int arr[3][3] = new int[2][3][4];`

4
4
4

school	class	student
0	0	4
	1	3
1	0	5
	1	3
	2	2

`int arr[3][3] = new int[2][3][3];`

`arr[0] = new int[2][3];`

`arr[1] = new int[3][3];`

`arr[0][0] = new int[4];`

`arr[0][1] = new int[3];`

`arr[1][0] = new int[5];`

`arr[1][1] = new int[3];`

`arr[1][2] = new int[2];`

3D jagged array

=>

`int arr;`

But this is not a problem

`arr[0] = 10`

`arr[1] = 20`

`arr[2] = 30`

`arr[3] = 40`

4 → 4

4 + 4 = 16




int arr = new int[3];

arr[0] = 10;

arr[1] = 20;

arr[2] = 30;

arr[3] = 40;

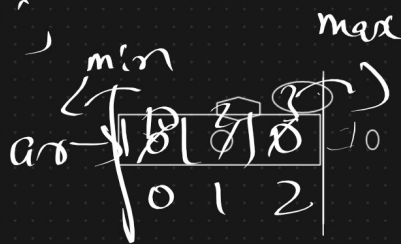


```
class Student
{
    String name;
    int age;
}


public class LaunchAR4 {

    public static void main(String[] args) {
        Student [] studentArray = new Student[3];

        studentArray[0] = new Student();
        studentArray[1] = new Student();
        studentArray[2] = new Student();
    }
}
```

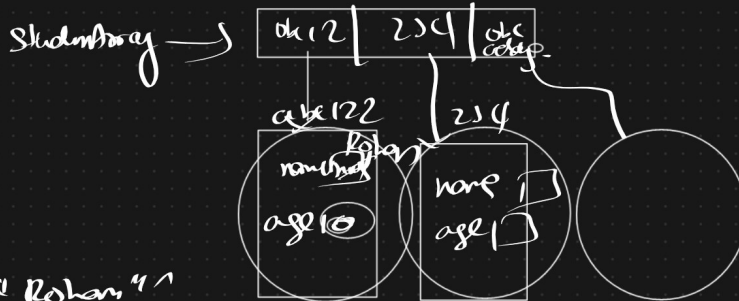

studentArray[0].name = "Rohan";



for (int a : arr)

10

4 x 3 = 12 bytes RAM

int arr[] = new int[3];



