

# Image Restoration Using Hopfield Networks

Hopfield networks excel at pattern storage and retrieval. They are effective in associative memory tasks. These networks are used in image restoration and signal processing. They handle noisy or incomplete input data.

**A** by ANUJ SHRESTHA



# Problem Background

## 1 Image Corruption

Images degrade due to noise, blurring, or missing data.

## 2 Traditional Methods

Struggle with complex or highly degraded images.

## 3 Hopfield Networks


Restore noisy images by minimizing an energy function.



# AI Solution: Energy Function

Hopfield Networks minimize an energy function. This function captures the difference between the corrupted image and the restored version.

The network adjusts pixel values until it reaches a stable state. This represents the closest match to the original image.

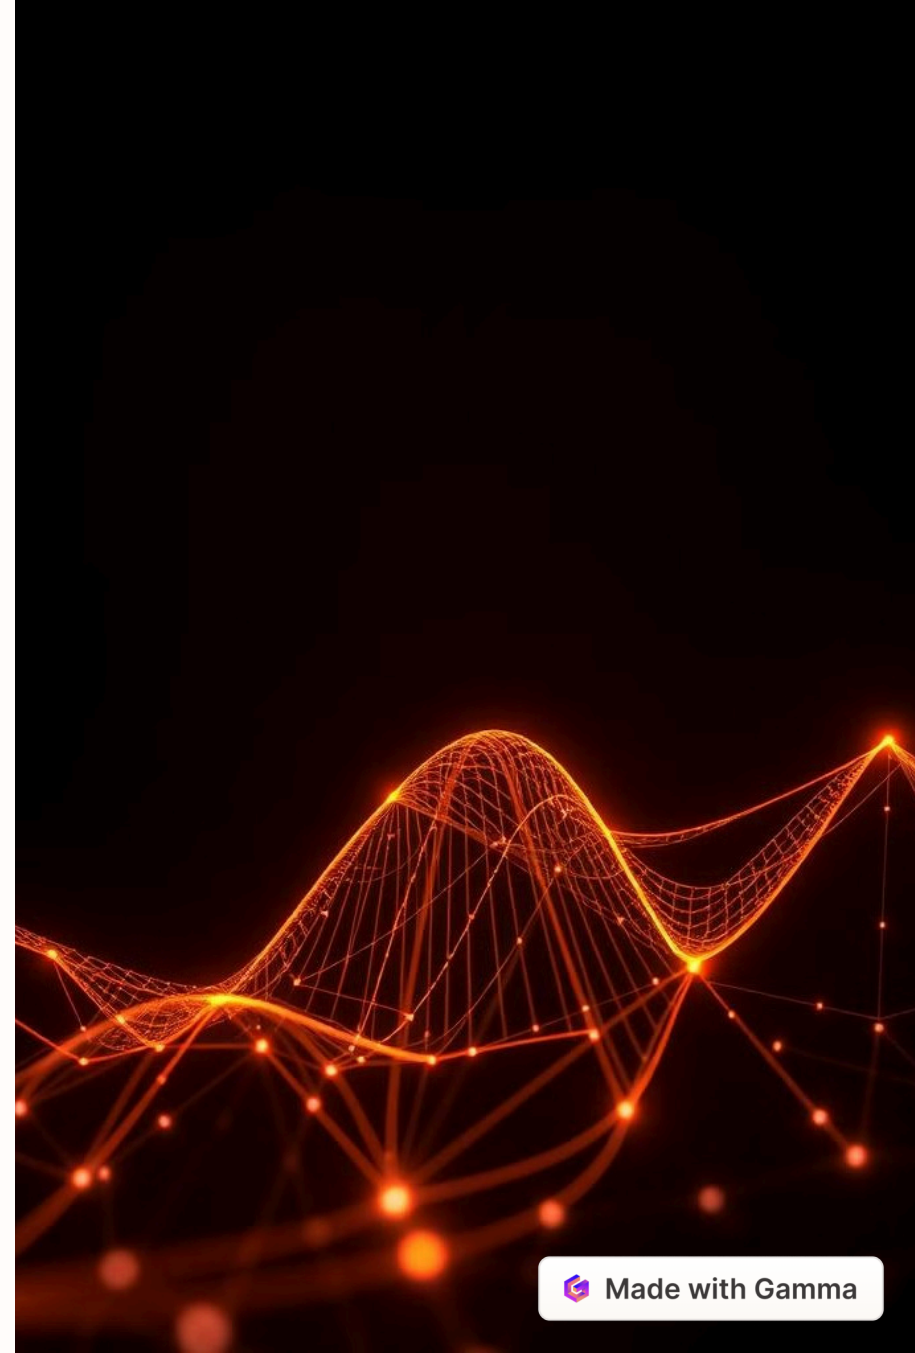



# Objectives

## Implement Restoration


Use Hopfield Networks to minimize energy and recover images.

## Explore Energy Function

Guide the network by capturing differences between images.

## Iterative Updates

Adjust pixel values until a stable state is reached.

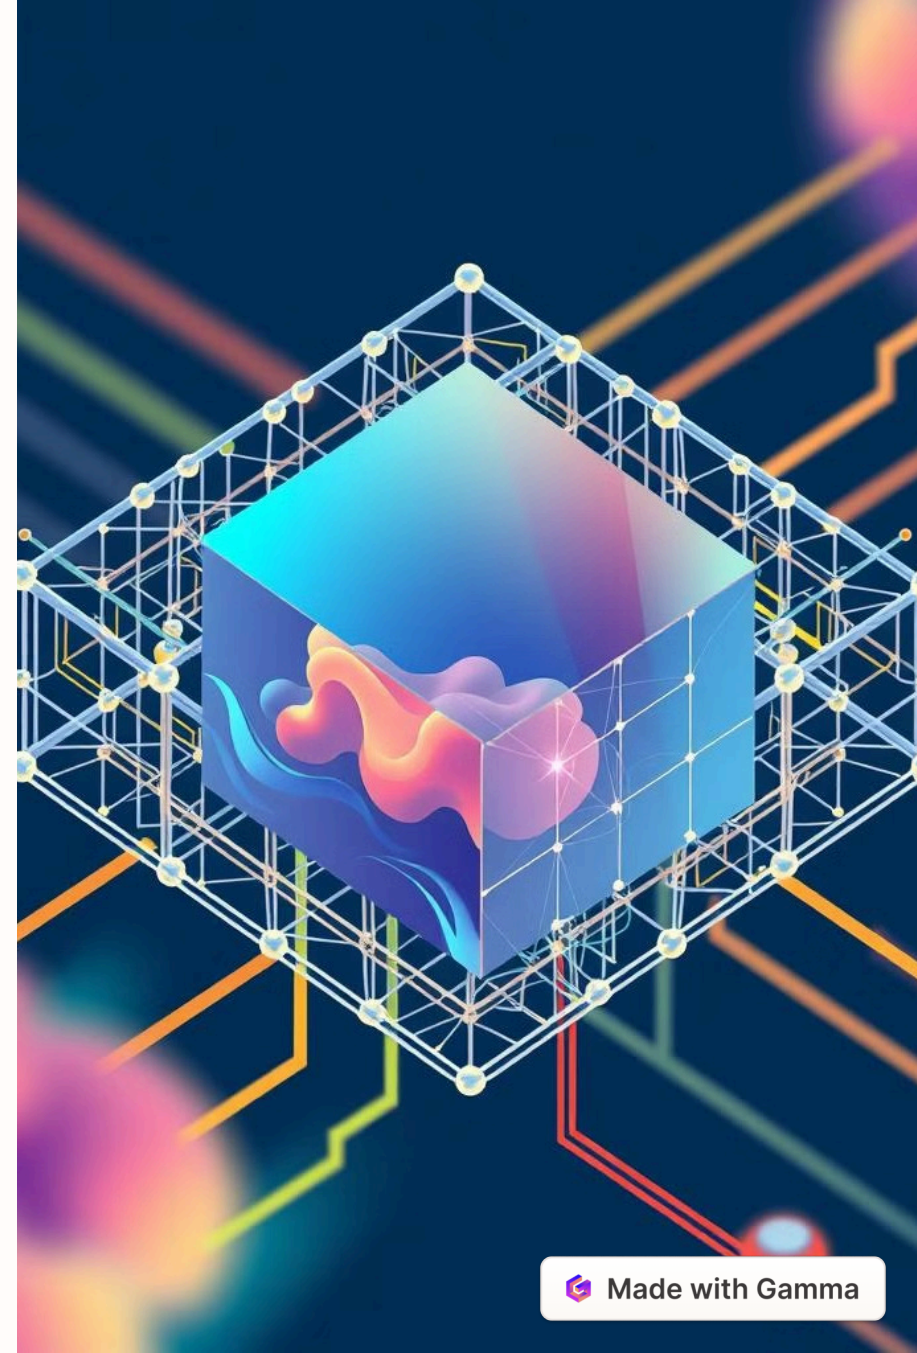

# Literature Review

## GANs

Generative Adversarial Networks improve image restoration.

## DNNs

Deep Neural Networks are effective for denoising and deblurring.

## VAEs

Variational Autoencoders use reference images for super-resolution.

# Image Restoration Algorithm



## Algorithm Pipeline

1

### Data Preprocessing

Prepare images for network input.

2

### Training

Train the Hopfield Network.

3

### Prediction

Restore corrupted images.

4

### Evaluation

Assess restoration quality.

# Experiment Results


## **Synchronous Update**

Restores images in one step with 100% accuracy.

## **Asynchronous Update**

Slower but more accurate at 99.99%.

# Energy Optimization

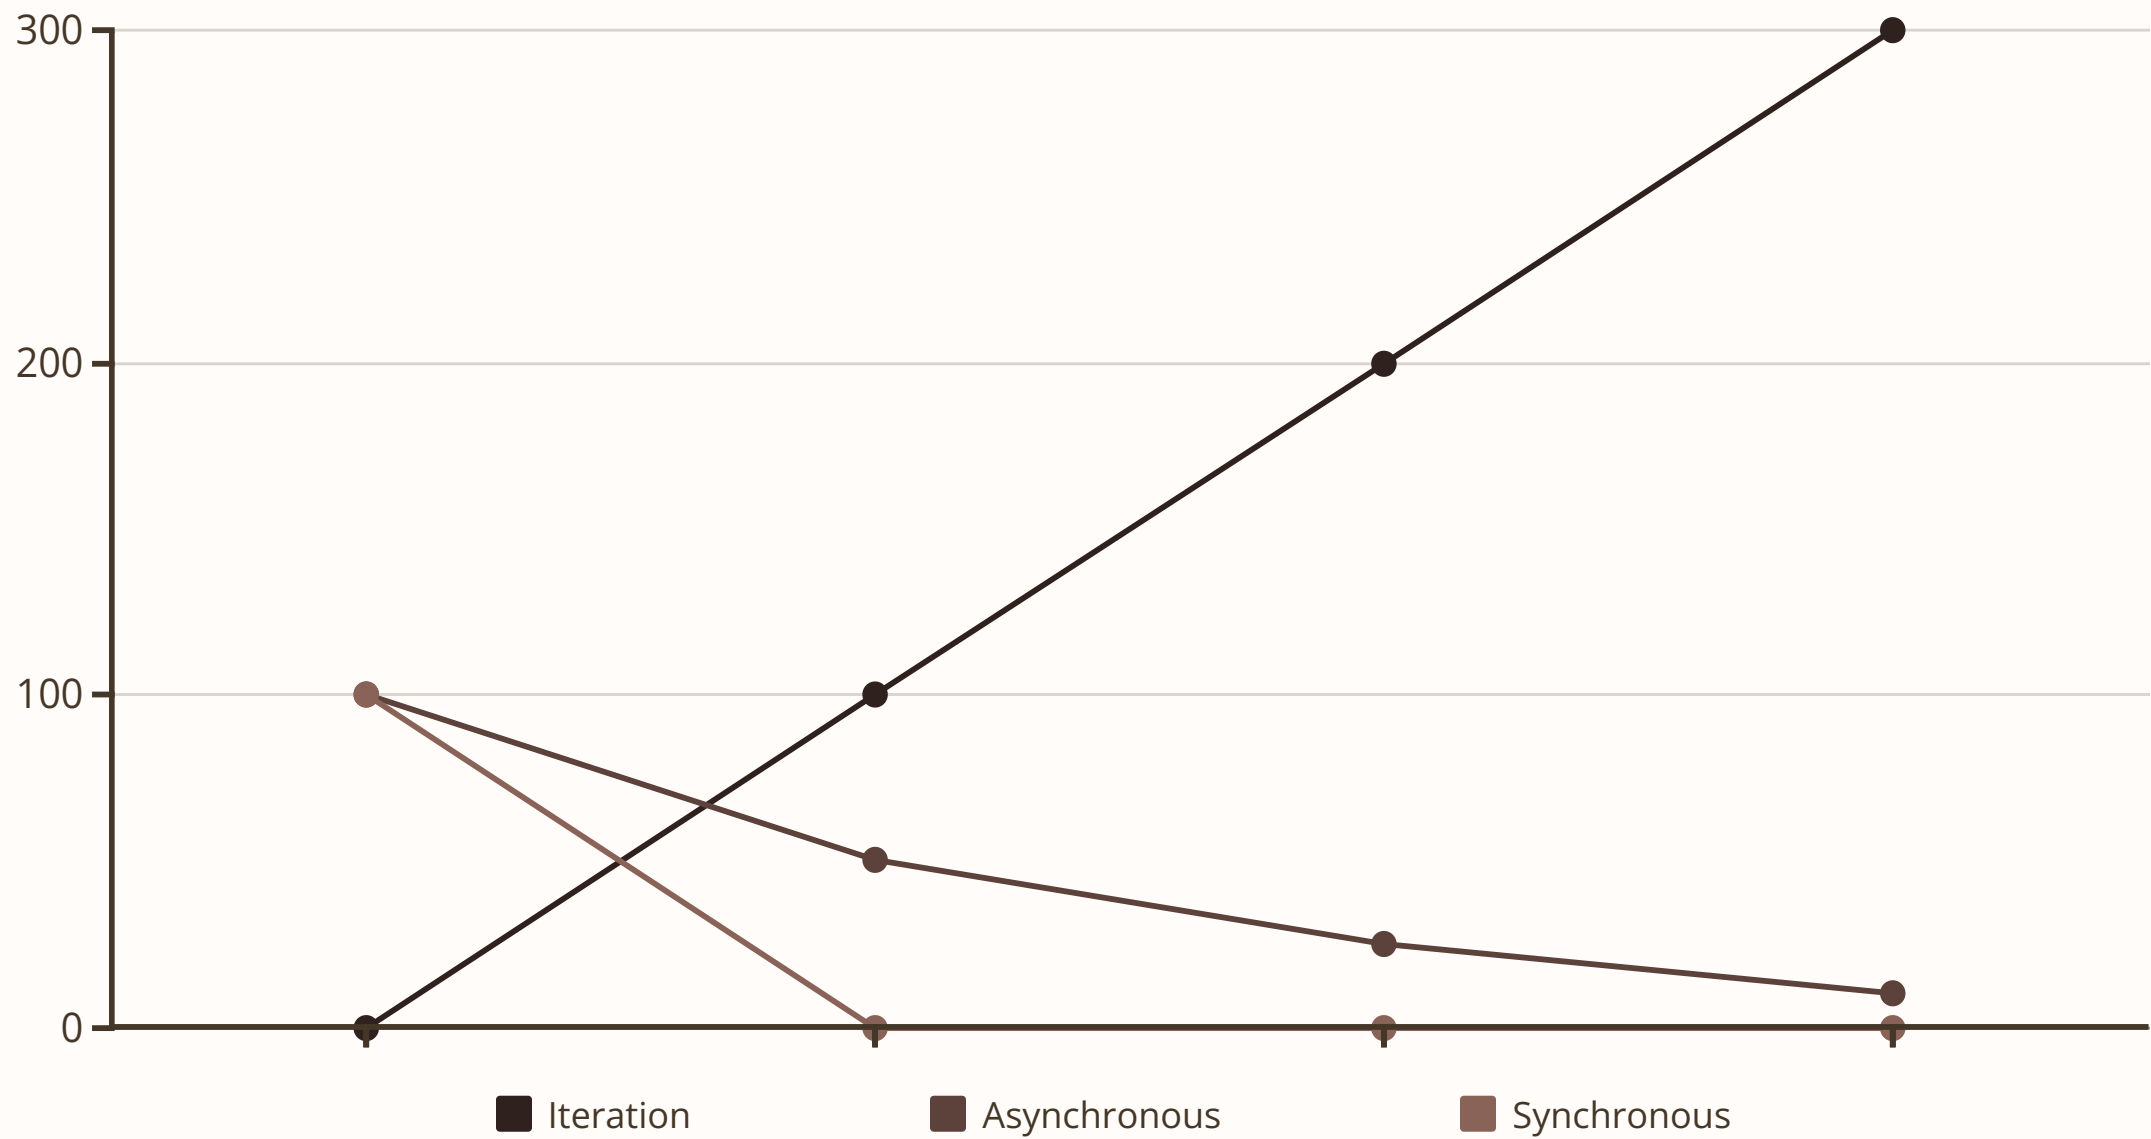


Energy curves show convergence behavior for both update strategies. Asynchronous updates show smoother minimization.




# Conclusion

Hopfield Networks effectively restore corrupted images. Synchronous updates are fast, while asynchronous updates are more accurate.

The network demonstrates robustness in noise reduction and pattern recovery.

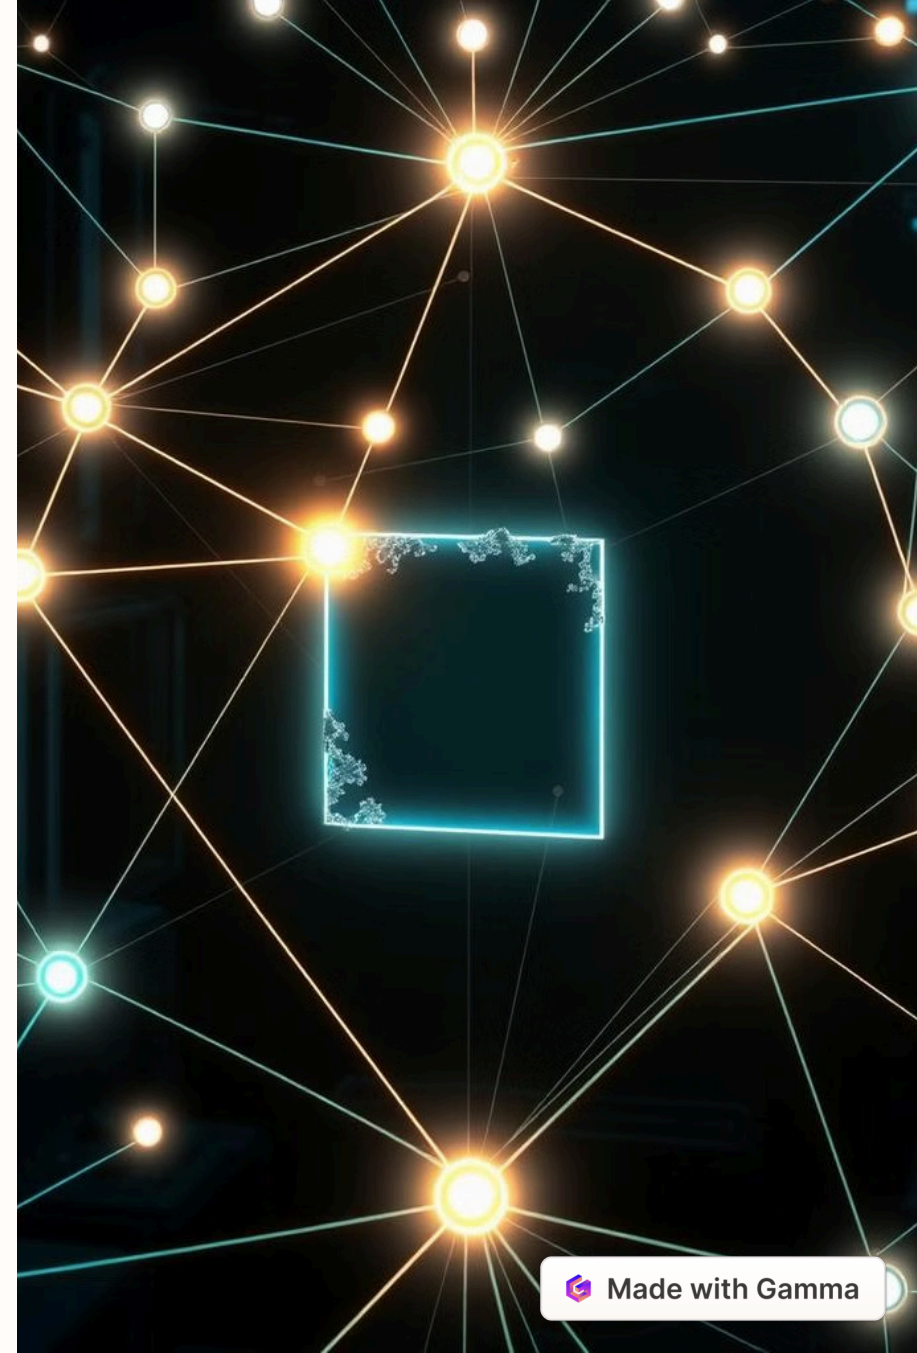

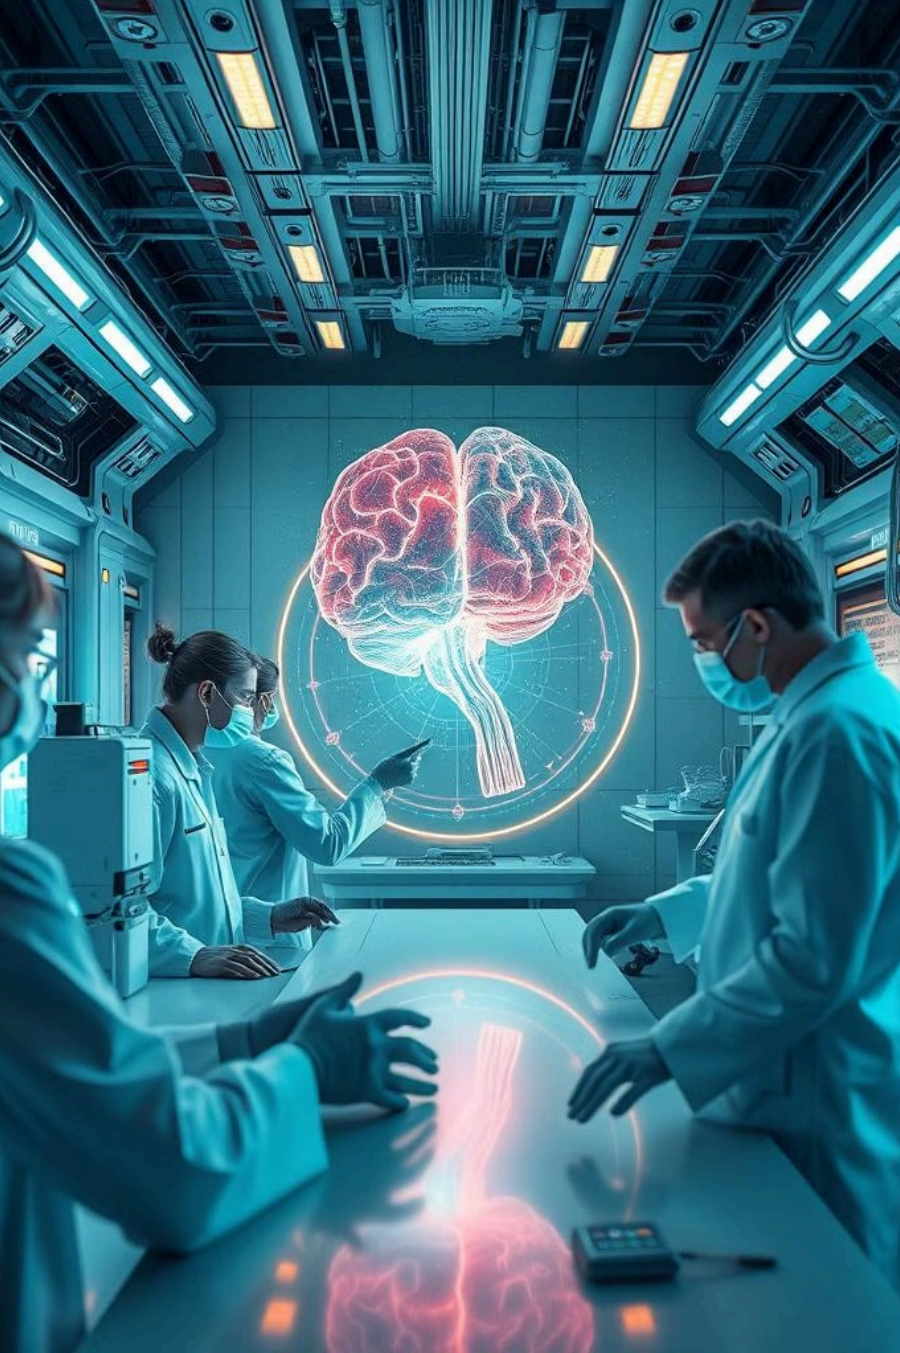

# Future Enhancements

1

## Improved Architecture

Explore deep learning models for better restoration.

2

## Optimization Algorithms

Improve convergence rate with simulated annealing.

3

## Hybrid Models

Combine Hopfield Networks with generative models.