

Installing the Lightware LW3 Gateway — picture guide

For anyone who would rather see it than read it. Takes about two minutes.

If you are comfortable with software installs, [INSTALL.md](#) says the same thing in a quarter of the space.

Before you start

You need **Claude Desktop** installed, and you need to be **on the same network as the Lightware device** — the office network or a wired connection, not a guest network. If you are connected to a VPN, disconnect it first. The gateway finds devices by broadcasting on the local network, and a VPN sends that broadcast to the wrong place.

Step 1 — Download the file

Click here:


<https://github.com/tothandrastata/lw3-mcp/releases/latest/download/lw3-mcp.mcpb>

Your browser saves **lw3-mcp.mcpb** to your Downloads folder.


If your browser warns you about the file, that is expected. It is an unfamiliar file type, not a dangerous one. Choose *Keep* or *Download anyway*.

Step 2 — Open Claude Desktop's settings

Open Claude Desktop. Click the **gear icon** to open Settings.

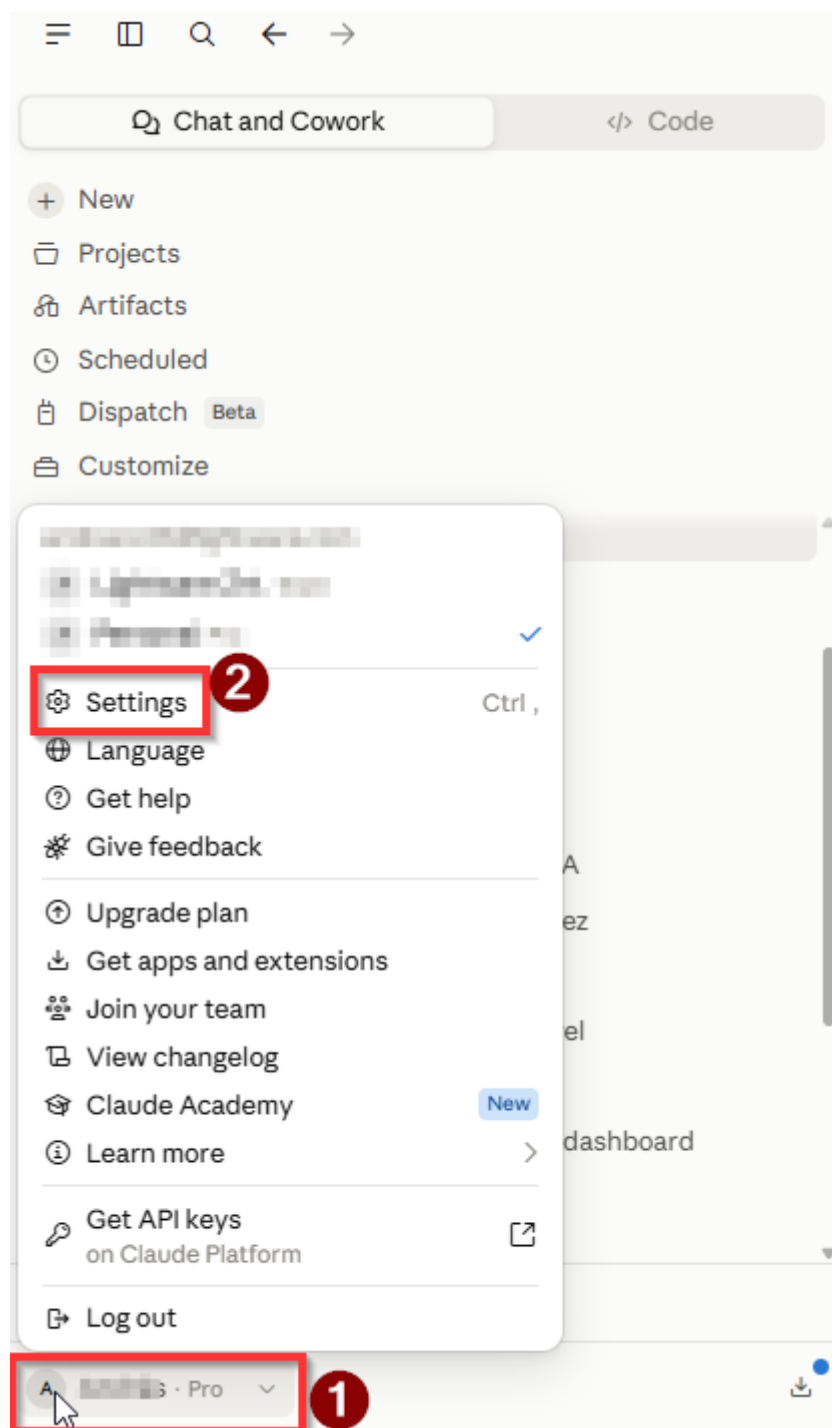


In the Settings window, choose **Extensions** from the list on the left.

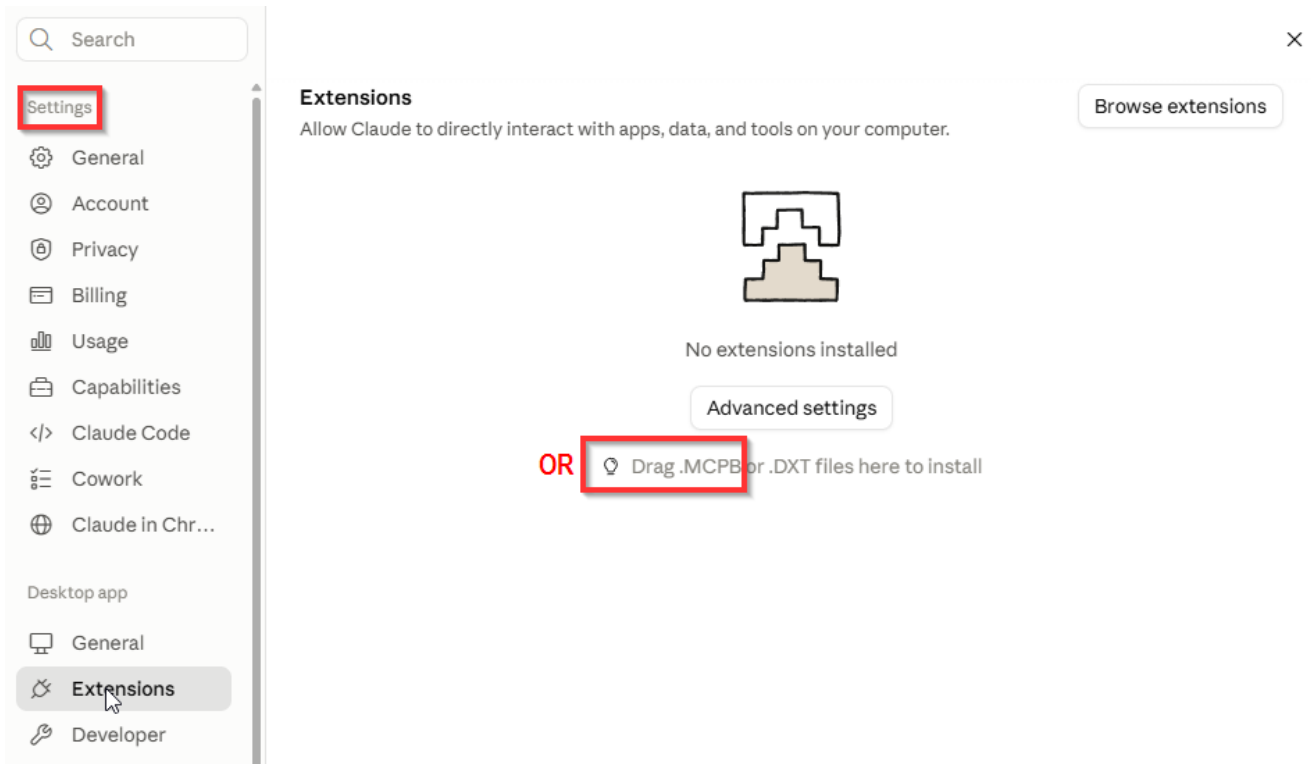

Step 3 — Drag the file in


Open your Downloads folder next to the Claude Desktop window. Drag `lw3-mcp.mcpb` out of Downloads and drop it onto the Extensions page.

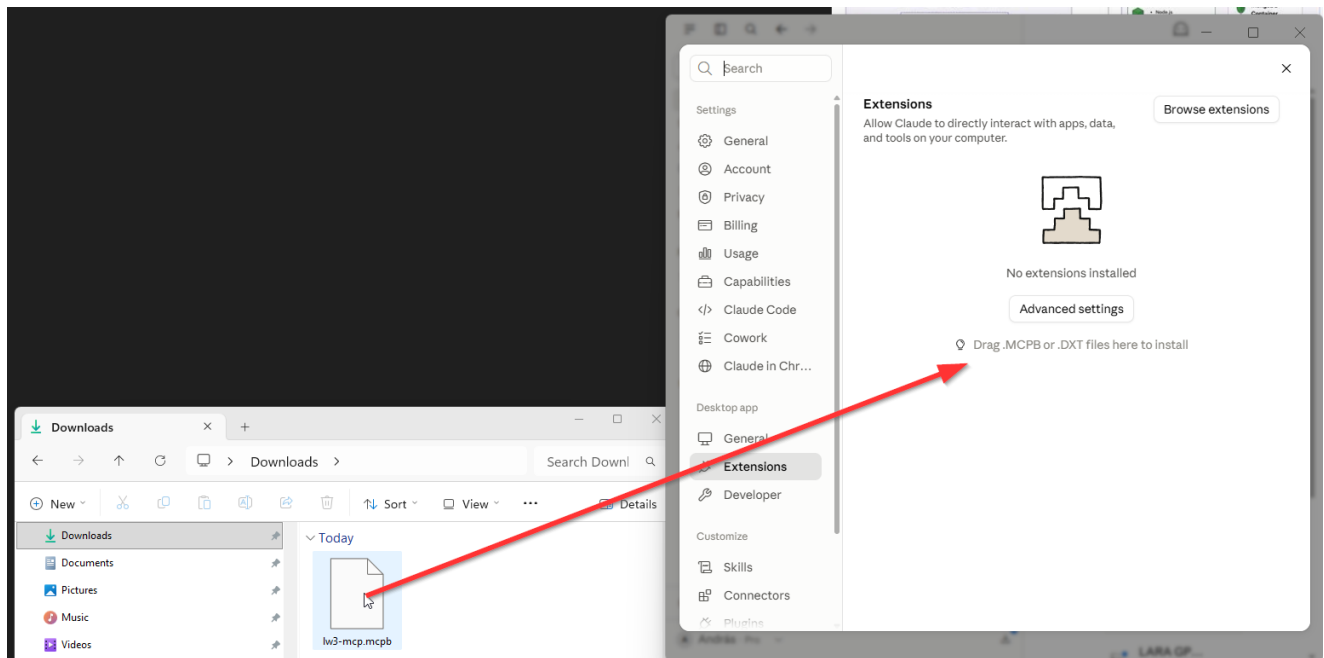

If nothing happens when you drop it, look on the Extensions page for a button that installs an extension from a file, and use that to pick `lw3-mcp.mcpb` from your Downloads folder instead.

Step 4 — Configure permissions

You can avoid allowance of each tool (GET / SET / CALL / ...) separately by allowing all:

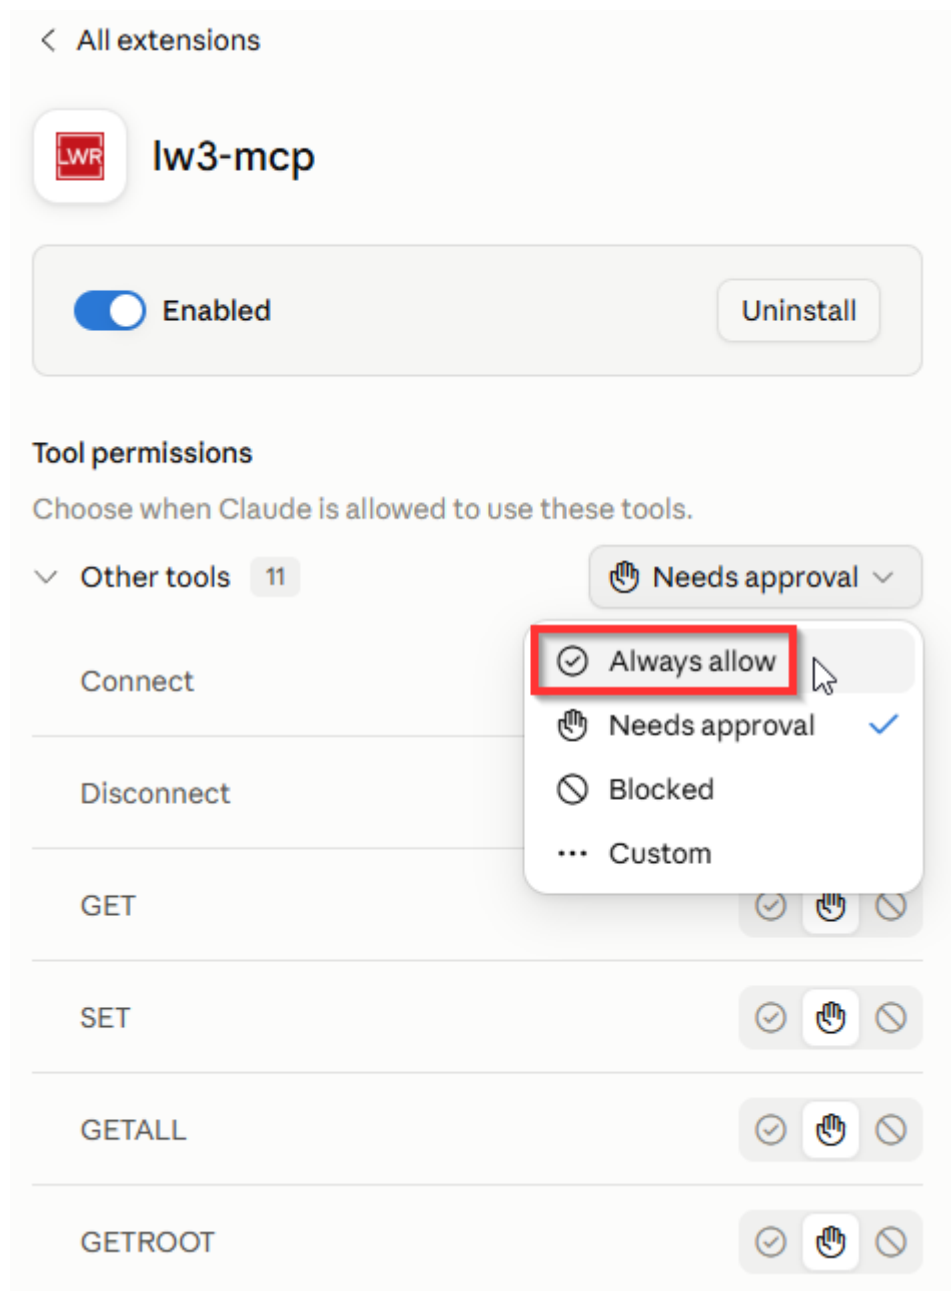

Step 5 — Try it

Start a new chat and type:

Discover Lightware devices on the network

Claude replies with the devices it found — model name, serial number, and IP address for each one.

Find Lightware devices

Loaded tools, used Lightware LW3 Gateway integration

I found one Lightware device on the local network:

- **Model:** UCX-4x2-HC30
- **Hostname:** jimmy-hc30.local
- **IP address:** 192.168.2.104
- **Serial number:** 00001234

Want me to connect to it and pull more details (firmware, port status, etc.)?

Then connect to one and ask for whatever you need:

Show me the status of the video inputs

Used Lightware LW3 Gateway integration

Here's the current status of all 5 video inputs on the UCX-4x2-HC30 (jimmy-hc30.local):

Input	Name	Cable Connected	Signal Present	Type	Resolution	Refresh
I1	USB-C in 1	No	No	—	—	—
I2	USB-C in 2	No	No	—	—	—
I3	HDMI in 3	Yes	No	—	—	—
I4	HDMI in 4	No	No	—	—	—
I5	Welcome Screen	Yes	Yes	DVI	1280×720	60 Hz

Only I5 is actively receiving a video signal. I3 has a cable connected but no active signal (source likely off or asleep); I1, I2, and I4 have nothing plugged in.

If something goes wrong

No devices found. You are probably on a VPN or a guest network. Disconnect the VPN and try again. If you know the device's IP address, you can skip discovery entirely — just say "*Connect to 192.168.2.109*" with the real address.

"Not connected to a device". Ask Claude to connect first. The connection closes when you quit Claude Desktop, so you reconnect each time you restart it.

It seems stuck when connecting. The address is probably wrong, or a firewall is blocking it. Double-check the IP address and that you are on the office network.

Anything else — send a screenshot to Andras Toth.

Getting a newer version

Extensions do not update themselves. When a new version is announced, use the same download link from Step 1 and drag the new file in the same way. It replaces what you have.

To see which version you are running, open Settings → Extensions and look at the number next to Lightware LW3 Gateway.