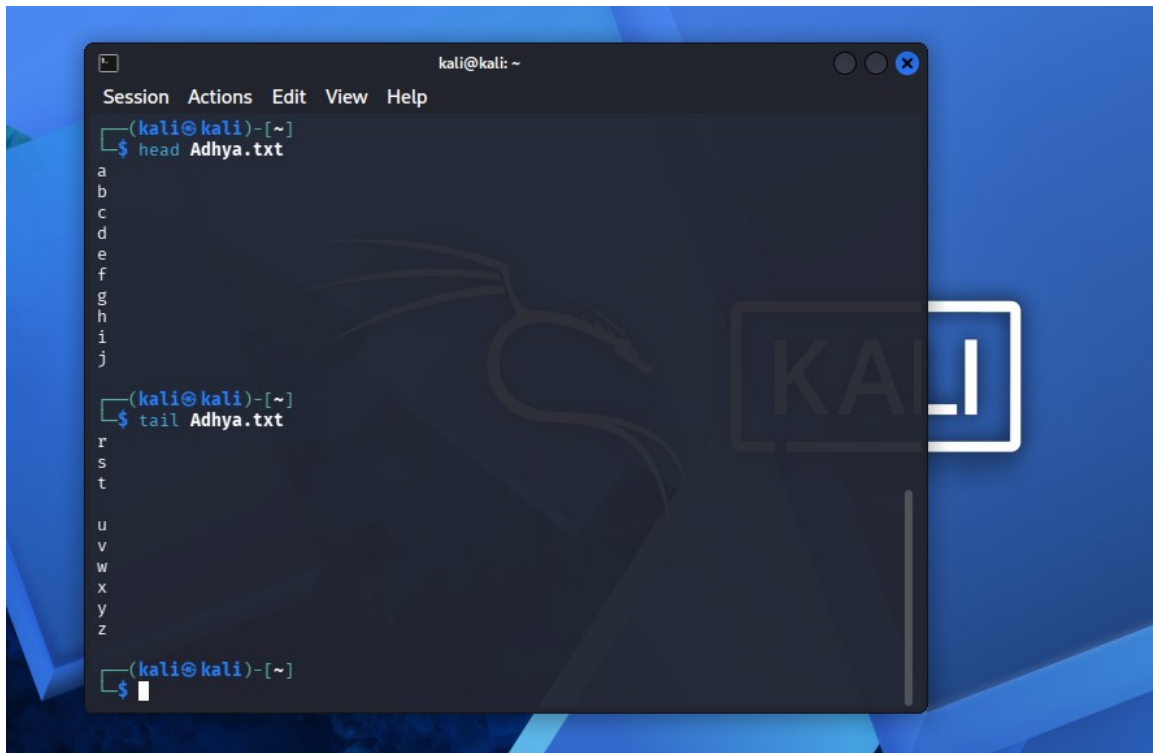


```
kali@kali: ~  
Session Actions Edit View Help  
$ tree  
.  
├── 1925L260002  
│   ├── 1925L260002.txt  
│   ├── abcd.txt  
│   ├── abc.txt  
│   ├── Adhya1.txt  
│   │   ├── abcd.txt  
│   │   └── tomato.txt  
│   ├── Adhya2.txt  
│   ├── Adhya.txt  
│   ├── alerts.log  
│   ├── beep.txt  
│   ├── cat.txt  
│   ├── Desktop  
│   ├── divya  
│   │   ├── b  
│   │   └── divyaa  
│   ├── Documents  
│   ├── Downloads  
│   ├── executable_path.txt  
│   ├── file.txt  
│   ├── gg.txt  
│   ├── log-analysis  
│   │   └── forensic-evidence  
│   │       ├── account_changes.txt  
│   │       └── command_execution.txt  
└── .
```

```
kali@kali: ~  
Session Actions Edit View Help  
├── network_info.txt  
├── newfile.txt  
├── new.txt  
├── n.txt  
├── Pictures  
├── process_info.txt  
├── Public  
├── sha256_hash.txt  
├── Templates  
└── Videos  
  
17 directories, 26 files  
  
(kali@kali)-[~]  
$ head Adhya.txt  
a  
b  
c  
d  
e  
f  
g  
h  
i  
j  
  
(kali@kali)-[~]  
$
```

A terminal window titled 'kali@kali: ~' with a menu bar containing 'Session', 'Actions', 'Edit', 'View', and 'Help'. The window shows the execution of two commands: 'head Adhya.txt' and 'tail Adhya.txt'. The output of 'head' lists characters 'a' through 'j', and the output of 'tail' lists characters 'r' through 'z'. The prompt '\$' is visible at the bottom of the terminal.

```
kali@kali: ~  
Session Actions Edit View Help  
(kali@kali)-[~]  
$ head Adhya.txt  
a  
b  
c  
d  
e  
f  
g  
h  
i  
j  
  
(kali@kali)-[~]  
$ tail Adhya.txt  
r  
s  
t  
  
u  
v  
w  
x  
y  
z  
  
(kali@kali)-[~]  
$
```