


HƯỚNG DẪN THÊM CAMERA VÀO MILESTONE

1. Tạo tài khoản ONVIF

- Đối với camera Erabyte, truy cập web camera mục Settings -> ONVIF. Tạo tài khoản với thông tin mặc định:
 - Username: onvifuser
 - Password: Admin!123456 (Lưu ý không đặt @ trong mật khẩu)

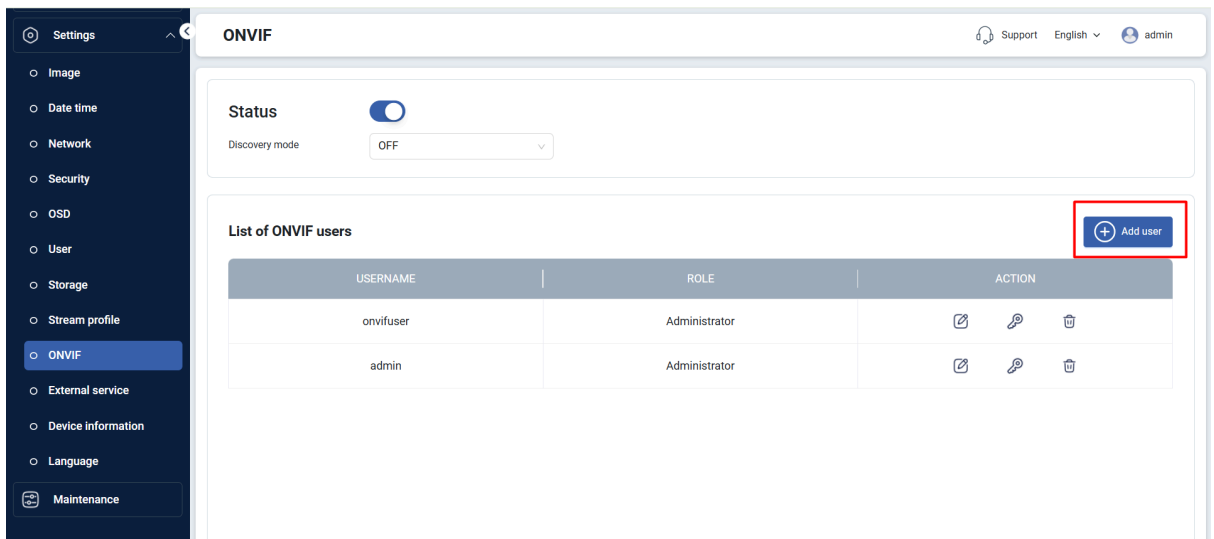

The screenshot shows the ONVIF configuration page. The left sidebar has a 'Settings' menu with 'ONVIF' selected. The main content area has a 'Status' section with a toggle switch turned 'ON' and a 'Discovery mode' dropdown set to 'OFF'. Below this is a 'List of ONVIF users' table. The table has columns for 'USERNAME', 'ROLE', and 'ACTION'. It lists two users: 'onvifuser' and 'admin', both with the role 'Administrator'. The 'ACTION' column contains icons for edit, refresh, and delete. A red box highlights the '+ Add user' button in the top right corner of the table area.

USERNAME	ROLE	ACTION
onvifuser	Administrator	  
admin	Administrator	  

Add new ONVIF user

Username *

onvifuser

Role *

Administrator

Password *

Admin!123456

Verify password *

.....

Cancel

Save

- Đối với camera TVT, truy cập web camera mục Config -> User, đổi mật khẩu tài khoản admin về mật khẩu đúng mà Milestone chấp nhận

TVT

Download the plugin | admin | Logout

Live

Config

Search

Statistics

System

Basic Information | Date and Time | Local Config | Storage | Application Scenarios

Image

Display Settings | Video/Audio | OSD | Video Mask | ROI Config | Zoom/Focus

Alarm

Motion Detection | Exception Alarm | Alarm In | Alarm Out | Alarm Server | Audio Alarm | Video Exception | Audio Exception | Disarming

Event

Object Abandoned/Missing | Line Crossing | Region Entrance | Region Exiting | Target Counting by Line | Target Counting by Area

Config Home > Security > User

Add

Modify

Delete

Security Question

Index	User Name	User Type
1	admin	Administrator

Edit User

User Name

admin

Old Password

New Password

Level

The password can be composed of numbers, special characters, upper or lower case letters.

Confirm Password

User Type

Administrator

Modify Onvif Password

Select All

Remote System settings

Remote image settings

Remote PTZ control

Remote Alarm configuration

Remote intelligent event configuration


Remote network advanced configuration

Remote security management


Remote configuration backup and recovery

2. Thêm camera vào hệ thống Milestone Xprotect Management Client


- B1: Truy cập app Milestone Xprotect Management Client
- B2: Mở mục Recording servers, bấm chuột phải vào profile muốn thêm camera

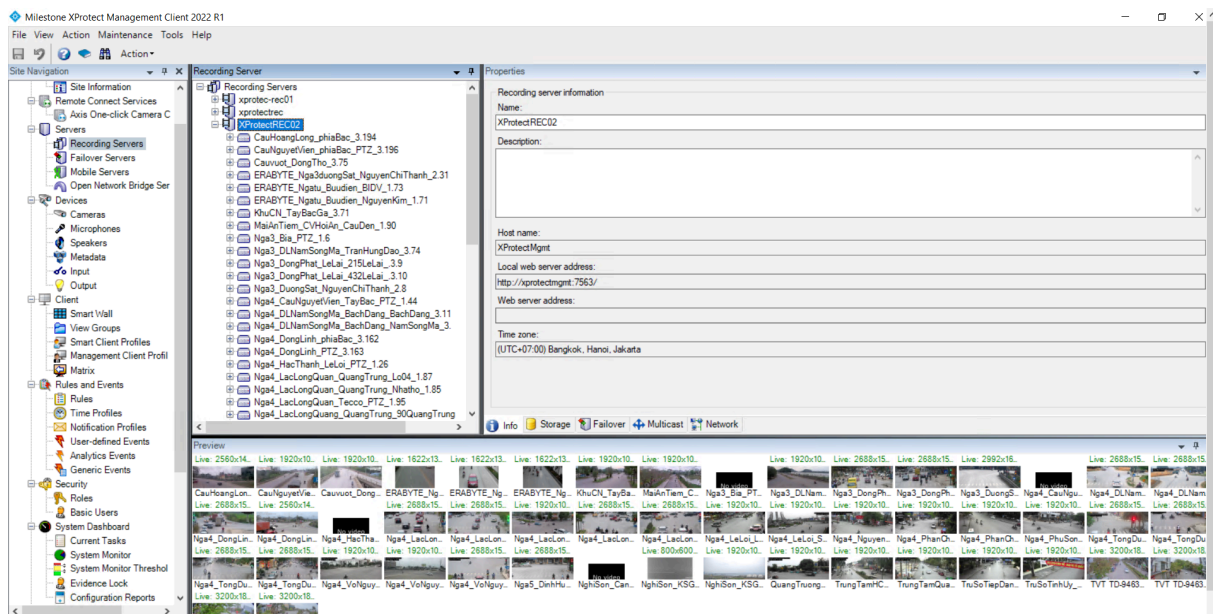


- B3: Bấm Add hardware

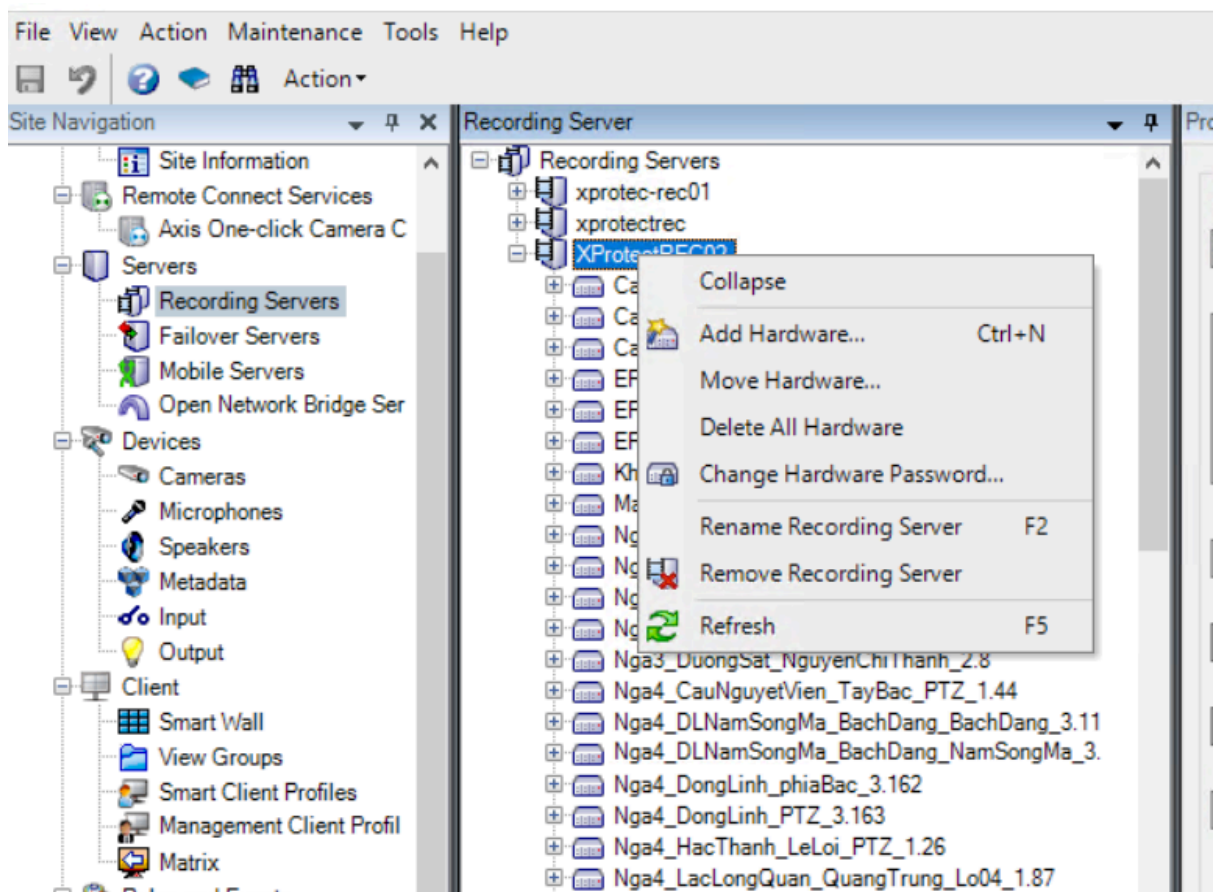


- B4: Chọn manual

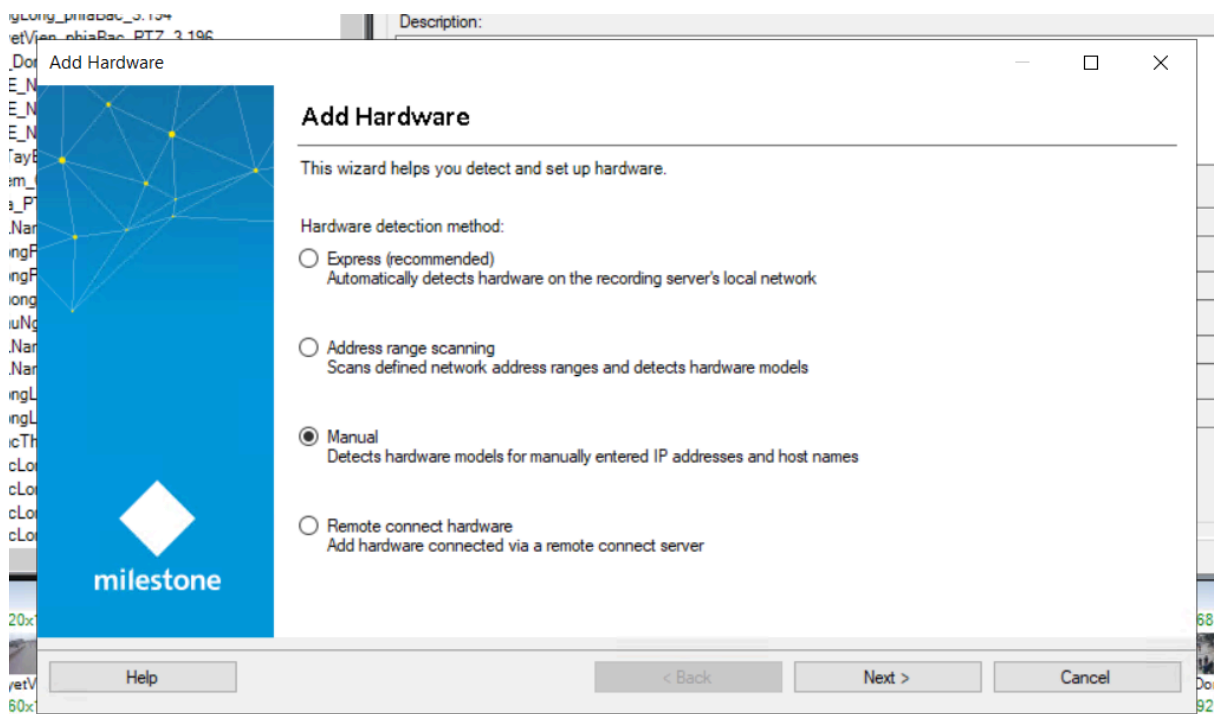


- B5: Chọn admin, và nhập mật khẩu đã tạo trên camera trước đó

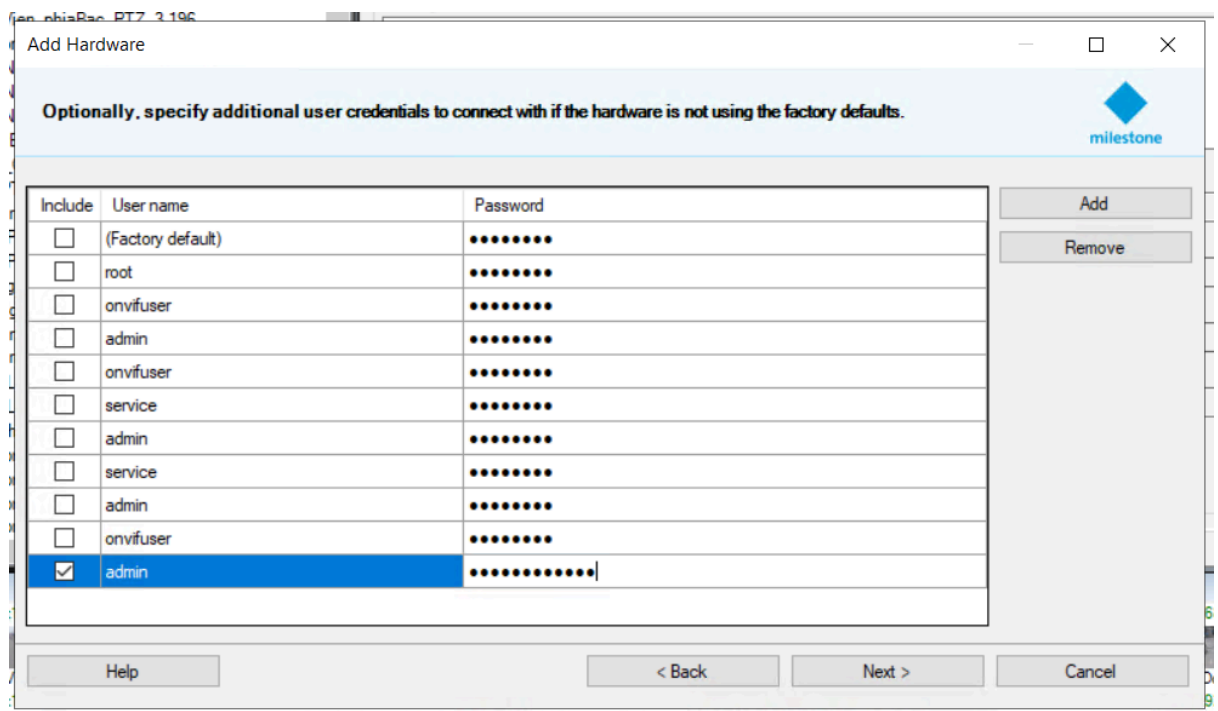


- B6: Chọn Other

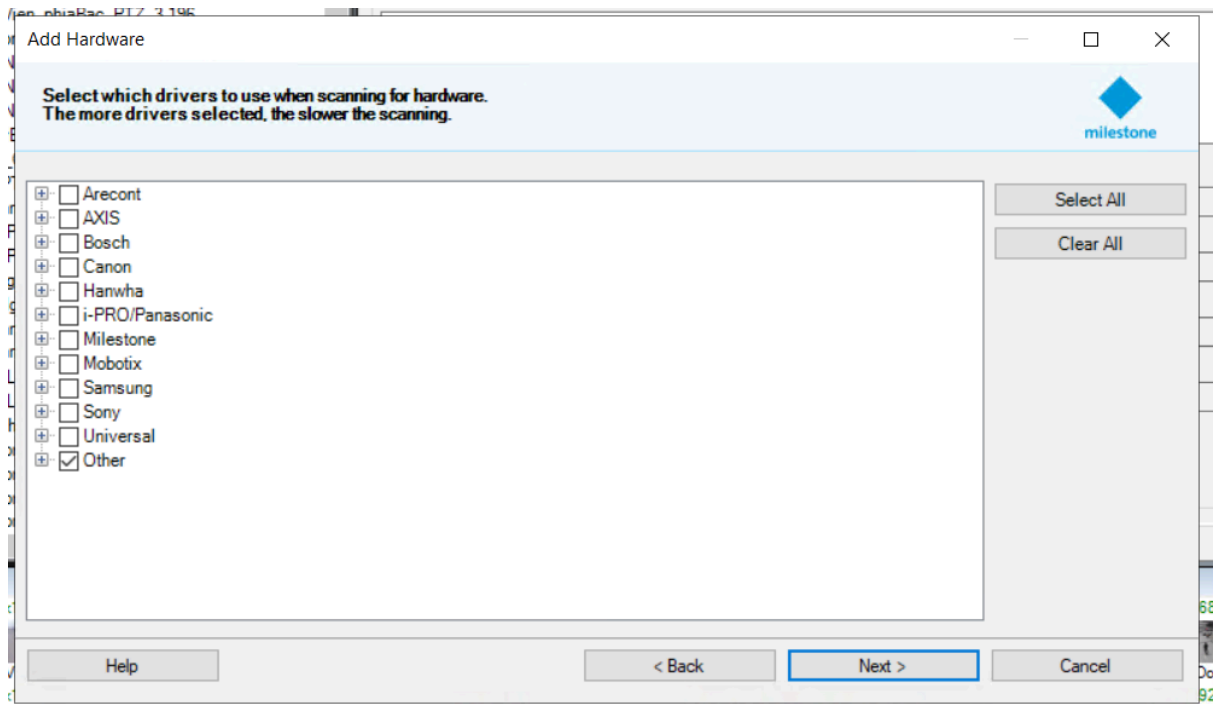


- B7: Nhập IP camera vào cột Address và bấm Next


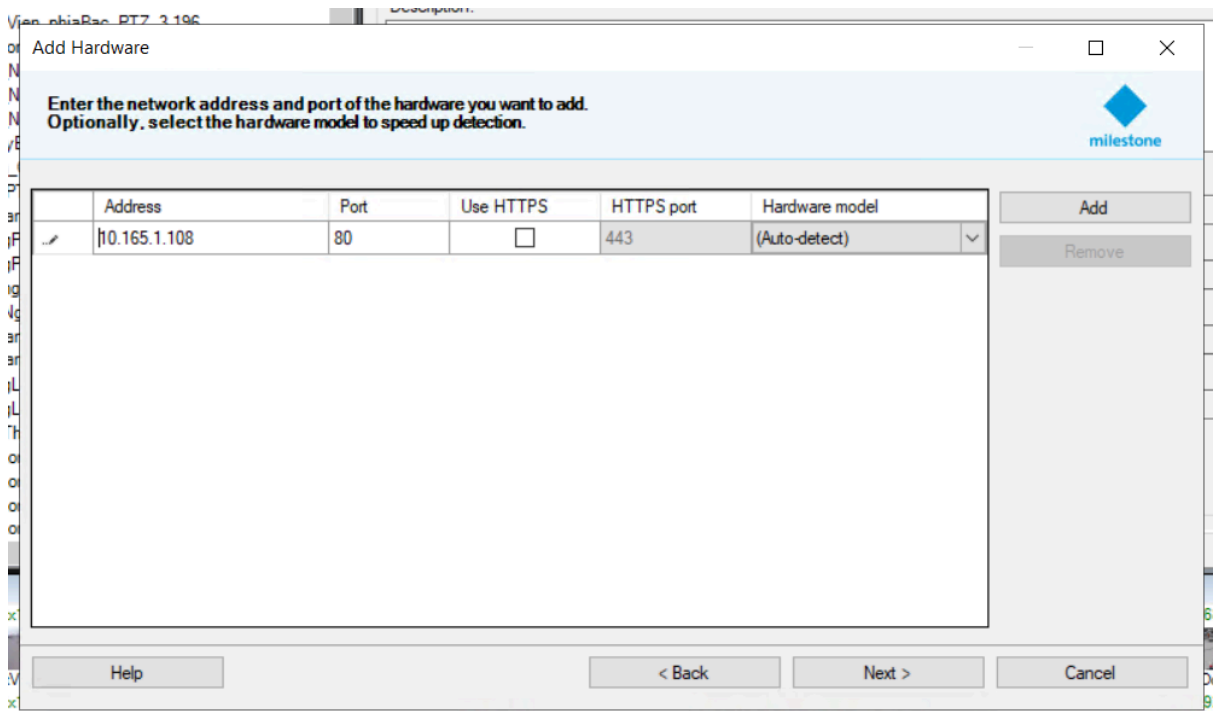


- B8: Chờ phần mềm detect camera, báo kết quả Success tức là thành công.
Trường hợp lỗi, phần mềm hiện kết quả Fail, người dùng kiểm tra lại thao tác đã thực hiện ở các bước trước

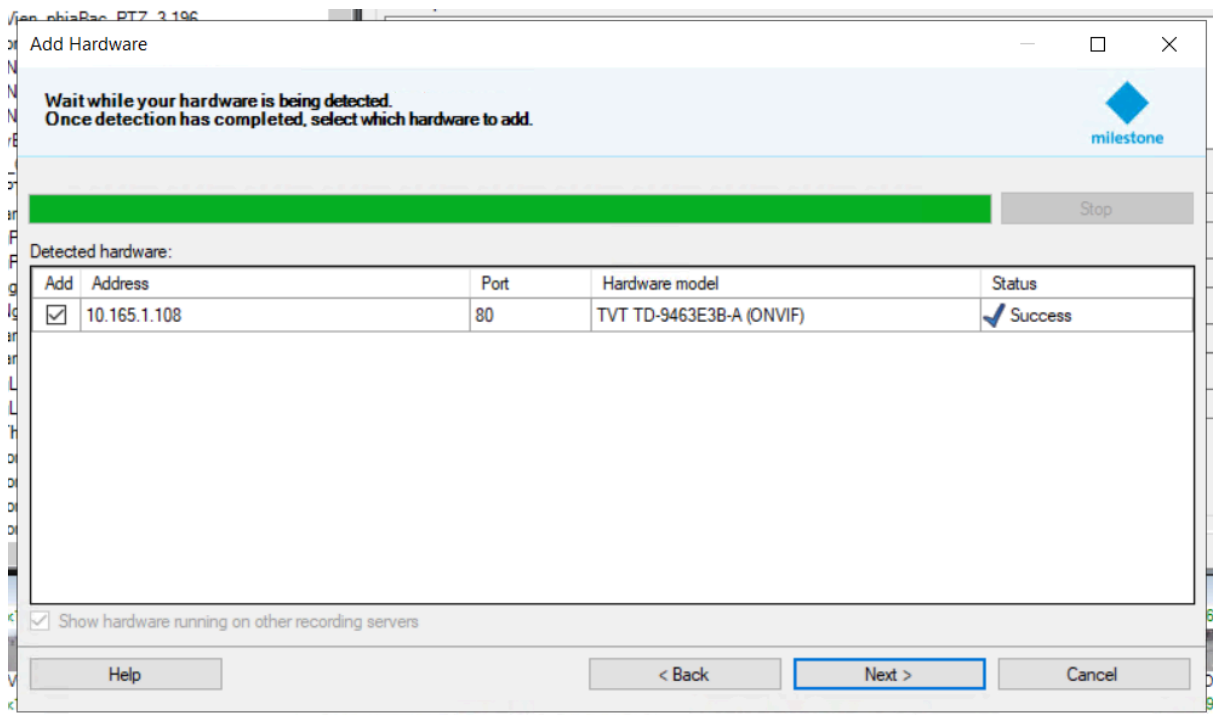

- B9: Lần lượt bấm Next các bước tiếp theo và bấm Finish để kết thúc quy trình

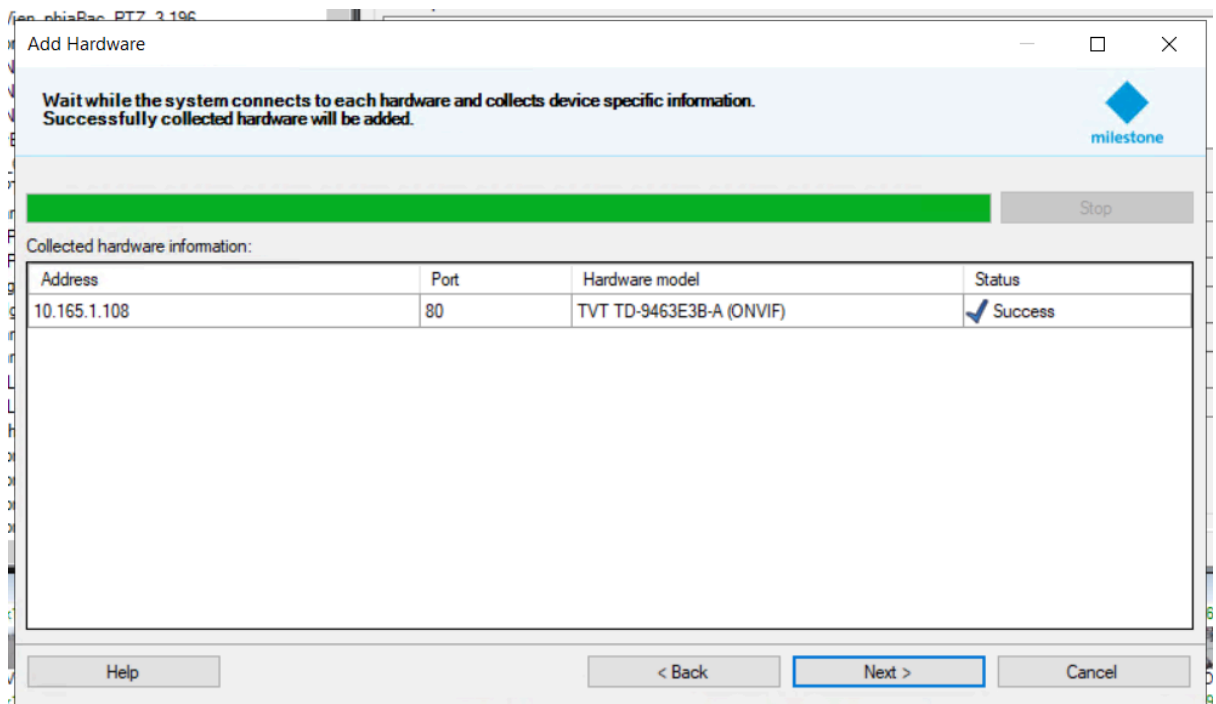

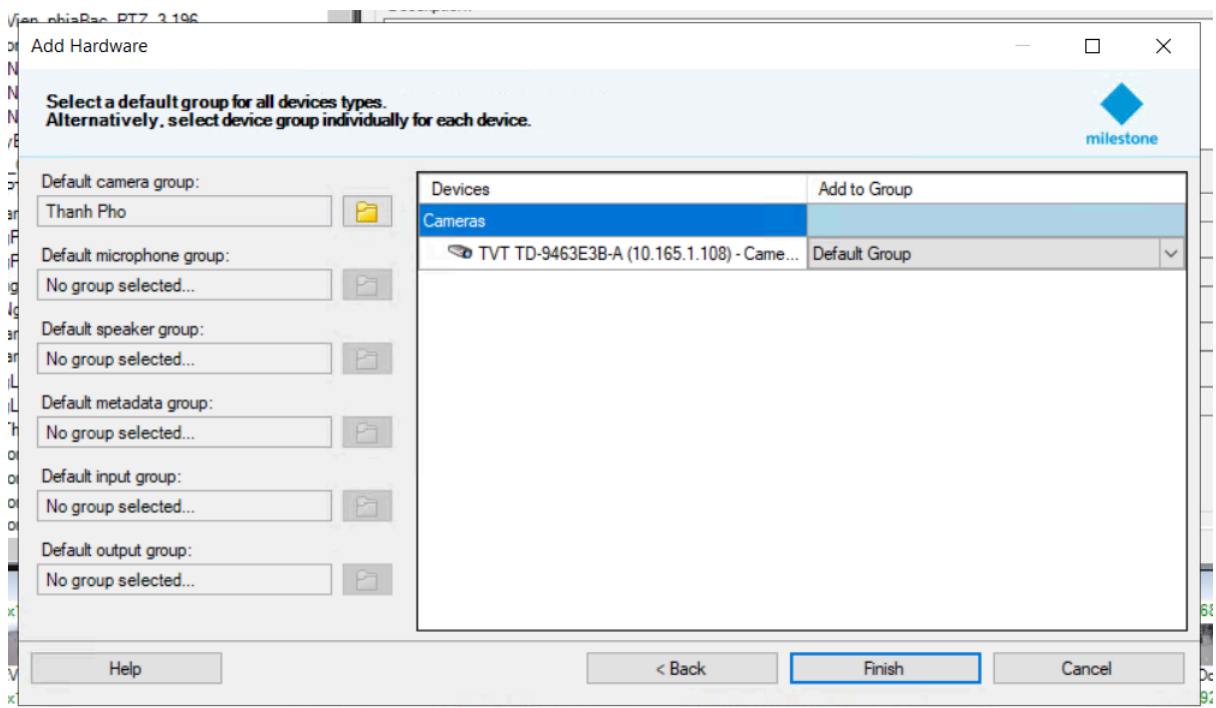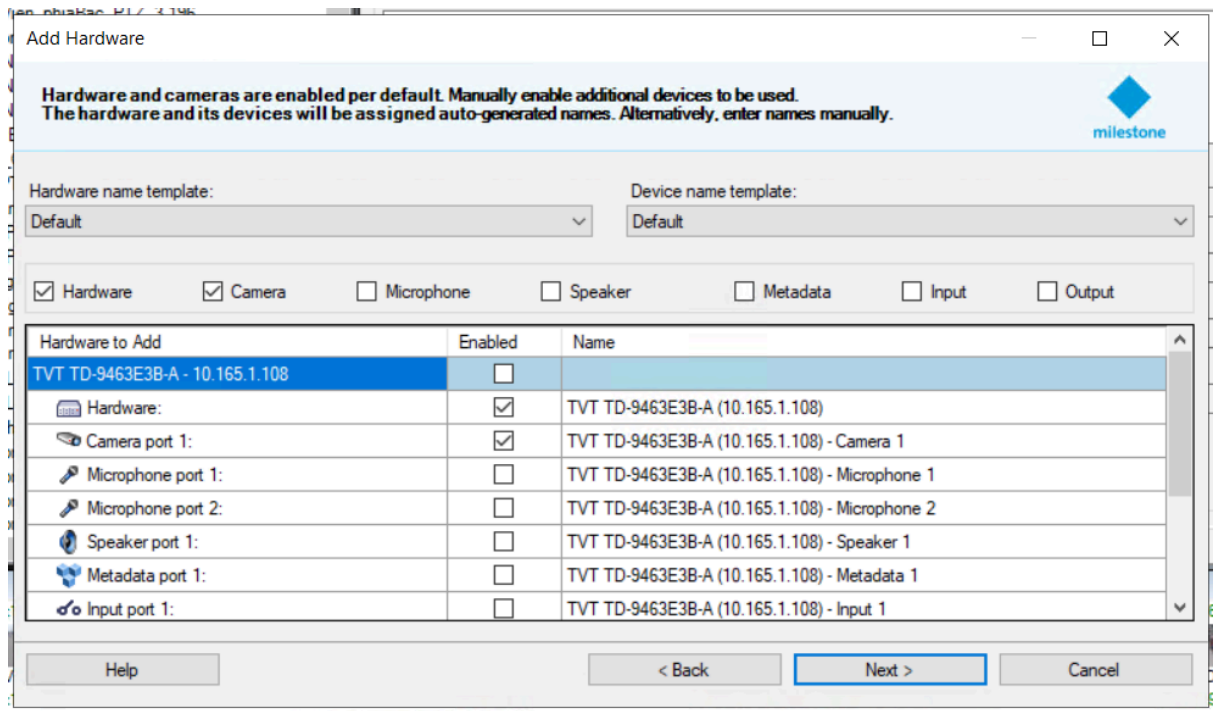


=> Sau khi add thành công, camera sẽ xuất hiện trong danh sách camera của profile bạn đã chọn add vào trước đó.

3. Lấy source_id của camera từ milestone

- B1: Truy cập app Milestone Xprotect Management Client

- B2: Mở mục Recording servers, tìm camera cần lấy thông tin
- B3: Bấm dấu + để mở rộng thông tin camera
- B4: Di chuột vào dòng Camera 1, nhấn đồng thời phím ctrl và chuột phải, hệ thống sẽ hiển thị ID camera

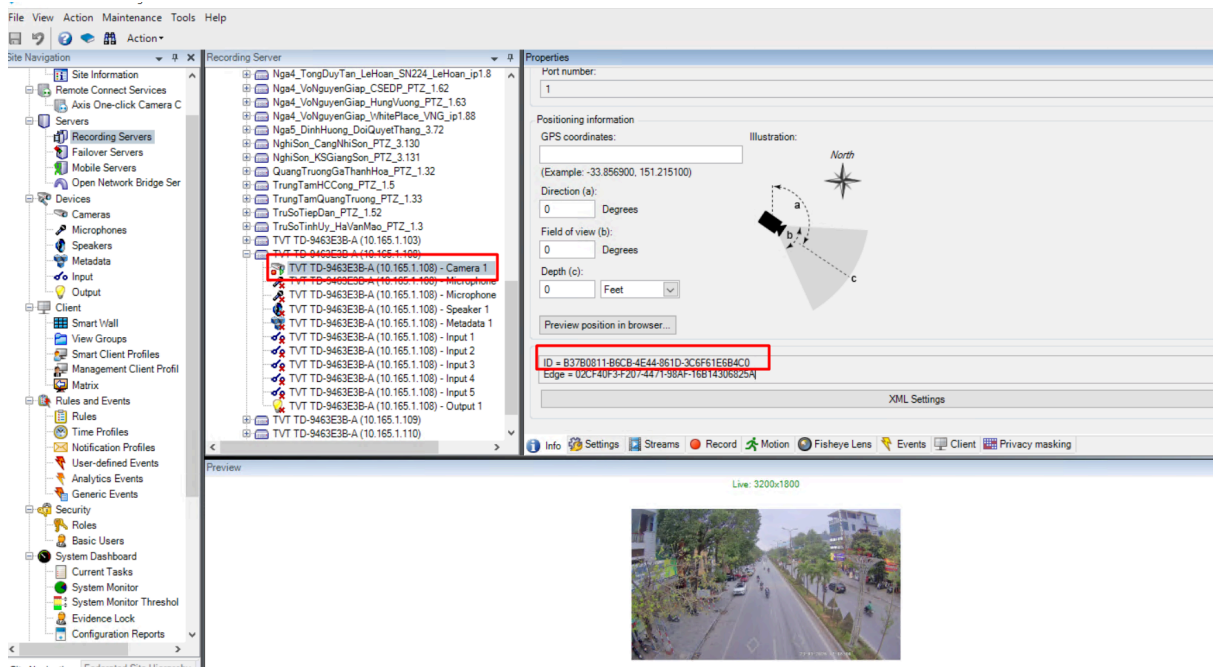

- B5: Copy ID và chuyển thành viết thường đúng theo format của camera