


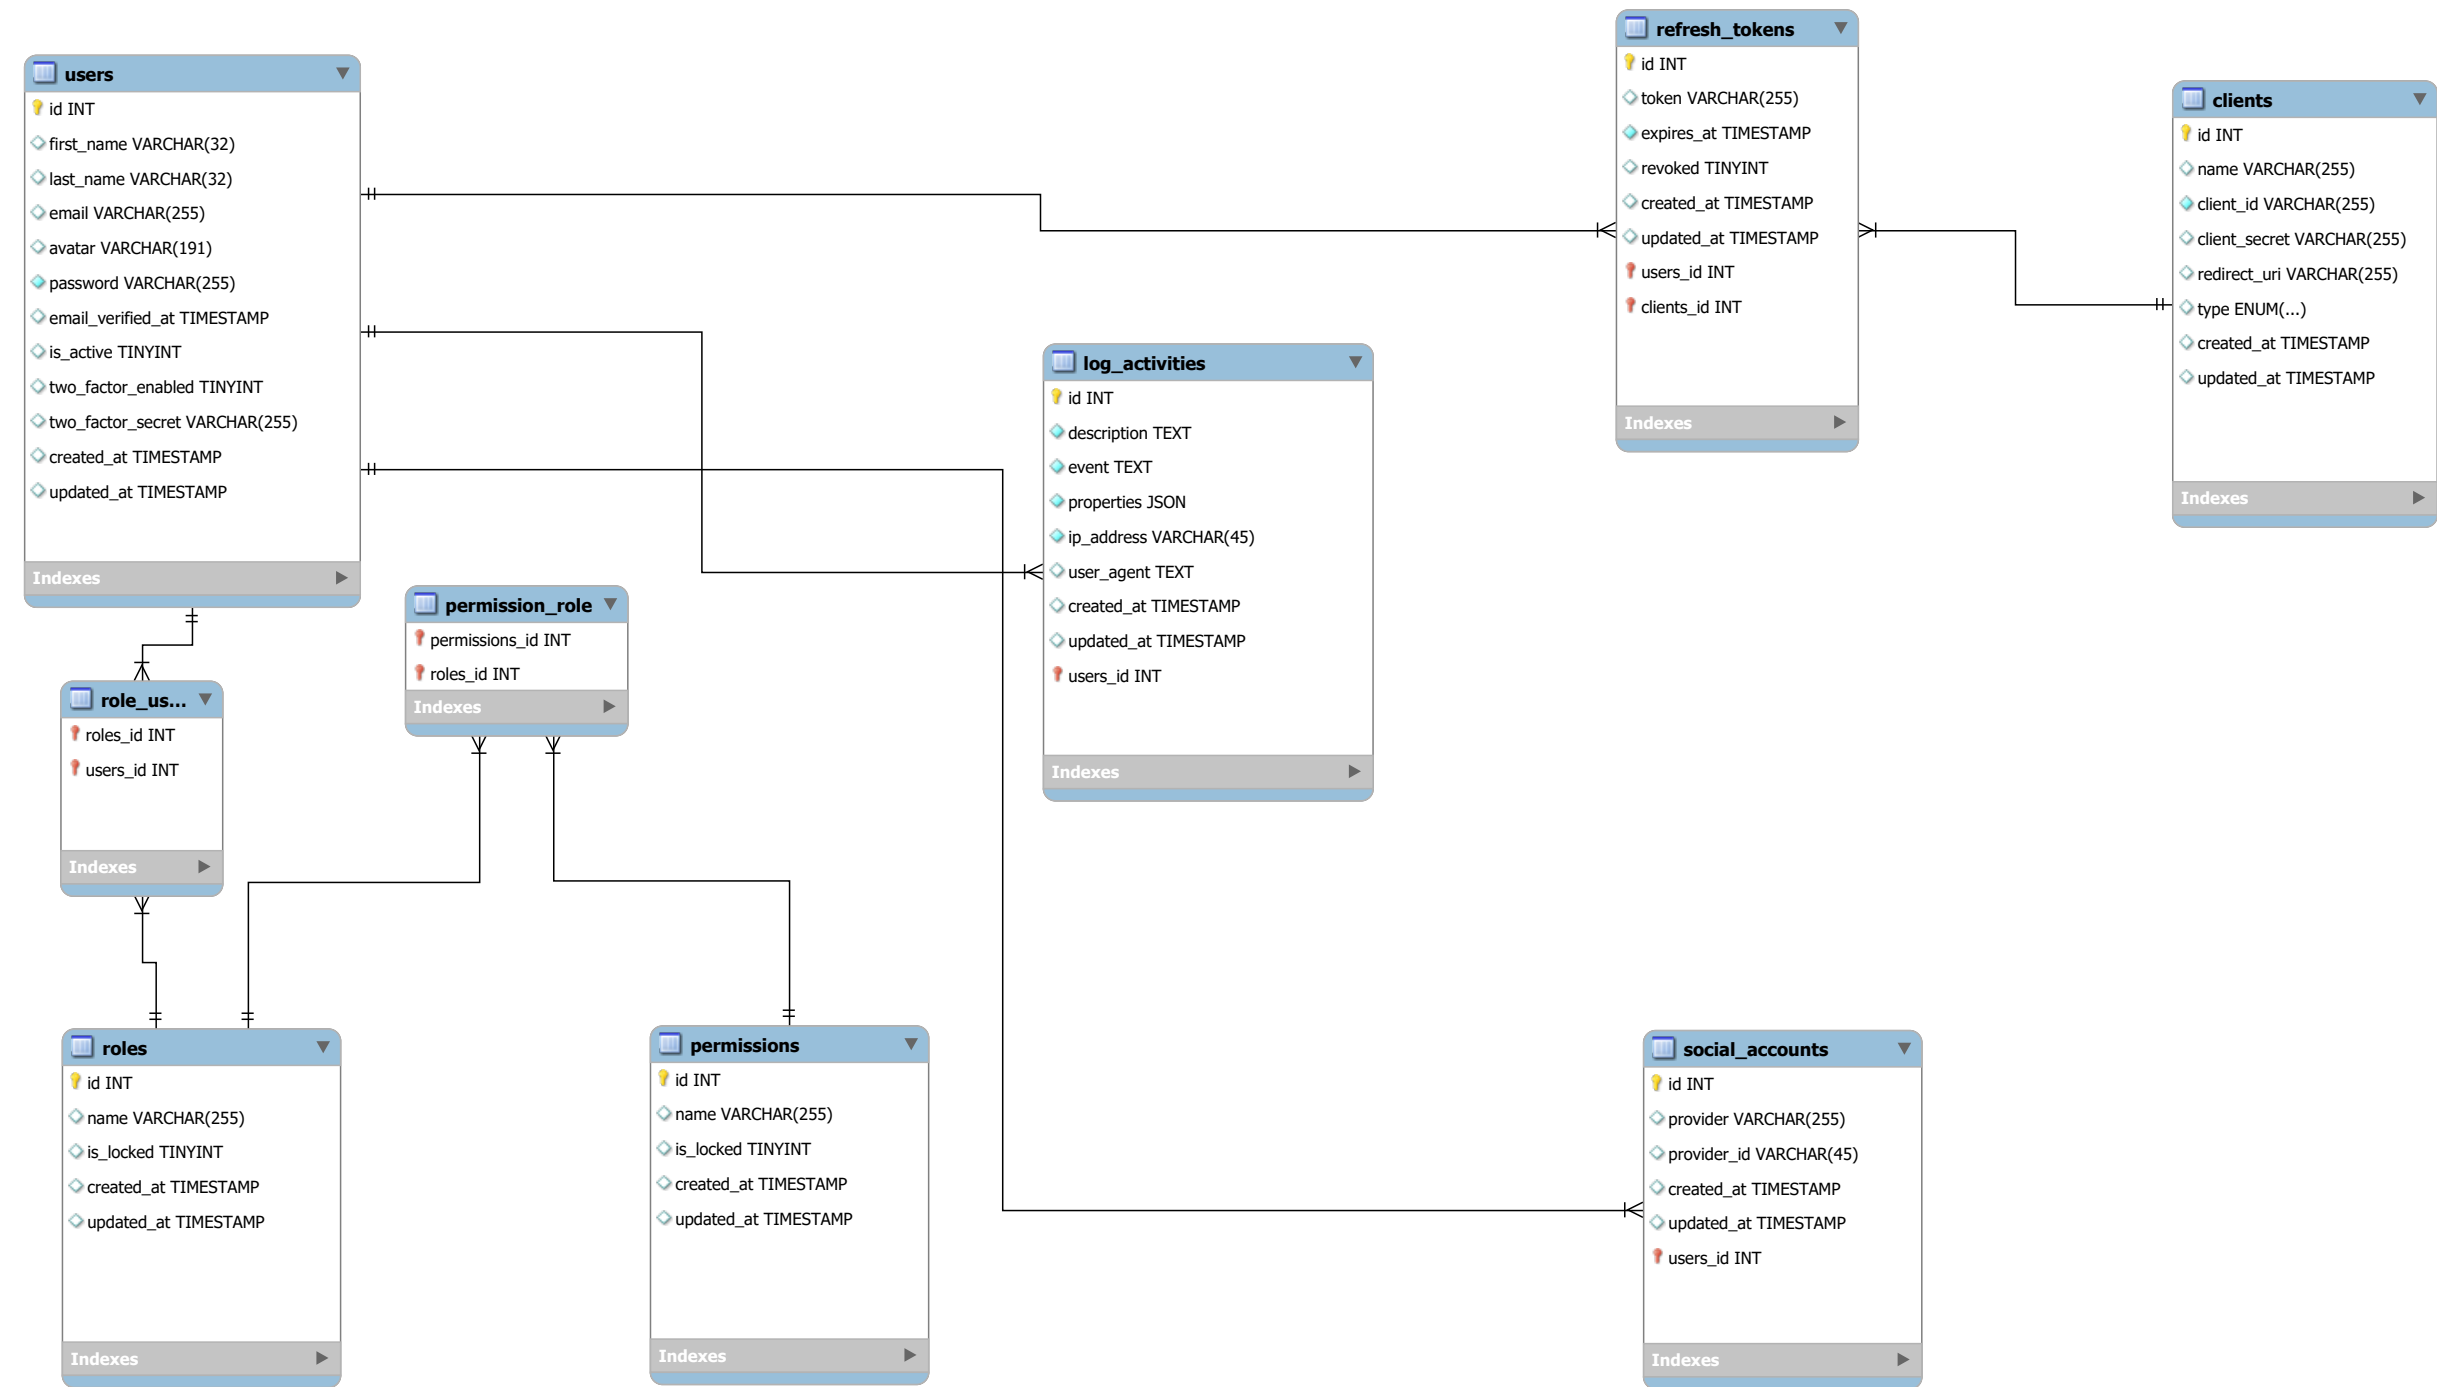

The oauth_clients or clients table stores apps (clients) that are allowed to use your OAuth server. □
If you want to include the OAuth service

EVERY FUNCTIONNALITY IN SYSTEM MUST NOT BE CONTROLLED BY USER OR ANY OTHER ACTOR SO WE CAN ADD is_locked COLUMN TO LOCK THE FUNCTIONNALITY.

If we use laravel/passport so we don't need to handle these tables
clients
refresh_tokens
authorization_codes

Laravel/passport will create them and