Keep, Measure, Erase

What a Quantum Loop Does with Its History

ANONYMOUS AUTHOR(S)

Quantum loops have a reputation for paradox. We trace the paradoxes to a single fact: the history of a quantum loop, the record of how many times its body ran, is itself quantum information. We make the choice of what to do with that history explicit in a small quantum language in the Π family. The coherent loop lets exits interfere without recording the round. For every finite unitary body its direct-sum trace is total and unitary and compiles exactly into loop-free code over a field with decidable equality. At a chosen frequency, a lossless optical network with its return ports connected realizes this trace in steady state. The other two loops come from two universal constructions on quantum processes. Allocation ($\mathscr{R}$) lets us keep a count modulo the size of a register, and hiding ($\mathscr{L}$) lets us discard a fresh copy of the guard after each call. Measuring the guard on every round gives the same data as keeping the exact number of returns and then forgetting it. Forgetting gives the coherent data exactly when the same count state factors out on every input. Over the same field, a finite test on the body decides when a measured loop may replace a coherent one, even for callers holding a reference entangled with the input. If we choose one return phase uniformly per run, the average output state of the coherent loop is exactly what measuring the guard would give. We implement the language with all three loops and run the paper's examples in it.

1 Introduction

Can a quantum computer run a loop? The question sounds settled, yet the answers on record seem to contradict one another. Let the loop's guard be in superposition, so that one branch exits after three rounds while another keeps going. If a clock records when each branch halts, branches that leave different records do not interfere [31, 35]. A second approach measures the guard on every round, leaving a classical loop over quantum data [49]. This is how a measurement can supply the classical condition of a `while` loop in Q# or OpenQASM 3 [34, 36]. A third bounds the rounds and pads shorter branches so that they reach the same control state at the same step [51, 52]. A fourth defines the loop as an infinite sum over the paths of its control flow [3, 5].


To see why the answers differ, we follow what each loop does with its history.

- **Keep it.** Return the count with the data, modulo K for a register of size K.
- **Measure it.** Measure the guard after each call to decide whether to continue.
- **Erase it.** Leave the count implicit so that the exit amplitudes add at the output.

For classical programs the three coincide on the returned data when the count is ignored, which is why classical languages never had to choose. For quantum programs they give three different loop constructs, and a language that provides only one has chosen for its programmers.

Why should the count matter when nobody reads it? A quantum loop can exit after three iterations and after five at once, in superposition, and both exits can reach the same output. There the two contributions combine as complex amplitudes, which behave like signed weights: they can reinforce or cancel, so the final answer depends on both. A counter tags each contribution with its iteration number, and contributions with different tags stay apart whether or not anyone reads the tags. Untagged, the contributions of all iteration counts add into a single map, the infinite sum of the fourth answer. Category theory calls this map the trace of the loop body [5, 28], and the geometry of interaction computes it with its execution formula [1]. Reversible programmers will recognize the count as garbage. Once two exits carry different tags, discarding the tags gives the same data as measuring them and forgetting the outcome.

Leaving the count implicit may look exotic, yet optical devices do it routinely. A ring resonator is a closed loop of optical waveguide, much like a ring of optical fiber, placed beside a straight waveguide (right). Where the two pass close together, light arriving on the straight guide either continues along it or crosses into the ring, and light already in the ring either goes around again or crosses back out. This junction plays the role of a loop body with an exit and a way back. Light that leaves after one trip, after two or after a hundred all reaches the same output. Under a steady beam of a single color, these contributions add as amplitudes [2, Eq. (6)] [3, § 5.3], just like the exits of a loop that leaves its count implicit, so the ring computes a trace.



We make this choice explicit in ISO, a reversible language based on symmetric pattern matching [10, 39]. We write the body once, with an exit and a back edge. The language closes it in three ways: `trace` feeds the returning state straight back, count_K counts returns modulo K, and `while` measures the guard after each call.

In our running example, `guardRound` rotates its guard by $\theta = \arccos(3/5)$. The caller splits a qubit equally between the loop and a bypass, then brings the paths together. It reads 1 with certainty for `trace`, half the time when we keep parity and hide the bit, and one time in five for `while` (Table 1).

- **Coherent loops compile away.** With exact arithmetic and decidable coefficient equality, we eliminate one returning basis value at a time, even when infinitely many rounds contribute [3, proof of Thm. 3.3.15] (Section 3). Section 4 realizes the same map by feeding the return ports of a finite optical network back in phase.
- **Keeping and measuring come from two universal constructions.** Allocation supplies the counter and hiding lets us discard a copy of the guard [24, 25] (Section 5).
- **Forgetting can be certified.** For a nonempty input type and m returning basis values, the first $m + 1$ exit maps suffice to decide agreement: they must span a line (Section 6).
- **A phase probe reads the circulating weight.** One control qubit compares nearby phases on the return wire, as in a Larmor clock [9, 42]. The squared norm of the total returning amplitude, averaged over the phase, gives the measured mean number of returns (Section 7).

2 Finite programs in ISO

An iso $\omega : a \leftrightarrow b$ is a reversible program between finite types. In Π, 0 has no values, 1 has just $*$, $a + b$ holds a tagged value, and $a \otimes b$ holds a pair [24, § 3.1]. Write $|s\rangle$ for the vector of a basis value $s \in \mathscr{B}(a)$. The two values of $1 + 1$ carry the same $*$, so only their tags distinguish them.

2.1 Syntax

A clause $v \leftrightarrow e$ matches its input against v and evaluates e with the variables it binds. For instance, left x matches left s and binds x to s. Patterns use distinct variables, and expressions allow local calls and finite superpositions with $\alpha_i \in \mathbb{C}$.

$$
\begin{aligned}
v &::= * \mid x \mid \mathsf{left}\, v \mid \mathsf{right}\, v \mid \langle v_1, v_2 \rangle, \\
p, q &::= * \mid x \mid \langle p, q \rangle, \\
e &::= v \mid \textstyle\sum_i \alpha_i e_i \mid \mathsf{let}\ p = \omega\, q\ \mathsf{in}\ e, \\
\mathscr{T} &::= \{v_i \leftrightarrow e_i\}_{i \in I}, \qquad t ::= e \mid \omega\, t, \\
\omega &::= f \mid \mathscr{T} \mid \omega; \omega \mid \omega \oplus \omega \mid \omega \otimes \omega \mid \omega^\dagger.
\end{aligned}
$$


A clause pattern v may test a tag to select a clause in the finite table. In a local call, q assembles the argument and p binds the result for e. Both use unit, variables and pairs. A pair takes apart a product and a variable binds any value, including a whole tagged value, so p covers every result of its type.

An iso may be a clause table, a name f for an earlier checked definition, or a program built from other isos. We use $f;g$ to pass the output of f to g, $\oplus$ to act on the alternative selected by a tag, and $\otimes$ to act on both factors of a pair. Dagger reverses the resulting iso. Section 3 adds feedback to these operations.

A closed term has no free value variables. We write application as $\omega\, t$ and run it as `omega on t`, so `f; g on t` applies the sequence to t. We use `on` in the same way for isometries and channels in Section 5. An ordinary definition pairs a signature `f :: a <-> b` with a body `f = omega`. The declaration `round` $f : a + c = \mathcal{T}$ gives f type $(a + c) \leftrightarrow (a + c)$, with the same external type a on both sides. On either side the outer tag selects the port. `exit` (left) carries an external value of a, and `back` (right) a return of c. The payload can itself be tagged. At `Qubit`, the executable name for $1 + 1$, `0` and `1` stand for left $*$ and right $*$. Thus `exit 0` expands to left (left $*$), with one tag for the port and one for the qubit. We write `Unit` for 1 and `unit` for $*$.

For the rotation in the introduction, both ports carry `Unit`, so the two basis inputs are `exit unit` and `back unit`. One call rotates the guard through $\theta = \arccos(3/5)$. In that basis order, the two clauses give the two columns of the matrix beside them.

```
round guardRound : Unit + Unit = {
  exit unit ↔ [ 3/5 . exit unit + 4/5 . back unit];
  back unit ↔ [-4/5 . exit unit + 3/5 . back unit]
}
```



On input `exit unit`, the brackets group the two outputs and the dot scales each by its amplitude. We get $(3/5)|\text{exit}\ *\rangle + (4/5)|\text{back}\ *\rangle$, the first column of R_θ. The `back unit` clause gives the second column in the same order. The closing brace ends the body. Section 3 connects its `back` output to its `back` input.

To evaluate a source iso ω, we unfold its names and replace each checked table by its matrix atom $[M]$. The resulting program κ uses *matrix combinators*: $\kappa ::= [M] \mid \kappa;\kappa \mid \kappa \oplus \kappa \mid \kappa \otimes \kappa \mid \kappa^\dagger$. For `guardRound` the whole table becomes the single atom $\left[\begin{smallmatrix} 3/5 & -4/5 \\ 4/5 & 3/5 \end{smallmatrix}\right]$.

2.2 Statics

To check a table $\omega : a \leftrightarrow b$, we first check that each basis input of a matches exactly one clause and that each output expression has type b under the variables its pattern binds. On basis input s, the clause gives column s of the table's matrix M. Its entry in row t is the amplitude for output t. For `guardRound`, the marked entry $M_{ts} = -4/5$ is the exit amplitude on a returning input.

	exit	s=back
t=exit	3/5	−4/5
back	4/5	3/5

Both columns of `guardRound` have squared norm one, and their inner product is zero: the exit row contributes $-12/25$ and the return row contributes $12/25$ (Figure 1). In general, we check that a and b have equally many basis values and that $M^\dagger M = I$, where dagger takes the conjugate transpose. The diagonal entries of this product are the squared column norms and the off-diagonal entries are the inner products of distinct columns. A square matrix that passes this check is unitary.

The judgment $\Sigma; \Delta \vdash e : b$ gives e output type b in the earlier iso definitions Σ and the context of value variables Δ. In a pair pattern $\langle v_1, v_2 \rangle$, linear use splits Δ between the components. A superposition offers alternatives, so each alternative uses the same variables once. A local application splits the variables between its argument and its continuation, where the result pattern binds fresh variables.

To check $\Sigma \vdash \omega : a \leftrightarrow b$, we use the same column test for a clause table as for a matrix atom. Over a field such as $\mathbb{Q}(i, \sqrt{2})$ we can decide the test exactly. Once the pieces pass, we need only

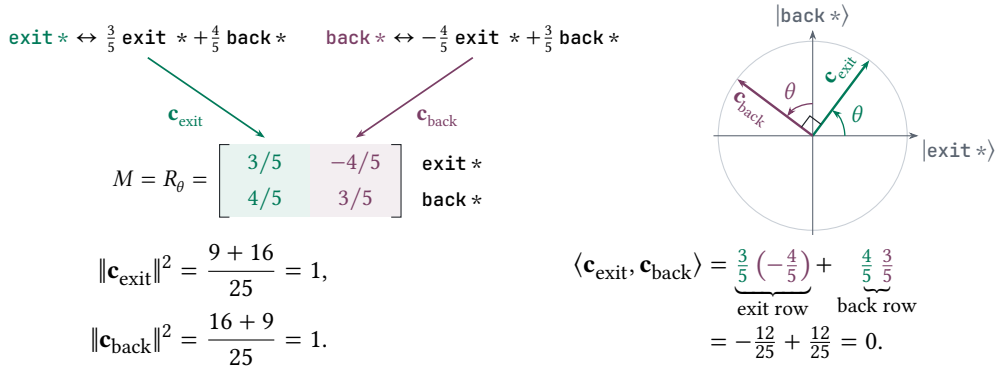


Fig. 1. Each clause gives one column of R_θ. The rotation turns each basis vector through the same angle θ, so the columns lie on the unit circle and remain perpendicular. Each product in their inner product uses entries from the same output row. For complex columns we conjugate the first entry of each product.

check that their types match where we connect them. Checking a table may itself require evaluating a clause, but a named call can use only an earlier checked definition, and within a definition each check or evaluation works on a smaller subprogram. This is why the two procedures terminate. Appendix A gives the full rules, which adapt symmetric pattern matching [39, §§ 2, 5] [30, Ch. 3].

2.3 Dynamics

To compute a column in Figure 1, we match its basis input against a clause. The match assigns basis values γ to the pattern variables, so a value v on the right gives the vector $|v[\gamma]\rangle$. A sum adds the weighted vectors. In a local `let`, each basis output of the called iso supplies a binding for the rest of the expression, whose vector we weight by that output's amplitude. Their sum gives the result. We write $\gamma \vdash e \Downarrow \psi$ for the evaluation of the expression as a whole.

Once we have the columns of `guardRound`, elaboration can replace the table by $[R_\theta]$, and the atom rule $[R_\theta] \Downarrow R_\theta$ returns its matrix. In general, if elaboration gives $\mathscr{E}_\Sigma(\omega) = \kappa$ and $\kappa \Downarrow M$, we write $\Sigma \vdash \omega \Downarrow M$. Applying the program to a closed input $t \Downarrow \psi$ then gives $\omega\, t \Downarrow M\psi$.

Suppose we apply `guardRound` twice in sequence, starting with `exit unit`. After the first call the amplitudes are $3/5$ on **`exit`** and $4/5$ on **`back`**. The second call therefore uses both clauses. Its output is the first column weighted by $3/5$ plus the second column weighted by $4/5$:

$$\frac{3}{5}\begin{pmatrix}3/5\\4/5\end{pmatrix} + \frac{4}{5}\begin{pmatrix}-4/5\\3/5\end{pmatrix} = \begin{pmatrix}-7/25\\24/25\end{pmatrix}.$$

In sequence the whole first output enters the second call. Thus if $\kappa \Downarrow M$ and $\lambda \Downarrow N$, then $\kappa;\lambda \Downarrow NM$, with M acting first. Elaboration also preserves sum, tensor and dagger, which take the direct sum, tensor product and conjugate transpose of the matrices.

2.4 Denotation

A type a denotes the space $[\![a]\!] = \mathbb{C}^{\mathscr{B}(a)}$, with one orthonormal basis vector for each basis value of a. Thus 0 and 1 denote the zero space and $\mathbb{C}$, and sum and product types denote direct sums and tensor products, respectively.

A checked iso $\omega : a \leftrightarrow b$ denotes the linear map $[\![\omega]\!] : [\![a]\!] \to [\![b]\!]$ that agrees with its clauses on basis inputs. For `guardRound`, amplitudes u on **`exit`** and v on **`back`** therefore weight the two columns of the rotation.

$$[\![\texttt{guardRound}]\!]\begin{pmatrix}u\\v\end{pmatrix} = u\begin{pmatrix}3/5\\4/5\end{pmatrix} + v\begin{pmatrix}-4/5\\3/5\end{pmatrix} = \begin{pmatrix}(3u-4v)/5\\(4u+3v)/5\end{pmatrix}.$$

The column check makes this map unitary (Appendix A gives the correspondence with evaluation). In sequence we pass both output coordinates to the next call. To form a loop we let the `exit` amplitude leave and feed back only the `back` amplitude.

3 What the coherent loop computes

Closing `guardRound` leaves the caller with a single output of type `Unit`. Every amplitude that leaves through `exit` contributes to that output, however many trips it makes around the loop.

3.1 From a round to its exits

Follow the lower wire in Figure 2. On the second call, only the `back` clause contributes: it takes the returning amplitude $4/5$ and sends $(4/5)(-4/5) = -16/25$ to the external output. It sends $(4/5)(3/5) = 12/25$ back for the third call.

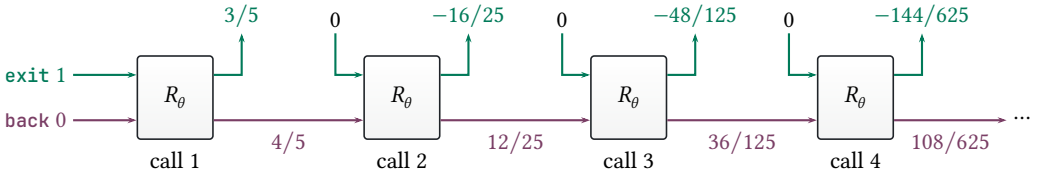


Fig. 2. Four calls to `guardRound`. The upper outputs contribute to the caller's result; the first two add to $-1/25$. The lower wire carries the returning amplitude from one call to the next. A zero at an input means no amplitude enters that port.

Syntax and statics. In `trace guardRound`, the body supplies the return type $c = 1$. Unfolding the name and replacing its two clauses by their checked matrix atom gives the evaluator $\mathrm{trace}_1[R_\theta]$. Both programs connect the same return wire. The two typing rules describe this connection before and after elaboration:

$$\underbrace{\frac{\Sigma \vdash \omega : a + c \leftrightarrow b + c}{\Sigma \vdash \mathrm{trace}_c\, \omega : a \leftrightarrow b}}_{\text{source iso}} \qquad \underbrace{\frac{\kappa : a + c \leftrightarrow b + c}{\mathrm{trace}_c\, \kappa : a \leftrightarrow b}}_{\text{matrix combinator}}.$$

Elaboration leaves the return wire in place as it translates the body, so $\mathscr{E}_\Sigma(\mathrm{trace}_c\, \omega) = \mathrm{trace}_c\, \mathscr{E}_\Sigma(\omega)$. In `trace f; g` we close `f` first, then apply `g`. The external types a and b may differ but must have equal dimension because the body is unitary. A `round` uses the same type on both sides, giving `trace guardRound` type $1 \leftrightarrow 1$. Closing just the return port gives the interface of qWhile's do-while combinator [3, § 5.1] and implements Lemonnier's proposal to use Bartha's trace for reversible programs on finite data [30, § 5.2.3].

Each box in Figure 3 is a morphism in Unitary, the category of finite-dimensional Hilbert spaces and unitary maps. For a common payload P, $F_g : P \oplus P \to \texttt{Qubit} \otimes P$ puts guard and payload on one sheet. Its inverse separates the two alternatives again so we can feed back just the return.

The exit maps. For a body $\beta : a + c \leftrightarrow b + c$, write $X = [\![a]\!]$, $X' = [\![b]\!]$ and $Y = [\![c]\!]$. Group the columns of its matrix U by input tag and the rows by output tag. On external input u and return y,

$$U\begin{pmatrix}u\\y\end{pmatrix} = \begin{pmatrix}A & B\\C & D\end{pmatrix}\begin{pmatrix}u\\y\end{pmatrix} = \begin{pmatrix}Au + By\\Cu + Dy\end{pmatrix}. \tag{3.1}$$

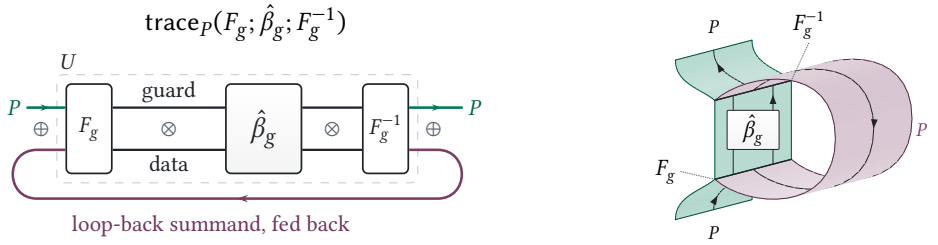


Fig. 3. Read the circuit rightward and the sheets upward. Separate sheets carry alternatives (⊕), and wires on one sheet carry pairs (⊗) [13, Defs. 16, 18–20, 22]. The guard is $|0\rangle$ for `exit` and $|1\rangle$ for `back`. The lower seam F_g puts guard and payload together for $\hat{\beta}_g = F_g^{-1}; \beta; F_g$. At the upper seam F_g^{-1} separates them into ports again. Closing the return sheet gives the direct-sum trace $P \to P$ [5, 28].

The top row gives the output in X' and the bottom row the return in Y. In `guardRound`, the first clause gives $A = 3/5$, $C = 4/5$ and the second gives $B = -4/5$, $D = 3/5$. The blocks $A : X \to X'$, $B : Y \to X'$, $C : X \to Y$ and $D : Y \to Y$ are morphisms in **FdHilb**, the category of finite-dimensional Hilbert spaces and linear maps. Since U is unitary and Y occurs on both sides, $\dim X = \dim X'$.

Nothing has returned on the first call, so $(u, 0)$ gives the immediate exit Au and puts Cu on the return wire. The next call takes $(0, Cu)$ to (BCu, DCu). Write $x_k : X \to X'$ for the exit map after k returns. To reach x_{k+1}, amplitude enters through C, passes through D another k times, then leaves through B. Thus

$$x_0 = A, \qquad x_{k+1} = BD^kC. \tag{3.2}$$

After $n+1$ calls, $x_0u, \dots, x_nu$ have reached the external output and D^nCu remains on the wire. Adding all the exits gives the execution formula $[\![\mathrm{trace}_c\, \beta]\!] = L = \sum_{k\geq 0} x_k$ [1, 17]. In the ring, x_0 gives the direct path and x_k the light that made k trips.

To see why the sum converges, suppose $Dv = \lambda v$ with $|\lambda| = 1$. All the norm of $(0, v)$ returns, so $U(0, v) = (0, \lambda v)$. These eigenvectors span a return space that U maps onto itself. An external input is orthogonal to that space, and unitarity preserves this orthogonality on every call. On the remaining return space all eigenvalues of D have modulus less than one, so its powers decay geometrically (Theorem B.1).

3.2 Computing the sum without a last round

On input `unit`, the first call to `guardRound` sends $4/5$ back. Each later call returns $3/5$ of what it receives (Figure 2). Write y for the sum on the return wire. After the first term, the sum is $(3/5)y$.

$$y = \frac{4}{5} + \underbrace{\frac{12}{25} + \frac{36}{125} + \frac{108}{625} + \frac{324}{3125} + \cdots}_{(3/5)y} = \frac{4}{5} + \frac{3}{5}y.$$


This is the *wire equation*. Subtracting $(3/5)y$ gives $(2/5)y = 4/5$, so the returns sum to $y = 2$. The first call sends $3/5$ straight to the output, and the `back` clause sends $-4/5$ of each return there. Their sum is $3/5 - (4/5)y = -1$, so `trace guardRound on unit` $\Downarrow -|*\rangle$.

For a finite unitary body the first return is Cu. Since each later call applies D to the preceding return, their sum satisfies the same wire equation.

$$y = Cu + DCu + D^2Cu + \cdots = Cu + Dy,$$
$$Lu = Au + B(Cu + DCu + D^2Cu + \cdots) = Au + By.$$

Because each call preserves norm, adding the squared exit norms leaves only a remainder $\|D^n C u\|^2$, which tends to zero, so $\sum_k x_k^\dagger x_k = I_X$. Closing the wire as in Figure 4 gives $U(u, y) = (Lu, y)$ and hence $\|Lu\| = \|u\|$. Since $\dim X = \dim X'$, L is unitary (Theorem B.1) [5, Thms. 4, 7, 8] [3, Thm. 3.3.15, Cor. 3.3.16].

Section 4 builds this loop in light, where delay lines impose the same wire equation.

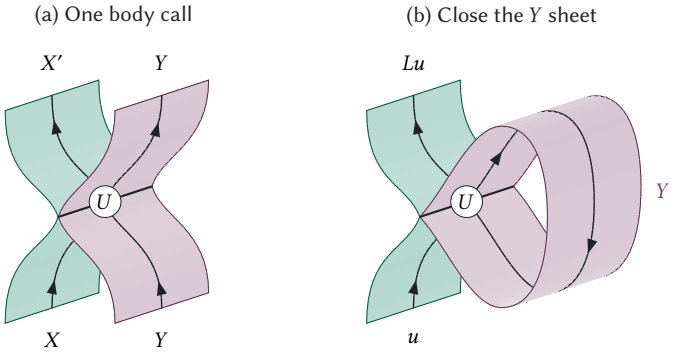

For `guardRound` on `unit`, the input amplitude is $u = 1$. Both ends of the purple sheet carry the same y, so

$$y = \tfrac{4}{5} + \tfrac{3}{5} y \quad \Longrightarrow \quad y = 2.$$

The green sheet carries the output $\tfrac{3}{5} - \tfrac{4}{5} \cdot 2 = -1$.

$$R_\theta \begin{pmatrix} 1 \\ 2 \end{pmatrix} = \begin{pmatrix} -1 \\ 2 \end{pmatrix}.$$


Fig. 4. In Unitary, the open body at left is $U : X \oplus Y \to X' \oplus Y$. Joining the two ends of the purple Y sheet at right gives its direct-sum trace $L = \mathrm{Tr}^Y(U) : X \to X'$.

For each basis input $|s\rangle$, solve $y = C|s\rangle + Dy$ and put y in column s of F. Together these equations give $(I_Y - D)F = C$. The output $A|s\rangle + By$ is then column s of $A + BF$.

$$\frac{\kappa \Downarrow U \quad U = \left(\begin{smallmatrix} A & B \\ C & D \end{smallmatrix}\right) \quad F : X \to Y \quad (I_Y - D)F = C}{\mathrm{trace}_c\, \kappa \Downarrow A + BF}.$$


An undetermined return. For `guardRound` we divided by $1 - 3/5$. To see why $I_Y - D$ can have no inverse, keep the original return on `back 1` and let a second value, `back 0`, return to itself.

```
round extraPort : Unit + Qubit = {
  exit unit ↔ [ 3/5 . exit unit + 4/5 . back 1];
  back 1    ↔ [-4/5 . exit unit + 3/5 . back 1];
  back 0    ↔ back 0
}
```



In the order `exit unit`, `back 1`, `back 0`, the matrix is $R_\theta \oplus I_1$. On input u the first return satisfies $y_1 = \frac{4}{5}u + \frac{3}{5}y_1$, so $y_1 = 2u$. The second equation, $y_0 = y_0$, allows any value. This is why $I_Y - D = \mathrm{diag}(2/5, 0)$ is singular (has no inverse). Starting from u gives $y_0 = 0$ because no call reaches the isolated port, but every choice gives the same output $(3/5)u - (4/5)y_1 = -u$.

Summing the returns gives one solution. If two solutions for the same input differ by w, subtracting their equations cancels Cu and leaves $Dw = w$. In the picture the full norm of w comes back on the lower wire, so unitarity leaves zero norm for Bw at the external port. The caller therefore receives the same output from either solution (Appendix B, Figure 16).




In the ring, light returns to the coupler one trip later. Czachor uses the same feedback equation to model a wormhole by feeding part of a particle's later output to its earlier input. The grandfather paradox follows a single history in which a traveler goes back and prevents their own departure. In

Czachor's model the different round trips contribute amplitudes to the same outgoing state. Their interference at the mouth of the lossless loop gives reflection with probability one [14, Thm. 1 and § IV].

Czachor asks what happens when the inverse used to obtain the external map fails [14, arXiv v8, after Eq. (45)]. For a finite unitary body the argument above gives the answer: $Bw = 0$, so the external output is unique, as in Bartha's finite trace theorem [5, Thm. 8].

3.3 Compiling away the loop

The wire equation gave us the gate $L = A + BF$. We can also write its clauses directly. In `guardRound`, the first clause sends $3/5$ to `exit unit` and $4/5$ to `back unit`. Follow the latter in the picture. One call sends $B = -4/5$ to the exit and $D = 3/5$ back to the same clause.

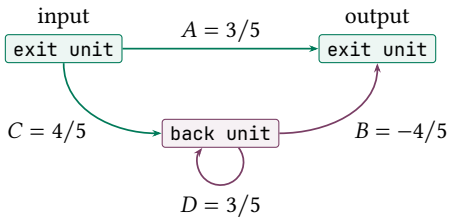

From unit amplitude on `back unit`, each further trip contributes one more factor of D. The exits sum to

$$B + BD + BD^2 + \cdots = \frac{B}{1 - D} = -2.$$

The first clause sends $C = 4/5$ there, giving $(4/5)(-2)$. The wire equation groups the same factors as $BF = (-4/5) \cdot 2$, with $F = C/(1 - D)$.

In the first clause we replace `back unit` by $-2\,(\texttt{exit unit})$. Both terms now leave by the same port, so we can add their coefficients and drop the external tag.

$$\texttt{exit unit} \leftrightarrow \tfrac{3}{5}\,(\texttt{exit unit}) + \tfrac{4}{5}\big(-2\,(\texttt{exit unit})\big) = -\texttt{exit unit} \qquad \rightsquigarrow \qquad \{* \leftrightarrow -1 \cdot *\}.$$

In `flipRound`, each call rotates the guard and flips a data bit, so neither `back 0` nor `back 1` returns to itself in one call. Follow `back 1` in Figure 5. It can return to `back 0` and then to `back 1`, with amplitude $3/5$ each way. Removing `back 0` turns those two steps into a single return with amplitude $9/25$. We therefore divide the remaining exits of `back 1` by $1 - 9/25$ before substituting them in the external clauses.

One call

$$\texttt{exit}\,0 \mapsto \tfrac{3}{5}\texttt{exit}\,1 + \tfrac{4}{5}\texttt{back}\,1 \qquad \texttt{exit}\,1 \mapsto \tfrac{3}{5}\texttt{exit}\,0 + \tfrac{4}{5}\texttt{back}\,0$$
$$\texttt{back}\,0 \mapsto -\tfrac{4}{5}\texttt{exit}\,1 + \tfrac{3}{5}\texttt{back}\,1 \qquad \texttt{back}\,1 \mapsto -\tfrac{4}{5}\texttt{exit}\,0 + \tfrac{3}{5}\texttt{back}\,0$$

Remove `back 0`

$$\texttt{exit}\,1 \mapsto \tfrac{3}{5}\texttt{exit}\,0 + \tfrac{4}{5}\big(-\tfrac{4}{5}\texttt{exit}\,1 + \tfrac{3}{5}\texttt{back}\,1\big) = \tfrac{3}{5}\texttt{exit}\,0 - \tfrac{16}{25}\texttt{exit}\,1 + \tfrac{12}{25}\texttt{back}\,1,$$
$$\texttt{back}\,1 \mapsto -\tfrac{4}{5}\texttt{exit}\,0 + \tfrac{3}{5}\big(-\tfrac{4}{5}\texttt{exit}\,1 + \tfrac{3}{5}\texttt{back}\,1\big) = -\tfrac{4}{5}\texttt{exit}\,0 - \tfrac{12}{25}\texttt{exit}\,1 + \tfrac{9}{25}\texttt{back}\,1.$$

Close `back 1`

$$\texttt{back}\,1 \mapsto \tfrac{25}{16}\big(-\tfrac{4}{5}\texttt{exit}\,0 - \tfrac{12}{25}\texttt{exit}\,1\big) = -\tfrac{5}{4}\texttt{exit}\,0 - \tfrac{3}{4}\texttt{exit}\,1.$$

Both exits

$$\texttt{exit}\,0 \mapsto \tfrac{3}{5}\texttt{exit}\,1 + \tfrac{4}{5}\big(-\tfrac{5}{4}\texttt{exit}\,0 - \tfrac{3}{4}\texttt{exit}\,1\big) = -\texttt{exit}\,0,$$
$$\texttt{exit}\,1 \mapsto \tfrac{3}{5}\texttt{exit}\,0 - \tfrac{16}{25}\texttt{exit}\,1 + \tfrac{12}{25}\big(-\tfrac{5}{4}\texttt{exit}\,0 - \tfrac{3}{4}\texttt{exit}\,1\big) = -\texttt{exit}\,1.$$

Fig. 5. Compiling `trace flipRound`. The top row gives the four clauses of $R_\theta \otimes \mathrm{X}$. Purple marks each return and the expression substituted for it. After the two substitutions, both inputs leave unchanged with amplitude -1.

For a general body, we evaluate each basis input as in Section 2 and choose a return $\texttt{back}\,q$. Write the evaluated clause as $\texttt{back}\,q \mapsto d\,(\texttt{back}\,q) + e$, where $d = D_{qq}$ is the amplitude to return to q and e contains the other outputs. If $d \neq 1$, we replace each occurrence of $\alpha\,(\texttt{back}\,q)$ in the other clauses

by $\alpha e/(1-d)$, collect equal patterns and delete the clause for q. If $d = 1$, unitarity makes the other entries in its row and column zero, so we can delete it directly, as in `extraPort`.


Proposition 3.1 (Compiling away the loop). *Given the expanded table of a finite unitary body, eliminating its returning basis values in any order produces a closed iso denoting L in exactly $|\mathscr{B}(c)|$ steps. The coefficients stay in the original subfield of $\mathbb{C}$.*

To recover the original wire equations we put back the value we substituted, choosing any value at an isolated port. Each step preserves unitarity, so we can continue until only the external clauses remain (Appendix B.1). Removing their tags gives ordinary code. For example, `trace kickbackExact` flips the data qubit and preserves its ancilla (Appendix F.1).

This applies elimination for finite contractions [3, Thm. 3.3.15] to clause tables. The regular step is Mason's signal-flow reduction [33, §§ 3.1–3.2], also used for zero-delay feedback when $I - D$ is invertible [20, Thm. 12, Eq. (12)] and for optical networks [43, App. A, Eq. (A1)]. With n external and m returning values, m steps each update at most $(n+m)^2$ entries. This costs $O(m(n+m)^2)$ field operations, with decidable equality for the test $d = 1$. These dimensions count basis values (2^q for q qubits). Compiling the resulting table into hardware gates is a further step.

Bends and crossings. In Unitary the trace $L = \mathrm{Tr}^Y(U)$ closes the return wire in one step. To draw the two bends separately, we need a type for the wire that runs back. An object $P = (P^+, P^-)$ of Int(Unitary) gives the spaces of rightward and leftward ports. A morphism $P \to Q$ takes input from both ends, so its matrix is a unitary $P^+ \oplus Q^- \to Q^+ \oplus P^-$ [28, § 4]. The embedding N keeps each gate's matrix and sends Y to $(Y, 0)$. Since 0 is the zero-dimensional space, $(Y, 0)$ carries amplitude only to the right and $(0, Y)$ only to the left.

Follow the return output of $N(U)$ around the cap ε. It travels left to the cup η and turns right. The crossing σ puts this leg at the input of the gate while the other passes below it (Appendix Figure 24(b)). Both bends pass the amplitude unchanged, so the return still satisfies $y = Cu + Dy$. The composite is $N(L)$, whose matrix is the gate we just compiled.

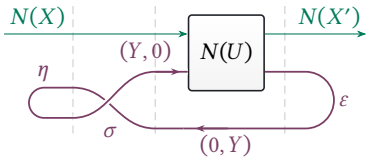

3.4 Making the sign observable

The clause for `trace guardRound` sends $|*\rangle$ to $-|*\rangle$, so a measurement gives $*$ with certainty, just as for the identity. To see the sign we need a second amplitude to compare with the one that went through the loop. In `bypassRound`, both belong to one qubit. Figure 6 draws $|0\rangle$ going straight through and $|1\rangle$ passing through `guardRound`, whose return still carries `Unit`.

```
round bypassRound : Qubit + Unit = {
  exit 0 ↔ exit 0;
  exit 1 ↔ [ 3/5 . exit 1 + 4/5 . back unit];
  back unit ↔ [-4/5 . exit 1 + 3/5 . back unit]
}
```

$$U_{\text{bypass}} = \left(\begin{array}{cc|c} 1 & 0 & 0 \\ 0 & t & -s \\ \hline 0 & s & t \end{array}\right)$$

The columns follow the clauses in order, with $t = 3/5$ and $s = 4/5$. Only the first clause carries the bypass, so the immediate exit is $x_0 = \mathrm{diag}(1, t)$. Every later exit comes from `back unit` and gives $x_{k+1} = \mathrm{diag}(0, -s^2 t^k)$ for $k \geq 0$. Closing the loop leaves $|0\rangle$ alone and sends $|1\rangle$ to $-|1\rangle$.

The caller runs the Hadamard test [11, p. 1, Eqs. (1)–(3)]. In `H; trace bypassRound; H; measure on 0`, the input is $|0\rangle$. The first Hadamard prepares $(|0\rangle + |1\rangle)/\sqrt{2}$, and the loop changes the plus to a minus. Either state gives equally likely bits if measured now. With exact coefficients $\pm 1/\sqrt{2}$, the

second Hadamard brings the paths together:

$$H\frac{|0\rangle - |1\rangle}{\sqrt{2}} = \tfrac{1}{2}(|0\rangle + |1\rangle) - \tfrac{1}{2}(|0\rangle - |1\rangle) = (\tfrac{1}{2} - \tfrac{1}{2})|0\rangle + (\tfrac{1}{2} + \tfrac{1}{2})|1\rangle = |1\rangle.$$

The caller therefore reads 1 with certainty. Had the loop preserved the sign, the two Hadamards would have returned it to 0.

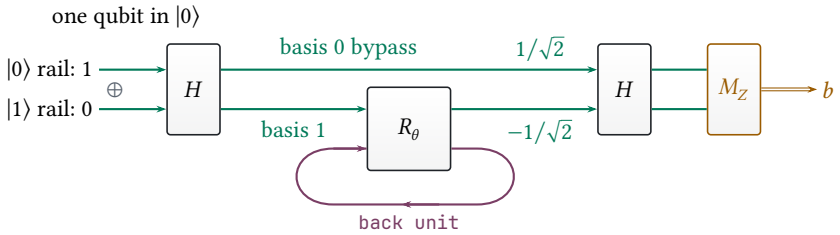


Fig. 6. The two rails carry the basis alternatives of one qubit $G = \mathbb{C}^2$. Each $H : G \to G$ and the closed loop $\mathrm{diag}(1, -1) : G \to G$ are in Unitary. The single wire after the second H carries the whole qubit. The final measurement $M_Z : G \rightsquigarrow G$ is a channel in CPTP, and it gives bit 1 with certainty.

4 The coherent loop in light

Fairbanks and Selinger ask whether the trace has a physical interpretation, and consider a device given the unitary as a black box [15, App. B]. For a given matrix, we can build the loop in light.

Proposition 4.1 (Optical feedback). *Let $U : X \oplus Y \to X' \oplus Y$ be a finite unitary body. Build U as a lossless optical network with one mode for each basis value [38], and connect each returning output to its matching input with a lossless delay line that brings light back in phase at a working frequency. Under steady illumination at that frequency, the network sends each external input u to Lu.*

Proof. At the working frequency each delay line returns its field unchanged. The steady amplitudes y on the returning inputs and v on the external outputs therefore satisfy $y = Cu + Dy$ and $v = Au + By$, the wire equations of Section 3. By Theorem B.1, every solution gives $v = Lu$. □

The matrix sets the couplers in a network of 2^n modes for an n-qubit body. Given an optical device with accessible return ports, we need only connect the delay lines. A fixed number of black-box gate calls gives a continuous response (Appendix B), whereas the time the light takes to settle can grow as we vary the coupling.

Each visit to the coupler in Figure 7 is a call of the body. Light entering the ring through C and circulating k more times leaves through B, giving the exit BD^kCu after $k + 1$ returns.

The two splitters in Figure 7 play the part of the Hadamards in Figure 6. When the ring changes the sign, the two paths cancel at the sum port and add at the difference port. Changing the wavelength changes the round-trip phase. Wang et al. used a ring on the shorter path to separate evenly spaced optical frequencies, sending odd-numbered frequencies mostly to one output and even-numbered ones to the other [44, Figs. 1 and 6].

Fairbanks and Selinger observed that the trace of the rotation jumps from $+1$ at $\theta = 0$ to -1 for $0 < \theta < 2\pi$ [15, Remark B.1]. At zero all the light goes straight through. Near zero, switch on a steady input of amplitude one with the ring empty and the return in phase. The direct field $t = \cos\theta$ arrives first. After $n \geq 1$ trips the output is $t - (1 - t^2)(1 + t + \cdots + t^{n-1}) = -1 + (1 + t)t^n$. At fixed n this approaches $+1$ as θ tends to zero. At fixed small positive θ, t^n decays and the output approaches -1. The weaker the coupling, the longer the ring takes to reverse the sign.

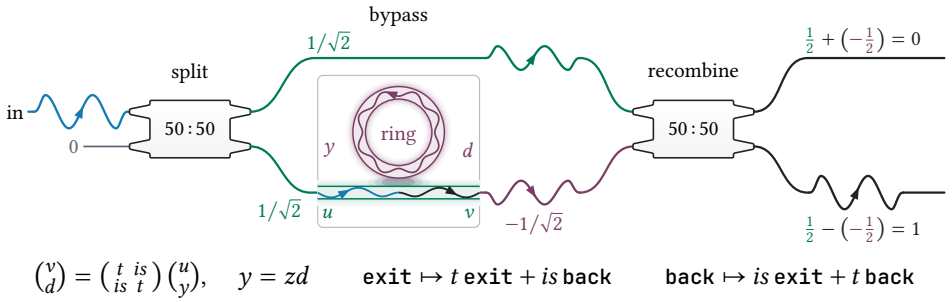



Fig. 7. At the gap in the lower path, light stays in its guide with amplitude $t = 3/5$ or crosses with amplitude $is = 4i/5$. The straight guide carries u to v. The ring feeds d back as $y = zd$ [2, 37]. Under steady illumination at $z = 1$, the two crossings give $(is)^2 = -s^2$ and each further trip gives t, exactly the exits of `guardRound`.

At resonance, unit input gives circulating field of magnitude $|s|/(1-t)$. Its weight $s^2/(1-t)^2 = \cot^2(\theta/2)$ grows without bound as $\theta \to 0$. For a frequency-independent coupler, multiplying by the round-trip time gives the Wigner–Smith delay [23, 41, 46]. Thus the jump occurs in the long-time response of a device whose delay diverges.

A pulse shorter than one trip around the ring records the exact count in its arrival time [37, Eqs. (30)–(33)]. In the program we can choose how much of that record to keep.

5 What allocation and hiding do to the loop

In `bypassRound` the caller again splits a qubit between the loop and a bypass. Now a bit starts at 0 and flips on each return. An exit on the third call has made two returns, and an exit on the fifth has made four. Both leave the bit at 0, so they can still interfere with each other and with the bypass. An odd number of returns leaves 1.

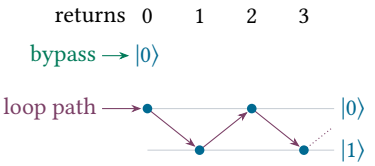

The caller did not supply a count register. We need the ability to allocate that register.

Adding allocation to ISO. Our caller supplies one qubit, with two basis values. Returning it alongside a counter bit gives four output pairs. An iso needs a square table, so we tag the input to give it four basis values as well.

```
tagBit :: (Qubit + Qubit) ↔ (Qubit x Qubit)
tagBit = {left x  ↔ ⟨0, x⟩;
          right x ↔ ⟨1, x⟩}
lift tagBit on 1
```



The bit records the input tag, so either clause can run backwards. The last line uses `lift` to supply the data through the left input. On 1 it gives $\langle 0, 1\rangle$. On the caller's superposition $u = (|0\rangle + |1\rangle)/\sqrt{2}$, it gives $|0\rangle \otimes u$. The 0 on the unused input means zero amplitude.

Heunen and Kaarsgaard call their allocation language UIL$_a$ ("yuppie-a") [24, § 3.3]. We use the same subscript in our executable clause language ISO$_a$, which embeds each iso with arr and adds lift:

$$\frac{\omega : a \leftrightarrow b}{\operatorname{arr}\omega : a \rightarrowtail b} \qquad \frac{\omega : a + d \leftrightarrow b}{\operatorname{lift}\omega : a \rightarrowtail b}.$$

If ω evaluates to U, then $\operatorname{arr}\omega$ uses the whole matrix, while $\operatorname{lift}\omega$ gives $U(u, 0)$ on input u. The columns for a are orthonormal, so this restriction still preserves inner products and gives an *isometry*, written $\rightarrowtail$. Two extensions that agree on those columns give the same isometry. This is

the identification made by Huot and Staton's completion by allocation [26, Thm. III.3]. Heunen and Kaarsgaard show that the resulting category $\mathscr{R}[\mathsf{Unitary}]$ is equivalent to Isometry under both sum and tensor [24, Thm. 22]. For $[K]$, the sum of $K \geq 1$ copies of 1, alloc_j prepares j alongside the data. Starting at zero and advancing on each return gives $\mathrm{count}_K\, \beta : a \rightarrowtail [K] \otimes b$ for $\beta : a + c \leftrightarrow b + c$. In `count K f on t`, the numeral `K` gives the counter size, `f` the round and `t` its input. In formulas the count comes first to label each exit. In an executable pair it comes last so we can discard it and return the data.

Adding hiding to $\textsc{iso}_a$. For the second Hadamard the caller wants just the data. We need the ability to hide the counter. In `bypassRound`, let u_0 sum the even exits, including the bypass, and u_1 the odd exits. The joint output is $w = |0\rangle \otimes u_0 + |1\rangle \otimes u_1$. To keep just the data, we take the partial trace of $ww^\dagger$ over the bit. Grouping rows and columns by the counter gives

$$\begin{pmatrix} u_0 u_0^\dagger & u_0 u_1^\dagger \\ u_1 u_0^\dagger & u_1 u_1^\dagger \end{pmatrix} \xrightarrow{\text{hide the bit}} u_0 u_0^\dagger + u_1 u_1^\dagger.$$


The partial trace adds the two diagonal blocks. The other two drop out because $\langle 0 \mid 1 \rangle = 0$. Exits carrying the same bit have already added their amplitudes in u_0 or u_1.

Heunen and Kaarsgaard add hiding in UII_a^χ ("yuppie-chi-a") [24, § 3.4]. Our $\textsc{iso}_a^\chi$ embeds each isometry with arr. We write hide for their second lift to name the output we discard.

$$\frac{v : a \rightarrowtail b}{\mathsf{arr}\, v : a \rightsquigarrow b} \qquad \frac{v : a \rightarrowtail b \otimes g \qquad \mathscr{B}(g) \neq \emptyset}{\mathsf{hide}\, v : a \rightsquigarrow b}.$$

To hide $[K]$ in the mathematical order $[K] \otimes b$, we first swap it into the g position. On a density matrix ρ (a positive operator of trace one), arr v gives $V \rho V^\dagger$ and hide v gives $\mathrm{tr}_g(V \rho V^\dagger)$, where V is the matrix of v. Isometric relabelings of g generate the equivalence in Heunen and Kaarsgaard's $\mathscr{L}[\mathsf{Isometry}]$ [24, Eq. (3), Thm. 22]. On isometries their quotient agrees with Huot and Staton's affine reflection: both give the category CPTP of completely positive trace-preserving maps with composition and tensor [25, Cor. 7]. To discard an inhabited b as in Appendix Figure 14, we hide b in $b \leftrightarrow 1 \otimes b$. This sends ρ to $\mathrm{tr}\, \rho$.

From a fresh bit to a measurement. Start a fresh bit at 0 and flip it when the data bit is 1. On basis input s this writes a copy of s. On a superposition $\alpha|0\rangle + \beta|1\rangle$, the two wires carry $\alpha|00\rangle + \beta|11\rangle$. Discarding the copy destroys the coherence between 0 and 1. Reading the data now gives 0 with probability $|\alpha|^2$ and 1 with probability $|\beta|^2$.




For any inhabited b, we lift a permutation that sends each selected input s to $\langle s, s \rangle$. This gives the basis copier $\mathrm{clone}_b : b \rightarrowtail b \otimes b$. Hiding its copy measures b in the computational basis [24, § 3.4.1].

$$\mathsf{measure}_b = \mathsf{hide}\, \mathsf{clone}_b, \qquad [\![\mathsf{measure}_b]\!](\rho) = \sum_{s \in \mathscr{B}(b)} P_s \rho P_s, \qquad P_s = |s\rangle\langle s|.$$

The separate construct $\mathrm{while}_c\, \beta : a \rightsquigarrow b$ copies the tag after each call and discards the copy. Coherence within each payload is preserved. Appendix A.5 gives the rules for empty types.

5.1 Keep a count

In `count 2 guardRound on unit`, the 2 tells us to keep the count modulo two. The first call sends $3/5$ to the exit with the bit still at 0. The other $4/5$ goes around with the bit flipped to 1. After two returns the bit is 0 again, so the first and third exits carry the same bit and payload.

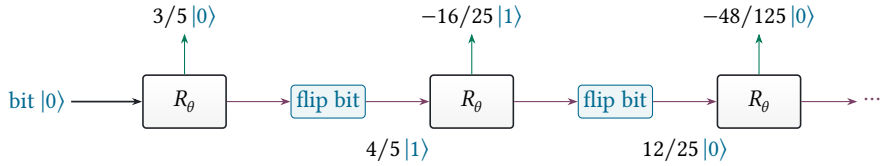


Every two returns multiply a delayed exit by $(3/5)^2$. The even tail sums to $-3/5$, canceling the immediate $3/5$. Only the odd exits survive.

$$\underbrace{\frac{3}{5} - \frac{48/125}{1-(3/5)^2}}_{\text{even returns}} = 0, \qquad \underbrace{\frac{-16/25}{1-(3/5)^2}}_{\text{odd returns}} = -1.$$

The loop path thus leaves with $-|1\rangle$ in the counter and the bypass with $|0\rangle$. On input $|+\rangle$ the joint output is $(|0\rangle \otimes |0\rangle - |1\rangle \otimes |1\rangle)/\sqrt{2}$, with the counter first. Hiding it leaves the data in $I/2$, which the second Hadamard preserves, so the caller reads 1 half the time.

With K values, the bit flip becomes $S_K : j \mapsto j+1 \bmod K$. For a common payload P, $F_{K,g}$ separates counter, guard and payload. The counter passes beside the body. After $F_{K,g}^{-1}$ restores the ports, the return carries both counter and payload. Only the counter passes through S_K.

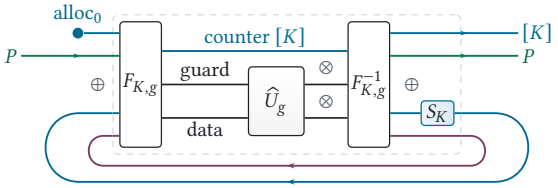

We allocate the counter at zero and close the return wire of the enlarged body β_K. After k returns the exit $x_k u$ carries $k \bmod K$ (Figure 8):

$$\mathsf{count}_K\, \beta = \mathsf{alloc}_0\,;\, \mathsf{arr}(\mathsf{trace}_{[K]\otimes c}\, \beta_K), \qquad R_K u = \sum_{k\geq 0} |k \bmod K\rangle \otimes x_k u. \tag{5.1}$$

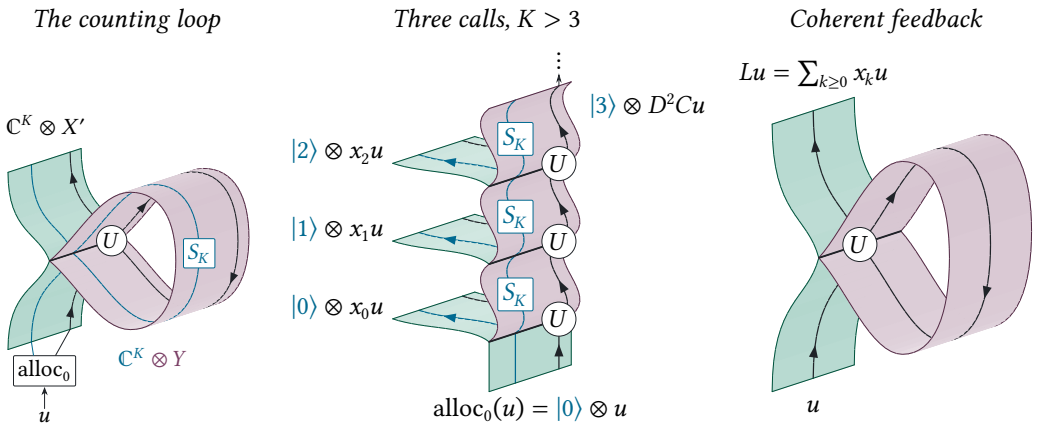


Fig. 8. Read upwards. Each trip around the folded sheet passes through S_K, advancing the counter. After three calls, $|3\rangle \otimes D^2Cu$ continues around the loop. Without the counter, all exits reach one output and their amplitudes add.

Knowing the body, the caller can reverse the enlarged loop to recover $|0\rangle \otimes u$, then apply L to the data. Even without the body, a Fourier measurement can erase the count: the uniform outcome has overlap $1/\sqrt{K}$ with every label and yields the unnormalized output $Lu/\sqrt{K}$, with probability $1/K$. Simply hiding the counter preserves interference within each label. For `bypassRound` the probability of 1 approaches $1/5$ as K grows but differs from `while` at every finite K (Appendix C). Allocating the counter and applying the enlarged unitary makes R_K an isometry. The exact record,


$Ru = \sum_k |k\rangle \otimes x_k u$ in $\ell^2(\mathbb{N}) \otimes X'$, lies outside the finite language. It too preserves the norm since $\sum_k \|x_k u\|^2 = \|u\|^2$ (Theorem B.1). Embedding the first K labels gives $R_K \to R$ in operator norm (Appendix C). Ying, Yu and Feng keep a fresh coin at each unfolding [50, § 6]. In Ying's coin loop the word $1^k 0$ records k returns followed by an exit [48, Eq. (34)]. Assolini and Di Pierro copy the guard into a fresh qubit at each test [4, § 4].

In the bounded loop of Yuan et al., an input register gives the number of repetitions. Shorter branches execute no-ops until all reach the same control state at the same step [51, § 6.1, Fig. 7]. The input retains the original count. Register-machine compilation also computes waits within a time bound [52, § 5]. Our counter records when amplitude leaves, even when one input gives exits at infinitely many counts.

5.2 Measure the returning tag

On the same input `0`, the caller now runs `H; while bypassRound; H; measure`. The counter gave the first and third exits the same bit. Measuring the tag after every call distinguishes the first exit from every later one.

Of the amplitude $1/\sqrt{2}$ sent down each path, all of the bypass and $3/5$ of the lower path leave on the first `exit`. At output 1 the second Hadamard takes their difference, giving amplitude $(1 - 3/5)/2 = 1/5$ and probability $1/25$.

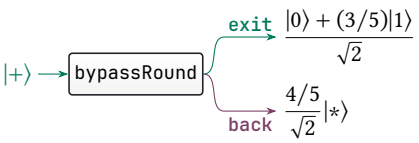

Only the lower path returns, with probability $|(4/5)/\sqrt{2}|^2 = 8/25$. Each further call returns with probability $9/25$, so this part eventually exits. It carries $|1\rangle$, which the second Hadamard sends to 1 half the time. Adding the first and later exits gives $1/25 + (8/25)(1/2) = 1/5$.

We match the bypass to the direct pulse in Figure 9, so only that pulse interferes with it. Half of each later pulse reaches the difference port, giving the same $1/5$ in total. Under steady illumination at the frequency of Figure 7, all the light reaches that port [37, Eqs. (30)–(33)].

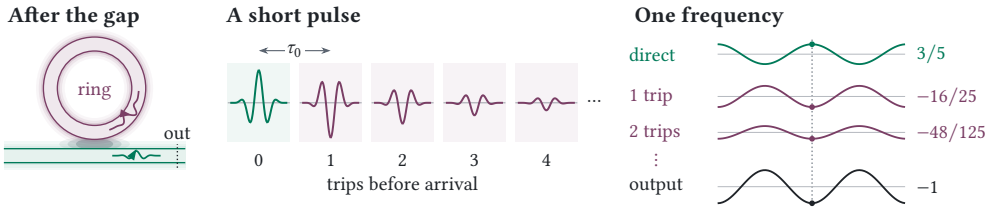


Fig. 9. A pulse shorter than one round-trip time τ_0 gives a separate pulse for each exit. With steady light at round-trip phase $z = 1$, the dots mark the field at the same instant. The output sums all the exits.

What one call measures. The body of `while` must be reversible, so it can contain a compiled `trace`, whereas another `while` has channel type. After each call we copy the outer tag and hide the copy. Both paths of `bypassRound` have the same tag on the first exit, so this measurement lets them interfere.

For external input ρ and return σ, hiding the copy leaves two diagonal blocks,

$$\Phi_U(\rho, \sigma) = \big(\underbrace{A\rho A^\dagger + B\sigma B^\dagger}_{\text{exit}}, \underbrace{C\rho C^\dagger + D\sigma D^\dagger}_{\text{return}}\big).$$

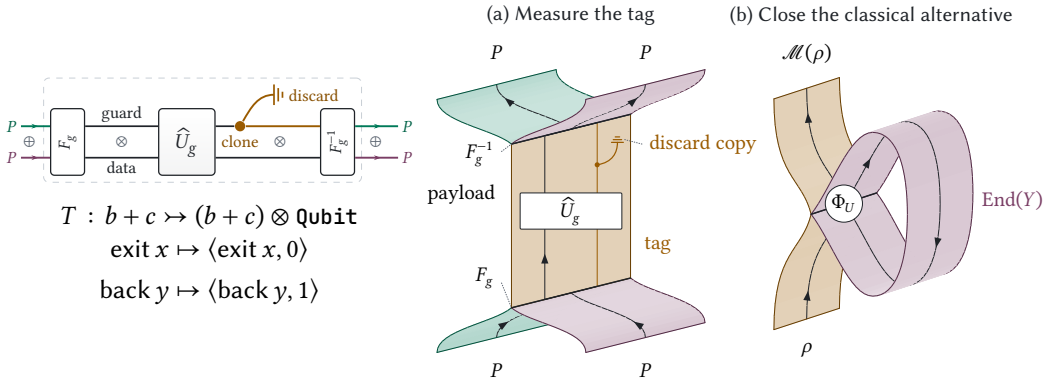


Fig. 10. One call is hide(arr $\beta; T$). With a common payload, F_g exposes the guard for copying and F_g^{-1} restores the ports. The circuit and sheet (a) show one call with both ports open. In (b) only the return block goes around again.

For a normalized input the block traces give the two probabilities. On $(\rho, 0)$ the first exit is $A\rho A^\dagger$ and the next is $(BC)\rho(BC)^\dagger$. Ying and Feng test the guard first [49]. When the external types agree, we apply U once before their first test. Each unfolding then adds one more of our exits, so Ying's least fixed point [47] gives their sum, also the trace over a classical sum [40, § 6.4] (Appendix C).

Adding the measured exits. An exit after k returns gives `exit` on call $k + 1$. Every later exit gives `back` on that call, so the measurement tells them apart. For `guardRound`, the first two exit amplitudes add to $3/5 - 16/25 = -1/25$ coherently. With measurement, their probabilities add to $(3/5)^2 + (-16/25)^2$ (Appendix Table 2).

We can defer measurement by keeping the tag outcomes in orthogonal states. Hiding this exact record adds the exits as density matrices:

$$\mathscr{M}(\rho) = \sum_{k \geq 0} x_k \rho x_k^\dagger = \mathrm{tr}_{\ell^2(\mathbb{N})}(R \rho R^\dagger), \qquad \mathscr{M} = [\![\mathsf{while}_c\ \beta]\!]. \tag{5.2}$$

Since $\sum_k x_k^\dagger x_k = I$ (Theorem B.1), the probabilities sum to one even without a last call. A smaller register can realize the same channel without storing the count (Appendix C).

Now consider the three loops together (Table 1). Closing the wire lets all exits interfere. A counter preserves interference within each label, while guard measurement separates every round. The same caller reads 1 with certainty for coherent feedback, with probability $1/2$ when we keep parity, and with probability $1/5$ when we measure on every round.

Table 1. Three ways to close `bypassRound` on $|+\rangle$ ($t = 3/5$). The first two rows give state vectors and the last a density matrix. Only the data reach the final H.

Loop	*General output*	*Bypass output*	Pr(1) after H
$\mathsf{trace}_c\ \beta : a \leftrightarrow b$	$Lu = \sum_{k \geq 0} x_k u$	$\lvert - \rangle$	1
$\mathsf{count}_K\ \beta : a \nrightarrow [K] \otimes b$	$R_K u = \sum_{k \geq 0} \lvert k \bmod K \rangle \otimes x_k u$	$\dfrac{\lvert 0 \rangle \otimes \lvert 0 \rangle - \lvert 1 \rangle \otimes \lvert 1 \rangle}{\sqrt{2}}$	$1/2$ $(K = 2)$
$\mathsf{while}_c\ \beta : a \rightsquigarrow b$	$\mathscr{M}(\rho) = \sum_{k \geq 0} x_k \rho x_k^\dagger$	$\dfrac{1}{2}\begin{pmatrix} 1 & t \\ t & 1 \end{pmatrix}$	$1/5$

6 When can a caller forget the difference?

A compiler may replace a measured loop with its compiled coherent gate when the two give the caller the same data on every input. For `guardRound` all exits carry `unit`. Their amplitudes sum to $3/5 - (16/25)/(1 - 3/5) = -1$, yet measuring the guard also returns `unit` with certainty. Adding a bypass changes the answer because it contributes only to the first exit. A record of any later exit tells the caller that the amplitude took the rotation path.

Suppose each exit x_k applies the same gate L up to a scalar b_k. Keeping the count then gives

$$Ru = \sum_k |k\rangle \otimes x_k u = \Big(\sum_k b_k |k\rangle\Big) \otimes Lu.$$

For `guardRound`, $L = -1$, so factoring out Lu leaves $-\frac{3}{5}|0\rangle + \frac{16}{25}|1\rangle + \frac{48}{125}|2\rangle + \cdots$ in the counter. The count can vary. What stays the same for every input is the whole count state, including the relative phases of its amplitudes.

Theorem 6.1 (Agreement on the returned data). *Let $\beta : a + c \leftrightarrow b + c$ be a finite iso with nonempty external input type a. Let $m = |\mathscr{B}(c)|$ be the number of basis values on the return wire. The following are equivalent.*

(1) The loops agree on the returned data, $\mathscr{M}(\rho) = L\rho L^\dagger$ for every input state ρ.
(2) One unit count vector $\xi \in \ell^2(\mathbb{N})$ satisfies $Ru = \xi \otimes Lu$ for every input u.
(3) The first $m + 1$ exits span a line. One is nonzero and every other exit in this list is a scalar multiple of it.

In this case $x_k = b_k L$ for every k, where $\xi = \sum_k b_k |k\rangle$, $\sum_k b_k = 1$ and $\sum_k |b_k|^2 = 1$.

If the loops agree, any direction orthogonal to Lu has probability zero on unit input u. Each exit contributes a nonnegative probability there, so $x_k u$ must lie along Lu. Since L sends distinct basis inputs to orthogonal outputs, a single multiplier on their sum must match both coefficients. Thus $x_k = b_k L$ on every input. For finitely many exits this also follows from the freedom in a Kraus representation [45, Cor. 2.23]. Conversely, tracing out a fixed unit count vector leaves $L\rho L^\dagger$.

The immediate exit is A. For $m > 0$, Cayley–Hamilton expresses D^j for every $j \geq m$ in terms of $I, D, \ldots, D^{m-1}$. Multiplying on the left by B and on the right by C puts every later exit BD^jC in the span of $x_1, \ldots, x_m$. Thus $x_0, \ldots, x_m$ span all exits even without a last round. For $m = 0$ only A remains.

This finite span is closed, so it contains the sum $L \neq 0$. If the span is a line, every exit is a multiple $b_k L$. Adding the exits gives $\sum_k b_k = 1$, and adding their probabilities on a unit input gives $\sum_k |b_k|^2 = 1$.

For dense matrices with $n = \dim X = \dim X'$, start with $P = C$. Forming BP and updating $P \leftarrow DP$ for successive exits costs $O(m^2n^2 + m^3n)$ field operations. A nonzero entry fixes the multiplier to test against the other entries, at a further cost of $O((m + 1)n^2)$ operations and comparisons. A mismatch exhibits two nonproportional exits. Near $t = 1$, rounding a small exit to zero can wrongly certify a replacement that changes the bypass caller's probability from $(1 - t)/2$ to one. Testing channels directly would require solving for up to m^2 return entries (Appendix D).

The bound is sharp. Suppose $|0\rangle$ exits at once and $|1\rangle$ after $m > 0$ returns, both unchanged (Appendix D). A count modulo m labels both exits zero and preserves $|+\rangle$, while measurement leaves $I/2$. All exits between $x_0 = |0\rangle\langle 0|$ and $x_m = |1\rangle\langle 1|$ are zero, so only x_m reveals the second direction.

Replacing the loop in a program. Andrés-Martínez compares the two traces on a body where they differ and studies weak guard measurements [3, §§ 3.3.3, 4.2]. We can now test the two paths in Figure 11 on a given program. In `flipRound`, the first two exits are $(3/5)\mathsf{X}$ and $-(16/25)I$, so they

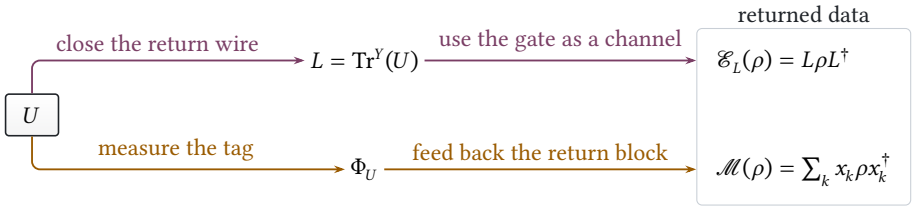


Fig. 11. Closing $U : X \oplus Y \to X' \oplus Y$ in Unitary gives $L : X \to X'$. Measuring the tag gives $\Phi_U : \mathrm{End}(X) \oplus \mathrm{End}(Y) \to \mathrm{End}(X') \oplus \mathrm{End}(Y)$, whose return we close by the classical-sum trace in CPTR (Appendix C). Both routes give the caller a channel from X to X' in CPTP.

span two directions. In `flipOnExit`, we flip the data only as it leaves. With $t = 3/5$ and $s = 4/5$, the immediate exit is $t\mathrm{X}$. After $k + 1$ returns the exit is $-s^2 t^k \mathrm{X}$, still a multiple of the same flip.

Leaving a hole in the caller where it uses the loop's data channel gives a *channel context*. We allow any channel before, after or beside the hole, and any finite measurement with the hole on one outcome. Equal channels agree in all these contexts, even on inputs entangled with a reference. If they differ, some input and measurement distinguish them.

Corollary 6.2 (Replacement in a caller). *Let β be a finite iso with m basis values on its return wire. Hiding the exact count always gives the measured loop. On a nonempty external input type, the measured loop may replace the coherent loop's data channel in every channel context if and only if $x_0, \ldots, x_m$ span a line. In that case, hiding the counter in $\mathsf{count}_K\ \beta$ gives the same channel for every $K \geq 1$. On an empty external input type all these channels agree.*


A channel context can keep a reference alongside the closed loop by tensoring its channel with the identity. In `bypassRound` we give the input another path by adding an identity summand to the body *before* closing it. Only the immediate exit acts on that summand. Since every later exit is zero there, it can be a multiple of the immediate exit only if it vanishes everywhere. With an identity bypass, replacement therefore holds exactly when every external input exits on the first call.

7 Reading the returns with a phase

On `guardRound` the caller receives `unit` whether we close the wire or measure the tag. Even the coherent gate -1 could have come from a clause that exits at once. To tell the two bodies apart, we put a phase on the return wire before we close it. Only the rotation sends amplitude through that wire.

Follow the arrow around the purple sheet. Each time the body sends amplitude back, the gate on that sheet multiplies it by $z = e^{i\varphi}$. The direct exit still gives $3/5$, while one crossing gives $-(16/25)z$ and two give $-(48/125)z^2$. With $t = 3/5$ and $s = 4/5$, each further trip contributes a factor tz, so the output amplitude is

$$\Theta_{\mathrm{rot}}(z) = t - s^2 z(1 + tz + t^2 z^2 + \cdots) = \frac{t - z}{1 - tz}.$$



On `exit unit` the first clause sends amplitude $s = 4/5$ back. If we measure the tag, the probability of `back` is its squared magnitude, $|s|^2 = 16/25$. After that outcome the next call starts on `back unit` and sends amplitude $t = 3/5$ back to that port, so the conditional probability of another return is

$|t|^2 = 9/25$. The probabilities of at least one, two and three returns are s^2, s^2t^2, s^2t^4. Adding these tail probabilities counts a run with k returns k times. The mean is $s^2/(1-t^2) = 1$ for every rotation with $s \neq 0$, since $s^2 = 1 - t^2$.

Now close the wire coherently and look just before the phase gate. For input amplitude 1, successive returns contribute $s, stz, s(tz)^2, \ldots$ to the same wire. At $z = 1$ they add to $s/(1-t) = 2$, as in the wire equation of Section 3. Its squared magnitude for unit input is the *circulating weight*, here $|2|^2 = 4$. At $z = -1$ the returns alternate in sign, so the same input gives amplitude $s/(1+t) = 1/2$ and weight $1/4$.

The bypass caller reads 1 at $z = 1$ and 0 at $z = -1$. To read the weight we compare nearby settings. Since $\Theta_{\mathrm{rot}}(e^{i\delta}) = -1 - 4i\delta + O(\delta^2)$, the output phase changes by 4δ to first order, while an immediate exit with sign -1 keeps its phase fixed. Heebner and Boyd identify this slope with the circulating intensity in a lossless ring on resonance [23, p. 848, Eq. (7)]. For a frequency-independent coupler, a frequency change $\Delta\omega$ adds $\tau_0 \Delta\omega$ per trip, so the delay is $4\tau_0$ relative to the direct path [41, 46].

From one return wire to a finite body. For input u, the successive returns add to $F_z u = Cu + zDCu + (zD)^2 Cu + \cdots$. The first return Cu lies in the emitting subspace Y_1, and D keeps each later return there. Since the powers of D decay geometrically on Y_1 (Theorem B.1), we can sum the series by inverting $I - zD$ on that subspace. The returns cross the phase gate once more on their way out through B, giving $\Theta(z)u = Au + zBF_z u$ with the immediate exit included.

Theorem 7.1 (The measured mean and the phase derivative). *For a finite unitary body with exit maps x_k, let Y_1 be the orthogonal complement of the return states that never emit. Put $D_1 = D|_{Y_1}$. At $z = e^{i\varphi}$ write $F_z = (I_{Y_1} - zD_1)^{-1} C$ for the return map, $\Theta(z) = \sum_{k\geq 0} z^k x_k$ for the output and $N = \sum_{k\geq 0} k\, x_k^\dagger x_k$ for the measured mean number of returns. Then*

$$Q(z) = -i\Theta(z)^\dagger \frac{d}{d\varphi}\Theta(e^{i\varphi}) = F_z^\dagger F_z, \qquad \frac{1}{2\pi}\int_0^{2\pi} Q(e^{i\varphi})\, d\varphi = N, \qquad \operatorname{tr} N = \dim Y_1.$$

At phase z the body sends $(u, zF_z u)$ to $(\Theta(z)u, F_z u)$. Since the body preserves inner products, comparing this call with one at w gives $I - \Theta(w)^\dagger \Theta(z) = (1 - \bar{w}z) F_w^\dagger F_z$ [6, Eq. (4.10)]. Differentiate in the angle of z at $z = w$. The factor $1 - \bar{w}z$ vanishes there, leaving $Q(w) = F_w^\dagger F_w$. In the phase average of $-i\Theta^\dagger\, d\Theta/d\varphi$, only equal powers of z survive, giving $\sum_k k x_k^\dagger x_k = N$. For the last identity we average $\operatorname{tr}(F_z^\dagger F_z)$ instead. Only equal powers survive here too. Moving the factors around each trace and using $CC^\dagger = I - D_1 D_1^\dagger$ gives

$$\sum_{j\geq 0} \operatorname{tr}(D_1^j CC^\dagger D_1^{\dagger j}) = \sum_{j\geq 0} \operatorname{tr}(D_1^j D_1^{\dagger j} - D_1^{j+1} D_1^{\dagger(j+1)}) = \operatorname{tr} I_{Y_1},$$

where consecutive terms cancel and D_1^j tends to zero.

An exit after k returns took $k+1$ calls. Counting the initial call therefore gives $I_X + N$. When $X' = X$, its trace $\dim X + \dim Y_1$ is the sum of the monitored mean return times over an orthonormal input basis, as in Bourgain et al. [7, Eq. (8), Thm. 3.2].

If every exit makes k returns, then $\Theta(e^{i\varphi}) = e^{ik\varphi} L$ and $Q(z) = kI$. When exits from different rounds interfere, the derivative instead gives $\langle u, Q(z)u\rangle = \|F_z u\|^2$ for unit input u (Appendix E).

Reading the weight with one qubit. In a Larmor clock, a spin turns while the particle is inside a region [9, 42]. In Figure 12 we prepare a qubit in $(|0\rangle + |1\rangle)/\sqrt{2}$. Each return applies z on the first branch and $ze^{i\delta}$ on the second.

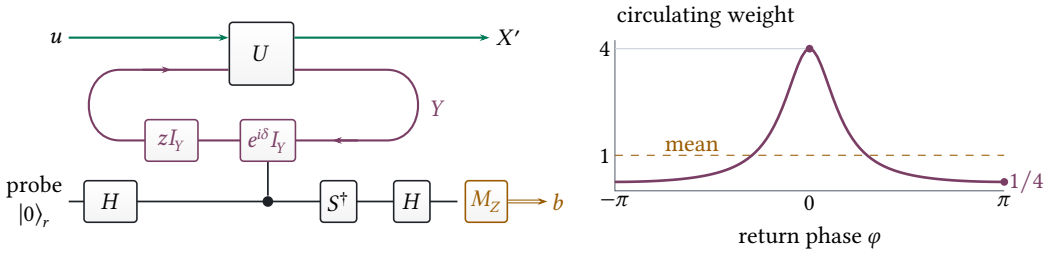


Fig. 12. Before the final gates the state is $(|0\rangle \otimes \Theta(z)u + |1\rangle \otimes \Theta(ze^{i\delta})u)/\sqrt{2}$. The curve gives the weight for `guardRound` and the dashed line its phase average.

Applying $S^\dagger$ and H before reading the probe gives the imaginary part of the overlap [11, p. 1, following Eq. (3)]:

$$\Pr(b=0) - \Pr(b=1) = \operatorname{Im}\langle \Theta(z)u, \Theta(ze^{i\delta})u\rangle = \delta\,\|F_z u\|^2 + O(\delta^2).$$

At $z = 1$, the probability of 0 is $1/2$ for an immediate exit and $1/2 + 2\delta + O(\delta^2)$ for `guardRound`. In n runs the difference of the two bit frequencies divided by δ estimates the weight 4, with bias $O(\delta)$ and variance at most $1/(n\delta^2)$ (Appendix I).

Averaging over the phase. We choose one angle uniformly per run and use it on every return. A cross term between j and k returns carries z^{k-j}, which averages to zero for $j \neq k$. In $|s+stz+st^2z^2+\cdots|^2$ this leaves the measured mean $s^2 + s^2t^2 + \cdots = 1$. At the output only equal counts survive. The probe keeps the relative phase $e^{ik\delta}$, as if we had measured k and rotated the probe by $k\delta$. Tracing out the probe gives


$$\mathcal{M}(\rho) = \frac{1}{2\pi}\int_0^{2\pi} \Theta(e^{i\varphi})\rho\Theta(e^{i\varphi})^\dagger\, d\varphi. \tag{7.1}$$

The bypass caller reads 1 one time in five over the circle and half the time over $\{1, -1\}$ (hidden parity, Appendix C). When all exits are multiples of one gate, as in `guardRound`, varying z changes only its overall phase. Conversely, if the channel stays fixed as we vary z, its value at $z = 1$ is the coherent channel and its average is $\mathcal{M}$, so the two agree (Appendix E).

8 What the caller can tell

When we feed one closed `guardRound` into another, the second undoes the sign change of the first. The caller sees a straight wire. To see the returns add, we put a phase on each return wire before closing either loop.

Follow the green sheet from the first loop's output to the second loop's input. Each return on a purple sheet picks up z. One trip below and two above therefore carry the same z^3 as three below, so their amplitudes add. With i returns in U and j in V, the exit map is $x_j^V x_i^U$. Collecting equal powers gives $x_k = \sum_{i+j=k} x_j^V x_i^U$. Two copies of `guardRound` thus give $\Theta_{\text{rot}}(z)^2$.

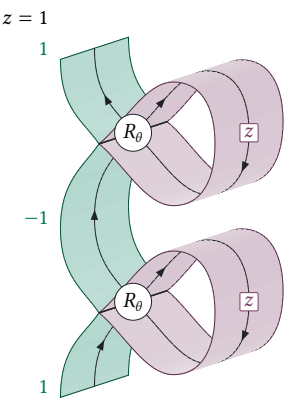

In two identical rings, a pulse shorter than their round-trip time separates the exits by total count. The first pulse passes straight through both. One round-trip time later, a trip in the first ring and a trip in the second reach the output together, so their amplitudes add.

At resonance the two sign changes cancel. To distinguish the pair from a straight wire, we vary the common return phase. Each ring contributes a slope of four, giving a weight of eight on unit input. For a small change δ the probe reads 0 with probability $1/2 + 4\delta + O(\delta^2)$ for the pair and $1/2$ for the wire. Averaging the weight over a full turn gives two: each measured loop makes one return on average. We can learn that mean while the exits still interfere, without assigning a trip count to any one detection.

9 Related work and future directions

Clément and Perdrix eliminate feedback from polarizing beam-splitter diagrams on at least two wires with invertible gates. A path in those diagrams traverses a feedback wire at most twice [12, § 5, Prop. 26]. In `guardRound`, amplitude can return arbitrarily many times. Because each return feeds the same clause, its wire equation adds all those trips at once. Our compiler eliminates one return value at a time, following Andrés-Martínez's proof for finite-dimensional contractions [3, Thm. 3.3.15].

Assolini and Di Pierro keep a fresh qubit at every guard test [4, Fig. 2 and § 4], while Andrés-Martínez varies the strength of the measurement [3, § 4.2]. Our counter lets exits with the same label interfere. When the record distinguishes every round, Section 6 decides whether discarding it gives the same data as letting all exits interfere.

Future work. When two loops run in sequence, a shared counter records their total. Separate counters can also tell us which loop made each return. We would like a test on the two clause tables that decides when sharing the counter preserves the caller's data channel.

10 Conclusion

Suppose the first loop lets $|0\rangle$ straight through and delays $|1\rangle$ by one return, while the second does the reverse. Either basis input reaches the caller unchanged after exactly one return. If we send in $|+\rangle$, a counter shared between the loops reads one with certainty and the qubit comes back in $|+\rangle$. With separate counters, learning which loop made the return tells us which basis state went through. Even if we discard both counters, a final Hadamard now gives either bit with equal probability. With the shared counter it gives zero every time (Appendix F).

In either experiment we know exactly how many returns there were. What the caller sees depends on whether it is also possible to tell where the return took place. In the two rings, arrival time records only the total. The second pulse tells us that the light went around once, and the two ways of making that one trip still interfere.

AI Use. The authors used ChatGPT Codex (GPT-6.1 Sol) for

- formatting, revising prose and generating TeX for diagrams and figures,
- surveying the literature and finding relevant papers, especially in optics,
- implementing allocation and hiding in the software artifact, and
- exploring ideas and checking the reasoning behind them.

The authors verified the results and take responsibility for the paper.

Data-Availability Statement

The software accompanying this paper includes the ISO archive (version 0.1.0.0, SHA-256 prefix `020e6ee2`) and a companion comparison script. It provides three things:

(1) The floating-point interpreter and runnable ISO programs for the examples.
(2) An exact checker for real rational clause tables that compiles coherent loops and tests whether measuring the guard gives the same data.
(3) A comparison on nine bodies that checks both elimination orders against the wire equations and the agreement test against a direct channel calculation.

If the paper is accepted, we plan to submit the artifact for evaluation.

References

[1] Samson Abramsky, Esfandiar Haghverdi, and Philip Scott. 2002. Geometry of Interaction and linear combinatory algebras. *Mathematical Structures in Computer Science* 12, 5 (2002), 625–665. doi:10.1017/S0960129502003730

[2] Paul M. Alsing, Edwin E. Hach, III, Christopher C. Tison, and A. Matthew Smith. 2017. Quantum-optical description of losses in ring resonators based on field-operator transformations. *Physical Review A* 95 (2017), 053828. arXiv:1608.01280 [quant-ph] doi:10.1103/PhysRevA.95.053828

[3] Pablo Andrés-Martínez. 2022. *Unbounded loops in quantum programs: categories and weak while loops.* Ph. D. Dissertation. University of Edinburgh. arXiv:2212.05371 doi:10.48550/arXiv.2212.05371

[4] Nicola Assolini and Alessandra Di Pierro. 2025. A Denotational Semantics for Quantum Loops. arXiv:2506.23320 [cs.PL]. doi:10.48550/arXiv.2506.23320

[5] Miklós Bartha. 2014. Quantum Turing automata. In *Proceedings of DCM 2012 (EPTCS, Vol. 143).* Open Publishing Association, Waterloo, NSW, Australia, 17–31. arXiv:1404.0074 doi:10.4204/EPTCS.143.2

[6] Jussi Behrndt, Seppo Hassi, and Henk de Snoo. 2009. Boundary Relations, Unitary Colligations, and Functional Models. *Complex Analysis and Operator Theory* 3, 1 (2009), 57–98. doi:10.1007/s11785-008-0064-z

[7] J. Bourgain, F. A. Grünbaum, L. Velázquez, and J. Wilkening. 2014. Quantum Recurrence of a Subspace and Operator-Valued Schur Functions. *Communications in Mathematical Physics* 329, 3 (2014), 1031–1067. arXiv:1302.7286 doi:10.1007/s00220-014-1929-9

[8] M. S. Brodskii. 1978. Unitary operator colligations and their characteristic functions. *Russian Mathematical Surveys* 33, 4, 159–191.

[9] M. Büttiker. 1983. Larmor precession and the traversal time for tunneling. *Phys. Rev. B* 27, 6178. doi:10.1103/PhysRevB.27.6178.

[10] Jacques Carette, Chris Heunen, Robin Kaarsgaard, and Amr Sabry. 2024. How to Bake a Quantum Π. *Proceedings of the ACM on Programming Languages* 8, ICFP, Article 236 (2024), 29 pages. doi:10.1145/3674625

[11] Andrew M. Childs. 2013. Quantum Algorithms, Lecture 18: Approximating the Jones Polynomial. University of Waterloo lecture notes. https://www.cs.umd.edu/~amchilds/teaching/w13/l18.pdf

[12] Alexandre Clément and Simon Perdrix. 2020. PBS-Calculus: A Graphical Language for Coherent Control of Quantum Computations. In *45th International Symposium on Mathematical Foundations of Computer Science (LIPIcs, Vol. 170).* Schloss Dagstuhl, Dagstuhl, Germany, 24:1–24:14. doi:10.4230/LIPIcs.MFCS.2020.24

[13] Cole Comfort, Antonin Delpeuch, and Jules Hedges. 2020. Sheet diagrams for bimonoidal categories. arXiv:2010.13361 doi:10.48550/arXiv.2010.13361

[14] Marek Czachor. 2019. Time travel without paradoxes: Ring resonator as a universal paradigm for looped quantum evolutions. *Physics Letters A* 383 (2019), 2704–2712. arXiv:1805.12129v8. doi:10.1016/j.physleta.2019.05.043

[15] Aaron David Fairbanks and Peter Selinger. 2025. On traces in categories of contractions. In *Proceedings of the 22nd International Conference on Quantum Physics and Logic (QPL 2025) (EPTCS, Vol. 426),* Alejandro Díaz-Caro, Ognyan Oreshkov, and Ana Belén Sainz (Eds.). Open Publishing Association, Waterloo, NSW, Australia, 79–99. arXiv:2502.14993 doi:10.4204/EPTCS.426.3

[16] Y. V. Fyodorov and H.-J. Sommers. 1997. Statistics of resonance poles, phase shifts and time delays in quantum chaotic scattering: Random matrix approach for systems with broken time-reversal invariance. *Journal of Mathematical Physics* 38, 1918–1981. doi:10.1063/1.531919.

[17] Jean-Yves Girard. 1995. Geometry of interaction III: accommodating the additives. In *Advances in Linear Logic.* Cambridge University Press, 329–389. doi:10.1017/CBO9780511629150.017.

[18] Robert Glück and Robin Kaarsgaard. 2018. A Categorical Foundation for Structured Reversible Flowchart Languages: Soundness and Adequacy. *Logical Methods in Computer Science* 14, 3, Article 16 (2018), 38 pages. doi:10.23638/LMCS-14(3:16)2018 (arXiv:1710.03666).

[19] John E. Gough. 2014. Feedback network models for quantum transport. *Physical Review E* 90 (2014), Article 062109. doi:10.1103/PhysRevE.90.062109

[20] John Gough and Matthew R. James. 2009. Quantum Feedback Networks: Hamiltonian Formulation. *Communications in Mathematical Physics* 287 (2009), 1109–1132. doi:10.1007/s00220-008-0698-8

[21] F. A. Grünbaum, L. Velázquez, A. H. Werner and R. F. Werner. 2013. Recurrence for Discrete Time Unitary Evolutions. *Communications in Mathematical Physics* 320, 543–569. doi:10.1007/s00220-012-1645-2.

[22] Masahito Hasegawa. 1997. Recursion from Cyclic Sharing: Traced Monoidal Categories and Models of Cyclic Lambda Calculi. In *Typed Lambda Calculi and Applications (Lecture Notes in Computer Science, Vol. 1210)*. Springer, 196–213. doi:10.1007/3-540-62688-3_37

[23] John E. Heebner and Robert W. Boyd. 1999. Enhanced all-optical switching by use of a nonlinear fiber ring resonator. *Optics Letters* 24, 12, 847–849. doi:10.1364/OL.24.000847.

[24] Chris Heunen and Robin Kaarsgaard. 2022. Quantum information effects. *Proc. ACM Program. Lang.* 6, POPL (2022), 2:1–2:27. arXiv:2107.12144 doi:10.1145/3498663

[25] Mathieu Huot and Sam Staton. 2019. Universal Properties in Quantum Theory. In *Proceedings of the 15th International Conference on Quantum Physics and Logic (QPL 2018)*, EPTCS 287, 213–223. doi:10.4204/EPTCS.287.12

[26] Mathieu Huot and Sam Staton. 2019. Quantum Channels as a Categorical Completion. In *34th Annual ACM/IEEE Symposium on Logic in Computer Science (LICS)*, 1–13. doi:10.1109/LICS.2019.8785700

[27] Roshan P. James and Amr Sabry. 2013. Isomorphic Interpreters from Logically Reversible Abstract Machines. In *Reversible Computation: 4th International Workshop, RC 2012, Revised Papers (Lecture Notes in Computer Science, Vol. 7581)*. Springer, Berlin, Heidelberg, 57–71. doi:10.1007/978-3-642-36315-3_5

[28] André Joyal, Ross Street, and Dominic Verity. 1996. Traced monoidal categories. *Mathematical Proceedings of the Cambridge Philosophical Society* 119, 3 (1996), 447–468. doi:10.1017/S0305004100074338

[29] Robin Kaarsgaard and Mathys Rennela. 2021. Join Inverse Rig Categories for Reversible Functional Programming, and Beyond. In *Proceedings of the 37th Conference on the Mathematical Foundations of Programming Semantics (MFPS 2021) (EPTCS, Vol. 351)*. Open Publishing Association, Waterloo, NSW, Australia, 152–167. doi:10.4204/EPTCS.351.10 (arXiv:2105.09929).

[30] Louis Lemonnier. 2024. *The Semantics of Effects: Centrality, Quantum Control and Reversible Recursion.* Ph. D. Dissertation. Université Paris-Saclay. arXiv:2406.07216 doi:10.48550/arXiv.2406.07216

[31] Noah Linden and Sandu Popescu. 1998. The halting problem for quantum computers. arXiv:quant-ph/9806054 doi:10.48550/arXiv.quant-ph/9806054

[32] Octavio Malherbe, Philip Scott, and Peter Selinger. 2012. Partially traced categories. *Journal of Pure and Applied Algebra* 216, 12 (2012), 2563–2585. arXiv:1107.3608 doi:10.1016/j.jpaa.2012.03.026

[33] Samuel J. Mason. 1953. Feedback Theory: Some Properties of Signal Flow Graphs. Technical Report 153. Research Laboratory of Electronics, MIT.

[34] Microsoft. 2025. Conditional loops in Q#. *Microsoft Learn.* https://learn.microsoft.com/en-us/azure/quantum/user-guide/language/expressions/conditionalloops.

[35] John M. Myers. 1997. Can a Universal Quantum Computer Be Fully Quantum? *Physical Review Letters* 78, 1823–1824. doi:10.1103/PhysRevLett.78.1823.

[36] OpenQASM. Classical instructions. *OpenQASM Language Specification*, section on while loops. https://openqasm.com/language/classical.html#while-loops.

[37] M. G. Raymer and C. J. McKinstrie. 2013. Quantum Input-Output Theory for Optical Cavities with Arbitrary Coupling Strength: Application to Two-Photon Wave-Packet Shaping. *Physical Review A* 88 (2013), 043819. arXiv:1309.5915 [quant-ph] doi:10.1103/PhysRevA.88.043819

[38] Michael Reck, Anton Zeilinger, Herbert J. Bernstein, and Philip Bertani. 1994. Experimental realization of any discrete unitary operator. *Physical Review Letters* 73 (1994), 58–61. doi:10.1103/PhysRevLett.73.58

[39] Amr Sabry, Benoît Valiron, and Juliana Kaizer Vizzotto. 2018. From symmetric pattern-matching to quantum control. In *FoSSaCS 2018*. Springer, Cham, 348–364. arXiv:1804.00952 doi:10.1007/978-3-319-89366-2_19

[40] Peter Selinger. 2004. Towards a quantum programming language. *Mathematical Structures in Computer Science* 14, 4, 527–586. https://doi.org/10.1017/S0960129504004256.

[41] Felix T. Smith. 1960. Lifetime Matrix in Collision Theory. *Physical Review* 118, 1 (1960), 349–356. doi:10.1103/PhysRev.118.349

[42] Aephraim M. Steinberg. 1995. How much time does a tunneling particle spend in the barrier region? *Phys. Rev. Lett.* 74, 2405–2409. doi:10.1103/PhysRevLett.74.2405.

[43] Nikolas Tezak, Armand Niederberger, Dmitri S. Pavlichin, Gopal Sarma, and Hideo Mabuchi. 2012. Specification of photonic circuits using Quantum Hardware Description Language. *Philosophical Transactions of the Royal Society A* 370, 5270–5290. https://arxiv.org/abs/1111.3081.

[44] Songli Wang, Yuyang Wang, Swarnava Sanyal, Robert Parsons, Xingchen Ji, Yoshitomo Okawachi, Xiang Meng, Michal Lipson, Alexander Gaeta, and Keren Bergman. 2025. Automated tuning of a ring-assisted MZI-based interleaver for Kerr frequency combs. *Optics Letters* 50, 2 (2025), 698–701. doi:10.1364/OL.546772

[45] John Watrous. 2018. *The Theory of Quantum Information.* Cambridge University Press, Cambridge, UK. doi:10.1017/9781316848142

[46] Eugene P. Wigner. 1955. Lower Limit for the Energy Derivative of the Scattering Phase Shift. *Physical Review* 98, 145–147. doi:10.1103/PhysRev.98.145.

[47] Mingsheng Ying. 2011. Floyd–Hoare Logic for Quantum Programs. *ACM Transactions on Programming Languages and Systems* 33, 6, Article 19 (2011), 49 pages. arXiv:0906.4586v1. doi:10.1145/2049706.2049708

[48] Mingsheng Ying. 2014. Quantum Recursion and Second Quantisation. arXiv:1405.4443 [quant-ph]. doi:10.48550/arXiv.1405.4443

[49] Mingsheng Ying and Yuan Feng. 2010. Quantum loop programs. *Acta Informatica* 47, 4 (2010), 221–250. arXiv:quant-ph/0605218 doi:10.1007/s00236-010-0117-4

[50] Mingsheng Ying, Nengkun Yu, and Yuan Feng. 2012. Defining Quantum Control Flow. arXiv:1209.4379v1.

[51] Charles Yuan, Agnes Villanyi, and Michael Carbin. 2024. Quantum control machine: the limits of control flow in quantum programming. *Proc. ACM Program. Lang.* 8, OOPSLA1 (2024), 1–28. arXiv:2304.15000 doi:10.1145/3649811

[52] Zhicheng Zhang and Mingsheng Ying. 2025. Quantum register machine: efficient implementation of quantum recursive programs. *Proc. ACM Program. Lang.* 9, PLDI, Article 180 (2025), 26 pages. arXiv:2408.10054 doi:10.1145/3729283

A Typing and interpreting the clauses

A.1 Syntax

In `trace guardRound on unit`, `trace guardRound` closes the return wire of the named table and `on` applies the resulting iso to `unit`. Figure 13 gives the grammar. Types are built from 0 and 1 by sum and tensor, written `+` and `x` in source types.

$$
\begin{aligned}
a, b &::= 0 \mid 1 \mid a + b \mid a \otimes b \\
v &::= * \mid x \mid \mathsf{left}\ v \mid \mathsf{right}\ v \mid \langle v_1, v_2 \rangle \mid \mathsf{exit}\ v \mid \mathsf{back}\ v \\
p, q &::= * \mid x \mid \langle p, q \rangle \\
e &::= v \mid \textstyle\sum_i \alpha_i e_i \mid \mathsf{let}\ p = \omega\ q\ \mathsf{in}\ e \\
\omega &::= f \mid \{v_i \leftrightarrow e_i\}_{i \in I} \mid \omega\,;\,\omega \mid \omega \oplus \omega \mid \omega \otimes \omega \mid \omega^{\dagger} \mid \mathsf{trace}_c\ \omega \\
t &::= e \mid \omega\, t \\
\mathit{decl} &::= f :: a \leftrightarrow b\,;\ f = \omega \mid \mathsf{round}\ f\ :\ a + c = \{v_i \leftrightarrow e_i\}_{i \in I}
\end{aligned}
$$

Fig. 13. Finite iso definitions. A name f refers to an earlier closed definition. The coefficient α_i is a complex scalar. A signature uses `::`, while the `round` abbreviation uses `:`. In trace_c, the return has type c.

The surface patterns exit v and back v elaborate recursively to left v and right v. This rewrite preserves payloads and nesting, and is performed before matching or typing by the core rules below. The remaining executable abbreviations are those of Section 2: `Unit`, `unit`, `Qubit` and its basis values, bracketed scalar combinations, combinator composition and `on` application. Listings typeset the source token `<->` as $\leftrightarrow$ and pair delimiters `<`, `>` as $\langle$, $\rangle$.

A.2 Statics

We check declarations in order. When a clause calls a named iso, its definition is already available. When it calls an iso written inside the clause, that iso is a smaller subprogram. We can therefore evaluate the call while checking the enclosing table, by induction on the declarations and their subprograms. Write Σ ok when all declarations in Σ have passed this check. A new name f must be fresh, and its definition must have its declared type using only the earlier bindings.

$$
\frac{}{\emptyset\ \mathsf{ok}} \qquad \frac{\Sigma\ \mathsf{ok} \quad f \notin \mathrm{dom}(\Sigma) \quad \Sigma \vdash \omega\ :\ a \leftrightarrow b}{\Sigma, (f = \omega\ :\ a \leftrightarrow b)\ \mathsf{ok}}.
$$

A `round` declaration checks the table at the same type on both sides and binds its name to the open body. Writing $\Sigma \vdash d \Rightarrow \Sigma'$ for declaration elaboration, we have

$$
\frac{\Sigma\ \mathsf{ok} \quad f \notin \mathrm{dom}(\Sigma) \quad \Sigma \vdash \mathscr{T}\ :\ (a + c) \leftrightarrow (a + c)}{\Sigma \vdash \mathtt{round}\ f\ :\ a + c = \mathscr{T} \Rightarrow \Sigma, (f = \mathscr{T}\ :\ (a + c) \leftrightarrow (a + c))}.
$$

An ordinary iso signature still permits distinct external types. The binding $f = \omega\ :\ a \leftrightarrow b$ represents the surface declaration $f :: a \leftrightarrow b\,;\ f = \omega$; listings may separate these parts by a newline. Write Δ for a finite set of distinct typed value variables. In Δ_1, Δ_2 the two domains must be disjoint. Each judgment below uses this convention, including inside a clause with an empty set of variables. The empty table presents the unique map on 0. Whenever we use a unit input or a nonzero operator line we assume the corresponding external type is inhabited.

Patterns and expressions. The finite basis is defined recursively:

$$
\mathscr{B}(0) = \emptyset, \qquad \mathscr{B}(1) = \{*\},
$$
$$
\mathscr{B}(a + b) = \mathsf{left}\,\mathscr{B}(a) \sqcup \mathsf{right}\,\mathscr{B}(b), \quad \mathscr{B}(a \otimes b) = \mathscr{B}(a) \times \mathscr{B}(b).
$$

An environment for Δ assigns each variable a basis value of its type. A variable matches any such value; a constructor matches its own tag, and a pair matches its two components. Write $\Delta \vdash v : a$ when a basis pattern is well typed. The rules are

$$\emptyset \vdash * : 1 \qquad x : a \vdash x : a \qquad \frac{\Delta \vdash v : a}{\Delta \vdash \mathrm{left}\ v : a + b} \qquad \frac{\Delta \vdash v : b}{\Delta \vdash \mathrm{right}\ v : a + b}$$

$$\frac{\Delta_1 \vdash v : a \qquad \Delta_2 \vdash w : b}{\Delta_1, \Delta_2 \vdash \langle v, w \rangle : a \otimes b}.$$

The basis assignments for a context Δ form $\mathscr{B}(\Delta) = \prod_{(x:a)\in\Delta} \mathscr{B}(a)$. The empty product contains the unique empty assignment. If any variable has an empty basis, the product is empty. Write $\mathscr{H}(\Delta) = \mathbb{C}^{\mathscr{B}(\Delta)}$. A product pattern p with $\Delta \vdash p : b$ gives a bijection $\gamma \mapsto p[\gamma]$ from $\mathscr{B}(\Delta)$ to $\mathscr{B}(b)$. The unit pattern sends the unique empty assignment to $*$, and a variable acts as the identity. For a pair we can recover the assignment by matching each component and joining the two assignments, since their contexts are disjoint. This gives the inverse by induction on p, also for empty bases.

The unit, variable and pair rules also type the product patterns p, q in Figure 13. In the argument position q these rules assemble already bound values. In the result position p they bind fresh variables of the indicated types. A single variable in either position may stand for a value of any type. For expressions we write $\Sigma; \Delta \vdash e : a$ and use

$$\frac{\Delta \vdash v : a}{\Sigma; \Delta \vdash v : a} \qquad \frac{\Sigma; \Delta \vdash e_i : a\ (i \in I) \qquad \alpha_i \in \mathbb{C}}{\Sigma; \Delta \vdash \sum_{i\in I} \alpha_i e_i : a}$$

$$\frac{\Delta_1 \vdash q : a \qquad \Sigma \vdash \omega : a \leftrightarrow b \qquad \Delta_p \vdash p : b \qquad \Sigma; \Delta_2, \Delta_p \vdash e : d}{\Sigma; \Delta_1, \Delta_2 \vdash \mathsf{let}\ p = \omega\, q\ \mathsf{in}\ e : d}.$$

In the last rule the variables in p are fresh and pairwise distinct. A product pattern of type b binds every basis output, by the bijection above. The sum rule permits an empty index set in any stated context Δ; its denotation is the zero linear map from $\mathscr{H}(\Delta)$. Such an expression cannot supply an entire column of a nonempty unitary table. A finite first-order term is a closed expression, or an application of a closed iso to a term of its domain. Writing $\Sigma \vdash t : a$ for a closed term, its rules are

$$\frac{\Sigma; \emptyset \vdash e : a}{\Sigma \vdash e : a} \qquad \frac{\Sigma \vdash t : a \qquad \Sigma \vdash \omega : a \leftrightarrow b}{\Sigma \vdash \omega t : b}.$$

This suffices for feeding a superposition of ground values to a program.

For a matrix M with input columns s and output rows t, row s of $M^\dagger$ is the conjugate of column s of M. Consequently its Gram matrix has entries

$$(M^\dagger M)_{ss'} = \sum_{t\in\mathscr{B}(b)} \overline{M_{ts}} M_{ts'}.$$

Each product pairs amplitudes in the same output row. At $s = s'$ it contributes to the squared norm of one column; at $s \neq s'$ it contributes to the inner product between two columns.

Let M have one column for each $s \in \mathscr{B}(a)$, filled with the coefficients of the expression in the uniquely matching clause under its ground substitution. The following rule imposes a finite extensional check. Its orthogonality premise concerns fully expanded outputs, so it need not infer

linear independence from surface syntax.

$$\frac{\Delta_i \vdash v_i : a \quad \Sigma; \Delta_i \vdash e_i : b \quad (i \in I) \qquad \big(v_i[\mathscr{B}(\Delta_i)]\big)_{i\in I} \text{ disjointly covers } \mathscr{B}(a) \qquad |\mathscr{B}(a)| = |\mathscr{B}(b)| \quad M^\dagger M = I}{\Sigma \vdash \{v_i \leftrightarrow e_i\}_{i\in I} : a \leftrightarrow b}$$

Here $v_i[\mathscr{B}(\Delta_i)]$ is the set of all ground instances of pattern v_i. The coverage premise requires these sets to be disjoint and their union to be $\mathscr{B}(a)$. An empty instance set is permitted and contributes no column. This rule is exact over a specified coefficient domain with exact equality and arithmetic, for example $\mathbb{Q}(i, \sqrt{2})$, which contains the Hadamard coefficients. With mathematical complex parameters it is a well-formedness predicate; exact equality of arbitrary descriptions of complex numbers is not assumed decidable.

Reversible combinators. For $M \in \mathbb{C}^{\mathscr{B}(b)\times\mathscr{B}(a)}$ the atom rule is

$$\frac{|\mathscr{B}(a)| = |\mathscr{B}(b)| \qquad M^\dagger M = I}{[M] : a \leftrightarrow b}.$$

Write u, v for reversible programs and omit the common Σ in the following rules. A bound name has the type at its declaration. For finite types we have the structural isos of Π as abbreviations for the corresponding permutation clauses, including identity, symmetries and distributivity [27, § 2]. The reversible rules are

$$\frac{f : a \leftrightarrow b \in \Sigma}{f : a \leftrightarrow b} \qquad \frac{u : a \leftrightarrow b \qquad v : b \leftrightarrow d}{u\,;\, v : a \leftrightarrow d} \qquad \frac{u : a \leftrightarrow b}{u^\dagger : b \leftrightarrow a}$$

$$\frac{u : a \leftrightarrow b \qquad v : c \leftrightarrow d}{u \oplus v : a + c \leftrightarrow b + d} \qquad \frac{u : a \leftrightarrow b \qquad v : c \leftrightarrow d}{u \otimes v : a \otimes c \leftrightarrow b \otimes d} \qquad \frac{\beta : a + c \leftrightarrow b + c}{\mathrm{trace}_c\, \beta : a \leftrightarrow b}.$$

A.3 Dynamics

Evaluating an expression. Let $\gamma \in \mathscr{B}(\Delta)$ assign basis values to the variables in a linear context Δ, and write $\gamma \vdash e \Downarrow \psi$ when evaluation returns the finite output vector ψ. For a value pattern v, $v[\gamma]$ is its ground instance. Values and sums evaluate by

$$\frac{}{\gamma \vdash v \Downarrow |v[\gamma]\rangle} \qquad \frac{\gamma \vdash e_i \Downarrow \psi_i \ (i \in I)}{\gamma \vdash \sum_i \alpha_i e_i \Downarrow \sum_i \alpha_i \psi_i}.$$

For let $p = \omega q$ in e, split the input assignment as $\gamma_1 \uplus \gamma_2$ according to the typing rule: q uses precisely γ_1, and e retains γ_2. Write $U|q[\gamma_1]\rangle = \sum_t a_t|t\rangle$, where $\omega \Downarrow U$. Matching the product pattern p with t gives the fresh assignment γ_t. The application rule is

$$\frac{\omega \Downarrow U \quad \gamma_2 \uplus \gamma_t \vdash e \Downarrow \psi_t \quad (t \in \mathscr{B}(b))}{\gamma_1 \uplus \gamma_2 \vdash \mathsf{let}\ p = \omega q\ \mathsf{in}\ e \Downarrow \sum_t a_t \psi_t}.$$

Here b is the output type of ω. Each alternative of a sum uses the same assignment. In a local call, only the bindings in γ_2 pass directly to the continuation. For closed terms, $t \Downarrow \psi$ uses the empty variable assignment, with

$$\frac{\varnothing \vdash e \Downarrow \psi}{e \Downarrow \psi} \qquad \frac{\omega \Downarrow U \qquad t \Downarrow \psi}{\omega t \Downarrow U\psi}.$$

The iso environment is fixed throughout. Names refer only to earlier definitions and Proposition 3.1 evaluates a trace in finitely many steps, even when infinitely many exits contribute. Write $E_e(s;\gamma)$ for the amplitude of output s when we evaluate e in environment γ. In a local application this gives

$$E_{\mathrm{let}}(s;\gamma_1,\gamma_2) = \sum_{t\in\mathscr{B}(b)} U_{t,q[\gamma_1]}\, E_e(s;\gamma_2,\gamma_t).$$

Here t ranges over intermediate basis outputs. Its amplitude is the entry of U in the column selected by $q[\gamma_1]$. Matching p to t gives exactly one assignment γ_t for the continuation. Multiplying its column by that amplitude and adding over t is ordinary matrix multiplication, with γ_2 carried through. There is no measurement or normalization between the two maps.

Elaboration and matrix evaluation. The matrix programs have grammar

$$\kappa ::= [M] \mid \kappa;\kappa \mid \kappa \oplus \kappa \mid \kappa \otimes \kappa \mid \kappa^\dagger \mid \mathsf{trace}_c\, \kappa.$$

The combinators κ of Section 2 have ground checked tables as atoms. Write $\mathscr{E}_\Sigma(\omega)$ for elaboration. If $f = \omega_f$ is a declaration in Σ, let Σ_f be its earlier prefix, the environment in which ω_f was checked. With M the evaluated columns of a table $\mathscr{T}$, the definition is

$$\begin{aligned}
\mathscr{E}_\Sigma(\mathscr{T}) &= [M], & \mathscr{E}_\Sigma(f) &= \mathscr{E}_{\Sigma_f}(\omega_f),\\
\mathscr{E}_\Sigma(\omega;\nu) &= \mathscr{E}_\Sigma(\omega);\mathscr{E}_\Sigma(\nu), & \mathscr{E}_\Sigma(\omega\oplus\nu) &= \mathscr{E}_\Sigma(\omega)\oplus\mathscr{E}_\Sigma(\nu),\\
\mathscr{E}_\Sigma(\omega\otimes\nu) &= \mathscr{E}_\Sigma(\omega)\otimes\mathscr{E}_\Sigma(\nu), & \mathscr{E}_\Sigma(\omega^\dagger) &= \mathscr{E}_\Sigma(\omega)^\dagger,\\
\mathscr{E}_\Sigma(\mathsf{trace}_c\,\omega) &= \mathsf{trace}_c\,\mathscr{E}_\Sigma(\omega).
\end{aligned}$$

In particular, elaborating `guardRound` gives the atom $[R_\theta]$. Elaborating `trace guardRound` gives $\mathsf{trace}_1[R_\theta]$. Each equation preserves the source and target types. Only the explicit `trace` connects a return wire.

If $\kappa \Downarrow M$ and $\lambda \Downarrow N$, the ordinary matrix rules, used with their typed premises, are

$$[M] \Downarrow M, \qquad (\kappa;\lambda) \Downarrow NM,$$

$$(\kappa\oplus\lambda) \Downarrow M\oplus N, \quad (\kappa\otimes\lambda) \Downarrow M\otimes N, \quad \kappa^\dagger \Downarrow M^\dagger.$$

The feedback rule completes them:

$$\frac{\kappa \Downarrow U \quad U = \left(\begin{smallmatrix} A & B \\ C & D \end{smallmatrix}\right) \quad F : X \to Y \quad (I_Y - D)F = C}{\mathsf{trace}_c\,\kappa \Downarrow A + BF}.$$

A column of F gives the returning amplitude for one basis input. The system can have several solutions when $I_Y - D$ is singular. Theorem B.1 gives a solution and shows that every choice gives the same external matrix $A + BF$. Proposition 3.1 computes that matrix by eliminating one return pattern at a time. Write $\Sigma \vdash \omega \Downarrow M$ when its elaboration evaluates to M. Closed application then uses

$$\frac{\Sigma \vdash \omega \Downarrow M \qquad t \Downarrow \psi}{\omega t \Downarrow M\psi}.$$

The calculation for a local call gives the induction step showing that expansion preserves every column of a clause. Values supply basis vectors and sums extend the calculation by linearity. Each combinator then acts on the same matrices before and after elaboration, including trace by Theorem B.1. Equality on basis inputs extends linearly to inputs entangled with a retained factor.

In source syntax, `;` denotes sequence, `+` direct sum and `dagger` the adjoint. We write `*` for the tensor of two isos and `x` for the product of their types. For a dense d-by-d table the initial column check takes $O(d^3)$ arithmetic operations. A register of q qubits has $d = 2^q$ basis values.

A.4 Denotation

A checked table denotes the linear extension of its columns. Names, sequence, dagger, direct sum and tensor denote lookup, composition in execution order, adjoint, direct sum and tensor. The trace sums the exit maps in (3.2). The evaluation identities above give these same maps, with the trace case supplied by Theorem B.1.

Control of an endo-iso u is $I \oplus u$ under the distributive iso for $(1 + 1) \otimes a$. Replacing u by $e^{i\varphi}u$ leaves its channel unchanged but gives just the second branch a phase. The channel alone therefore does not determine the controlled gate.

A.5 Effect extensions

Syntax. Write u for a reversible iso, v for an isometry program and h for a channel program. The two upper grammars are

$$v ::= \mathsf{arr}\, u \mid \mathsf{lift}\, u \mid v\,;\, v \mid v \oplus v \mid v \otimes v \mid \mathsf{count}_K\, u,$$
$$h ::= \mathsf{arr}\, v \mid \mathsf{hide}\, v \mid h\,;\, h \mid h \otimes h \mid \mathsf{while}_c\, u.$$

Statics. The type of the intermediate result must match the type expected by the next program. At the isometry layer this gives the following rules for sequence, tensor and direct sum.

$$\frac{v : a \rightarrowtail b \qquad w : b \rightarrowtail d}{v\,;\, w : a \rightarrowtail d} \qquad \frac{v : a \rightarrowtail b \qquad w : c \rightarrowtail d}{v \otimes w : a \otimes c \rightarrowtail b \otimes d} \qquad \frac{v : a \rightarrowtail b \qquad w : c \rightarrowtail d}{v \oplus w : a + c \rightarrowtail b + d}.$$

Channels also compose in sequence and by tensor product.

$$\frac{h : a \rightsquigarrow b \qquad k : b \rightsquigarrow d}{h\,;\, k : a \rightsquigarrow d} \qquad \frac{h : a \rightsquigarrow b \qquad k : c \rightsquigarrow d}{h \otimes k : a \otimes c \rightsquigarrow b \otimes d}.$$

These operations have their usual linear meanings, with sequence written in execution order. An identity on each layer is the embedded identity iso. The remaining rules change the kind of map or close a round.

$$\frac{u : a \leftrightarrow b}{\mathsf{arr}\, u : a \rightarrowtail b} \qquad \frac{u : a + d \leftrightarrow b}{\mathsf{lift}\, u : a \rightarrowtail b} \qquad \frac{\beta : a + c \leftrightarrow b + c \qquad K \geq 1}{\mathsf{count}_K\, \beta : a \rightarrowtail [K] \otimes b}$$


$$\frac{v : a \rightarrowtail b}{\mathsf{arr}\, v : a \rightsquigarrow b} \qquad \frac{v : a \rightarrowtail b \otimes g \qquad |\mathscr{B}(g)| > 0}{\mathsf{hide}\, v : a \rightsquigarrow b} \qquad \frac{\beta : a + c \leftrightarrow b + c}{\mathsf{while}_c\, \beta : a \rightsquigarrow b}.$$

In a mixed sequence we read an iso at the isometry layer as $\mathsf{arr}\,\omega$ and at the channel layer as $\mathsf{arr}(\mathsf{arr}\,\omega)$. The premise for while requires a reversible body. An inner coherent loop can be compiled first. A channel that measures its input, including another while, cannot occupy that position. At the top level both kinds of program accept a closed input term $t : a$. We distinguish their outputs because an isometry returns a vector while a channel returns an operator:

$$\frac{\Sigma \vdash t : a \qquad v : a \rightarrowtail b}{v\ \mathsf{on}\ t : \mathrm{Vec}(b)} \qquad \frac{\Sigma \vdash t : a \qquad h : a \rightsquigarrow b}{h\ \mathsf{on}\ t : \mathrm{Op}(b)}.$$


Denotation. Here $\mathrm{Vec}(b)$ consists of the vectors in $[\![b]\!]$ and $\mathrm{Op}(b)$ of the operators on that space. For $t \Downarrow \psi$, the two applications are $v\ \mathsf{on}\ t \Downarrow [\![v]\!]\,\psi$ and $h\ \mathsf{on}\ t \Downarrow [\![h]\!](|\psi\rangle\langle\psi|)$. When $\|\psi\| = 1$ the latter is a density matrix. An $\mathscr{R}[\mathsf{Unitary}]$ representative $U : X \oplus H \to X'$ exposes $u \mapsto U(u, 0)$, identifying changes confined to the unused summand. An $\mathscr{L}[\mathsf{Isometry}]$ representative $V : X \to X' \otimes G$ exposes $\rho \mapsto \mathrm{tr}_G(V \rho V^\dagger)$, identifying isometric relabelings of the hidden factor and the equivalence relation they generate [24, Eqs. (3)–(4), Thm. 22].

(a) $\mathscr{R}[\mathscr{C}]$: a heap enters beside the input, and only access to it counts



normal form: $A \to A \oplus H$, then f;
$\mathscr{R}[\text{Unitary}] \simeq$ Isometry

(b) $\mathscr{L}[\mathscr{C}]$: garbage leaves beside the output, and its contents do not count



normal form: f, then $B \otimes G \to B$;
$\mathscr{L}[\mathscr{R}[\text{Unitary}]] \simeq$ CPTP

Fig. 14. Allocation exposes an input summand of a larger reversible map. Hiding exposes one output factor of an isometry. Preprocessing the unused summand or isometrically relabeling the hidden factor preserves the exposed map. Here $\mathscr{C} = \text{Unitary}$ in $\mathscr{R}[\mathscr{C}]$ and $\mathscr{C} = \text{Isometry}$ in $\mathscr{L}[\mathscr{C}]$.

To allocate the basis value $j < K$, choose the permutation $p_j : a + ([K-1] \otimes a) \leftrightarrow [K] \otimes a$ that sends left x to $\langle j, x\rangle$, with $0 \le j$ and $[0] = 0$. Then $\text{alloc}_j = \text{lift}\, p_j$. For the basis copier on inhabited b, the heap $[|\mathscr{B}(b)| - 1] \otimes b$ supplies the $|\mathscr{B}(b)|^2 - |\mathscr{B}(b)|$ inputs needed to complete the diagonal injection to a permutation.

An embedded unitary acts by the same map. Embedding an isometry V gives the channel $\mathscr{E}_V$. We reserve $\mathscr{E}_\Sigma$ for elaboration of syntax. To form count_K, apply $I_{[K]} \otimes \beta$ and distribute the counter over the two tags. Apply S_K on the returning tag alone. The blocks are now $I \otimes A, I \otimes B, S_K \otimes C, S_K \otimes D$, so exit k is $S_K^k \otimes x_k$. Closing $[K] \otimes c$ and preparing the counter at zero gives (5.1).

In this order the counter comes first. To hide it, compose with $\text{arr}\, \sigma_{[K],b}$ before hide. In executable syntax `count K beta` returns data first, so `discard` already hides its counter and `swap` restores the displayed order. Here `discard` is the projection $I_a \otimes \text{discard}_b; \text{unit}_\otimes$ built from whole-register discard $\text{discard}_b : b \rightsquigarrow 1$.

For the empty type, discard_0 is obtained by hiding the unit factor of the unique isometry $0 \rightarrowtail 1 \otimes 1$, constructed by lift from $0 + 1 \leftrightarrow 1 \otimes 1$. Its action is the unique map on the zero operator space. Set measure_0 to the embedded identity on 0. These supply the empty cases omitted from the inhabited-type formulas in the body.

For while, allocate a fresh bit at 0 and apply the ordinary iso

$$\omega_{\text{tag}} = \{ \begin{array}{l} \langle \text{exit}\, x, 0\rangle \leftrightarrow \langle \text{exit}\, x, 0\rangle, \\ \langle \text{exit}\, x, 1\rangle \leftrightarrow \langle \text{exit}\, x, 1\rangle, \\ \langle \text{back}\, y, 0\rangle \leftrightarrow \langle \text{back}\, y, 1\rangle, \\ \langle \text{back}\, y, 1\rangle \leftrightarrow \langle \text{back}\, y, 0\rangle \quad \} \end{array} : (b + c) \otimes \texttt{Qubit} \leftrightarrow (b + c) \otimes \texttt{Qubit}.$$

The clauses permute the basis. Fixing the fresh bit at 0 gives the tag isometry T. On $v \in [\![b]\!]$ and $y \in [\![c]\!]$ it acts by

$$T(v, y) = (\iota_{\text{ext}} v) \otimes |0\rangle + (\iota_{\text{ret}} y) \otimes |1\rangle.$$

Applying T after U and tracing out the copied bit gives the diagonal output blocks. Feedback now uses the classical sum. This construction works when the payload types differ. The notation while names this classical feedback operation on the translated body.

When $a = b = c$, let factor $: a + a \leftrightarrow a \otimes \texttt{Qubit}$ and dist $=$ factor†, and put $\hat{\beta} =$ dist; β; factor. Writing $E(\omega) = \mathsf{arr}(\mathsf{arr}\,\omega)$, the channel in Figure 10, written here with the payload first, is

$$E(\text{factor}); E(\hat{\beta}); (I_a \otimes \text{measure}_{\texttt{Qubit}}); E(\text{dist}).$$

The first factor; dist cancel, leaving the original body followed by exposure, measurement and restoration of its tag.

Soundness. We check definitions in order. For each basis input we evaluate the matching clause under its bindings to obtain one column. The table denotes a unitary because the admission rule requires these columns to form an orthonormal basis of the output. Sequence, sum, tensor and dagger preserve unitarity, as does trace by Theorem B.1.

For lift, sending u to $(u, 0)$ preserves inner products, as does the unitary that follows. The same argument applies to count_K, which sends u to $|0\rangle \otimes u$ before applying the enlarged loop. Embedding an isometry gives a channel, and tracing out one output preserves that property. For `while`, each partial sum in (5.2) is completely positive because each exit acts by $\rho \mapsto x_k \rho x_k^\dagger$. The cone is closed in finite dimension, so the limit is completely positive too. The identity $\sum_k x_k^\dagger x_k = I$ gives trace preservation.

By induction these checks establish soundness for every program. A closed term $t : a$ denotes a vector in $\mathbb{C}^{\mathscr{B}(a)}$ whose norm depends on its coefficients. Conversely, given a finite unitary V, we can write its columns as the clauses $s \leftrightarrow \sum_t V_{ts} t$. They pass the admission check since they form an orthonormal basis, also when both basis sets are empty.

B Convergence, probability and elimination

A permutation gives each value a unique predecessor, so a path from outside cannot enter an internal cycle. Its first value on the cycle would already have a predecessor there. The path therefore exits within $|\mathscr{B}(c)| + 1$ calls. The two external paths in Figure 15 combine to a swap, as in reversible flowchart semantics [18, Prop. 3.10][29, Prop. 5.3]. A unitary body can send some amplitude back on every call. To sum its exits, we separate the internal states that can still emit from those that stay inside forever.


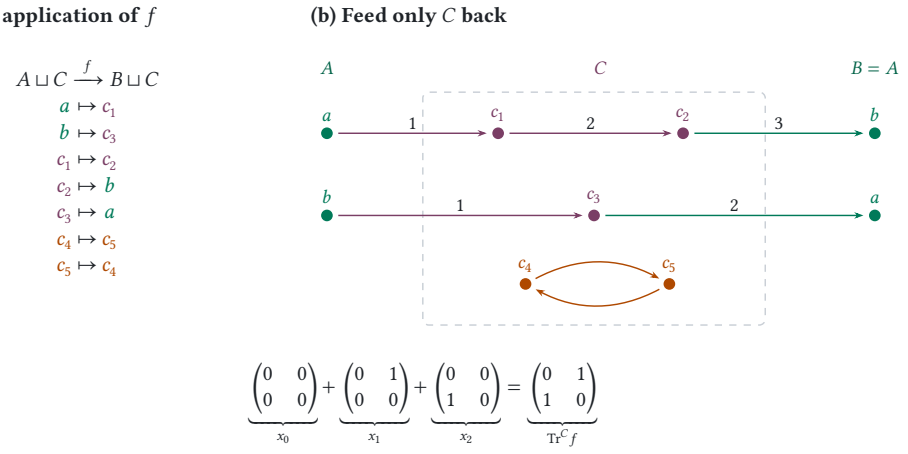


Fig. 15. A reversible loop with two external paths and an internal cycle. An edge numbered $k + 1$ is the call after k returns. The two nonzero exit maps have disjoint domains and their sum is a swap.

Absolute summability follows from Andrés-Martínez's finite trace theorem [3, Thm. 3.3.15]. The resulting map is unitary by Bartha's trace theorem [5, Thms. 4, 8]. The same norm calculation accounts for the probability of every exit.

Theorem B.1 (Finite feedback). *For a finite unitary $U : X \oplus Y \to X' \oplus Y$, the exits are absolutely summable in operator norm. Their sum $L : X \to X'$ is unitary, and $\sum_k x_k^\dagger x_k = I_X$. The wire equation $y = Cu + Dy$ has a solution for every u. Every solution gives the same output $Au + By = Lu$.*

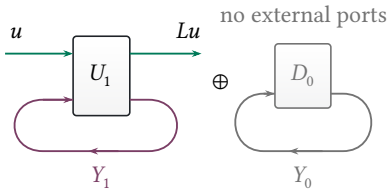

$$\|u\|^2 = \|Au\|^2 + \|Cu\|^2,$$
$$\|Cu\|^2 = \|BCu\|^2 + \|DCu\|^2,$$
$$\|DCu\|^2 = \|BDCu\|^2 + \|D^2Cu\|^2.$$

Fig. 16. An internal basis change separates U_1 from the unreachable D_0. The three norm identities telescope because each return term supplies the next call.

Proof of Theorem B.1. If we start with y on the return wire, the next call emits By and sends Dy back. After j more returns the amplitude that can leave is $BD^j y$, so the states that never emit form $Y_0 = \bigcap_{j\geq 0} \ker BD^j$, the unitary part of D in the Sz.-Nagy–Foiaş decomposition [3, Thm. 3.3.7].

For $y \in Y_0$ the whole output of U is $(0, Dy)$, with $Dy \in Y_0$. Preservation of norm makes D an isometry on Y_0, hence onto there by finite dimensionality. Since U carries $0 \oplus Y_0$ onto itself, it takes the orthogonal complement $X \oplus Y_1$ onto $X' \oplus Y_1$, where $Y_1 = Y_0^\perp$. In particular, the first return Cu lies in Y_1 and D keeps every later return there.

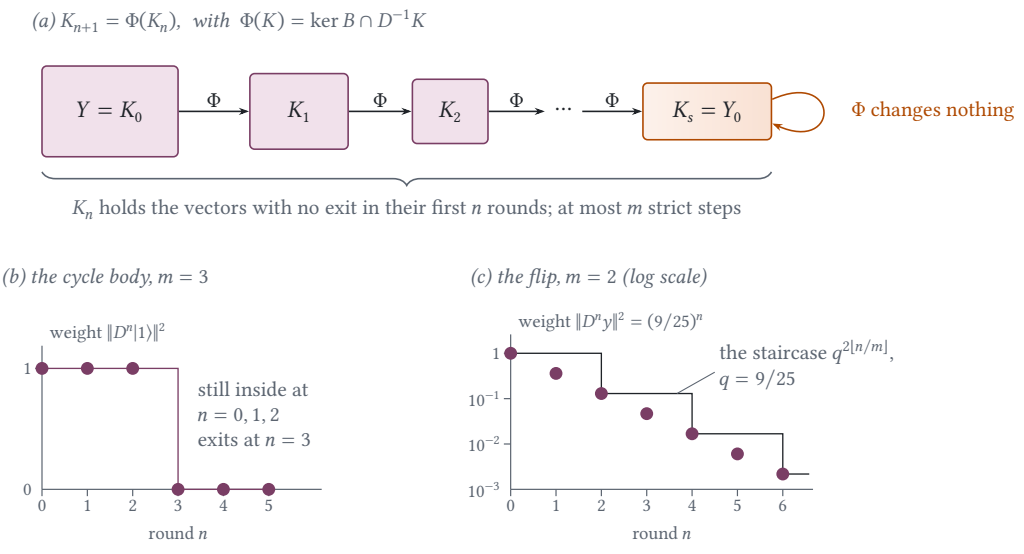


Fig. 17. The no-emission spaces stabilize within $\dim Y$ steps. Panel (b) is the four-state cycle $0 \mapsto 1 \mapsto 2 \mapsto 3 \mapsto 0$, with external state 0. Its three-dimensional return block has $D|1\rangle = |2\rangle$, $D|2\rangle = |3\rangle$ and $D|3\rangle = 0$. In panel (c), $\|D_1\| = 3/5$ and $m = 2$, so $q = \|D_1^2\| = 9/25$. Each pair of calls multiplies the weight by q^2, so the staircase $q^{2\lfloor n/m \rfloor}$ meets the exact weight $(9/25)^n$ at every even n.

To see how quickly amplitude leaves Y_1, let K_j consist of the states that emit nothing for the first j calls. Then $K_0 = Y$ and $K_{j+1} = \{y : By = 0,\ Dy \in K_j\}$. Each space lies inside the one before it. If two successive spaces agree, the recurrence gives the same space at every later call. There can be at most $m = \dim Y$ strict decreases, so $K_m = Y_0$ (Figure 17).

Write $D_1 = D|_{Y_1}$ and $B_1 = B|_{Y_1}$. If $Y_1 = 0$, then $C = 0$, every delayed exit vanishes and we can take $F = 0$. Otherwise $m > 0$. A unit vector $y \in Y_1$ must emit on at least one of its first m calls, since it lies outside K_m. Conservation of norm gives

$$1 - \|D_1^m y\|^2 = \sum_{j=0}^{m-1} \|BD^j y\|^2 > 0.$$

The unit sphere is compact, so even the largest remaining norm $q = \|D_1^m\|$ is less than one. After $k = pm + r$ calls, with $0 \le r < m$, the first p groups of m calls leave norm at most q^p, and the last r calls cannot increase it. This bounds $\|D_1^k\|$ by q^p.

By this bound the sum $F = \sum_{j\ge 0} D_1^j C$ converges. Its first term is C and the remaining terms sum to $D_1 F$, so $F = C + D_1 F$. Applying B_1 sends each return to its exit. These delayed exits are absolutely summable even with a polynomial weight in j. Adding the immediate exit gives $L = A + BF$. If two solutions differ by w, subtracting their wire equations gives $Dw = w$. On input $(0, w)$ the body therefore outputs (Bw, w). Since the returning component has the full input norm, $Bw = 0$ and the two solutions give the same external output.

For the solution Fu, the body sends (u, Fu) to (Lu, Fu). Cancelling $\|Fu\|^2$ from the two squared norms gives $\|Lu\| = \|u\|$. The external spaces have the same finite dimension because U is unitary, so L is onto as well.

To account for the probability, let $T_j = C^\dagger D^{\dagger j} D^j C$. On a unit input u, $\langle u, T_j u\rangle$ is the probability still inside after call $j+1$. The first call gives $x_0^\dagger x_0 = I - T_0$. On later calls the weight that leaves is exactly the drop in the weight still inside, since

$$x_{j+1}^\dagger x_{j+1} = C^\dagger D^{\dagger j} \underbrace{B^\dagger B}_{I - D^\dagger D} D^j C = T_j - T_{j+1}.$$

Adding through exit k gives $\sum_{j=0}^{k} x_j^\dagger x_j = I_X - T_k$. The residual term tends to zero by the decay just proved, giving total exit probability one even for a body with infinitely many possible exits. □

A state can stay inside forever without being fixed. For example, if $Dv = -v$ then every call preserves its norm, so $Bv = 0$. Only a nonzero state with $Dv = v$ makes $I - D$ singular at phase one.

B.1 Eliminating a pattern

For a regular pivot the update below is also the scattering-matrix update of Gough and James [20, § 4, Thm. 12] and Tezak et al. [43, App. A, Eq. (A1)]. The proof includes a return with self-entry one.

Proof of Proposition 3.1. Choose the returning basis value q we want to remove, and leave the other return wires open for this step. Write $Q = \mathbb{C}q$ and $Y_{\text{rest}} = Y \ominus Q$. The ports left open form $E_{\text{in}} = X \oplus Y_{\text{rest}}$ and $E_{\text{out}} = X' \oplus Y_{\text{rest}}$. In this order the body has matrix

$$\begin{pmatrix} M & b_q \\ c_q & d_q \end{pmatrix}, \qquad M : E_{\text{in}} \to E_{\text{out}}, \quad b_q : Q \to E_{\text{out}}, \quad c_q : E_{\text{in}} \to Q, \quad d_q = D_{qq}.$$

On input $w = (u, y_{\text{rest}})$, the other ports send amplitude $c_q w = (Cu)_q + \sum_{r\ne q} D_{qr} y_r$ to q. If λ comes back on q itself, the same port receives a further $d_q\lambda$. Closing this one wire therefore asks us to solve $\lambda = c_q w + d_q \lambda$. The other ports receive $Mw + b_q\lambda$.

If $d_q \neq 1$, substitution gives the new table $M + b_q c_q/(1 - d_q)$, the Schur complement of $d_q - 1$ in the matrix with blocks $M, b_q, c_q, d_q - 1$. This division also works for a phase such as -1 or i. When $d_q = 1$, that entry accounts for the whole squared norm of its row and column, so $c_q = b_q = 0$. The wire equation reduces to $\lambda = \lambda$, and the other ports see Mw for every choice of λ. In either case the new table is $\mathrm{Tr}^{Q}(U)$, which is unitary by Theorem B.1.

For `guardRound` there is only one returning value. Substituting $M = d_q = 3/5$, $b_q = -4/5$ and $c_q = 4/5$ gives the single coefficient $3/5 - (4/5)^2/(1 - 3/5) = -1$ of the clause in Section 3.3. In `flipRound`, the updated table still contains `back 1`; its new self-entry $9/25$ is the d_q for the next step (Figure 5).

A solution on all the wires restricts to a solution on the remaining wires by the substitution just made. Conversely, from a solution on those wires we recover λ by the same division when $d_q \neq 1$ and may choose $\lambda = 0$ when $d_q = 1$. Thus each step preserves the external output. Each step also removes one basis value and uses only field operations with a nonzero divisor. In any order there are $|\mathscr{B}(c)|$ steps, ending with a table over the original field for the gate L. The same argument applies after putting a phase on the return wire, since the modified body is again unitary. □

Closed sums for the running rotation. For `guardRound`, both port spaces are $\mathbb{C}$, so the blocks are scalars: $A = D = t = 3/5$, $C = s = 4/5$ and $B = -s$. The general exit formula becomes $x_0 = t$ and $x_{k+1} = (-s)t^k s = -s^2 t^k$. To compare adding these amplitudes with adding their squared magnitudes, follow the first n calls on unit input. Write r_n for the amplitude still returning, ℓ_n for the sum emitted so far, and p_n for the weight of those exits when the guard is measured. The geometric sums give

$$r_n = s t^{n-1},$$

$$\ell_n = t - s^2 \sum_{j=0}^{n-2} t^j = -1 + (1 + t)t^{n-1},$$

$$p_n = t^2 + s^4 \sum_{j=0}^{n-2} t^{2j} = 1 - s^2 t^{2(n-1)}.$$

The sums are empty when $n = 1$. Table 2 follows the resulting emissions, residuals and sums. The squared length $|\ell_n|^2$ can fall and rise as later emissions interfere. The measured halting weight p_n only increases, because each call adds a nonnegative probability.

	one call		coherent feedback		guard measured
call n	emitted x_{n-1}	still returning r_n	sum emitted ℓ_n	squared length $\lvert\ell_n\rvert^2$	halted so far p_n
1	$\frac{3}{5}$	$\frac{4}{5}$	$\frac{3}{5}$	0.3600	0.3600
2	$-\frac{16}{25}$	$\frac{12}{25}$	$-\frac{1}{25}$	0.0016	0.7696
3	$-\frac{48}{125}$	$\frac{36}{125}$	$-\frac{53}{125}$	0.1798	0.9171
4	$-\frac{144}{625}$	$\frac{108}{625}$	$-\frac{409}{625}$	0.4282	0.9701
5	$-\frac{432}{3125}$	$\frac{324}{3125}$	$-\frac{2477}{3125}$	0.6283	0.9893
$n \to \infty$	0	0	-1	1	1

Table 2. `guardRound` on $|*\rangle$. Coherent feedback adds emissions, while guard measurement adds their squared magnitudes. A record keeps emission x_{n-1} with label $n - 1$. Only p_n is a halting probability; decimal entries are rounded to four places.

A table and an unknown gate. For a scalar rotation with cosine $-1 < t < 1$, the trace is $t - (1 - t^2)/(1 - t) = -1$. At the identity rotation it is $+1$. With a bypass and a final Hadamard, the probability of reading 1 therefore jumps from one to zero at the identity. In any fixed finite circuit built by composing the supplied gate, this probability varies continuously. If it gives probability p at the identity, its error there is p and its error on nearby rotations tends to $1 - p$. At least one of these is $1/2$ or more. Given the clause table, elimination can test $t = 1$ exactly [15, Remark B.1]. Section 4 follows the light from its first trip around an empty ring.

C Records, measurement and phase

In `count 2 guardRound`, a return flips the bit and an exit keeps its current value. For a counter of size K, the flip becomes the cyclic successor S_K on the returning output.

For general ports, distributivity d_K identifies $[K] \otimes (a + c)$ with $([K] \otimes a) + ([K] \otimes c)$. Write d'_K for the same distributivity at the output. The enlarged body of Figure 8 is

$$\beta_K = d_K^{-1} \,;\, (I_{[K]} \otimes \beta) \,;\, d'_K \,;\, (I_{[K]\otimes b} \oplus (S_K \otimes I_c)).$$

The upper row of its matrix sends amplitude out with the current label. The lower row applies S_K before sending amplitude back.

$$W_K = [\![\beta_K]\!] = \begin{pmatrix} I_K \otimes A & I_K \otimes B \\ S_K \otimes C & S_K \otimes D \end{pmatrix}. \qquad R_K u = (\mathrm{Tr}^{\mathbb{C}^K \otimes Y} W_K)(|0\rangle \otimes u).$$

When both ports carry the same payload $P = X = X' = Y$, the sheet diagram draws the guard and data on one sheet. The change of coordinates $F_g = \mathrm{factor}; \sigma_{P,\mathrm{Qubit}} : P + P \leftrightarrow \mathtt{Qubit} \otimes P$ puts the guard first, giving $\widehat{U}_g = [\![F_g]\!] U [\![F_g]\!]^{-1}$. With a counter, $F_{K,g} = d_K^{-1}; (I_{[K]} \otimes F_g)$ puts counter, guard and data in that order. Its inverse restores the two ports.

On the first call the input is $(|0\rangle \otimes u, 0)$. The ket is the prepared counter and the second component 0 means no returning amplitude. The two output blocks are $|0\rangle \otimes Au$ and $|1 \bmod K\rangle \otimes Cu$.

Figure 18 puts the counter increment and the tag-copying step beside the same body.



$S_K|j\rangle = |j + 1 \bmod K\rangle$.

Discard the fresh bit after this call.

Fig. 18. One call to the same body U, followed by an operation controlled on the outgoing guard $g = 1$. A filled dot denotes a coherent control. The left circuit carries j into the next round. In the right circuit the discarded bit distinguishes the tags without distinguishing states of the payload q. Crossing wires interact only at a marked gate.

From a finite counter to the exact count. Give each return count its own basis state in $H_{\mathrm{rec}} = \ell^2(\mathbb{N})$. With the counter first, $Ru = \sum_k |k\rangle \otimes x_k u$ has squared norm $\sum_k \|x_k u\|^2 = \|u\|^2$. For `guardRound` on $|*\rangle$ the data factor is always $|*\rangle$, and the count state is $\xi_{\mathrm{rot}} = t|0\rangle - s^2 \sum_{k\geq 1} t^{k-1}|k\rangle$, with $t = 3/5$ and $s = 4/5$. Section 6 factors out $L|*\rangle = -|*\rangle$, so its count vector is $-\xi_{\mathrm{rot}}$. Keeping the sign in the count vector lets us compare the rotation with the bypass.

In `bypassRound`, the bypass exits at once, so $R|0\rangle = |0\rangle \otimes |0\rangle$, while $R|1\rangle = \xi_{\mathrm{rot}} \otimes |1\rangle$. Only the rotating arm has a nonzero $|1\rangle$ count amplitude, so $R|+\rangle$ is entangled. With a K-state counter, the

rotating arm's amplitude at label zero is $g_0 = t - s^2 t^{K-1}/(1-t^K)$, since all positive multiples of K reach that label. The bypass keeps $|0\rangle$, so g_0 is the overlap of the two unit count states. At output 1 the final Hadamard gives half their difference. Its squared norm is $(2-2g_0)/4 = (1-g_0)/2$. For $t = 3/5$ this gives one at $K = 1$ and $1/2$ at $K = 2$. Since $g_0 < t$ and $g_0 \to t$, it approaches the measured value $(1-t)/2 = 1/5$ from above.

A caller holding the counter can perform a quantum eraser measurement in the Fourier basis. Projecting onto $K^{-1/2}\sum_{j=0}^{K-1}|j\rangle$ gives $K^{-1/2}\sum_k x_k u = Lu/\sqrt{K}$. This outcome has probability $1/K$ on every unit input. When the body is known, reversing the enlarged loop recovers $|0\rangle \otimes u$. Applying L to the data then gives Lu with certainty (Section 5).

Embed the K counter labels as the first K basis states by $J_K : \mathbb{C}^K \to H_{\mathrm{rec}}$. The finite and exact records agree term by term until a label wraps. Their difference is bounded by the remaining exits.

$$\|(J_K \otimes I)R_K - R\| \;\le\; \sum_{k\ge K} \big\||k \bmod K\rangle - |k\rangle\big\|\,\|x_k\| \;\le\; \sqrt{2}\sum_{k\ge K}\|x_k\|.$$

For $k \ge K$ the two labels are orthogonal unit vectors, at distance $\sqrt{2}$. The tail tends to zero by Theorem B.1.

With amplitude $1/\sqrt{n}$ at each of $0, K, \dots, (n-1)K$, the record has norm one. Folding modulo K adds all n terms at zero, giving $\sqrt{n}|0\rangle$. Summing at phase one also gives $\sqrt{n}$, so neither operation is bounded on square-summable sequences.

In Ying's free coin histories, k returns followed by an exit give the word $J|k\rangle = |1^k 0\rangle$ in the $(k+1)$-coin sector [48, Eq. (34)]. These words are orthonormal, so J identifies the exact register isometrically with their closed span. For matched exit maps, $(J \otimes I)Ru$ and Ru give the same data when we discard the record. This comparison concerns completed histories. Ying's principal-system semantics also specifies an initial coin state and uses the symmetric semantics [48, Def. 9]. Assolini and Di Pierro keep a qubit from each test. Their unitary approximations can fail to converge while a branch keeps running, although the output on completed branches converges for each input [4, § 4.1, Thm. 5.9].

A clock can also keep the count. One tick of delay per return puts $x_0 u, x_1 u, \dots$ in consecutive, orthogonal output slots [3, § 3.4]. At a common observation time, a shared sequence of post-halt ancilla states can likewise distinguish halt times. Branch-dependent sequences can let those histories interfere again [31]. For an exact record, the labels must still be orthogonal when observed. In the ring, a short pulse separates the exits in time, while steady light at one frequency brings them to the same mode (Appendix H).

What remains after hiding the count. For an input of the form $|u\rangle\langle v|$, tracing the exact record over its orthonormal basis leaves $\sum_k x_k|u\rangle\langle v|x_k^\dagger$. Such operators span the input matrix algebra, giving (5.2). For `bypassRound`, all delayed exits are multiples of $P = |1\rangle\langle 1|$. Their squared coefficients sum to $s^4/(1-t^2) = s^2$. Thus $u \mapsto |0\rangle \otimes Au + |1\rangle \otimes sPu$ also gives the measured channel when we hide the bit. This bit represents two Kraus operators. It carries neither the count nor its parity.

For a finite counter put $G_j = \sum_{k \equiv j \bmod K} x_k$. Discarding that counter instead gives $\sum_{j<K} G_j \rho G_j^\dagger$. As a result, unequal counts congruent modulo K retain cross terms. For the Fourier forms, the coefficient sum is absolutely convergent, and

$$G_j = \frac{1}{K}\sum_{z^K=1} \bar{z}^{\,j}\Theta(z), \qquad x_k = \frac{1}{2\pi}\int_0^{2\pi} e^{-ik\varphi}\Theta(e^{i\varphi})\,d\varphi.$$

Expanding $\Theta(z)\rho\Theta(z)^\dagger$ and integrating term by term removes all unequal indices, proving (7.1). For a uniform choice among the Kth roots, a pair of exits k, j acquires the factor $K^{-1}\sum_{z^K=1} z^{k-j}$. This

geometric sum is one when $k \equiv j \pmod K$ and zero otherwise. The surviving terms are exactly $\sum_{r<K} G_r \rho G_r^\dagger$, the channel of the hidden K-counter. If $D^n = 0$, only counts $0, \dots, n$ can occur, so $n+1$ equally spaced phases give the measured loop exactly.

The table at the end of Section 5 gives these maps for `bypassRound`. For the classical trace, let $\theta(\rho, \sigma) = \operatorname{diag}(\rho, \sigma)$ insert the two operator blocks and let φ extract the diagonal output blocks. Then $\Phi_U = \varphi \circ \mathscr{E}_U \circ \theta$ is the branching map of Section 5 [3, Def. 3.3.18]. In CPTR, the category of finite-dimensional C^*-algebras and completely positive trace-nonincreasing maps, the classical-sum trace $\operatorname{Tr}_{\mathrm{cl}}^{\mathrm{End}(Y)}(\Phi_U)$ sends ρ to $\sum_k x_k \rho x_k^\dagger$ [40, § 5.1, Eq. (1)] [3, Thm. 3.2.11, Prop. 3.2.17].

The trace on finite isometries agrees with the coherent trace on embedded unitaries [3, Cor. 3.3.16]. Extracting the two diagonal blocks of the output removes the cross terms between an exit and a return.

Relation to monitored first returns. The published test-first loop measures before applying U [49, § 3]. To obtain our body-first convention when $X' = X$, apply U once before entering it. Let $\iota_X u = (u, 0)$ and $P = \iota_X \iota_X^\dagger$. For $n \geq 1$, the exit map on call n is $\iota_X^\dagger U((I-P)U)^{n-1}\iota_X = x_{n-1} : X \to X$. Thus the monitored-return count includes the initial call and is one more than our number of returns [7, § 2].

To see where the least fixed point enters, consider the state σ just before the test. The exit contributes $P\sigma P$. On a return, the next call prepares $V\sigma V^\dagger$ for another test, where $V = U(I-P)$. Thus Ying's unfolding sends a map G to $\sigma \mapsto P\sigma P + G(V\sigma V^\dagger)$ [47, arXiv v1, Prop. 5.1(6), Cor. 5.1].

Starting from zero, n unfoldings give the first n exits, $\sum_{j=0}^{n-1} PV^j\sigma(V^j)^\dagger P$. For positive σ each new exit adds a positive operator. Since $V^\dagger V = I - P$, their total trace is $\operatorname{tr}\sigma - \operatorname{tr}(V^n\sigma(V^n)^\dagger)$. The partial sums are thus increasing with bounded trace, so they converge in finite dimension. Passing to the limit in the recurrence gives a solution. It is the least one because any positive solution bounds the initial zero and, by order preservation at each unfolding, every partial sum. Starting with $U\iota_X \rho \iota_X^\dagger U^\dagger$ and reading the external block gives precisely $\sum_k x_k \rho x_k^\dagger = \mathscr{M}(\rho)$.

D Agreement and replacement

Proof of Theorem 6.1. Suppose the measured and coherent loops give the same channel. On a unit input u the coherent loop returns Lu, so a test for any unit vector w orthogonal to Lu has probability zero. The same test on the measured loop gives $\sum_k |\langle w, x_k u\rangle|^2$. For this sum to vanish, each term must vanish. Thus every $x_k u$ lies along Lu.

So far the multiplier could depend on the input. For a fixed exit k, put $V = L^\dagger x_k$, so that Vu lies along u for every u. In particular, $Ve_i = \lambda_i e_i$ on each basis vector. Applying the same condition to $e_i + e_j$ gives

$$V(e_i + e_j) = \lambda_i e_i + \lambda_j e_j = \lambda_{ij}(e_i + e_j).$$

Comparing the two coordinates gives $\lambda_i = \lambda_j$. Thus $V = b_k I$ and $x_k = b_k L$ for one scalar b_k on the whole input space. In dimension one there is only one coefficient to begin with.

What stays in the count register now follows from the two ways of summing exits. Since $\sum_k x_k = L \neq 0$, absolute convergence gives $\sum_k b_k = 1$. Since $\sum_k x_k^\dagger x_k = I$, we also have $\sum_k |b_k|^2 = 1$. The exact counter therefore returns a unit vector $\xi = \sum_k b_k |k\rangle$, the same for every input, and $Ru = \xi \otimes Lu$. Conversely, discarding such a factor gives $\mathscr{E}_L$. Reading its kth coordinate gives back $x_k = \langle k|\xi\rangle L$.

It remains to decide this condition from finitely many exits. The immediate exit is $x_0 = A$. For $m = \dim Y > 0$, the next m exits are $BC, BDC, \dots, BD^{m-1}C$. By Cayley–Hamilton, D^m is a linear combination of $I, D, \dots, D^{m-1}$, and multiplying by D gives the same recurrence for all higher powers.

Hence every later exit lies in the span of those m delayed exits. When $m = 0$, only the immediate exit can be nonzero.

The span of $x_0, \dots, x_m$ thus contains every exit and, being finite-dimensional, also their sum L. On a nonzero input space L is nonzero. If this span has dimension at most one, it must be the line through L, so every x_k is a multiple of L. Conversely, multiples of L pass the finite test. □

For a dense table with $n = \dim X = \dim X'$ and $m = \dim Y$, start with $P = C$. Multiplying BP gives the next exit and replacing P by DP gives the next return. Forming the m delayed exits this way costs $O(m^2n^2 + m^3n)$ field operations. The entry comparisons in Section 6 then test their proportionality together with A.

We can also compute the measured channel directly. Restrict B, D to the emitting space Y_1 as in Appendix B, and write $\mathscr{E}_T(\rho) = T\rho T^\dagger$. On return density matrices the next call acts by $\mathscr{E}_{D_1}$. Its powers decay, so summing the delayed exits gives

$$\mathscr{M} = \mathscr{E}_A + \mathscr{E}_{B_1}(I - \mathscr{E}_{D_1})^{-1}\mathscr{E}_C.$$

Comparing this with $\mathscr{E}_L$ on matrix units is a second finite test.

The bypass shows why we test proportionality exactly. As t approaches one from below, $x_1 = -(1-t^2)|1\rangle\langle 1|$ tends to zero. Yet the coherent caller still reads 1 with certainty, while measuring the guard gives 1 with probability $(1-t)/2$. As that probability tends to zero, rounding x_1 to a zero multiple of x_0 would accept a change the caller can almost certainly detect.

Channel contexts. Fix the hole type $a \rightsquigarrow b$ and abbreviate it by $\mathscr{H}$ to the left of a context judgment. For fixed closed channels h, h_j, the contexts are generated by

$$\begin{aligned}\mathscr{C} \;::=\; & [-] \mid h; \mathscr{C} \mid \mathscr{C}; h \mid h \otimes \mathscr{C} \mid \mathscr{C} \otimes h \\ & \mid \mathsf{case}\big(\Psi_i; \mathscr{C}, (\Psi_j; h_j)_{j \neq i}\big).\end{aligned}$$

The rules for the hole, sequence and tensor are

$$\mathscr{H} \vdash [-] : a \rightsquigarrow b \qquad \frac{h : e \rightsquigarrow c \qquad \mathscr{H} \vdash \mathscr{C} : c \rightsquigarrow d}{\mathscr{H} \vdash h; \mathscr{C} : e \rightsquigarrow d} \qquad \frac{\mathscr{H} \vdash \mathscr{C} : c \rightsquigarrow d \qquad h : d \rightsquigarrow e}{\mathscr{H} \vdash \mathscr{C}; h : c \rightsquigarrow e}$$

$$\frac{h : e \rightsquigarrow f \qquad \mathscr{H} \vdash \mathscr{C} : c \rightsquigarrow d}{\mathscr{H} \vdash h \otimes \mathscr{C} : e \otimes c \rightsquigarrow f \otimes d} \qquad \frac{\mathscr{H} \vdash \mathscr{C} : c \rightsquigarrow d \qquad h : e \rightsquigarrow f}{\mathscr{H} \vdash \mathscr{C} \otimes h : c \otimes e \rightsquigarrow d \otimes f}.$$

For a finite instrument $(\Psi_j : c \to c_j)_{j \in J}$, meaning $\Psi_j : \mathrm{End}([\![c]\!]) \to \mathrm{End}([\![c_j]\!])$, the maps are completely positive and their output traces sum to the input trace. Placing each output in its summand of $\bigoplus_j [\![c_j]\!]$ gives an instrument with a common output space. Its case rule is

$$\frac{i \in J \quad \mathscr{H} \vdash \mathscr{C} : c_i \rightsquigarrow d \quad h_j : c_j \rightsquigarrow d \; (j \neq i)}{\mathscr{H} \vdash \mathsf{case}\big(\Psi_i; \mathscr{C}, (\Psi_j; h_j)_{j \neq i}\big) : c \rightsquigarrow d}.$$

Plugging h into the hole interprets sequencing by channel composition and tensor by the tensor product of channels. The case denotes $[\![\mathscr{C}[h]]\!] \circ \Psi_i + \sum_{j \neq i} [\![h_j]\!] \circ \Psi_j$. Thus exactly one syntactic occurrence depends on the hole, and each branch continuation has the channel type stated by the rules. These contexts can use a hole on one instrument outcome and omit it on the others. They do not contain iso-level operations on that hole.

Proof of Corollary 6.2. Discarding the exact count removes every term with two different labels and leaves $\sum_k x_k \rho x_k^\dagger = \mathscr{M}(\rho)$. With a finite counter, exits whose counts agree modulo K carry the same label. Under the agreement condition, each contributes $b_k L u$. Factoring out the

common data vector gives $R_K u = \xi_K \otimes Lu$, where $\xi_K = \sum_k b_k |k \bmod K\rangle$. For any unit input u, both $R_K u$ and Lu have norm one, so ξ_K does too. Discarding it gives $\mathscr{E}_L$. If $X = 0$, then $X' = 0$ and there is only one channel to compare.

Equal channels still agree when the caller keeps a finite reference: elementary tensor operators span the joint matrix algebra. They also agree after composition with a fixed channel or discard. In a case expression we can substitute equal channels on the unnormalized state of each outcome, then add the outputs if the caller forgets the outcome. Induction on the context now gives the same observations for both loops.

For the converse we exhibit tests available to the caller. On either space we can prepare basis states and, for each pair r, s, the states $(3|r\rangle + 4|s\rangle)/5$ and $(3|r\rangle + 4i|s\rangle)/5$. Their projectors, together with the basis projectors, span the matrix algebra: the two superpositions supply the real and imaginary off-diagonal parts. Thus if the channels differ, one of these inputs gives different outputs. A basis measurement detects a difference on the diagonal. If the diagonals agree, projecting onto one of the two superpositions detects a nonzero real or imaginary part. Each preparation and test needs only a basis state or measurement and a two-level unitary over $\mathbb{Q}(i)$. □

For an immediate identity bypass on a nonzero space Z, the first exit is $I_Z \oplus A$ and each later exit is $0 \oplus x_k$. A multiple of the first can vanish on Z only if it is zero. If all delayed exits vanish, $A^\dagger A = I$ by exit completeness. Since $A^\dagger A + C^\dagger C = I$, we get $C = 0$. Conversely, $C = 0$ makes every delayed exit zero. An isolated internal return port can still be present.

If the caller carries the count along while acting only on the data, it may discard the count at the end. Write H for the count register and τ for its joint state with the data. For each Kraus operator T of a branch on the data, $\mathrm{tr}_H((I_H \otimes T)\tau(I_H \otimes T)^\dagger) = T(\mathrm{tr}_H\, \tau)T^\dagger$. Summing over those operators gives the same unnormalized output whether the discard comes before or after the branch.


Why one finite clock does not suffice. The output interface matters. If a caller reads the count, even a fixed count independent of the data is an observable output. Conversely, a finite clock may hide a failure of agreement. For $m > 0$, use the permutation that fixes `exit 0` and cycles through $\texttt{exit}\,1 \mapsto \texttt{back}\,q_1 \mapsto \cdots \mapsto \texttt{back}\,q_m \mapsto \texttt{exit}\,1$, with m distinct return values $q_1, \ldots, q_m$. Its only nonzero exits are $x_0 = |0\rangle\langle 0|$ and $x_m = |1\rangle\langle 1|$. The m-clock assigns label 0 to both exits. Ignoring it preserves $|+\rangle = (|0\rangle + |1\rangle)/\sqrt{2}$, whereas a measurement on every return dephases $|+\rangle$ in that basis. Checking just this clock would accept the replacement incorrectly.

E The derivative and its average

In `guardRound`, write $s = 4/5$ and $t = 3/5$. The phase gate receives s on the first return, stz on the next, and st^2z^2 on the third. Summing over all returns gives $F_z = s/(1 - tz)$. For a general body the corresponding series is $F_z = C + zD_1C + z^2D_1^2C + \cdots$. Here D_1 and B_1 are the restrictions of D and B to $Y_1 = Y_0^\perp$, where $Y_0 = \bigcap_{j \geq 0} \ker BD^j$ consists of the states that never emit. By Theorem B.1, C takes values in Y_1 and powers of D_1 decay geometrically. The series therefore gives $F_z = (I - zD_1)^{-1}C$ even at a phase where $I - zD$ on all of Y is singular.

Proof of Theorem 7.1. We use the same body at two return phases. On Y_1 the wire equation is $F_z = C + zD_1F_z$, so a call takes (u, zF_zu) to $(\Theta(z)u, F_zu)$. Comparing this call with one on (v, wF_wv) at phase w, we can equate the input and output inner products because U_1 is unitary. With the inner product linear in its second argument, this gives

$$\langle v, u\rangle + \bar{w}z\langle F_wv, F_zu\rangle = \langle \Theta(w)v, \Theta(z)u\rangle + \langle F_wv, F_zu\rangle.$$



	$j=0$	$j=1$	$j=2$
$k=0$	T_{00}	$z^{-1}T_{01}$	$z^{-2}T_{02}$
$k=1$	zT_{10}	T_{11}	$z^{-1}T_{12}$
$k=2$	z^2T_{20}	zT_{21}	T_{22}

$$T_{kj} = x_k \rho x_j^\dagger$$

$$\Theta_{\mathrm{rot}}(z) = \frac{t - z}{1 - tz},$$

$$\Theta_{\mathrm{bypass}}(z) = \mathrm{diag}(1, \Theta_{\mathrm{rot}}(z)).$$

$$\Theta(z) = \sum_{k \geq 0} z^k x_k = A + zB_1(I - zD_1)^{-1}C, \qquad L = \Theta(1).$$

Fig. 19. Each return adds a factor z at left. In the channel at right, exit pair k, j carries $z^{k-j}T_{kj}$. Averaging over the circle retains only the orange diagonal. The same cancellation applies to later exits. The displayed families Θ_{rot} and Θ_{bypass} belong to `guardRound` and `bypassRound`.

Collecting the two occurrences of the returning inner product gives $I - \Theta(w)^\dagger\Theta(z) = (1 - \bar{w}z)F_w^\dagger F_z$. On the open unit disk this is the transfer identity for the characteristic function of the unitary colligation [8] [6, Eq. (4.10)].

The decay in Theorem B.1 makes F_z and $\Theta(z)$ analytic on a disk extending beyond the unit circle. Fix $|w| = 1$ and differentiate the identity in z. At $z = w$ the factor $1 - \bar{w}z$ vanishes, taking the term with F_z' with it. This leaves $\Theta(w)^\dagger\Theta'(w) = \bar{w}F_w^\dagger F_w$. Writing $w = e^{i\varphi}$ multiplies the derivative by iw, so $Q(w) = F_w^\dagger F_w$.

To average this weight over phase, expand $F_z = \sum_{j \geq 0} z^j D_1^j C$. In $F_z^\dagger F_z$ the term indexed by m, n has phase z^{n-m}. Only terms with $m = n$ survive integration around the circle (Figure 19). The geometric bound permits termwise integration, so the average is $\sum_j T_j$, where $T_j = (D_1^j C)^\dagger D_1^j C$ is the weight still returning after call $j + 1$.

An exit after k returns contributes to the returning weight on k calls. Weighting $x_{j+1}^\dagger x_{j+1} = T_j - T_{j+1}$ by $j + 1$ and summing through $j = p - 1$ gives $\sum_{k \leq p} k x_k^\dagger x_k = \sum_{j<p} T_j - pT_p$. Geometric decay sends pT_p to zero, so the phase average $\sum_j T_j$ equals N. Its expectation on a unit input is the measured mean.

Taking traces gives $\mathrm{tr}\, N = \sum_j \mathrm{tr}\, T_j$. Cyclicity puts each trace on Y_1, where the return row gives $CC^\dagger = I - D_1 D_1^\dagger$. Substituting this difference cancels consecutive terms:

$$\sum_{j=0}^{p-1} D_1^j CC^\dagger D_1^{\dagger j} = I_{Y_1} - D_1^p D_1^{\dagger p} \longrightarrow I_{Y_1}.$$

Taking the trace gives $\mathrm{tr}\, N = \dim Y_1$. When $Y_1 = 0$, $F_z = 0$, and all three identities give zero return weight. □

For monitored first returns, identify the external output unitarily with the input X. An exit after k returns takes $k + 1$ calls, so counting calls multiplies $\Theta(z)$ by one more z. The relative phase derivative of $z\Theta(z)$ is therefore $I + Q(z)$. For a single monitored state, Grünbaum et al. express its mean first return time as the winding of the first-arrival amplitude [21, § 4, proof of Thm. 2]. The mean number of calls is $1 + \langle u, Nu \rangle$ [7, § 3, Eq. (8)]. A vector orthogonal to the smallest reducing

subspace containing X stays orthogonal to X under every power of U. It must therefore be internal and never emit. Conversely, $0 \oplus Y_0$ reduces U by Theorem B.1 and is orthogonal to X. This identifies the smallest reducing subspace as $X \oplus Y_1$. The mean on u is the quadratic form of $I + N$, so its sum over an orthonormal basis is $\dim X$ times its uniform unit-sphere average. The monitored return times therefore sum to $\dim X + \dim Y_1$ [7, Thm. 3.2, Eq. (9)]. Removing one initial call per basis vector gives $\operatorname{tr} N = \dim Y_1$.

In scattering theory Fyodorov and Sommers relate a wave packet's dwell time to the energy average of the Wigner–Smith matrix [16, Eqs. (34)–(35)]. Here we differentiate with respect to the phase acquired in one round. A phase on the return tag is an ordinary iso, so forming this family requires no counter or guard measurement.

Phase invariance and agreement. On a nonempty external type, the phase family also characterizes agreement. If $x_k = b_k L$ for every exit, then $\Theta(z) = f(z)L$ with $f(z) = \sum_k b_k z^k$. For $|z| = 1$ the marked body is unitary, so its trace $\Theta(z)$ preserves the norm of any unit input. Since L does too, $|f(z)| = 1$. This scalar phase cancels in the data channel. Conversely, if those channels are all equal, they equal $\mathscr{E}_L$ because $\Theta(1) = L$. Their average is $\mathscr{M}$ by (7.1), so $\mathscr{M} = \mathscr{E}_L$. Thus agreement says exactly when changing the return phase leaves the data channel unchanged.

F Clause programs and their observations

Two scalar loops in sequence. To write the two copies of `guardRound` from Section 8 as one body, we give each return wire its own basis value. The open matrix acts on $\mathbb{C} \oplus (\mathbb{C} \oplus \mathbb{C})$. Both wires receive the same phase z, so the response in sequence is $f(z)^2$, where $f(z) = (t - z)/(1 - tz)$, $t = 3/5$ and $s = 4/5$. To read its columns, let u enter the first rotation and y_1, y_2 enter the two return ports. The first rotation sends $tu - sy_1$ into the second. The external output is therefore $t(tu - sy_1) - sy_2$, and the two return outputs are $su + ty_1$ and $s(tu - sy_1) + ty_2$. Reading off the coefficients of u, y_1, y_2 in turn gives the three clauses.

```
round twoSections : Unit + Qubit = {
  exit unit ↔ [9/25 . exit unit + 4/5 . back 0 + 12/25 . back 1];
  back 0 ↔ [-12/25 . exit unit + 3/5 . back 0 + -16/25 . back 1];
  back 1 ↔ [-4/5 . exit unit + 3/5 . back 1]
}

trace twoSections on unit
```

The two loops return $|*\rangle$, since $f(1)^2 = 1$. A period-two counter returns label 0 with certainty. At phase 1 the even and odd exits add, and at phase -1 the odd exits change sign. Both sums are one, so the odd exits sum to zero and the even exits sum to one.

Measuring the two loops separately can reveal more than measuring their combined body. For example, let the first body send $|0\rangle$ straight through and delay $|1\rangle$ by one return. Let the second do the reverse, with both bodies preserving the exiting basis value. The two records distinguish $(0, 1)$ from $(1, 0)$, so hiding them dephases $|+\rangle$. In the combined body both paths make one return. Its only nonzero exit map is $x_1 = I$, so measuring its tag preserves $|+\rangle$.

F.1 A flip on every call

In `flipRound`, each call rotates the guard by R_θ and flips the data qubit. Both clauses therefore call `X` before forming their two outputs.

```
X :: Qubit ↔ Qubit
X = { 0 ↔ 1; 1 ↔ 0 }

round flipRound : Qubit + Qubit = {
  exit x ↔ let y = X x in [ 3/5 . exit y + 4/5 . back y];
  back x ↔ let y = X x in [-4/5 . exit y + 3/5 . back y]
}
```

On `exit 0`, the first clause binds $x = 0$ and the call to `X` gives $y = 1$. Of its two outputs, only $(4/5)|11\rangle$ reaches the second call. This time the `back` clause flips the data to 0, so the part that leaves has amplitude $(4/5)(-4/5) = -16/25$. The returning part is $(12/25)|10\rangle$, so a third call emits $-(48/125)|01\rangle$ and sends $(36/125)|11\rangle$ back. With the guard first, the open matrix is $R_\theta \otimes \mathrm{X}$.

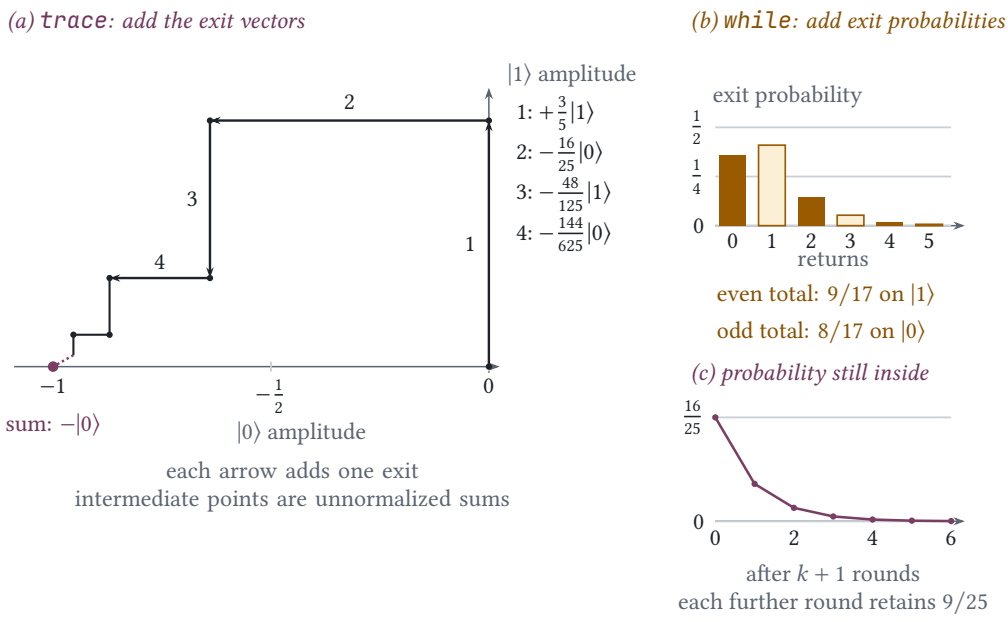


Fig. 20. On input $|0\rangle$, the left panel adds one exit amplitude per call, starting with call one. The bars at right give the exit probabilities by number of returns, starting at zero for the first call.

The exit maps of `flipRound`. Put $t = 3/5$ and $s = 4/5$. The two clauses of `flipRound` give $A = t\mathrm{X}$, $C = s\mathrm{X}$ on entry and $B = -s\mathrm{X}$, $D = t\mathrm{X}$ on return. Hence $x_0 = t\mathrm{X}$ and $x_1 = BC = -s^2 I$. The data flips twice before that second exit. In general $x_{k+1} = -s^2 t^k \mathrm{X}^{k+2}$. Grouping equal data gates gives two ordinary geometric series,

$$\underbrace{t - s^2 t \sum_{j\geq 0} t^{2j}}_{\text{coefficient of X}} = 0, \qquad \underbrace{-s^2 \sum_{j\geq 0} t^{2j}}_{\text{coefficient of } I} = -1, \qquad s^2 = 1 - t^2.$$

Thus the whole coherent loop returns $-u$. In particular it can never return data 1 on input 0. With an exact count the exits that return 0 on this input have odd counts, with amplitudes $-s^2, -s^2t^2, \ldots$. Their squared magnitudes sum to $s^4/(1-t^4) = 8/17$. The complementary probability $9/17$ goes to 1. These are the two observations in Figure 20. If we keep only parity, the even counts carry

the same label and their amplitudes cancel by the first geometric sum. The odd counts carry the other label and add to -1. Measuring each round instead retains the separate probabilities plotted at right.

In Figure 5, eliminating `back 0` leaves a self-loop of amplitude $9/25$ on `back 1`. Input 0 sends $4/5$ there, so successive returns sum to $(4/5)/(1-9/25) = 5/4$. It contributes $(-4/5)(5/4) = -1$ to output 0 and $(-12/25)(5/4) = -3/5$ to output 1, cancelling the immediate $3/5$. Interchanging the bits gives the second column of $-I$.

Kickback with a returned ancilla. In `flipRound` the payload changes on every call. We now give the payload two qubits and arrange for the closed loop to flip the data while returning the ancilla. On each call we rotate the guard by $\pi/4$ and apply the same gate M to the payload. Write $c = 1/\sqrt{2}$. The immediate exit is cM, the first delayed exit is $-c^2M^2$, and each further return adds a factor cM. Their sum is $f(M) = cM - c^2M^2(I - cM)^{-1} = M(cI - M)(I - cM)^{-1}$.

Let $J = \mathsf{X}$, let H be Hadamard, and put $G = HJ$ and $\Pi_\pm = (I \pm J)/2$. We choose $M = G \otimes \Pi_+ + JG \otimes \Pi_-$. In ISO syntax this M is an operation controlled in the J basis of the data. We change that basis with H, apply G or JG to the ancilla according to the tag, then undo the basis change.

To see which qubit receives the sign, look at $f(M)$ in each sector. For $M = G$, the identity $G^2 = 2cG - I$ gives $G(cI - G) = I - cG$. The numerator cancels the denominator, so $f(G) = I$. For $M = JG$, we have $(JG)^2 = I$, so the numerator is now $cJG - I = -(I - cJG)$ and $f(JG) = -I$. Both denominators are invertible since $c < 1$ and both gates are unitary. Since the ancilla comes back in either sector, the relative sign acts on the data, giving $I \otimes (\Pi_+ - \Pi_-) = I \otimes J$ on every joint input.

In the basis of the two payload bits, the projector sum gives

$$M|0,d\rangle = \frac{|0,1-d\rangle - |1,1-d\rangle}{\sqrt{2}}, \qquad M|1,d\rangle = \frac{|0,d\rangle + |1,d\rangle}{\sqrt{2}}.$$

The data bit flips in the first case and stays in the second. Expanding the guard rotation now gives the clauses below. Each nonzero coefficient of M is $\pm 1/\sqrt{2}$, and the guard contributes another $1/\sqrt{2}$, leaving only coefficients $\pm 1/2$. Thus no rounded Hadamard coefficient is needed in this source.

```
round kickbackExact : (Qubit x Qubit) + (Qubit x Qubit) = {
  exit ⟨0, 0⟩ ↔ [1/2 . exit ⟨0, 1⟩ + -1/2 . exit ⟨1, 1⟩
                 + 1/2 . back ⟨0, 1⟩ + -1/2 . back ⟨1, 1⟩];
  exit ⟨0, 1⟩ ↔ [1/2 . exit ⟨0, 0⟩ + -1/2 . exit ⟨1, 0⟩
                 + 1/2 . back ⟨0, 0⟩ + -1/2 . back ⟨1, 0⟩];
  exit ⟨1, 0⟩ ↔ [1/2 . exit ⟨0, 0⟩ + 1/2 . exit ⟨1, 0⟩
                 + 1/2 . back ⟨0, 0⟩ + 1/2 . back ⟨1, 0⟩];
  exit ⟨1, 1⟩ ↔ [1/2 . exit ⟨0, 1⟩ + 1/2 . exit ⟨1, 1⟩
                 + 1/2 . back ⟨0, 1⟩ + 1/2 . back ⟨1, 1⟩];
  back ⟨0, 0⟩ ↔ [-1/2 . exit ⟨0, 1⟩ + 1/2 . exit ⟨1, 1⟩
                 + 1/2 . back ⟨0, 1⟩ + -1/2 . back ⟨1, 1⟩];
  back ⟨0, 1⟩ ↔ [-1/2 . exit ⟨0, 0⟩ + 1/2 . exit ⟨1, 0⟩
                 + 1/2 . back ⟨0, 0⟩ + -1/2 . back ⟨1, 0⟩];
  back ⟨1, 0⟩ ↔ [-1/2 . exit ⟨0, 0⟩ + -1/2 . exit ⟨1, 0⟩
                 + 1/2 . back ⟨0, 0⟩ + 1/2 . back ⟨1, 0⟩];
  back ⟨1, 1⟩ ↔ [-1/2 . exit ⟨0, 1⟩ + -1/2 . exit ⟨1, 1⟩
                 + 1/2 . back ⟨0, 1⟩ + 1/2 . back ⟨1, 1⟩]
}

trace kickbackExact on 3/5 . ⟨0, 0⟩ + 4/5 . ⟨1, 1⟩
```

The input is entangled between ancilla and data. Its output is $3|0,1\rangle/5 + 4|1,0\rangle/5$, exactly the result of applying J to the second component. The same identity on arbitrary joint inputs follows from the two-sector calculation above.


G Reading the feedback diagrams

Reading a sheet diagram from bottom to top, we follow each summand on its own surface. Along the depth of that surface run the wires of its tensor factors. This is why registers on one sheet can be used together, while different sheets carry alternative components. Where the surfaces meet, the dark seam labelled U acts on both summands, even where the returning sheet hides part of the external wire. Bending an entire surface back to its input takes the direct-sum trace over that summand. The underlying sheet calculus describes sum, tensor and composition [13, Defs. 16, 18–20].

The two guard values label the summands of $X \oplus Y$. The trace closes the return summand Y. Tracing out a register when we hide it instead takes the partial trace over a tensor factor, as in Section 5.

The finite trace satisfies the trace laws even for a body with a trapped return [3, Cor. 3.3.16] [5, Thms. 7–8]. The measured loop in Appendix C has a least fixed point. For the coherent loop, deriving a fixed-point operator from the trace by the cartesian construction would require a diagonal [22, Thm. 3.1]. For direct sum, $u \mapsto (u, u)$ doubles the squared norm of every nonzero u, so it cannot be a unitary in our language.

The two sheets below show how the trace acts on a nested loop and on a loop beside a bypass. Both equations use canonical reassociations of the summands.

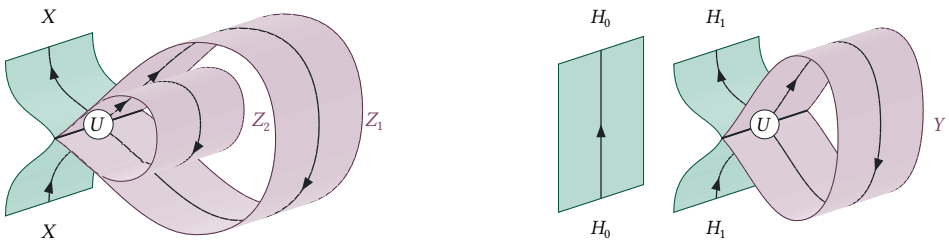

$$\mathrm{Tr}^{Z_1}(\mathrm{Tr}^{Z_2} U) = \mathrm{Tr}^{Z_1 \oplus Z_2} U \qquad I \oplus \mathrm{Tr}^{Y} U = \mathrm{Tr}^{Y}(I \oplus U)$$

Fig. 21. At left, both return ports of U are closed. At right, only the input on H_1 enters the loop.

The right sheet gives the block form used for `bypassRound`. The bypass contributes only to the immediate exit, whose block is $I \oplus x_0$. Each later exit is $0 \oplus x_k$, so their sum is $I \oplus L$. On the left, closing the two ports in either order solves both wire equations, as in Proposition 3.1.

G.1 The backward wire in the Int construction

In the loop diagram a wire runs backwards from the returning output to the next input. To make this drawing into a typed composition, the Int construction pairs each forward type P^+ with a backward type P^-. A map from P to Q can then consume P^+ from its left and Q^- from its right, so its underlying unitary has type $P^+ \oplus Q^- \to Q^+ \oplus P^-$. Figure 22 draws these ports.

In Figure 23, f sends b^+ to g and g sends b^- back to f. On external inputs a^+ and c^- the two middle amplitudes satisfy

$$b^+ = f_{11} a^+ + f_{12} b^-, \qquad b^- = g_{21} b^+ + g_{22} c^-.$$

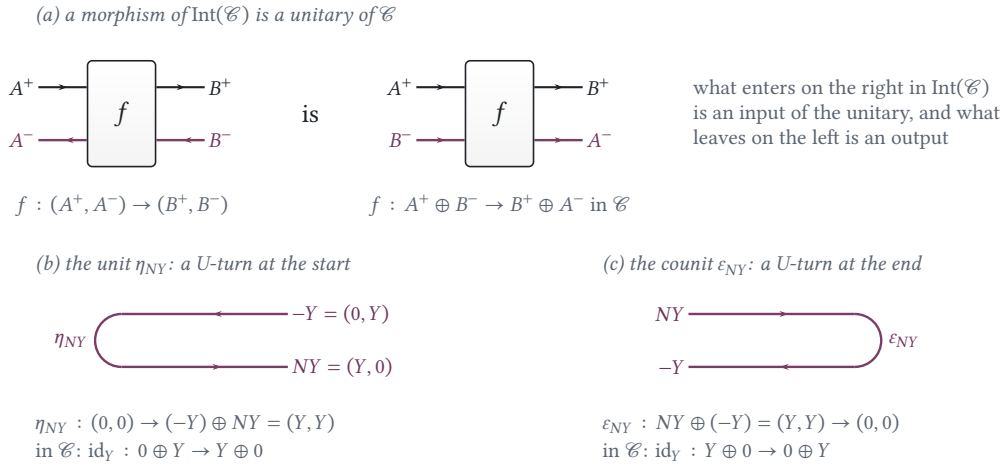


Fig. 22. Objects in the compact completion have forward and backward components. Cups and caps bend a port within that completion.

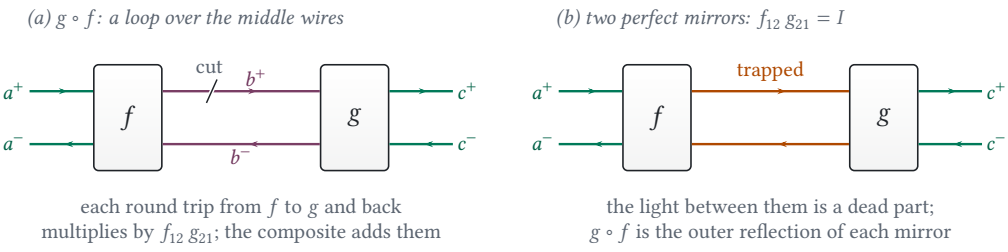


Fig. 23. Composition closes the middle ports. Between two perfect mirrors, a round trip returns the light unchanged and never reaches an outer port.

Follow b^+ once around the middle wires. The part reflected by g returns to f as $g_{21}b^+$, and f sends $f_{12}g_{21}b^+$ past the cut again. Substitution in the first equation gives

$$b^+ = \left(f_{11}a^+ + f_{12}g_{22}c^-\right) + f_{12}g_{21}b^+.$$

The parentheses collect what the two external inputs send to the cut. This is the wire equation of Section 3, with $y = b^+$ and $D = f_{12}g_{21}$. Once we solve it, f and g give the external outputs a^- and c^+. When $I - D$ is invertible this elimination gives the scattering matrix of the pair, the Redheffer star product [19, Figs. 10–11].

The fully faithful embedding $N(X) = (X, 0)$ gives X no backward port. Bending Y around NU identifies its returning output $Cu + Dy$ with its returning input y. Thus the compact closed trace in Figure 24 gives $N(L)$ by Theorem B.1 [28] [32, Thms. 5.15–5.16].

The sum in Int reverses the order of negative components:

$$(P^+, P^-) \oplus (Q^+, Q^-) = (P^+ \oplus Q^+, Q^- \oplus P^-).$$

Reversing the ports of $(Y, 0)$ gives its dual $(0, Y)$. The unit and counit are identity wires on Y with their ports rearranged. Composing two maps plugs the forward and backward middle ports together and takes the original trace. With $\eta_{NY} : 0 \to (-Y) \oplus NY$ and $\varepsilon_{NY} : NY \oplus (-Y) \to 0$, the typed

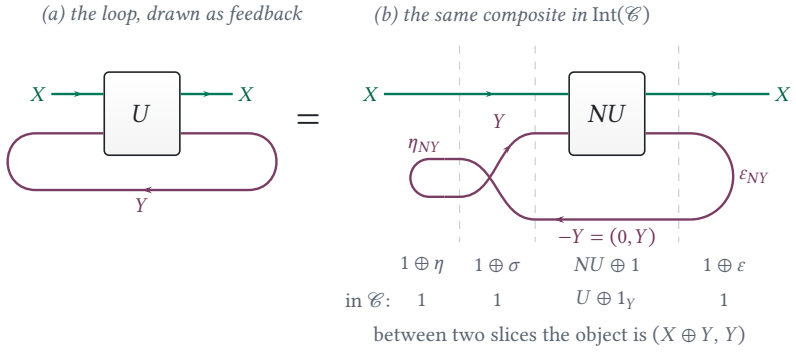


Fig. 24. Both diagrams close Y in $U : X \oplus Y \to X \oplus Y$. The cap takes the return onto the backward wire $(0, Y)$ and the cup brings it to the input.

closure is

$$N(\mathrm{Tr}^{Y} U) = (I_{NX'} \oplus \varepsilon_{NY})(NU \oplus I_{-Y})(I_{NX} \oplus \sigma_{-Y,NY})(I_{NX} \oplus \eta_{NY}).$$

Read the four regions in the right panel from left to right. The cup opens the two ports and the swap puts them in the order $NU \oplus I_{-Y}$ expects. In each direction Y moves past the zero space, so the underlying swap is $I_{Y \oplus Y}$, or $I_{X \oplus Y \oplus Y}$ with the external wire. The cap then joins the ports. Both bends belong to the compact completion.

H A ring realization of the same exits

In Figure 7, light stays in its waveguide with amplitude $t = 3/5$ and crosses to the other waveguide with amplitude $is = 4i/5$. This coupler is the rotation from `guardRound` in a different basis on the return wire, $(1 \oplus i)R_{\theta}(1 \oplus (-i))$. To leave after one trip, light crosses into the ring with amplitude is and crosses back with amplitude is. Each further trip adds a factor t for staying in the ring at the coupler. The exit after $k+1$ trips thus has coefficient $(is)t^{k}(is) = -s^{2}t^{k}$. Hence the coupler and the rotation have the same exit on every round and the same response $\Theta_{\mathrm{ring}}(z) = (t - z)/(1 - tz)$ at round-trip phase z. In the two clauses below, `(0 :+ 1)` is the coefficient i.

```
round ringCoupler : Unit + Unit = {
  exit unit ↔ [3/5 . exit unit + (0 :+ 1) . 4/5 . back unit];
  back unit ↔ [(0 :+ 1) . 4/5 . exit unit + 3/5 . back unit]
}

trace ringCoupler on unit
```

With no added phase the ring returns $-|*\rangle$.

The same exit amplitudes give both outputs in Figure 9. Write $u(T)$ for the incident field, with time measured relative to the direct path. The copy that makes k trips arrives $k\tau_0$ later with the amplitude of exit k. The field at the marked port is therefore

$$v(T) = t\,u(T) - s^{2} \sum_{k \geq 1} t^{k-1} u(T - k\tau_0).$$

Raymer and McKinstrie give this train of delayed copies with the opposite overall output sign [37, Eqs. (30)–(33)]. For a pulse shorter than τ_0, the copies have disjoint support. For a steady wave at round-trip phase 1, all the delayed copies equal $u(T)$. Their coefficients sum to $-s^{2}/(1-t) = -8/5$. Adding the direct $3/5$ gives the sign returned by the program [2, Eqs. (6)–(7)].

To realize `bypassRound`, match the bypass to the straight-through path in phase and travel time. Prepare the external qubit in $|+\rangle$, run the two paths, and apply H to compare them. At resonance, one trip around the ring brings the wave back in phase with itself. The round-trip factor is then $z = 1$, so the ring contributes -1 against the bypass amplitude 1 and the difference port has probability $|1-(-1)|^2/4 = 1$.

For a short pulse, only the direct field arrives with the bypass. Their amplitudes at the difference port are $-t/2$ and $1/2$, so the first bin contributes $(1-t)^2/4$. Each later bin contains just one delayed exit. The two splitters give its amplitude a factor $1/2$, and we add the resulting probabilities.

$$\Pr(b=1) = \frac{1}{4}\left((1-t)^2 + \sum_{k\geq 1} s^4 t^{2(k-1)}\right) = \frac{1}{4}\big((1-t)^2 + 1 - t^2\big) = \frac{1}{5}.$$

Table 1 gives the same two predictions for `bypassRound`. For the ring alone, measuring the tag preserves the scalar data channel. The bypass must be part of the body to reveal the sign. Only then can the immediate exit carry both paths.

For a single photon, prepare the path state $|+\rangle$ independently of frequency and write $p(\omega)$ for its spectral density. Suppose the detector sums over all arrival times without resolving frequency. Each frequency contributes its own difference-port probability, so the caller reads 1 with probability $\int p(\omega)|1-\Theta_{\mathrm{ring}}(e^{i\omega\tau_0})|^2\, d\omega/4$, with $\int p(\omega)\, d\omega = 1$. Write δ for the round-trip phase detuning. At fixed $|t| < 1$ the loss from the difference port is

$$\frac{|1+\Theta_{\mathrm{ring}}(e^{i\delta})|^2}{4} = \frac{(1+t)^2\sin^2(\delta/2)}{(1-t)^2 + 4t\sin^2(\delta/2)} = \frac{Q(1)^2}{4}\delta^2 + O_t(\delta^4).$$

If the spectrum lies in $|\delta| \leq h$ and has rms detuning σ, then $\mathbb{E}[\delta^4] \leq h^2\sigma^2$. As $h \to 0$ the mean loss is therefore $Q(1)^2\sigma^2/4 + o(\sigma^2)$. If the round-trip phase is uniform, averaging the full response over the spectrum gives the measured loop by (7.1).

Section 4 gives the switch-on field $-1+(1+t)t^n$ after n trips. Near $t = 1$ it takes $-1/\log t \sim 1/(1-t)$ trips to reduce the field error by a factor of e. In the steady state, the intensity magnification $Q(1)$ [23, Eq. (7)] gives the delay relative to the direct path. Indeed $d\varphi/d\omega = \tau_0$ for a frequency-independent coupler, so $-i\Theta^\dagger d\Theta/d\omega = \tau_0 Q(1)$ [41, 46].

I Observing the response

For a fixed $|z| = 1$, the phase iso $P_z^c = \{s \leftrightarrow z\cdot s\}_{s\in\mathscr{B}(c)} : c \leftrightarrow c$ gives the marked source body $\beta;(I_b \oplus P_z^c)$. The bypass caller is

$$H;\mathsf{trace}_1\big(\texttt{bypassRound};(I_{\texttt{Qubit}} \oplus P_z^1)\big);H.$$

The bypass exits at once and the rotation makes one return on average. Since only the rotation returns, $N_{\mathrm{bypass}} = \mathrm{diag}(0,1)$, giving mean $1/2$ on $|+\rangle$. At a fixed phase $z = e^{i\varphi}$ the final Hadamard gives

$$\Pr(b=1) = |1-\Theta_{\mathrm{rot}}(z)|^2/4$$

φ	0	$\pi/2$	π
$\Theta_{\mathrm{rot}}(e^{i\varphi})$	-1	$(15-8i)/17$	1
$\Pr(b=1)$	1	$1/17$	0

Averaging this test over the phase circle gives the measured probability $1/5$ by (7.1).

Comparing two nearby phases. In Section 7 the reference compares two phases of `guardRound`. Just before the phase gate the amplitudes at 1 and -1 are 2 and $1/2$, giving weights 4 and $1/4$. We now derive the readout for any body.

For $|z| = 1$ and $\delta \in \mathbb{R}$, let the reference space be $H_r = \mathbb{C}^2$, and put $P_\delta = \operatorname{diag}(1, e^{i\delta})$. Use distributivity to identify $H_r \otimes (X \oplus Y)$ with $(H_r \otimes X) \oplus (H_r \otimes Y)$. The open body controlled by the reference is the finite unitary

$$W_{z,\delta} = \big(I_{H_r \otimes X'} \oplus (P_\delta \otimes z I_Y)\big)(I_{H_r} \otimes U).$$

It has external type $H_r \otimes X \to H_r \otimes X'$ and returning summand $H_r \otimes Y$. The body preserves the reference bit and applies phase z on each return when $r = 0$, or $ze^{i\delta}$ when $r = 1$. After k returns the exit maps in these two sectors are therefore $z^k x_k$ and $(ze^{i\delta})^k x_k$. Summing in each sector gives the controlled gate $|0\rangle\langle 0|_r \otimes \Theta(z) + |1\rangle\langle 1|_r \otimes \Theta(ze^{i\delta})$.

On input $|+\rangle \otimes u$ with $\|u\| = 1$, this gate returns

$$\frac{|0\rangle_r \otimes \Theta(z)u + |1\rangle_r \otimes \Theta(ze^{i\delta})u}{\sqrt{2}}.$$

The caller applies $S^\dagger$ to put a factor $-i$ on the second branch, then H to bring the branches together. At outcome 0 the data vector is $(\Theta(z)u - i\Theta(ze^{i\delta})u)/2$. At outcome 1 the minus becomes a plus. Subtracting the two probabilities cancels the squared norm of each branch and leaves $\operatorname{Im}\langle \Theta(z)u, \Theta(ze^{i\delta})u\rangle$. By the definition of $Q(z)$, this difference is $\delta\langle u, Q(z)u\rangle + O(\delta^2)$.

To estimate the weight from these probabilities, score a zero as $+1$ and a one as -1. If the mean score is μ, its variance is $1 - \mu^2$. Averaging n independent scores and dividing by δ gives variance $(1 - \mu^2)/(n\delta^2)$ and bias $O(\delta)$ as an estimate of the weight. For a fixed body and phase, taking δ proportional to the target error ϵ makes the bias $O(\epsilon)$. With n proportional to ϵ^{-4} the standard error is also $O(\epsilon)$. The constants depend on how rapidly the response varies near that phase.

For example, let the two phases be 1 and i, so $\delta = \pi/2$. The scalar loop returns -1 on the first branch and $(15 - 8i)/17$ on the second. Their overlap is $(-15 + 8i)/17$. The probabilities sum to one and differ by $8/17$, giving $25/34$ for zero and $9/34$ for one. With the phases a quarter turn apart, dividing the difference by $\pi/2$ gives only $16/(17\pi)$. To read the local weight we hold the first phase at 1 and bring the second towards it. The probability difference divided by their angular separation then tends to 4.