


```
student@student:~$ cd lab6
student@student:~/lab6$ gedit task2.c
student@student:~/lab6$ gcc task2.c -o task2
student@student:~/lab6$ ./task2
Enter a string (max 50 characters): Fast university
Reversed string: ytIsrevinu tsaF
```

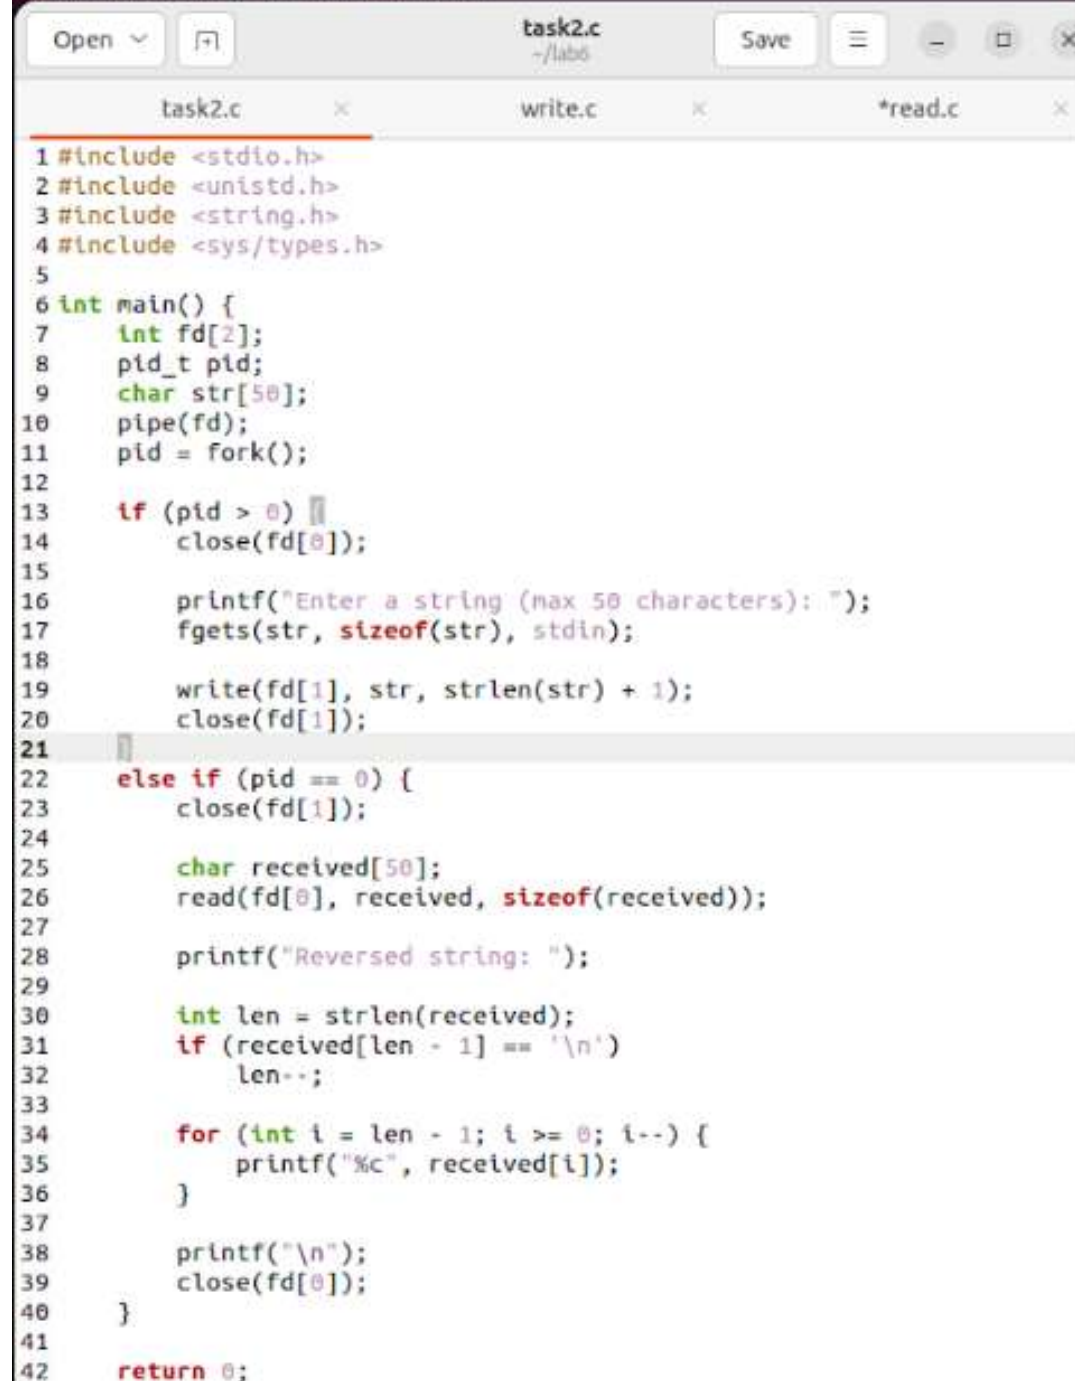

The screenshot shows a code editor window with the title bar "task2.c" and a file path "~/lab6". The editor contains the following C code:

```
1 #include <stdio.h>
2 #include <unistd.h>
3 #include <string.h>
4 #include <sys/types.h>
5
6 int main() {
7     int fd[2];
8     pid_t pid;
9     char str[50];
10    pipe(fd);
11    pid = fork();
12
13    if (pid > 0) {
14        close(fd[0]);
15
16        printf("Enter a string (max 50 characters): ");
17        fgets(str, sizeof(str), stdin);
18
19        write(fd[1], str, strlen(str) + 1);
20        close(fd[1]);
21
22    else if (pid == 0) {
23        close(fd[1]);
24
25        char received[50];
26        read(fd[0], received, sizeof(received));
27
28        printf("Reversed string: ");
29
30        int len = strlen(received);
31        if (received[len - 1] == '\n')
32            len--;
33
34        for (int i = len - 1; i >= 0; i--) {
35            printf("%c", received[i]);
36        }
37
38        printf("\n");
39        close(fd[0]);
40    }
41
42    return 0;
```