


App.jsx

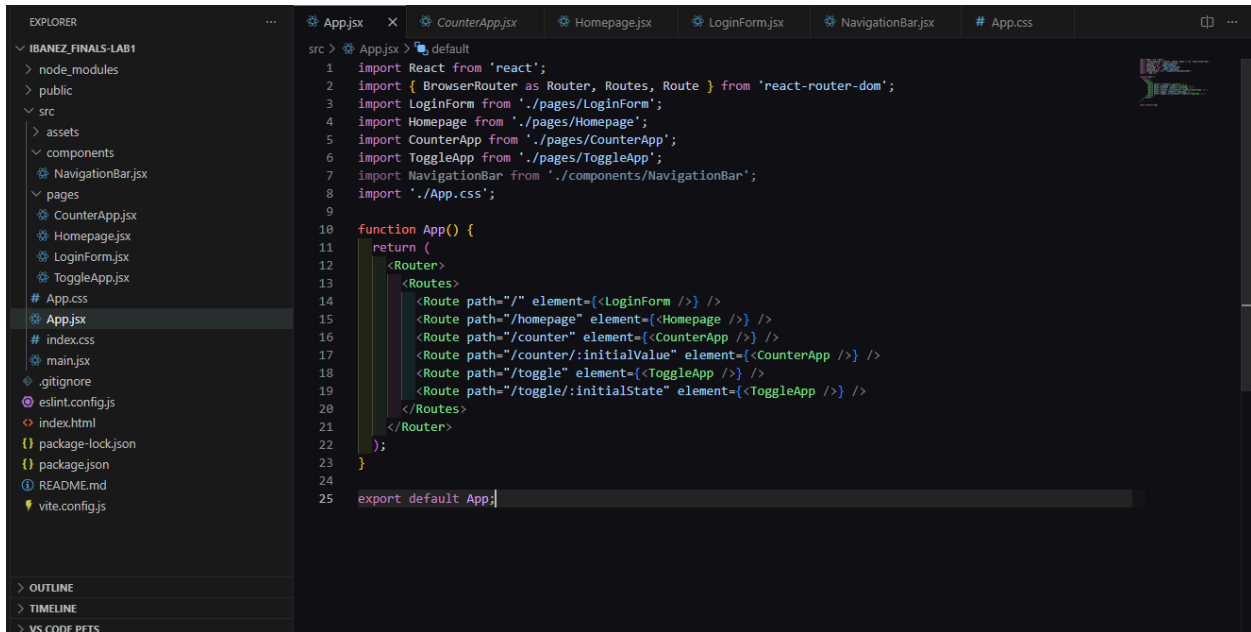


```

src > App.jsx > default
1  import React from 'react';
2  import { BrowserRouter as Router, Routes, Route } from 'react-router-dom';
3  import LoginForm from './pages/LoginForm';
4  import Homepage from './pages/Homepage';
5  import CounterApp from './pages/CounterApp';
6  import ToggleApp from './pages/ToggleApp';
7  import NavigationBar from './components/NavigationBar';
8  import './App.css';
9
10 function App() {
11   return (
12     <Router>
13       <Routes>
14         <Route path="/" element={<LoginForm />} />
15         <Route path="/homepage" element={<Homepage />} />
16         <Route path="/counter" element={<CounterApp />} />
17         <Route path="/counter/:initialValue" element={<CounterApp />} />
18         <Route path="/toggle" element={<ToggleApp />} />
19         <Route path="/toggle/:initialState" element={<ToggleApp />} />
20       </Routes>
21     </Router>
22   );
23 }
24
25 export default App;
  
```


PAGES FOLDER:

LoginForm.jsx

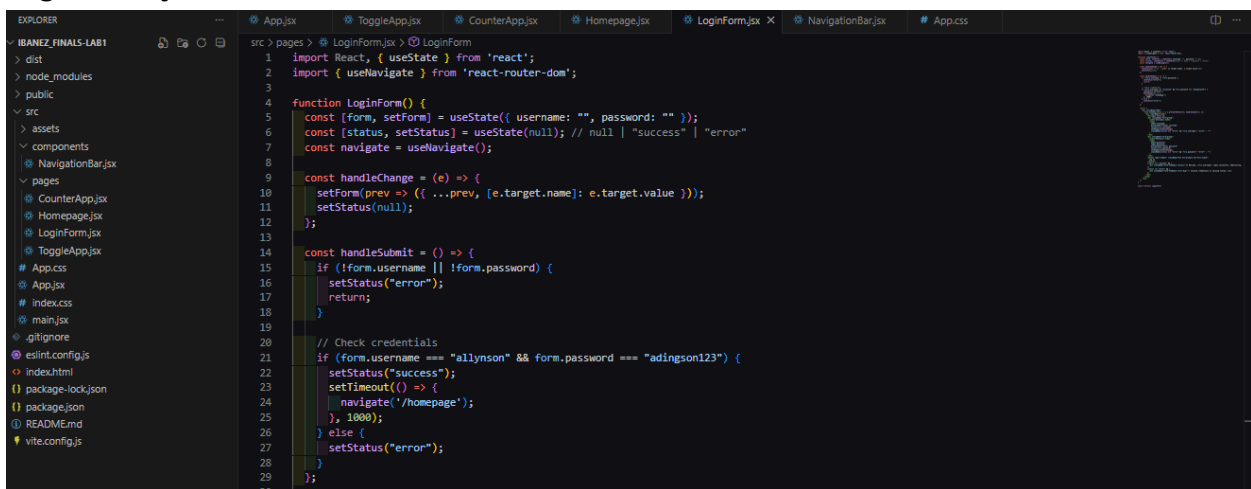

```

src > pages > LoginForm.jsx > LoginForm
1  import React, { useState } from 'react';
2  import { useNavigate } from 'react-router-dom';
3
4  function LoginForm() {
5    const [form, setForm] = useState({ username: "", password: "" });
6    const [status, setStatus] = useState(null); // null | "success" | "error"
7    const navigate = useNavigate();
8
9    const handleChange = (e) => {
10     setForm(prev => ({ ...prev, [e.target.name]: e.target.value }));
11     setStatus(null);
12   };
13
14   const handleSubmit = () => {
15     if (!form.username || !form.password) {
16       setStatus("error");
17       return;
18     }
19
20     // Check credentials
21     if (form.username === "allynson" && form.password === "adingson123") {
22       setStatus("success");
23       setTimeout(() => {
24         navigate('/homepage');
25       }, 1000);
26     } else {
27       setStatus("error");
28     }
29   };
30 }
  
```

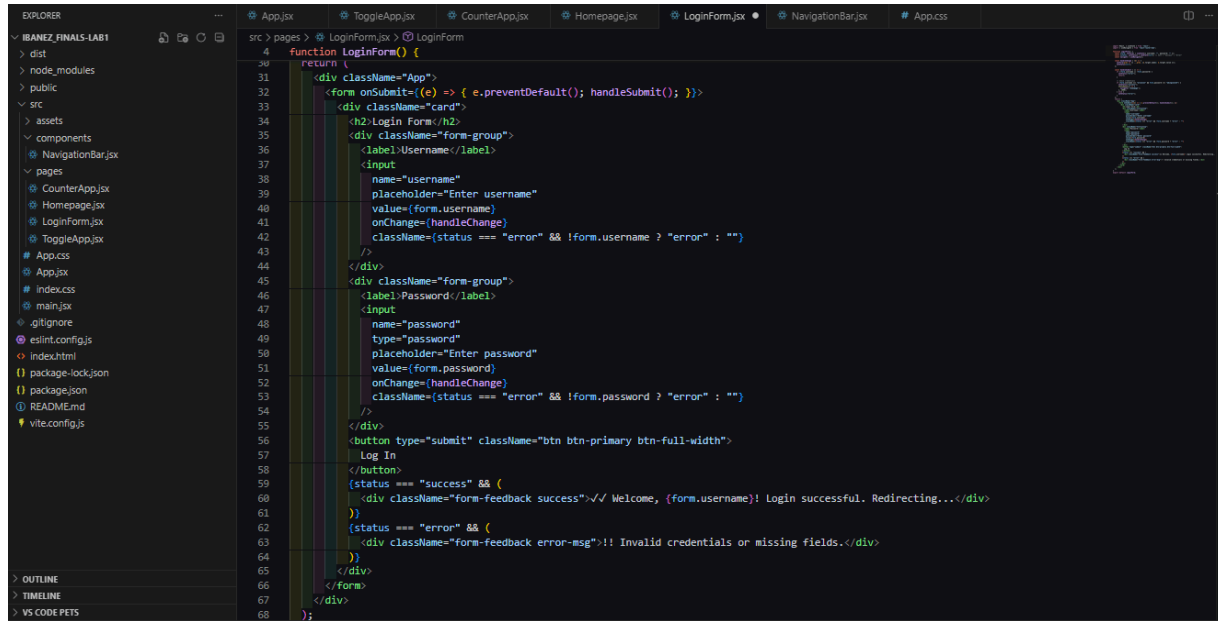

```
src > pages > LoginForm.jsx > LoginForm
4 function LoginForm() {
  5   return (
  6     <div className="App">
  7       <form onSubmit={e => { e.preventDefault(); handleSubmit(); }}>
  8         <div className="card">
  9           <h2>Login Form</h2>
 10           <div className="form-group">
 11             <label>Username</label>
 12             <input
 13               name="username"
 14               placeholder="Enter username"
 15               value={form.username}
 16               onChange={handleChange}
 17               className={status === "error" && !form.username ? "error" : ""}
 18             />
 19           </div>
 20           <div className="form-group">
 21             <label>Password</label>
 22             <input
 23               name="password"
 24               type="password"
 25               placeholder="Enter password"
 26               value={form.password}
 27               onChange={handleChange}
 28               className={status === "error" && !form.password ? "error" : ""}
 29             />
 30           </div>
 31           <button type="submit" className="btn btn-primary btn-full-width">
 32             Log In
 33           </button>
 34           {status === "success" && (
 35             <div className="form-feedback success">✓ Welcome, {form.username}! Login successful. Redirecting...</div>
 36           )}
 37           {status === "error" && (
 38             <div className="form-feedback error-msg">!! Invalid credentials or missing fields.</div>
 39           )}
 40         </div>
 41       </form>
 42     </div>
 43   );
 44 }
```

Homepage.jsx

```

EXPLORER
  IBANEZ_FINALS-LAB1
    dist
    node_modules
    public
    src
      assets
      components
      NavBar.jsx
      pages
        CounterApp.jsx
        Homepage.jsx
        LoginForm.jsx
        ToggleApp.jsx
      App.css
      App.jsx
      index.css
      main.jsx
      .gitignore
      eslint.config.js
      index.html
      package-lock.json
      package.json
      README.md
      vite.config.js

  src > pages > Homepage.jsx > default
1  import React, { useState, useEffect } from 'react';
2  import { Link } from 'react-router-dom';
3  import NavBar from '../components/NavBar';
4
5  function Homepage() {
6    const [posts, setPosts] = useState([]);
7    const [loading, setLoading] = useState(true);
8
9    useEffect(() => {
10     const fetchPosts = async () => {
11       try {
12         const response = await fetch('https://jsonplaceholder.typicode.com/posts');
13         const data = await response.json();
14         setPosts(data.slice(0, 5)); // Only show first 5 posts
15         setLoading(false);
16       } catch (error) {
17         console.error('Error fetching posts:', error);
18         setLoading(false);
19       }
20     };
21
22     fetchPosts();
23   }, []);
24
25   return (
26     <div>
27       <NavBar />
28       <div className="App">
29         <h1>Welcome to the Homepage!</h1>
30         <p>Choose an app to explore:</p>
31         <div className="app-links">
32           <Link to="/counter" className="app-link counter">
33             Counter App
34           </Link>
35           <Link to="/toggle" className="app-link toggle">
36             Toggle App
37           </Link>
38         </div>
39

```

```

EXPLORER
  IBANEZ_FINALS-LAB1
    dist
    node_modules
    public
    src
      assets
      components
      NavBar.jsx
      pages
        CounterApp.jsx
        Homepage.jsx
        LoginForm.jsx
        ToggleApp.jsx
      App.css
      App.jsx
      index.css
      main.jsx
      .gitignore
      eslint.config.js
      index.html
      package-lock.json
      package.json
      README.md
      vite.config.js

  src > pages > Homepage.jsx > default
5  function Homepage() {
40
41    <div className="api-section">
42      <h2>Fetch fake API data:</h2>
43      {loading ? (
44        <p>Loading posts...</p>
45      ) : (
46        <div>
47          {posts.map(post => (
48            <div key={post.id} className="post-card">
49              <h3>{post.title}</h3>
50              <p>{post.body}</p>
51            </div>
52          ))}
53        </div>
54      )}
55    </div>
56  </div>
57  );
58
59  export default Homepage;
60

```

CounterApp.jsx

```

EXPLORER
  IBANEZ_FINALS-LAB1
    dist
    node_modules
    public
    src
      assets
      components
        NavigationBar.jsx
      pages
        CounterApp.jsx
        Homepage.jsx
        LoginForm.jsx
        ToggleApp.jsx
      App.css
      App.jsx
      index.css
      main.jsx
      .gitignore
      eslint.config.js
      index.html
      package-lock.json
      package.json
      README.md
      vite.config.js

src > pages > CounterApp.jsx > CounterApp
1 import React, { useState } from 'react';
2 import { useParams, Link } from 'react-router-dom';
3 import NavigationBar from '../components/NavigationBar';
4
5 function CounterApp() {
6   const { initialValue } = useParams();
7   const [count, setCount] = useState(() => parseInt(initialValue) || 0);
8   const [step, setStep] = useState(1);
9
10   const handleIncrement = () => {
11     setCount(count + step);
12   };
13
14   const handleDecrement = () => {
15     setCount(count - step);
16   };
17
18   const handleReset = () => {
19     setCount(parseInt(initialValue) || 0);
20   };
21
22   return (
23     <div>
24       <NavigationBar />
25       <div className="App">
26         <h1>Counter App</h1>
27         <p>Dynamic routing example: Initial value = {initialValue || 0}</p>
28         <section className="counter-section">
29           <h2>Counter</h2>
30           <p>Count: {count}</p>
31           <div className="step-controls">
32             <label>Step size: </label>
33             <input
34               type="number"
35               value={step}
36               onChange={(e) => setStep(parseInt(e.target.value) || 1)}
37               min="1"
38               className="step-input"
39             />
40           </div>

```

```

EXPLORER
  IBANEZ_FINALS-LAB1
    dist
    node_modules
    public
    src
      assets
      components
        NavigationBar.jsx
      pages
        CounterApp.jsx
        Homepage.jsx
        LoginForm.jsx
        ToggleApp.jsx
      App.css
      App.jsx
      index.css
      main.jsx
      .gitignore
      eslint.config.js
      index.html
      package-lock.json
      package.json
      README.md
      vite.config.js

src > pages > CounterApp.jsx > CounterApp
5 function CounterApp() {
32   <label>Step size: </label>
33   <input
34     type="number"
35     value={step}
36     onChange={(e) => setStep(parseInt(e.target.value) || 1)}
37     min="1"
38     className="step-input"
39   />
40 </div>
41 <div className="button-group">
42   <button onClick={handleIncrement}>Increment (+{step})</button>
43   <button onClick={handleDecrement} className="btn-secondary">Decrement (-{step})</button>
44   <button onClick={handleReset} className="btn-secondary">Reset</button>
45 </div>
46 </section>
47
48 <div className="dynamic-links">
49   <h3>Try different initial values:</h3>
50   <p>Click reset after you pick a value.</p>
51   <Link to="/counter/0" className="dynamic-link">Start at 0</Link>
52   <Link to="/counter/10" className="dynamic-link">Start at 10</Link>
53   <Link to="/counter/100" className="dynamic-link">Start at 100</Link>
54 </div>
55 </div>
56 </div>
57
58 }
59
60 export default CounterApp;

```

ToggleApp.jsx

```

EXPLORER
  IBANEZ_FINALS-LAB1
    dist
    node_modules
    public
    src
      assets
      components
        NavigationBar.jsx
      pages
        CounterApp.jsx
        HomePage.jsx
        LoginForm.jsx
        ToggleApp.jsx
      App.css
      App.jsx
      index.css
      main.jsx
      .gitignore
      eslint.config.js
      index.html
      package-lock.json
      package.json
      README.md
      vite.config.js

    OUTLINE
    TIMELINE
    VS CODE PETS

src > pages > ToggleApp.jsx > ToggleApp
1 import React, { useState, useEffect } from 'react';
2 import { useParams } from 'react-router-dom';
3 import NavigationBar from '../components/NavigationBar';
4
5 function ToggleApp() {
6   const { initialState } = useParams();
7   const [showMessage, setShowMessage] = useState(initialState === 'true');
8
9   useEffect(() => {
10     // Update state when initialState parameter changes
11     setShowMessage(initialState === 'true');
12   }, [initialState]);
13
14   const handleToggle = () => {
15     setShowMessage(!showMessage);
16   };
17
18   return (
19     <div>
20       <NavigationBar />
21       <div className="App">
22         <h1>Toggle App</h1>
23         <p>Dynamic routing example: Initial state = {initialState || 'false'}</p>
24         <section className="toggle-section">
25           <h2>Show/Hide Toggle</h2>
26           <button onClick={handleToggle}>
27             {showMessage ? 'Hide' : 'Show'} Message
28           </button>
29           {showMessage && <p>This is a toggleable message!</p>}
30         </section>
31
32         <div className="toggle-links">
33           <h3>Try different initial states:</h3>
34           <a href="/toggle/false" className="toggle-link">Start Hidden</a>
35           <a href="/toggle/true" className="toggle-link">Start Visible</a>
36         </div>
37       </div>
38     </div>
39   );
40 }

```

COMPONENTS FOLDER:

NavigationBar.jsx

```

EXPLORER
  IBANEZ_FINALS-LAB1
    dist
    node_modules
    public
    src
      assets
      components
        NavigationBar.jsx
      pages
        CounterApp.jsx
        HomePage.jsx
        LoginForm.jsx
        ToggleApp.jsx
      App.css
      App.jsx
      index.css
      main.jsx
      .gitignore
      eslint.config.js
      index.html
      package-lock.json
      package.json
      README.md
      vite.config.js

    OUTLINE
    TIMELINE
    VS CODE PETS


src > components > NavigationBar.jsx > NavigationBar
1 import React from 'react';
2 import { Link, useLocation } from 'react-router-dom';
3
4 function NavigationBar() {
5   const location = useLocation();
6
7   // Don't show navbar on login page
8   if (location.pathname === '/') {
9     return null;
10   }
11
12   return (
13     <nav className="navbar">
14       <div className="navbar-container">
15         <div className="navbar-links">
16           <Link
17             to="/homepage"
18             className={ `navbar-link ${location.pathname === '/homepage' ? 'active' : ''} ` }
19           >
20             Home
21           </Link>
22           <Link
23             to="/counter"
24             className={ `navbar-link ${location.pathname.startsWith('/counter') ? 'active' : ''} ` }
25           >
26             Counter
27           </Link>
28           <Link
29             to="/toggle"
30             className={ `navbar-link ${location.pathname.startsWith('/toggle') ? 'active' : ''} ` }
31           >
32             Toggle
33           </Link>
34         </div>
35         <Link
36           to="/"
37           className="logout-btn"
38         >
39           Logout
40         </Link>

```


FOLDER STRUCTURE:

IBANEZ-FINALS-LAB1

- **Src**
 - **Components**
 - **NavigationBar.jsx**
 - **Pages**
 - **CounterApp.jsx**
 - **Homepage.jsx**
 - **LoginForm.jsx**
 - **ToggleApp.jsx**
 - **App.jsx**
 - **App.css**

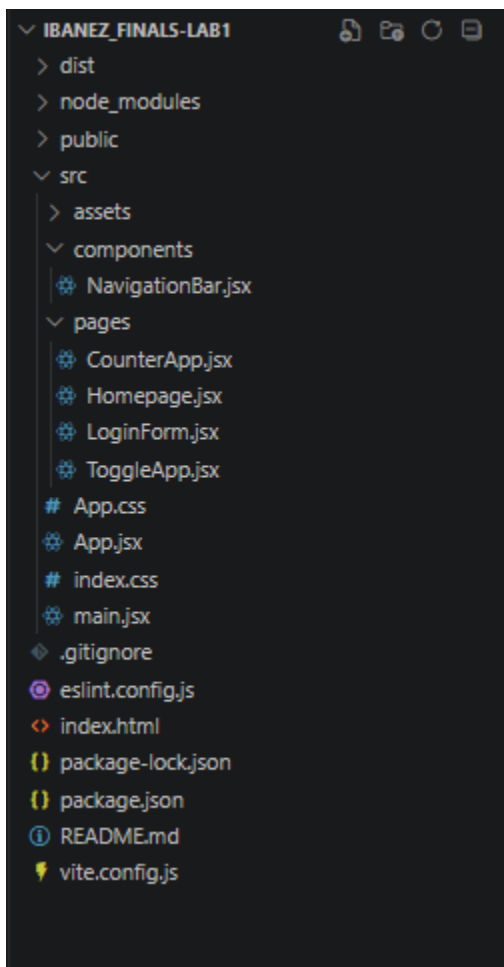


Output:
Loginform:

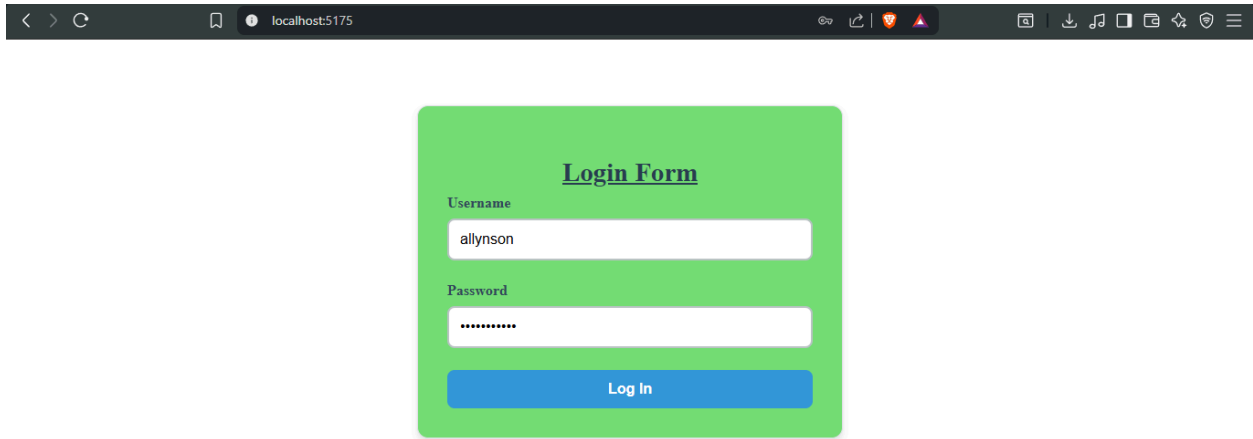

The screenshot shows a web browser window with the address bar displaying 'localhost:5175'. The main content area features a green card with the title 'Login Form'. Below the title, there are two input fields: 'Username' with the value 'allynson' and 'Password' with masked characters '*****'. A blue button labeled 'Log In' is positioned at the bottom of the card.

Username required: allynson Password required: adingson123

Homepage (With navbar and fake api data):

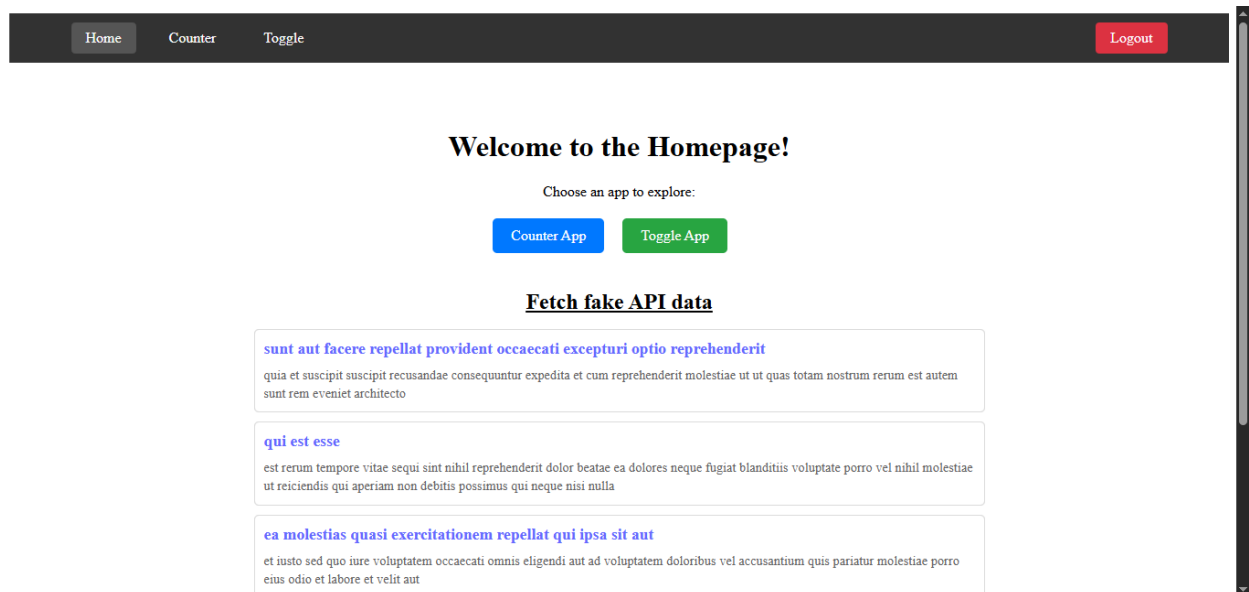

The screenshot displays a web application homepage. The top navigation bar (navbar) is dark gray and contains the links 'Home', 'Counter', and 'Toggle', along with a red 'Logout' button on the right. The main content area has a heading 'Welcome to the Homepage!' followed by the text 'Choose an app to explore:'. Below this text are two buttons: 'Counter App' (blue) and 'Toggle App' (green). Further down, there is a section titled 'Fetch fake API data' which contains three cards, each with a blue heading and a paragraph of placeholder text.

Fetch fake API data

sunt aut facere repellat provident occaecati excepturi optio reprehenderit
quia et suscipit suscipit recusandae consequuntur expedita et cum reprehenderit molestiae ut ut quas totam nostrum rerum est autem sunt rem eveniet architecto

qui est esse
est rerum tempore vitae sequi sint nihil reprehenderit dolor beatae ea dolores neque fugiat blanditiis voluptate porro vel nihil molestiae ut reiciendis qui aperiam non debitis possimus qui neque nisi nulla

ea molestias quasi exercitationem repellat qui ipsa sit aut
et iusto sed quo iure voluptatem occaecati omnis eligendi aut ad voluptatem doloribus vel accusantium quis pariatur molestiae porro eius odio et labore et velit aut

Counter page:

[Home](#) [Counter](#) [Toggle](#) [Logout](#)

Counter App

Dynamic routing example: Initial value = 0

Counter

Count: 0

Step size:

[Increment \(+1\)](#) [Decrement \(-1\)](#) [Reset](#)

Try different initial values:

Click reset after you pick a value.

[Start at 0](#) [Start at 10](#) [Start at 100](#)

Toggle message page:

[Home](#) [Counter](#) [Toggle](#) [Logout](#)

Toggle App

Dynamic routing example: Initial state = false

Show/Hide Toggle

[Show Message](#)

Try different initial states:

[Start Hidden](#) [Start Visible](#)