

Exercise 2: Verifying Interactions

Code:

API.java:

```
package org.example;

public class API {

    public String getName() {
        return "Adit";
    }
}
```

Booking.java

```
package org.example;

public class Booking {
    API api = new API();

    public String Booking() {
        return ("Booked for "+api.getName());
    }
}
```

BookingTest.java

```
package org.example;
import org.junit.jupiter.api.extension.ExtendWith;
import org.mockito.*;

import org.junit.jupiter.api.Test;
import org.mockito.junit.jupiter.MockitoExtension;

import static org.junit.jupiter.api.Assertions.assertEquals;
import static org.junit.jupiter.api.Assertions.assertTrue;
import static org.mockito.Mockito.when;


@ExtendWith(MockitoExtension.class)
class BookingTest{

    //Created Fake object
    @Mock
    API api;

    //The class into which mocks will be injected
    @InjectMocks
    Booking booking;
```

```
@Test
void bookingTest() {
    when(api.getName()).thenReturn("Advay");
    assertEquals("Booked for Advay", booking.Booking());
    verify(api).getName();
}
}
```

Results:

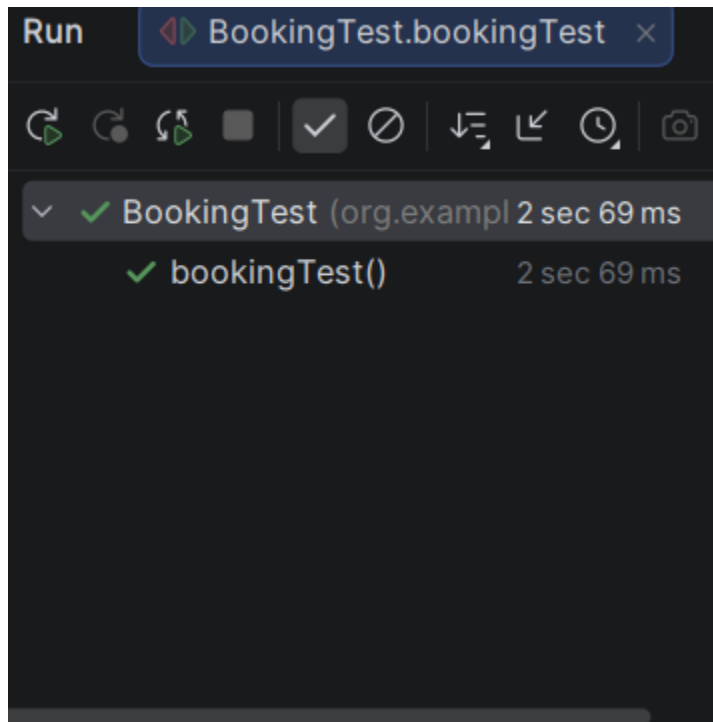

IDEA TDD Version Control BookingTest.bookingTest

Project TDD C:\Users\adits\Desktop\TDD

- idea
 - .gitignore
 - compiler.xml
 - encodings.xml
 - jarRepositories.xml
 - misc.xml
 - workspace.xml
- mvn
- src
 - main
 - java
 - org.example 25% classes, 16% lines covered
 - API 0% methods, 0% lines covered
 - Booking 100% methods, 100% lines covered
 - Calculator 0% methods, 0% lines covered

Calculator.java BookingTest.java

```
13 @ExtendWith(MockitoExtension.class)
14 class BookingTest{
15
16     //Created Fake object
17     @Mock
18     API api;
19
20     //The class into which mocks will be injected
21     @InjectMocks
22     Booking booking;
23
24     @Test
25     void bookingTest(){
26         when(api.getName()).thenReturn("Advay");
27         assertEquals("Booked for Advay", booking.booking());
28         verify(api).getName();
29     }
30 }
```

Coverage BookingTest.bookingTest

Element	Class, %	Method, %	Line, %	Branch, %
org.example	25% (1/4)	16% (1/6)	16% (1/6)	100% (0/0)
API	0% (0/1)	0% (0/1)	0% (0/1)	100% (0/0)
Booking	100% (1/1)	100% (1/1)	100% (1/1)	100% (0/0)
Calculator	0% (0/1)	0% (0/3)	0% (0/3)	100% (0/0)
Main	0% (0/1)	0% (0/1)	0% (0/1)	100% (0/0)

Cover BookingTest.bookingTest

BookingTest (org.example) 2 sec 184 ms 1 test passed 1 test total, 2 sec 184 ms

bookingTest() 2 sec 184 ms

WARNING: A Java agent has been loaded dynamically (C:\Users\adits\m2\repository\net\bytebuddy\byte-buddy-agent\1.17.5\byte-buddy-agent-1.17.5.jar) to enhance the runtime heap memory. This warning is only shown once. To suppress this warning, use the -XX:-EnableDynamicAgentLoading option.

WARNING: If a serviceability tool is in use, please run with -XX:-EnableDynamicAgentLoading to hide this warning.

WARNING: Dynamic loading of agents will be disallowed by default in a future release.

Java HotSpot(TM) 64-Bit Server VM warning: Sharing is only supported for boot loader classes because bootstrap classpath has been appended.

Process finished with exit code 0

TDD > src > test > java > org > example > BookingTest > bookingTest 30:6 CRLF UTF-8 4 spaces

IDEA TDD Version Control BookingTest.bookingTest

Project TDD C:\Users\adits\Desktop\TDD

- idea
 - .gitignore
 - compiler.xml
 - encodings.xml
 - jarRepositories.xml
 - misc.xml
 - workspace.xml
- mvn
- src
 - main
 - java
 - org.example
 - API
 - Booking
 - Calculator

Main.java Booking.java API.java Calculator.java BookingTest.java pom.xml (TDD)

```
13 @ExtendWith(MockitoExtension.class)
14 class BookingTest{
15
16     //Created Fake object
17     @Mock
18     API api;
19
20     //The class into which mocks will be injected
21     @InjectMocks
22     Booking booking;
23
24     @Test
25     void bookingTest(){
26         when(api.getName()).thenReturn("Advay");
27         assertEquals("Booked for Advay", booking.booking());
28         verify(api).getName();
29     }
30 }
```

Run BookingTest.bookingTest

BookingTest (org.example) 2 sec 69 ms 1 test passed 1 test total, 2 sec 69 ms

bookingTest() 2 sec 69 ms

WARNING: A Java agent has been loaded dynamically (C:\Users\adits\m2\repository\net\bytebuddy\byte-buddy-agent\1.17.5\byte-buddy-agent-1.17.5.jar) to enhance the runtime heap memory. This warning is only shown once. To suppress this warning, use the -XX:-EnableDynamicAgentLoading option.

WARNING: If a serviceability tool is in use, please run with -XX:-EnableDynamicAgentLoading to hide this warning.

WARNING: Dynamic loading of agents will be disallowed by default in a future release.

Java HotSpot(TM) 64-Bit Server VM warning: Sharing is only supported for boot loader classes because bootstrap classpath has been appended.

Process finished with exit code 0

TDD > src > test > java > org > example > BookingTest

Snipping Tool

Screenshot copied to clipboard
Automatically saved to screenshots folder.

Mark-up and share