

Spring Core – Load Country from Spring Configuration XML

springLearnApplication.properties :

```
spring.application.name=spring-learn  
logging.level.com.cognizant=DEBUG
```

Country.xml

```
<?xml version="1.0" encoding="UTF-8"?>  
  
<beans xmlns="http://www.springframework.org/schema/beans"  
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"  
    xsi:schemaLocation="  
        http://www.springframework.org/schema/beans  
        https://www.springframework.org/schema/beans/spring-beans.xsd">  
  
    <bean id="country"  
        class="com.cognizant.springlearn.Country">  
  
        <property name="code" value="IN"/>  
  
        <property name="name" value="India"/>  
  
    </bean>  
  
</beans>
```

SpringLearnApplication

```
package com.cognizant.springlearn;  
import org.slf4j.Logger;  
import org.slf4j.LoggerFactory;  
import org.springframework.boot.SpringApplication;  
import org.springframework.boot.autoconfigure.SpringBootApplication;  
import org.springframework.context.ApplicationContext;  
import org.springframework.context.support.ClassPathXmlApplicationContext;  
  
@SpringBootApplication  
public class SpringLearnApplication {  
    private static final Logger LOGGER =  
        LoggerFactory.getLogger(SpringLearnApplication.class);
```

```

public static void main(String[] args) {

    SpringApplication.run(SpringLearnApplication.class, args);

    LOGGER.info("Inside main");
    displayCountry();
}

private static void displayCountry() {


    ApplicationContext context =
        new ClassPathXmlApplicationContext("country.xml");

    Country country =
        context.getBean("country", Country.class);

    LOGGER.debug("Country : {}", country);
}
}

```

Output:

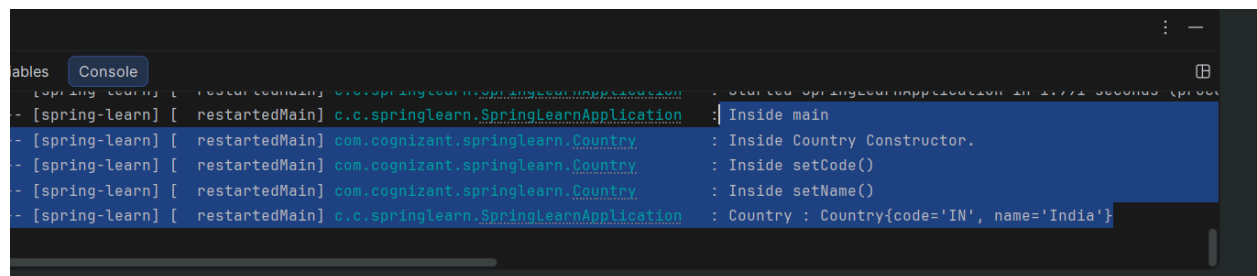

```

[spring-learn] [ restartedMain] c.o.springlearn.SpringLearnApplication : Started SpringLearnApplication in 1.774 seconds (prod
- [spring-learn] [ restartedMain] c.o.springlearn.SpringLearnApplication : Inside main
- [spring-learn] [ restartedMain] com.cognizant.springlearn.Country : Inside Country Constructor.
- [spring-learn] [ restartedMain] com.cognizant.springlearn.Country : Inside setCode()
- [spring-learn] [ restartedMain] com.cognizant.springlearn.Country : Inside setName()
- [spring-learn] [ restartedMain] c.o.springlearn.SpringLearnApplication : Country : Country{code='IN', name='India'}

```