Cybersecurity Manual

Home Assistant Green

Template Version: v0.39 (26 October 2026) · Document version 0.1 · 2026-11-08

Table of Contents

1 Introduction
- 1.1 Quick reference
- 1.2 Document information
- 1.3 Definitions
- 1.4 References [optional]

2 Product properties and context
- 2.1 Product (P)
- 2.2 Security Properties (SP)
- 2.3 Context (C)

3 How to use the product securely
- 3.1 Intended Purpose and reasonably foreseeable use (IPRFU)
- 3.2 Secure commissioning and setup
- 3.3 Secure use: Conditions of Use (CU) and Circumstances leading to Risk (CR) per product Function (FC)
  - 3.3.1 Function FC01 Run the smart home
  - 3.3.2 Function FC02 Administer Home Assistant
  - 3.3.3 Function FC03 Back up and restore
  - 3.3.4 Function FC04 Recover access
  - 3.3.5 Function FC06 Factory reset
- 3.4 Secure installation of security updates
  - 3.4.1 Function FC05 Install security updates
  - 3.4.2 Disabling of automatic security updates
- 3.5 Secure decommissioning and data removal
- 3.6 Integration guidance for system integrators

4 Contact and links
- 4.1 Manufacturer information
- 4.2 Vulnerabilities and security updates
- 4.3 EU Declaration of Conformity
- 4.4 Software Bill of Materials (SBOM) [optional]

5 CRA essential requirements reference [optional]
- 5.1 CRA Annex I, Part I
- 5.2 CRA Annex I, Part II

1 Introduction

This document provides information & instructions to the user as required by the EU Cyber Resilience Act (CRA, EU regulation (2024/2847)). Its contents are in line with the CRA Annex II requirements. Note: All chapters marked [optional] are not legally required by the CRA.

The intention of this document is to provide the user with all necessary information pertaining to the cybersecurity of the product. Reading and understanding this document is required to ensure the secure setup, use, and decommissioning of the product.

The focus of this document is on explaining how to securely use the product, not on explaining how to use the product in general. It is a cybersecurity manual and does not replace user manuals.

1.1 Quick reference

Product properties and context	2.1 Product (P): Home Assistant Green · NC-GREEN-9703 (datasheet v2.0); the EU Declaration of Conformity names NC-GREEN-1175 2.2 Security Properties (SP): SP01 No default account, SP02 No onboard radios, SP03 Backup before update, SP04 Factory reset clears the data partition
How to use the product securely	3.2 Secure commissioning and setup 3.3 Secure use: Conditions of Use (CU) and Circumstances leading to Risk (CR) per product Function (FC): FC01 Run the smart home, FC02 Administer Home Assistant, FC03 Back up and restore, FC04 Recover access, FC06 Factory reset
Contact and links	4.1 Manufacturer information: Nabu Casa, Inc. · green@nabucasa.com · home-assistant.io/green

1.2 Document information

Version	0.1
Date	2026-11-08
Author	Cairn Viktor for the Value Chain Risk Institute (illustrative example, not the manufacturer's manual)

1.3 Definitions

For more information on each of these concepts, please refer to the Cyber Manual GUIDANCE.

ID	Concept	Description
P	Product	The product under consideration.
PC	Product component	The components the product consists of.

PI	Physical interfaces	Physical interfaces implemented in the product.
PP	Product protocol / service	Logical interfaces (protocols and services) implemented in the product.
C	Context	Reflects the manufacturer's assumptions on the operational environment of the product. Contains all elements (technical components, persons, zones) that do not belong to the product but are needed to describe the product functions.
CC	Context component	The components (systems, networks) the context consists of.
CP	Context persons	Persons that interact with the product.
CZ	Context zones	Zones that categorize context components or persons for example based on physical location, organizational structure, or trust boundaries.
FC	Function	Behavior or capability that a product must perform to satisfy stakeholder needs. The core and ancillary functionality of the product.
SP	Security Property	Security characteristics implemented in the product. The manufacturer is responsible for implementing the Security Properties.
CU	Conditions of Use	Security characteristics implemented in the product context. The user is responsible for meeting the conditions of use to ensure secure use of the product.
IPRFU	Intended purpose and reasonably foreseeable use	The combination of the context, product functions, and the conditions of use: A product is used according to its intended purpose and reasonably foreseeable use when it is used - In the defined context - for the defined functions - adhering to the defined conditions of use.
CR	Circumstances leading to significant cybersecurity risk	Violation of a condition of use, reasonably foreseeable misuse or other circumstances the user can influence that may lead to unwanted damage scenarios.

1.4 References [optional]

- Datasheet v2.0 (4 Aug 2025) and EU DoC (3 Jul 2026), github.com/NabuCasa/support
- support.nabucasa.com Home Assistant Green articles (updated 2026)
- home-assistant.io/security
- home-assistant.io/getting-started/onboarding
- home-assistant.io/common-tasks/os

2 Product properties and context

2.1 Product (P)

2.1.1 Product identification

Product name	Home Assistant Green
Product type / model / version	NC-GREEN-9703 (datasheet v2.0); the EU Declaration of Conformity names NC-GREEN-1175
Product identification [optional]	NOT FOUND in the public documentation read on 8 November 2026.
Additional information [optional]	Illustrative example for the Cyber Manual Movement, built by the Value Chain Risk Institute with the CRA Manual Builder from public documentation read on 8 November 2026. It is NOT the manufacturer's manual and makes no claim about CRA conformity. Gaps are marked NOT FOUND rather than filled in. Smart home hub running Home Assistant Operating System, manufactured by Nabu Casa, Inc. It has no onboard radios; Zigbee, Thread and Z-Wave need USB adapters. The datasheet changed the SKU from NC-GREEN-1175 to NC-GREEN-9703 on 5 August 2025, while the EU DoC of 3 July 2026 still names NC-GREEN-1175.

2.1.2 Product diagram [optional]



2.1.2 Product diagram. The product's main components and the interfaces through which it is reached. Everything inside the dashed line is the manufacturer's responsibility.

Drawn from the same lists as the tables · Cyber Manual template v0.39 structure · Value Chain Risk Institute · Method: the Derivation Rule, Marpet & Viktor 2026 · CC BY 4.0

2.1.3 Product components (PC) list [optional]

ID	Title & Description

PC01	Rockchip RK3566 SoC (quad-core Cortex-A55, 1.8 GHz)
PC02	4 GB LPDDR4X RAM
PC03	32 GB eMMC
PC04	Home Assistant Operating System (Home Assistant Core and Supervisor)
PC05	Optional CR2032 battery (not included)

2.1.4 Product interfaces [optional]

PHYSICAL INTERFACES


ID	Title / Description
PI01	Gigabit Ethernet
PI02	2x USB 2.0 Type-A
PI03	HDMI (diagnostics only)
PI04	microSD slot (recovery and diagnostics)
PI05	DC power, 12 V 1 A
PI06	3 status LEDs

PROTOCOLS AND SERVICES

ID	Protocol / Service / URL	Physical interface	Port	Function	Enabled by default
PP01	HTTP / TCP (web interface)	PI01 Gigabit Ethernet	8123 or 80	FC01 Run the smart home; FC02 Administer Home Assistant	yes
PP02	Local console (HDMI monitor and USB keyboard)	PI03 HDMI; PI02 USB	/	FC04 Recover access	yes, opens automatically
PP03	Zigbee, Thread or Z-Wave through USB adapters	PI02 USB	/	FC01 Run the smart home	no (adapter needed)
PP04	Outbound connection to update servers	PI01 Gigabit Ethernet	/	FC05 Install security updates; FC06 Factory reset	yes

2.2 Security Properties (SP)

2.2.1 Security property diagram [optional]

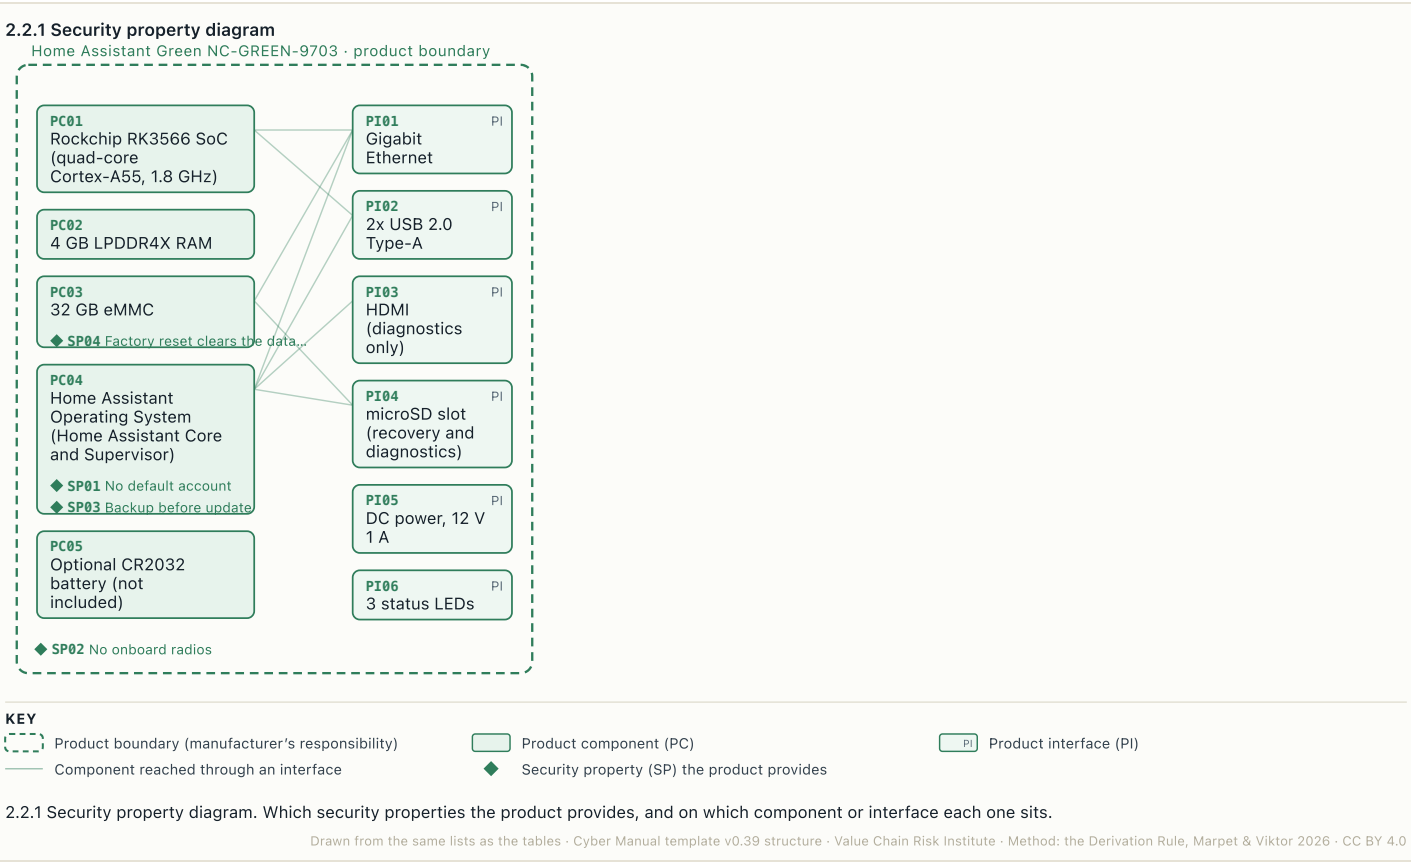

2.2.1 Security property diagram. Which security properties the product provides, and on which component or interface each one sits.


Drawn from the same lists as the tables · Cyber Manual template v0.39 structure · Value Chain Risk Institute · Method: the Derivation Rule, Marpet & Viktor 2026 · CC BY 4.0

2.2.2 Security property list

ID	Affected component(s)	Title & Description
SP01	PC04 Home Assistant Operating System	**No default account** 2b 2d The owner account and password are created during onboarding; there is no default password.
SP02	Product: Home Assistant Green	**No onboard radios** 2j The device has no Wi-Fi, Bluetooth, Zigbee or Thread radio; radio interfaces exist only if the user adds adapters.
SP03	PC04 Home Assistant Operating System	**Backup before update** 2h 2k Updates offer an automatic or manual backup before they are installed.
SP04	PC03 32 GB eMMC	**Factory reset clears the data partition** 2m The reset removes all user data as well as Home Assistant Core, the Supervisor and installed apps.

2.3 Context (C)

2.3.1 Context diagram [optional]

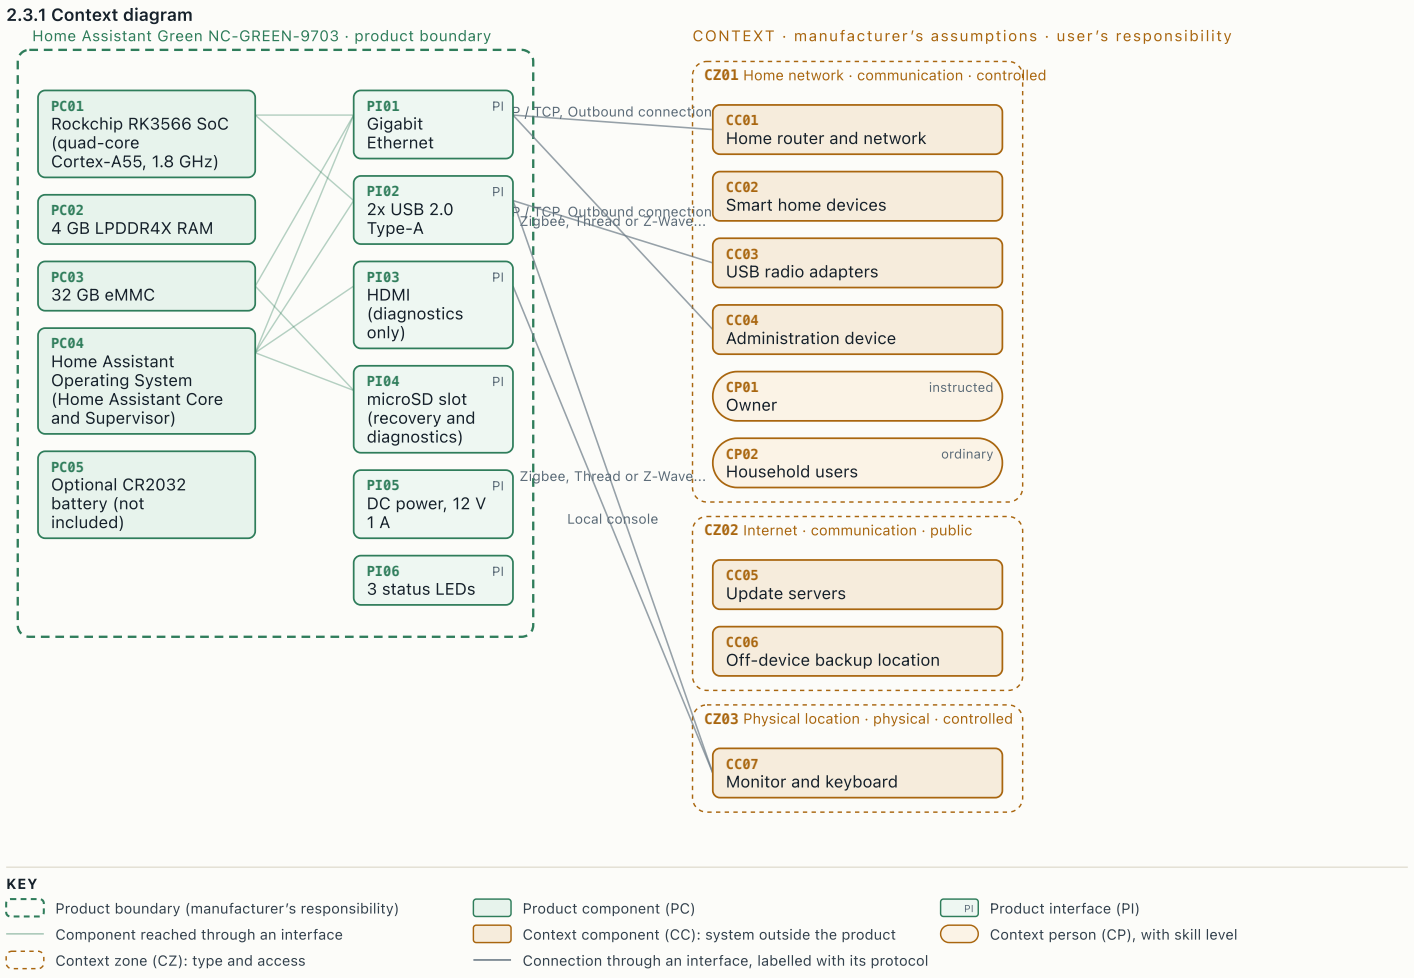

2.3.1 Context diagram. What the product relies on outside its boundary, who works with it, and in which zones. Everything outside the dashed line is an assumption the user is responsible for making true.

Drawn from the same lists as the tables · Cyber Manual template v0.39 structure · Value Chain Risk Institute · Method: the Derivation Rule, Marpet & Viktor 2026 · CC BY 4.0

2.3.2 Context component (CC) list

ID	Title & Description
CC01	**Home router and network** The wired network the device connects to by Ethernet.
CC02	**Smart home devices** Devices controlled through integrations or USB radio adapters.
CC03	**USB radio adapters** For example Home Assistant Connect ZBT-1 (Zigbee or Thread) or ZWA-2 (Z-Wave).
CC04	**Administration device** A browser or phone used to open the web interface.
CC05	**Update servers** Servers delivering Home Assistant versions during onboarding and updates.
CC06	**Off-device backup location** Home Assistant Cloud or another location outside the device.

CC07	**Monitor and keyboard** Used for the local console during recovery.

2.3.3 Context person (CP) list [optional]

ID	Title & Description	Skill (ordinary, instructed, skilled)
CP01	**Owner** The person who sets up the hub and holds the owner account.	instructed
CP02	**Household users** People with their own Home Assistant accounts.	ordinary

2.3.4 Context zone (CZ) list [optional]

ID	Title & Description	Type (physical, communication)	Access (public, limited, controlled)
CZ01	**Home network** The owner's local network	communication	controlled
CZ02	**Internet** Everything outside the home network	communication	public
CZ03	**Physical location** Where the hub is installed (indoors, 0 to 40 C)	physical	controlled

3 How to use the product securely

This chapter describes the secure use of the product across its lifecycle.

3.1 Intended Purpose and reasonably foreseeable use (IPRFU)

Generally, secure use of the product means using it in line with its intended purpose and reasonably foreseeable use (IPRFU).

The intended purpose and reasonably foreseeable use of the product are defined as product use

- in the context (C) defined in chapter 2.3,
- for the functions (FC) defined in chapters 3.3 and 3.4,
- while adhering to the conditions of use (CU) defined in chapters 3.3 and 3.4.

3.2 Secure commissioning and setup

Secure default configurations are listed in chapter 2.2 Security Properties (SP). The information which protocols are enabled or disabled by default is provided in the interfaces list in chapter 2.1 Product (P).

Additional remarks for secure commissioning and setup:

- Connect power and Ethernet.
- Open http://homeassistant.local (or :8123) and wait while Home Assistant downloads its latest version; this needs internet and can take 20 minutes or more.
- Create the owner account with a strong password, or restore from a backup.
- Set up backups to a location outside the device.

3.3 Secure use: Conditions of Use (CU) and Circumstances leading to Risk (CR) per product Function (FC)

3.3.1 Function FC01 Run the smart home

FUNCTION (FC)

ID	FC01
Title	Run the smart home
Description	Run Home Assistant integrations and automations for connected devices.
Reasonably foreseeable use [optional]	Installing third-party integrations or apps.
Core / ancillary functionality	core functionality

SECURE USE DIAGRAM [OPTIONAL]

CONDITIONS OF USE (CU)

ID	Affects (component CC / person CP / zone CZ)	Title & Description
CU02	CC01 Home router and network	**Wired, local, not exposed** 2d 2j Connect by Ethernet to a network you control and do not expose the web interface (port 8123) directly to the internet.
CU03	CP01 Owner	**Trusted integrations and apps only** 2d 2f Install only integrations, apps and plugins from sources you trust; malicious third-party additions are outside Home Assistant's security scope.
CU04	CC03 USB radio adapters	**Known adapters** 2f Use radio adapters from known sources.

CIRCUMSTANCES POTENTIALLY LEADING TO SIGNIFICANT CYBERSECURITY RISK (CR)

ID	Title and Description (reasonably foreseeable misuse or circumstance leading to risk)	Violated Condition of Use (CU)	Potential risk

CR02	**Web interface exposed to the internet** Port 8123 is forwarded from the internet.	CU02 Wired, local, not exposed	Attackers can attempt to log in or exploit the interface.
CR03	**Malicious integration** A third-party integration, app or plugin is installed from an untrusted source.	CU03 Trusted integrations and apps only	The smart home and its data are controlled by the attacker.

3.3.2 Function FC02 Administer Home Assistant

FUNCTION (FC)

ID	FC02
Title	Administer Home Assistant
Description	Configure the system and accounts in the web interface.
Reasonably foreseeable use [optional]	Giving accounts to people who should not have full trust.
Core / ancillary functionality	core functionality

SECURE USE DIAGRAM [OPTIONAL]

CONDITIONS OF USE (CU)

ID	Affects (component CC / person CP / zone CZ)	Title & Description
CU01	CP01 Owner	**Strong passwords, trusted users only** `2d` Use a strong owner password and create accounts only for people you trust fully: Home Assistant assumes every user is trusted.
CU02	CC01 Home router and network	**Wired, local, not exposed** `2d` `2j` Connect by Ethernet to a network you control and do not expose the web interface (port 8123) directly to the internet.

CIRCUMSTANCES POTENTIALLY LEADING TO SIGNIFICANT CYBERSECURITY RISK (CR)

ID	Title and Description (reasonably foreseeable misuse or circumstance leading to risk)	Violated Condition of Use (CU)	Potential risk
CR01	**Untrusted account holder** An account is given to someone who should not have full control.	CU01 Strong passwords, trusted users only	Any logged-in user can change the system; privilege escalation by users is out of scope.

CR02	**Web interface exposed to the internet** Port 8123 is forwarded from the internet.	CU02 Wired, local, not exposed	Attackers can attempt to log in or exploit the interface.

3.3.3 Function FC03 Back up and restore

FUNCTION (FC)

ID	FC03
Title	Back up and restore
Description	Create backups and restore or migrate from them.
Reasonably foreseeable use [optional]	None beyond the function description.
Core / ancillary functionality	ancillary functionality

SECURE USE DIAGRAM [OPTIONAL]

CONDITIONS OF USE (CU)

ID	Affects (component CC / person CP / zone CZ)	Title & Description
CU05	CC06 Off-device backup location	**Backups off the device** 2h Store backups outside the device, for example in Home Assistant Cloud or another location.

CIRCUMSTANCES POTENTIALLY LEADING TO SIGNIFICANT CYBERSECURITY RISK (CR)

ID	Title and Description (reasonably foreseeable misuse or circumstance leading to risk)	Violated Condition of Use (CU)	Potential risk
CR04	**No off-device backup** Backups are kept only on the hub.	CU05 Backups off the device	A failed update, reset or device loss destroys the configuration.

3.3.4 Function FC04 Recover access

FUNCTION (FC)

ID	FC04
Title	Recover access
Description	Reset the owner password from the local console with an HDMI monitor and USB keyboard.

Reasonably foreseeable use [optional]	None beyond the function description.
Core / ancillary functionality	ancillary functionality

SECURE USE DIAGRAM [OPTIONAL]

CONDITIONS OF USE (CU)

ID	Affects (component CC / person CP / zone CZ)	Title & Description
CU06	CZ03 Physical location	**Control physical access** `2d` `2f` Anyone with a monitor and keyboard can reset the owner password from the console. Keep the hub where only trusted people can reach it.

CIRCUMSTANCES POTENTIALLY LEADING TO SIGNIFICANT CYBERSECURITY RISK (CR)

ID	Title and Description (reasonably foreseeable misuse or circumstance leading to risk)	Violated Condition of Use (CU)	Potential risk
CR05	**Unattended physical access** Untrusted people can reach the hub.	CU06 Control physical access	The owner password can be reset and the system taken over.

3.3.5 Function FC06 Factory reset

FUNCTION (FC)

ID	FC06
Title	Factory reset
Description	Clear the data partition and reinstall (HA OS 13.1 or later, or with an SD card).
Reasonably foreseeable use [optional]	None beyond the function description.
Core / ancillary functionality	ancillary functionality

SECURE USE DIAGRAM [OPTIONAL]

CONDITIONS OF USE (CU)

ID	Affects (component CC / person CP / zone CZ)	Title & Description
CU05	CC06 Off-device backup location	**Backups off the device** `2h` Store backups outside the device, for example in Home Assistant Cloud or

		another location.
CU08	CC05 Update servers	**Internet during reset** 2h Make sure the hub has a working internet connection before a factory reset; otherwise the reset fails.

CIRCUMSTANCES POTENTIALLY LEADING TO SIGNIFICANT CYBERSECURITY RISK (CR)

ID	Title and Description (reasonably foreseeable misuse or circumstance leading to risk)	Violated Condition of Use (CU)	Potential risk
CR04	**No off-device backup** Backups are kept only on the hub.	CU05 Backups off the device	A failed update, reset or device loss destroys the configuration.
CR07	**Reset without internet** A factory reset is started without internet.	CU08 Internet during reset	The reset fails and leaves the device unusable until recovered.

3.4 Secure installation of security updates

Settings shows available Home Assistant OS updates (or Settings > System > Updates; Check for updates in the menu). Turn on the backup-before-update option, select Update, then check Repairs and Logs. Command line: ha os update.

3.4.1 Function FC05 Install security updates

FUNCTION (FC)

ID	FC05
Title	Install security updates
Description	Install Home Assistant OS updates from Settings, or ha os update on the command line.
Core / ancillary functionality	ancillary functionality

SECURE USE DIAGRAM [OPTIONAL]

CONDITIONS OF USE (CU)

ID	Affects (component CC / person CP / zone CZ)	Title & Description
CU05	CC06 Off-device backup location	**Backups off the device** 2h Store backups outside the device, for example in Home Assistant Cloud or another location.
CU07	PC04 Home Assistant Operating System	**Install updates and check afterwards** 2c Install Home Assistant OS updates when offered, then check Settings >

		System > Repairs and Logs.

CIRCUMSTANCES POTENTIALLY LEADING TO SIGNIFICANT CYBERSECURITY RISK (CR)

ID	Title and Description (reasonably foreseeable misuse or circumstance leading to risk)	Violated Condition of Use (CU)	Potential risk
CR04	**No off-device backup** Backups are kept only on the hub.	CU05 Backups off the device	A failed update, reset or device loss destroys the configuration.
CR06	**Updates not installed** Offered updates are ignored.	CU07 Install updates and check afterwards	Known vulnerabilities stay unfixed.

3.4.2 Disabling of automatic security updates

Updates are installed when the user selects Update; no automatic installation is described.

Please note that CRA conformity is only assured if the necessary security updates have been installed.

3.5 Secure decommissioning and data removal

Before the product is decommissioned:

- Create a backup if you want to keep the configuration, then factory reset the device; this clears the data partition (user data, Core, Supervisor and apps) and needs internet.
- Remove any microSD card and USB storage.

3.6 Integration guidance for system integrators

Guide to relevant information for system integrators:

Information	Link
Product components and interfaces including used protocols and ports	Chapter 2.1 Product (P)
Product security properties including references to CRA Annex I requirements	Chapter 2.2 Security Properties (SP)
Typical product context including instructions on integration of the product into this context	Chapter 2.3 Context (C)
Product functions including reasonably foreseeable use	Chapter 3.3 Secure use: Conditions of Use (CU) and Circumstances leading to Risk (CR) per product Function (FC)
Intended purpose and reasonably foreseeable use	Chapter 3.1 Intended Purpose and reasonably foreseeable use (IPRFU)

Required security measures (conditions of use) to comply with Annex I requirements when using / integrating the product conditions of use for all product functions and lifecycle phases	Chapter 3 How to use the product securely Chapter 5 Essential requirements reference [optional]
Circumstances leading to risk Note: This is not a full cybersecurity risk assessment. It is recommended to include the full cybersecurity risk assessments for this product in the cybersecurity risk assessment for the integrated product. The full risk assessment is shared upon request using the contact details provided in chapter 4.	Chapter 3.3 Secure use: Conditions of Use (CU) and Circumstances leading to Risk (CR) per product Function (FC)
Applied harmonized standards as part of EU Declaration of Conformity	Chapter 4.3 EU Declaration of Conformity
Software Bill of Materials (SBOM)	Chapter 4.4 Software Bill of Materials (SBOM) [optional]
Vulnerability handling and advisories	Chapter 4.2.3 Access to security advisories, Chapter 5 Essential requirements reference [optional] (Annex I, Part 2)
Reporting vulnerabilities	Chapter 4.2.1 Reporting vulnerabilities to the manufacturer

4 Contact and links

4.1 Manufacturer information

Manufacturer	Nabu Casa, Inc.
Postal address	15 Hubble Suite 200, Irvine, CA 92618, USA
E-Mail address	green@nabucasa.com
Website	home-assistant.io/green

4.2 Vulnerabilities and security updates

4.2.1 Reporting vulnerabilities to the manufacturer

Point of contact	GitHub Security Advisory (see home-assistant.io/security)
Coordinated Vulnerability Disclosure Policy	home-assistant.io/security

4.2.2 Access to security updates

Access to security updates	home-assistant.io/common-tasks/os
End of support period	NOT FOUND: Nabu Casa publishes no end date for security updates.

4.2.3 Access to security advisories

Access to security advisories	home-assistant.io/security

4.3 EU Declaration of Conformity

EU Declaration of Conformity	raw.githubusercontent.com/NabuCasa/support/refs/heads/main/static/docs/green/Green_DoC_EU.pdf (RoHS, EMC, LVD, ErP; no CRA, which does not yet apply)

4.4 Software Bill of Materials (SBOM) [optional]

Access to SBOM	NOT FOUND in the public documentation read on 8 November 2026.
SBOM formats	NOT FOUND

5 CRA essential requirements reference [optional]

5.1 CRA Annex I, Part I

> Generated crosswalk: each essential requirement lists the Security Properties (SPxx, manufacturer) and Conditions of Use (CUxx, user) that satisfy it, from the Annex I references you attached.

Requirement	CRA Annex I Part I reference	**Security Properties (SPxx) and Conditions of Use (CUxx)** Security Properties are security requirements implemented in the product under responsibility of the manufacturer. Conditions of Use are security requirements outside the product boundary under responsibility of the user.
Secure by default configuration	`(2b)`	No default password; the owner account is created at first setup. **SP01**: No default account
Secure update mechanism	`(2c)`	See chapter 3.4 Secure installation of security updates. **CU07**: Install updates and check afterwards
Protection from unauthorized access	`(2d)`	**SP01**: No default account **CU01**: Strong passwords, trusted users only **CU02**: Wired, local, not exposed **CU03**: Trusted integrations and apps only **CU06**: Control physical access

Confidentiality protection	`(2e)`	*SPxx: / CUxx:*
Integrity protection	`(2f)`	**CU03**: Trusted integrations and apps only **CU04**: Known adapters **CU06**: Control physical access
Data minimisation	`(2g)`	The product only processes the following data: User accounts and credentials Smart home device states, automations and configuration Data from integrations the user installs
Availability protection	`(2h)`	Backups, stored off the device, and the backup-before-update option support recovery. **SP03**: Backup before update **CU05**: Backups off the device **CU08**: Internet during reset
Minimisation of negative impact on other services	`(2i)`	*SPxx: / CUxx:*
Attack surface limitation	`(2j)`	**SP02**: No onboard radios **CU02**: Wired, local, not exposed
Impact reduction	`(2k)`	**SP03**: Backup before update
Recording and monitoring	`(2l)`	*SPxx: / CUxx:*
Secure data removal / transfer	`(2m)`	See chapter 3.5 Secure decommissioning and data removal **SP04**: Factory reset clears the data partition

5.2 CRA Annex I, Part II

Requirement	CRA Annex I Part II reference	Information
Vulnerability identification	`(1)`	This product is regularly tested for vulnerabilities by the manufacturer.
Vulnerability documentation / SBOM	`(1)`	NOT FOUND in the public documentation read on 8 November 2026.
Vulnerability remediation	`(2)`	Security updates for this product are provided as described in chapter 3.4 Secure installation of security updates and chapter 4.2.2 Access to security updates.
Regular tests	`(3)`	This product is regularly tested for vulnerabilities by the manufacturer.

Public vulnerability disclosure	(4)	Past security issues are listed at home-assistant.io/security.
Coordinated vulnerability disclosure	(5)	Report through a GitHub Security Advisory; no public issues. Nabu Casa asks for at least 90 days before disclosure and aims to respond within 7 days, noting reliance on volunteers.
Vulnerability contact	(6)	GitHub Security Advisory (home-assistant.io/security)
Secure update distribution	(7)	See chapter 3.4 Secure installation of security updates.
Security update dissemination	(8)	See chapter 3.4 Secure installation of security updates.

Based on the Cyber Manual Movement's Cybersecurity Manual template v0.39 (26 October 2026), guidance v0.33 and boilerplate v0.23. Generated with the VCRI Cyber Manual Builder, a free populator by the Value Chain Risk Institute. Data stays in your browser. CC BY 4.0 · valuechainrisk.org