


13. ReactJS-HOL

ProjectStructure

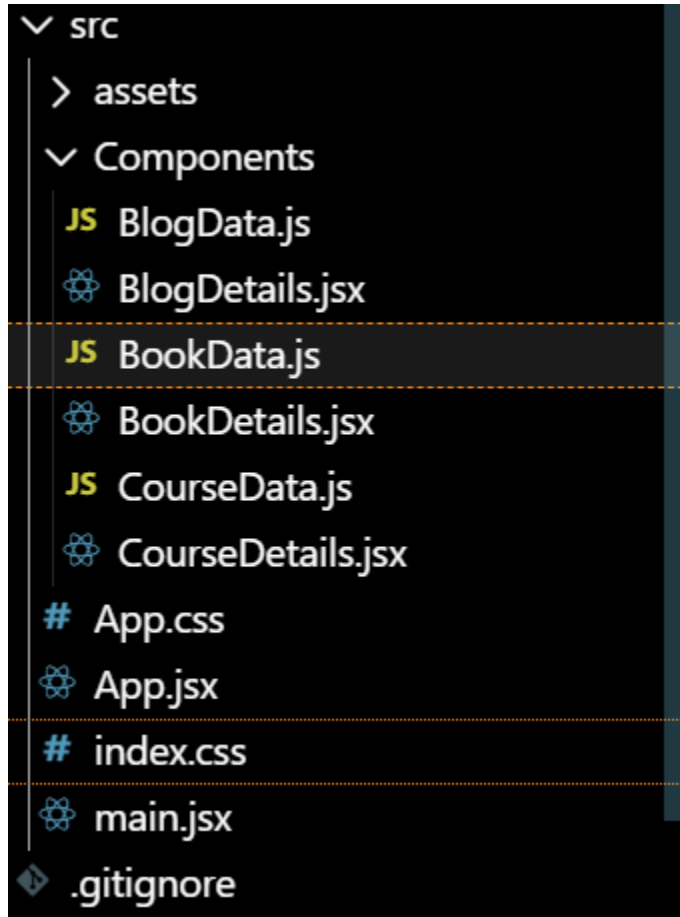

BlogData.js

```
export const blogs = [  
  { id: 301, title: 'React Learning', author: 'Stephen B.', text: 'Welcome  
to learning React!' },  
  { id: 302, title: 'Installation', author: 'Schneider', text: 'You can  
install React from npm.' },  
];
```

BlogDetails.jsx

```
export function BlogDetails(props) {
```

```

return (
  <div className="v1">
    <h1>Blog Details</h1>
    {}
    {props.blogs.length > 0 && (
      <ul>
        {props.blogs.map((blog) => (
          <div key={blog.id}>
            <h3>{blog.title}</h3>
            <p>
              <strong>{blog.author}</strong>
            </p>
            <p>{blog.text}</p>
          </div>
        ))}
      </ul>
    )}
  </div>
);
}

export default BlogDetails;

```

BookData.js

```

export const books = [
  { id: 101, bname: 'Master React', price: 670 },
  { id: 102, bname: 'Deep Dive into Angular 11', price: 800 },
  { id: 103, bname: 'Mongo Essentials', price: 450 },
];

```

BookDetails.jsx

```

export function BookDetails(props) {

  const bookdet =
    props.books.length > 0 ? (
      <ul>
        {props.books.map((book) => (

```

```

        <div key={book.id}>
            <h3>{book.bname}</h3>
            <h4>{book.price}</h4>
        </div>
    )})
</ul>
) : (
    <p>No books available.</p>
);

return (
    <div className="st2">
        <h1>Book Details</h1>
        {bookdet}
    </div>
);
}

export default BookDetails;

```

[CourseData.js](#)

```

export const courses = [
    { id: 201, cname: 'Angular', date: '4/5/2021' },
    { id: 202, cname: 'React', date: '6/3/2021' },
];

```

CourseDetails.jsx

```

export function CourseDetails(props) {

    if (props.courses.length === 0) {
        return (
            <div className="mystyle1">
                <h1>Course Details</h1>
                <p>No courses available.</p>
            </div>
        );
    }
}

```

```

return (
  <div className="mystyle1">
    <h1>Course Details</h1>
    <ul>
      {props.courses.map((course) => (
        <div key={course.id}>
          <h3>{course.cname}</h3>
          <h4>{course.date}</h4>
        </div>
      ))}
    </ul>
  </div>
);
}

export default CourseDetails;

```

App.jsx

```

import { BookDetails } from './Components/BookDetails';
import { BlogDetails } from './Components/BlogDetails';
import { CourseDetails } from './Components/CourseDetails';
import { books } from './Components/BookData';
import { blogs } from './Components/BlogData';
import { courses } from './Components/CourseData';
import './App.css';

function App() {
  return (
    <div className="App">
      <div className="row">
        <CourseDetails courses={courses} />
        <BookDetails books={books} />
        <BlogDetails blogs={blogs} />
      </div>
    </div>
  );
}

```

```
}  
  
export default App;
```

Output:

Course Details

Angular
4/5/2021

React
6/3/2021

Book Details

Master React
670

Deep Dive into Angular 11
800

Mongo Essentials
450

Blog Details

React Learning

Stephen B.

Welcome to learning React!

Installation

Schneider

You can install React from npm.