

---

**EXPERIMENT - XVIII**  
**NETWORK WITH MULTIPLE SUBNETS WITH**  
**WIRED AND WIRELESS LANS**

---

April 14, 2020

ADITHYA D RAJAGOPAL  
ROLL NO : 9  
DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING  
COLLEGE OF ENGINEERING TRIVANDRUM

## **AIM**

Design and configure a network with multiple subnets with wired and wireless LANs using required network devices. Configure the following services in the network - TELNET, SSH, FTP server, Web server, File server, DHCP server and DNS server.

## **THEORY**

### **Subnet**

A subnet is a logical partition of an IP network into multiple, smaller network segments. It is typically used to subdivide large networks into smaller, more efficient subnetworks. The internet is composed of many networks that are run by many organizations. In turn, each organization's network can be composed of many smaller networks, or subnets. Each subnet allows its connected devices to communicate with each other, and routers are used to communicate between subnets. The size of a subnet depends on the connectivity requirements and the network technology employed. A point-to-point subnet allows two devices to connect, while a data center subnet might be designed to connect many more devices.

### **Configuring the services**

The following shows how the different services can be configured in an Ubuntu PC:

## Telnet

Telnet is a user command and an underlying TCP/IP protocol for accessing remote computers. Through Telnet, an administrator or another user can access someone else's computer remotely. On the Web, HTTP and FTP protocols allow you to request specific files from remote computers, but not to actually be logged on as a user of that computer. With Telnet, you log on as a regular user with whatever privileges you may have been granted to the specific application and data on that computer. Telnet is most likely to be used by program developers and anyone who has a need to use specific applications or data located at a particular host computer. Take the following steps to configure Telnet:

- Install Telnet

`sudo apt install telnet xinetd`

```
user@adithya:~/s6/np$ sudo apt install telnet xinetd
Reading package lists... Done
Building dependency tree
Reading state information... Done
telnet is already the newest version (0.17-41).
The following NEW packages will be installed:
  xinetd
0 upgraded, 1 newly installed, 0 to remove and 1 not upgraded.
Need to get 108 kB of archives.
After this operation, 310 kB of additional disk space will be used.
Do you want to continue? [Y/n] y
Get:1 http://in.archive.ubuntu.com/ubuntu bionic/universe amd64 xinetd amd64 1:2.3.15.3-1 [108 kB]
Fetched 108 kB in 1s (150 kB/s)
Selecting previously unselected package xinetd.
(Reading database ... 223078 files and directories currently installed.)
Preparing to unpack ../xinetd_1%3a2.3.15.3-1_amd64.deb ...
Unpacking xinetd (1:2.3.15.3-1) ...
Setting up xinetd (1:2.3.15.3-1) ...
Processing triggers for systemd (237-3ubuntu10.39) ...
Processing triggers for man-db (2.8.3-2ubuntu0.1) ...
Processing triggers for ureadahead (0.100.0-21) ...
ureadahead will be reprofiled on next reboot
user@adithya:~/s6/np$
```

- Edit `/etc/inetd.conf` with root permission, add this line:  
`telnet stream tcp nowait telnetd /usr/sbin/tcpd /usr/sbin/in.telnetd`
- Edit `/etc/xinetd.conf`, copy the following configuration:

```
# Simple configuration file for xinetd
#
# Some defaults, and include /etc/xinetd.d/

defaults
{
```

```
# Please note that you need a log_type line to be able to use log_on_success
# and log_on_failure. The default is the following :
# log_type = SYSLOG daemon info
instances = 60
log_type = SYSLOG authpriv
log_on_success = HOST PID
log_on_failure = HOST
CPS = 25 30
}
```

- Change telnet port by using the following command in the terminal:  
telnet 23/tcp
- Then restart the service:  
sudo /etc/init.d/xinetd restart


## SSH

The SSH protocol (also referred to as Secure Shell) is a method for secure remote login from one computer to another. It provides several alternative options for strong authentication, and it protects the communications security and integrity with strong encryption. It is a secure alternative to the non-protected login protocols (such as telnet, rlogin) and insecure file transfer methods (such as FTP). Take the following steps to configure SSH:

- Install SSH:

```
sudo apt get install ssh-server
```

(Installing the client can be done by replacing openssh-server by openssh-client)

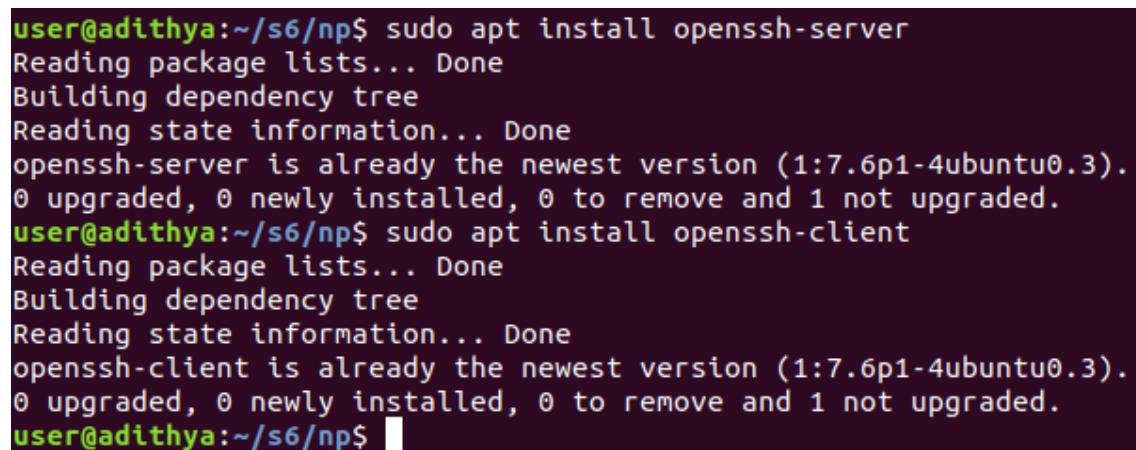

```
user@adithya:~/s6/np$ sudo apt install openssh-server
Reading package lists... Done
Building dependency tree
Reading state information... Done
openssh-server is already the newest version (1:7.6p1-4ubuntu0.3).
0 upgraded, 0 newly installed, 0 to remove and 1 not upgraded.
user@adithya:~/s6/np$ sudo apt install openssh-client
Reading package lists... Done
Building dependency tree
Reading state information... Done
openssh-client is already the newest version (1:7.6p1-4ubuntu0.3).
0 upgraded, 0 newly installed, 0 to remove and 1 not upgraded.
user@adithya:~/s6/np$
```

- Configure SSH:

```
sudo nano /etc/ssh/sshd_config
```

Then make the changes you want to make.

- Restart SSH:

```
sudo systemctl restart ssh
```

We can login to the SSH server from an SSH client.

## FTP Server

File Transfer Protocol (FTP) is the commonly used protocol for exchanging files over the Internet. FTP uses the Internet's TCP/IP protocols to enable data transfer. FTP uses a client-server architecture, often secured with SSL/TLS. FTP promotes sharing of files via remote computers with reliable and efficient data transfer. FTP uses a client-server architecture. Users provide authentication using a sign-in protocol, usually a username and password, however some FTP servers may be configured to accept anonymous FTP logins where you don't need to identify yourself before accessing files. Most often, FTP is secured with SSL/TLS. The following steps show setting up an FTP server on the computer:

- Install FTP daemon: `sudo apt install vsftpd`

```
user@adithya:~/s6/np$ sudo apt install vsftpd
Reading package lists... Done
Building dependency tree
Reading state information... Done
The following NEW packages will be installed:
  vsftpd
0 upgraded, 1 newly installed, 0 to remove and 1 not upgraded.
Need to get 115 kB of archives.
After this operation, 334 kB of additional disk space will be used.
Get:1 http://in.archive.ubuntu.com/ubuntu bionic/main amd64 vsftpd amd64 3.0.3-9build1 [115 kB]
Fetched 115 kB in 1s (116 kB/s)
Preconfiguring packages ...
Selecting previously unselected package vsftpd.
(Reading database ... 223116 files and directories currently installed.)
Preparing to unpack .../vsftpd_3.0.3-9build1_amd64.deb ...
Unpacking vsftpd (3.0.3-9build1) ...
Setting up vsftpd (3.0.3-9build1) ...
Created symlink /etc/systemd/system/multi-user.target.wants/vsftpd.service → /lib/systemd/system/vsftpd.service.
Processing triggers for man-db (2.8.3-2ubuntu0.1) ...
Processing triggers for ureadahead (0.100.0-21) ...
Processing triggers for systemd (237-3ubuntu10.39) ...
user@adithya:~/s6/np$
```

- Configuring FTP can be done by editing the following file: `/etc/vsftpd.conf`
- Restart the service: `sudo systemctl restart vsftpd.service`

## Web Server

A Web server is a program that uses HTTP (Hypertext Transfer Protocol) to serve the files that form Web pages to users, in response to their requests, which are forwarded by their computers' HTTP clients. Dedicated computers and appliances may be referred to as Web servers as well. The process is an example of the client/server model. All computers that host Web sites must have Web server programs. Leading Web servers include Apache (the most widely-installed Web server), Microsoft's Internet Information Server (IIS) and nginx from NGNIX. Other Web servers include Novell's NetWare server, Google Web Server (GWS) and IBM's family of Domino servers.

A web server can be hosted on the localhost of the PC by following the following steps:

- Installing the server: The most common server on Linux systems and it is called the LAMP server. It can be installed on Ubuntu by:  
`sudo apt install lamp-server`
- Hosting a website: By creating a .conf file in the /etc/apache2/sites-available/ folder, we inform the server of the location of the code for our website.
- Enabling the website by using the command:  
`sudo a2ensite <nameOfFile.conf>`
- By editing /etc/hosts file, we can give the domain name for the website
- The configuration the server is in the file: /etc/apache2/apache2.conf
- Restart the server by the command:  
`sudo systemctl restart apache2.service`



## File Server

In the client/server model, a file server is a computer responsible for the central storage and management of data files so that other computers on the same network can access the files. A file server allows users to share information over a network without having to physically transfer files by floppy diskette or some other external storage device. Any computer can be configured to be a host and act as a file server. In its simplest form, a file server may be an ordinary PC that handles requests for files and sends them over the network. In a more sophisticated network, a file server might be a dedicated network-attached storage (NAS) device that also serves as a remote hard disk drive for other computers, allowing anyone on the network to store files on it as if to their own hard drive.

The following steps can be followed to setup a file server:

- Installing Samba File Server:

`sudo apt install samba`

```
user@adithya:~/s6/np$ sudo apt install samba
Reading package lists... Done
Building dependency tree
Reading state information... Done
Suggested packages:
  bind9 bind9utils ctdb ldb-tools ntp | chrony smbldap-tools winbind
The following NEW packages will be installed:
  samba
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 855 kB of archives.
After this operation, 11.3 MB of additional disk space will be used.
Get:1 http://in.archive.ubuntu.com/ubuntu bionic-updates/main amd64 samba amd64 2:4.7.6+dfsg-ubuntu-0ubuntu2.15 [855 kB]
Fetched 855 kB in 1s (871 kB/s)
Selecting previously unselected package samba.
(Reading database ... 223824 files and directories currently installed.)
Preparing to unpack .../samba_2%3a4.7.6+dfsg-ubuntu-0ubuntu2.15_amd64.deb ...
Unpacking samba (2:4.7.6+dfsg-ubuntu-0ubuntu2.15) ...
Setting up samba (2:4.7.6+dfsg-ubuntu-0ubuntu2.15) ...
Samba is not being run as an AD Domain Controller.
Please ignore the following error about deb-systemd-helper not finding samba-ad-dc.service.
Failed to preset unit: Unit file /etc/systemd/system/samba-ad-dc.service is masked.
/usr/bin/deb-systemd-helper: error: systemctl preset failed on samba-ad-dc.service: No such file or directory
Processing triggers for ureadahead (0.100.0-21) ...
Processing triggers for libc-bin (2.27-3ubuntu1) ...
Processing triggers for systemd (237-3ubuntu10.39) ...
Processing triggers for man-db (2.8.3-2ubuntu0.1) ...
Processing triggers for ufw (0.36-0ubuntu0.18.04.1) ...
user@adithya:~/s6/np$
```

- Configuring the file server by editing `/etc/samba/smb.conf`
  - First, edit the following key/value pairs in the [global] section of `/etc/samba/smb.conf`:  
`workgroup = EXAMPLE`  
...  
`security = user`
  - Create a new section at the bottom of the file, or uncomment one of the examples, for the directory to be shared:

```
. [share]
comment = Ubuntu File Server Share
path = /srv/samba/share
browsable = yes
guest ok = yes
read only = no
create mask = 0755
```

- Make a directory for hosting files and setting permission for the directory:

```
sudo mkdir -p /srv/samba/share
sudo chown nobody:nogroup /srv/samba/share
```

- Restart Samba service:

```
sudo systemctl restart smbd.service nmbd.service
```


## DHCP Server

DHCP (Dynamic Host Configuration Protocol) is a network management protocol used to dynamically assign an Internet Protocol (IP) address to any device, or node, on a network so they can communicate using IP. DHCP automates and centrally manages these configurations rather than requiring network administrators to manually assign IP addresses to all network devices. DHCP can be implemented on small local networks as well as large enterprise networks. DHCP will assign new IP addresses in each location when devices are moved from place to place, which means network administrators do not have to manually initially configure each device with a valid IP address or reconfigure the device with a new IP address if it moves to a new location on the network. Versions of DHCP are available for use in Internet Protocol version 4 (IPv4) and Internet Protocol version 6 (IPv6).

The following steps shows how DHCP server can be run:

- Install DHCP server:

```
sudo apt-get install isc-dhcp-server
```

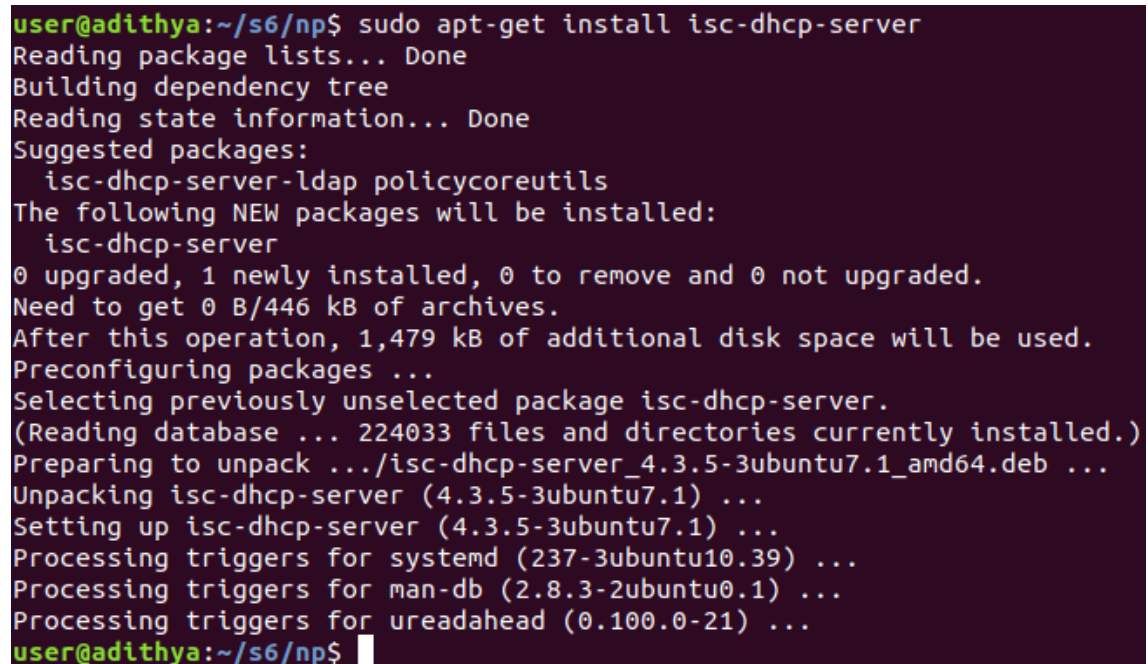A terminal window with a dark purple background and light green text. The user 'user' is at the prompt 'user@adithya:~/s6/np\$'. They enter the command 'sudo apt-get install isc-dhcp-server'. The terminal shows the process of reading package lists, building a dependency tree, and reading state information. It then lists suggested packages and shows that 'isc-dhcp-server' is the only new package to be installed. It indicates that 0 packages will be upgraded, 1 newly installed, and 0 to be removed. The disk space requirements are shown as 0 B/446 kB of archives and 1,479 kB of additional disk space. The installation proceeds with unpacking and setting up the package, followed by processing triggers for systemd, man-db, and ureadahead. The prompt returns to 'user@adithya:~/s6/np\$' with a cursor.

```
user@adithya:~/s6/np$ sudo apt-get install isc-dhcp-server
Reading package lists... Done
Building dependency tree
Reading state information... Done
Suggested packages:
  isc-dhcp-server-ldap polycoreutils
The following NEW packages will be installed:
  isc-dhcp-server
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 0 B/446 kB of archives.
After this operation, 1,479 kB of additional disk space will be used.
Preconfiguring packages ...
Selecting previously unselected package isc-dhcp-server.
(Reading database ... 224033 files and directories currently installed.)
Preparing to unpack .../isc-dhcp-server_4.3.5-3ubuntu7.1_amd64.deb ...
Unpacking isc-dhcp-server (4.3.5-3ubuntu7.1) ...
Setting up isc-dhcp-server (4.3.5-3ubuntu7.1) ...
Processing triggers for systemd (237-3ubuntu10.39) ...
Processing triggers for man-db (2.8.3-2ubuntu0.1) ...
Processing triggers for ureadahead (0.100.0-21) ...
user@adithya:~/s6/np$
```

- Configure DHCP server, the config file is /etc/dhcp/dhcpd.conf:

```
# Sample /etc/dhcpd.conf
# (add your comments here)
default-lease-time 600;
```

```
max-lease-time 7200;
option subnet-mask 255.255.255.0;
option broadcast-address 192.168.1.255;
option routers 192.168.1.254;
option domain-name-servers 192.168.1.1, 192.168.1.2;
option domain-name "mydomain.example";

subnet 192.168.1.0 netmask 255.255.255.0 {
range 192.168.1.10 192.168.1.100;
range 192.168.1.150 192.168.1.200;
}
```

- Starting and stopping services can be achieved using:

```
sudo service isc-dhcp-server restart
sudo service isc-dhcp-server start
sudo service isc-dhcp-server stop
```

After editing configuration files, we have to restart the service.

## DNS Server

The Domain Name Systems (DNS) is the phonebook of the Internet. Humans access information online through domain names, like nytimes.com or espn.com. Web browsers interact through Internet Protocol (IP) addresses. DNS translates domain names to IP addresses so browsers can load Internet resources.

Each device connected to the Internet has a unique IP address which other machines use to find the device. DNS servers eliminate the need for humans to memorize IP addresses such as 192.168.1.1 (in IPv4), or more complex newer alphanumeric IP addresses such as 2400:cb00:2048:1::c629:d7a2 (in IPv6).

The following steps show the setup:

- Installing:

`sudo apt install bind9`

```
user@adithya:~/s6/np$ sudo apt install bind9
Reading package lists... Done
Building dependency tree
Reading state information... Done
Suggested packages:
  bind9-doc resolvconf
The following NEW packages will be installed:
  bind9
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 398 kB of archives.
After this operation, 1,918 kB of additional disk space will be used.
Get:1 http://in.archive.ubuntu.com/ubuntu bionic-updates/main amd64 bind9 amd64 1:9.11.3+dfsg-1ubuntu1.11 [398 kB]
Fetched 398 kB in 1s (590 kB/s)
Preconfiguring packages ...
Selecting previously unselected package bind9.
(Reading database ... 224158 files and directories currently installed.)
Preparing to unpack .../bind9_1%3a9.11.3+dfsg-1ubuntu1.11_amd64.deb ...
Unpacking bind9 (1:9.11.3+dfsg-1ubuntu1.11) ...
Setting up bind9 (1:9.11.3+dfsg-1ubuntu1.11) ...
bind9-pkcs11.service is a disabled or a static unit not running, not starting it.
bind9-resolvconf.service is a disabled or a static unit not running, not starting it.
Processing triggers for man-db (2.8.3-2ubuntu0.1) ...
Processing triggers for ufw (0.36-0ubuntu0.18.04.1) ...
Processing triggers for ureadahead (0.100.0-21) ...
Processing triggers for systemd (237-3ubuntu10.39) ...
user@adithya:~/s6/np$
```

- The configuration is in the /etc/bind folder.
- Setting as a caching name server by editing the file /etc/bind/named.conf.options:  
forwarders {  
1.2.3.4; #replace with the IP address  
5.6.7.8; #of the name servers  
};
- BIND9 can be configured with the primary and the secondary master as a custom DNS server to access all the subnets.

- Restarting bind9:  
sudo systemctl restart bind9.service

## **RESULT**

For accessing the different nodes in the subnet, TELNET, SSH, FTP server, Web server, File server, DHCP server and DNS server have been configured.