


DIC post-processing — test2.chan 0

Strain from recorded video. Marker separation in pixels -> strain via `utm_dic.dic_strain`, the same function the live rig uses.
2026-08-27 15:28 · 1 run(s)

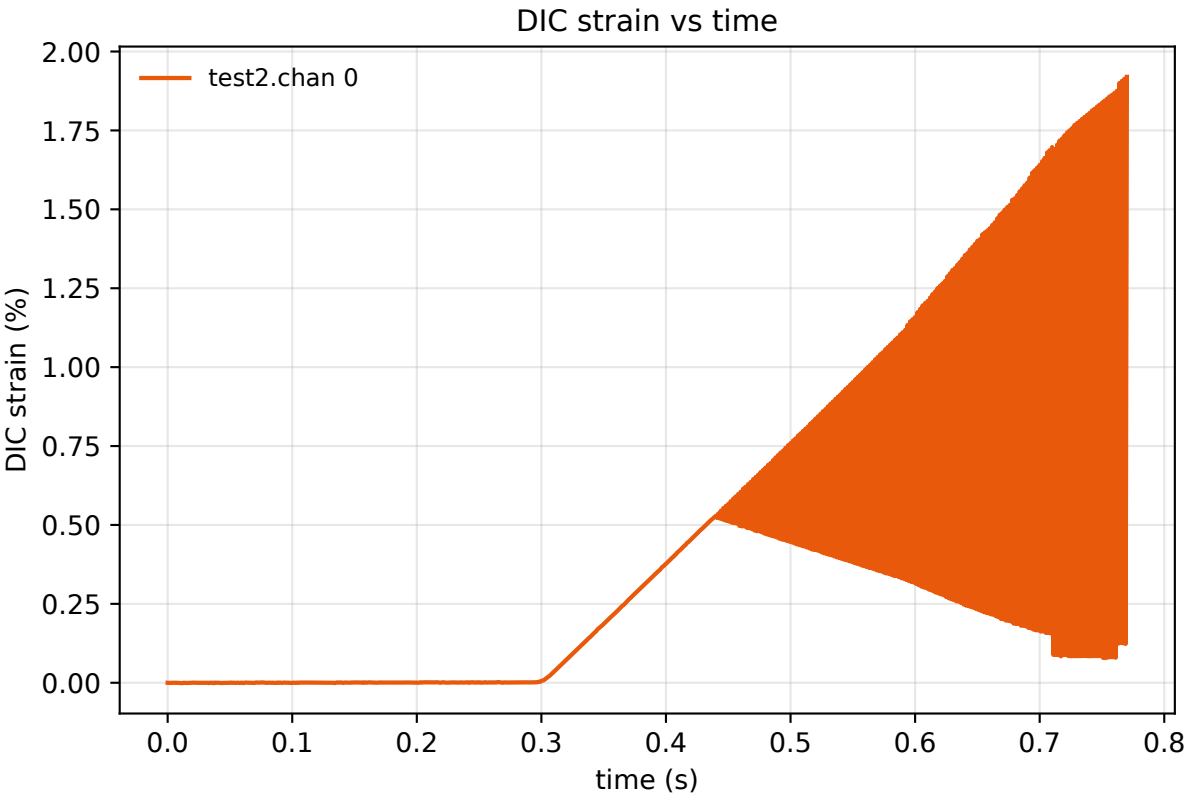

Runs

test2.chan 0 — test2.chan 0.avi
771 of 771 frames tracked (100.0 %) · Px0 2234.44 px · 1000.0000 fps
peak 1.920 % engineering · 1.902 % log · auto

Results

Parameter	test2.chan 0
Label	test2.chan 0
Video	test2.chan 0.avi
Tracking ended	MARKER LOST at frame 772, t 0.77 s — LOST — best correlation
Frames analysed	771
Frames tracked	771 (100.0 %)
Measured by centroid	605
Re-seeds	30
Duration	0.77 s
Frame rate used	1000.0000 fps
Px0 (L0)	2234.44 px
Gauge	80.00 mm
px per mm	27.9305
L at peak	2277.33 px
Peak strain (engineering)	1.9197 %
Peak strain (true/log)	1.9015 %
Mean rate over the run	2.493e-02 /s
Strain rate, 0.05-0.35 %	-6.350e-04 /s
Noise, 0.05-0.35 %	873.9 ue
Tracking method	auto
Box half-size	105 px
Search window	40 px
Min correlation	0.55
Reference frame	0
Analysed every	1 frame(s)