


DIC post-processing — sample3.chan 0

Strain from recorded video. Marker separation in pixels -> strain via `utm_dic.dic_strain`, the same function the live rig uses.
2026-09-03 13:22 · 1 run(s)

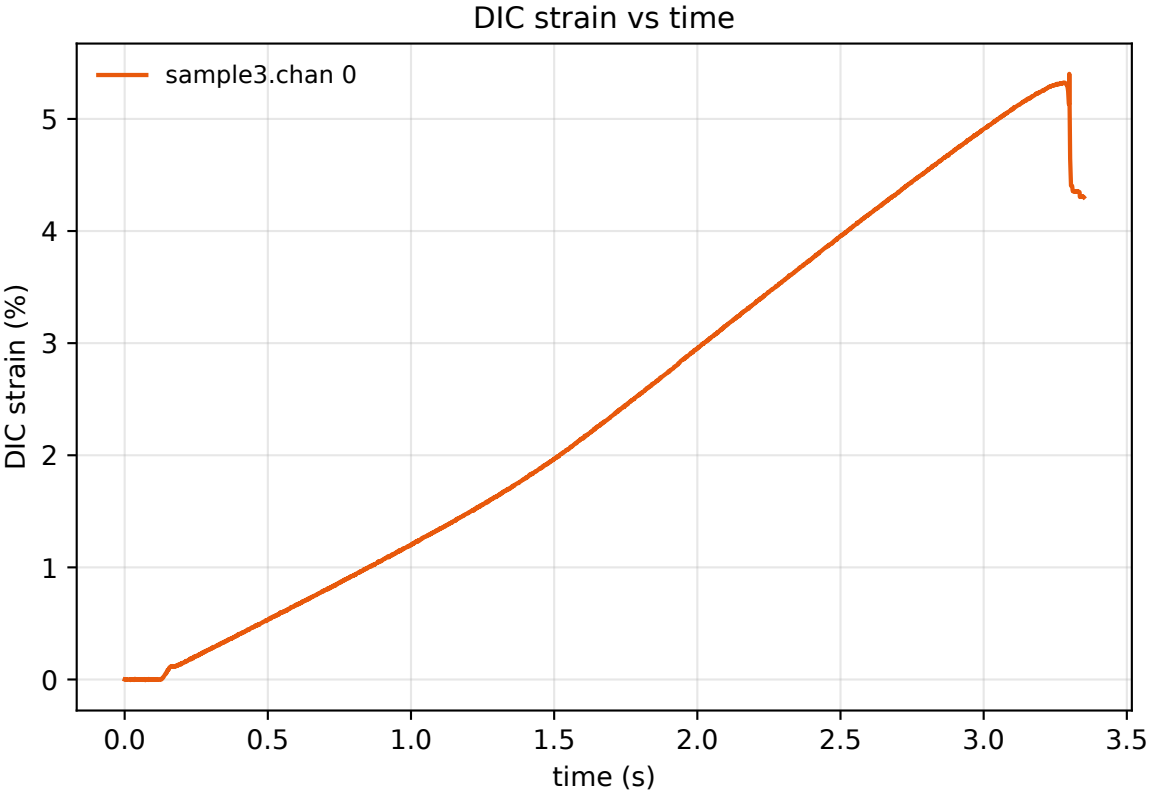

Runs

■ sample3.chan 0 — sample3.chan 0.avi

3351 of 3351 frames tracked (100.0 %) · Px0 1254.93 px · 1000.0000 fps
peak 5.402 % engineering · 5.261 % log · rig

Results

Parameter	sample3.chan 0
Label	sample3.chan 0
Video	sample3.chan 0.avi
Tracking ended	end of video
Data ends at	3.350 s
Frames analysed	3351
Frames tracked	3351 (100.0 %)
Measured by centroid	3351
Re-seeds	0
Duration	3.35 s
Frame rate used	1000.0000 fps
Px0 (L0)	1254.93 px
Gauge	80.00 mm
px per mm	15.6866
L at peak	1322.72 px
Extension at peak	4.3215 mm
Peak strain (engineering)	5.4018 %
Peak strain (true/log)	5.2610 %
Mean rate over the run	1.284e-02 /s
Strain rate, 0.05-0.35 %	1.266e-02 /s
Noise, 0.05-0.35 %	57.0 ue
Tracking method	rig
Box half-size	110 px
Search window	40 px
Min correlation	0.55
Reference	frame 0
Analysis starts at frame	0
Analysed every	1 frame(s)