L30.1
Pulkit Contest Notes

If interested, check out the System Design course.
Early Bird discount is ON.

Join Discord - https://bit.ly/ly-discord

n $\Rightarrow$ indices & values.

(Binary search)

m $\Rightarrow$ ———

last for each ( ) $\Rightarrow$ false.

before last [ ]

Binary

last [   ]

islast [   ] $\Rightarrow$ 0

marked [   ]

is   S   a   possible   ans:-

last

change Indices

$nums[id] \Rightarrow$ to 0

either change

```
|_____|
            ↑
```

or pick any of the already 0 values & mark it

$3^{rd} \Rightarrow$ pick any value & dec. by 1

index $\Longrightarrow$ make it directly? $\Longrightarrow$ ⌣

(-1) (-1) (-1)

$1 \Longrightarrow (-1) \Longrightarrow \rho$

$= 0$

value $\nearrow 10^9$
      $\Downarrow$
      0

1) If at an index $\Rightarrow$ id $\Rightarrow$ non-zero $\Rightarrow$ make it zero

2) zero & un-marked $\Rightarrow$ mark

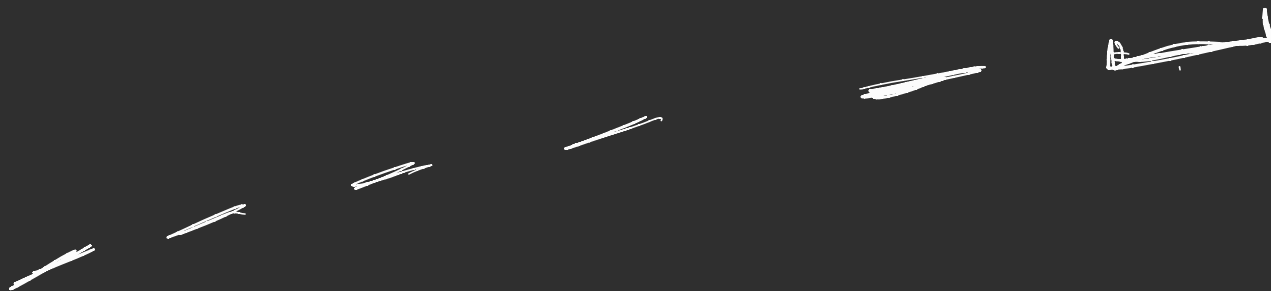3) zero & marked $\Rightarrow$ mark some 0-value index $\Rightarrow$ (-1)

last() $\Rightarrow$ most further $\rightarrow$ decrement that

10^9

1

by value ?