

MERN STACK

DAY – 23

21 July 2026

GET Method

The GET method is used to retrieve data from the server. It does not modify or delete any data.

Characteristics:


- Used to fetch data.
- Sends data through the URL (if parameters are needed).
- Should not change server data.
- Can be cached by browsers.
- Safe and idempotent (making the same request multiple times has the same effect).

Example (Express):

```
app.get("/api/getuser", async (req, res) => {  
  const data = await userModel.find();  
  res.send(data);  
});
```

Example (React):

```
const result = await fetch("http://localhost:9000/api/getuser");  
const data = await result.json();  
console.log(data);
```

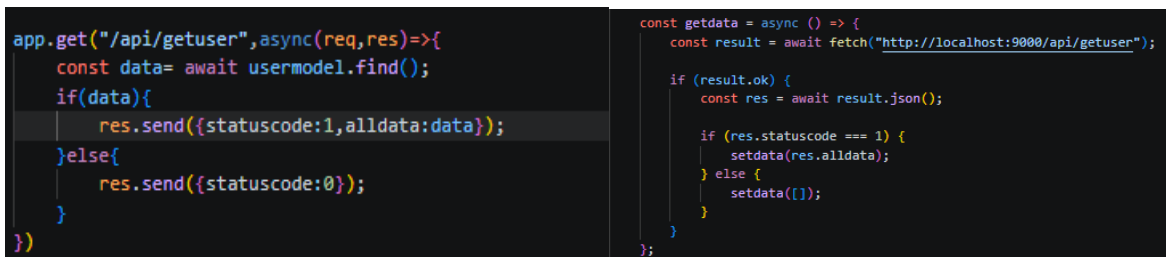

```
app.get("/api/getuser", async (req, res) => {  
  const data = await userModel.find();  
  if (data) {  
    res.send({ statuscode: 1, alldata: data });  
  } else {  
    res.send({ statuscode: 0 });  
  }  
})  
};  
  
const getdata = async () => {  
  const result = await fetch("http://localhost:9000/api/getuser");  
  if (result.ok) {  
    const res = await result.json();  
    if (res.statuscode === 1) {  
      setdata(res.alldata);  
    } else {  
      setdata([]);  
    }  
  }  
};
```

localhost:3000 says
Data added successfully

OK

ASMEEN KAUR
19
ABC@gmail.com

Add User

Name	Age	Email	Action
ADITI TANGRI	12	adititangri5@gmail.com	Delete
ASMEEN KAUR	19	ABC@gmail.com	Delete

DELETE Method

The DELETE method is used to remove a resource from the server.

Characteristics:

- Used to delete existing data.
- Usually requires the unique ID of the resource.
- Idempotent (deleting the same resource multiple times should not create additional changes after it's gone).

Example (Express):

```
app.delete("/api/deluser/:id", async (req, res) => {
  const data = await userModel.deleteOne({ _id: req.params.id });

  if (data.deletedCount > 0) {
    res.send({ statuscode: 1 });
  } else {
    res.send({ statuscode: 0 });
  }
});
```

- :id is a route parameter.
- req.params.id contains the ID sent in the URL.
- deleteOne() removes the matching document from MongoDB.

Example (React):

```
const dele = async (id) => {
  By : Aditi Tangri
```

URN : 2302460

CRN : 2315004

```

    await fetch(`http://localhost:9000/api/deluser/${id}`, {
      method: "DELETE"
    });
  });
};

```

```

app.delete("/api/deluser/:id", async (req, res) => {
  const data = await userModel.deleteOne({ _id: req.params.id });
  if (data.deletedCount > 0) {
    res.send({ statusCode: 1 });
  } else {
    res.send({ statusCode: 0 });
  }
});

const dele = async (id) => {
  const result = await fetch(`http://localhost:9000/api/deluser/${id}`, {
    method: "DELETE"
  });
  if (result.ok) {
    const res = await result.json();
    if (res.statusCode === 1) {
      alert("Data deleted successfully");
      getdata();
    }
  }
};

```

localhost:3000 says
Data deleted successfully

OK

ASMEEN KAUR
19
ABC@gmail.com

Add User

Name	Age	Email	Action
ADITI TANGRI	12	adititangri5@gmail.com	Delete
ASMEEN KAUR	19	ABC@gmail.com	Delete