

MERN STACK

DAY – 13

9 July 2026

JAVASCRIPT

addEventListener()

addEventListener() is a JavaScript method used to attach an event to an HTML element. It allows the programmer to specify what action should be performed when a particular event occurs.

It can handle different types of events such as:

- click
- submit
- change
- keydown
- mouseover

Syntax:

```
element.addEventListener(event, function);
```

or

```
element.addEventListener(event, function(eventObject) {  
  
    // statements  
  
});
```

Parameters:

- **element** → The HTML element on which the event is applied.
- **event** → The name of the event to listen for.
- **function** → The function that executes when the event occurs.
- **eventObject** → An object containing information about the event.

event.preventDefault()

preventDefault() is a JavaScript method used to stop the default behavior of an event.

By : Aditi Tangri

URN : 2302460

CRN : 2315004

Browsers automatically perform certain actions for some events. This method prevents those automatic actions from happening while allowing the event handling code to run.

Syntax:

```
event.preventDefault();
```

Parameter:

- event → The event object passed to the event handler.

textContent

textContent is a JavaScript property used to read or modify the text content of an HTML element.

It accesses only the text inside an element and does not interpret HTML tags. It treats the assigned value as plain text.

Syntax:

To set text:

```
element.textContent = "text";
```

To get text:

```
let variable = element.textContent;
```

- textContent handles only plain text.
- innerHTML can read or insert HTML content.

TASK


```

<body>
  <h1 align="center">FORM</h1>
  <form id="for">
    <p></p>
    <div style="margin-top: 100px;">
      <label>USERNAME :
      <input type="text" name="username" placeholder="Enter username">
    </div>
    <div>
      <label>PASSWORD :
      <input type="password" name="password" placeholder="Enter password">
    </div>
    <div>
      <button type="submit">Submit</button>
    </div>
  </form>
  <script>
    let form = document.getElementById("for");
    let p = document.getElementsByTagName("p")[0];
    form.addEventListener('submit', function (event) {
      event.preventDefault();

      let user = form.username.value;
      let pass = form.password.value;
      if (user.length < 6) {
        p.textContent = "Username must be atleast 6 characters long";
      } else {
        p.textContent = "Username is valid.";
      }
      console.log("Username:", user);
      console.log("Password:", pass);

      alert("Form Submitted Successfully!");
    });
  </script>
</body>

```

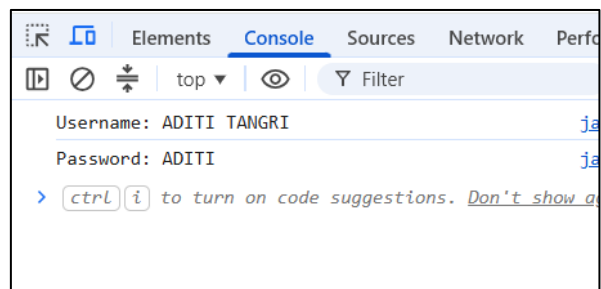

FORM

Username is valid.

USERNAME :

 PASSWORD :