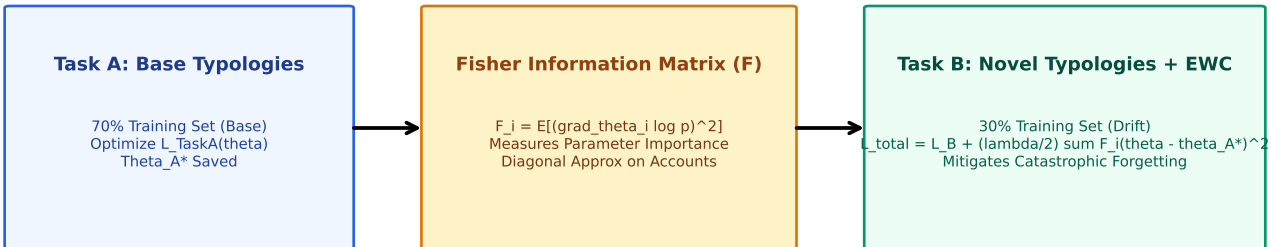
Task A: Base Typologies
70% Training Set (Base)
Optimize L_TaskA(theta)
Theta_A* Saved
Fisher Information Matrix (F)
F_i = E[(grad_theta_i log p)^2]
Measures Parameter Importance
Diagonal Approx on Accounts
Task B: Novel Typologies + EWC
30% Training Set (Drift)
L_total = L_B + (lambda/2) sum F_i(theta - theta_A*)^2
Mitigates Catastrophic Forgetting