



Application properties file with database configuration and port along with the host.


Mapping done at different places for ex: /pets, /pets/{id} with different methods including get, put, post and delete.

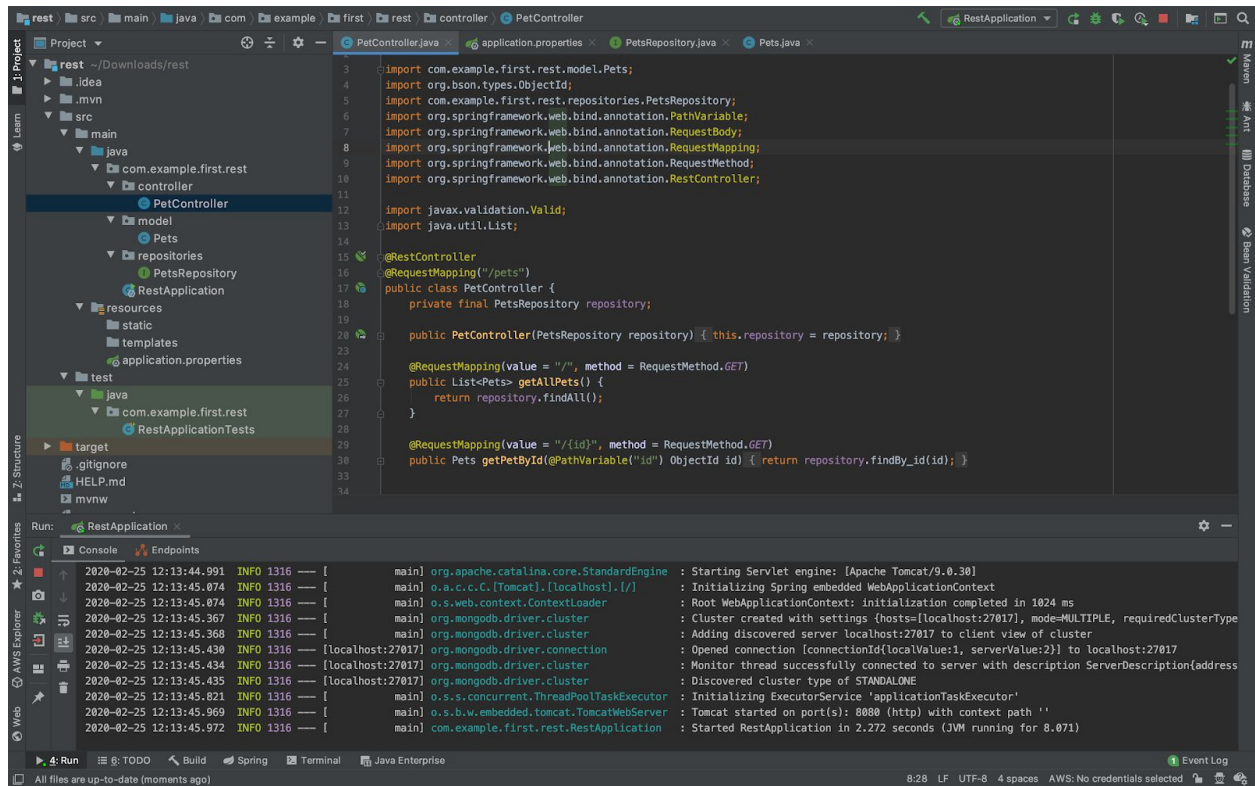


Running at localhost/8080



```
[{"_id": "5e537784279356a91a1809af", "name": "Spot", "species": "dog", "breed": "pitbull"}, {"_id": "5e537784279356a91a1809b0", "name": "Daisy", "species": "cat", "breed": "calico"}, {"_id": "5e537784279356a91a1809b1", "name": "Bella", "species": "dog", "breed": "australian shepard"}]
```

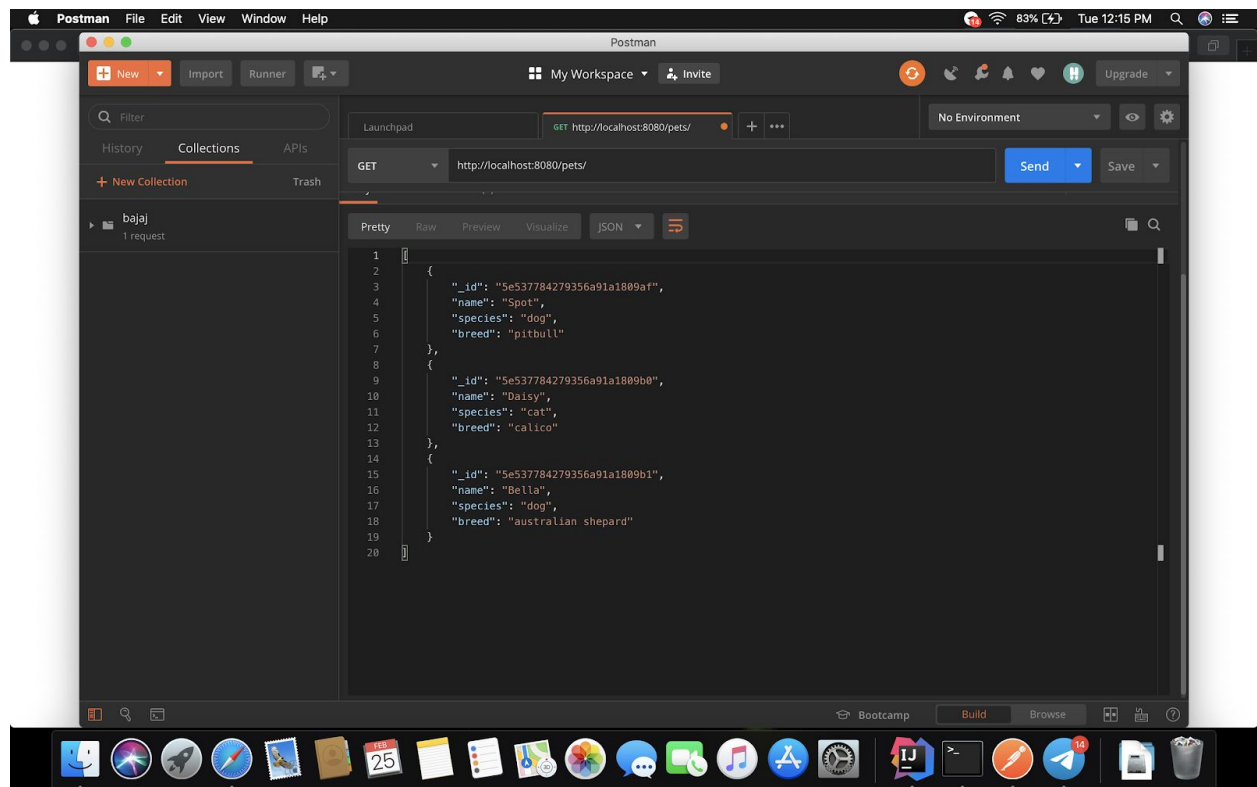

Testing localhost output in postman

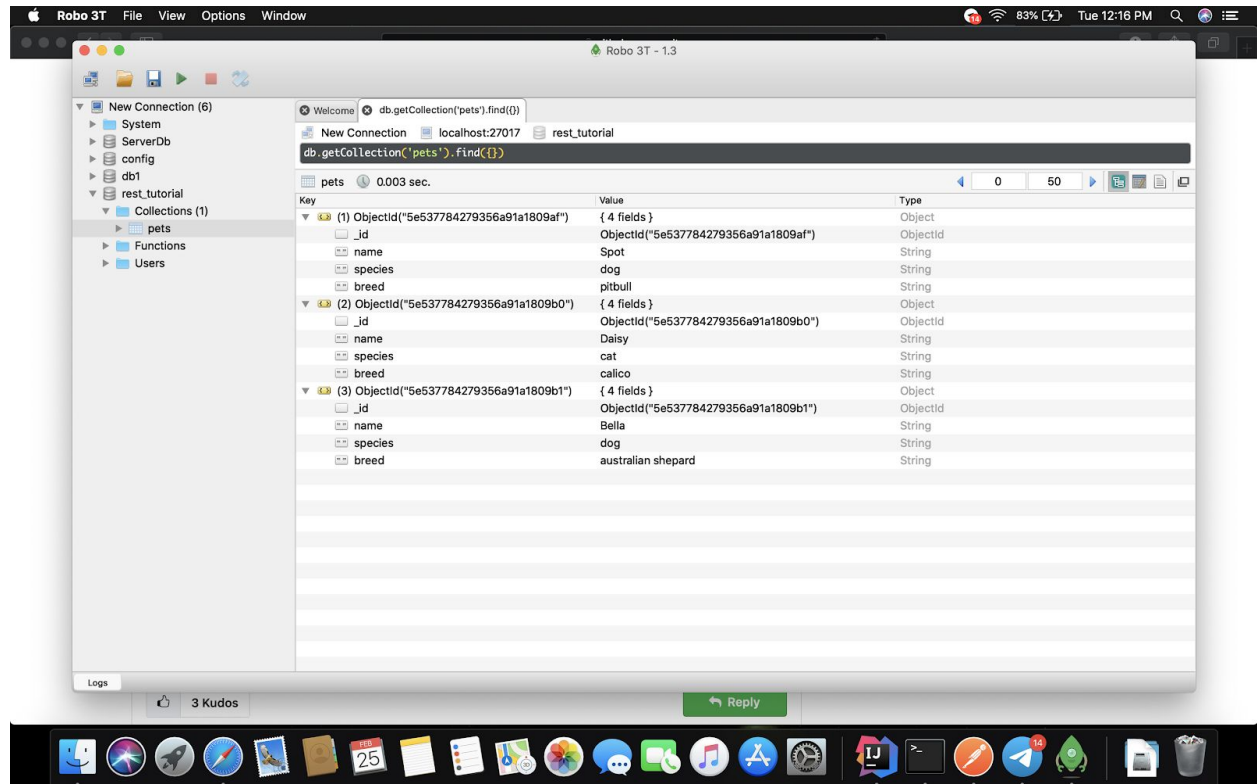

Robo 3t, mongodb workbench to check the entries are there in db.