

```
In [1]: #Name:ajit waman.Rollno:B54.Prac01
import pandas as pd
from matplotlib import pyplot as plt
%matplotlib inline
```

```
In [2]: df = pd.read_csv("/home/kj-comp/iris.csv")
df.head(10)
```

```
Out[2]:
```

	sepal_length	sepal_width	petal_length	petal_width	species
0	5.1	3.5	1.4	0.2	setosa
1	4.9	3.0	1.4	0.2	setosa
2	4.7	3.2	1.3	0.2	setosa
3	4.6	3.1	1.5	0.2	setosa
4	5.0	3.6	1.4	0.2	setosa
5	5.4	3.9	1.7	0.4	setosa
6	4.6	3.4	1.4	0.3	setosa
7	5.0	3.4	1.5	0.2	setosa
8	4.4	2.9	1.4	0.2	setosa
9	4.9	3.1	1.5	0.1	setosa

```
In [3]: X=df.iloc[:,0:4]
y=df.iloc[:, -1]
y
```

```
Out[3]:
```

0	setosa
1	setosa
2	setosa
3	setosa
4	setosa
...	
145	virginica
146	virginica
147	virginica
148	virginica
149	virginica

Name: species, Length: 150, dtype: object

```
In [4]: from sklearn.model_selection import train_test_split
X_train, X_test, y_train, y_test = train_test_split(X,y,train_size=0.8,random_state=1)
X_test
```

Out[4]:

	sepal_length	sepal_width	petal_length	petal_width
14	5.8	4.0	1.2	0.2
98	5.1	2.5	3.0	1.1
75	6.6	3.0	4.4	1.4
16	5.4	3.9	1.3	0.4
131	7.9	3.8	6.4	2.0
56	6.3	3.3	4.7	1.6
141	6.9	3.1	5.1	2.3
44	5.1	3.8	1.9	0.4
29	4.7	3.2	1.6	0.2
120	6.9	3.2	5.7	2.3
94	5.6	2.7	4.2	1.3
5	5.4	3.9	1.7	0.4
102	7.1	3.0	5.9	2.1
51	6.4	3.2	4.5	1.5
78	6.0	2.9	4.5	1.5
42	4.4	3.2	1.3	0.2
92	5.8	2.6	4.0	1.2
66	5.6	3.0	4.5	1.5
31	5.4	3.4	1.5	0.4
35	5.0	3.2	1.2	0.2
90	5.5	2.6	4.4	1.2
84	5.4	3.0	4.5	1.5
77	6.7	3.0	5.0	1.7
40	5.0	3.5	1.3	0.3
125	7.2	3.2	6.0	1.8
99	5.7	2.8	4.1	1.3
33	5.5	4.2	1.4	0.2
19	5.1	3.8	1.5	0.3
73	6.1	2.8	4.7	1.2
146	6.3	2.5	5.0	1.9

```
In [5]: from sklearn.preprocessing import LabelEncoder
la_object = LabelEncoder()
y = la_object.fit_transform(y)
y
```

```
Out[5]: array([0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,  
               0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0,  
               0, 0, 0, 0, 0, 0, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,  
               1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,  
               1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 2, 2, 2, 2, 2, 2, 2, 2, 2,  
               2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2,  
               2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2, 2])
```

```
In [6]: from sklearn.naive_bayes import GaussianNB
        model = GaussianNB()
        model.fit(X_train, y_train)
```

```
Out[6]: GaussianNB()
```

```
In [7]: y_predicted = model.predict(X_test)
```

```
In [8]: y_predicted
```

```
Out[8]: array(['setosa', 'versicolor', 'versicolor', 'setosa', 'virginica',
               'versicolor', 'virginica', 'setosa', 'setosa', 'virginica',
               'versicolor', 'setosa', 'virginica', 'versicolor', 'versicolor',
               'setosa', 'versicolor', 'versicolor', 'setosa', 'setosa',
               'versicolor', 'versicolor', 'virginica', 'setosa', 'virginica',
               'versicolor', 'setosa', 'setosa', 'versicolor', 'virginica'],
              dtype='<U10')
```

```
In [9]: model.score(X_test,y_test)
```

```
Out[9]: 0.9666666666666667
```

```
In [10]: from sklearn.metrics import confusion_matrix, classification_report
cm = confusion_matrix(y_test, y_predicted)
```

In [11]: cm

```
Out[11]: array([[11,  0,  0],
                [ 0, 12,  1],
                [ 0,  0,  6]])
```

```
In [12]: # classification report for precision, recall f1-score and accuracy
         cl_report=classification_report(y_test,y_predicted)
```

```
In [13]: cl_report
```


```
Out[13]:
```

		precision	recall	f1-score	support	setosa	1.00
1.00	1.00	11	versicolor	1.00	0.92	0.96	13
virginica	0.86	1.00	0.92	6	accuracy		
0.97	30	macro avg	0.95	0.97	0.96	30	weighted avg
0.97	0.97	0.97	30				

```
In [14]: # precision recall f1-score support\n\n#Setosa 1.00 1.00 1.00 11\n#Versicolor 1.00 0.92 0.96 13\n#Virginica 0.86 1.00 0.92 6\n#accuracy 0.97 30\n#macro avg 0.95 0.97 0.96 30\n#weighted avg 0.97 0.97 0.97 30
```

```
In [15]: cm_df = pd.DataFrame(cm,index = ['SETOSA', 'VERSICOLR', 'VIRGINICA'],
columns = ['SETOSA', 'VERSICOLR', 'VIRGINICA'])
```

```
In [16]: #Plotting the confusion matrix
import seaborn as sns
plt.figure(figsize=(5,4))
sns.heatmap(cm_df, annot=True)
plt.title('Confusion Matrix')
plt.ylabel('Actal Values')
plt.xlabel('Predicted Values')
plt.show()
```

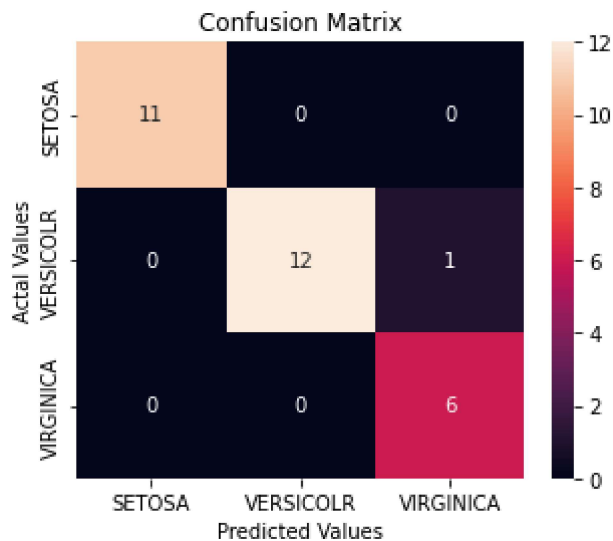

```
In [17]: def accuracy_cm(tp,fn,fp,tn):
return (tp+tn)/(tp+fp+tn+fn)
def precision_cm(tp,fn,fp,tn):
return tp/(tp+fp)
def recall_cm(tp,fn,fp,tn):
return tp/(tp+fn)
def f1_score(tp,fn,fp,tn):
return (2/((1/recall_cm(tp,fn,fp,tn))+precision_cm(tp,fn,fp,tn)))
def error_rate_cm(tp,fn,fp,tn):
return 1-accuracy_cm(tp,fn,fp,tn)
```

```
In [18]: #For Virginica
tp = cm[2][2]
fn = cm[2][0]+cm[2][1]
fp = cm[0][2]+cm[1][2]
tn = cm[0][0]+cm[0][1]+cm[1][0]+cm[1][1]
print("For Virginica \n")
print("Accuracy : ",accuracy_cm(tp,fn,fp,tn))
print("Precision : ",precision_cm(tp,fn,fp,tn))
print("Recall : ",recall_cm(tp,fn,fp,tn))
print("F1-Score : ",f1_score(tp,fn,fp,tn))
print("Error rate : ",error_rate_cm(tp,fn,fp,tn))
```

For Virginica

Accuracy : 0.9666666666666667
Precision : 0.8571428571428571
Recall : 1.0
F1-Score : 1.0769230769230769
Error rate : 0.03333333333333326

In []: