

CHAPTER-1

INTRODUCTION

Breast cancer is one of the leading causes of death among women worldwide, with early detection playing a critical role in improving survival rates. The timely identification and accurate classification of breast tumors as malignant or benign significantly impact clinical decision-making and treatment strategies. As the complexity of medical data increases, traditional diagnostic methods often fall short in providing consistent and reliable predictions. This challenge has led to the growing use of machine learning (ML) algorithms, which are capable of learning complex patterns from data and making predictions with higher accuracy. In the realm of breast cancer diagnosis, machine learning has shown great potential in improving classification performance, reducing the reliance on manual interpretation, and providing more efficient and scalable solutions.

Among the various machine learning algorithms, Support Vector Machines (SVM), specifically the Support Vector Classifier (SVC), have been widely adopted for classification tasks due to their ability to handle high-dimensional data and provide clear decision boundaries. However, the performance of SVC models is highly dependent on the selection of appropriate hyperparameters, such as the regularization parameter (C), the kernel type (linear or non-linear), and the gamma parameter. Improper tuning of these parameters can lead to underfitting or overfitting, which negatively affects the model's predictive accuracy. To address this issue, hyperparameter optimization becomes crucial. One of the most effective methods for hyperparameter tuning is GridSearchCV, which systematically evaluates different combinations of hyperparameters and selects the best performing configuration based on cross-validation. By incorporating GridSearchCV into the training process, it is possible to enhance the performance of the SVC model and achieve more reliable results for breast cancer classification.

In this study, we propose an enhanced approach to breast cancer detection by utilizing a Support Vector Classifier (SVC) combined with GridSearchCV for hyperparameter optimization. The Wisconsin Breast Cancer Diagnostic (WBCD) dataset, which includes a variety of features extracted from breast cancer biopsies, serves as the dataset for training and testing our model. The dataset includes both benign and malignant tumor samples, providing a diverse set of cases for classification. The primary objective of this research is to demonstrate the potential of an optimized SVC model for accurate breast cancer classification.

Through systematic hyperparameter tuning with GridSearchCV, we aim to improve key performance metrics such as accuracy, precision, recall, and the F1 score, which are critical for assessing the reliability and robustness of the model. Furthermore, by comparing the results of the optimized SVC model with traditional classifiers, we aim to showcase the advantages of this approach in terms of diagnostic accuracy and early detection capabilities. Ultimately, this study aims to contribute to the growing body of research on using machine learning for healthcare applications, specifically in breast cancer detection. The findings from this research could have significant implications for clinical practice, offering a more accurate and efficient tool for healthcare professionals to make informed decisions regarding breast cancer diagnosis and treatment.

1.2 SCOPE OF THE PROJECT

The scope of this project revolves around the development and optimization of a machine learning model for breast cancer classification using a Support Vector Classifier (SVC). The primary focus is to enhance the classification performance through systematic hyperparameter tuning with GridSearchCV. The project will utilize the Wisconsin Breast Cancer Diagnostic (WBCD) dataset, which contains various features extracted from breast cancer biopsies, to train and test the model. The data preprocessing phase will include cleaning the dataset, handling missing values, and scaling the features to prepare them for optimal learning. The project aims to build an SVC model that can accurately classify breast tumors as benign or malignant by fine-tuning its key hyperparameters, such as the regularization parameter (C), kernel type, and gamma. Performance evaluation will focus on key metrics like accuracy, precision, recall, F1 score, and AUC to assess the model's effectiveness. Ultimately, the goal of the project is to create a reliable and efficient machine learning tool for early breast cancer detection, providing insights into the potential of hyperparameter optimization in improving classification accuracy.

1.3 OBJECTIVE

The objective of this project is to develop and optimize a machine learning model that accurately classifies breast cancer tumors as benign or malignant using a Support Vector Classifier (SVC). A key focus is on improving the model's performance through hyperparameter optimization via GridSearchCV, where parameters such as the regularization parameter (C), kernel type, and gamma will be fine-tuned to identify the best configuration. The project will also involve comprehensive data preprocessing of the Wisconsin Breast Cancer Diagnostic (WBCD) dataset, including cleaning, handling missing values, and scaling the features to ensure the model receives high-quality input for training. Once the model is trained, it will be evaluated using multiple classification metrics, such as accuracy, precision, recall, F1 score, and AUC, to assess its effectiveness in distinguishing between benign and malignant tumors. The optimized SVC model will be compared to other traditional machine learning classifiers to benchmark its performance and highlight its strengths. The ultimate goal of the project is to create a reliable, high-performing tool for early breast cancer detection, offering healthcare professionals a more accurate diagnostic tool to improve clinical decision-making and enhance patient outcomes.

1.4 EXISTING SYSTEM:

The existing model, Toward Improving Breast Cancer Classification Using an Adaptive Voting Ensemble Learning Algorithm, addresses a significant challenge in the field of medical diagnostics by utilizing an ensemble learning approach to improve the classification of breast cancer tumors. In recent years, the use of machine learning (ML) in healthcare has revolutionized diagnostic methods, particularly in cancer detection, by enabling faster, more accurate analysis of complex datasets. Early detection of breast cancer is crucial for improving patient outcomes, but traditional diagnostic methods can be limited by human error and the complexity of medical data. To overcome these limitations, machine learning models offer the potential to automate and enhance the diagnostic process, offering more precise predictions for malignancy. Ensemble learning is a method where multiple machine learning models are combined to produce a stronger overall model, with the goal of improving classification performance. The fundamental idea behind ensemble learning is that a group of weak learners, or individual models that perform just slightly better than random guessing, can be combined to form a strong learner. This collective decision-making mechanism helps to reduce the variance and bias of individual models, leading to better generalization on unseen data.

In this model, an adaptive voting ensemble learning algorithm is used, which combines four distinct classifiers: Extra Trees Classifier (ETC), Light Gradient Boosting Machine (LGBM), Ridge Classifier (RC), and Linear Discriminant Analysis (LDA). Each classifier brings a unique advantage to the ensemble. The Extra Trees Classifier (ETC) is known for its robustness against overfitting and its ability to handle high-dimensional datasets. The Light Gradient Boosting Machine (LGBM) is particularly effective for large datasets and complex patterns, as it uses gradient boosting to optimize the model iteratively. Ridge Classifier (RC) is effective for linear relationships in data, particularly when dealing with collinearity or high-dimensional features. Finally, Linear Discriminant Analysis (LDA) is a statistical method that seeks to reduce the dimensionality of the dataset while maximizing the separation between different classes, making it particularly suitable for classification tasks where the data has distinct groups. The adaptive voting mechanism plays a central role in this ensemble approach. In the traditional voting ensemble, each classifier votes on a class label, and the majority vote determines the final prediction. However, adaptive voting adjusts the weight or influence of each classifier based on its performance during the training process. Classifiers that perform well on specific subsets of the data are given more influence, while weaker classifiers are down-weighted.

This adaptability allows the ensemble to focus on the most informative models for a given dataset, improving the overall decision-making process and enhancing classification accuracy. This approach was applied to the Wisconsin Breast Cancer Diagnostic (WBCD) dataset, which consists of features derived from breast cancer biopsies, such as radius, texture, smoothness, compactness, and symmetry. These features serve as the basis for distinguishing between malignant and benign tumors. The ensemble model's strength lies in its ability to combine the predictions of these diverse classifiers, capturing different aspects of the data and minimizing the weaknesses of individual models. By integrating multiple algorithms, the ensemble classifier can handle various complexities in the data and make more accurate predictions about the malignancy of a tumor. The proposed adaptive voting ensemble model showcases the power of combining multiple machine learning models to tackle complex problems, particularly in medical diagnostics.

By addressing the inherent limitations of individual classifiers, the ensemble method improves the robustness and reliability of predictions. It also demonstrates how ensemble learning can be applied in healthcare for more effective and accurate cancer detection, which is critical for early diagnosis and better clinical outcomes. The adaptability of this approach suggests it can be extended to other medical domains, making it a versatile tool for enhancing diagnostic systems and supporting healthcare professionals in their decision-making processes.

1.4.1 EXISTING SYSTEM DISADVANTAGES:

- **Complexity:** The use of multiple classifiers in an ensemble increases model complexity, making it harder to interpret.
- **Computational Cost:** Ensemble methods are computationally expensive and require more resources compared to individual models.
- **Overfitting:** The model may still overfit if the base models are not well-tuned, despite ensemble methods reducing overfitting.
- **Data Imbalance Sensitivity:** Ensemble learning may be sensitive to imbalanced datasets, potentially affecting classification performance.

1.5 LITERATURE SURVEY

TITLE: Breast cancer classification using snapshot ensemble deep learning model and distributed stochastic neighbor embedding

AUTHORS: X N. Sharma, K. P. Sharma, M. Mangla, and R. Rani

YEAR: 2023

DESCRIPTION: The paper by Sharma et al. (2023), titled "Breast cancer classification using snapshot ensemble deep learning model and t-distributed stochastic neighbor embedding", presents an advanced method for improving the accuracy of breast cancer detection using machine learning techniques. The study integrates a snapshot ensemble deep learning model, which combines multiple models to improve prediction reliability, with t-distributed stochastic neighbor embedding (t-SNE) for better visualization of the data. In this approach, snapshot ensembles are used to capture different "snapshots" of a deep learning model trained at various stages, which are then combined to enhance classification performance. t-SNE, a dimensionality reduction technique, is employed to visualize high-dimensional breast cancer data in lower dimensions, facilitating better understanding and interpretation of the model's decisions. This methodology allows for effective classification of breast cancer data, aiming to improve both accuracy and the interpretability of results, which is crucial in medical diagnosis. This paper aims to address the challenges in breast cancer classification by using ensemble learning and dimensionality reduction, demonstrating a novel approach that may lead to more accurate and robust models for medical diagnostics

TITLE: An ensemble architecture based on deep learning model for click fraud detection in Pay-Per-Click advertisement campaign.

AUTHORS: A. Batool and Y.-C. Byun

YEAR: 2022

DESCRIPTION: The paper "An Ensemble Architecture Based on Deep Learning Model for Click Fraud Detection in Pay-Per-Click Advertisement Campaign" by Amreen Batool and Y.-C. Byun focuses on detecting click fraud in online advertising, a practice that involves fraudulent clicks aimed at wasting an advertiser's budget. The authors propose an innovative ensemble architecture combining deep learning models and machine learning techniques. The model integrates a Convolutional Neural Network (CNN) and a Bidirectional Long Short-Term Memory (BiLSTM) network for feature extraction, followed by a Random Forest (RF) classifier for final prediction. This hybrid approach addresses the challenge of identifying fraudulent clicks by automatically extracting features from click data and then classifying it as fraudulent or legitimate. To further enhance the model's effectiveness, it also incorporates a preprocessing module to handle issues like imbalanced data, which is common in fraud detection. The overall goal of this method is to improve the reliability and efficiency of click fraud detection in pay-per-click advertising, offering a solution that can safeguard advertiser budgets and maintain the integrity of online advertising campaigns.

TITLE: A case study of microarray breast cancer classification using machine learning algorithms with grid search cross validation

AUTHORS: N. Mohd Ali, R. Besar, and N. A. A. Aziz,

YEAR: 2023

DESCRIPTION: The article you referenced discusses a study on breast cancer (BC) classification using machine learning techniques. It specifically focuses on the use of three algorithms: Support Vector Machine (SVM), Random Forest (RF), and Extra Trees (ET), for classifying microarray data. The researchers employed GridSearchCV for hyperparameter tuning to optimize the models' performance. The dataset used for the study combined two microarray datasets (GSE45255 and GSE15852), resulting in a total of 182 breast cancer patients and 43 normal cases, with 22,215 genes per sample. The study demonstrates a preprocessing phase that involved normalization and standardization of the gene expression data. Data splitting was performed with an 80-20 training-test ratio, and cross-validation (CV) was applied to assess model performance. Performance metrics such as classification accuracy, F1-score, sensitivity, and specificity were calculated to evaluate the models' effectiveness. In terms of results, the authors found that the classification accuracy and other evaluation metrics were influenced by the choice of model and the hyperparameters selected through GridSearchCV. The study's findings emphasize the importance of proper model tuning and cross-validation in achieving robust classification results for microarray-based breast cancer data.

TITLE: Performance analysis of averaged perceptron machine learning classifier for breast cancer detection

AUTHORS: V. Birchha and B. Nigam,

YEAR: 2023

DESCRIPTION: The paper by Birchha and Nigam evaluates the Averaged Perceptron (AP) classifier's effectiveness for breast cancer detection. It highlights the model's ability to handle noisy data and perform well in multi-class classification. The study also emphasizes the role of parameter optimization and feature selection to improve the classifier's performance. By using breast cancer datasets, they demonstrate that AP can be a reliable tool in early diagnosis, although its accuracy is highly dependent on proper data preprocessing and tuning

TITLE: Using PBL and agile to teach artificial intelligence to undergraduate computing students.

AUTHORS: V. A. M. De Barros, H. M. Paiva, and V. T. Hayashi

YEAR: 2023

DESCRIPTION: The study titled "Using PBL and Agile to Teach Artificial Intelligence to Undergraduate Computing Students" by Vitor Augusto Menten De Barros, Henrique Mohallem Paiva, and Victor Takashi Hayashi, focuses on the implementation of Project-Based Learning (PBL) integrated with Agile methodologies, specifically Scrum, to teach Artificial Intelligence (AI) to undergraduate students in computing programs. The case study, conducted with 30 students, highlights how these students successfully developed machine learning models for a real-world breast cancer prediction task. The key contribution of the study is its exploration of how PBL and Agile can enhance student learning by fostering practical skills such as problem-solving, teamwork, critical thinking, and communication, which are crucial in real-world applications of AI. The use of Agile principles like collaboration, iteration, and feedback loops within the learning process allowed students to gain deeper insights into the iterative nature of AI development. The study serves as a valuable resource for future AI teaching methodologies and aims to bridge gaps in the research on the application of Scrum and Agile in computing education.

1.6 PROPOSED SYSTEM

The proposed system centers around optimizing a Support Vector Classifier (SVC) model, chosen for its robustness in handling high-dimensional data and its effectiveness in binary classification tasks. SVC works by identifying a hyperplane that maximizes the margin between different classes, thereby reducing misclassification and improving model accuracy. This approach allows SVC to generalize well, particularly when dealing with complex datasets that might otherwise lead to overfitting in other algorithms. To enhance the model's performance further, the system employs a hyperparameter tuning technique via GridSearchCV, which iterates over a predefined set of hyperparameters to find the optimal combination. Specifically, the model examines variations of the regularization parameter C , kernel types (such as linear and radial basis function (RBF)), and gamma settings (scale and auto). These hyperparameters are crucial, as they control the flexibility and regularization of the decision boundary, directly influencing how well the model balances bias and variance.

GridSearchCV uses cross-validation, generally set to 5 folds, to test each parameter combination rigorously across different subsets of the data. This ensures that the best parameters selected are not only optimal for the training set but also generalize well across unseen data. The iterative search and validation help mitigate issues of overfitting and underfitting, often improving the model's predictive accuracy and stability. Overall, this system is designed to efficiently classify data by balancing complexity and generalization, with the structured approach of GridSearchCV enhancing the SVC model's capability in finding a stable, high-performing solution for various classification tasks. This setup is especially advantageous in scenarios with limited labeled data or where precision in separating classes is paramount.

1.6.1 PROPOSED SYSTEM ADVANTAGES:

- High Accuracy: SVC is effective in high-dimensional spaces, making it well-suited for tasks with complex and high-dimensional data.
- Robust to Overfitting: The SVC model's margin maximization reduces overfitting, providing more reliable generalization on new data.
- Effective with Small Datasets: SVC performs well with smaller datasets, as it does not require a large amount of data to find an optimal hyperplane.
- Hyperparameter Optimization: GridSearchCV ensures that the best parameter settings are chosen, enhancing model accuracy and consistency.

CHAPTER 2

PROJECT DESCRIPTION

2.1 GENERAL:

A machine learning-based classification system to improve the accuracy of breast cancer detection. By analyzing medical datasets, specifically the Wisconsin Breast Cancer Diagnostic (WBCD) dataset, the goal is to create a system that can distinguish between malignant and benign tumors. Accurate and timely diagnosis of breast cancer plays a critical role in improving survival rates, as early detection is linked to better treatment outcomes. Machine learning offers significant advantages over traditional methods by enabling automated, data-driven insights. In particular, using advanced algorithms allows for more consistent and objective classifications, which can assist healthcare professionals in making informed decisions. This approach leverages the power of data mining techniques to identify patterns in medical data, increasing diagnostic efficiency and reducing the potential for human error.

The system is designed to enhance breast cancer classification by using robust algorithms that are fine-tuned for optimal performance. These algorithms learn from historical data to improve their predictions, which is crucial in handling complex medical cases with high dimensionality. Through model optimization techniques, such as hyperparameter tuning and cross-validation, the system aims to achieve high classification accuracy, reliability, and scalability, contributing to the ongoing effort to utilize artificial intelligence (AI) and machine learning in healthcare. Ultimately, the project aspires to provide a valuable tool for clinicians, improving the diagnostic process by providing a faster, more accurate means of identifying cancerous tumors. By leveraging the power of machine learning, the project helps advance the field of medical diagnostics and paves the way for integrating AI solutions into clinical practices.

2.2 METHODOLOGIES

2.2.1 MODULES NAME:

Modules Name:

1. Data Collection and Preprocessing
2. Model Selection
3. Hyperparameter Tuning
4. Cross Validation
5. Ensemble methods (Existing Model)
6. Model Evaluation
7. Comparison with Existing Methods

2.2.2 MODULES EXPLANATION:

1. Data Collection and Preprocessing:

The primary dataset used is the Wisconsin Breast Cancer Diagnostic (WBCD) dataset, which includes features of tumors such as size, texture, and shape. Preprocessing steps typically include handling missing values, scaling/normalizing the data to ensure all features contribute equally, and splitting the data into training and testing sets to avoid overfitting.

2. Model Selection:

The project leverages the Support Vector Classifier (SVC) model, a supervised machine learning algorithm particularly effective for classification tasks. SVC creates a decision boundary by maximizing the margin between data points of different classes, providing an optimal separation for accurate classification.

3. Hyperparameter Tuning:

GridSearchCV is used to optimize the model by selecting the best set of hyperparameters through an exhaustive search over a predefined parameter grid. This helps find the most suitable parameters for the SVC, such as the regularization parameter C , kernel type (linear or radial basis function (RBF)), and gamma, which affect the decision boundary's flexibility and generalization ability.

4. Cross-Validation:

To ensure the model's performance generalizes well to unseen data, cross-validation (with 5-folds in our case) is applied. This technique involves partitioning the training data into subsets, training the model on some and validating it on others, which helps mitigate issues of overfitting.

5. Ensemble Methods:

In addition to the SVC model, the existing model uses an ensemble learning approach, combining multiple classifiers—Extra Trees Classifier (ETC), Light Gradient Boosting Machine (LightGBM), Ridge Classifier (RC), and Linear Discriminant Analysis (LDA)—through a voting mechanism. Ensemble methods typically improve model performance by combining the strengths of individual classifiers to reduce bias and variance in the final predictions.

6. Model Evaluation:

The performance of the models is evaluated using various metrics, including accuracy, precision, recall, and F1-score, to ensure they provide a well-rounded assessment of classification performance. These metrics help determine how well the model distinguishes between benign and malignant tumors.

7. Comparison with Existing Methods:

The results from proposed SVC model are compared against those of the ensemble model, with the goal of assessing whether the fine-tuned SVC can match or exceed the performance of the ensemble approach.

2.3 TECHNIQUE USED OR ALGORITHM USED

2.3.1 EXISTING TECHNIQUE: -

➤ ADAPTIVE VOTING ENSEMBLE LEARNING

The existing algorithm utilizes an adaptive voting ensemble learning approach that combines four distinct machine learning models: Extra Trees Classifier (ETC), Light Gradient Boosting Machine (LightGBM), Ridge Classifier (RC), and Linear Discriminant Analysis (LDA). These models each offer unique strengths, and by combining them into a single framework, the ensemble approach leverages the diversity of the individual classifiers to produce a more accurate and robust prediction. Extra Trees Classifier (ETC) is an ensemble of decision trees that enhances the decision-making process by introducing additional randomness in the tree-building process, such as selecting random subsets of features at each split. This randomness helps in reducing overfitting and ensures the model generalizes better to unseen data. ETC is particularly useful for high-dimensional datasets and handles both categorical and numerical features well.

Light Gradient Boosting Machine (LightGBM) is a gradient boosting framework that efficiently builds decision trees in a sequential manner. Unlike traditional boosting methods, LightGBM uses a histogram-based technique to split continuous features into bins, significantly reducing memory usage and speeding up training. This makes it particularly effective for large datasets and tasks requiring high prediction accuracy. The boosting nature of LightGBM enables the model to focus on correcting the mistakes of previous trees, making it highly precise. Ridge Classifier (RC) is a linear model that applies ridge regression to classification tasks. It adds regularization to prevent overfitting, especially when the data has a large number of features or is collinearly correlated. Ridge classification is effective when the relationship between the features and the target variable is approximately linear, which allows for quick and stable solutions.

Linear Discriminant Analysis (LDA) is a statistical method that projects data onto a lower-dimensional space to separate classes in a way that maximizes the variance between classes while minimizing the variance within each class. LDA is particularly useful for classification tasks with fewer training samples but many features, making it suitable for high-dimensional datasets like the one used in breast cancer detection. By combining these four classifiers, the adaptive voting ensemble method aggregates their individual predictions through a majority vote or weighted voting, depending on the specific implementation. This combination reduces the model's overall error rate and improves the robustness and stability of predictions, especially when faced with complex and imbalanced datasets like those used in medical diagnostics.

2.3.2 PROPOSED TECHNIQUE USED OR ALGORITHM USED:

➤ SUPPORT VECTOR CLASSIFIER (SVC):

The proposed algorithm utilizes the Support Vector Classifier (SVC), a machine learning model widely used for classification tasks, particularly in scenarios where data is not linearly separable. The core idea behind SVC is to find a hyperplane that best separates data points of different classes, maximizing the margin between them. In the context of breast cancer classification, this model aims to differentiate between benign and malignant tumor cases, relying on the features extracted from the dataset. The model's performance can vary significantly based on its hyperparameters, so GridSearchCV is applied to systematically explore different configurations. This involves testing a range of hyperparameters, including the C parameter, which balances the trade-off between margin width and classification error; the kernel, which defines how the data is mapped into higher dimensions (with options like 'linear' and 'rbf'); and gamma, which governs the influence of individual data points in constructing the decision boundary. The grid search method ensures the model selects the best parameters that yield the highest accuracy for the specific dataset.

To assess the robustness of the model, 5-fold cross-validation is employed. This technique divides the dataset into five subsets, using each subset once as the test set while training the model on the remaining four. By averaging the results from each fold, the model's generalization ability is improved, and overfitting is minimized. This step is crucial in medical applications like breast cancer detection, where the cost of misclassification is high. Once the optimal parameters are selected, the SVC model is trained on the entire dataset, allowing it to make accurate predictions about new, unseen data. This approach, combining careful hyperparameter tuning with robust cross-validation, enhances the model's ability to generalize and perform well on real-world, unseen breast cancer data. The use of SVC for this task is especially relevant due to its effectiveness in handling complex, high-dimensional spaces, typical in medical diagnostic datasets.

CHAPTER 3

REQUIREMENTS ENGINEERING

3.1 GENERAL

We can see from the results that on each database, the error rates are very low due to the discriminatory power of features and the regression capabilities of classifiers. Comparing the highest accuracies (corresponding to the lowest error rates) to those of previous works, our results are very competitive.

3.2 HARDWARE REQUIREMENTS

The hardware requirements may serve as the basis for a contract for the implementation of the system and should therefore be a complete and consistent specification of the whole system. They are used by software engineers as the starting point for the system design. It should what the system does and not how it should be implemented.

- PROCESSOR : i5 processor / i7 processor
- RAM : 8GB / 16GB RAM
- HARD DISK : 512 GB

3.3 SOFTWARE REQUIREMENTS

The software requirements document is the specification of the system. It should include both a definition and a specification of requirements. It is a set of what the system should do rather than how it should do it. The software requirements provide a basis for creating the software requirements specification. It is useful in estimating cost, planning team activities, performing tasks and tracking the teams and tracking the team's progress throughout the development activity.

- Operating System : Windows 10/11
- Platform : VS Code
- Programming Language : Python
- Front End : HTML, CSS
- Back End : Flask

3.4 FUNCTIONAL REQUIREMENTS

A functional requirement defines a function of a software-system or its component. A function is described as a set of inputs, the behavior, Firstly, the system is the first that achieves the standard notion of semantic security for data confidentiality in attribute-based deduplication systems by resorting to the hybrid cloud architecture.

3.5 NON-FUNCTIONAL REQUIREMENTS

The major non-functional Requirements of the system are as follows

Usability

The system is designed with completely automated process hence there is no or less user intervention.

Reliability

The system is more reliable because of the qualities that are inherited from the chosen platform python. The code built by using python is more reliable.

Performance

This system is developing in the high-level languages and using the advanced back-end technologies it will give response to the end user on client system with in very less time.

Supportability

The system is designed to be the cross platform supportable. The system is supported on a wide range of hardware and any software platform, which is built into the system.

Implementation

The system is implemented in web environment using Jupyter notebook software. The server is used as the intelligence server and windows 10 professional is used as the platform. Interface the user interface is based on Jupyter notebook provides server system.

CHAPTER 4


DESIGN ENGINEERING

4.1 GENERAL

Design Engineering deals with the various UML [Unified Modelling language] diagrams for the implementation of project. Design is a meaningful engineering representation of a thing that is to be built. Software design is a process through which the requirements are translated into representation of the software. Design is the place where quality is rendered in software engineering.

4.2 UML DIAGRAMS


4.2.1 USE CASE DIAGRAM

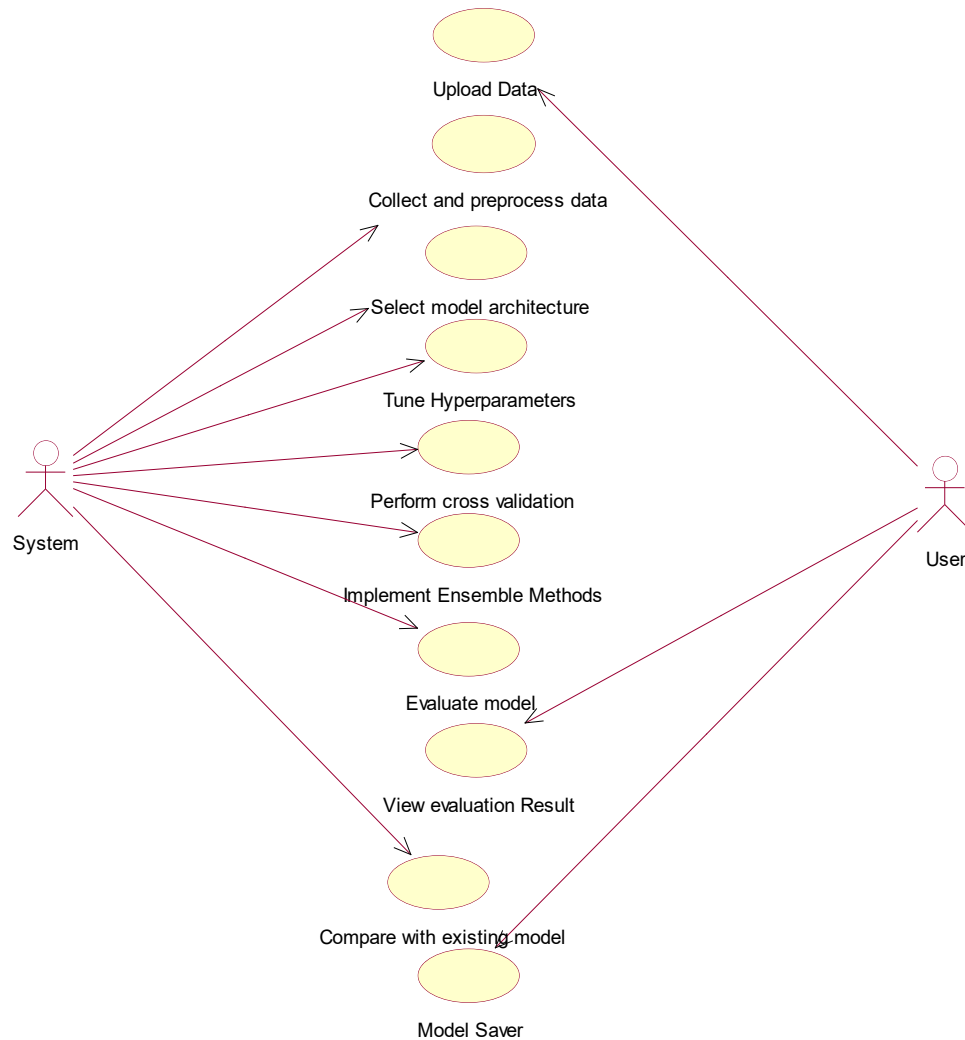

EXPLANATION:

The main purpose of a use case diagram is to show what system functions are performed for which actor. Roles of the actors in the system can be depicted. The above diagram consists of user as actor. Each will play a certain role to achieve the concept.


4.2.2 CLASS DIAGRAM

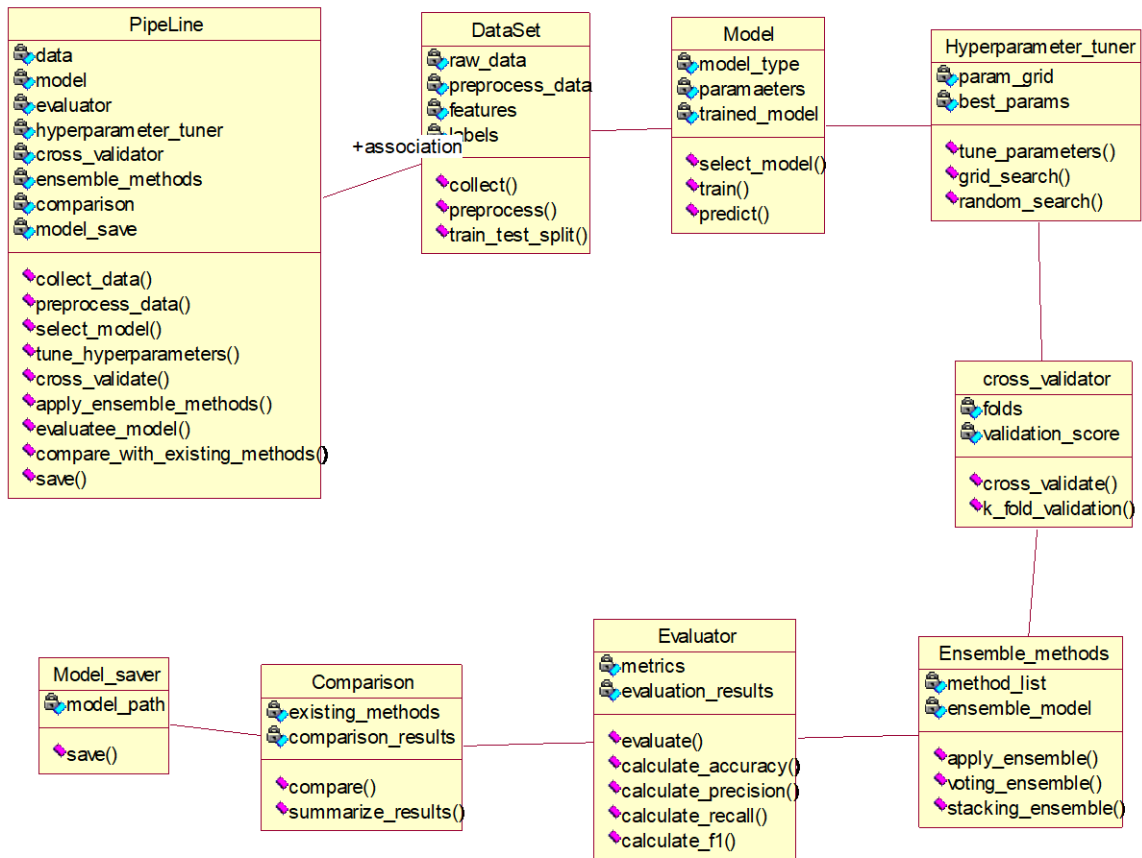

EXPLANATION

In this class diagram represents how the classes with attributes and methods are linked together to perform the verification with security. From the above diagram shown the various classes involved in our project.


4.2.3 OBJECT DIAGRAM

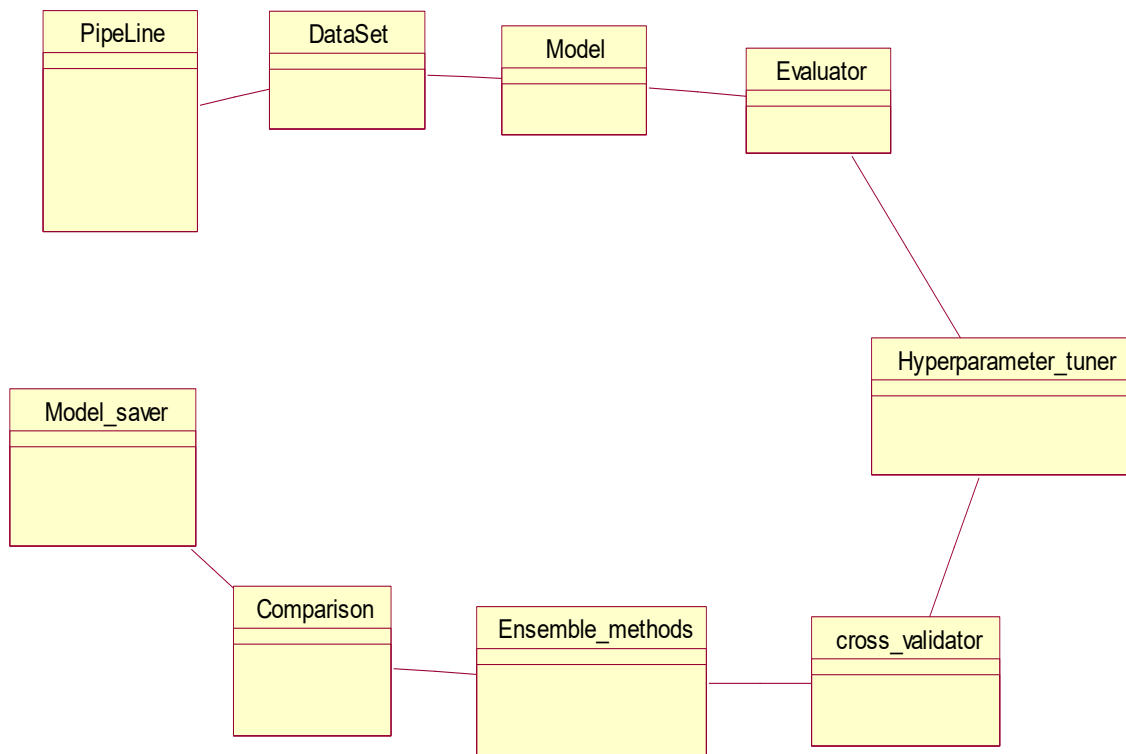

EXPLANATION:

In the above diagram tells about the flow of objects between the classes. It is a diagram that shows a complete or partial view of the structure of a modeled system. In this object diagram represents how the classes with attributes and methods are linked together to perform the verification with security.


4.2.4 STATE DIAGRAM

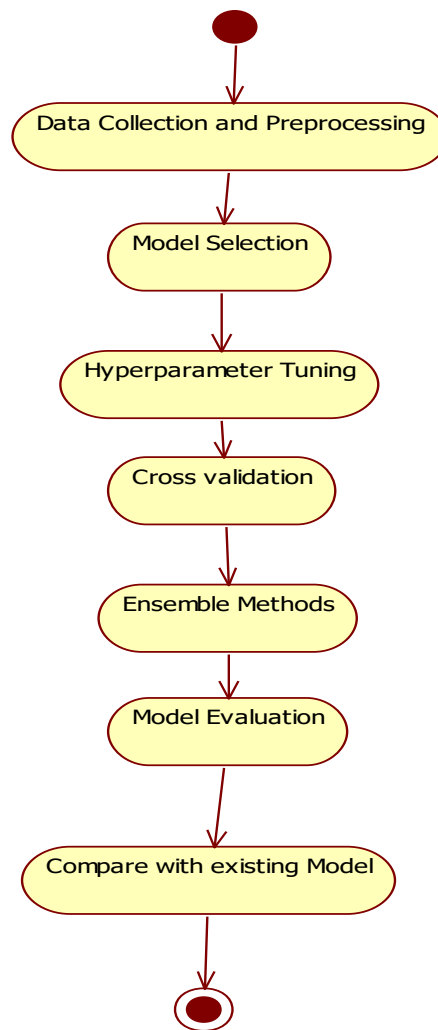

EXPLANATION:

State diagram are a loosely defined diagram to show workflows of stepwise activities and actions, with support for choice, iteration and concurrency. State diagrams require that the system described is composed of a finite number of states; sometimes, this is indeed the case, while at other times this is a reasonable abstraction. Many forms of state diagrams exist, which differ slightly and have different semantics.


4.2.5 ACTIVITY DIAGRAM

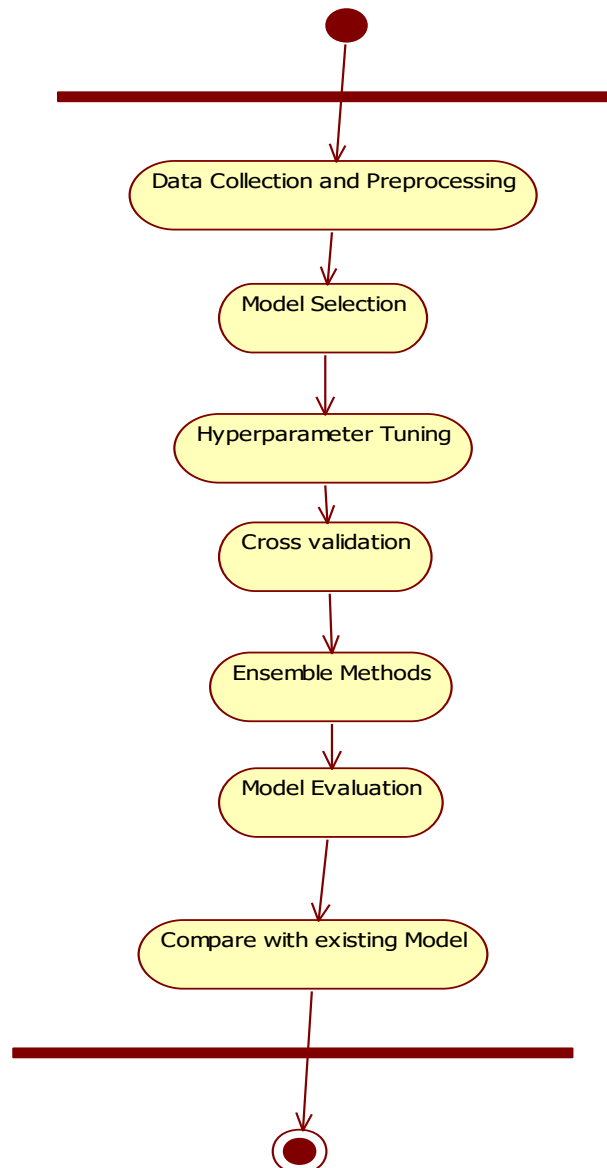

EXPLANATION:

Activity diagrams are graphical representations of workflows of stepwise activities and actions with support for choice, iteration and concurrency. In the Unified Modeling Language, activity diagrams can be used to describe the business and operational step-by-step workflows of components in a system. An activity diagram shows the overall flow of control.


4.2.6 SEQUENCE DIAGRAM

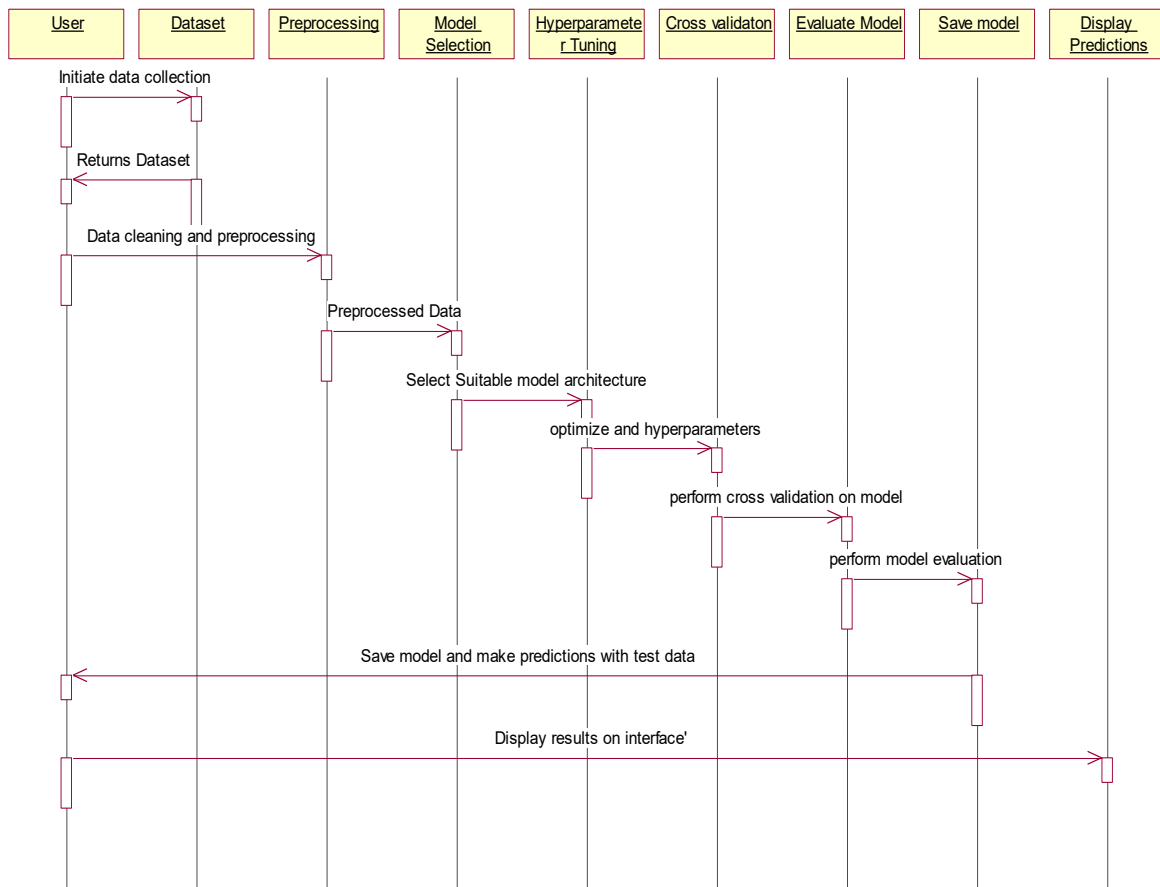

EXPLANATION:

A sequence diagram in Unified Modeling Language (UML) is a kind of interaction diagram that shows how processes operate with one another and in what order. It is a construct of a Message Sequence Chart. A sequence diagram shows object interactions arranged in time sequence. It depicts the objects and classes involved in the scenario and the sequence of messages exchanged between the objects needed to carry out the functionality of the scenario.


4.2.7 COLLABORATION DIAGRAM

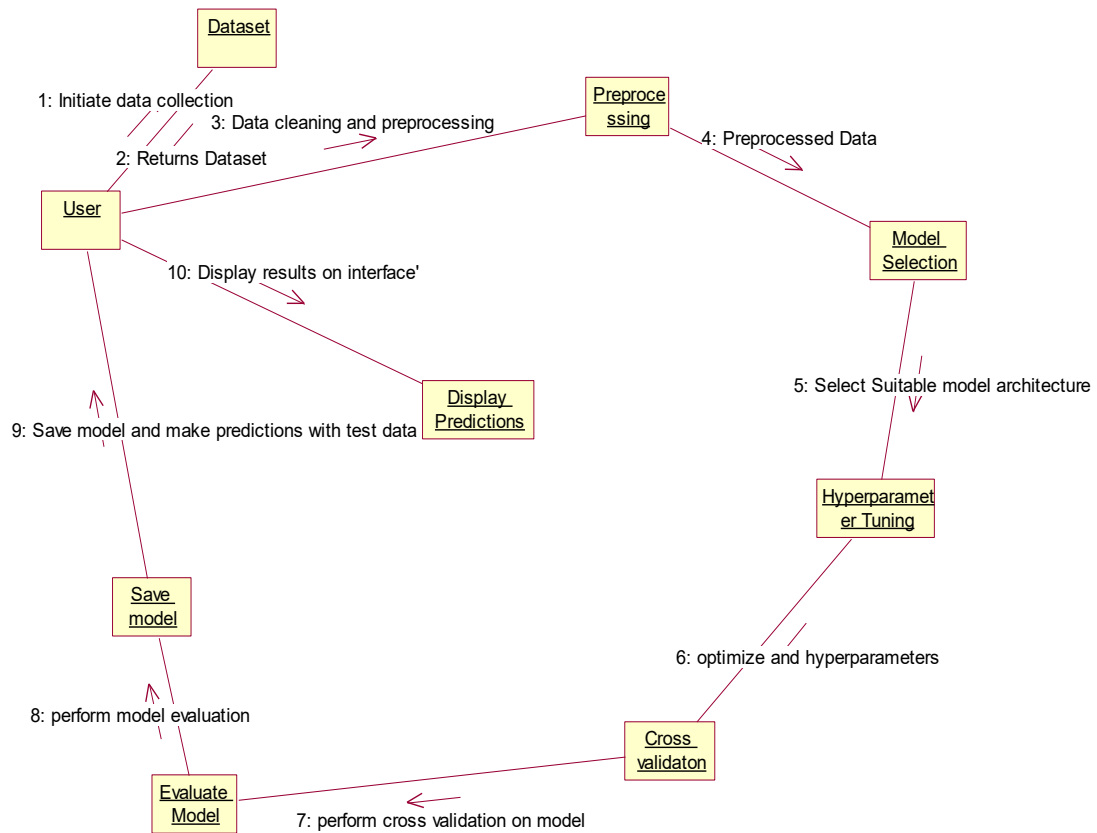

EXPLANATION:

A collaboration diagram, also called a communication diagram or interaction diagram, is an illustration of the relationships and interactions among software objects in the Unified Modeling Language (UML). The concept is more than a decade old although it has been refined as modeling paradigms have evolved.

4.2.8 COMPONENT DIAGRAM

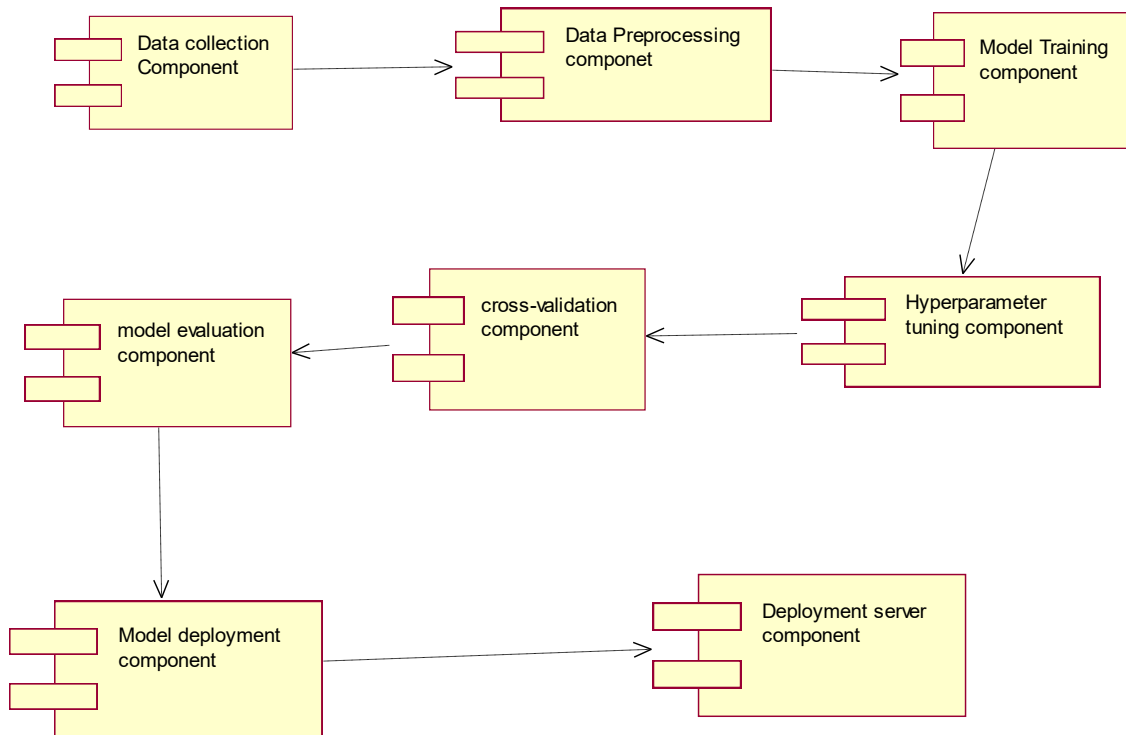


EXPLANATION

In the Unified Modeling Language, a component diagram depicts how components are wired together to form larger components and or software systems. They are used to illustrate the structure of arbitrarily complex systems. User gives main query and it converted into sub queries and sends through data dissemination to data aggregators. Results are to be showed to user by data aggregators. All boxes are components and arrow indicates dependencies.

4.2.9 DATA FLOW DIAGRAM

Level 0

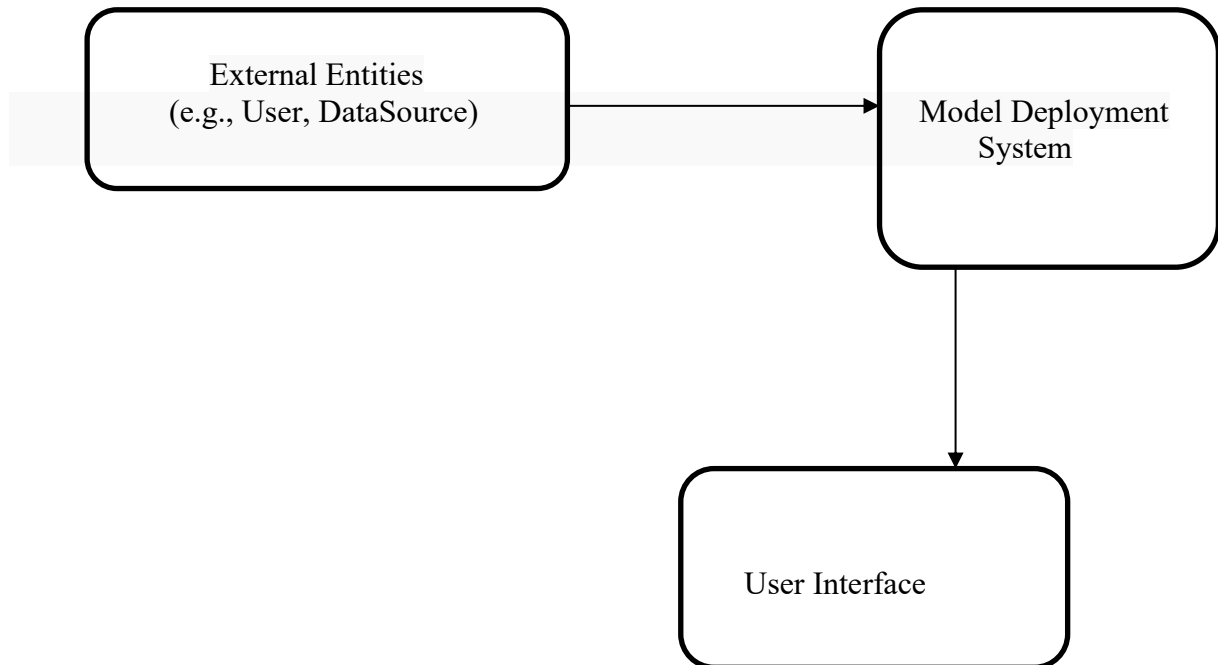

Level 1

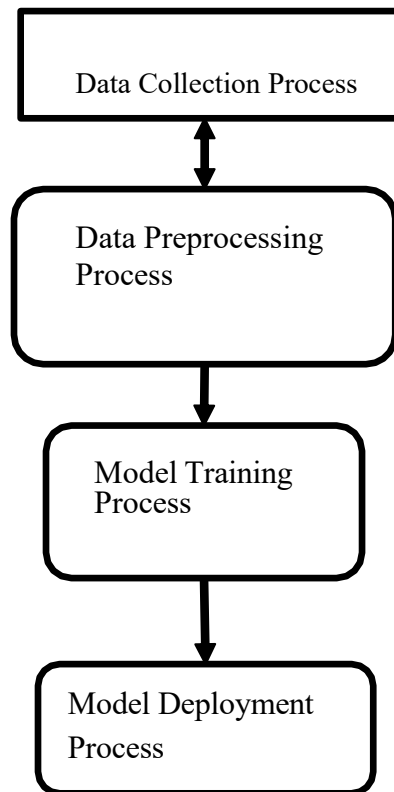



Fig 4.9: Data Flow Diagrams

EXPLANATION:

A data flow diagram (DFD) is a graphical representation of the "flow" of data through an information system, modeling its process aspects. Often, they are a preliminary step used to create an overview of the system which can later be elaborated. DFDs can also be used for the visualization of data processing (structured design).

A DFD shows what kinds of data will be input to and output from the system, where the data will come from and go to, and where the data will be stored. It does not show information about the timing of processes, or information about whether processes will operate in sequence or in parallel.

4.2.10 DEPLOYMENT DIAGRAM

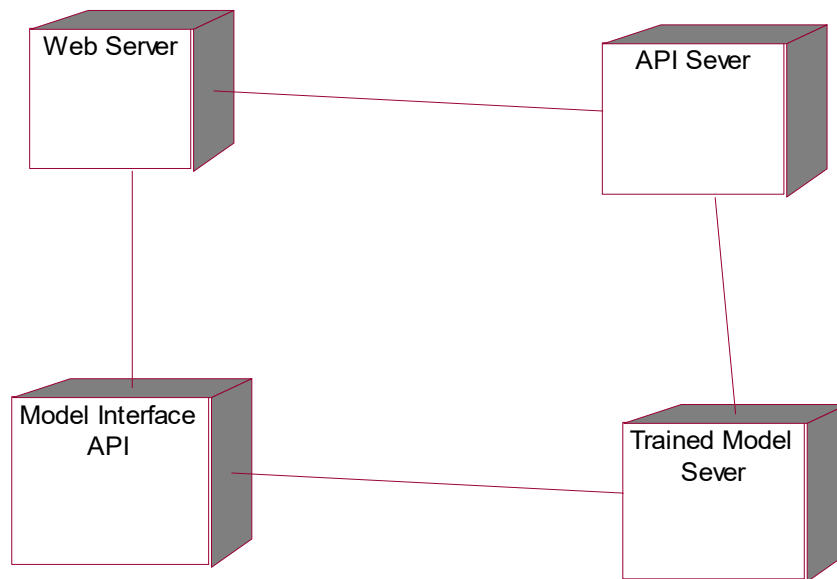

EXPLANATION:

Deployment Diagram is a type of diagram that specifies the physical hardware on which the software system will execute. It also determines how the software is deployed on the underlying hardware. It maps software pieces of a system to the device that are going to execute it.

SYSTEM ARCHITECTURE:

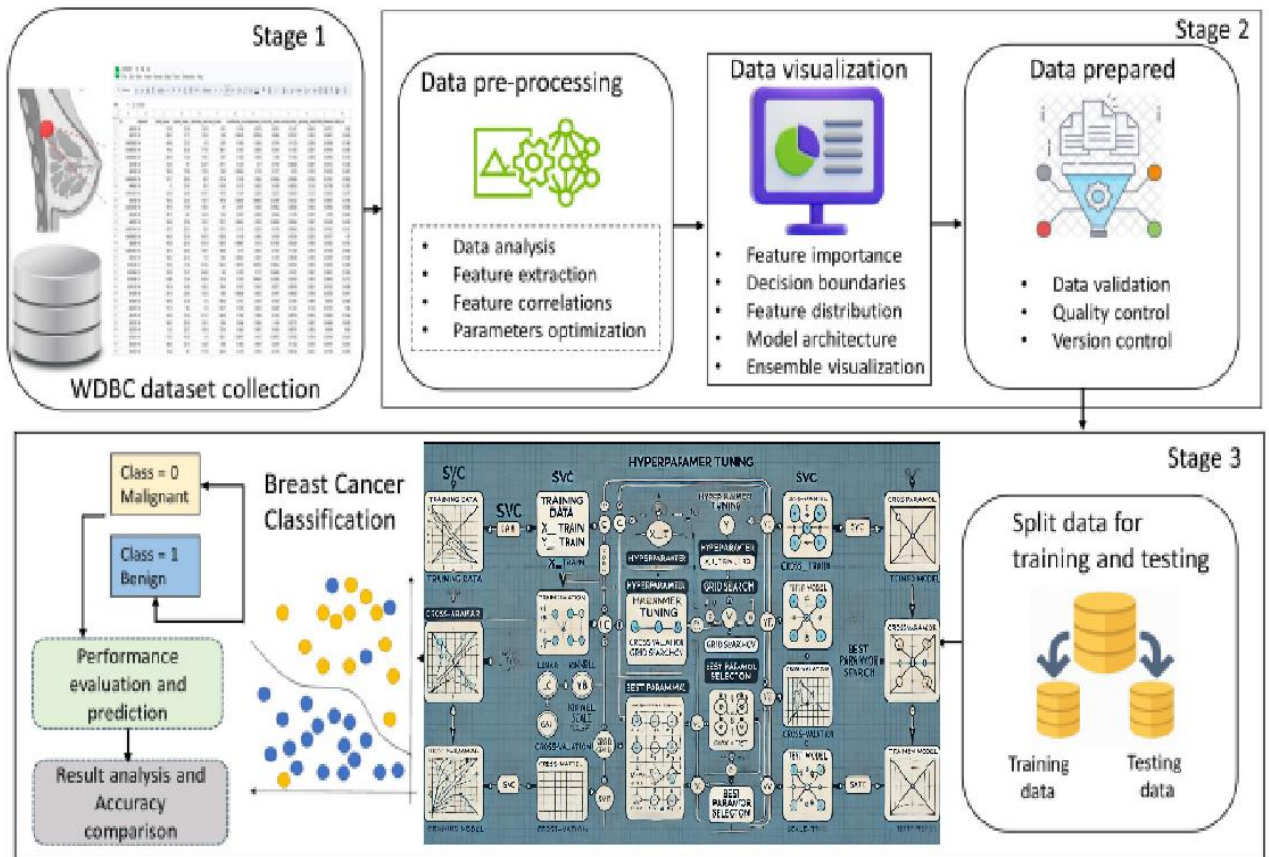


Fig 4.11 System Architecture

CHAPTER 5

DEVELOPMENT TOOLS

1. Python

Python is a high-level, interpreted, interactive and object-oriented scripting language. Python is designed to be highly readable. It uses English keywords frequently where as other languages use punctuation, and it has fewer syntactical constructions than other languages.

2. History of Python

Python was developed by Guido van Rossum in the late eighties and early nineties at the National Research Institute for Mathematics and Computer Science in the Netherlands.

Python is derived from many other languages, including ABC, Modula-3, C, C++, Algol-68, Small Talk, and Unix shell and other scripting languages.

Python is copyrighted. Like Perl, Python source code is now available under the GNU General Public License (GPL).

Python is now maintained by a core development team at the institute, although Guido van Rossum still holds a vital role in directing its progress.

3. Importance of Python

- **Python is Interpreted** – Python is processed at runtime by the interpreter. You do not need to compile your program before executing it. This is similar to PERL and PHP.
- **Python is Interactive** – You can actually sit at a Python prompt and interact with the interpreter directly to write your programs.
- **Python is Object-Oriented** – Python supports Object-Oriented style or technique of programming that encapsulates code within objects.
- **Python is a Beginner's Language** – Python is a great language for the beginner-level programmers and supports the development of a wide range of applications from simple text processing to WWW browsers to games.

4. Features of Python

- **Easy-to-learn** – Python has few keywords, simple structure, and a clearly defined syntax. This allows the student to pick up the language quickly.
- **Easy-to-read** – Python code is more clearly defined and visible to the eyes.
- **Easy-to-maintain** – Python's source code is fairly easy-to-maintain.
- **A broad standard library** – Python's bulk of the library is very portable and cross-platform compatible on UNIX, Windows, and Macintosh.
- **Interactive Mode** – Python has support for an interactive mode which allows interactive testing and debugging of snippets of code.
- **Portable** – Python can run on a wide variety of hardware platforms and has the same interface on all platforms.
- **Extendable** – You can add low-level modules to the Python interpreter. These modules enable programmers to add to or customize their tools to be more efficient.
- **Databases** – Python provides interfaces to all major commercial databases.
- **GUI Programming** – Python supports GUI applications that can be created and ported to many system calls, libraries and windows systems, such as Windows MFC, Macintosh, and the X Window system of Unix.
- **Scalable** – Python provides a better structure and support for large programs than shell scripting.

Apart from the above-mentioned features, Python has a big list of good features, few are listed below

- It supports functional and structured programming methods as well as OOP
- It provides very high-level dynamic data types and supports dynamic type checking
- IT supports automatic garbage collection.
- It can be easily integrated with C, C++, COM, ActiveX, CORBA, and Java.

5. Libraries used in python

- numpy - mainly useful for its N-dimensional array objects.
- pandas - Python data analysis library, including structures such as dataframes.
- matplotlib - 2D plotting library producing publication quality figures.
- scikit-learn - the machine learning algorithms used for data analysis and data mining tasks.



Figure: NumPy, Pandas, Matplotlib, Scikit-learn

CHAPTER 6

IMPLEMENTATION

6.1 GENERAL

Coding:

1) Machine Learning Model (Breast_cancer.ipynb)

1.1 Import Libraries

```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
from sklearn.model_selection import train_test_split
from sklearn.svm import SVC
from sklearn.metrics import accuracy_score, f1_score
from sklearn.preprocessing import StandardScaler, LabelEncoder
from sklearn.model_selection import GridSearchCV
```

1.2 Load Dataset

```
df=pd.read_csv('data.csv')
df.head()
df.shape
```

1.3 Feature Selection

```
df1=df[["radius_mean", 'texture_mean', 'perimeter_mean', 'area_mean', 'smoothness_mean',
        'concavity_mean', 'concave_points_mean', 'symmetry_mean',
        'fractal_dimension_mean', "diagnosis"]]
```

1.4 Data Preprocessing

```
scaler=LabelEncoder()
df1['diagnosis']=scaler.fit_transform(df1['diagnosis'])
scaler=StandardScaler()
df1.iloc[:, :-1]=scaler.fit_transform(df1.iloc[:, :-1])
```

1.5 Exploratory Data Analysis (EDA)

- **Box Plot**

```
plt.figure(figsize=(8, 6))
plt.boxplot([df1[df1['diagnosis']==0]['radius_mean'], df1[df1['diagnosis']==1]
['radius_mean']], labels=['Diagnosis 0', 'Diagnosis 1'])
plt.xlabel('Diagnosis')
plt.ylabel('Radius Mean')
_ = plt.title('Distribution of Radius Mean by Diagnosis')
```

- **Histogram**

```
plt.hist(df1[df1['diagnosis'] == 0]['radius_mean'], alpha=0.5, label='Diagnosis 0')
plt.hist(df1[df1['diagnosis'] == 1]['radius_mean'], alpha=0.5, label='Diagnosis 1')
plt.title('Distribution of Radius Mean by Diagnosis')
plt.xlabel('Radius Mean')
plt.ylabel('Frequency')
_ = plt.legend()
```

- **Scatter Plot**

```
plt.figure(figsize=(8, 6))
plt.scatter(df1[df1['diagnosis']==0]['radius_mean'], df1[df1['diagnosis']==0]['texture_mean']
label='Diagnosis 0', alpha=0.7)
plt.scatter(df1[df1['diagnosis'] == 1]['radius_mean'], df1[df1['diagnosis'] == 1]
['texture_mean'], label='Diagnosis 1', alpha=0.7)
plt.xlabel('Radius Mean')
plt.ylabel('Texture Mean')
plt.title('Correlation between Radius Mean and Texture Mean by Diagnosis')
_ = plt.legend()
```

1.6 Train-Test Split

```
X=df1.iloc[:, :-1]
y = df1.iloc[:, -1]
X_train,X_test,y_train,y_test=train_test_split(X,y,test_size=0.2,random_state=42)
```

1.7 Model Training (Support Vector Classifier)

```
model=SVC() #Support Vector Classifier Model
parameters={
    'C':[0.1,1,10],
    'kernel':['linear','rbf'],
    'gamma':['scale','auto']
}
grid_mod=GridSearchCV(estimator=model,param_grid=parameters,cv=5)
grid_mod.fit(X_train,y_train)
```

1.8 Model Prediction

```
prediction=grid_mod.predict(X_test)
```

1.9 Model Evaluation

```
accuracy_score(y_test,prediction)*100
from sklearn.metrics import precision_score, recall_score, f1_score
precision = precision_score(y_test, prediction) * 100
recall = recall_score(y_test, prediction) * 100
f1 = f1_score(y_test, prediction) * 100
print(f"Precision: {precision:.2f}%")
print(f"Recall: {recall:.2f}%")
print(f"F1 Score: {f1:.2f}%")
```

1.10 Save Trained Model

```
import pickle
best_model = grid_mod.best_estimator_
with open("SVM_model1.pkl", "wb") as f:
    pickle.dump(best_model, f)
```

- Support Vector Classifier (SVC) is trained using GridSearchCV to identify the optimal hyperparameters for improved classification performance.
- The Flask application loads the trained SVM model and provides a web interface for users to input feature values and receive breast cancer predictions.

2) Web Application (app.py)

```
from flask import Flask, render_template, request, redirect, url_for, session
import pickle
app = Flask(__name__)
app.secret_key = "abcdefgh123456789"
users = {}
import pickle
with open("scaler.pkl", "rb") as f:
    scaler = pickle.load(f)
with open("SVM_model1.pkl", "rb") as f:
    model = pickle.load(f)
def check_password(stored_password, provided_password):
    return stored_password == provided_password

@app.route("/")
def login():
    if 'email' in session:
        return redirect(url_for('home'))
    return render_template("login.html")

@app.route("/register", methods=["GET", "POST"])
def register():
    if request.method == "POST":
        username = request.form["username"]
        email = request.form["email"]
        password = request.form["password"]
        if email in users:
            return redirect(url_for('register'))
        users[email] = {'username': username, 'password': password}
        return redirect(url_for('login'))
    return render_template("register.html")

@app.route("/login", methods=["POST"])
```

```

def login_post():
    email = request.form["email"]
    password = request.form["password"]
    if email in users and check_password(users[email]['password'], password):
        session['email'] = email
        return redirect(url_for('home'))
    return redirect(url_for('login'))

@app.route("/logout")
def logout():
    session.pop('email', None)
    return redirect(url_for('login'))

@app.route("/home")
def home():
    if 'email' not in session:
        return redirect(url_for('login'))
    return render_template("home.html")

@app.route("/input", methods=["GET", "POST"])
def input():
    if "email" not in session:
        return redirect(url_for("login"))
    if request.method == "POST":
        try:
            data = [
                float(request.form["radius"]),
                float(request.form["texture_mean"]),
                float(request.form["perimeter_mean"]),
                float(request.form["area_mean"]),
                float(request.form["smoothness_mean"]),
                float(request.form["concavity_mean"]),
                float(request.form["concave_points_mean"]),
                float(request.form["symmetry_mean"]),

```

```

        float(request.form["fractal_dimension_mean"])
    ]]

    data_scaled = scaler.transform(data)
    prediction = model.predict(data_scaled)[0]
    confidence = None
    if hasattr(model, "predict_proba"):
        confidence = round(
            max(model.predict_proba(data_scaled)[0]) * 100,
            2
        )
    result = "Benign (B)" if prediction == 0 else "Malignant (M)"
    print("Input :", data)
    print("Scaled:", data_scaled)
    print("Prediction:", prediction)
    print("Result:", result)

    return render_template(
        "result.html",
        result=result,
        data=int(prediction),
        confidence=confidence
    )

except Exception as e:
    return f"Prediction Error: {e}"
return render_template("input.html")

@app.route("/performance")
def performance():
    if 'email' not in session:
        return redirect(url_for('login'))
    metrics = {
        'accuracy': 98.2,

```

```

        'precision': 100,
        'recall': 95.3,
        'f1_score': 97.6
    }
    return render_template("performance.html", metrics=metrics)

@app.route("/charts")
def charts():
    if 'email' not in session:
        return redirect(url_for('login'))
    return render_template("charts.html")

if __name__ == '__main__':
    app.run(debug=True)

```

CHAPTER 7

SNAPSHOTS

General:

SNAPSHOTS

```
Terminal Commands

(base) C:\Users\karna>activate breastfix

(breastfix) C:\Users\karna>cd C:\Users\karna\OneDrive\Desktop\ML16\CODE

(breastfix) C:\Users\karna\OneDrive\Desktop\ML16\CODE>python app.py

* Serving Flask app 'app'
* Debug mode: on
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
```

Figure 1: Terminal commands used to activate the virtual environment and launch the Flask application.

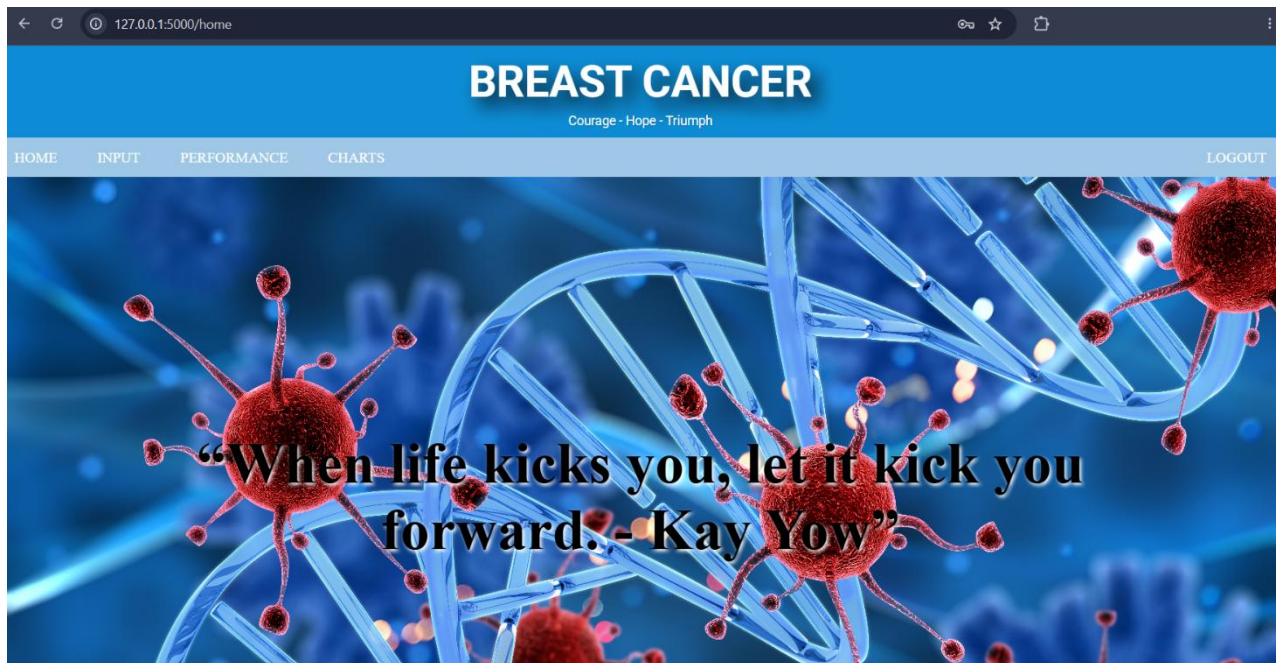


Figure 2: Home page of the Breast Cancer Prediction web application.

BREAST CANCER
Courage - Hope - Triumph

HOME INPUT PERFORMANCE CHARTS LOGOUT

Radius Mean	Concavity Mean
89	45
Texture Mean	Concave Points Mean
10.38	0.02076
Perimeter Mean	Symmetry Mean
88.05	0.2303
Area Mean	Fractal Dimension Mean
273.9	0.07
Smoothness Mean	
0.09779	

SUBMIT

Figure 3: Input interface for entering patient diagnostic parameters to predict breast cancer classification.

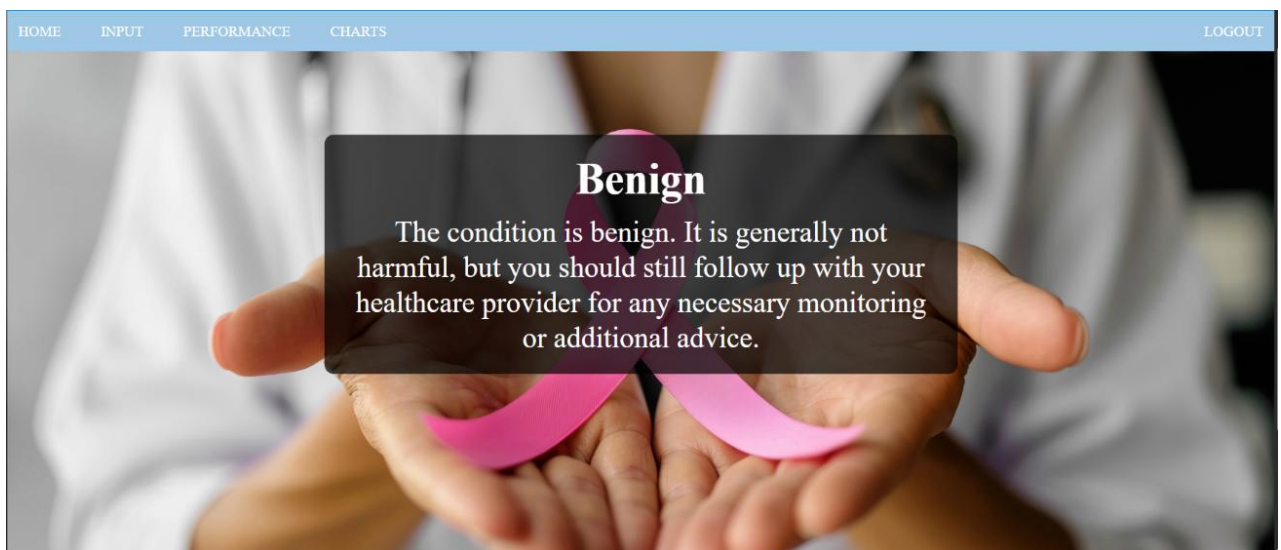


Figure 4: Prediction page displaying the Benign classification result.

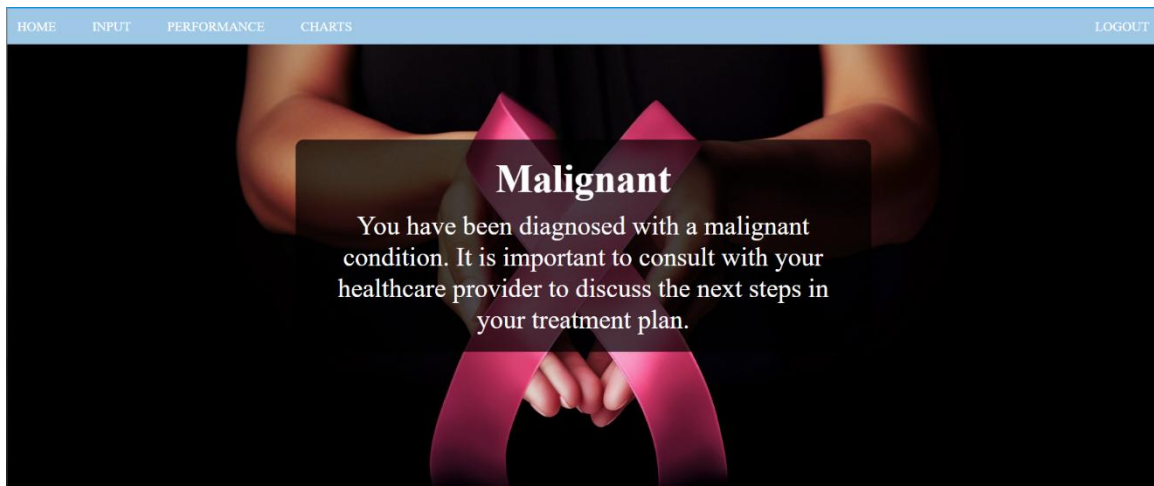


Figure 5: Prediction page displaying the Malignant classification result.

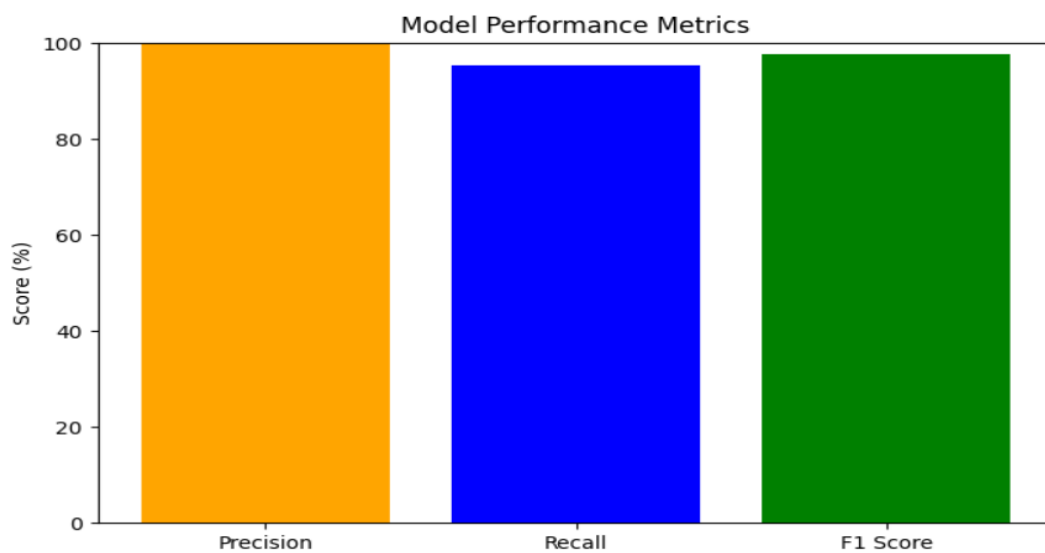


Figure 6: Performance metrics of the proposed SVM model.

CHAPTER 8

SOFTWARE TESTING

8.1 GENERAL

The purpose of testing is to discover errors. Testing is the process of trying to discover every conceivable fault or weakness in a work product. It provides a way to check the functionality of components, sub-assemblies, assemblies and/or a finished product. It is the process of exercising software with the intent of ensuring that the Software system meets its requirements and user expectations and does not fail in an unacceptable manner. There are various types of test. Each test type addresses a specific testing requirement.

8.2 DEVELOPING METHODOLOGIES

The test process is initiated by developing a comprehensive plan to test the general functionality and special features on a variety of platform combinations. Strict quality control procedures are used. The process verifies that the application meets the requirements specified in the system requirements document and is bug free. The following are the considerations used to develop the framework from developing the testing methodologies.

8.3 Types of Tests

8.3.1 Unit testing

Unit testing involves the design of test cases that validate that the internal program logic is functioning properly, and that program input produces valid outputs. All decision branches and internal code flow should be validated. It is the testing of individual software units of the application. It is done after the completion of an individual unit before integration. This is a structural testing, that relies on knowledge of its construction and is invasive. Unit tests perform basic tests at component level and test a specific business process, application, and/or system configuration. Unit tests ensure that each unique path of a business process performs accurately to the documented specifications and contains clearly defined inputs and expected results.

8.3.2 Functional test

Functional tests provide systematic demonstrations that functions tested are available as specified by the business and technical requirements, system documentation, and user manuals.

Functional testing is centered on the following items:

- Valid Input : identified classes of valid input must be accepted.
- Invalid Input : identified classes of invalid input must be rejected.
- Functions : identified functions must be exercised.
- Output : identified classes of application outputs must be exercised.
- Systems/Procedures : interfacing systems or procedures must be invoked.

8.3.3 System Test

System testing ensures that the entire integrated software system meets requirements. It tests a configuration to ensure known and predictable results. An example of system testing is the configuration-oriented system integration test. System testing is based on process descriptions and flows, emphasizing pre-driven process links and integration points.

8.3.4 Performance Test

The Performance test ensures that the output be produced within the time limits, and the time taken by the system for compiling, giving response to the users and request being send to the system for to retrieve the results.

8.3.5 Integration Testing

Software integration testing is the incremental integration testing of two or more integrated software components on a single platform to produce failures caused by interface defects.

The task of the integration test is to check that components or software applications, e.g. components in a software system or – one step up – software applications at the company level – interact without error.

8.3.6 Acceptance Testing

User Acceptance Testing is a critical phase of any project and requires significant participation by the end user. It also ensures that the system meets the functional requirements.

Acceptance testing for Data Synchronization:

- The Acknowledgements will be received by the Sender Node after the Packets are received by the Destination Node
- The Route add operation is done only when there is a Route request in need
- The Status of Nodes information is done automatically in the Cache Updation process

8.3.7 Build the test plan

Any project can be divided into units that can be further performed for detailed processing. Then a testing strategy for each of this unit is carried out. Unit testing helps to identify the possible bugs in the individual component, so the component that has bugs can be identified and can be rectified from errors.

CHAPTER 9

FUTURE ENHANCEMENT

9.1 FUTURE ENHANCEMENTS:

For future enhancements of the breast cancer classification system, several key improvements can be made to further optimize its performance and adaptability. One potential direction is the integration of deep learning models, such as Convolutional Neural Networks (CNNs), which are highly effective in extracting hierarchical features from complex data, particularly in image or multi-dimensional datasets (LeCun et al., 2015). These models can potentially outperform traditional classifiers like SVC by learning more intricate patterns from the data.

Additionally, addressing the common issue of class imbalance in medical datasets can be improved through techniques like Synthetic Minority Over-sampling Technique (SMOTE) or class weighting in the SVC model, ensuring the model does not favor the majority class and improving detection accuracy for the minority class (Chawla et al., 2002). Furthermore, enhancing feature selection and engineering can contribute to better model performance. Methods such as Recursive Feature Elimination (RFE) and Principal Component Analysis (PCA) could be applied to reduce dimensionality and retain the most relevant features, which would simplify the model while maintaining its predictive power.

Lastly, exploring ensemble learning methods, such as stacking or boosting, could combine the strengths of multiple classifiers to create a more robust model, improving both accuracy and generalization. These future enhancements could significantly boost the model's ability to detect breast cancer more reliably, particularly in complex or unbalanced datasets.

CHAPTER 10

CONCLUSION AND REFERENCES

10.1 CONCLUSION

In conclusion, the proposed Support Vector Classifier (SVC) algorithm for breast cancer classification offers a robust method for distinguishing between benign and malignant tumors, leveraging powerful machine learning techniques. By employing GridSearchCV for hyperparameter optimization and 5-fold cross-validation for model evaluation, the system ensures high accuracy and generalization ability. This approach can effectively handle complex datasets, providing reliable predictions in medical diagnostics. However, future enhancements such as the integration of deep learning models, techniques to manage class imbalance, and improvements in feature selection and ensemble learning could further boost the model's performance, making it more adaptable and accurate in detecting breast cancer. These enhancements would pave the way for even more effective early diagnosis and decision-making support in clinical settings, ultimately contributing to better patient outcomes.

10.2 REFERENCES

- [1] Breast Cancer Statistics, NBCC, 2022.
- [2] B. He, H. Sun, M. Bao, H. Li, J. He, G. Tian, and B. Wang, “A crosscohort computational framework to trace tumor tissue-of-origin based onRNA sequencing,” *Sci. Rep.*, vol. 13, no. 1, p. 15356, Sep. 2023.
- [3] W. Wang, R. Jiang, N. Cui, Q. Li, F. Yuan, and Z. Xiao, “Semi-supervisedvision transformer with adaptive token sampling for breast cancer classification,” *Frontiers Pharmacol.*, vol. 13, Jul. 2022, Art. no. 929755.
- [4] S. Chen, Y. Chen, L. Yu, and X. Hu, “Overexpression of SOCS4 inhibits proliferation and migration of cervical cancer cells by regulating JAK1/STAT3 signaling pathway,” *Eur. J. Gynaecol. Oncol.*, vol. 42, no. 3, pp. 554–560, 2021.
- [5] I. A. for Research on Cancer, W. H. Organization, *Globocan 2012: Cervical Cancer-Estimated Incidence, Mortality and Prevalence Worldwide in 2012*, 2018.
- [6] Z.-R. Jiang, L.-H. Yang, L.-Z. Jin, L.-M. Yi, P.-P. Bing, J. Zhou, and J.-S. Yang, “Identification of novel cuproptosis-related lncRNA signatures to predict the prognosis and immune microenvironment of breast cancer patients,” *Frontiers Oncol.*, vol. 12, Sep. 2022, Art. no. 988680.
- [7] N. Kumar Sinha, “Developing a web based system for breast cancer prediction using XGboost classifier,” *Int. J. Eng. Res.*, vol. V9, no. 6, pp. 852–856, Jun. 2020.
- [8] M. Umer, M. Naveed, F. Alrowais, A. Ishaq, A. A. Hejaili, S. Alsubai, A. A. Eshmawi, A. Mohamed, and I. Ashraf, “Breast cancer detection using convoluted features and ensemble machine learning algorithm,” *Cancers*, vol. 14, no. 23, p. 6015, Dec. 2022.
- [9] B. He, Y. Zhang, Z. Zhou, B. Wang, Y. Liang, J. Lang, H. Lin, P. Bing, L. Yu, D. Sun, H. Luo, J. Yang, and G. Tian, “A neural network framework for predicting the tissue-of-origin of 15 common cancer types based on RNA-Seq data,” *Frontiers Bioeng. Biotechnol.*, vol. 8, p. 737, Aug. 2020.
- [10] S. A. Yazdan, R. Ahmad, N. Iqbal, A. Rizwan, A. N. Khan, and D.-H. Kim, “An efficient multi-scale convolutional neural network based multi-class brain MRI classification for SaMD,” *Tomography*, vol. 8, no. 4, pp. 1905–1927, Jul. 2022.

- [11] Imran, N. Iqbal, S. Ahmad, and D. H. Kim, “Health monitoring system for elderly patients using intelligent task mapping mechanism in closed loop healthcare environment,” *Symmetry*, vol. 13, no. 2, p. 357, Feb. 2021.
- [12] J. Zhang, Q. Shen, Y. Ma, L. Liu, W. Jia, L. Chen, and J. Xie, “Calcium homeostasis in Parkinson’s disease: From pathology to treatment,” *Neurosci. Bull.*, vol. 38, no. 10, pp. 1267–1270, Oct. 2022.
- [13] S. Kapoor and A. Narayanan, “Leakage and the reproducibility crisis in machine-learning-based science,” *Patterns*, vol. 4, no. 9, Sep. 2023, Art. no. 100804.
- [14] Y. Li, “Performance evaluation of machine learning methods for breast cancer prediction,” *Appl. Comput. Math.*, vol. 7, no. 4, pp. 212–216, 2018.
- [15] B. He, C. Dai, J. Lang, P. Bing, G. Tian, B. Wang, and J. Yang, “A machine learning framework to trace tumor tissue-of-origin of 13 types of cancer based on DNA somatic mutation,” *Biochim. et Biophys. Acta (BBA)-Mol. Basis of Disease*, vol. 1866, no. 11, 2020, Art. no. 165916.
- [16] A. Bharat, N. Pooja, and R. A. Reddy, “Using machine learning algorithms for breast cancer risk prediction and diagnosis,” in *Proc. 3rd Int. Conf. Circuits, Control, Commun. Comput. (I4C)*, Oct. 2018, pp. 1–4.
- [17] K. Jain and M. S. Sharma, “Breast cancer diagnosis using machine learning techniques,” *Int. J. Innov. Sci., Eng. Technol.*, vol. 5, no. 5, 2018.
- [18] A. S. Elkorany, M. Marey, K. M. Almustafa, and Z. F. Elsharkawy, “Breast cancer diagnosis using support vector machines optimized by whale optimization and dragonfly algorithms,” *IEEE Access*, vol. 10, pp. 69688–69699, 2022.
- [19] L. Liu, “Research on logistic regression algorithm of breast cancer diagnose data by machine learning,” in *Proc. Int. Conf. Robots Intell. Syst. (ICRIS)*, May 2018, pp. 157–160.
- [20] V. Amudha, R. G. Babu, K. Arunkumar, and A. Karunakaran, “Machine learning-based Performance comparison of breast cancer detection using support vector machine,” in *Proc. AIP Conf.*, vol. 2519, no. 1, 2022, Art. no. 050011.
- [21] E. Halim, P. P. Halim, and M. Hebrard, “Artificial intelligent models for breast cancer early detection,” in *Proc. Int. Conf. Inf. Manage. Technol. (ICIMTech)*, Sep. 2018, pp. 517–521.

- [22] B. S. Abunasser, M. R. J. Al-Hiealy, I. S. Zaqout, and S. S. Abu-Naser, “Breast cancer detection and classification using deep learning Xception algorithm,” *Breast Cancer*, vol. 13, no. 7, 2022.
- [23] D. Albashish, “Ensemble of adapted convolutional neural networks (CNN) methods for classifying colon histopathological images,” *PeerJ Comput. Sci.*, vol. 8, p. e1031, Jul. 2022.
- [24] M. Dabass, S. Vashisth, and R. Vig, “A convolution neural network with multi-level convolutional and attention learning for classification of cancer grades and tissue structures in colon histopathological images,” *Comput. Biol. Med.*, vol. 147, Aug. 2022, Art. no. 105680.
- [25] P. Goyal, S. Sehgal, S. Ghosh, D. Aggarwal, P. Shukla, A. Kumar, R. Gupta, and S. Singh, “Histopathological correlation of atypical (C3) and suspicious (C4) categories in fine needle aspiration cytology of the breast,” *Int. J. Breast Cancer*, vol. 2013, Sep. 2013, Art. no. 965498.