1. Document description

This document is mainly used for the face machine middleware HTTP interface docking, suitable for system development and maintenance personnel.

1.1 Server preparation

1. **Port 10010,10011,8190 is required**
2. **Support for windows and Linux systems**
3. Install Java, run environment JDK 1.8

1.2 Service startup

1. **windows System needs to modify the start t. The jdk path of the bat file, like: set JAVA _ EXE = D: "Program Files" \ Java \ jre 8 \ bin \ java**

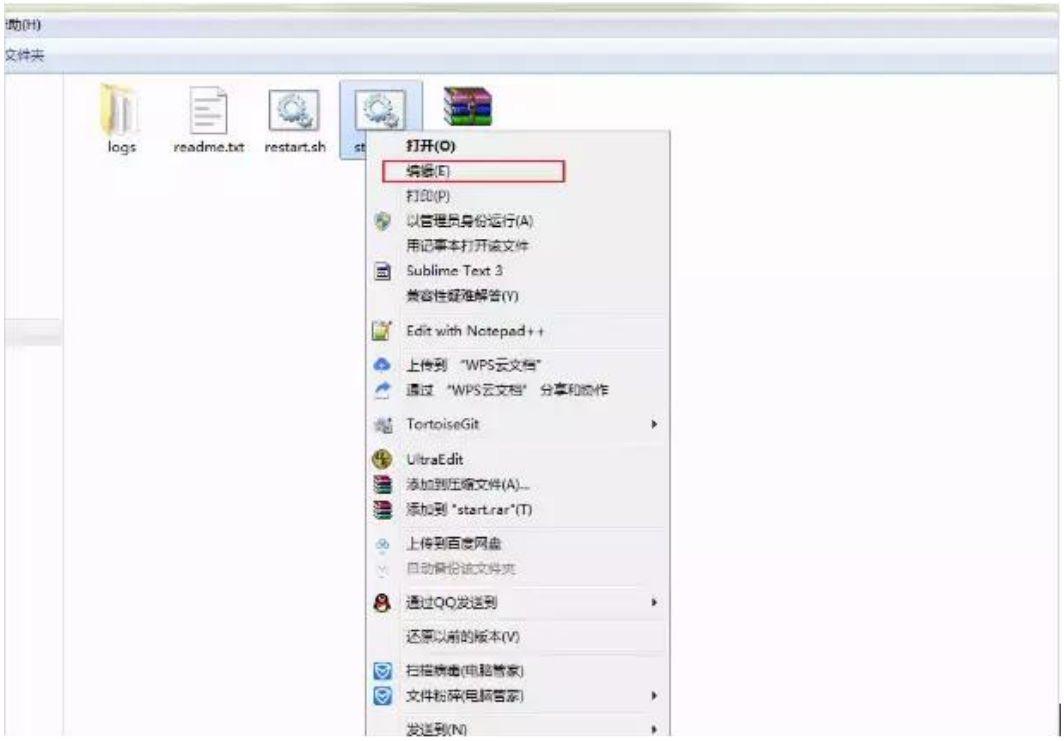

```
@echo off
echo [Pre-Requirement] Makesure install JDK 8.0+ and set the JRE_HOME.

set JAVA_EXE=D:\Java\jdk1.8.0_102\jre\bin\java
set JAVA_OPTS=%JAVA_OPTS% -server -Xmx2g -XX:MetaspaceSize=128m -Dfile.encoding=UTF-8
set SERVER_NAME=tdx-face-sdk-server_release.jar

echo [Step] start application.
echo "%JAVA_EXE% %JAVA_OPTS% -jar %SERVER_NAME%"
start "TdxFaceSdkServer" %JAVA_EXE% %JAVA_OPTS% -Dlogging.file=logs\stdout.%date:~0,4%
%date:~5,2%%date:~8,2%.log -jar %SERVER_NAME%
if errorlevel 1 goto error

echo [INFO] Please wait a moment. When you see "[INFO] Started TdxFaceSdkServerApplication
in xxx seconds" in console, you can access below api:
echo [INFO] http://localhost:8190/api/xxx

goto end
:error
echo Error Happen!!
:end
pause
```

修改为本机JDK路径

2. Double click to run start. Bat, the popup below indicates that the middleware runs successfully, close the popup middleware service is closed

```
ationThreshold: -1
1:55:54.253 [cached-pool-2-thread-0] DEBUG io.netty.util.internal.CleanerJava6 - java.nio.ByteBuffer.cleaner(): availab
e
1:55:54.255 [cached-pool-2-thread-0] DEBUG io.netty.util.internal.PlatformDependent - -Dio.netty.noPreferDirect: false
1:55:54.279 [cached-pool-2-thread-0] DEBUG io.netty.util.internal.PlatformDependent - org.jctools-core.MpscChunkedArray
Queue: available

  .   ____          _            __ _ _
 /\\ / ___'_ __ _ _(_)_ __  __ _ \ \ \ \
( ( )\___ | '_ | '_| | '_ \/ _` | \ \ \ \
 \\/  ___)| |_)| | | | | || (_| |  ) ) ) )
  '  |____| .__|_| |_|_| |_\__, | / / / /
 =========|_|==============|___/=/_/_/_/
 :: Spring Boot ::        (v2.3.0.RELEASE)

2023-03-25 11:55:55.141 [GW-SERVER-BOSS-0] INFO  io.netty.handler.logging.LoggingHandler - [id: 0xc8ace681] REGISTERED
2023-03-25 11:55:55.143 [SDK-SERVER-BOSS-0] INFO  io.netty.handler.logging.LoggingHandler - [id: 0x6af74868] REGISTERED

2023-03-25 11:55:55.164 [GW-SERVER-BOSS-0] INFO  io.netty.handler.logging.LoggingHandler - [id: 0xc8ace681] BIND: 0.0.0.
0/0.0.0.0:10010
2023-03-25 11:55:55.165 [SDK-SERVER-BOSS-0] INFO  io.netty.handler.logging.LoggingHandler - [id: 0x6af74868] BIND: 0.0.0
.0/0.0.0.0:10011
2023-03-25 11:55:55.193 [SDK-SERVER-BOSS-0] INFO  io.netty.handler.logging.LoggingHandler - [id: 0x6af74868, L:/0:0:0:0:
0:0:0:0:10011] ACTIVE
2023-03-25 11:55:55.209 [cached-pool-2-thread-1] INFO  com.tendcent.gateway.sdk.server.SdkServer - sdk 服务启动成功，端
口 = 10011
2023-03-25 11:55:55.210 [cached-pool-2-thread-0] INFO  com.tendcent.gateway.sdk.server.GwServer - gw 服务启动成功，端口
= 10010
```

1.3 Cloud configuration of devices

Before communicating with the cloud, the server should be configured in the Web interface of the face device.

Note: The web configuration must first run the face recognition App.

1. **Click the setting icon in the upper right corner of the device, enter the password background and click Login to enter the Settings page**

1. **Click to enter the Communication Settings to configure the server information**

1. **communications setting**

- **Turn on the server switch**
- **Connect the way to select the cloud**
- **The connection protocol selects the TCP**
- **The password itself is set in line with the following interface parameter secret**
- **Server IP Fill in the server IP for deploying the middleware**
- **The server side port is set to 10010**

2. interface specification

2.1 Interface specification

- **Interface syntax: http: / / {middleware server IP}: 8190 / api / {module} / {action}**
  - **{Middleware server IP}: The IP address of the requested middleware server**
  - **{module}: The module name**
  - **{action}: Interface name**
- **Interface form: to provide external services to HTTP by converting TCP**
- Character code: unified UTF-8 format
- **Request header: ContentType = application / x-www-form-urlencoded**
- Request method: Unified use of the POST method

2.2 Interface returns

The data returned by all interfaces, the interface return examples involved in the document, the return data of individual interfaces will be slightly adjusted, and the true return results shall prevail.

```
{
    "code": "000",     // 返回码，对照表见附录说明
    "msg": "请求成功",    // 返回信息
    "ts": 1679576928465, // 时间戳
    "data": null,       // 返回的数据对象
    "success": true     // 操作是否成功，成功为 true，失败为 false
}
```

field	description	type	Must pass	explain
code	return code	String	Y	Normal operation use a uniform return code, and each abnormal operation has a separate return code
msg	return information	String	Y	The information returned by the interface, usually try the error information
data	Return data	Int / String / Object /List	N	The interface returns data that may be a numeric, string, object, or collection
ts	return time	Long	Y	Unix millisecond-level timestamp (13-bit)
success	Execution results	boolean	Y	Whether the operation is successful, success is true, failure is false

2.3 Precautions

- When calling the device interface, do not call the interface of the same device on other client servers.
- If the call interface returns the parameter exception, follow these steps:
  - Check whether the parameter name is misspelled and whether there is space or return in the parameter name
  - Check whether the parameter value conforms to the specification, such as the Int value is not defined, the id contains illegal characters other than the number letters, etc
  - Whether there is a space in Json (using the Json string returned directly by the interface needs to go to the space), whether there is more or less " symbols, please carefully check the postman example of each interface
- If the call interface returns empty, indicating an url error (IP error, spelling error, field omission, etc.)

- If the call interface returns Could not get any response, the possible reasons are: IP address error, port number error or omission, transmission form error, etc.

2.4 Scope of application

This document is applicable to:

- Version number: V2.00.0.X and higher Android devices.

The X in the version number indicates any arbitrary number

3. Device management interface

3.1 Obtain the equipment information

Description: Get the device information of the face machine.

Method	URL
GET / POST	http: / / middleware server IP: 8190 / api / device / get

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device

Postman instance

Return an example

```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679624594176,
    "data": {
        "channel": "01DA0",
        "cpu": "[armeabi-v7a, armeabi]", //CPU 架构
        "deviceKey": "15E5754C846279A4", //设备序列号
        "faceAlgorithmVersion": "V3.8.2", //算法版本
        "firmwareVersion": "rk3288-userdebug 7.1.2 NHG47K eng.silence.20211221.163026 test-keys",
//固件版本
        "manufacturer": "mb_ys_3288",
        "os": "Android", //系统
        "osVersion": "7.1.2", //系统版本
        "ram": "1536798720/2093146112", //内存大小
        "rom": "4065255424/5207228416", //硬盘空间
        "versionCode": 20000, //版本号
        "wanMac": "30:1f:9a:87:f1:95", //wan 口的 mac 地址
        "wifiMac": "70:f7:54:23:59:ce" //wifi 的 mac 地址
    },
    "success": true
}
```


3.2 Equipment reboot

Note: Restart the face recognition device.

Method	URL
POST	http: / / middleware server IP: 8190 / api / device / reboot

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device

Postman instance

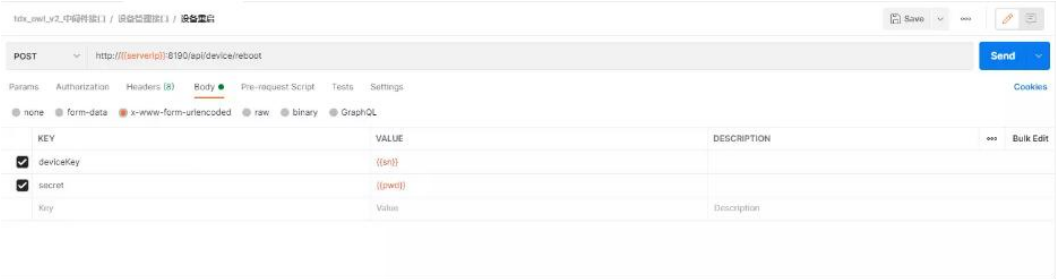

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679624962917,
  "data": null,
  "success": true
}
```

Code code description

code a sign or object indicating number	msg
100201	Device restart failed without ROOT

3.3 Equipment reset

Note: Reset the face recognition device.

Method	URL
POST	The http: / / middleware server IP: 8190 / api / device / reset

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
secret	password	String	Y	● Server password set in the communication settings on the face device

deviceKey	Device serial number	String	Y	● Device Serial number, 16-bit
type	Device reset type	Int	Y	Device reset type, reset the information of the corresponding type on the device, and it cannot be recovered after reset ● 1: All of the data ● 2: Personnel registration information ● 3: Photo information ● 4: Personnel characteristic information ● 5: Identification records

Postman instance

Return an example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679624962917,
    "data": null,
    "success": true
}
```


3.4 Equipment configuration

Description: Configure the recognition parameters, recognition mode parameters, peripheral parameters, UI display parameters and server parameters of the machine. When interface calling, if the corresponding parameters are not filled, use the system default parameters to set.

Method	URL
POST	http: / / middleware server IP: 8190 / api / device / setConfig

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
secret	password	String	Y	Server password set in the communication settings on the face device
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
recThreshold1vN	The 1 vN face recognition threshold	Int	N	Default of 65. Please input an integer between 50 and 100, the higher the score, the higher the recognition accuracy, but the recognition speed will be slower.
recThreshold1v1	1v1 face recognition threshold	Int	N	ditto
recInterval	Identify interval time	Int	N	Default 3 seconds. Identification interval (the interval between the callback notification interface after the same person).
recDistance	Identify distance	Int	N	Identify distance: ● 0: Unlimited (by default) ● Within 1:0.5 m ● Within 2:1 m ● 3: within 1.5 meters ● Within 4:2 meters ● Within 5:3 meters ● Within 6:4 meters
recRank	Identify the living level	Int	N	Identify living levels: ● 1. No in-vivo test (by default) ● 2. Monocular living animals ● 3. Double eyes of the live body
recSucTtsMode	speech pattern	Int	N	speech pattern: ● 1. Do not broadcast the voice message ● 2. Name Report (by default) ● 100. Customize the voice broadcast

recSucTtsCustom	Voice self-determined content	String	N	Voice self-determined content ● *Default {name}* ● If recSucTtsMode is 100, this field is mandatory and cannot be empty ● Allow the {name}. Fixed field format, other content is allowed only for numbers, English and Chinese characters, ● The length is limited to 255 characters. Such as: {name} welcome to visit
recSucDisplayMode	Display mode	Int	N	Display mode ● 1: Name (default) ● 2: Do not display the content ● 100: Custom display
recSucDisplayCustom	Displays the custom content	Int	N	Displays the custom content ● *Default {name}* ● If recSucDisplayMode is 100, this field is mandatory and cannot be empty ● Allow the {name}. The field format is fixed, only numbers, English and Chinese symbols are allowed, and the length is limited to 255 characters. Such as: {name}, check-in successfully!
recStrangerEnable	Identify the stranger switch	Int	N	Identify the stranger switch: ● 0. Do not identify strangers ● 1. Identify strangers (by default)
recIsStrangerTimes	Number of identification failure decisions	Int	N	How many times do you fail to identify yourself as a stranger. Default 2 times
recStrangerTtsMode	Stranger voice mode	Int	N	Stranger voice mode ● 1: No voice broadcast (default) ● 2: Voice broadcast "personnel are not registered, please contact the administrator" ● 100: Customize strangers' voice sounds
recStrangerTtsCustom	Voice broadcast custom content	String	N	Voice broadcast custom content, ● *If recStrangerTtsMode is 100, this field is mandatory and cannot be empty* ● Content is only allowed for numbers, English, and Chinese characters, and the length is limited to 255 characters. Pay attention to strangers

recStrangerDisplayMode	The stranger screen displays the text type	Int	N	The stranger screen displays the text type ● 1. Personnel are not registered (by default) ● 100. To customize it
recStrangerDisplayCustom	The stranger screen displays the text content	String	N	The stranger screen displays text custom content ● *If recStrangerDisplayMode is 100, this field is mandatory and cannot be empty* ● The content only allows digital, Chinese and Chinese symbols, and the length is limited to 255 characters. Such as: the personnel are not registered!
recNotBioTtsMode	Non-live speech mode	Int	N	Non-live speech mode ● 1: No voice broadcast (default) ● 2: Voice broadcast "Do not try photos or video for recognition" ● 100: Custom non-live speech
recNotBioTtsCustom	Voice broadcast custom content	String	N	Voice broadcast custom content, ● If recNotBioTtsMode is 100, this field is mandatory and cannot be empty ● Content is only allowed for numbers, English, and Chinese characters, and the length is limited to 255 characters. For example: do not try out photos or videos for identification
recNotBioDisplayMode	Non-live screen display text type	Int	N	Non-live screen display text type ● 1: Do not try out photos or video for identification (default) ● 100: Customize
recNotBioDisplayCustom	Non-live screen displays text content	String	N	Non-live screen displays text custom content ● *If recNotBioDisplayMode is 100, this field is mandatory and cannot be empty* ● The content only allows digital, Chinese and Chinese symbols, and the length is limited to 255 characters. For example: do not try out photos or videos for identification!

recNoPerTtsMode	Insufficient permission for voice mode	Int	N	Insufficient permission for voice mode ● 1: Do not broadcast the voice message ● 2: Voice broadcast "insufficient permission, please contact the administrator" (default) ● 100: Custom permission is insufficient voice
recNoPerTtsCustom	Voice broadcast custom content	String	N	Voice broadcast custom content ● If recNoPerTtsMode is 100, this field is mandatory and cannot be empty ● Content is only allowed for numbers, English, and Chinese characters, and the length is limited to 255 characters. If the permission is insufficient, please contact the administrator
recNoPerDisplayMode	Insufficient permission is required on the screen to display the text type	Int	N	Insufficient permission is required on the screen to display the text type ● 1 Insufficient privileges, please contact the administrator (default) ● 100, and was custom-defined
recNoPerDisplayCustom	Insufficient permission is required on the screen to display the text content	String	N	Insufficient permission screen to display text custom content ● *If recNoPerDisplayMode is 100, this field is mandatory and cannot be empty* ● The content only allows digital, Chinese and Chinese symbols, and the length is limited to 255 characters. If: insufficient authority, please contact the administrator!
recStrangerOpenDoor	Identify whether the stranger opens the door	Int	N	Identify whether the stranger opens the door ● 0: Door is not open (default) ● 1: Open the door
recMultiplayer	Identify many people	Int	N	Identify many people ● 0: Single-person identification (by default) ● 1: Multiplayer identification
recSnapshotSave	Identify the snap snap	Int	N	Identify the snap snap ● 0: Not saved ● 1: Save (by default)

recRecordSave	Identify save records	Int	N	Identify save records ● 0: Not saved ● 1: Save (by default)
recRecordSaveDays	Identify the record holding days	Int	N	Identify the number of days saved to default for 7 days
recRecordUploadMode	Identify the record upload mode	Int	N	Identify the record upload mode ● 1: Real-time upload (by default) ● 2: Break the point of continued transmission
recWhitelistIdcard	Witness comparison whitelist switch	Int	N	Witness comparison whitelist switch ● 0: off (default), read the ID card directly after the human card comparison process ● 1: open, read the ID number and the ID number of all the personnel in the database, if any; if not, the prompt authority is insufficient
recModeFaceEnable	Face brush mode switch	Int	N	Face brush mode switch ● 0: Close ● 1: On (by default)
recModeCardEnable	Card swiping mode switch	Int	N	Card swiping mode switch ● 0: Close ● 1: On (by default)
recModeCardIntf	Card number transmission interface	Int	N	Card number transmission interface ● 1: egen (default) ● 2: TTL serial port ● 3 : USB
recModeCardIntfPort	Card number transfer serial port number	Int	N	Card number The port number of the transmission serial port *This field takes effect when the transfer interface recModeCardIntf is configured as a serial port* ● 1 : ttyS1 ● 2 : ttyS2 ● 3: ttyS3 (by default) ● 4 : ttyS4 ● 100: Customize

recModeCardIntfPortCustom	Custom card number transfer interface port number	String	N	Customize the card number and define the port number of the transfer interface ● *This field takes effect when the transfer interface port recModeCardIntfPort is configured to 100*
recModeCardIntfBaudrate	Card number transmission serial port port rate	Int	N	The card number transmits the port rate of the serial port *This field takes effect when the transfer interface recModeCardIntf is configured as a serial port* ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4:115200 (by default)
recModeIdcardEnable	Certificate comparison switch	Int	N	Certificate comparison switch ● 0: Off (by default) ● 1: Open
recModeIdcardIntf	ID card module transmission interface	Int	N	ID card module transmission interface ● 1: TTL serial port ● 2:232 serial port ● 3: USB (by default)
recModeIdcardIntfPort	ID card transmission serial port port number	Int	N	Port number of the id card transmission serial port This field takes effect when the ID card transmission interface is configured as a serial port ● 1 : ttyS1 ● 2: ttyS2 (by default) ● 3 : ttyS3 ● 4 : ttyS4 ● 100: Customize
recModeIdcardIntfPortCustom	Customize the ID card transmission interface port number	String	N	Customize the port number of the ID card transmission interface *This field takes effect when the ID transport interface port recModeIdcardIntfPort is configured to 100*

recModeIdcardIntfBaudrate	ID card transmission serial port port rate	Int	N	Baud rate of the ID card transmission serial port This field takes effect when the ID card transmission interface is configured as a serial port ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4:115200 (by default)
recModeQrcodeEnable	Brush the QR code mode switch	Int	N	Brush the QR code mode switch ● 0: Off (by default) ● 1: Open
recModeQrcodeIntf	The QR code transmission interface	Int	N	The QR code transmission interface ● 1: TTL serial port (by default) ● 2:232 serial port ● 3 : USB
recModeQrcodeIntfPort	QR code transmission serial port port number	Int	N	Port number of the QR code transmission serial port *This field takes effect when the recModeQrcodeIntf is configured as a serial port* ● 1 : ttyS1 ● 2: ttyS2 (by default) ● 3 : ttyS3 ● 4 : ttyS4 ● 100: Customize
recModeQrcodeIntfPortCustom	Customize the QR code transmission interface port number	String	N	Customize the port number of the QR code transmission interface *This field takes effect when the QR code transmission interface port recModeQrcodeIntfPort is configured to 100*
recModeQrcodeIntfBaudrate	QR code transmission serial port port rate	Int	N	The port rate of the QR code transmission serial port *This field takes effect when the recModeQrcodeIntfPort is configured as a serial port* ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4:115200 (by default)

recModePalmEnable	Palm print recognition switch	Int	N	Palm print recognition switch ● 0: Off (by default) ● 1: Open
recModeFingerEnable	Fingerprint recognition switch	Int	N	Fingerprint recognition switch ● 0: Off (by default) ● 1: Open
pciRelayOut	relay output	Int	N	relay output ● 0: Not open the door ● 1: Open the door (by default)
pciRelayMode	Relay mode	Int	N	Relay mode ● 1: Open often ● 2: Often closed
pciRelayDelay	Relay control time	Int	N	Relay control time ● 1,000-ms (by default) ● Relay controls the time interval between opening and closing, with the default 1000ms. Please enter an integer between 100 and 25500 and take the hundred down. For example: input an integer between 101 and 199, the actual effect is 100ms.
pciWgType	Weigen type	Int	N	Weigen type ● 1: ergen 26 (default) ● 2: Weigen-34 ● 1-3: Weigen-37
pciWgOut	Weigen output type	Int	N	Weigen output type ● 0: No output (default) ● 1: Output the personnel id ● 2: Output the card number ● 100: Customize
pciWgOutCustom	Weigen outputs the custom content	String	N	Weigen outputs the custom content This field takes effect when the root output type pciWgOut is configured to 100

pciComOut	Serial port output type	Int	N	Serial port output type ● 0: No output (default) ● 1: Output the personnel id ● 2: Output the card number ● 3: Output the ID card ● 100: Customize
pciComOutCustom	Serial port output custom content	String	N	Serial port output custom content This field takes effect when the serial port output type pciComOut is configured to be 100
pciComOutPort	Serial port output port	Int	N	Serial port output port ● 1 : ttyS1 ● 2 : ttyS2 ● 3 : ttyS3 ● 4 : ttyS4 ● 100: Customize
pciComOutPortCustom	Serial port output port customization	String	N	Serial port output port customization This field takes effect when the serial port output port pciComOutPort is configured to 100
pciComOutBaudrate	Serial output port rate	Int	N	Serial output port rate ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4:115200 (by default)
pciLedAlwaysEnable	The light is often bright	Int	N	The light is often bright ● 0: Not always bright (default) ● 1: Often bright
pciLedColorStranger	Color of light color (stranger)	Int	N	Color of light color (stranger) ● 1: Red light (default) ● 2: Green light
uiCompanyName	The interface displays the name of the company	String	N	Whether the apk main interface shows the middleware server IP ● 0: Hidden ● 1: Display (by default)

uiShowSn	The main interface displays the device serial number	Int	N	Whether the apk main interface displays the device serial number ● 0: Hidden ● 1: Display (by default)
uiShowIp	Whether the main interface shows the middleware server IP	Int	N	Whether the apk main interface shows the middleware server IP ● 0: Hidden ● 1: Display (by default)
uiShowPersonCount	Whether the main interface displays the number of people	Int	N	Whether the apk main interface displays the number of people ● 0: Hidden ● 1: Display (by default)
uiScreensaverWait	Enter the screensaver for waiting time	Int	N	The apk goes into the screensaver for waiting time in seconds
sevUploadRecRecordUrl	To upload the url address of the identification record	String	N	
sevUploadDevHeartbeatUrl	To upload the url address of the device's heartbeat	String	N	
sevUploadDevHeartbeatInterval	Device heartbeat interval time	Int	N	Device heartbeat interval time, default 60,10-300
sevUploadRegPersonUrl	Upload the registry person data url address	String	N	
sevUploadRecStrangerDataEnable	Upload for identifying the stranger data switch	Int	N	Whether to upload the identification stranger data switch ● 0: No upload ● 1: Upload (by default)

sevUploadRecSnapshotEnable	Upload identification capture photo switch	Int	N	Whether to upload the switch to identify the scratch photo ● 0: No upload ● 1: Upload (by default)
sevUploadRecCardDataEnable	Upload the identification of the credit card data switch	Int	N	Whether to upload the data switch identifying identification card ● 0: No upload ● 1: Upload (by default)
sevUploadRecIdcardDataEnable	Upload the identification of the ID card data switch	Int	N	Whether to upload the identification ID card data switch ● 0: No upload ● 1: Upload (by default)
sevUploadRecQrcodeDataEnable	Upload and identify the QR code data switch	Int	N	Whether to upload the identification QR code data switch ● 0: Not upload (default) ● 1: Upload

Postman instance

Return an example

```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679625821375,
    "data": {
        "recModeQrcodeIntfPort": 2,
        "uiScreensaverWait": 60,
        "recModeIdcardIntfPort": 2,
        "sevUploadRecQrcodeDataEnable": 0,
        "uiShowSn": 1,
        "pciLedColorStranger": 1,
        "recModeIdcardIntf": 3,
        "recStrangerTtsMode": 1,
        "pciComOutBaudrate": 4,
        "pciRelayDelay": 1000,
        "pciComOut": 0,
        "recStrangerOpenDoor": 0,
        "recModePalmEnable": 0,
        "pciWgOut": 0,
        "pciWgType": 1,
        "recModeQrcodeIntf": 1,
        "recNoPerDisplayMode": 1,
        "pciRelayOut": 1,
        "recRank": 1,
        "recSucDisplayMode": 1,
        "sevUploadRecSnapshotEnable": 1,
        "sevUploadRecStrangerDataEnable": 1,
        "recSnapshotSave": 1,
        "recMultiplayer": 0,
        "recSucDisplayCustom": "{name}",
        "recModeIdcardIntfBaudrate": 4,
        "pciLedAlwaysEnable": 0,
        "sevUploadRecIdcardDataEnable": 1,
        "recRecordSaveDays": 7,
        "recNotBioDisplayMode": 1,
        "recStrangerEnable": 1,
        "recThreshold1v1": 60,
        "recModeQrcodeIntfBaudrate": 4,
        "recInterval": 3,
        "recIsStrangerTimes": 2,
        "recStrangerDisplayMode": 1,
        "uiShowIp": 1,
        "uiShowPersonCount": 1,
        "sevUploadDevHeartbeatInterval": 60,
        "pciRelayMode": 1,
        "recRecordSave": 1,
        "recModeCardEnable": 1,
        "recSucTtsMode": 2,
        "recModeFaceEnable": 1,
        "recRecordUploadMode": 1,
        "sevUploadRecCardDataEnable": 1,
        "recNotBioTtsMode": 1,
        "recWhitelistIdcard": 0,
        "recThreshold1vN": 50,
        "recDistance": 0,
        "recNoPerTtsMode": 2,
```

3.5 Identify the configuration

Description: Configure the recognition-related parameters of the face machine.
When interface calling, if the corresponding parameters are not filled, use the system default parameters to set.

Method	URL
POST	http: / / middleware server IP: 8190 / api / device / setRecConfig

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
secret	password	String	Y	Server password set in the communication settings on the face device
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
recThreshold1vN	The 1 vN face recognition threshold	Int	N	Default of 65. Please input an integer between 50 and 100, the higher the score, the higher the recognition accuracy, but the recognition speed will be slower.
recThreshold1v1	1v1 face recognition threshold	Int	N	ditto
recInterval	Identify interval time	Int	N	Default 3 seconds. Identification interval (the interval between the callback notification interface after the same person).
recDistance	Identify distance	Int	N	Identify distance: ● 0: Unlimited (by default) ● Within 1:0.5 m ● Within 2:1 m ● 3: within 1.5 meters ● Within 4:2 meters ● Within 5:3 meters ● Within 6:4 meters

recRank	Identify the living level	Int	N	Identify living levels: ● 1. No in-vivo test (by default) ● 2. Monocular living animals ● 3. Double eyes of the live body
recSucTtsMode	speech pattern	Int	N	speech pattern: ● 1. Do not broadcast the voice message ● 2. Name Report (by default) ● 100. Customize the voice broadcast
recSucTtsCustom	Voice self-determined content	String	N	Voice self-determined content ● *Default {name}* ● If recSucTtsMode is 100, this field is mandatory and cannot be empty ● Allow the {name}. Fixed field format, other content is allowed only for numbers, English and Chinese characters, ● The length is limited to 255 characters. Such as: {name} welcome to visit
recSucDisplayMode	Display mode	Int	N	Display mode ● 1: Name (default) ● 2: Do not display the content ● 100: Custom display
recSucDisplayCustom	Displays the custom content	Int	N	Displays the custom content ● *Default {name}* ● If recSucDisplayMode is 100, this field is mandatory and cannot be empty ● Allow the {name}. The field format is fixed, only numbers, English and Chinese symbols are allowed, and the length is limited to 255 characters. Such as: {name}, check-in successfully!
recStrangerEnable	Identify the stranger switch	Int	N	Identify the stranger switch: ● 0. Do not identify strangers ● 1. Identify strangers (by default)
recIsStrangerTimes	Number of identification failure decisions	Int	N	How many times do you fail to identify yourself as a stranger. Default 2 times

recStrangerTtsMode	Stranger voice mode	Int	N	Stranger voice mode ● 1: No voice broadcast (default) ● 2: Voice broadcast "personnel are not registered, please contact the administrator" ● 100: Customize strangers' voice sounds
recStrangerTtsCustom	Voice broadcast custom content	String	N	Voice broadcast custom content, ● *If recStrangerTtsMode is 100, this field is mandatory and cannot be empty* ● Content is only allowed for numbers, English, and Chinese characters, and the length is limited to 255 characters. Pay attention to strangers
recStrangerDisplayMode	The stranger screen displays the text type	Int	N	The stranger screen displays the text type ● 1. Personnel are not registered (by default) ● 100. To customize it
recStrangerDisplayCustom	The stranger screen displays the text content	String	N	The stranger screen displays text custom content ● *If recStrangerDisplayMode is 100, this field is mandatory and cannot be empty* ● The content only allows digital, Chinese and Chinese symbols, and the length is limited to 255 characters. Such as: the personnel are not registered!
recNotBioTtsMode	Non-live speech mode	Int	N	Non-live speech mode ● 1: No voice broadcast (default) ● 2: Voice broadcast "Do not try photos or video for recognition" ● 100: Custom non-live speech
recNotBioTtsCustom	Voice broadcast custom content	String	N	Voice broadcast custom content, ● If recNotBioTtsMode is 100, this field is mandatory and cannot be empty ● Content is only allowed for numbers, English, and Chinese characters, and the length is limited to 255 characters. For example: do not try out photos or videos for identification
recNotBioDisplayMode	Non-live screen display text type	Int	N	Non-live screen display text type ● 1: Do not try out photos or video for identification (default) ● 100: Customize

recNotBioDisplayCustom	Non-live screen displays text content	String	N	Non-live screen displays text custom content ● *If recNotBioDisplayMode is 100, this field is mandatory and cannot be empty* ● The content only allows digital, Chinese and Chinese symbols, and the length is limited to 255 characters. For example: do not try out photos or videos for identification!
recNoPerTtsMode	Insufficient permission for voice mode	Int	N	Insufficient permission for voice mode ● 1: Do not broadcast the voice message ● 2: Voice broadcast "insufficient permission, please contact the administrator" (default) ● 100: Custom permission is insufficient voice
recNoPerTtsCustom	Voice broadcast custom content	String	N	Voice broadcast custom content ● If recNoPerTtsMode is 100, this field is mandatory and cannot be empty ● Content is only allowed for numbers, English, and Chinese characters, and the length is limited to 255 characters. If the permission is insufficient, please contact the administrator
recNoPerDisplayMode	Insufficient permission is required on the screen to display the text type	Int	N	Insufficient permission is required on the screen to display the text type ● 1 Insufficient privileges, please contact the administrator (default) ● 100, and was custom-defined
recNoPerDisplayCustom	Insufficient permission is required on the screen to display the text content	String	N	Insufficient permission screen to display text custom content ● *If recNoPerDisplayMode is 100, this field is mandatory and cannot be empty* ● The content only allows digital, Chinese and Chinese symbols, and the length is limited to 255 characters. If: insufficient authority, please contact the administrator!
recStrangerOpenDoor	Identify whether the stranger opens the door	Int	N	Identify whether the stranger opens the door ● 0: Door is not open (default) ● 1: Open the door

recMultiplayer	Identify many people	Int	N	Identify many people ● 0: Single-person identification (by default) ● 1: Multiplayer identification
recSnapshotSave	Identify the snap snap	Int	N	Identify the snap snap ● 0: Not saved ● 1: Save (by default)
recRecordSave	Identify save records	Int	N	Identify save records ● 0: Not saved ● 1: Save (by default)
recRecordSaveDays	Identify the record holding days	Int	N	Identify the number of days saved to default for 7 days
recRecordUploadMode	Identify the record upload mode	Int	N	Identify the record upload mode ● 1: Real-time upload (by default) ● 2: Break the point of continued transmission
recWhitelistIdcard	Witness comparison whitelist switch	Int	N	Witness comparison whitelist switch ● 0: off (default), read the ID card directly after the human card comparison process ● 1: open, read the ID number and the ID number of all the personnel in the database, if any; if not, the prompt authority is insufficient

Postman instance

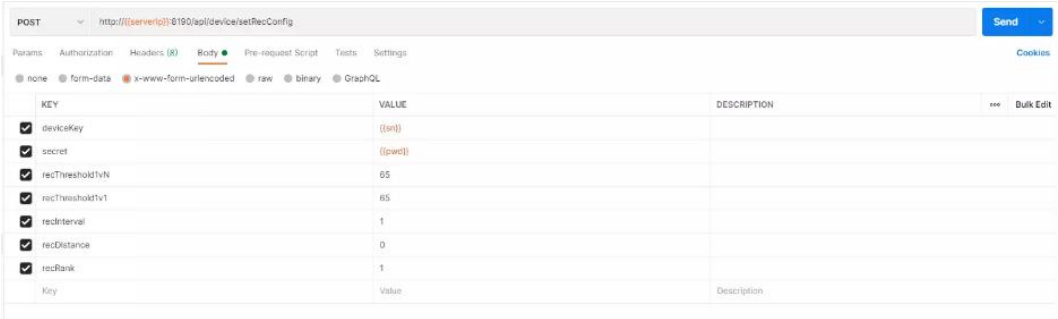

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679626078822,
  "data": {
    "recRecordSave": 1,
    "recSucTtsMode": 2,
    "recRank": 1,
    "recRecordUploadMode": 1,
    "recRecordSaveDays": 7,
    "recNotBioDisplayMode": 1,
    "recNotBioTtsMode": 1,
    "recSucDisplayMode": 1,
    "recWhitelistIdcard": 0,
    "recStrangerEnable": 1,
    "recStrangerTtsMode": 1,
    "recThreshold1vN": 65,
    "recThreshold1v1": 65,
    "recDistance": 0,
    "recNoPerTtsMode": 2,
    "recInterval": 1,
    "recSnapshotSave": 1,
    "recStrangerOpenDoor": 0,
    "recSucTtsCustom": "{name}",
    "recIsStrangerTimes": 2,
    "recStrangerDisplayMode": 1,
    "recMultiplayer": 0,
    "recNoPerDisplayMode": 1,
    "recSucDisplayCustom": "{name}"
  },
  "success": true
}
```


3.6 Identification mode configuration

Description: Configure the recognition mode related parameters of the face machine. When interface calling, if the corresponding parameters are not filled, use the system default parameters to set.

Method	URL
POST	http: / / middleware server IP: 8190 / api / device / setRecModeConfig

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
secret	password	String	Y	● Server password set in the communication settings on the face device
deviceKey	Device serial number	String	Y	● Device Serial number, 16-bit
recModeFaceEnable	Face brush mode switch	Int	N	Face brush mode switch ● 0: Close ● 1: On (by default)
recModeCardEnable	Card swiping mode switch	Int	N	Card swiping mode switch ● 0: Close ● 1: On (by default)
recModeCardIntf	Card number transmission interface	Int	N	Card number transmission interface ● 1: egen (default) ● 2: TTL serial port ● 3 : USB
recModeCardIntfPort	Card number transfer serial port number	Int	N	Card number The port number of the transmission serial port *This field takes effect when the transfer interface recModeCardIntf is configured as a serial port* ● 1 : ttyS1 ● 2 : ttyS2 ● 3: ttyS3 (by default) ● 4 : ttyS4 ● 100: Customize
recModeCardIntfPortCustom	Custom card number transfer interface port number	String	N	Customize the card number and define the port number of the transfer interface *This field takes effect when the transfer interface port recModeCardIntfPort is configured to 100*
recModeCardIntfBaudrate	Card number transmission serial port port rate	Int	N	The card number transmits the port rate of the serial port *This field takes effect when the transfer interface recModeCardIntf is configured as a serial port* ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4:115200 (by default)

recModeIdcardEnable	Certificate comparison switch	Int	N	Certificate comparison switch ● 0: Off (by default) ● 1: Open
recModeIdcardIntf	ID card module transmission interface	Int	N	ID card module transmission interface ● 1: TTL serial port ● 2:232 serial port ● 3: USB (by default)
recModeIdcardIntfPort	ID card transmission serial port port number	Int	N	Port number of the id card transmission serial port This field takes effect when the ID card transmission interface is configured as a serial port ● 1 : ttyS1 ● 2: ttyS2 (by default) ● 3 : ttyS3 ● 4 : ttyS4 ● 100: Customize
recModeIdcardIntfPortCustom	Customize the ID card transmission interface port number	String	N	Customize the port number of the ID card transmission interface *This field takes effect when the ID transport interface port recModeIdcardIntfPort is configured to 100*
recModeIdcardIntfBaudrate	ID card transmission serial port port rate	Int	N	Baud rate of the ID card transmission serial port This field takes effect when the ID card transmission interface is configured as a serial port ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4:115200 (by default)
recModeQrcodeEnable	Brush the QR code mode switch	Int	N	Brush the QR code mode switch ● 0: Off (by default) ● 1: Open
recModeQrcodeIntf	The QR code transmission interface	Int	N	The QR code transmission interface ● 1: TTL serial port (by default) ● 2:232 serial port ● 3 : USB

recModeQrcodeIntfPort	QR code transmission serial port port number	Int	N	Port number of the QR code transmission serial port *This field takes effect when the recModeQrcodeIntf is configured as a serial port* ● 1 : ttyS1 ● 2: ttyS2 (by default) ● 3 : ttyS3 ● 4 : ttyS4 ● 100: Customize
recModeQrcodeIntfPortCustom	Customize the QR code transmission interface port number	String	N	Customize the port number of the QR code transmission interface *This field takes effect when the QR code transmission interface port recModeQrcodeIntfPort is configured to 100*
recModeQrcodeIntfBaudrate	QR code transmission serial port port rate	Int	N	The port rate of the QR code transmission serial port *This field takes effect when the recModeQrcodeIntfPort is configured as a serial port* ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4:115200 (by default)
recModePalmEnable	Palm print recognition switch	Int	N	Palm print recognition switch ● 0: Off (by default) ● 1: Open
recModeFingerEnable	Fingerprint recognition switch	Int	N	Fingerprint recognition switch ● 0: Off (by default) ● 1: Open

Postman instance

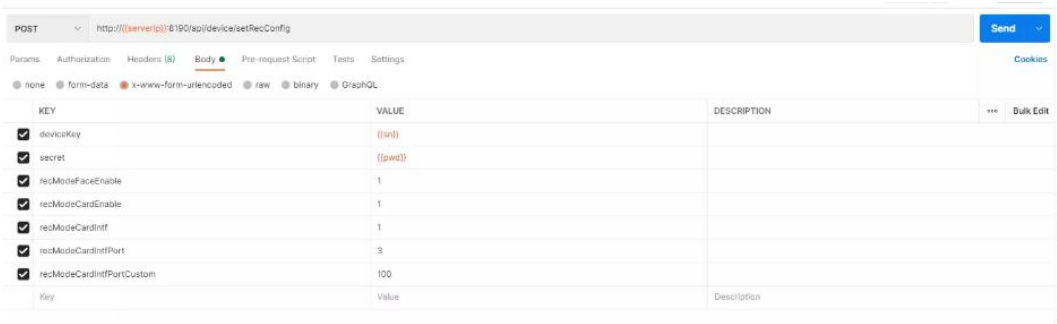

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679626231715,
  "data": {
    "recRecordSave": 1,
    "recSucTtsMode": 2,
    "recRank": 1,
    "recRecordUploadMode": 1,
    "recRecordSaveDays": 7,
    "recNotBioDisplayMode": 1,
    "recNotBioTtsMode": 1,
    "recSucDisplayMode": 1,
    "recWhitelistIdcard": 0,
    "recStrangerEnable": 1,
    "recStrangerTtsMode": 1,
    "recThreshold1vN": 65,
    "recThreshold1v1": 60,
    "recDistance": 0,
    "recNoPerTtsMode": 2,
    "recInterval": 3,
    "recSnapshotSave": 1,
    "recStrangerOpenDoor": 0,
    "recSucTtsCustom": "{name}",
    "recIsStrangerTimes": 2,
    "recStrangerDisplayMode": 1,
    "recMultiplayer": 0,
    "recNoPerDisplayMode": 1,
    "recSucDisplayCustom": "{name}"
  },
  "success": true
}
```


Code code description

code a sign or object indicating number	msg
100201	Device restart failed without ROOT

3.7 Peripheral configuration

Description: Configure the relevant parameters of the peripheral mode of the face machine.

When interface calling, if the corresponding parameters are not filled, use the system default parameters to set.

Method	URL
POST	http: / / middleware server IP: 8190 / api / device / setPciConfig

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	● Device Serial number, 16-bit
secret	password	String	Y	● Server password set in the communication settings on the face device
pciRelayOut	relay output	Int	N	relay output ● 0: Not open the door ● 1: Open the door (by default)
pciRelayMode	Relay mode	Int	N	Relay mode ● 1: Open often ● 2: Often closed
pciRelayDelay	Relay control time	Int	N	Relay control time ● 1,000-ms (by default) ● Relay controls the time interval between opening and closing, with the default 1000ms. Please enter an integer between 100 and 25500 and take the hundred down. For example: input an integer between 101 and 199, the actual effect is 100ms.
pciWgType	Weigen type	Int	N	Weigen type ● 1: ergen 26 (default) ● 2: Weigen-34 ● 1-3: Weigen-37
pciWgOut	Weigen output type	Int	N	Weigen output type ● 0: No output (default) ● 1: Output the personnel id ● 2: Output the card number
pciComOut	Serial port output type	Int	N	Serial port output type ● 0: No output (default) ● 1: Output the personnel id ● 2: Output the card number ● 3: Output the ID card ● 100: Customize

pciComOutCustom	Serial port output custom content	String	N	Serial port output custom content This field takes effect when the serial port output type pciComOut is configured to be 100
pciComOutPort	Serial port output port	Int	N	Serial port output port ● 1 : ttyS1 ● 2 : ttyS2 ● 3 : ttyS3 ● 4 : ttyS4 ● 100: Customize
pciComOutPortCustom	Serial port output port customization	String	N	Serial port output port customization This field takes effect when the serial port output port pciComOutPort is configured to 100
pciComOutBaudrate	Serial output port rate	Int	N	Serial output port rate ● 1 : 9600 ● 2 : 19200 ● 3 : 38400 ● 4:115200 (by default)
pciLedAlwaysEnable	The light is often bright	Int	N	The light is often bright ● 0: Not always bright (default) ● 1: Often bright
pciLedColorStranger	Color of light color (stranger)	Int	N	Color of light color (stranger) ● 1: Red light (default) ● 2: Green light

Postman instance

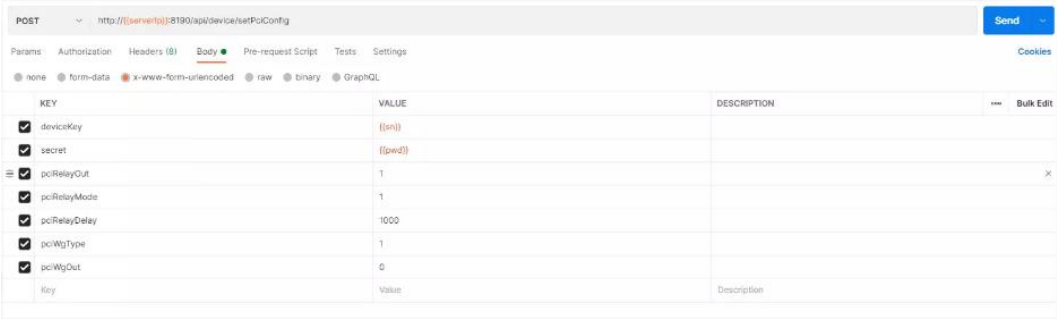

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679626704622,
  "data": {
    "pciLedAlwaysEnable": 0,
    "pciRelayMode": 1,
    "pciComOutBaudrate": 4,
    "pciRelayDelay": 1000,
    "pciComOut": 0,
    "pciRelayOut": 1,
    "pciComOutPort": 4,
    "pciWgOut": 0,
    "pciLedColorStranger": 1,
    "pciWgType": 1
  },
  "success": true
}
```


3.8 Interface display configuration

Description: Configure the relevant parameters of the interface display of the face machine.

When interface calling, if the corresponding parameters are not filled, use the system default parameters to set.

Method	URL
POST	http: / / middleware server IP: 8190 / api / device / setUiConfig

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	● Device Serial number, 16-bit
secret	password	String	Y	● Server password set in the communication settings on the face device
uiCompanyName	The interface displays the name of the company	String	N	Company name as displayed on the apk interface

uiShowSn	The main interface displays the device serial number	Int	N	Whether the apk main interface displays the device serial number ● 0: Hidden ● 1: Display (by default)
uiShowIp	Whether the main interface shows the middleware server IP	Int	N	Whether the apk main interface shows the middleware server IP ● 0: Hidden ● 1: Display (by default)
uiShowPerson Count	Whether the main interface displays the number of people	Int	N	Whether the apk main interface displays the number of people ● 0: Hidden ● 1: Display (by default)
uiScreensaver Wait	Enter the screensaver for waiting time	Int	N	● The apk goes into the screensaver for waiting time in seconds

Postman instance

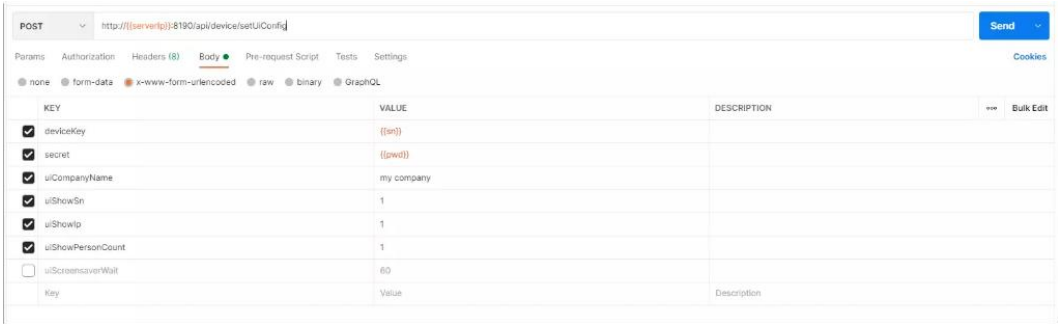

Return an example


```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679626662705,
  "data": {
    "pciLedAlwaysEnable": 0,
    "pciRelayMode": 1,
    "pciComOutBaudrate": 4,
    "pciRelayDelay": 1000,
    "pciComOut": 0,
    "pciRelayOut": 1,
    "pciComOutPort": 4,
    "pciWgOut": 0,
    "pciLedColorStranger": 1,
    "pciWgType": 1
  },
  "success": true
}
```

3.9 Server configuration

Description: Configure the server-related parameters of the face machine.

When interface calling, if the corresponding parameters are not filled, use the system default parameters to set.

Method	URL
POST	http: / / middleware server IP: 8190 / api / device /setSevConfig

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
sevUploadRecRecordUrl	To upload the url address of the identification record	String	N	**The callback address needs to meet the regular expression: ((http | https): / /) ((a-zA-Z0-9 \._-{2,6})|(0-9{1,3}\.0-9{1,3}))(:0-9*)?**
sevUploadDevHeartbeatUrl	To upload the url address of the device's heartbeat	String	N	ditto
sevUploadRegPersonUrl	Upload the registry person data url address	String	N	ditto
sevUploadRegFingerUrl	The url address for uploading the registered fingerprint data	String	N	ditto
sevUploadAlarmUrl	The url address for uploading the alarm data	String	N	ditto
sevUploadDevHeartbeatInterval	Device heartbeat interval time	Int	N	● Device heartbeat interval time, default 60,10-300

sevUploadRecStrangerDataEnable	Upload for identifying the stranger data switch	Int	N	Whether to upload the identification stranger data switch ● 0: No upload ● 1: Upload (by default)
sevUploadRecSnapshotEnable	Upload identification capture photo switch	Int	N	Whether to upload the recognition capture photo switch ● 0: No upload ● 1: Upload (by default)
sevUploadRecCardDataEnable	Upload the identification of the credit card data switch	Int	N	Whether to upload the data switch identifying identification card ● 0: No upload ● 1: Upload (by default)
sevUploadRecIdcardDataEnable	Upload the identification of the ID card data switch	Int	N	Whether to upload the identification ID card data switch ● 0: No upload ● 1: Upload (by default)
sevUploadRecQrcodeDataEnable	Upload and identify the QR code data switch	Int	N	Whether to upload the identification QR code data switch ● 0: Not upload (default) ● 1: Upload

Postman instance

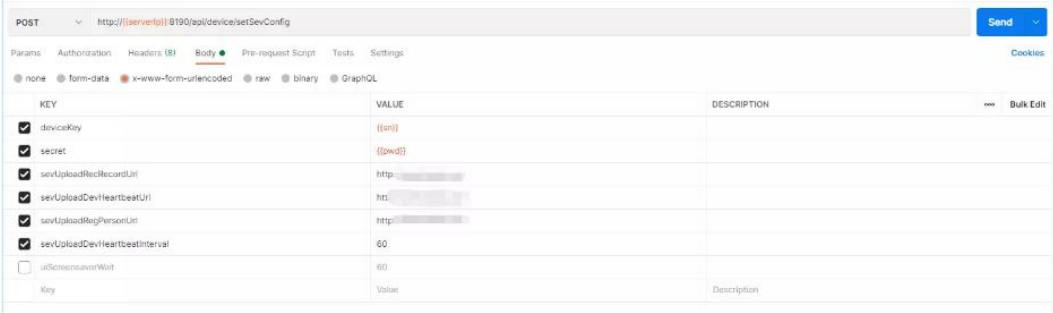

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679626662705,
  "data": {
    "sevUploadDevHeartbeatInterval": 60,
    "sevUploadDevHeartbeatUrl": "http://localhost:8080/heartbeatUrl",
    "sevUploadRecCardDataEnable": 1,
    "sevUploadRecIdcardDataEnable": 1,
    "sevUploadRecQrcodeDataEnable": 0,
    "sevUploadRecRecordUrl": "http://localhost:8080/recordUrl",
    "sevUploadRecSnapshotEnable": 1,
    "sevUploadRecStrangerDataEnable": 1,
    "sevUploadRegPersonUrl": "http://localhost:8080/regPersonUrl"
  },
  "msg": "请求成功"
}
```


3.10 Remote control output (including door opening)

Note: Remote control of face recognition device to open the door, serial port output, Weigen output, custom pop-up window, voice broadcast

Method	URL
POST	http: / / middleware server IP: 8190 / api / device / output

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	● Device Serial number, 16-bit
secret	password	String	Y	● Server password set in the communication settings on the face device

type	Remote output interaction type	Int	Y	Type of device interaction ● 1: Open the door (by default) ● 2: String mouth ● 3: Weigen ● 4: Custom text popup, custom voice broadcast
content	Remote output content	String	N	● Interaction type is set to 1: without setting when opening the door ● Interaction type is set to 2: When the serial port, the content only allows numbers, English and English characters, and the length is limited to 255 characters. ● When the interaction type is set to 3, only numbers are allowed. ● Interaction type is set to 4: when custom pop-up and voice broadcast, the content is set to JSON string

Remote output content content JSON string example when the output type is set to 4:

```
{
  "ttsContent":"自定义语音,不传则不进行语音播报", //语音播报内容
  "displayContent":"自定义文字,不传则弹窗后显示内容为空" //弹窗显示内容
}
```

Postman instance

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679638286576,
  "data": {
    "type": 4,
    "content": "{\"ttsContent\":\"你好\",\"displayContent\":\"你好\"}"
  },
  "success": true
}
```


Code code description

code a sign or object indicating number	msg
100501	The value of content cannot be empty
100502	The length limit of the content is within 255 characters
100503	content, The value of which allows only for numbers
100504	The value of content is a non-interface definition, please consult the interface documentation

3.11 Set up the wired network

Description: Set the other wired network configuration such as the DHCP mode of the face recognition device. The fixed IP of this interface setting is suitable for the network cable connection

Method	URL
POST	http: / / middleware server IP: 8190 / api / device / setNetwork

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device

dhcpEnable	DHCP, mode selection	Int	Y	DHCP, mode selection ● 0: Set IP mode manually, other parameters except subnetMask must be incoming and not empty ● 1: Get IP mode dynamically without passing in other parameters
ip	ip address	String	N	Set up the static IP address of the face recognition device
gateway	gateway	String	N	Set the gateway
subnetMask	subnet mask	String	N	Set the subnet mask
dns	DNS server	String	N	Set up the DNS server

Postman instance

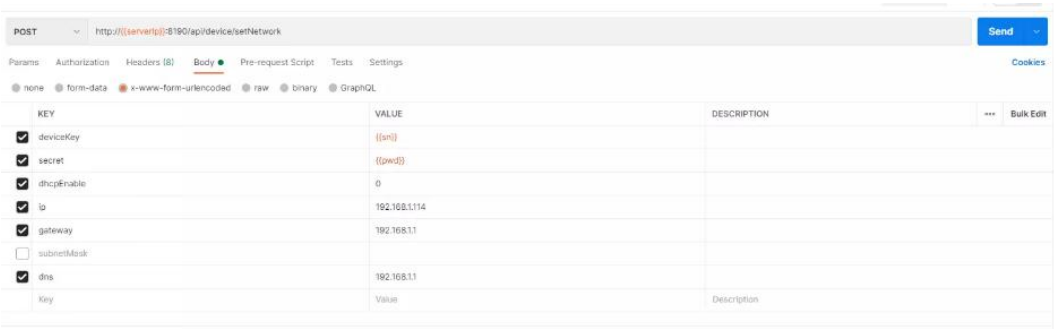

Return an example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679638685598,
    "data": {
        "dhcpEnable": 0,
        "ip": "192.168.1.114",
        "dns": "192.168.1.1",
        "pwd": "",
        "gateway": "192.168.1.1"
    },
    "success": true
}
```

3.12 Set up the upload address

Description: Set up the reported address configuration of the face recognition device

Method	URL
POST	http: / / middleware server IP: 8190 / api / device / setUploadUrl

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
data	List<Object>	List<Object>	Y	Report address parameters
Object .type	Configure the type of reported data url	Int	Y	Configure the type of reported data url ● 0: Empty all the reported addresses ● 1: heartbeat report ● 2: Report the identification record ● 3: Report the data of the registered personnel ● 4: Reporting of fingerprint registration data ● 5: Report the anti-disassembly alarm data
Object .url	Configuration of url	String	N	**The upload address needs to meet the regular expression: ((http | https): / /) ((A-zA-Z0-9 \._-{2,6})|(0-9{1,3}\.0-9{1,3}))(:0-9*)?**

Description of the data request parameter:

```
// data 请求参数为数组格式
[
    {"type": 1, url: "http://www.baidu.com"},
    {"type": 2, url: "http://www.baidu.com"},
    ...
]
```

Postman instance

Return an example

```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679640322132,
    "data": [
        {
            "type": 1,
            "url": "http://www.baidu.com"
        },
        {
            "type": 2,
            "url": "http://www.baidu.com"
        }
    ],
    "success": true
}
```

Identify the record reporting request parameters description:

parameter name	type	Additional instructions
deviceKey	String	Device Serial number, 16-bit
recordId	String	Unique identification of the identification record
personSn	String	Personnel number

personType	Int	Person type 0: Unknown 1: Employee 2: Guest 3: Blacklist
verifyStyle	Int	verification mode ● 0: Any ● 1: Only the human face ● 2: swipe the card only ● 20: Card + human face ● 21: Card + fingerprint ● 3: The fingerprint is the only one ● 30: Fingerprint + human face
checkImgUrl	String	Snap photos of the LAN path
checkImgBase64	String	Snap the photo imgBase64 string
cardNo	String	card number
idCard	String	ID number
voucherCode	String	Certificate number
temperature	String	temperature
attach	String	AI
maskFlag	Int	Mask mark 0: no mask 1: have a mask
capFlag	Int	Hat logo 0: No hat 1: No hat 1
faceFlag	Int	Face brushing id 0: No 1: Yes
cardFlag	Int	Card 0: No 1: Yes
fingerFlag	Int	Fingerprint identification: 0: No.1: Yes

idCardFlag	Int	ID ID 0: No 1: Yes
pwdFlag	Int	Password ID 0: No 1: Yes
palmFlag	Int	Palmprint logo: 0: No 1: Yes
resultFlag	Int	Identification result identification 1: success 2: failure 3: Insufficient permissions
strangerFlag	Int	Stranger ID 0: No 1: Yes
openDoorFlag	Int	Open door sign 0: No 1: Yes
recordTime	Long	Passage time, Unix millisecond timestamp (13 bits)

Identify the reported request response string:

Note If the string is not responded correctly, the record is uploaded repeatedly

```
{"result":1,"code":"000"}
```

Description of the heartbeat report request parameters:

- The device will report the address POST and heartbeat information to the heartbeat every other minute
- No return information, and the device is not processed

parameter name	type	Additional instructions
deviceKey	String	Device Serial number, 16-bit
time	Long	Request time, Unix millisecond timestamp (13-bit)
ip	String	equipment IP
personCount	Int	Number of personnel
faceCount	Int	The number of photos

version	String	Device version number
freeDiskSpace	String	Remaining disk space unit: M

Description of personnel registration report request parameters:

- When the device creation personnel registers the address POST, personnel information
- No return information, and the device is not processed

parameter name	type	Additional instructions
deviceKey	String	Device Serial number, 16-bit
personType	Int	Type of personnel ● 1 Internal staff ● 2 Visitors ● 3 Blacklist
personSn	String	Personnel number / worker number
name	String	Name of personnel
mobile	String	cell-phone number
cardNo	String	card number
idCard	String	ID number
verifyPwd	String	password
voucherCode	String	Certificate number
acGroupNumber	Int	Access control group number

verifyStyle	Int	verification mode ● 0: Any ● 1: Only the human face ● 2: swipe the card only ● 20: Card + human face ● 21: Card + fingerprint ● 3: The fingerprint is the only one ● 30: Fingerprint + human face
expiredType	Int	Exdate type ● 0 Never expire ● 1 Time ● 2 Times ● 3 for time + times
validCount	Int	effective degree
validTimeBegin	Long	Effective time start, Unix millisecond timestamp (13-bit)
validTimeEnd	Long	Effective time end, Unix millisecond timestamp (13-bit)
acTzNumber1	Int	Access period 1 number
acTzNumber2	Int	Access period 2 number
acTzNumber3	Int	Time period # 3
updateTime	Long	Update time, Unix millisecond timestamp (13-bit)
createTime	Long	Creation time, Unix millisecond-level timestamp (13-bit)

Description of parameters of fingerprint registration report request:

- When the device creates the person with the fingerprint, the address POST, fingerprint information
- No return information, and the device is not processed

parameter name	type	Additional instructions

deviceKey	String	Device Serial number, 16-bit
personSn	String	Personnel number / worker number
fingerId	String	Unique identification of the fingerprint feature values
fingerNum	Int	Finger serial number, several fingers, 2 digits ● The first place identifies the left and right hand, 1 left hand and 2 right hand ● The second digit identifies the finger, 1 thumb, 2 index finger, 3 middle finger, 4 ring finger and 5 little thumb
feature	String	Fingerprint feature value
time	Long	Registration time, Unix millisecond timestamp (13-bit)

3.13 APK upgrade

Description: Set up the reported address configuration of the face recognition device

Method	URL
POST	http: / / middleware server IP: 8190 / api / device / upgradeApk

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device

versionCode	apk version number	Int	Y	Upgrade the APK version number
channel	Channel number	String	Y	The channel number of the equipment
apkUpgradeUrl	The apk upgrade address	String	Y	**The apk upgrade address needs to meet the regular expressions: ((http | https): / /) ((a-zA-Z0-9 \._-{2,6})|(0-9{1,3}\.0-9{1,3}))(:0-9*)?**

4. Personnel management interface

4.1 Personnel creation

Description: Create different types of users on a face recognition device

Method	URL
POST	http: / / middleware server IP: 8190 / api / person / create

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	● Device Serial number, 16-bit
secret	password	String	Y	● Server password set in the communication settings on the face device
type	Type of personnel	Int	Y	Type of personnel ● 1: Internal staff ● 2: Visitors ● 3: Blacklist

sn	job number	String	Y	Unique identification of personnel Cannot duplicate personnel creation with another employee number Only numbers and English letters are allowed, case sensitive
name	surname and personal name	String	Y	Name of personnel
cardNo	card number	String	N	Card number, can not be filled when created, the length is unlimited. If the registration person fills in the card number, you can directly brush the card corresponding to the card number for identification, and the screen will also show the name of the person corresponding to the card number
idCard	ID number	String	N	
mobile	cell-phone number	String	N	
verifyPwd	password	String	N	TODO
voucherCode	Certificate number	String	N	TODO
acGroupNumber	Access control group number	Int	N	Corresponding access control authority group number of the personnel When set to 0, means that personnel does not set access authority group (default)
verifyStyle	verification mode	Int	N	This field takes effect when the access authority group is set to 0 ● 0: Any ● 1: Only the human face ● 2: swipe the card only ● 20: Card + human face ● 21: Card + fingerprint ● 3: The fingerprint is the

				only one ● 30: Fingerprint + human face
expiredType	Exdate type	Int	N	The expired type of the person ● 0: Never expired (default) ● 1: Time period ● 2: Number TODO ● 3: Time + times TODO
validTimeBegin	Effective time begins	Long	N	Personnel shelf life start time, Unix millisecond timestamp (13-bit) If the personnel identifies outside the validity period, the device will broadcast "insufficient name permission", and the device screen will display "name + insufficient permission"
validTimeEnd	The effective time is over	Long	N	Personnel expiration date end time, Unix millisecond timestamp (13 bit) If the personnel identifies outside the validity period, the device will broadcast "insufficient name permission", and the device screen will display "name + insufficient permission"

Postman instance

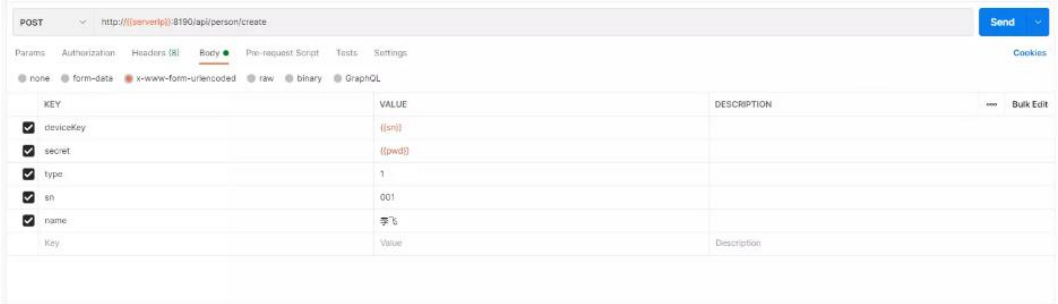

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679640539761,
  "data": {
    "acGroupNumber": 0,
    "expiredType": 0,
    "name": "李飞",
    "sn": "001",
    "type": 1,
    "verifyStyle": 0
  },
  "success": true
}
```


4.2 Personnel update

Description: Update the user information on the face recognition device

Method	URL
POST	http: / / middleware server IP: 8190 / api / person / update

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	● Device Serial number, 16-bit
secret	password	String	Y	● Server password set in the communication settings on the face device
type	Type of personnel	Int	Y	Type of personnel ● 1: Internal staff ● 2: Visitors ● 3: Blacklist

sn	job number	String	Y	Personnel unique identification, When updating, modify the database information in the equipment according to the work number. When the corresponding work number does not exist, the modification will fail. Only numbers and English letters are allowed, case sensitive
name	surname and personal name	String	Y	Name of personnel
cardNo	card number	String	N	Card number, can not be filled when created, the length is unlimited. If the registration person fills in the card number, you can directly brush the card corresponding to the card number for identification, and the screen will also show the name of the person corresponding to the card number
idCard	ID number	String	N	
mobile	cell-phone number	String	N	
verifyPwd	password	String	N	TODO
voucherCode	Certificate number	String	N	TODO
acGroupNumber	Access control group number	Int	N	Corresponding access control authority group number of the personnel When set to 0, means that personnel does not set access authority group (default)
verifyStyle	verification mode	Int	N	This field takes effect when the access authority group is set to 0 ● 0: Any ● 1: Only the human face ● 2: swipe the card only

				● 20: Card + human face ● 21: Card + fingerprint ● 3: The fingerprint is the only one ● 30: Fingerprint + human face
expiredType	Exdate type	Int	N	The expired type of the person ● 0: Never expired (default) ● 1: Time period ● 2: Number TODO ● 3: Time + times TODO
validTimeBegin	Effective time begins	Long	N	Personnel shelf life start time, Unix millisecond timestamp (13-bit) If the personnel identifies outside the validity period, the device will broadcast "insufficient name permission", and the device screen will display "name + insufficient permission"
validTimeEnd	The effective time is over	Long	N	Personnel expiration date end time, Unix millisecond timestamp (13 bit) If the personnel identifies outside the validity period, the device will broadcast "insufficient name permission", and the device screen will display "name + insufficient permission"

Postman instance

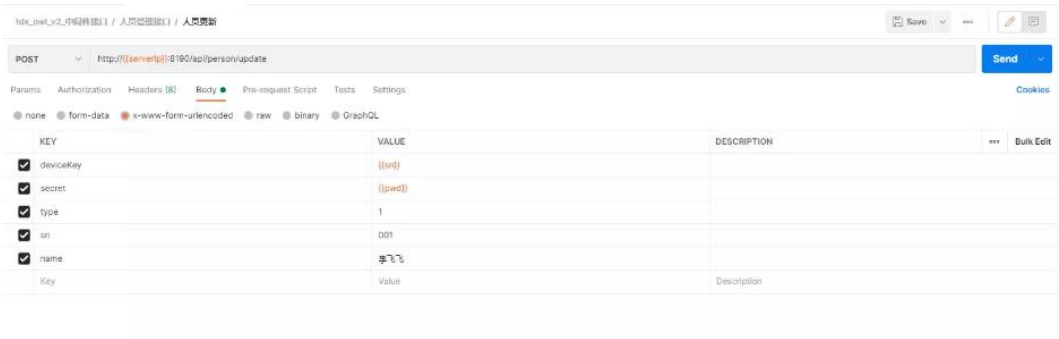

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679640632356,
  "data": {
    "acGroupNumber": 0,
    "expiredType": 0,
    "name": "李飞飞",
    "sn": "001",
    "type": 1,
    "verifyStyle": 0
  },
  "success": true
}
```


4.3 Personnel deletion

Note: Delete the personnel information corresponding to the work number on the face recognition device

Method	URL
POST	http: / / middleware server IP: 8190 / api / person / delete

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
sn	job number	List<String>	Y	To delete the employee number collection, multiple split with a comma

Postman instance

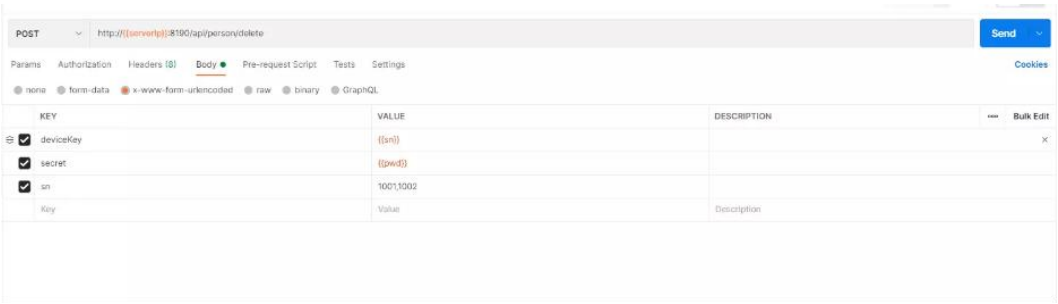

Return an example


```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679641700568,
  "data": {
    "sn": [
      "1001",
      "1002"
    ]
  },
  "success": true
}
```


4.4 Personnel clearance

Description: Empty the information from all users on the device

Method	URL
POST	http: / / middleware server IP: 8190 / api / person / attribute

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device

Postman instance

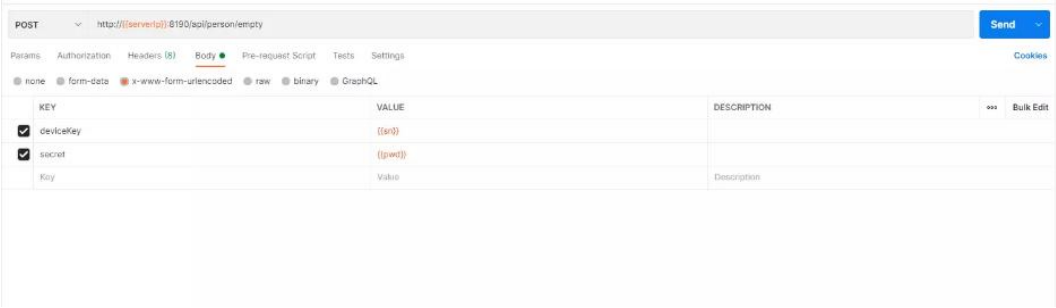

Return an example

```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679641778969,
    "data": null,
    "success": true
}
```

4.5 Personnel search

Description: Find the corresponding user information according to the user's job number, ID number, card number

Method	URL
POST	http: / / middleware server IP: 8190 / api / person / find

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	● Device Serial number, 16-bit
secret	password	String	Y	● Server password set in the communication settings on the face device

type	Find the type	Int	Y	Find the type ● 1: Work number ● 2: ID card ● 3: Card number
key	The corresponding query data	String	Y	

Postman instance

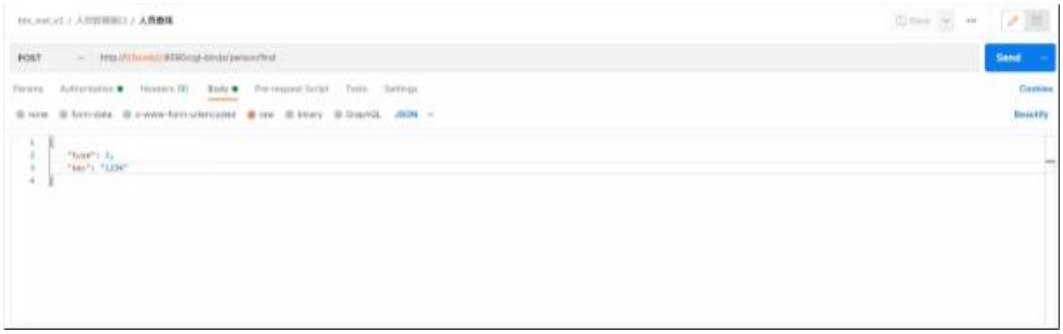

Return an example


```
{
  "code": "000",
  "data": {
    "acGroupNumber": 1, //对应门禁权限组编号
    "cardNo": "123",   //卡号
    "idCard": "1234",   //身份证号
    "mobile": "",       //手机号
    "name": "001",      // 用户名
    "sn": "001",        //工号
    "type": 1,          //用户类型 1：员工 2：访客 3：黑名单
    "updateTime": 1678851969615,  //用户信息修改日期
    "verifyPwd": ""     //用户密码
  },
  "msg": "请求成功"
}
```


4.6 Personnel list search

Description: Paged to query all user information

Method	URL
POST	http: / / middleware server IP: 8190 / api / person / findList

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions

Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
index	page number	Int	Y	Page number, starting at 1
length	Query quantity	Int	N	The number of users per page, default 20

Postman instance

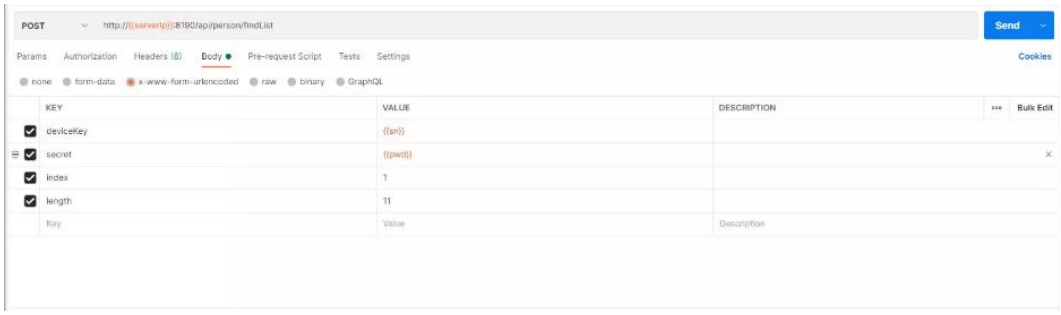

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679642006310,
  "data": [
    {
      "acGroupNumber": 0,
      "expiredType": 0,
      "name": "李飞",
      "updateTime": 1679642033160,
      "sn": "001",
      "type": 1,
      "verifyStyle": 0
    }
  ],
  "success": true
}
```


4.7 Create or update of personnel traffic period

Note: Set the corresponding passage period from Monday to Sunday. Users who pass outside the pass period will show insufficient authority and verification failure

Method	URL
POST	P: http: / / middleware server IP: 8190 / api / person / passtime / merge

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device

sn	job number	List<String>	Y	Person employee number collection, multiple worker numbers are divided with comma
passtimeList	Pass time	String	N	Json string during traffic time Up to 3 sets are allowed. If only 1 section is set, the last two paragraphs can not be passed on Passing time string, the format is start time-end time, the time format is HH: mm, example: 00:00-23:59 middle use-separated

passtimeList Example of the request parameters:

```
[  //通行时段字符串,格式为 开始时间 短横线 结束时间, 时间格式为 HH:mm, 例 : 00:00 23:59 中间用 - 分隔
    {
      "sun": "00:00-23:59", // 星期日通行时间段
      "mon": "00:00-23:59", // 星期一时间段
      "tue": "00:00-23:59", // 星期二时间段
      "wed": "00:00-23:59", // 星期三时间段
      "thurs": "00:00-23:59", // 星期四时间段
      "fri": "00:00-23:59", // 星期五时间段
      "sat": "00:00-23:59" // 星期六时间段
    },
    {
      "sun": "00:00 23:59", // 星期日通行时间段
      "mon": "00:00 23:59", // 星期一时间段
      "tue": "00:00 23:59", // 星期二时间段
      "wed": "00:00 23:59", // 星期三时间段
      "thurs": "00:00 23:59", // 星期四时间段
      "fri": "00:00 23:59", // 星期五时间段
      "sat": "00:00 23:59" // 星期六时间段
    },
]
```

Postman instance

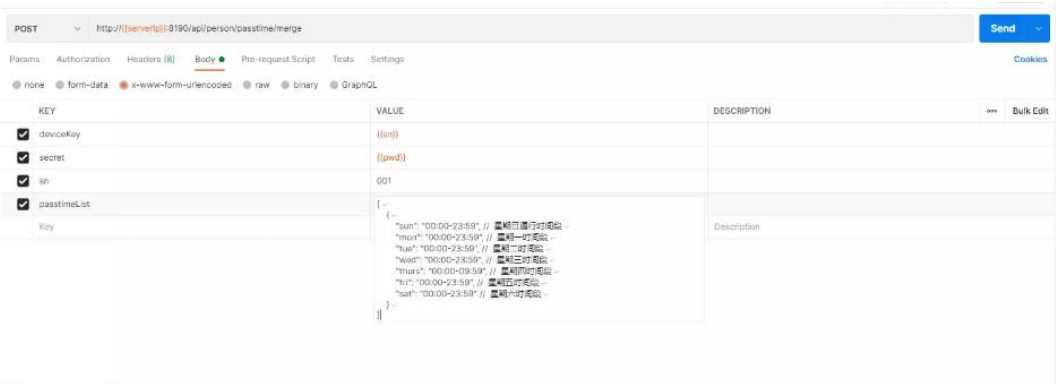

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679645474676,
  "data": {
    "passtimeList": [
      {
        "thurs": "00:00-09:59",
        "tue": "00:00-23:59",
        "sat": "00:00-23:59",
        "wed": "00:00-23:59",
        "fri": "00:00-23:59",
        "mon": "00:00-23:59",
        "sun": "00:00-23:59"
      }
    ],
    "sn": [
      "001"
    ]
  },
  "success": true
}
```


4.8 Delete the personnel travel period

Note: Remove the travel time limit set for users

Method	URL
POST	http: / / middleware server IP: 8190 / api / person / passtime / delete

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit

secret	password	String	Y	Server password set in the communication settings on the face device
sn	page number	List<String>	Y	Person employee number collection, multiple employee numbers are separated by comma

Postman instance

Return an example

```
{
  "code": "000",
  "data": {
    "sn": [
      "001",
      "002"
    ]
  },
  "msg": "请求成功"
}
```

4.9 Personnel creation or update

Description: Create different types of users on a face recognition device, and update the person information if this person already exists

Method	URL
POST	And http: / / device IP: 8190 / api / js / person / merge

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	● Device Serial number, 16-bit
secret	password	String	Y	● Server password set in the communication settings on the face device
type	Type of personnel	Int	Y	Type of personnel ● 1: Internal staff ● 2: Visitors ● 3: Blacklist
sn	job number	String	Y	Unique identification of personnel Cannot duplicate personnel creation with another employee number Only numbers and English letters are allowed, case sensitive Update the person information if it already exists
name	surname and personal name	String	Y	Name of personnel
cardNo	card number	String	N	Card number, can not be filled when created, the length is unlimited. If the registration person fills in the card number, you can directly brush the card corresponding to the card number for identification, and the screen will also show the name of the person corresponding to the card number
idCard	ID number	String	N	
mobile	cell-phone number	String	N	

verifyPwd	password	String	N	
voucherCode	Certificate number	String	N	
acGroupNumber	Access control group number	Int	N	Corresponding access control authority group number of the personnel When set to 0, means that personnel does not set access authority group (default)
verifyStyle	verification mode	Int	N	This field takes effect when the access authority group is set to 0 ● 0: Any ● 1: Only the human face ● 2: swipe the card only ● 20: Card + human face ● 21: Card + fingerprint ● 3: The fingerprint is the only one ● 30: Fingerprint + human face
expiredType	Exdate type	Int	N	The expired type of the person ● 0: Never expired (default) ● 1: Time period ● 2: Number TODO ● 3: Time + times TODO
validTimeBegin	Effective time begins	Long	N	Personnel shelf life start time, Unix millisecond timestamp (13-bit) If the personnel identifies outside the validity period, the device will broadcast "insufficient name permission", and the device screen will display "name + insufficient permission"
validTimeEnd	The effective time is over	Long	N	Personnel expiration date end time, Unix millisecond timestamp (13 bit) If the personnel identifies outside the validity period, the device will broadcast "insufficient name permission", and the device screen will display "name + insufficient permission"

Postman instance

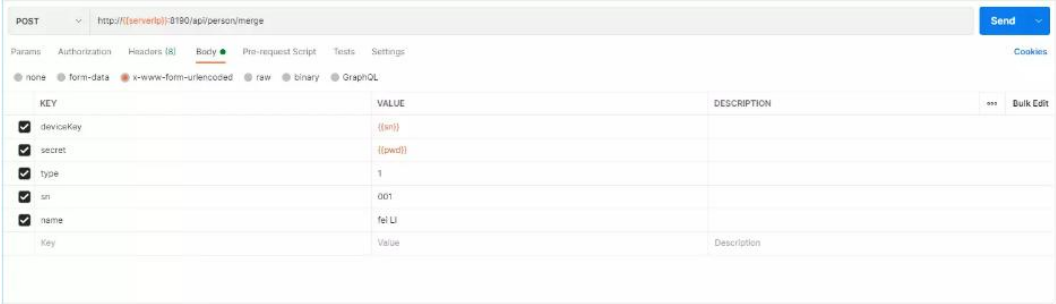

Return an example


```
{
    "code": "000",
    "msg": "请求成功",
    "ts": 1679970273258,
    "data": {
        "acGroupNumber": 0,
        "expiredType": 0,
        "name": "fei LI",
        "sn": "001",
        "type": 1,
        "verifyStyle": 0
    },
    "success": true
}
```


5. Face management interface

5.1 Face creation or update

Note: Register the face recognition photo of the corresponding person through the job number

Method	URL
POST	http: / / middleware server IP: 8190 / api / face / merge

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions

deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
personSn	Person employee number	String	Y	Personnel number, must first be registered personnel
imgUrl	job number	String	Y	Photo of the LAN url address Photos only support http protocol store location pictures
imgBase64	surname and personal name	String		● Photo of the base64 encoded string ● Photo format support for PNG, JPG, JPEF; ● imgBase64 Remove heads such as: data: image / jpeg; base64
easy	card number	Int	N	Test the grade of the quality of the photos ● 0: Strictly test the photo quality ● 1: loose test photo quality

Request instructions

- You must add people before you add pictures
- imgUrl And imgBase64 parameters are required
- Photo format support for PNG, JPG, JPEF;

Postman instance

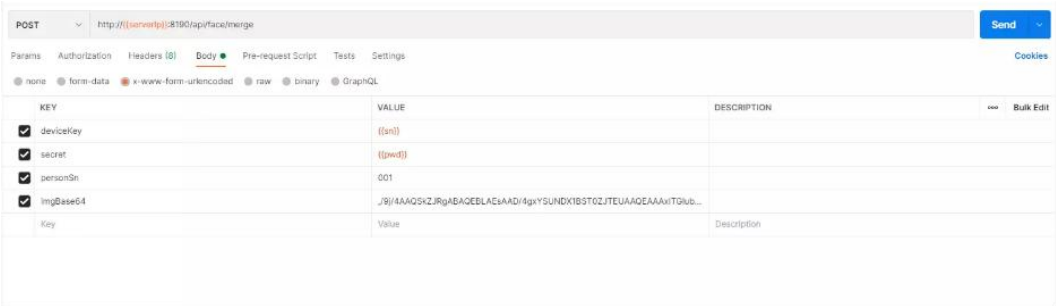

Return an example

```
{
  "code": "000",
  "data": {
    "easy": 0,
    "imgBase64": "./9j/4AAQSkZJRgABAQEBLAEsAAD/4g.....",
    "personSn": "001"
  },
  "msg": "请求成功",
  "ts": 1679645940300,
}
```


5.2 face deletion

Note: Delete the face recognition photos of the corresponding person through the work number

Method	URL
POST	The http: / / middleware server IP: 8190 / api / face / delete

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
sn	Human employee number collection	List<String>	Y	People numbers are set, and multiple people are split by comma

Postman instance

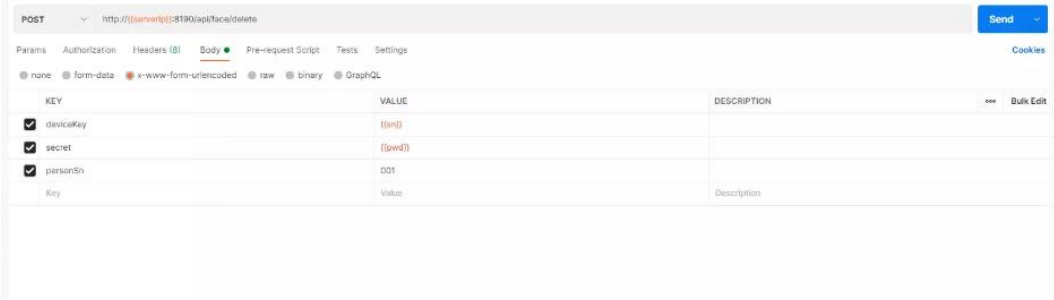

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679645672842,
  "data": {
    "sn": [
      "001",
      "002"
    ]
  },
  "success": true
}
```

5.3 Face search

Description: Query the photo imgBase64 code of the corresponding person on the face recognition device

Method	URL
POST	The http: / / middleware server IP: 8190 / api/face/find

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
personSn	Personnel number	String	Y	Personnel number

Postman instance

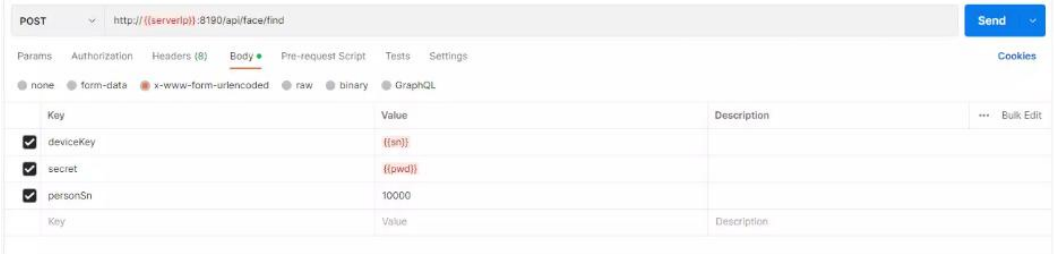

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679970540525,
  "data": {
    "imgBase64": "/9j/4AAQSkZJRgABAQAAAQABAAD/2wBDAA0JC",
    "personSn": "10000",
    "featureData": "xxxxx"
  },
  "success": true
}
```

Return the parameter data description:

parameter name	type	Additional instructions
personSn	String	Work number of personnel
imgBase64	String	The imgbase64 encoding of the photo
featureData	String	Face eigenvalue

Vi. Record and management interface

6.1 Search of traffic record list

Note: query the traffic record of the corresponding personnel on the face recognition equipment

Method	URL
POST	http: / / middleware server IP: 8190 / api / record / findList

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
startTime	Start time stamp of the query	Long	Y	Unix millisecond-level timestamp (13-bit)
endTime	End timestamp of the query	Long	Y	ditto
personSn	job number	String	N	Query the specified user work number, do not pass this parameter will query all
personType	Type of personnel	Int	N	Person type of the query record ● -1: All (by default) ● 0: Unknown ● 1: Employees ● 2: Visitors ● 3: Blacklist
recordType	Find the type	Int	N	The type of record to be quer@@ ● 0: All (by default) ● 1: Brush your face ● 2: swipe a card ● 3: Card + human face ● 4: Fingerprint
index	page number	Int	N	Page number, starting at 1
length	Query the number of records	Int	N	Number of records per query, with a default of 20
order	Sort the way	Int	N	Sort the way ● 0: descending order (default) ● 1: The ascending order

Postman instance

Return an example


```
{
  "code": "000",
  "data": [
    {
      "cardNo": "",  // 卡号
      "checkImgUrl": "http://192.168.1.113:8090/apk_imgs/1678848139154.jpg", // 抓拍照片路径
      "createTime": 1678848139228,  // 通行
      "faceFlag": 1, // 是否是刷脸通行 1: 是 0 : 否
      "id": 153,  // 记录 ID
      "idCard": "", // 身份证号
      "openDoorFlag": 1,  // 是否通行 1: 是 0 : 否
      "personName": "005",  // 用户名
      "personSn": "005",  // 工号
      "resultFlag": 1,  //
      "strangerFlag": 0 // 是否陌生人通行 1 : 是 0 : 否
    },
    {
      "cardNo": "",
      "checkImgUrl": "http://192.168.1.113:8090/apk_imgs/1678848138631.jpg",
      "createTime": 1678848138754,
      "faceFlag": 1,
      "id": 152,
      "idCard": "",
      "openDoorFlag": 1,
      "personName": "005",
      "personSn": "005",
      "resultFlag": 1,
      "strangerFlag": 0
    }
  ],
  "msg": "请求成功"
}
```


Return a description of the parameter data array:

parameter name	type	Additional instructions
id	Long	Record unique identification

personSn	String	The job number of the photographer
personName	String	The name of the snap person
personType	Int	Person type of the query record ● 0: Unknown ● 1: Employees ● 2: Visitors ● 3: Blacklist
checkImgUrl	String	Take a snap photo of the LAN address
cardNo	String	card number
idCard	String	ID number
temperature	String	temperature
attach	String	AI
maskFlag	Int	Wear a mask? 1: Yes 0: No
capFlag	Int	Whether to wear a safety helmet: 1: Yes: 0: No
faceFlag	Int	Is it a face-brushing passage 1: Yes 0: No
cardFlag	Int	Is it a credit card pass 1: Yes 0: No
fingerFlag	Int	Is it a brush fingerprint pass 1: Yes 0: No
idCardFlag	Int	Whether it is a brush ID card pass 1: Yes 0: no
pwdFlag	Int	Is it a check password to pass through 1: Yes 0: No
resultFlag	Int	Identification result identification 1: success 2: failure 3: Insufficient permissions

strangerFlag	Int	Is it a stranger? 1: Yes 0: No
openDoorFlag	Int	Open the door? 1: Yes 0: No
createTime	Long	transit time,

6.2 Delete the traffic records

Note: Delete the traffic record of the corresponding time period on the personnel identification equipment

Method	URL
POST	http: / / middleware server IP: 8190 / api / record / delete

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
startTime	Start the timestamp	Long	Y	Unix millisecond-level timestamp (13-bit)
endTime	End time stamp	Long	Y	ditto
personSn	job number	String	N	Delete the record of the specified user work number, and delete all without passing this parameter

personType	Type of personnel	Int	N	The person type that delete the record ● -1: All (by default) ● 0: Unknown ● 1: Employees ● 2: Visitors ● 3: Blacklist
recordType	Find the type	Int	N	Delete the type of the record ● 0: All (by default) ● 1: Brush your face ● 2: swipe a card ● 3: Card + human face ● 4: Fingerprint
recordId	Record unique identification	Int	N	Record unique identification Corresponding to the traffic record search interface response information in the data, the id in the parameter

Postman instance

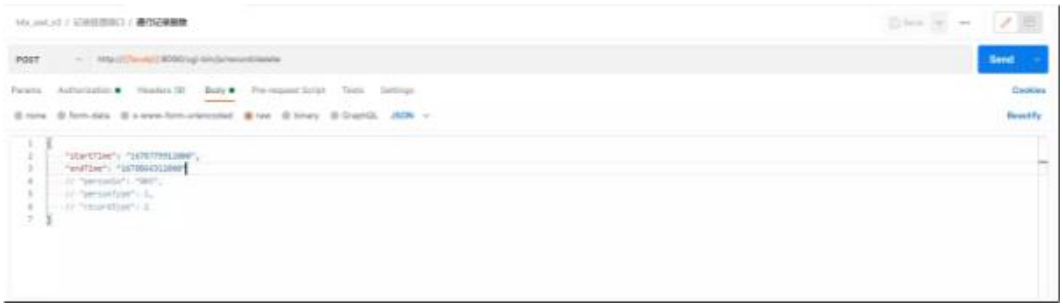

Return an example


```
{
  "code": "000",
  "data": {
    "endTime": 1678866312000,
    "personType": -1,
    "recordType": 0,
    "startTime": 1678779912000
  },
  "msg": "请求成功"
}
```


6.3 Search for traffic records

Note: Query the traffic records of the corresponding personnel on the face recognition device, including the imgBase64 code of the captured photos

Method	URL
POST	http: / / middleware server IP: 8190 / api / record / find

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
recordId	Pass record id	Long	Y	Unique identification of the record in the return information of the record search interface

interface specification

- One more checkImgBase64 snap photo imgBase64 code than the return information of the traffic record list search interface

Postman instance

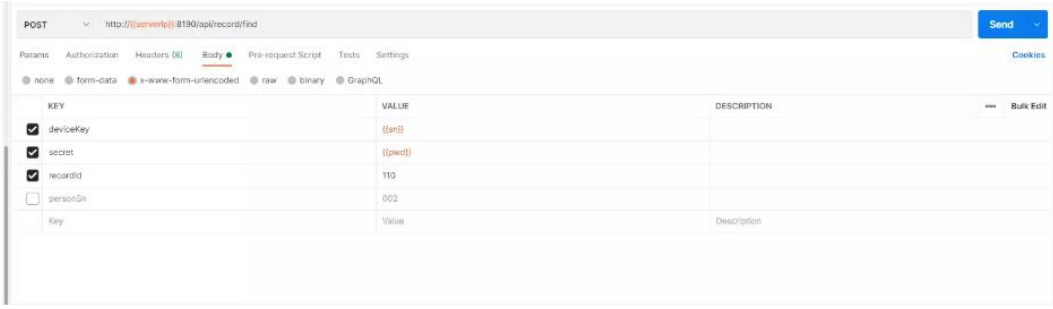

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679970540525,
  "data": {
    "checkImgBase64": "/9j/4AAQSkZJRgABAQAAAQABAAD/2wBDAA0JC",
    "createTime": 1679904178974,
    "strangerFlag": 1,
    "resultFlag": 2,
    "id": 110,
    "personType": 2,
    "faceFlag": 1,
    "openDoorFlag": 0
  },
  "success": true
}
```


Return a description of the parameter data array:

parameter name	type	Additional instructions
id	Long	Record unique identification
personSn	String	The job number of the photographer
personName	String	The name of the snap person
personType	Int	Person type of the query record ● 0: Unknown ● 1: Employees ● 2: Visitors ● 3: Blacklist
checkImgUrl	String	Take a snap photo of the LAN address
checkImgBase64	String	The imgbase64 code of the snap photo
cardNo	String	card number
idCard	String	ID number
voucherCode	String	Certificate number

temperature	String	temperature
attach	String	AI
maskFlag	Int	Wear a mask? 1: Yes 0: No
capFlag	Int	Whether to wear a safety helmet: 1: Yes: 0: No
faceFlag	Int	Is it a face-brushing passage 1: Yes 0: No
cardFlag	Int	Is it a credit card pass 1: Yes 0: No
fingerFlag	Int	Is it a brush fingerprint pass 1: Yes 0: No
idCardFlag	Int	Whether it is a brush ID card pass 1: Yes 0: no
pwdFlag	Int	Is it a check password to pass through 1: Yes 0: No
resultFlag	Int	Identification result identification 1: success 2: failure 3: Insufficient permissions
strangerFlag	Int	Is it a stranger? 1: Yes 0: No
openDoorFlag	Int	Open the door? 1: Yes 0: No
createTime	Long	transit time,

7. Time period management interface

7.1 Time period is created or updated

Description: Create time periods on the face machine

Method	URL
POST	http: / / middleware server IP: 8190 / api / ac / timezone / merge

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
acTzNumber	Time period number	Int	Y	Time period number ● Please enter an integer between 1 and 100. The time period where this number exists on the device will update the information of the corresponding time period
acTzName	Time period name	String	Y	Time period name
sunStart	Sunday start time	String	N	● Format is HH: mm by default: 00:00
sunEnd	Sunday end time	String	N	● Format is HH: mm by default: 23:59
monStart	Monday start time	String	N	Format is HH: mm by default: 00:00
monEnd	Monday to the end of the time	String	N	● Format is HH: mm by default: 23:59
tueStart	Tuesday start time	String	N	● Format is HH: mm by default: 00:00
tueEnd	Tuesday at the end of the time	String	N	● Format is HH: mm by default: 23:59
wedStart	Wednesday start time	String	N	Format is HH: mm by default: 00:00
wedEnd	Wednesday end time	String	N	Format is HH: mm by default: 23:59
thursStart	Thursday start time	String	N	Format is HH: mm by default: 00:00

thursEnd	Thursday is the end of the time	String	N	Format is HH: mm by default: 23:59
friStart	Friday start time	String	N	Format is HH: mm by default: 00:00
friEnd	Friday at the end of the time	String	N	Format is HH: mm by default: 23:59
satStart	Saturday start time	String	N	Format is HH: mm by default: 00:00
satEnd	Saturday is the end time	String	N	Format is HH: mm by default: 23:59

Postman instance

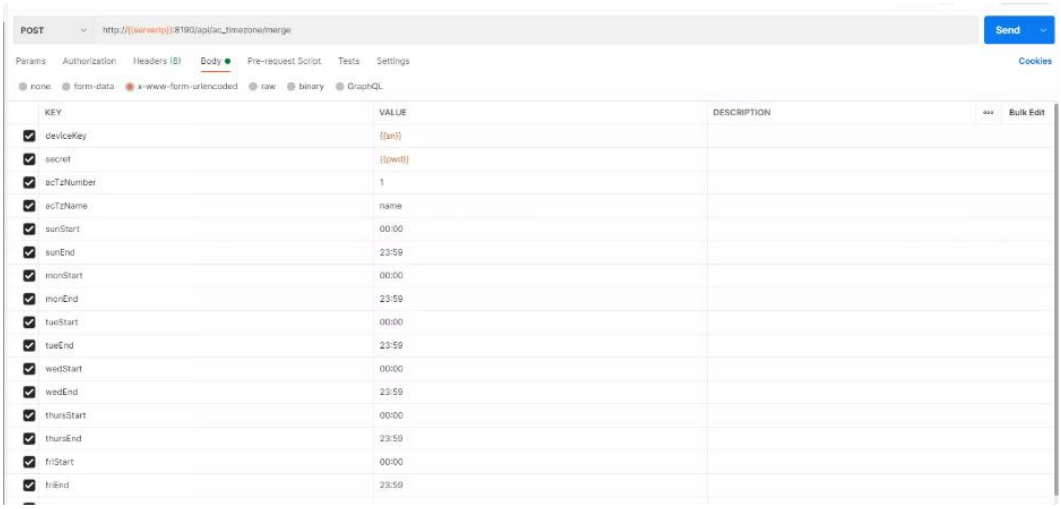

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679970802384,
  "data": {
    "monEnd": "23:59",
    "satStart": "00:00",
    "wedStart": "00:00",
    "monStart": "00:00",
    "tueEnd": "23:59",
    "thursStart": "00:00",
    "thursEnd": "23:59",
    "sunStart": "00:00",
    "wedEnd": "23:59",
    "sunEnd": "23:59",
    "acTzNumber": 1,
    "friStart": "00:00",
    "friEnd": "23:59",
    "tueStart": "00:00",
    "acTzName": "name",
    "satEnd": "23:59"
  },
  "success": true
}
```


7.2 Time period deletion

Note: Delete the corresponding time period on the identification device

Method	URL
POST	http: / / middleware server IP: 8190 / api / ac_timezone / delete

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device

acTzNumber	Time period number	String	Y	Time periods are numbered, and multiple numbers are separated by a comma

Postman instance

Return an example


```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679970970587,
  "data": {
    "acTzNumber": [
      2
    ]
  },
  "success": true
}
```


7.3 Time period list query

Description: Query the access control group list information on the equipment

Method	URL
POST	http: / / middleware server IP: 8190 / api / ac_timezone / findList

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device

acTzNumber	Time period number	String	N	Time periods are numbered, and multiple time periods are divided by comma Without filling in this parameter, return all time period information on the device

Postman instance

Return an example


```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679971159699,
  "data": [
    {
      "monEnd": "23:59",
      "satStart": "00:00",
      "wedStart": "00:00",
      "monStart": "00:00",
      "tueEnd": "23:59",
      "thursStart": "00:00",
      "thursEnd": "23:59",
      "sunStart": "00:00",
      "wedEnd": "23:59",
      "sunEnd": "23:59",
      "acTzNumber": 1,
      "friStart": "00:00",
      "friEnd": "23:59",
      "tueStart": "00:00",
      "satEnd": "23:59"
    }
  ],
  "success": true
}
```


Viii. Access control group management interface

8.1 Creation or update

Description: Create an access control group on the face machine

Method	URL
POST	P: http: / / middleware server IP: 8190 / api / ac / group / merge

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
acGroupNumber	Access control group number	Int	Y	Access control group number ● Please enter an integer between 2 and 50. If this number of access control group exists on the device, the information of the corresponding access control group will be updated
name	Access control group name	String	Y	Access control group name
verifyStyle	verification mode	Int	N	verification mode ● 0: Any ● 1: Only the human face ● 2: swipe the card only ● 20: Card + human face ● 21: Card + fingerprint ● 3: The fingerprint is the only one ● 30: Fingerprint + human face
expiredType	Exdate type	Int	N	Exdate type ● 0 Never expire ● 1 Time ● 2 Times ● 3 for time + times

validTimeBegin	Effective time begins	Long	N	Personnel shelf life start time, Unix millisecond timestamp (13-bit) If the personnel identifies outside the validity period, the device will broadcast "insufficient name permission", and the device screen will display "name + insufficient permission"
validTimeEnd	The effective time is over	Long	N	Personnel expiration date end time, Unix millisecond timestamp (13 bit) ● If the personnel identifies outside the validity period, the device will broadcast "insufficient name permission", and the device screen will display "name + insufficient permission"
validCount	effective degree	Int	N	● TODO
acTzNumber1	Access period 1 number	Int	N	Access period 1 number ● Please enter the integer between 0 and 100 for the corresponding time period
acTzNumber2	Access period 2 number	Int	N	ditto
acTzNumber3	Time period # 3	Int	N	ditto

Postman instance

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679714577770,
  "data": {
    "acGroupNumber": 2,
    "expiredType": 1,
    "name": "门禁组一",
    "acTzNumber2": 2,
    "acTzNumber1": 2,
    "acTzNumber3": 2,
    "verifyStyle": 1
  },
  "success": true
}
```


8.2 Delete of access control group

Note: Delete the corresponding access control group on the personnel identification equipment

Method	URL
POST	http: / / middleware server IP: 8190 / api / ac_group / delete

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
acGroupNumber	Access control group number	String	Y	Access control group number, multiple access control group number is divided with a comma

Postman instance

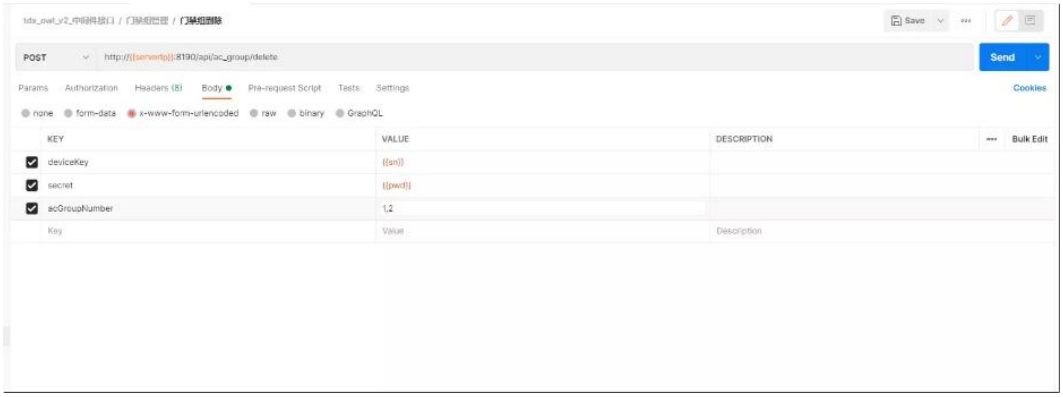

Return an example


```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679715749289,
  "data": {
    "acGroupNumber": [
      1,
      2
    ]
  },
  "success": true
}
```


8.3 Access control group list query

Description: Query the access control group list information on the equipment

Method	URL
POST	http: / / middleware server IP: 8190 / api / ac_group / findList

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device

acGroupNumber	Access control group number	String	N	Access control group number, multiple access control group number is divided with a comma Without filling in this parameter, return all the access control group information on the device

Postman instance

Return an example


```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679715937035,
  "data": [
    {
      "acGroupNumber": 1,  //门禁组编号
      "expiredType": 1,   //过期类型  0 永不过期  1 时间  2 次数 3 时间+次数
      "name": "门禁组一",  //门禁组名称
      "acTzNumber2": 2,   //通行时段 2 编号
      "acTzNumber1": 2,   //通行时段 1 编号
      "acTzNumber3": 2,   //通行时段 3 编号
      "verifyStyle": 1    //验证方式 0 人脸/刷卡/指纹(任意一种) 1 仅人脸 2 仅刷卡 20 卡+人脸 3 仅指纹
    },
    {
      "acGroupNumber": 2,
      "expiredType": 1,
      "name": "门禁组二",
      "acTzNumber2": 2,
      "acTzNumber1": 2,
      "acTzNumber3": 2,
      "verifyStyle": 1
    }
  ],
  "success": true
}
```


Code code description

code a sign or object indicating number	msg
101101	The value of personType is an integer between-1-3
101102	The value of findType is an integer greater than 0
101103	The value of startTime is misformed
101104	The value of endTime is misformed
101105	The value of the endTime should be greater than the startTime
101106	The value of recordId should be greater than 0

9. Fingerprint management interface

9.1 Fingerprint creation or update

Note: Register the face recognition photo of the corresponding person through the job number

Method	URL
POST	http: / / middleware server IP: 8190 / api / finger / merge

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
fingerMergeList	Fingerprint parameters	List<Object>	Y	Array of fingerprint parameters
Object.personSn	Person employee number	String	Y	Personnel number, must first be registered personnel
Object.fingerId	Unique identification of the characteristic value	String	Y	Unique identification of the characteristic value

Object.fingerNum	Several fingers, 2 digits	Int	Y	Several fingers, 2 examples: 12 for the left thumb ● The first digit identifies the left and right hand ○ 1: Left hand 2: Right hand ● 2nd digit 1: Thumb 2: index finger 3: middle finger 4: ring finger 5: little finger
Object.feature	eigenvalue	String	Y	

fingerMergeList Parameter description:

```
// 参数为 List<Object> 类型
[
  {
    "personSn": "004", // 人员编号，必须先注册人员
    "fingerId": "001", // 特征值的唯一标识
    "fingerNum": 21,  // 手指数 右手大拇指
    "feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..."  // feature
  },
  {
    "personSn": "004",
    "fingerId": "001",
    "fingerNum": 22,
    "feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..."
  }
]
```

Postman instance

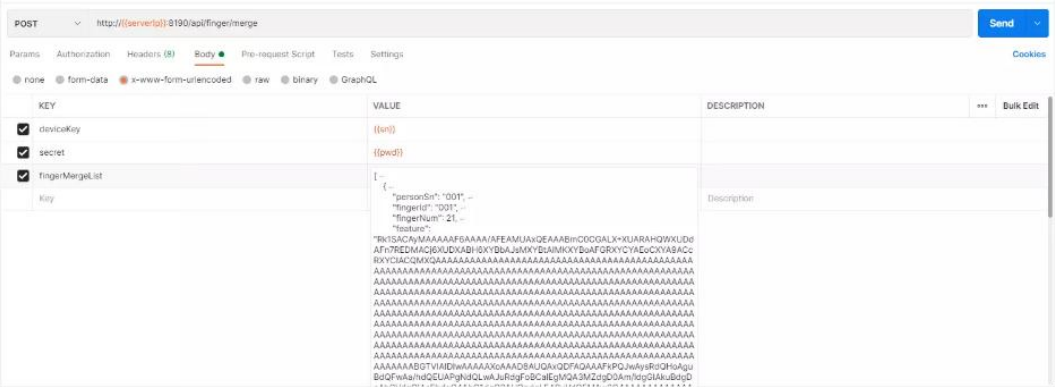

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679971461163,
  "data": [
    {
      "fingerId": "001",
      "feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABmC0CG",
      "fingerNum": 21,
      "personSn": "001"
    }
  ],
  "success": true
}
```


9.2 Fingerprint deletion

Note: Delete the corresponding access control group on the personnel identification equipment

Method	URL
POST	The http: / / middleware server IP: 8190 / api/finger/delete

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
personSn	Person employee number	String	Y	Unique identification of personnel
fingerId	loops and whorls on a finger ID	String	Y	Fingerprint unique identification

Postman instance

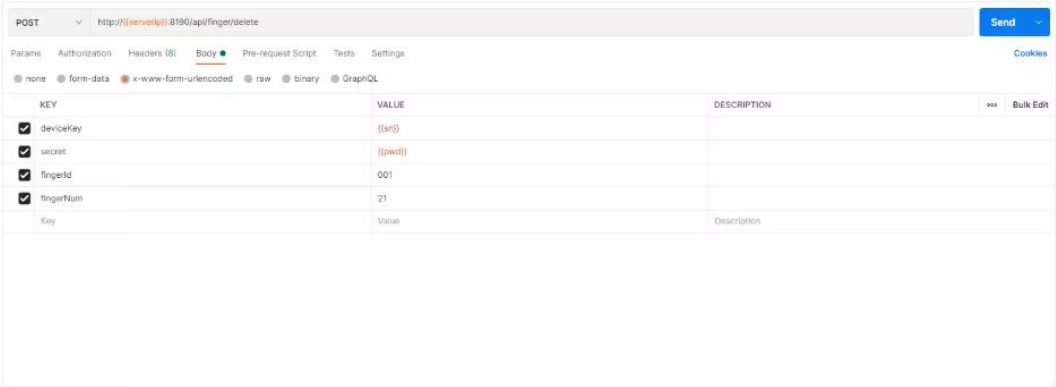

Return an example

```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679971548362,
  "data": {
    "fingerId": "001"
  },
  "success": true
}
```

9.3 Fingerprint search

Description: Query the access control group list information on the equipment

Method	URL
POST	http: / / middleware server IP: 8190 / api / finger / find

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
personSn	Person employee number	String	Y	Unique identification of personnel

Postman instance

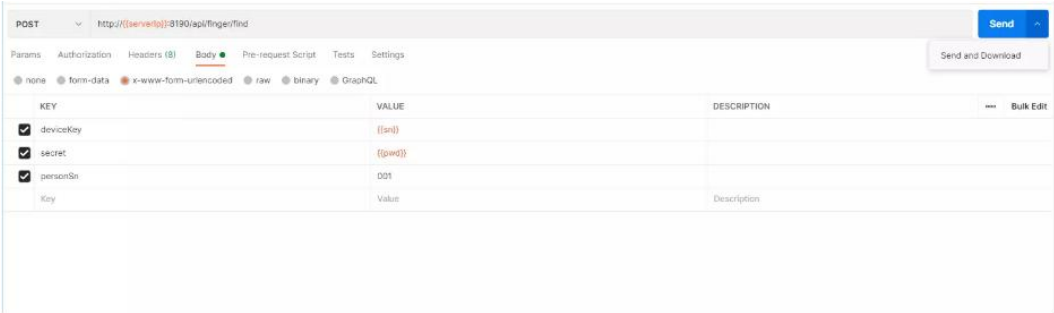

Return an example


```
{
  "code": "000",
  "msg": "请求成功",
  "ts": 1679971777203,
  "data": [
    {
      "fingerId": "001",
      "feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABmC0C",
      "createTime": 1679971781649,
      "fingerNum": 21,
      "personSn": "001"
    }
  ],
  "success": true
}
```


X. Palmprint / palm vein management interface

10.1 Palmprint / palmar vein is created or updated

Description: Register the palm print / palm vein data of the corresponding person through the work number

Method	URL
POST	The http: / / middleware server IP: 8190 / api/palm /merge

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
palmMergeList	Palmprint parameters	List<Object>	Y	Array of palm print parameters
Object.personSn	Person employee number	String	Y	Personnel number, must first be registered personnel
Object.fingerId	Unique identification of the characteristic value	String	Y	Unique identification of the characteristic value
Object.fingerNum	Which palm	Int	Y	1 Left hand and 2 right hand
Object.feature	eigenvalue	String	Y	

palmMergeList Parameter description:

```
The // parameter is of the List <Object> type
[
{
"personSn": "004", / / person number, must be registered first
"palmId": "001", / /, the unique identification of the feature value
"palmNum": 21, / / 1 left hand, 2 right hand
"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..."    // feature
},
{
"personSn": "004",
"palmId": "001",
"palmNum": 22,
"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABm..."
}
]
```

Postman instance

Return an example

{
"code": "000",
"data": [
{
"feature": "Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAA...",
"palmId": "001",
"palmNum": 21,
"personSn": "004"
}
],
"Msg": "Request is successful"
}

10.2 Palmprint / palmar vein deletion

Note: Delete the palm print / palm vein data of the corresponding person by the work number

Method	URL
POST	The http: / / middleware server IP: 8190 / api/palm/delete

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit

secret	password	String	Y	Server password set in the communication settings on the face device
personSn	Person employee number	String	Y	Unique identification of personnel
palmId	friction ridge ID	String	Y	The sole identification of the palm grain

Postman instance

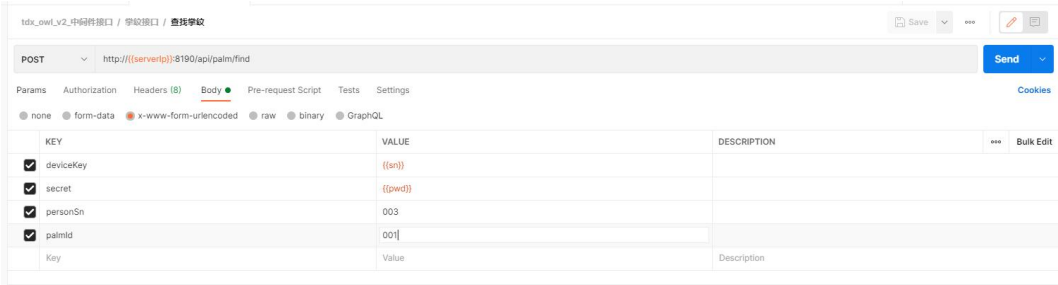

Return an example

{
"code": "000",
"data": {
"palmId": "001",
"personSn": "003"
},
"Msg": "Request is successful"
}

10.3 Palmprint / palmar vein search

Note: Find the palmar print / palm vein data of the corresponding personnel through the work number

Method	URL
POST	The http: / / middleware server IP: 8190 / api/palm/find

Header land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
Content-Type	Request body type	String	Y	application/x-www-form-urlencoded

Body land within certain boundaries

parameter name	description	type	Must pass	Additional instructions
deviceKey	Device serial number	String	Y	Device Serial number, 16-bit
secret	password	String	Y	Server password set in the communication settings on the face device
personSn	Person employee number	String	Y	Unique identification of personnel

Postman instance

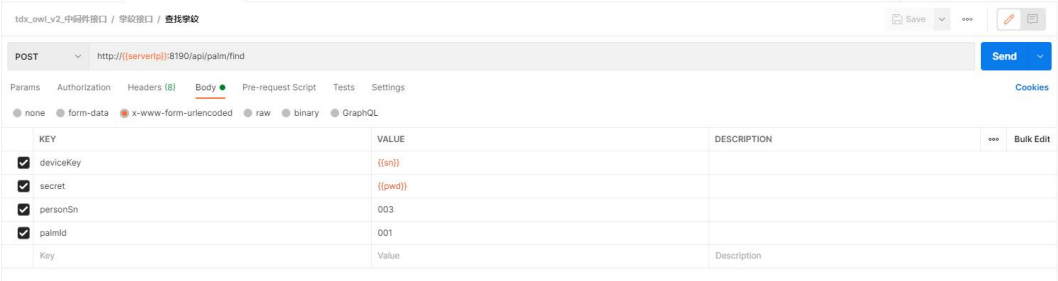

Return an example

{
"code": "000",
"data": [
{
"createTime": 1679731214951, / / created
"feature":
"Rk1SACAyMAAAAAF6AAAA/AFEAMUAxQEAAABmC0CGALX+XUARAHQWXUDdAF...",// eigenvalue
"palmId": "a194ef00d89643eb9500e31b7f2aade6", / / palm / unique identification
"palmNum": 1, / / 1, left hand, 2, right hand
"personSn": "004" / / person employee number
}
],
"Msg": "Request is successful"
}

addendum

1. **Code code description**

code a sign or object indicating number	msg
-1	Equipment is busy, please try again later
000	Request for success
401	Illegal request, the authentication failure
1000	Request parameter error
1001	The value of length is an integer between 0-1000

1. **Support for language / time zone**